

### #01\_WCDMA II\_RMC 12.2Kbps\_Bottom Face\_0mm\_Ch9400


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_201204 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.417$  S/m;  $\epsilon_r = 39.205$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(7.75, 7.75, 7.75) @ 1880 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.06 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 15.04 V/m; Power Drift = 0.10 dB  
Peak SAR (extrapolated) = 2.03 W/kg  
**SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.383 W/kg**  
Maximum value of SAR (measured) = 1.44 W/kg

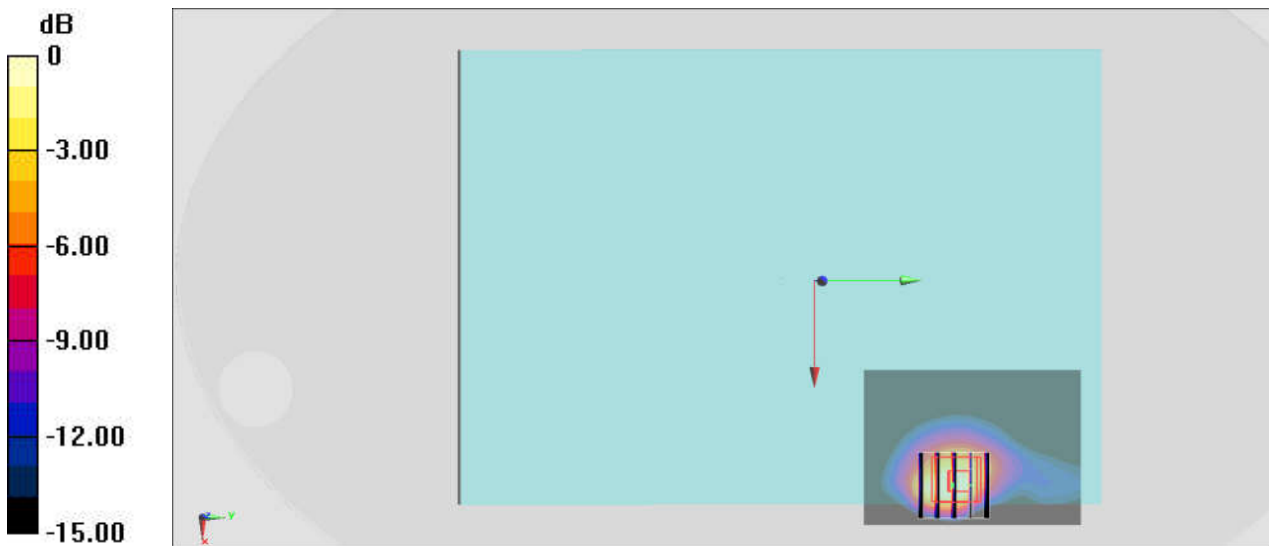

0 dB = 1.44 W/kg = 1.58 dBW/kg

## #02\_WCDMA IV\_RMC 12.2Kbps\_Bottom Face\_0mm\_Ch1413


Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_201207 Medium parameters used:  $f = 1733 \text{ MHz}$ ;  $\sigma = 1.348 \text{ S/m}$ ;  $\epsilon_r = 40.738$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.2 \text{ }^\circ\text{C}$

### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(7.89, 7.89, 7.89) @ 1732.6 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $2.05 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $21.75 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$   
Peak SAR (extrapolated) =  $2.14 \text{ W/kg}$   
**SAR(1 g) =  $0.825 \text{ W/kg}$ ; SAR(10 g) =  $0.387 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $1.40 \text{ W/kg}$

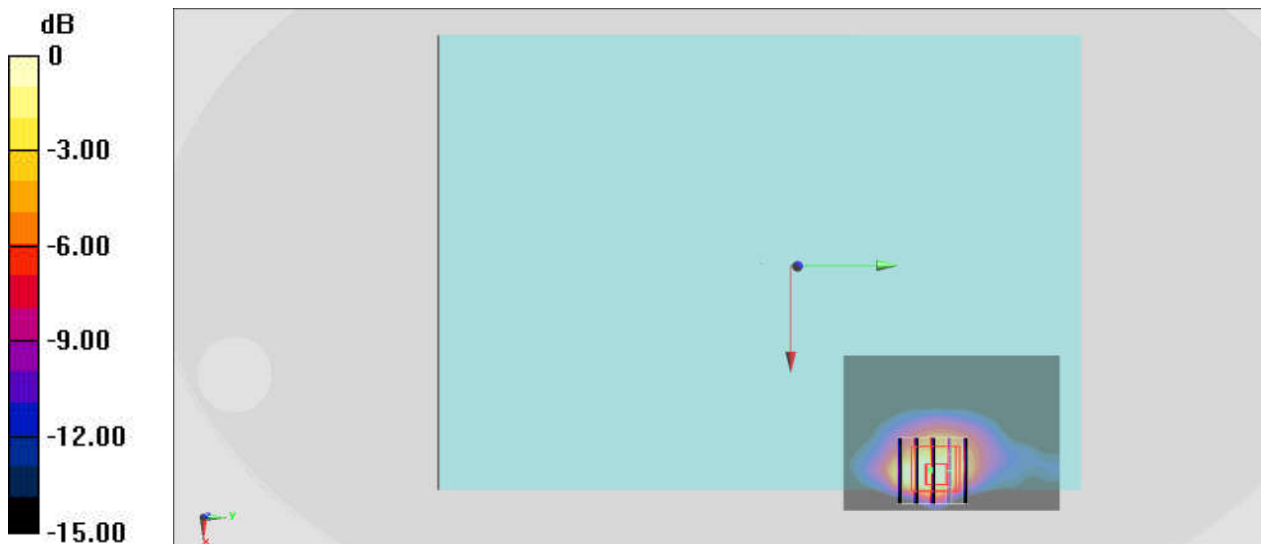

0 dB =  $1.40 \text{ W/kg}$  =  $1.46 \text{ dBW/kg}$

### #03\_WCDMA V\_RMC 12.2Kbps\_Bottom Face\_0mm\_Ch4182


Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_201208 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.907$  S/m;  $\epsilon_r = 42.308$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(8.73, 8.73, 8.73) @ 836.4 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.92 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 38.06 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 2.83 W/kg  
**SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.368 W/kg**  
Maximum value of SAR (measured) = 1.95 W/kg

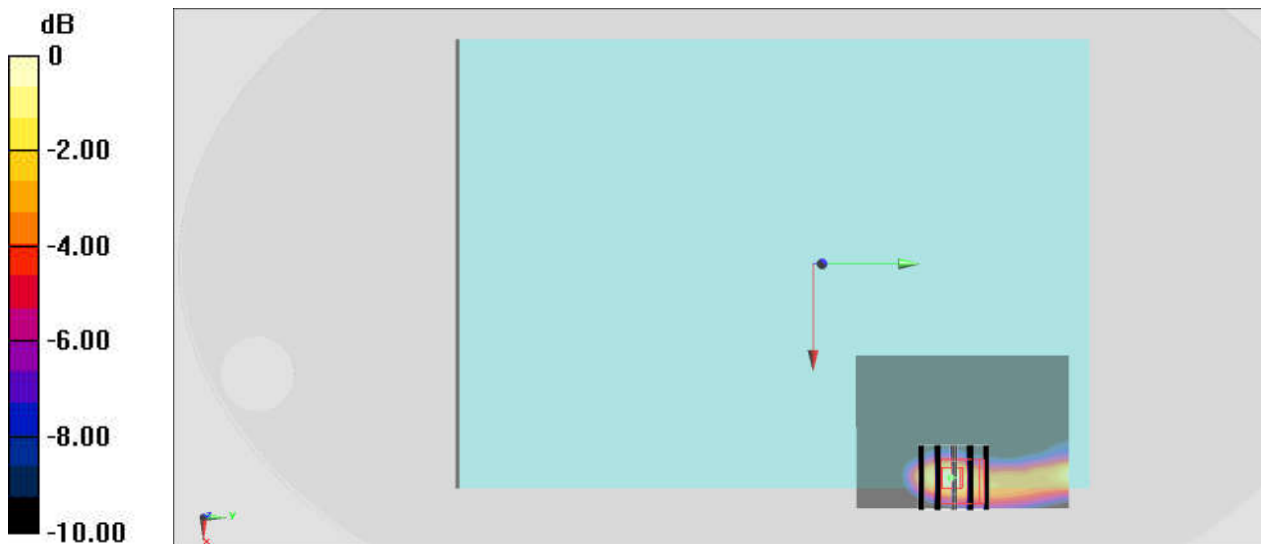

0 dB = 1.95 W/kg = 2.90 dBW/kg

### #04\_LTE Band 2 MIMO2\_20M\_QPSK\_1\_0\_Edge 4\_0mm\_Ch19100


Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_201204 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.439$  S/m;  $\epsilon_r = 39.113$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(7.75, 7.75, 7.75) @ 1900 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.29 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 27.60 V/m; Power Drift = 0.16 dB  
Peak SAR (extrapolated) = 1.40 W/kg  
**SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.230 W/kg**  
Maximum value of SAR (measured) = 1.17 W/kg

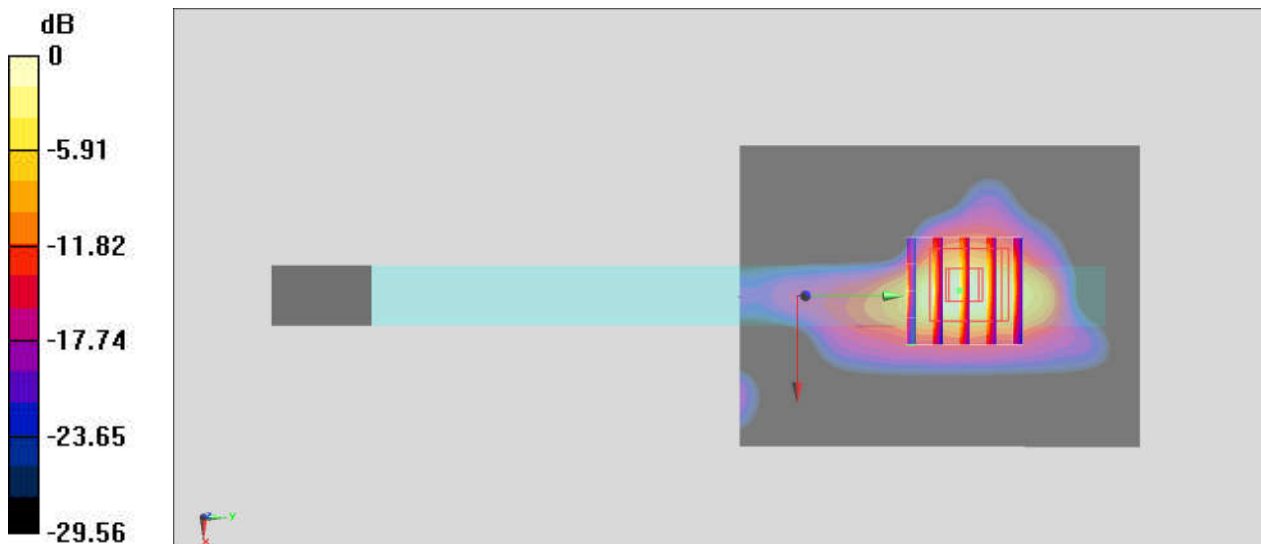

0 dB = 1.17 W/kg = 0.68 dBW/kg

### #05\_LTE Band 5\_10M\_QPSK\_1\_0\_Bottom Face\_0mm\_Ch20525


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_201208 Medium parameters used :  $f = 836.5$  MHz;  $\sigma = 0.907$  S/m;  $\epsilon_r = 42.308$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(8.73, 8.73, 8.73) @ 836.5 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.11 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 28.89 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 3.21 W/kg  
**SAR(1 g) = 0.915 W/kg; SAR(10 g) = 0.357 W/kg**  
Maximum value of SAR (measured) = 2.13 W/kg

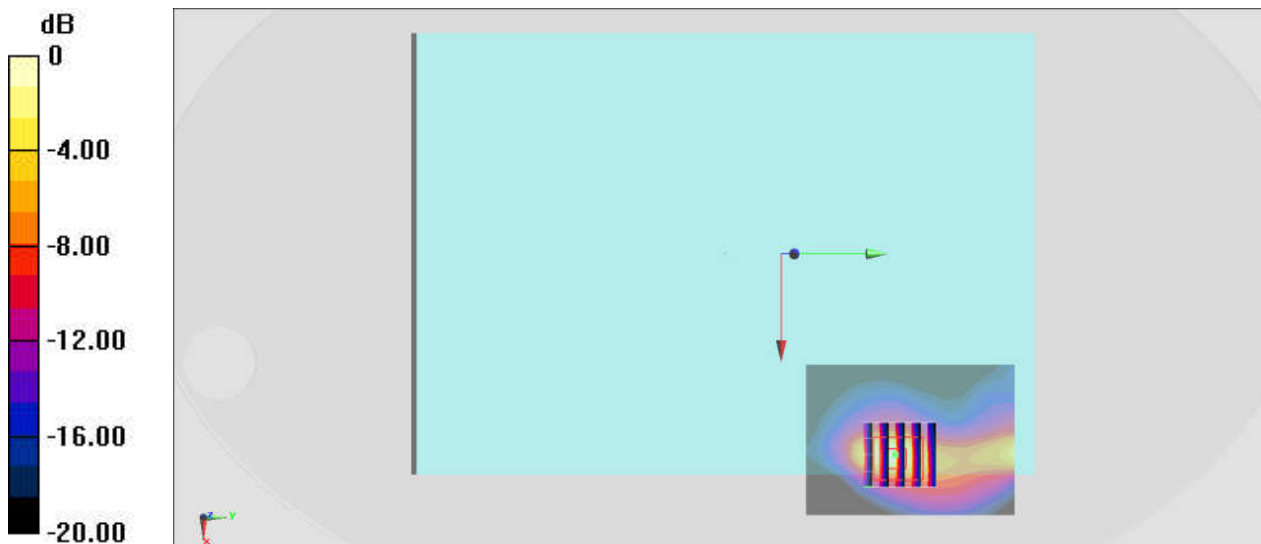

0 dB = 2.13 W/kg = 3.29 dBW/kg

### #06\_LTE Band 7\_20M\_QPSK\_1\_0\_Bottom Face\_0mm\_Ch21100


Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_201206 Medium parameters used :  $f = 2535$  MHz;  $\sigma = 1.889$  S/m;  $\epsilon_r = 37.761$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(6.95, 6.95, 6.95) @ 2535 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 2.73 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 11.43 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 2.55 W/kg  
**SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.375 W/kg**  
Maximum value of SAR (measured) = 1.73 W/kg

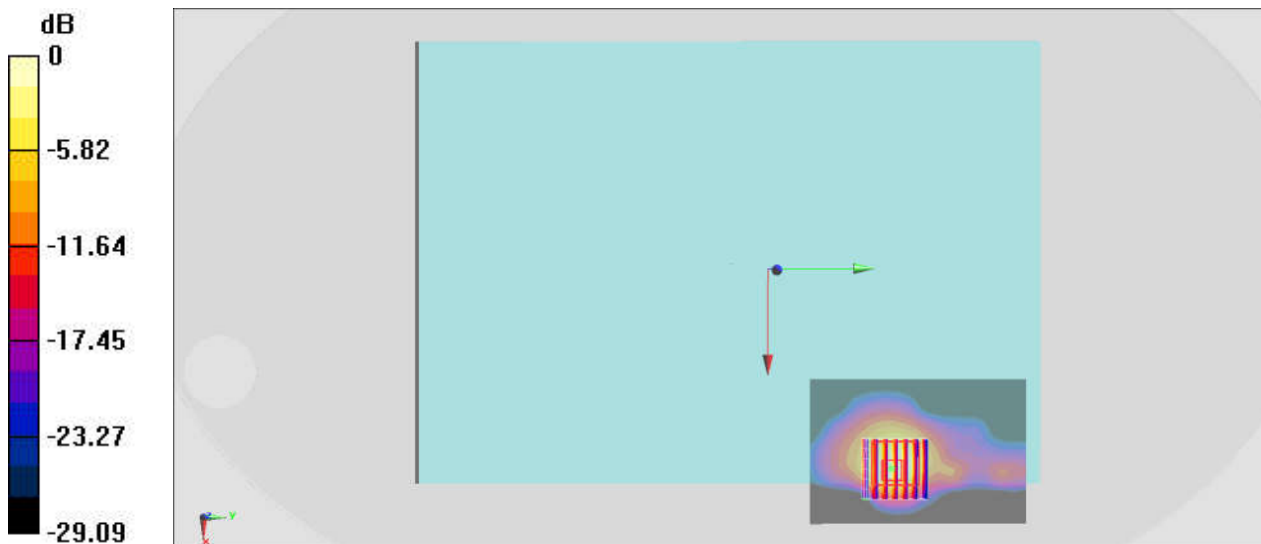

0 dB = 1.73 W/kg = 2.38 dBW/kg

### #07\_LTE Band 12\_10M\_QPSK\_1\_0\_Edge 2\_0mm\_Ch23095


Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_201205 Medium parameters used :  $f = 707.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.914$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(8.9, 8.9, 8.9) @ 707.5 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 3.11 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 20.25 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 5.39 W/kg  
**SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.249 W/kg**  
Maximum value of SAR (measured) = 3.07 W/kg

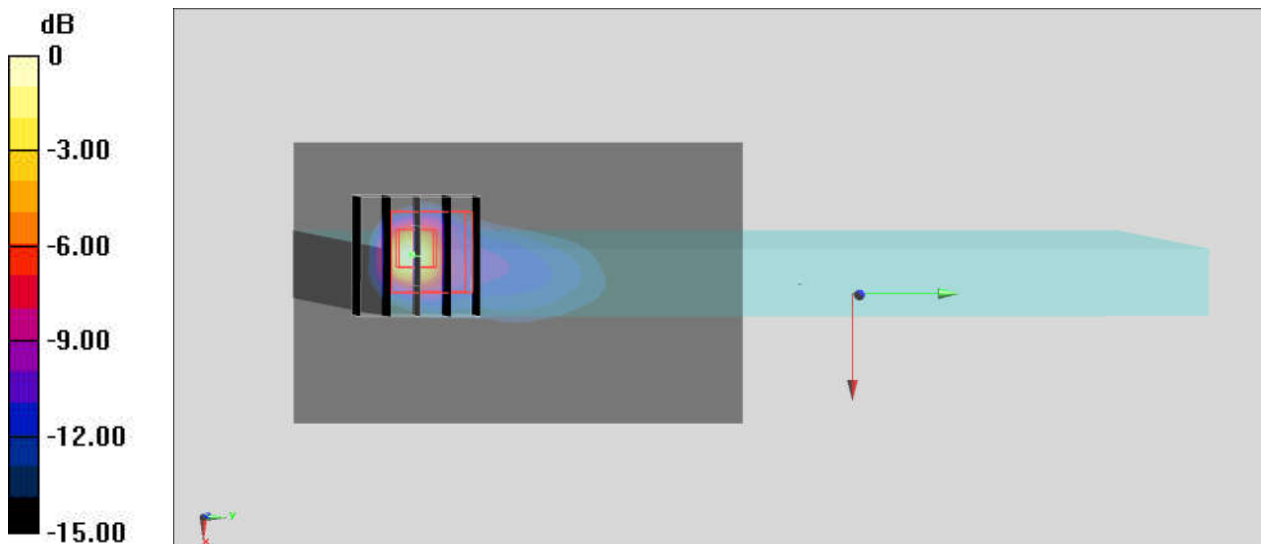

0 dB = 3.07 W/kg = 4.87 dBW/kg

### #08\_LTE Band 13\_10M\_QPSK\_1\_0\_Bottom Face\_0mm\_Ch23230


Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_201205 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.887 \text{ S/m}$ ;  $\epsilon_r = 42.439$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.2 \text{ }^\circ\text{C}$

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(8.9, 8.9, 8.9) @ 782 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $1.62 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $26.65 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$   
Peak SAR (extrapolated) =  $2.84 \text{ W/kg}$   
**SAR(1 g) =  $0.805 \text{ W/kg}$ ; SAR(10 g) =  $0.312 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $1.83 \text{ W/kg}$

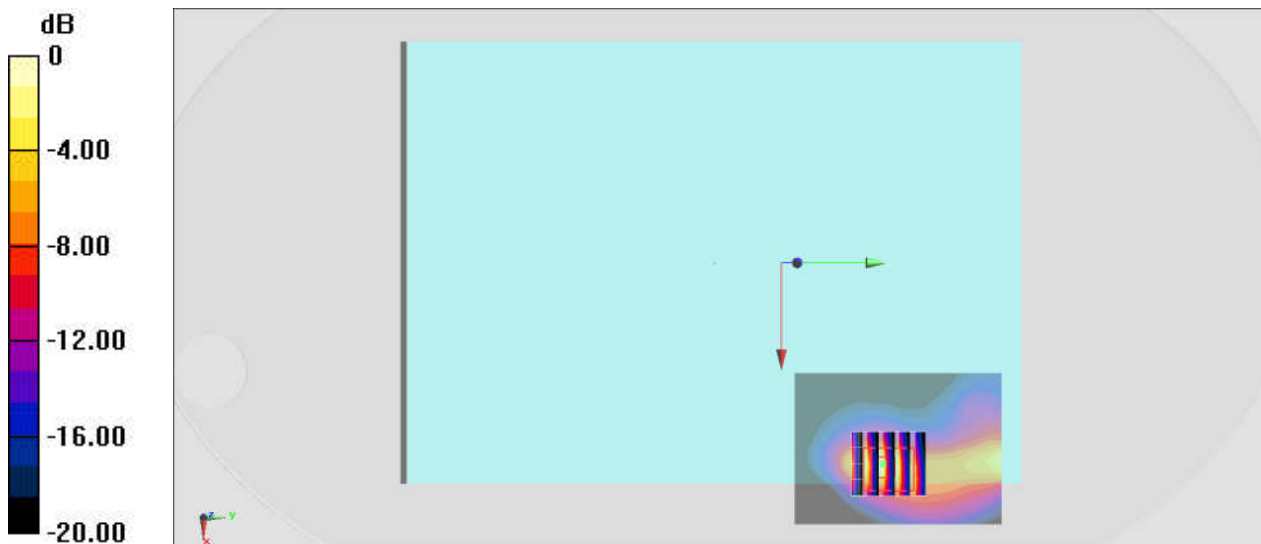

0 dB =  $1.83 \text{ W/kg} = 2.62 \text{ dBW/kg}$



### #09\_LTE Band 14\_10M\_QPSK\_1\_0\_Bottom Face\_0mm\_Ch23330


Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_201205 Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.401$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(8.9, 8.9, 8.9) @ 793 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.85 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 26.45 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 2.90 W/kg  
**SAR(1 g) = 0.832 W/kg; SAR(10 g) = 0.321 W/kg**  
Maximum value of SAR (measured) = 1.85 W/kg

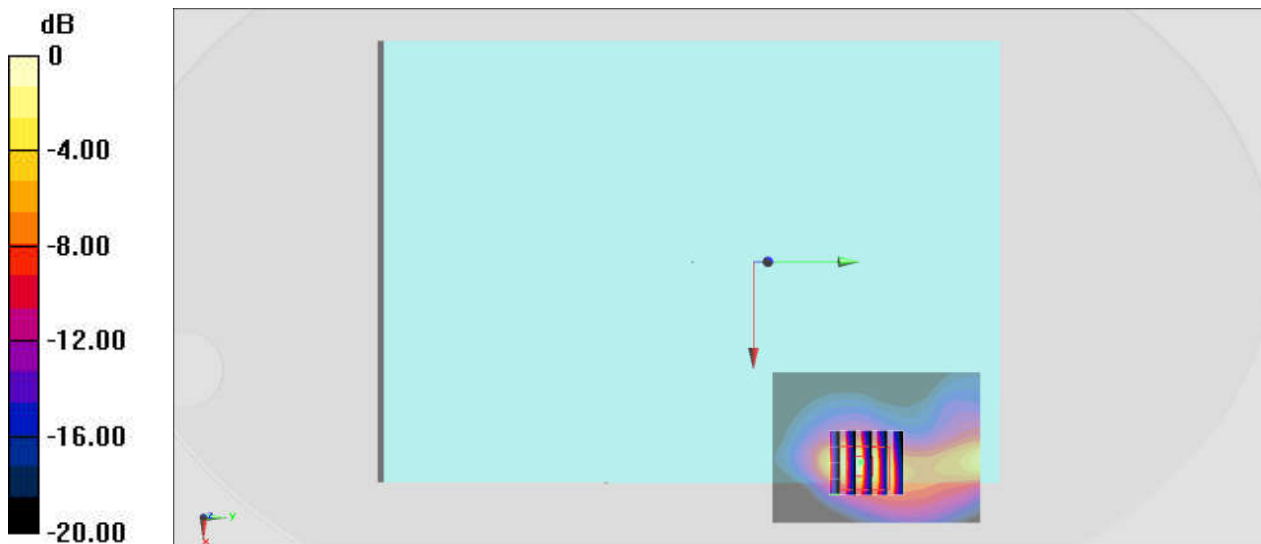

0 dB = 1.85 W/kg = 2.67 dBW/kg

## #10\_LTE Band 25\_20M\_QPSK\_1\_0\_Bottom Face\_0mm\_Ch26340

Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_201204 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.417$  S/m;  $\epsilon_r = 39.205$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(7.75, 7.75, 7.75) @ 1880 MHz; Calibrated: 2020/4/29

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25

- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.79 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.05 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.91 W/kg

**SAR(1 g) = 0.945 W/kg; SAR(10 g) = 0.415 W/kg**

Maximum value of SAR (measured) = 1.70 W/kg

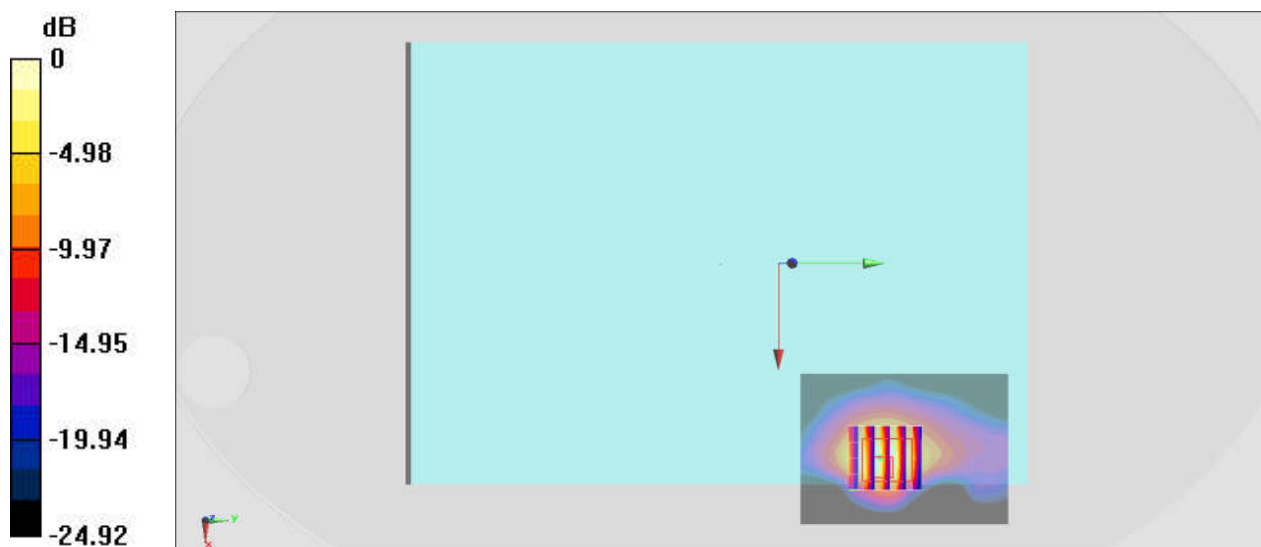

0 dB = 1.70 W/kg = 2.30 dBW/kg

### #11\_LTE Band 26\_15M\_QPSK\_1\_0\_Bottom Face\_0mm\_Ch26865


Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_201208 Medium parameters used :  $f = 831.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 42.335$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(8.73, 8.73, 8.73) @ 831.5 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.00 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 28.86 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 3.27 W/kg  
**SAR(1 g) = 0.952 W/kg; SAR(10 g) = 0.368 W/kg**  
Maximum value of SAR (measured) = 2.04 W/kg

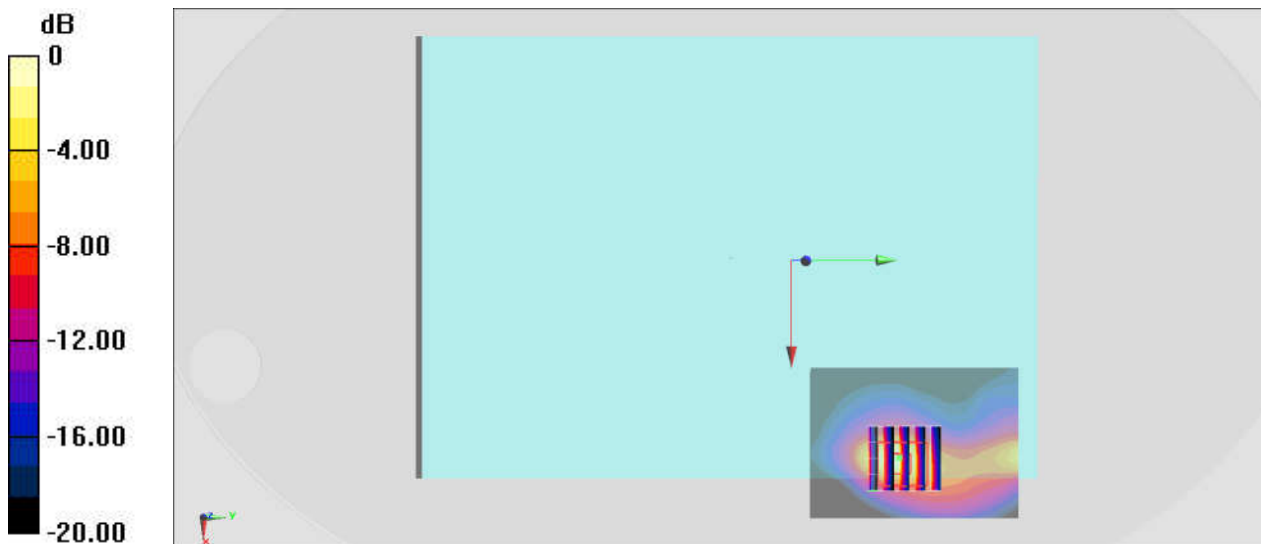

0 dB = 2.04 W/kg = 3.10 dBW/kg

### #12\_LTE Band 30\_10M\_QPSK\_1\_0\_Bottom Face\_0mm\_Ch27710


Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1  
Medium: HSL\_2300\_201206 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.639$  S/m;  $\epsilon_r = 38.698$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(7.38, 7.38, 7.38) @ 2310 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 2.75 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 13.30 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 2.41 W/kg  
**SAR(1 g) = 0.893 W/kg; SAR(10 g) = 0.380 W/kg**  
Maximum value of SAR (measured) = 1.65 W/kg

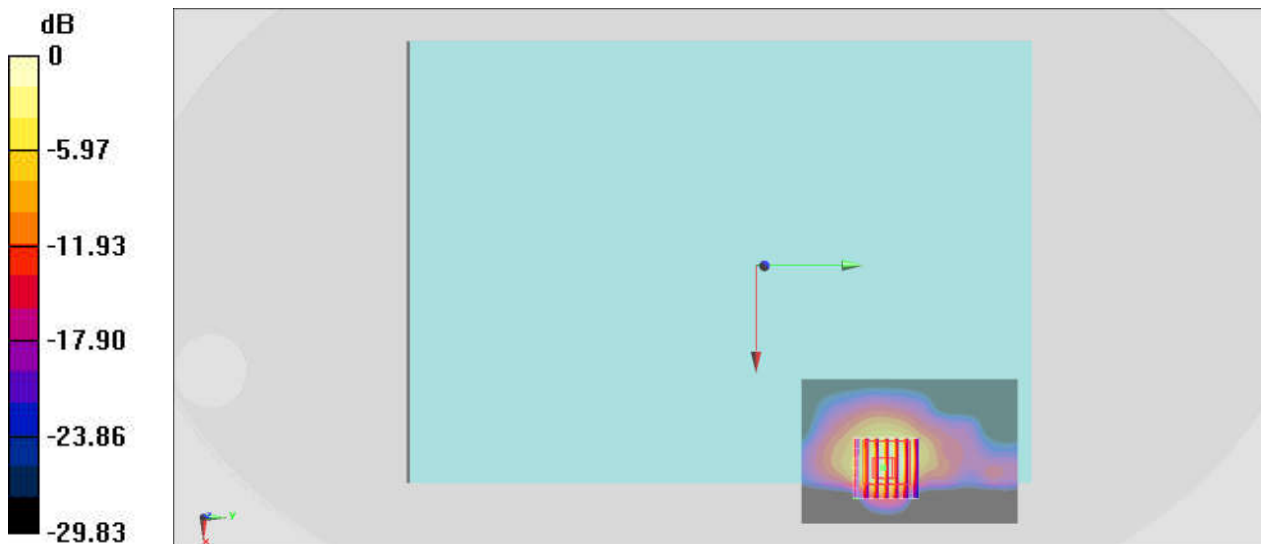

0 dB = 1.65 W/kg = 2.17 dBW/kg

### #13\_LTE Band 41 HPUE\_20M\_QPSK\_1\_0\_Bottom Face\_0mm\_Ch41490


Communication System: LTE; Frequency: 2680 MHz; Duty Cycle: 1:2.33  
Medium: HSL\_2600\_201206 Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.047$  S/m;  $\epsilon_r = 37.238$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(6.95, 6.95, 6.95) @ 2680 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 2.00 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 18.29 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 2.26 W/kg  
**SAR(1 g) = 0.805 W/kg; SAR(10 g) = 0.312 W/kg**  
Maximum value of SAR (measured) = 1.64 W/kg

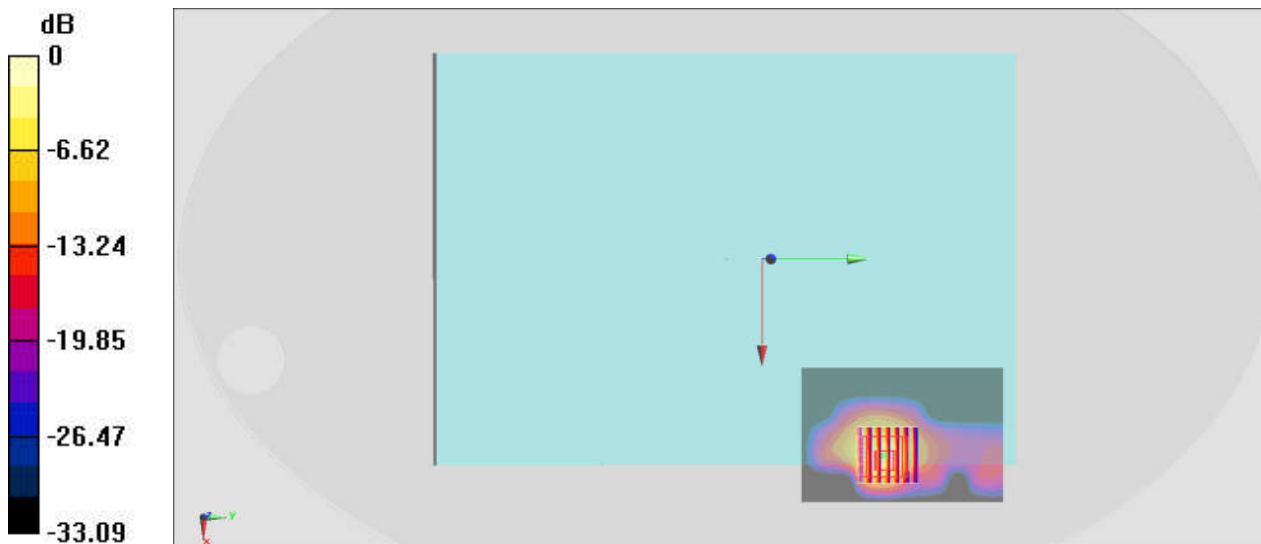

0 dB = 1.64 W/kg = 2.15 dBW/kg

**#14\_LTE Band 48\_20M\_QPSK\_1\_0\_Bottom Face\_0mm\_Ch56150**

Communication System: LTE ; Frequency: 3641 MHz;Duty Cycle: 1:1.59

Medium: HSL\_3300-4200\_201209 Medium parameters used :  $f = 3641$  MHz;  $\sigma = 3.109$  S/m;  $\epsilon_r = 39.219$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3642;ConvF(6.45, 6.45, 6.45) @ 3641 MHz;Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI V4.0; Type: QDOVA001BB; Serial: 1041
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (81x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.71 W/kg


**Zoom Scan (7x7x8)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 14.62 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 4.17 W/kg

**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.301 W/kg**

Maximum value of SAR (measured) = 2.64 W/kg

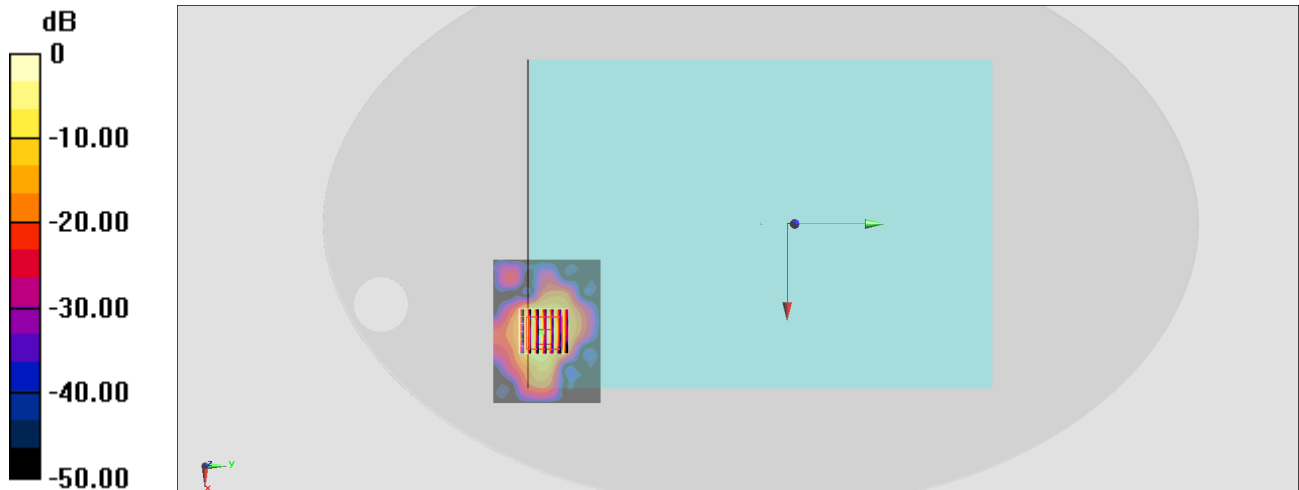

0 dB = 2.64 W/kg = 4.22 dBW/kg

### #15\_LTE Band 66\_20M\_QPSK\_1\_0\_Bottom Face\_0mm\_Ch132572


Communication System: LTE; Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_201207 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 40.595$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(7.89, 7.89, 7.89) @ 1770 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.47 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 15.68 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 2.60 W/kg  
**SAR(1 g) = 0.830 W/kg; SAR(10 g) = 0.369 W/kg**  
Maximum value of SAR (measured) = 1.58 W/kg

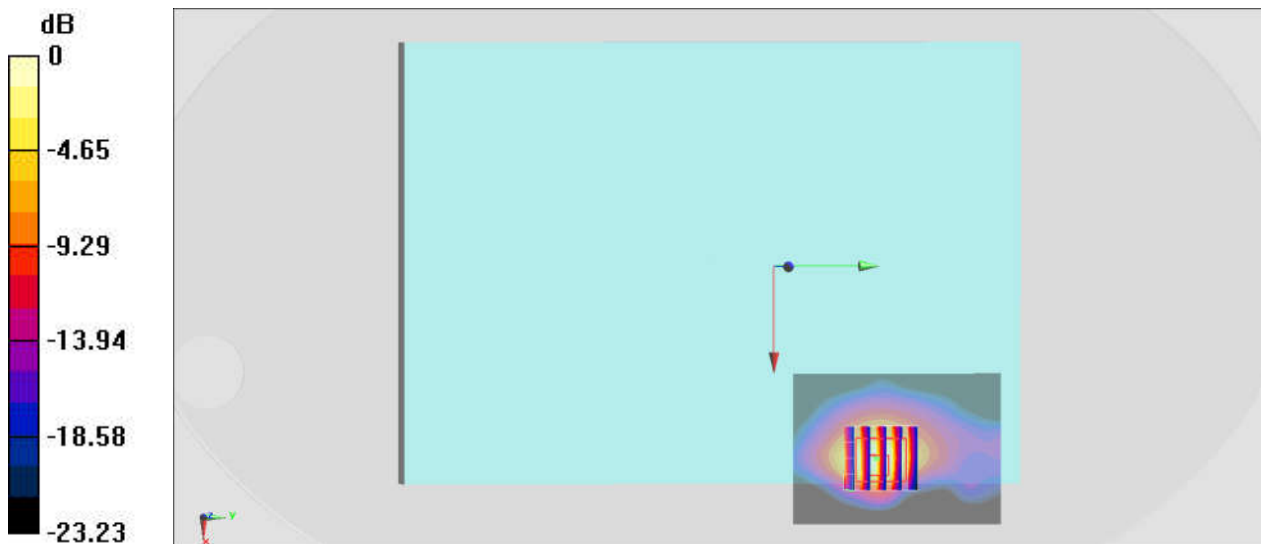

0 dB = 1.58 W/kg = 1.99 dBW/kg

### #16\_LTE Band 71\_20M\_QPSK\_1\_0\_Edge 2\_0mm\_Ch133322


Communication System: LTE; Frequency: 683 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_201205 Medium parameters used:  $f = 683 \text{ MHz}$ ;  $\sigma = 0.855 \text{ S/m}$ ;  $\epsilon_r = 43.013$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.4 \text{ }^\circ\text{C}$

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(8.9, 8.9, 8.9) @ 683 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $3.88 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $20.48 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$   
Peak SAR (extrapolated) =  $6.86 \text{ W/kg}$   
**SAR(1 g) =  $1.11 \text{ W/kg}$ ; SAR(10 g) =  $0.300 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $3.89 \text{ W/kg}$

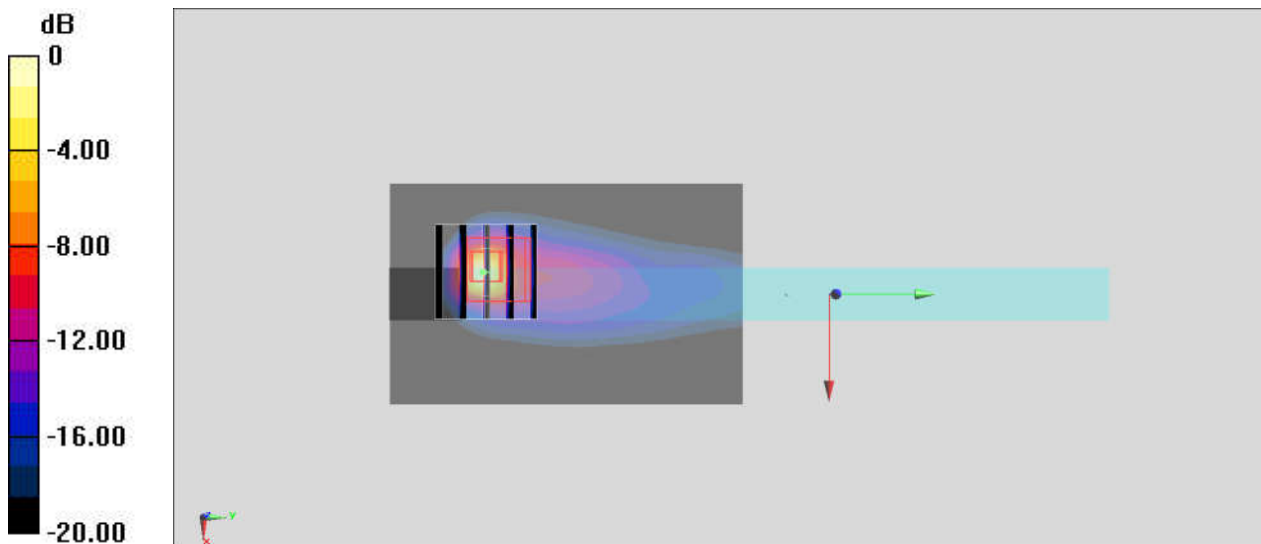

0 dB =  $3.89 \text{ W/kg}$  =  $5.90 \text{ dBW/kg}$



### #17\_FR1 n2\_20M\_BPSK\_1\_1\_Bottom Face\_0mm\_Ch380000


Communication System: FR1; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_201204 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.439$  S/m;  $\epsilon_r = 39.113$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(7.75, 7.75, 7.75) @ 1900 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.06 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 18.78 V/m; Power Drift = -0.17 dB  
Peak SAR (extrapolated) = 1.29 W/kg  
**SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.241 W/kg**  
Maximum value of SAR (measured) = 0.876 W/kg

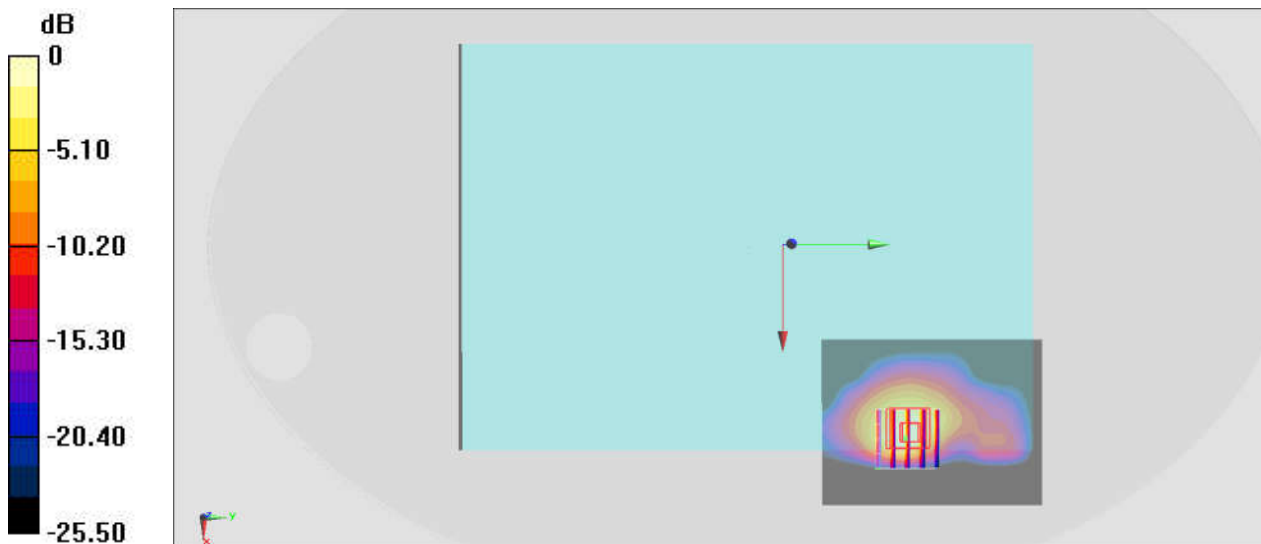

0 dB = 0.876 W/kg = -0.57 dBW/kg

### #18\_FR1 n5\_20M\_BPSK\_1\_1\_Bottom Face\_0mm\_Ch167300


Communication System: FR1; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_201208 Medium parameters used :  $f = 836.5$  MHz;  $\sigma = 0.907$  S/m;  $\epsilon_r = 42.308$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(8.73, 8.73, 8.73) @ 836.5 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.837 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 16.65 V/m; Power Drift = -0.16 dB  
Peak SAR (extrapolated) = 1.14 W/kg  
**SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.238 W/kg**  
Maximum value of SAR (measured) = 0.832 W/kg

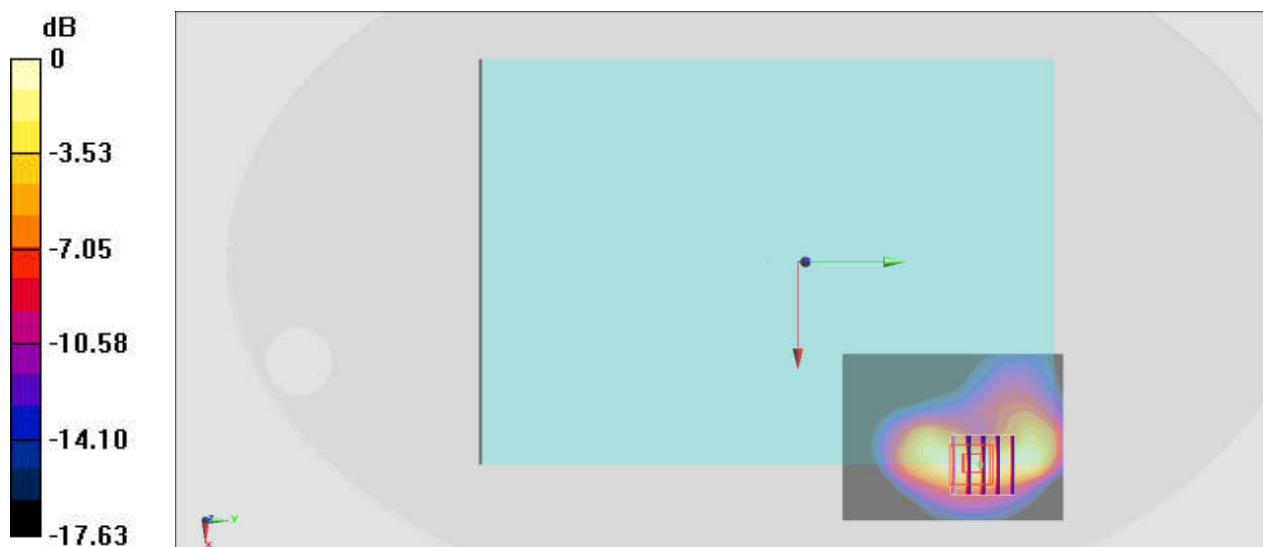

0 dB = 0.832 W/kg = -0.80 dBW/kg

### #19\_FR1 n7 MIMO2\_20M\_BPSK\_1\_1\_Edge 4\_0mm\_Ch502000


Communication System: FR1; Frequency: 2510 MHz; Duty Cycle: 1:1  
 Medium: HSL\_2600\_201206 Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.853$  S/m;  $\epsilon_r = 37.807$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(6.95, 6.95, 6.95) @ 2510 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (81x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 1.38 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 7.875 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 1.73 W/kg  
**SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.228 W/kg**  
 Maximum value of SAR (measured) = 1.23 W/kg

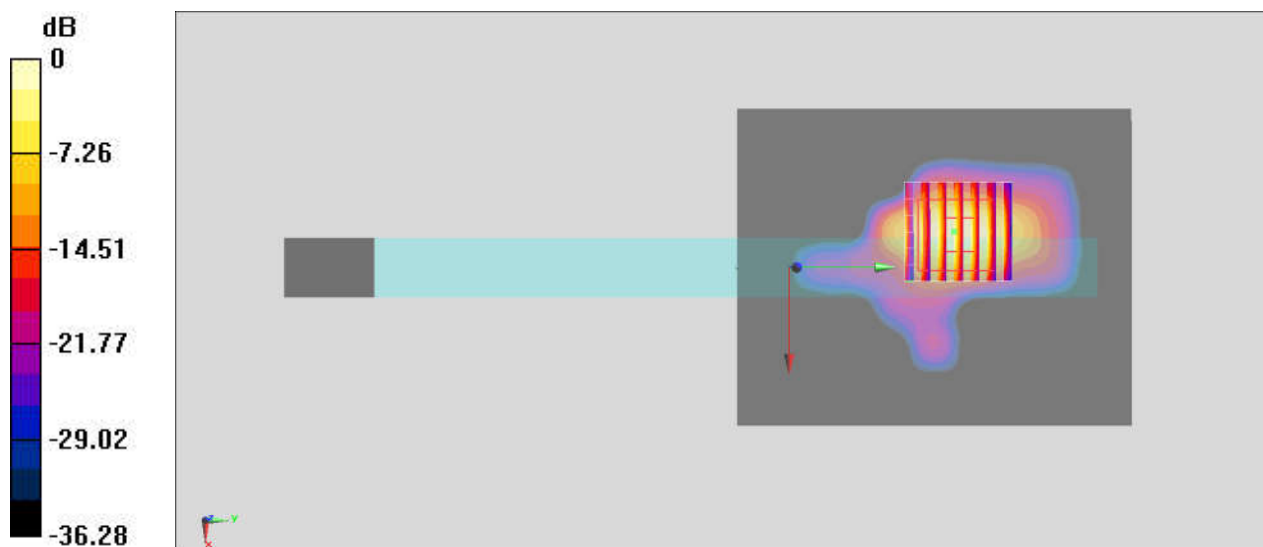

0 dB = 1.23 W/kg = 0.90 dBW/kg

### #20\_FR1 n12\_15M\_BPSK\_1\_1\_Edge 2\_0mm\_Ch141500


Communication System: FR1; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_201205 Medium parameters used :  $f = 707.5$  MHz;  $\sigma = 0.864$  S/m;  $\epsilon_r = 42.914$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(8.9, 8.9, 8.9) @ 707.5 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.56 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 15.09 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 4.33 W/kg  
**SAR(1 g) = 0.569 W/kg; SAR(10 g) = 0.134 W/kg**  
Maximum value of SAR (measured) = 2.32 W/kg

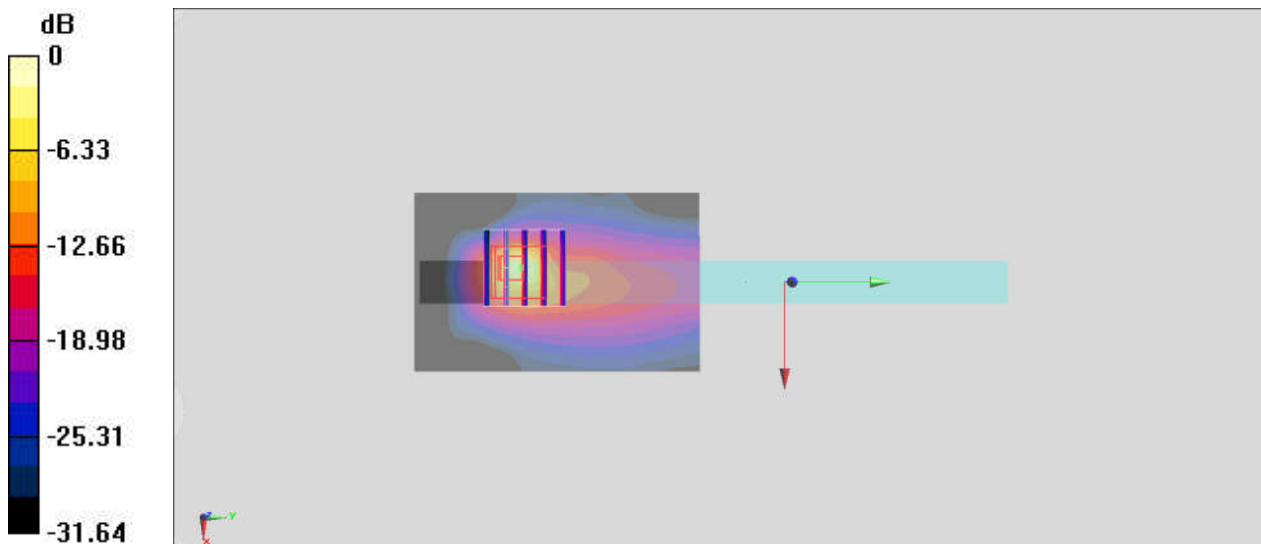

0 dB = 2.32 W/kg = 3.65 dBW/kg

## #21\_FR1 n41 MIMO2\_100M\_BPSK\_1\_1\_Bottom Face\_0mm\_Ch518598


Communication System: FR1; Frequency: 2592.99 MHz; Duty Cycle: 1:1  
 Medium: HSL\_2600\_201206 Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 1.942 \text{ S/m}$ ;  $\epsilon_r = 37.551$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.2 \text{ }^\circ\text{C}$

### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(6.95, 6.95, 6.95) @ 2593MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (81x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $1.51 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $21.15 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.43 \text{ W/kg}$   
**SAR(1 g) =  $0.559 \text{ W/kg}$ ; SAR(10 g) =  $0.202 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $1.13 \text{ W/kg}$

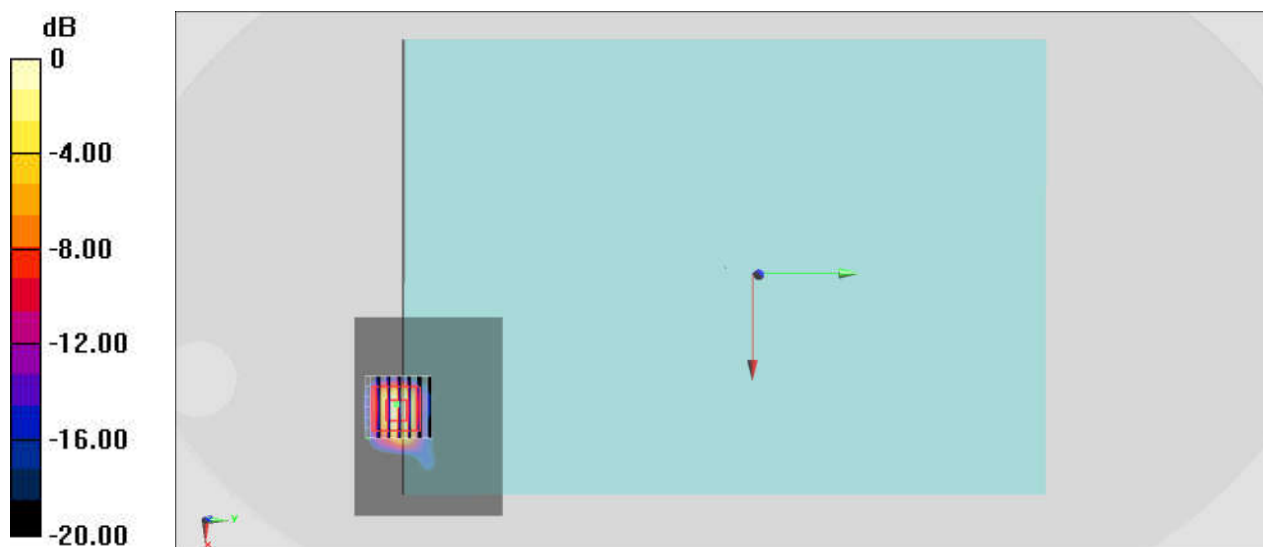

0 dB =  $1.13 \text{ W/kg}$  =  $0.53 \text{ dBW/kg}$

### #22\_FR1 n66\_20M\_BPSK\_1\_1\_Bottom Face\_0mm\_Ch354000


Communication System: FR1; Frequency: 1770 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_201207 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 40.595$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(7.89, 7.89, 7.89) @ 1770 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.33 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.467 V/m; Power Drift = 0.17 dB  
Peak SAR (extrapolated) = 1.46 W/kg  
**SAR(1 g) = 0.599 W/kg; SAR(10 g) = 0.275 W/kg**  
Maximum value of SAR (measured) = 1.01 W/kg

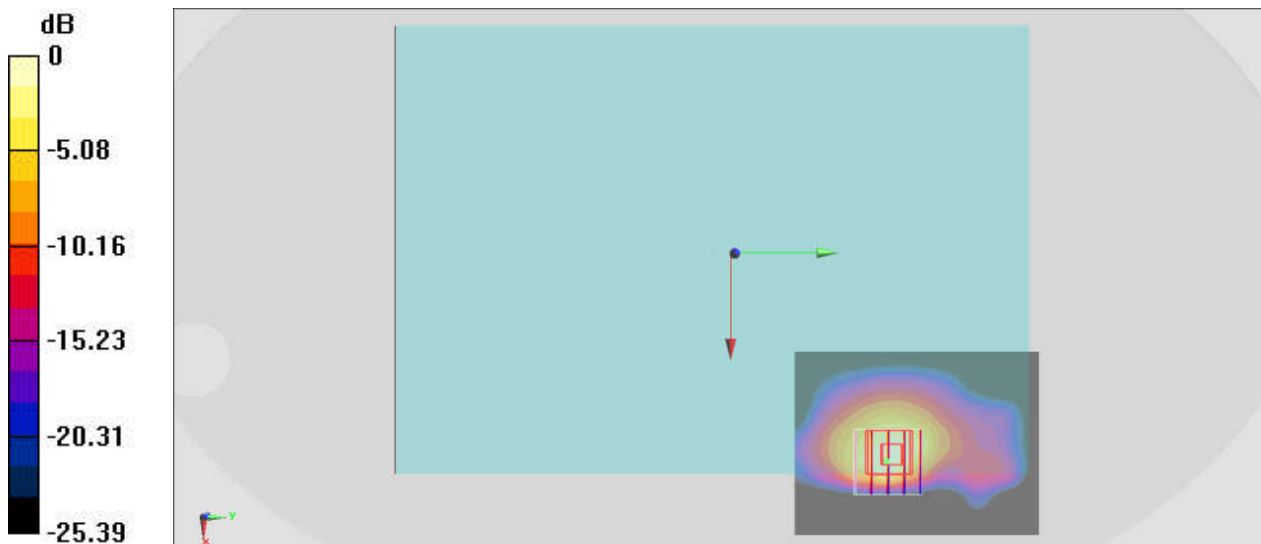

0 dB = 1.01 W/kg = 0.04 dBW/kg

### #23\_FR1 n71\_20M\_BPSK\_1\_1\_Edge 2\_0mm\_Ch136100


Communication System: FR1; Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_201205 Medium parameters used :  $f = 680.5$  MHz;  $\sigma = 0.854$  S/m;  $\epsilon_r = 43.026$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration

- Probe: EX3DV4 - SN3642; ConvF(8.9, 8.9, 8.9) @ 680.5 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.72 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 14.10 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 3.35 W/kg  
**SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.131 W/kg**  
Maximum value of SAR (measured) = 1.49 W/kg

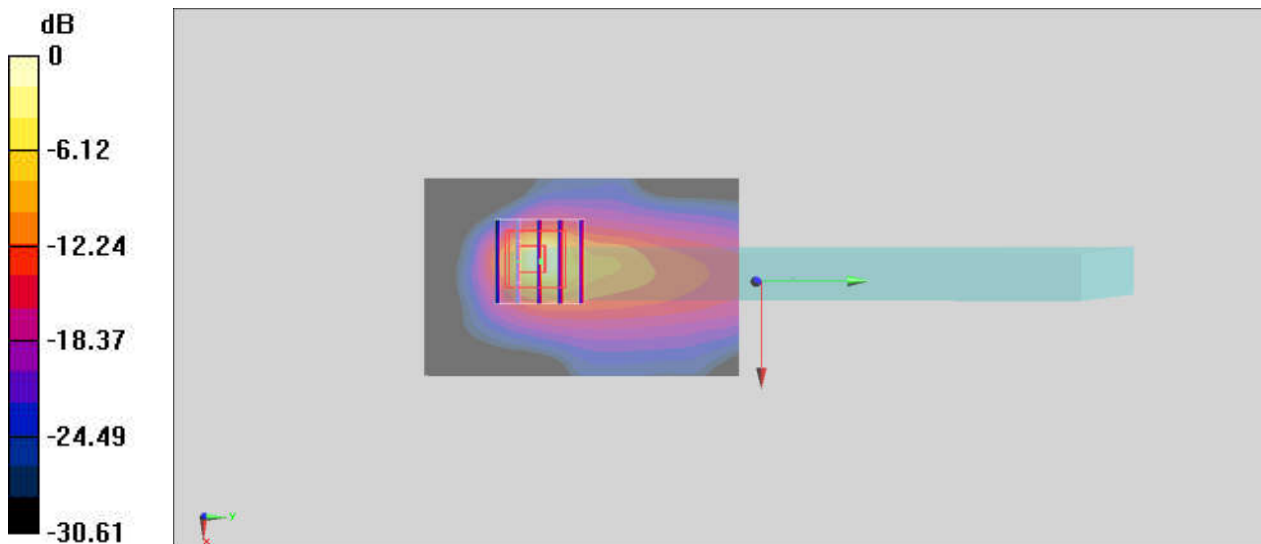

0 dB = 1.49 W/kg = 1.73 dBW/kg

## #24\_WLAN2.4GHz\_802.11b 1Mbps\_Bottom of Face\_0mm\_Ch11;Ant 2

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_210226 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.848$  S/m;  $\epsilon_r = 38.864$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

### DASY5 Configuration

- Probe: EX3DV4 - SN7346; ConvF(7.66, 7.66, 7.66) @ 2462 MHz; Calibrated: 2020/5/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2020/7/23
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1025
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (51x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.24 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.88 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.88 W/kg

**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.455 W/kg**

Maximum value of SAR (measured) = 2.15 W/kg

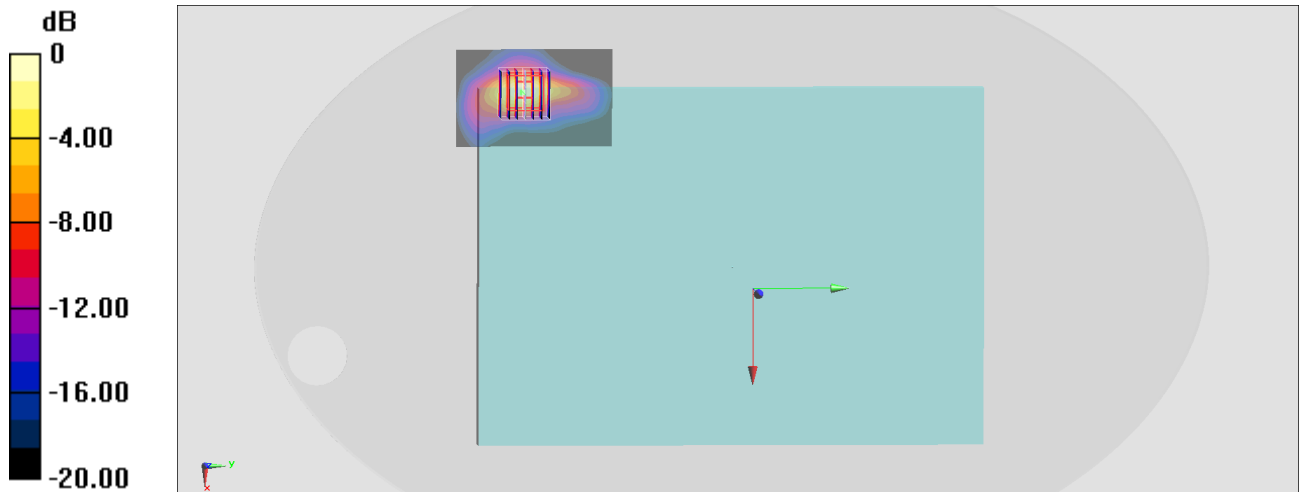

0 dB = 2.15 W/kg = 3.32 dBW/kg



**#25\_WLAN5GHz\_802.11ac-VHT160 MCS0\_Bottom of Laptop\_0mm\_Ch50;Ant 1**

Communication System: 802.11ac; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL\_5G\_210226 Medium parameters used :  $f = 5250$  MHz;  $\sigma = 4.632$  S/m;  $\epsilon_r = 37.18$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.43, 4.43, 4.43) @ 5250 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v5.0\_Left; Type: QDOVA002AA; Serial: TP:1238
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.58 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 22.53 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 4.89 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.279 W/kg**

Maximum value of SAR (measured) = 2.89 W/kg

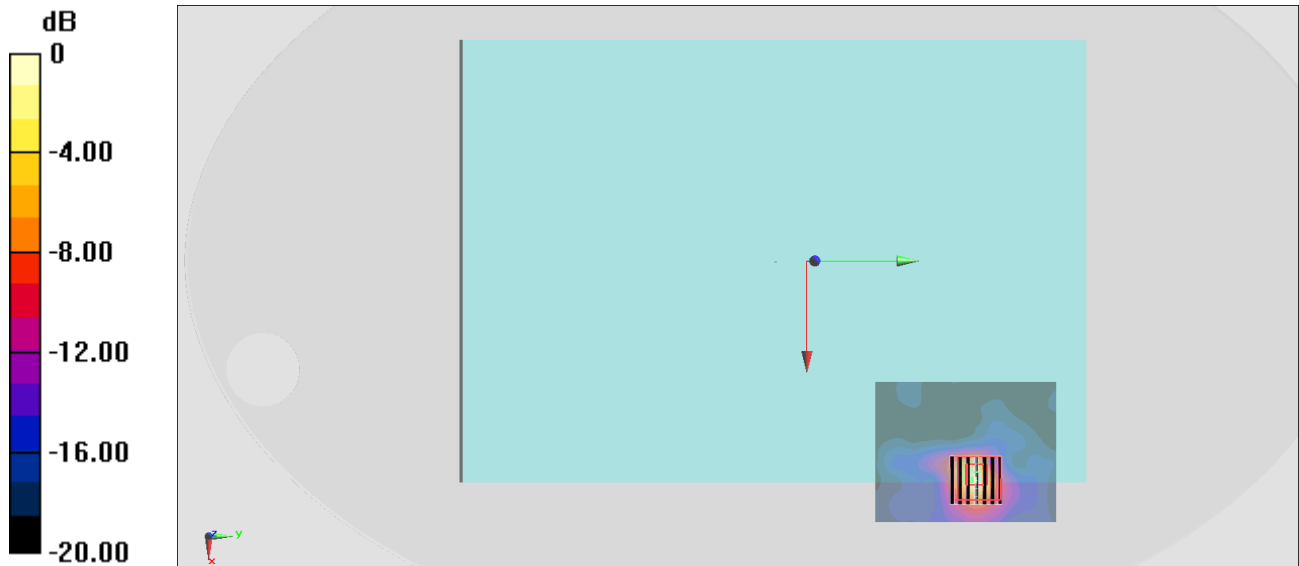

0 dB = 2.58 W/kg = 4.12 dBW/kg

**#26\_WLAN5GHz\_802.11ac-VHT160 MCS0\_Bottom of Laptop\_0mm\_Ch114;Ant 1**

Communication System: 802.11ac; Frequency: 5570 MHz; Duty Cycle: 1:1.02

Medium: HSL\_5G\_210226 Medium parameters used :  $f = 5570$  MHz;  $\sigma = 4.944$  S/m;  $\epsilon_r = 36.747$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.19, 4.19, 4.19) @ 5570 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v5.0\_Left; Type: QDOVA002AA; Serial: TP:1238
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.57 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.99 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 6.08 W/kg

**SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.234 W/kg**

Maximum value of SAR (measured) = 3.55 W/kg

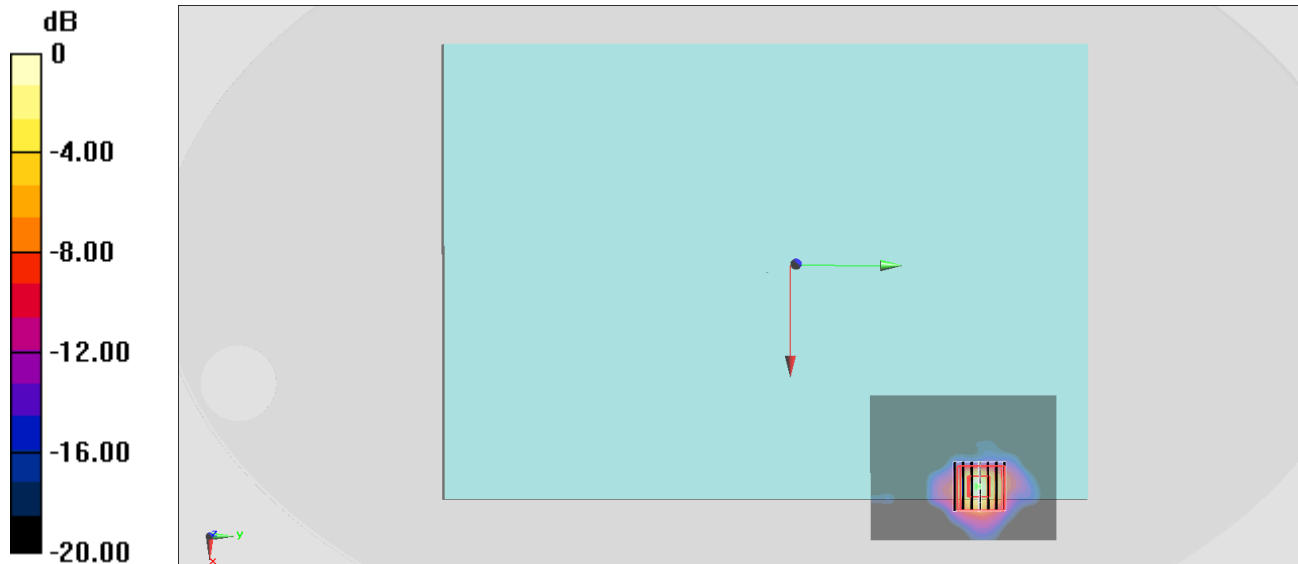

0 dB = 2.57 W/kg = 4.10 dBW/kg

## #27\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Bottom of Laptop\_0mm\_Ch155;Ant 1

Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.02

Medium: HSL\_5G\_210226 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.171$  S/m;  $\epsilon_r = 36.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.17, 4.17, 4.17) @ 5775 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v5.0\_Left; Type: QDOVA002AA; Serial: TP:1238
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.84 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.35 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 5.03 W/kg

**SAR(1 g) = 0.912 W/kg; SAR(10 g) = 0.197 W/kg**

Maximum value of SAR (measured) = 2.57 W/kg

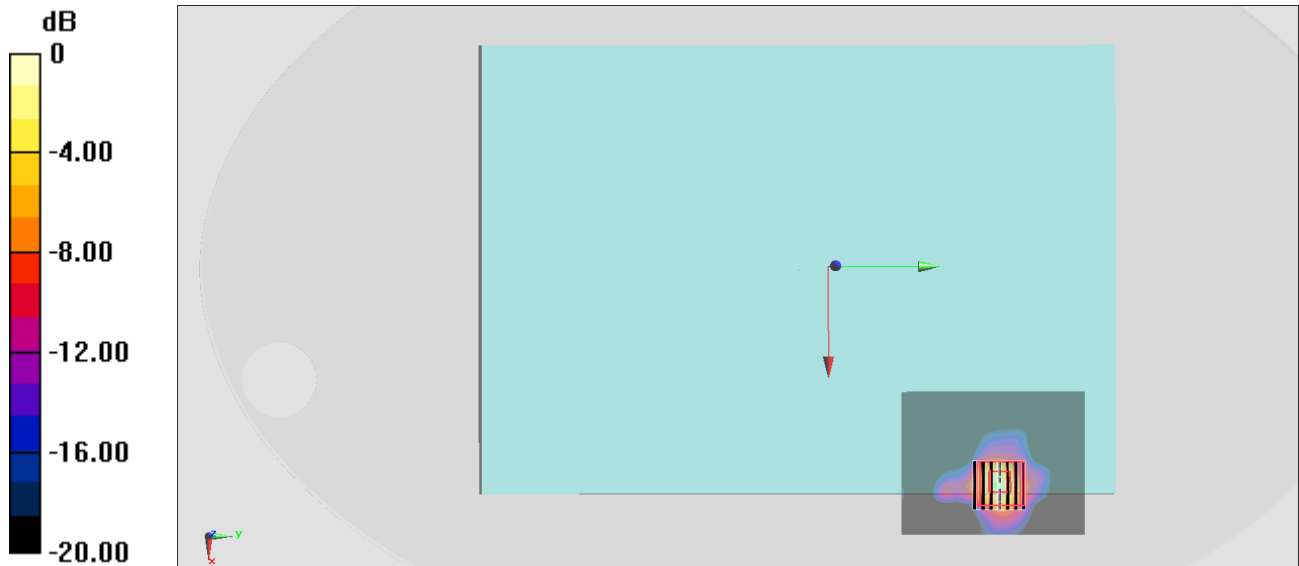

0 dB = 1.84 W/kg = 2.65 dBW/kg

**#28\_Bluetooth\_1Mbps\_Bottom Face\_0mm\_Ch78;Ant 2**

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.297

Medium: HSL\_2450\_210226 Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.829$  S/m;  $\epsilon_r = 37.977$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.11, 7.11, 7.11) @ 2480 MHz; Calibrated: 2020/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1311; Calibrated: 2020/8/25
- Phantom: ELI v4.0\_Mid; Type: QDOVA001AA; Serial: TP:1131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Area Scan (71x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.530 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.36 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.681 W/kg

**SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.106 W/kg**

Maximum value of SAR (measured) = 0.505 W/kg

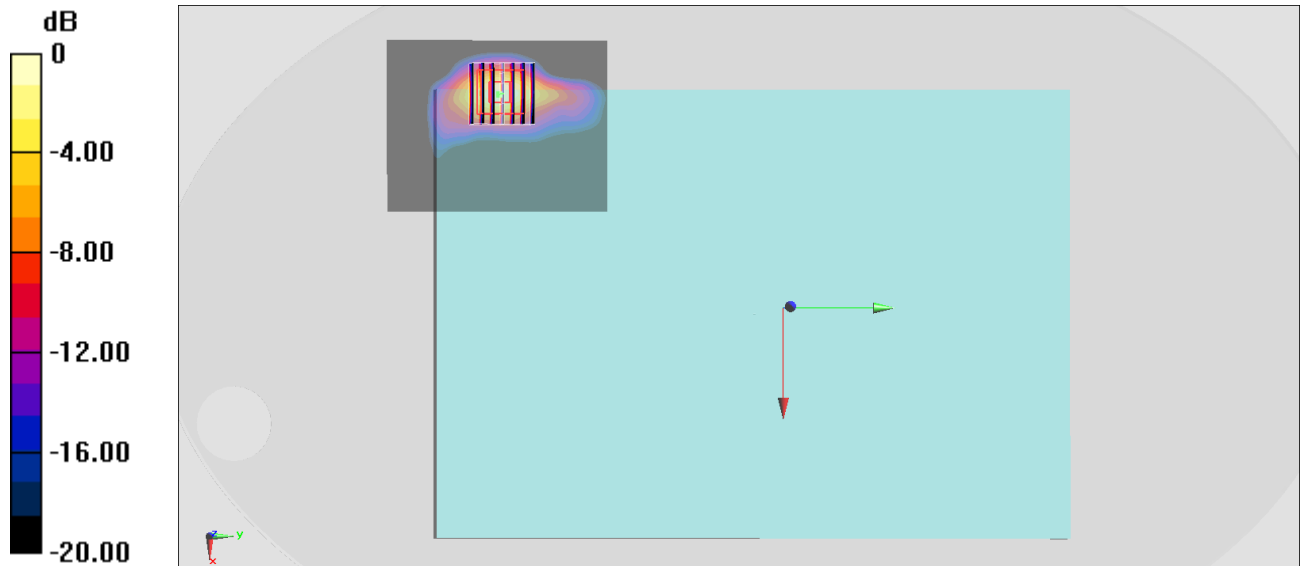

0 dB = 0.530 W/kg = -2.76 dBW/kg