



FCC RADIO TEST REPORT

FCC ID : 2AJN7-TP00129A
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00129A
Applicant : LC Future Center Limited Taiwan Branch
7F., No. 780, Bei'an Rd., Zhongshan Dist., Taipei
City 104, Taiwan
Manufacturer : LCFC (HeFei) Electronics Technology Co., Ltd.
No. 3188-1, Yungu Road (Hefei Export
Processing Zone), Hefei Economics &
Technology Development Area, Anhui, CHINA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27

Equipment: Foxconn T99W175 tested inside of Lenovo Notebook Computer.

The product was received on Nov. 06, 2020 and testing was started from Nov. 20, 2020 and completed on Nov. 23, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	6
1.1 Product Feature of Equipment Under Test.....	6
1.2 Product Specification of Equipment Under Test.....	7
1.3 Modification of EUT	7
1.4 Testing Location	8
1.5 Applicable Standards.....	8
2 Test Configuration of Equipment Under Test	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	10
2.4 Frequency List of Low/Middle/High Channels	11
3 Radiated Test Items	12
3.1 Measuring Instruments	12
3.2 Radiated Spurious Emission Measurement	14
4 List of Measuring Equipment.....	15
5 Uncertainty of Evaluation	16
Appendix A. Test Results of Radiated Test	
Appendix B. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG0N0621C	01	Initial issue of report	Jan. 08, 2021



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1046	Conducted Output Power	-	See Note
	§22.913 (a)(2)	Effective Radiated Power (n5)	-	
	§27.50 (c)(10)	Effective Radiated Power (n12) (n71)		
	§24.232 (c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (n2) (n7) (n38) (n41)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (n66)		
-	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio		-
-	§2.1049	Occupied Bandwidth	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (n2) (n5) (n12) (n66) (n71)	-	See Note
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (n7) (n38) (n41)		
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Conducted Spurious Emission (n2) (n5) (n12) (n66) (n71)	-	See Note
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (n7) (n38) (n41)		
-	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	-	See Note



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1053 §22.917 (a) §24.238 (a) §27.53 (g) §27.53 (h)	Radiated Spurious Emission (n2) (n5) (n12) (n66) (n71)	Pass	Under limit 18.67 dB at 5554.000 MHz
	§2.1051 §27.53 (m)(4)	Radiated Spurious Emission (n7) (n38) (n41)		

Note: The module (Model: T99W175) makes no difference after verifying output power, this report reuses test data from the module report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Yimin Ho



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	TP00129A
FCC ID	2AJN7-TP00129A
Sample 1	EUT with Novocomms/JYT Antenna
Sample 2	EUT with Amphenol Antenna
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS/NFC/UWB
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer.
2. Equipment: Foxconn T99W175 tested inside of Lenovo Notebook Computer.

WWAN Antenna Information				
Main Antenna	Manufacturer	Amphenol	Peak gain (dBi)	1.97
	Part number	TKC116-16-000-C	Type	PIFA
	Manufacturer	Novocomms/JYT	Peak gain (dBi)	1.88
	Part number	JYAAE0150HR	Type	PIFA
MIMO 2 Antenna	Manufacturer	Amphenol	Peak gain (dBi)	1.97
	Part number	TKC115-16-000-C	Type	PIFA
	Manufacturer	Novocomms/JYT	Peak gain (dBi)	2.28
	Part number	JYAAE0151HR	Type	PIFA

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	5G NR n2: 1852.5 MHz ~ 1907.5 MHz 5G NR n5: 826.5 MHz ~ 846.5 MHz 5G NR n7: 2502.5 MHz ~ 2567.5 MHz 5G NR n12: 701.5 MHz ~ 713.5 MHz 5G NR n38: 2572.5 MHz ~ 2617.5 MHz 5G NR n41: 2506.02 MHz ~ 2679.99 MHz 5G NR n66: 1712.5 MHz ~ 1777.5 MHz 5G NR n71: 668.0 MHz ~ 693.0 MHz
Rx Frequency	5G NR n2: 1932.5 MHz ~ 1987.5 MHz 5G NR n5: 871.5 MHz ~ 891.5 MHz 5G NR n7: 2502.5 MHz ~ 2567.5 MHz 5G NR n12: 731.5 MHz ~ 743.5 MHz 5G NR n38: 2572.5 MHz ~ 2617.5 MHz 5G NR n41: 2506.02 MHz ~ 2679.99 MHz 5G NR n66: 2112.5 MHz ~ 2197.5 MHz 5G NR n71: 668.0 MHz ~ 693.0 MHz
Bandwidth	5G NR n2: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n5: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n7: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n12: 5MHz / 10MHz / 15MHz 5G NR n38: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n41: 20MHz / 40MHz / 50MHz / 60MHz / 80MHz / 90MHz / 100MHz 5G NR n66: 5MHz / 10MHz / 15MHz / 20MHz 5G NR n71: 5MHz / 10MHz / 15MHz / 20MHz
Type of Modulation	PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58 , Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan
Test Site No.	Sporton Site No. 03CH12-HY
Test Engineer	Jack Cheng, Lance Chiang and Chuan Chu
Temperature	22.3~26.4°C
Relative Humidity	58~66%

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No. TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Test Items	NR	Bandwidth (MHz)					Modulation					RB #			Test Channel			
		5	10	15	20	40	50	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	n2			v		-	-	v					v			v	v	v
	n5	v				-	-	v					v			v	v	v
	n12		v			-	-	v					v			v	v	v
	n66			v		-	-	v					v			v	v	v
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Test combination is EN-DC 5A-n2A, EN-DC 66A-n5A, EN-DC 2A-n12A., EN-DC 12A-n66A. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report. 																	

Test Items	NR	Bandwidth (MHz)								Modulation					RB #			Test Channel		
		10	20	40	50	60	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	n41		v												v			v	v	v
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Test combination is EN-DC 2A-n41A. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report. 																			

2.2 Connection Diagram of Test System

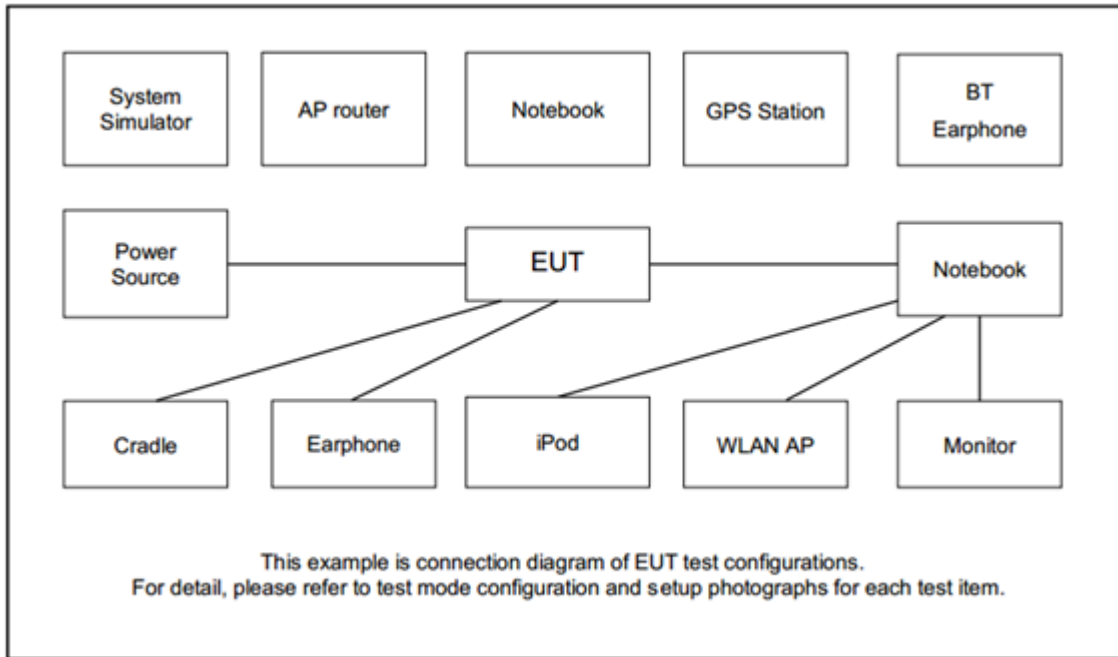

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0m	N/A
2.	System Simulator	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
3.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m



2.4 Frequency List of Low/Middle/High Channels

5G NR Band n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5

5G NR Band n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR Band n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	140800	141500	142200
	Frequency	704	707.5	711

5G NR Band n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	501201	518601	535998
	Frequency	2506.005	2593.005	2679.99

5G NR Band n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup

For radiated test below 30MHz

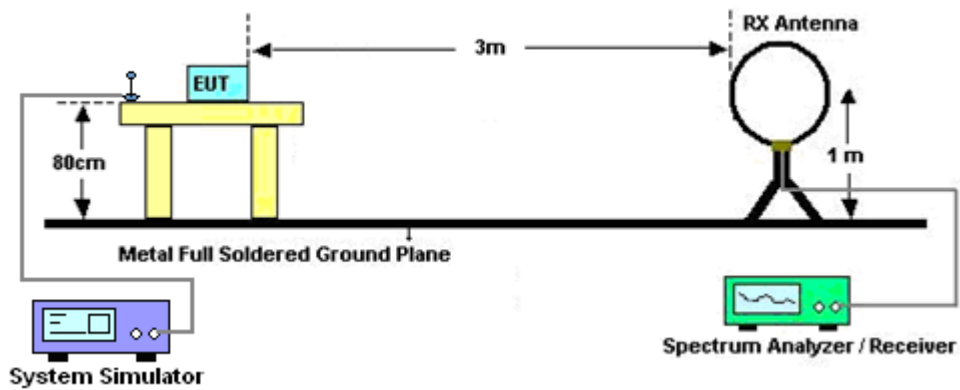


For radiated test from 30MHz to 1GHz

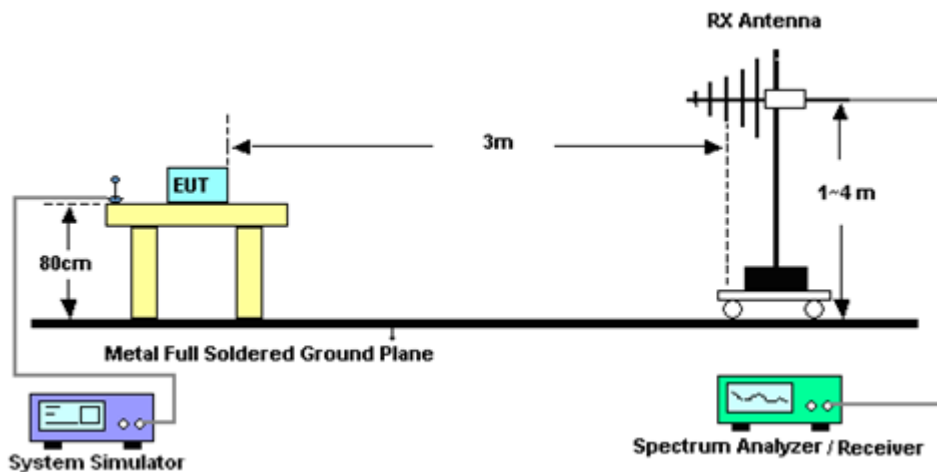

For radiated test from 1GHz to 18GHz



For radiated test above 18GHz

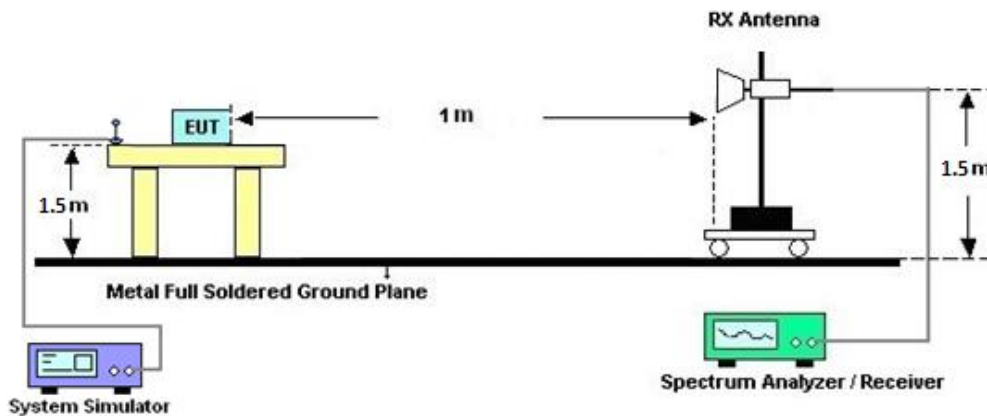

3.1.2 Test Result of Radiated Test

Please refer to Appendix A.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



3.2 Radiated Spurious Emission Measurement

3.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	Nov. 20, 2020~ Nov. 23, 2020	Dec. 25, 2020	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 29, 2020	Nov. 20, 2020~ Nov. 23, 2020	Apr. 28, 2021	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1212	1GHz~18GHz	May 20, 2020	Nov. 20, 2020~ Nov. 23, 2020	May 19, 2021	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-1241	1GHz ~ 18GHz	Jul. 15, 2020	Nov. 20, 2020~ Nov. 23, 2020	Jul. 14, 2021	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz~40GHz	Dec. 10, 2019	Nov. 20, 2020~ Nov. 23, 2020	Dec. 09, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917098 0	18GHz ~ 40GHz	Jan. 10, 2020	Nov. 20, 2020~ Nov. 23, 2020	Jan. 09, 2021	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 25, 2020	Nov. 20, 2020~ Nov. 23, 2020	Mar. 24, 2021	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY57280120	1GHz~26.5GHz	Jul. 20, 2020	Nov. 20, 2020~ Nov. 23, 2020	Jul. 19, 2021	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03K	1710001800 054002	1GHz~18GHz	Feb. 07, 2020	Nov. 20, 2020~ Nov. 23, 2020	Feb. 06, 2021	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 13, 2019	Nov. 20, 2020~ Nov. 23, 2020	Dec. 12, 2020	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY54200485	10Hz~44GHz	Feb. 10, 2020	Nov. 20, 2020~ Nov. 23, 2020	Feb. 09, 2021	Radiation (03CH12-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Feb. 15, 2020	Nov. 20, 2020~ Nov. 23, 2020	Feb. 14, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 12, 2020	Nov. 20, 2020~ Nov. 23, 2020	Mar. 11, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 12, 2019	Nov. 20, 2020~ Nov. 23, 2020	Dec. 11, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 25, 2020	Nov. 20, 2020~ Nov. 23, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz~40GHz	Feb. 25, 2020	Nov. 20, 2020~ Nov. 23, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP140349	N/A	Oct. 02, 2020	Nov. 20, 2020~ Nov. 23, 2020	Oct. 01, 2021	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 20, 2020~ Nov. 23, 2020	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Nov. 20, 2020~ Nov. 23, 2020	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Nov. 20, 2020~ Nov. 23, 2020	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Nov. 20, 2020~ Nov. 23, 2020	N/A	Radiation (03CH12-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.07
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.21
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.80
---	------



Appendix A. Test Results of Radiated Test

EN-DC 66A-n5A

EN-DC 66A-n5A / 5MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-42.04	-13	-29.04	-70.49	-47.63	0.92	8.66	H
	2472	-36.62	-13	-23.62	-70.19	-43.99	1.14	10.66	H
	3296	-35.21	-13	-22.21	-70.58	-43.75	1.32	12.01	H
									H
									H
									H
	1648	-42.48	-13	-29.48	-70.4	-48.07	0.92	8.66	V
	2472	-37.00	-13	-24.00	-70.72	-44.37	1.14	10.66	V
	3296	-35.12	-13	-22.12	-70.96	-43.66	1.32	12.01	V
									V
									V
									V
Middle	1672	-42.13	-13	-29.13	-70.66	-47.81	0.93	8.75	H
	2504	-37.23	-13	-24.23	-70.86	-44.63	1.15	10.70	H
	3336	-35.39	-13	-22.39	-70.64	-44.02	1.33	12.11	H
									H
									H
									H
	1672	-42.80	-13	-29.80	-70.7	-48.48	0.93	8.75	V
	2504	-37.35	-13	-24.35	-71.19	-44.75	1.15	10.70	V
	3336	-34.93	-13	-21.93	-70.64	-43.56	1.33	12.11	V
									V
									V
									V



Highest	1688	-42.27	-13	-29.27	-70.85	-48.00	0.93	8.81	H
	2536	-37.29	-13	-24.29	-70.92	-44.72	1.16	10.74	H
	3376	-36.00	-13	-23.00	-71.13	-44.71	1.34	12.20	H
									H
									H
									H
									H
	1688	-42.88	-13	-29.88	-70.77	-48.61	0.93	8.81	V
	2536	-37.16	-13	-24.16	-70.92	-44.59	1.16	10.74	V
	3376	-35.62	-13	-22.62	-71.19	-44.33	1.34	12.20	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC 5A-n2A

EN-DC 5A-n2A / 15MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-37.55	-13	-24.55	-74.9	-48.76	1.41	12.62	H
	5554	-31.67	-13	-18.67	-74.72	-43.23	1.74	13.30	H
	7407	-47.79	-13	-34.79	-74.84	-57.10	1.94	11.25	H
									H
									H
									H
									H
	3700	-37.18	-13	-24.18	-74.67	-48.39	1.41	12.62	V
	5554	-32.10	-13	-19.10	-74.68	-43.66	1.74	13.30	V
	7407	-48.08	-13	-35.08	-74.98	-57.39	1.94	11.25	V
									V
									V
									V
									V
Middle	3748	-36.41	-13	-23.41	-74.01	-47.63	1.42	12.65	H
	5620	-32.06	-13	-19.06	-75.07	-43.62	1.74	13.30	H
	7495	-48.27	-13	-35.27	-74.83	-57.39	1.99	11.11	H
									H
									H
									H
									H
	3748	-36.63	-13	-23.63	-74.43	-47.85	1.42	12.65	V
	5620	-32.06	-13	-19.06	-74.71	-43.62	1.74	13.30	V
	7495	-48.19	-13	-35.19	-74.78	-57.31	1.99	11.11	V
									V
									V
									V
									V



Highest	3790	-36.10	-13	-23.10	-74.18	-47.34	1.44	12.67	H
	5686	-32.26	-13	-19.26	-75.05	-43.83	1.73	13.30	H
	7583	-49.05	-13	-36.05	-74.56	-58.16	2.00	11.12	H
									H
									H
									H
									H
	3790	-36.24	-13	-23.24	-74.07	-47.48	1.44	12.67	V
	5686	-32.08	-13	-19.08	-75.4	-43.65	1.73	13.30	V
	7583	-49.33	-13	-36.33	-74.79	-58.44	2.00	11.12	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC 2A-n12A

EN-DC 2A-n12A / 10MHz / PI/2 BPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1400	-51.47	-13	-38.47	-71.04	-56.12	0.84	7.64	H
	2096	-49.75	-13	-36.75	-72.37	-56.67	1.06	10.13	H
	2800	-47.38	-13	-34.38	-71.82	-55.07	1.22	11.06	H
									H
									H
									H
									H
	1400	-52.81	-13	-39.81	-71.15	-57.46	0.84	7.64	V
	2099	-50.84	-13	-37.84	-72.36	-57.77	1.06	10.14	V
	2800	-47.63	-13	-34.63	-72.01	-55.32	1.22	11.06	V
									V
									V
									V
									V
Middle	1408	-51.18	-13	-38.18	-70.72	-55.86	0.85	7.68	H
	2112	-48.86	-13	-35.86	-71.77	-55.80	1.06	10.16	H
	2816	-47.00	-13	-34.00	-71.50	-54.70	1.23	11.08	H
									H
									H
									H
									H
	1408	-52.43	-13	-39.43	-70.75	-57.11	0.85	7.68	V
	2112	-50.05	-13	-37.05	-71.84	-56.99	1.06	10.16	V
	2816	-47.64	-13	-34.64	-72.10	-55.34	1.23	11.08	V
									V
									V
									V
									V



Highest	1416	-51.68	-13	-38.68	-71.19	-56.40	0.85	7.71	H
	2120	-49.40	-13	-36.40	-72.45	-56.35	1.07	10.17	H
	2824	-47.70	-13	-34.70	-72.23	-55.41	1.23	11.09	H
									H
									H
									H
									H
	1416	-52.84	-13	-39.84	-71.14	-57.56	0.85	7.71	V
	2120	-50.39	-13	-37.39	-72.31	-57.34	1.07	10.17	V
	2824	-47.54	-13	-34.54	-72.04	-55.25	1.23	11.09	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC 12A-n66A

EN-DC 12A-n66A / 15MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3420	-55.19	-13	-42.19	-71.11	-66.15	1.35	12.31	H
	5135	-52.58	-13	-39.58	-74.53	-63.72	1.65	12.79	H
	6843	-48.89	-13	-35.89	-74.26	-59.27	1.74	12.12	H
									H
									H
									H
									H
	3420	-56.06	-13	-43.06	-72.4	-67.02	1.35	12.31	V
	5135	-53.05	-13	-40.05	-74.75	-64.19	1.65	12.79	V
	6843	-49.20	-13	-36.20	-74.17	-59.58	1.74	12.12	V
									V
									V
									V
									V
Middle	3476	-53.93	-13	-40.93	-70.39	-65.02	1.36	12.44	H
	5219	-52.54	-13	-39.54	-74.53	-63.78	1.67	12.91	H
	6955	-48.41	-13	-35.41	-74.35	-58.65	1.73	11.96	H
									H
									H
									H
									H
	3476	-54.91	-13	-41.91	-71.74	-66.00	1.36	12.44	V
	5219	-52.93	-13	-39.93	-74.74	-64.17	1.67	12.91	V
	6955	-48.73	-13	-35.73	-74.2	-58.97	1.73	11.96	V
									V
									V
									V
									V



Highest	3532	-55.82	-13	-42.82	-72.76	-66.97	1.37	12.52	H
	5296	-52.22	-13	-39.22	-74.49	-63.55	1.69	13.01	H
	7067	-47.68	-13	-34.68	-35.68	-57.72	1.76	11.79	H
									H
									H
									H
									H
	3532	-55.62	-13	-42.62	-72.81	-66.77	1.37	12.52	V
	5296	-52.89	-13	-39.89	-74.88	-64.22	1.69	13.01	V
	7067	-47.95	-13	-34.95	-73.9	-57.99	1.76	11.79	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



EN-DC 2A-n41A

EN-DC 2A-n41A / 20MHz / PI/2 BPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4992	-52.21	-25	-27.21	-74.21	-63.20	1.61	12.60	H
	7488	-47.47	-25	-22.47	-73.88	-56.61	1.98	11.12	H
	9990	-45.46	-25	-20.46	-75.04	-54.37	2.40	11.30	H
									H
									H
									H
									H
	4992	-52.61	-25	-27.61	-74.15	-63.60	1.61	12.60	V
	7488	-47.49	-25	-22.49	-73.86	-56.63	1.98	11.12	V
	9990	-45.00	-25	-20.00	-75.35	-53.91	2.40	11.30	V
									V
									V
									V
									V
Middle	5166	-50.55	-25	-25.55	-72.5	-61.73	1.65	12.83	H
	7752	-48.11	-25	-23.11	-74.02	-57.24	2.03	11.15	H
	10377	-44.31	-25	-19.31	-74.83	-52.92	2.39	11.00	H
									H
									H
									H
									H
	5166	-51.05	-25	-26.05	-72.79	-62.23	1.65	12.83	V
	7752	-48.10	-25	-23.10	-73.77	-57.23	2.03	11.15	V
	10377	-44.24	-25	-19.24	-74.74	-52.85	2.39	11.00	V
									V
									V
									V
									V



Highest	5340	-52.13	-25	-27.13	-74.55	-63.51	1.70	13.08	H
	8016	-46.20	-25	-21.20	-73.36	-55.37	2.06	11.23	H
	10683	-44.18	-25	-19.18	-75.04	-52.59	2.49	10.90	H
									H
									H
									H
									H
	5340	-52.39	-25	-27.39	-74.47	-63.77	1.70	13.08	V
	8016	-46.97	-25	-21.97	-74.02	-56.14	2.06	11.23	V
	10683	-44.40	-25	-19.40	-75.02	-52.81	2.49	10.90	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.