



# FCC RADIO TEST REPORT

**FCC ID** : 2AJN7-TP00147A  
**Equipment** : Notebook Computer  
**Brand Name** : Lenovo  
**Compliance ID** : TP00147A, TP00147B  
**Applicant** : LC Future Center Limited Taiwan Branch  
7F., No.780, Beian Rd., Zhongshan Dist., Taipei  
104, Taiwan  
**Manufacturer** : LCFC (HeFei) Electronics Technology Co., Ltd.  
No. 3188-1, Yungu Road (Hefei Export  
Processing Zone), Hefei Economics &  
Technology Development Area, Anhui, CHINA  
**Standard** : FCC 47 CFR Part 2, 90(R)

Equipment: Fibocom L860-GL-16 tested inside of Lenovo Notebook Computer.

The product was received on Jan. 10, 2023 and testing was performed from Jan. 20, 2023 to Feb. 07, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT .....	5
1.4 Testing Site.....	6
1.5 Applied Standards .....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	7
2.3 Support Unit used in test configuration and system .....	8
2.4 Frequency List of Low/Middle/High Channels .....	8
<b>3 Conducted Test Items.....</b>	<b>9</b>
3.1 Measuring Instruments .....	9
3.2 Conducted Output Power Measurement and ERP.....	10
<b>4 Radiated Test Items .....</b>	<b>11</b>
4.1 Measuring Instruments .....	11
4.2 Radiated Spurious Emission .....	13
<b>5 List of Measuring Equipment.....</b>	<b>14</b>
<b>6 Uncertainty of Evaluation.....</b>	<b>15</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of Radiated Test</b>	
<b>Appendix C. Test Setup Photographs</b>	





Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§90.542 (a)(7)	Effective Radiated Power	Pass	-
-	-	Peak-to-Average Ratio	-	See Note
-	§2.1049	Occupied Bandwidth	-	See Note
-	§2.1053 §90.543 (e)(2)	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §90.210 (n)	Emission Mask	-	See Note
-	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	-	See Note
-	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	-	See Note
4.2	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	Pass	3.89 dB under the limit at 1576.000 MHz

Note:

- For host device, Radiated Spurious Emission and Effective Radiated Power are verified and complies with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: L860-GL-16)

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to report "Uncertainty of Evaluation".

Comments and Explanations:

- The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.
- The purpose of different Compliance ID is for marketing segmentation.

Reviewed by: Sheng Kuo

Report Producer: Lucy Wu

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Compliance ID	TP00147A, TP00147B
FCC ID	2AJN7-TP00147A
Integrated WLAN Module	Brand Name: Intel Model Name: AX211D2W FCC ID: PD9AX211D2
Integrated NFC Module	Brand Name: Foxconn Model Name: T77H747
EUT supports Radios application	WCDMA/HSPA/LTE/GNSS/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer.
2. Equipment: Fibocom L860-GL-16 tested inside of Lenovo Notebook Computer.

WWAN Antenna Information				
Main Antenna	Manufacturer	Speedwire	Peak gain(dBi)	LTE Band 14 : 0.1
	Part number	DC33001ZV40	Type	PIFA

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	790.5 MHz ~ 795.5 MHz
Rx Frequency	760.5 MHz ~ 765.5 MHz
Bandwidth	5 MHz / 10 MHz
Maximum Output Power to Antenna	23.63 dBm
Type of Modulation	QPSK / 16QAM / 64QAM

## 1.3 Modification of EUT

No modifications made to the EUT during the testing.



### 1.4 Testing Site

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site No.	<b>Sporton Site No.</b>
	TH03-HY
Test Engineer	Mike Yeh
Temperature (°C)	22.1~23.5
Relative Humidity (%)	52~57

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	<b>Sporton Site No.</b>
	03CH16-HY (TAF Code: 3786)
Test Engineer	Andy Yang, Karl Hou and Steven Wu
Temperature (°C)	20~25
Relative Humidity (%)	50~65
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

### 1.5 Applied Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, Part 90(R)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.


## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	14	-	-	v	v	-	-	v	v		v			v	v	v
E.R.P	14	-	-	v	v	-	-	v	v		Max. Power					
Radiated Spurious Emission	14	-	-	v	v	-	-	v			v			v	v	v
Remark	<ol style="list-style-type: none"> <li>The mark "v " means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>For modulation of QPSK/16QAM, the maximum power of QPSK/16QAM is higher than other modulation (64QAM), therefore, according to engineering evaluation, we choose higher power (QPSK/16QAM) to perform all tests and show in the report.</li> </ol>															

### 2.2 Connection Diagram of Test System

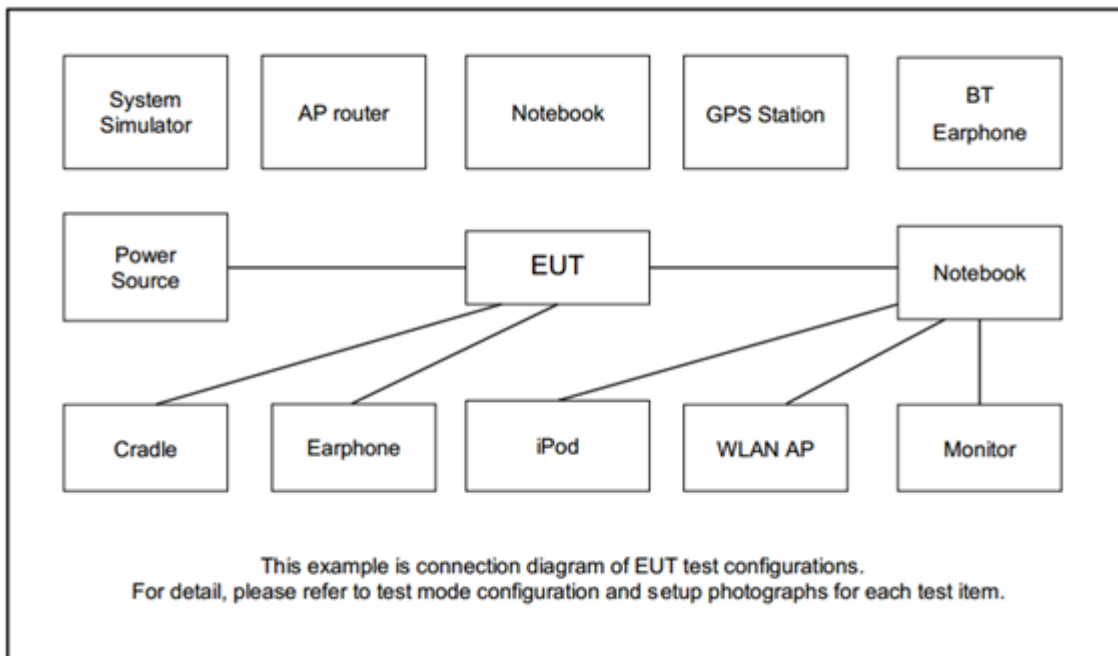



## 2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	Lenovo	TS300-01MS21-8S	N/A	Shielded, 1.2 m	N/A

## 2.4 Frequency List of Low/Middle/High Channels

LTE Band 14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23330	-
	Frequency	-	793	-
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5




### 3 Conducted Test Items

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power

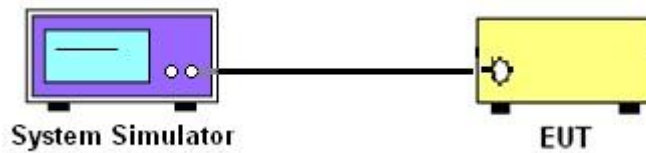

##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



## 3.2 Conducted Output Power Measurement and ERP

### 3.2.1 Description of the Conducted Output Power Measurement and ERP Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 4.1.1 Test Setup


For radiated test below 30MHz

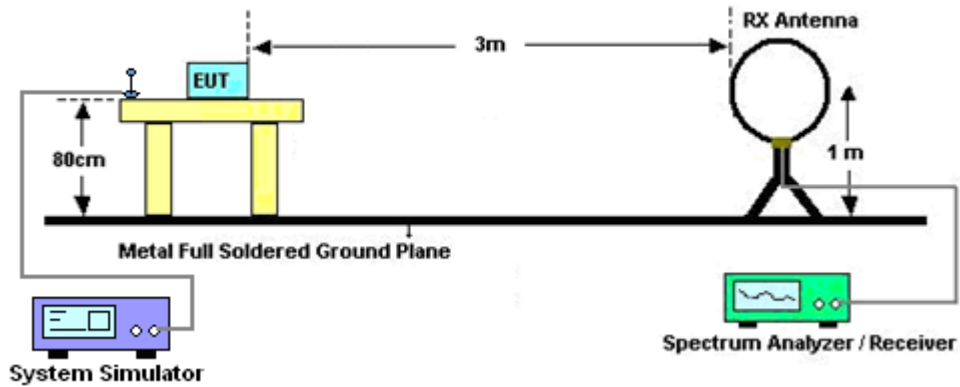

For radiated test from 30MHz to 1GHz

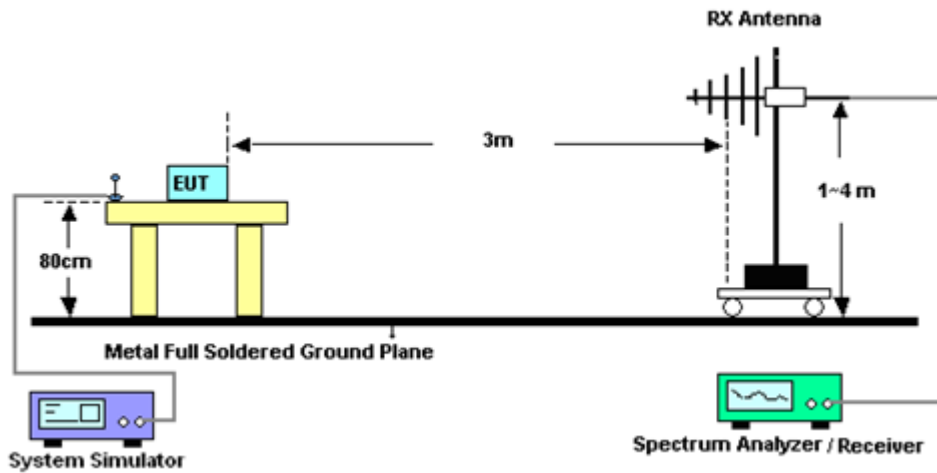

For radiated test above 1GHz

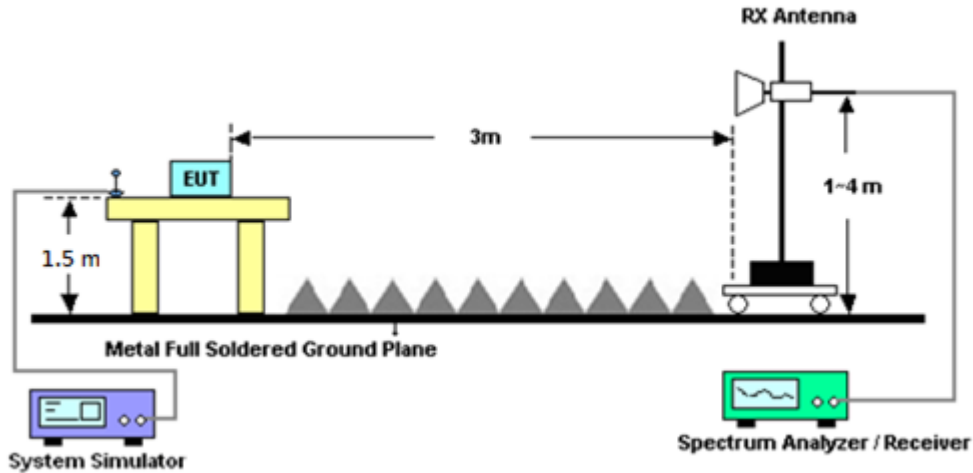

#### 4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

**Note:**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## **4.2 Radiated Spurious Emission**

### **4.2.1 Description of Radiated Spurious Emission**

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### **4.2.2 Test Procedures**

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Jan. 28, 2023~ Feb. 07, 2023	Sep. 19, 2023	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	41912 & 07	30MHz to 1GHz	Apr. 24, 2022	Jan. 28, 2023~ Feb. 07, 2023	Apr. 23, 2023	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01 N-06	47020 & 06	30MHz to 1GHz	Oct. 08, 2022	Jan. 28, 2023~ Feb. 07, 2023	Oct. 07, 2023	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-021 14	1G~18GHz	Aug. 09, 2022	Jan. 28, 2023~ Feb. 07, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-152 2	1G~18GHz	Mar. 10, 2022	Jan. 28, 2023~ Feb. 07, 2023	Mar. 09, 2023	Radiation (03CH16-HY)
Signal Generator	Agilent	MG3694C	163401	0.1Hz~40GHz	Feb. 13, 2022	Jan. 28, 2023~ Feb. 07, 2023	Feb. 12, 2023	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1G	Jul. 04, 2022	Jan. 28, 2023~ Feb. 07, 2023	Jul. 03, 2023	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1-18GHz	Dec. 26, 2022	Jan. 28, 2023~ Feb. 07, 2023	Dec. 25, 2023	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY532702 64	1GHz~26.5GHz	Dec. 09, 2022	Jan. 28, 2023~ Feb. 07, 2023	Dec. 08, 2023	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A	MY572901 11	3Hz~26.5GHz	Dec. 15, 2022	Jan. 28, 2023~ Feb. 07, 2023	Dec. 14, 2023	Radiation (03CH16-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz~44GHz	Oct. 07, 2022	Jan. 28, 2023~ Feb. 07, 2023	Oct. 06, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	805935/4	N/A	Aug. 09, 2022	Jan. 28, 2023~ Feb. 07, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	802434/4	N/A	Aug. 09, 2022	Jan. 28, 2023~ Feb. 07, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	EC-A5-300 -5757	N/A	Aug. 09, 2022	Jan. 28, 2023~ Feb. 07, 2023	Aug. 08, 2023	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Jan. 28, 2023~ Feb. 07, 2023	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jan. 28, 2023~ Feb. 07, 2023	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 28, 2023~ Feb. 07, 2023	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 28, 2023~ Feb. 07, 2023	N/A	Radiation (03CH16-HY)
Radio Communication Analyzer	Anritsu	MT8821C	626202535 3	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 13, 2022	Jan. 20, 2023~ Jan. 21, 2023	Oct. 12, 2023	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 06, 2023	Jan. 20, 2023~ Jan. 21, 2023	Jan. 05, 2024	Conducted (TH03-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.98 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.54 dB
---	---------



### Appendix A. Test Results of Conducted Test

#### Conducted Output Power(Average power & ERP)

LTE Band 14 Maximum Average Power [dBm] (GT - LC = 0.1 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
10	1	0	QPSK	-	23.63	-	21.58	0.1439
10	1	0	16-QAM	-	23.00	-	20.95	0.1245
Limit	ERP < 3W			Result			Pass	

LTE Band 14 Maximum Average Power [dBm] (GT - LC = 0.1 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
5	1	0	QPSK	23.55	23.62	23.53	21.57	0.1435
5	1	0	16-QAM	23.00	22.91	22.93	20.95	0.1245
Limit	ERP < 3W			Result			Pass	





### Appendix B. Test Results of Radiated Test

### LTE Band 14

LTE Band 14 / 5MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1576	-46.04	-42.15	-3.89	-60.05	-49.10	3.80	9.01	H
	2365	-57.68	-13.00	-44.68	-75.85	-60.77	4.68	9.92	H
	3153	-54.64	-13.00	-41.64	-75.55	-58.38	5.42	11.31	H
									H
									H
									H
	1576	-47.47	-42.15	-5.32	-61.36	-50.53	3.80	9.01	V
	2365	-57.78	-13.00	-44.78	-75.86	-60.87	4.68	9.92	V
	3153	-55.06	-13.00	-42.06	-75.87	-58.80	5.42	11.31	V
									V
									V
									V
Middle	1581	-46.25	-42.15	-4.10	-60.26	-49.34	3.80	9.05	H
	2372	-57.41	-13.00	-44.41	-75.60	-60.54	4.69	9.98	H
	3163	-54.51	-13.00	-41.51	-75.46	-58.28	5.43	11.35	H
									H
									H
									H
	1581	-46.13	-42.15	-3.98	-60.00	-49.22	3.80	9.05	V
	2372	-57.87	-13.00	-44.87	-75.94	-61.00	4.69	9.98	V
	3163	-54.47	-13.00	-41.47	-75.32	-58.24	5.43	11.35	V
									V
									V
									V



Highest	1586	-46.16	-42.15	-4.01	-60.16	-49.29	3.81	9.09	H
	2380	-57.16	-13.00	-44.16	-75.37	-60.35	4.70	10.04	H
	3173	-54.99	-13.00	-41.99	-75.98	-58.79	5.44	11.39	H
									H
									H
									H
	1586	-46.27	-42.15	-4.12	-60.12	-49.40	3.81	9.09	V
	2380	-57.86	-13.00	-44.86	-75.91	-61.05	4.70	10.04	V
	3173	-55.08	-13.00	-42.08	-75.96	-58.88	5.44	11.39	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 14 / 10MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1577	-59.43	-42.15	-17.28	-73.44	-62.50	3.80	9.02	H
	2365	-57.45	-13.00	-44.45	-75.62	-60.54	4.68	9.92	H
	3154	-54.32	-13.00	-41.32	-75.23	-58.06	5.42	11.32	H
									H
									H
									H
	1577	-59.93	-42.15	-17.78	-73.82	-63.00	3.80	9.02	V
	2365	-56.82	-13.00	-43.82	-74.90	-59.91	4.68	9.92	V
	3154	-54.63	-13.00	-41.63	-75.44	-58.37	5.42	11.32	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.