

FCC Part 15C Measurement and Test Report

For

TIC Audio Inc

15224 Stafford Street, City of Industry, CA 91744

FCC ID: 2AJNG-AMP100

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>Outdoor Wifi&Bluetooth Receiver-Amplifier</u>
Tested Model:	<u>AMP100</u>
Report No.:	<u>STRD1806065I-1</u>
Sample Receipt Date:	<u>2018-07-09</u>
Tested Date:	<u>2018-07-10 to 2018-07-26</u>
Issued Date:	<u>2018-07-26</u>
Tested By:	<u>Long Tang / Engineer</u> <i>Long Tang</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> <i>Jandy So</i>
Prepared By:	

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	9
3. RF EXPOSURE	10
3.1 STANDARD APPLICABLE	10
3.2 TEST RESULT	10
4. ANTENNA REQUIREMENT	11
4.1 STANDARD APPLICABLE	11
4.2 EVALUATION INFORMATION	11
5. POWER SPECTRAL DENSITY	12
5.1 STANDARD APPLICABLE	12
5.2 TEST PROCEDURE	12
5.4 SUMMARY OF TEST RESULTS/PLOTS	12
6. 6DB BANDWIDTH	16
6.1 STANDARD APPLICABLE	16
6.2 TEST PROCEDURE	16
6.3 ENVIRONMENTAL CONDITIONS	16
6.4 SUMMARY OF TEST RESULTS/PLOTS	16
7. RF OUTPUT POWER	20
7.1 STANDARD APPLICABLE	20
7.2 TEST PROCEDURE	20
7.3 SUMMARY OF TEST RESULTS/PLOTS	20
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	25
8.1 STANDARD APPLICABLE	25
8.2 TEST PROCEDURE	25
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	26
8.5 SUMMARY OF TEST RESULTS/PLOTS	26
9. OUT OF BAND EMISSIONS	34
9.1 STANDARD APPLICABLE	34
9.2 TEST PROCEDURE	34
9.3 SUMMARY OF TEST RESULTS/PLOTS	35
10. CONDUCTED EMISSIONS	50
10.1 TEST PROCEDURE	50
10.2 BASIC TEST SETUP BLOCK DIAGRAM	50
10.3 TEST RECEIVER SETUP	50
10.4 SUMMARY OF TEST RESULTS/PLOTS	50

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: TIC Audio Inc
 Address of applicant: 15224 Stafford Street, City of Industry, CA 91744

Manufacturer: ZhangZhou Yile Electronics Technology Co., Ltd
 Address of manufacturer: Lantian Industrial District, Zhangzhou, Fujian, China

General Description of EUT	
Product Name:	Outdoor Wifi&Bluetooth Receiver-Amplifier
Trade Name:	TIC
Model No.:	AMP100
Adding Model(s):	APM50, AMP6, AMP8, AMP10, AMP16, AMP18, AMP28, AMP150, AMP200, AMP66, AMP68, AMP86, AMP88, AMP98, WBR1, WBR2, WBR5, WBR6, WBR8, WBR10, WBR12, WBR16, WBR66, WBR68, WBR86, WBR88, WB6, WB8, WB16, WB18, WB66, WB60, WB68, WB86, WB88, WB98, WB80, WB36, WB38, WB5, WB4, WB3, WB1, WB2, WB7, WB17, WB26, WB28, WB38, WB48, WBLS6, WBLS8, WBLS10, WBLS16, WBLS66, WBLS68, WBLS88, WBLS98, WBLS86, WBLS78, WBLS77, WBLS80, WBP6, WBP5, WBP8, WBP10, WBP16, WBP18, WBP66, WBP68, WBP86, WBP88, WBP77, WBP98
Rated Voltage:	DC20V
Battery:	/
Power Adapter Model:	Model:OWA-90U-20 INPUT:AC100-240V 1.1A 50/60Hz OUTPUT:DC20V,4.5A
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model AMP100, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n(HT20)
Frequency Range:	2412-2462MHz
RF Output Power:	11.32dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 72.2Mbps
Quantity of Channels:	11
Channel Separation:	5MHz
Type of Antenna:	SMA-reverse
Antenna Gain:	3.0dBi
Lowest Internal Frequency of EUT:	26MHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 DTS Meas Guidance v04: GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a SMA-reverse antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure




According to the KDB 558074 D01 v04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:




- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).




5.4 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-19.59	8
	2437	-19.20	8
	2462	-18.82	8
802.11g	2412	-19.86	8
	2437	-20.58	8
	2462	-20.32	8
802.11n-HT20	2412	-25.01	8
	2437	-26.98	8
	2462	-24.46	8

Please refer to the following test plots:
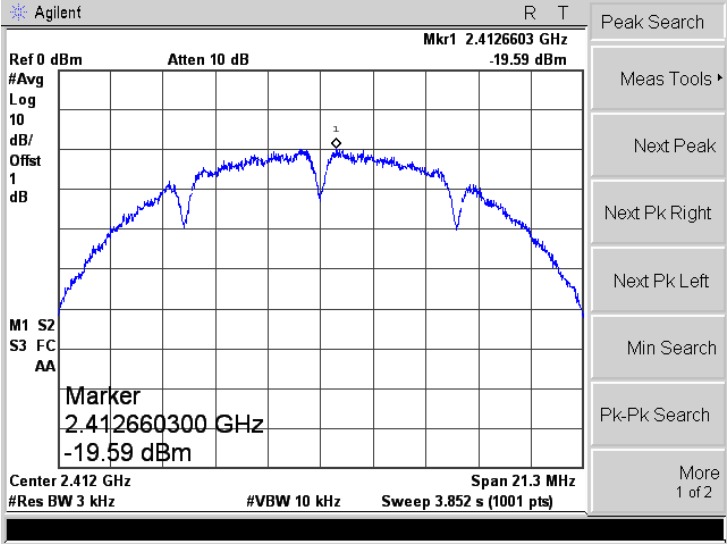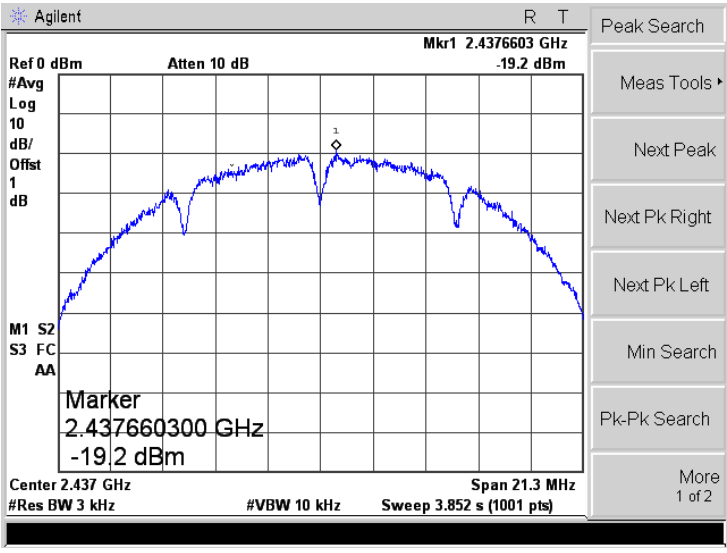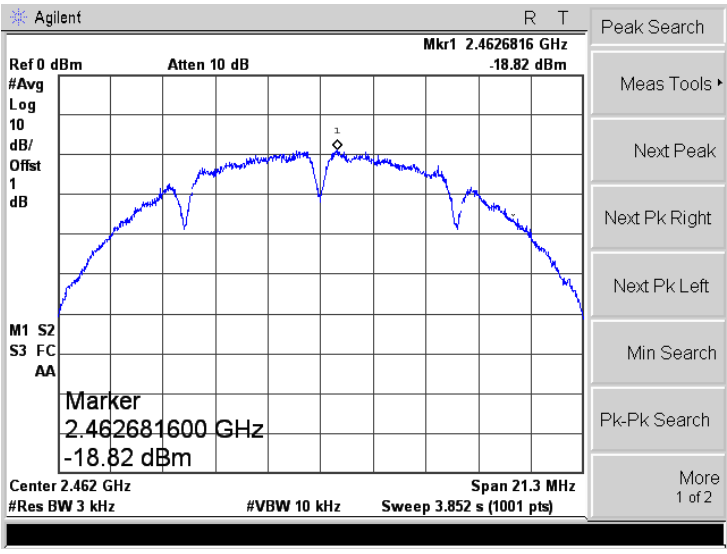
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	
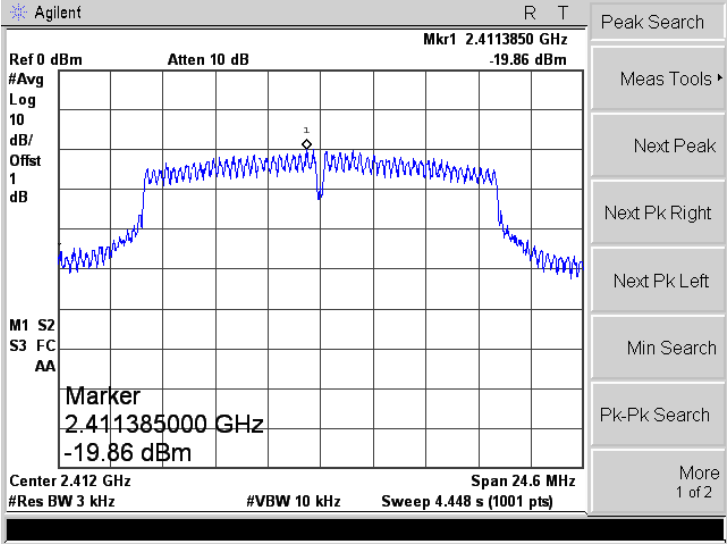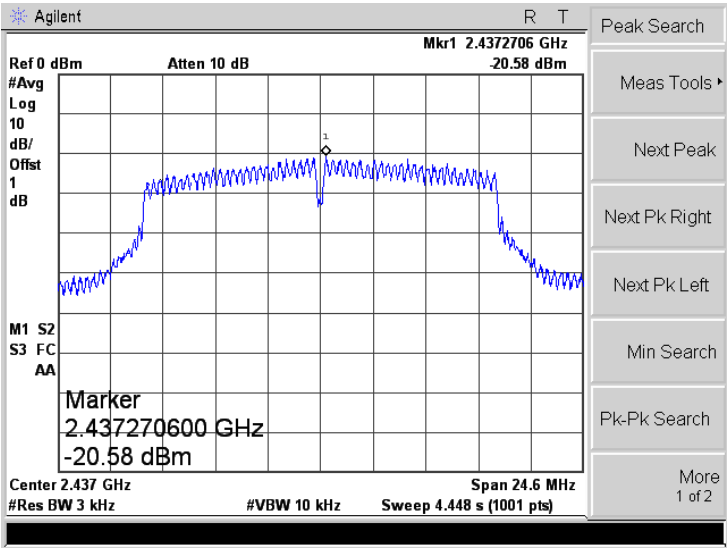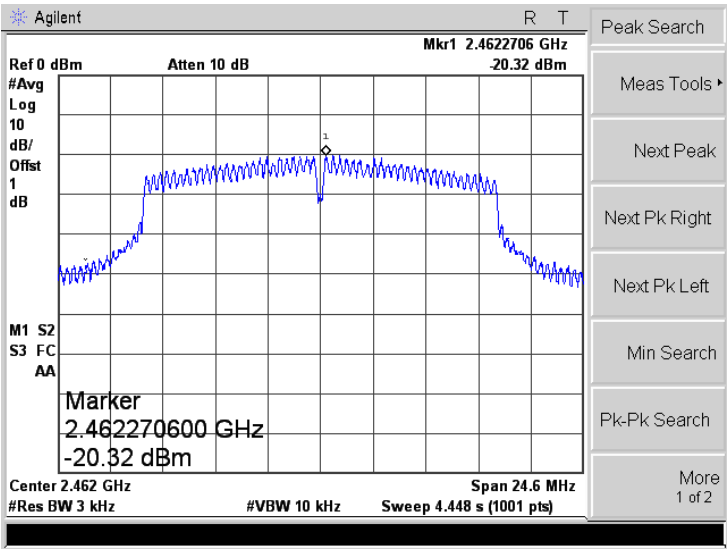
<p>802.11g-Low</p>	
<p>802.11g-Middle</p>	
<p>802.11g-High</p>	
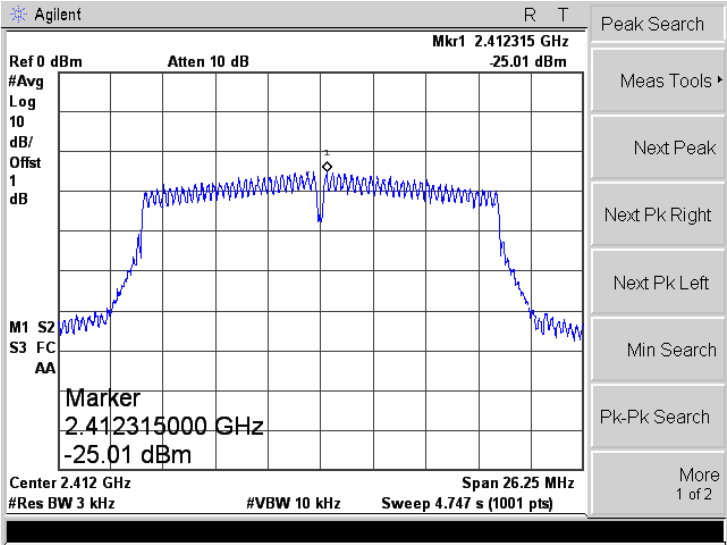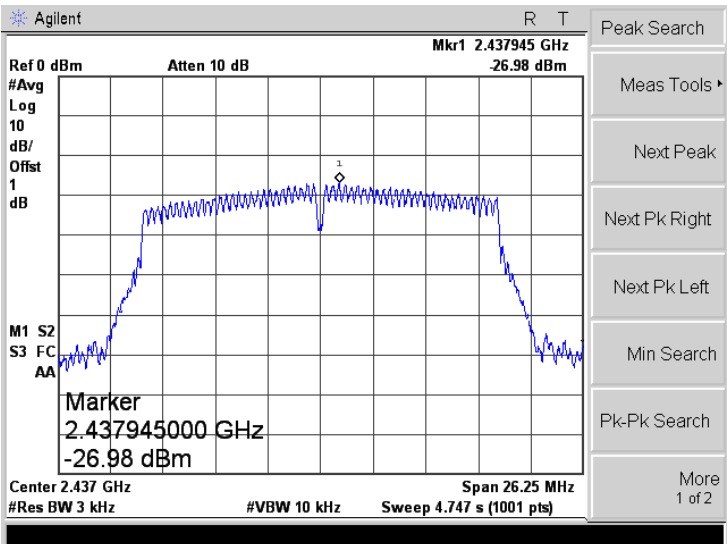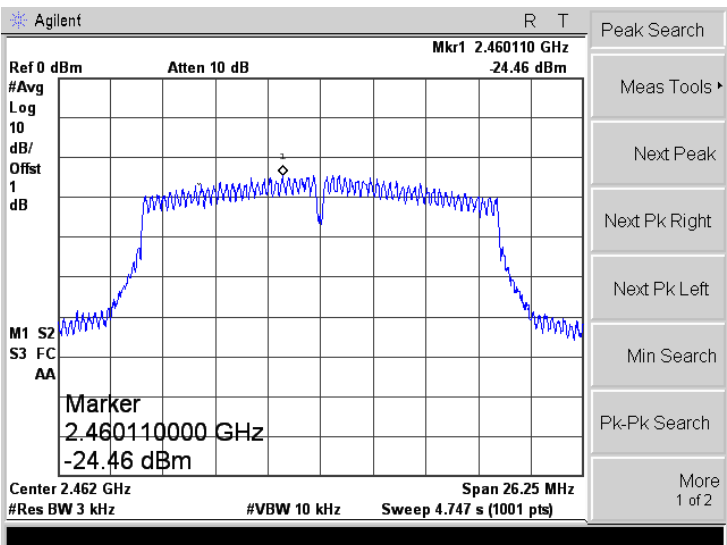
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Environmental Conditions




Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar




6.4 Summary of Test Results/Plots

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b	2412	9.547	≥ 500
	2437	10.018	≥ 500
	2462	9.065	≥ 500
802.11g	2412	16.309	≥ 500
	2437	16.300	≥ 500
	2462	16.304	≥ 500
802.11n-HT20	2412	17.314	≥ 500
	2437	17.542	≥ 500
	2462	17.086	≥ 500

Please refer to the following test plots:

<p>802.11b-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 14.1910 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 63.429 kHz x dB Bandwidth 9.547 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 14.1792 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -23.435 kHz x dB Bandwidth 10.018 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 14.1992 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -21.984 kHz x dB Bandwidth 9.065 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
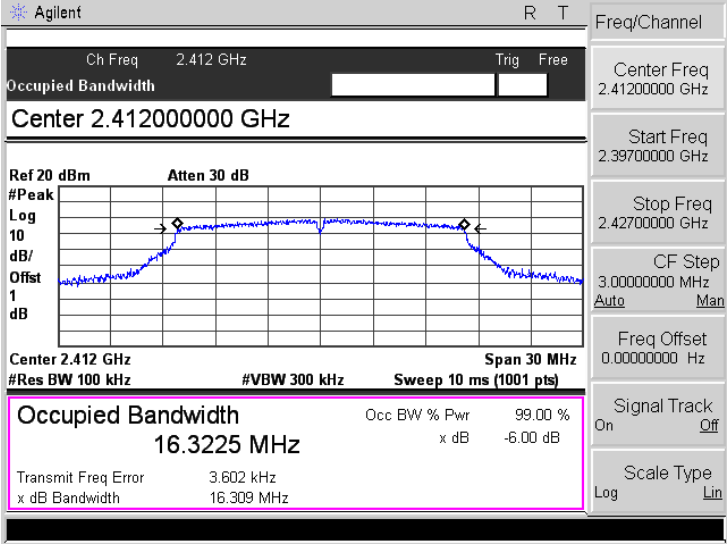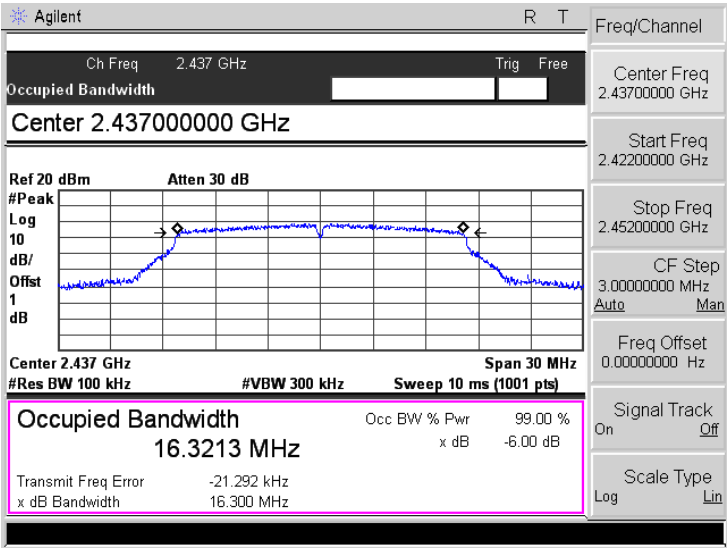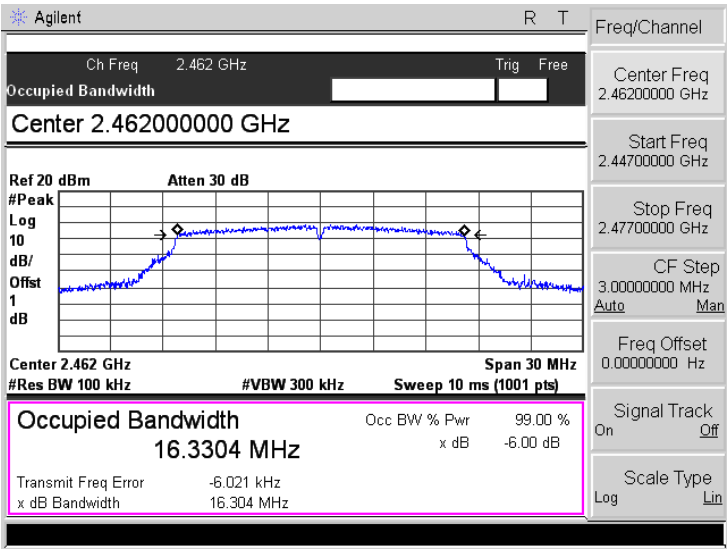
<p>802.11g-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3225 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 3.602 kHz x dB Bandwidth 16.309 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3213 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -21.292 kHz x dB Bandwidth 16.300 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.3304 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -6.021 kHz x dB Bandwidth 16.304 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

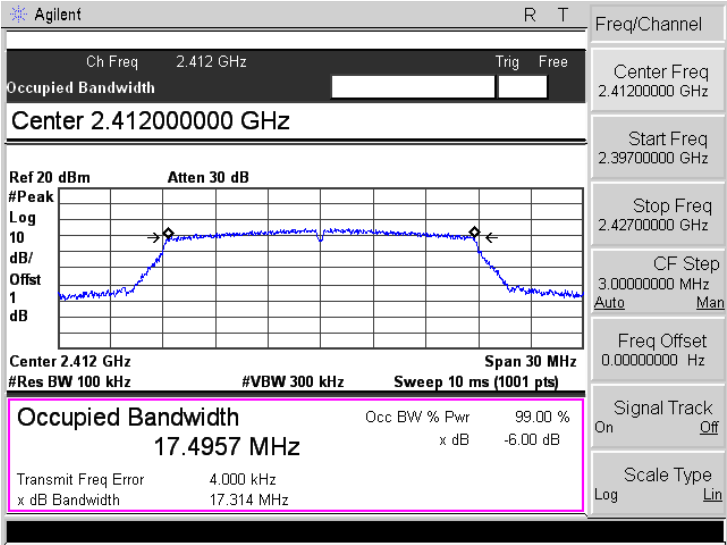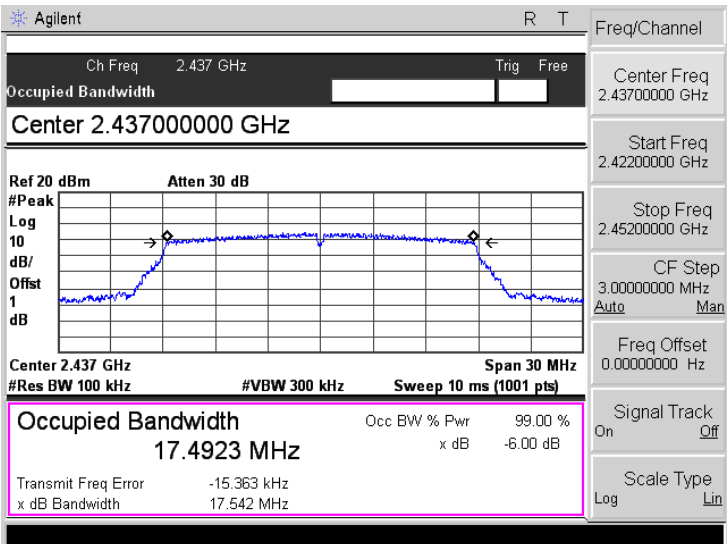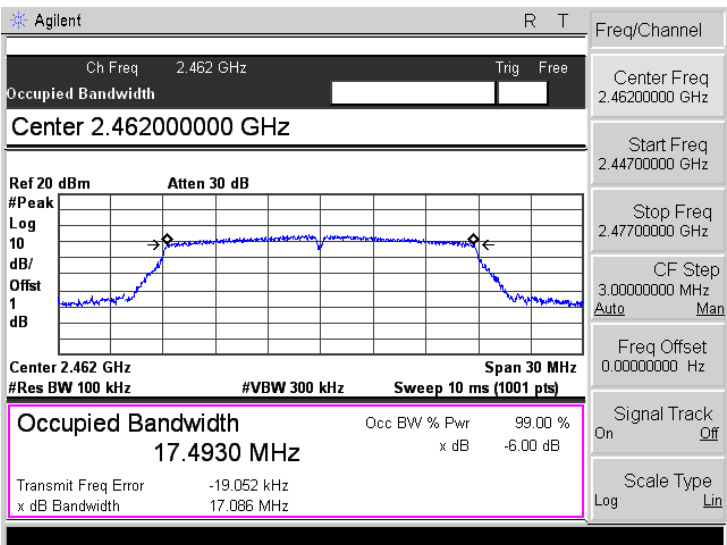802.11n-HT20-Low	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4957 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 4.000 kHz x dB Bandwidth 17.314 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
802.11n-HT20-Middle	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4923 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -15.363 kHz x dB Bandwidth 17.542 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
802.11n-HT20-High	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.4930 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -19.052 kHz x dB Bandwidth 17.086 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure




According to the KDB-558074 D01 v04, 9.2.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth




- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.




7.3 Summary of Test Results/Plots

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	11.31	13.52	1000
	2437	11.19	13.15	1000
	2462	11.18	13.12	1000
802.11g_54Mbps	2412	11.32	13.55	1000
	2437	11.21	13.21	1000
	2462	10.95	12.45	1000
802.11n HT20_MCS7	2412	6.93	4.93	1000
	2437	6.94	4.94	1000
	2462	7.02	5.04	1000

Please refer to the following test plots:
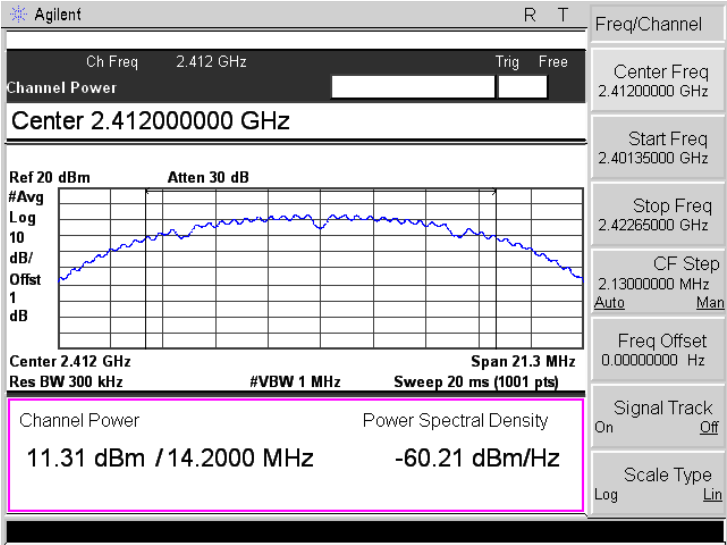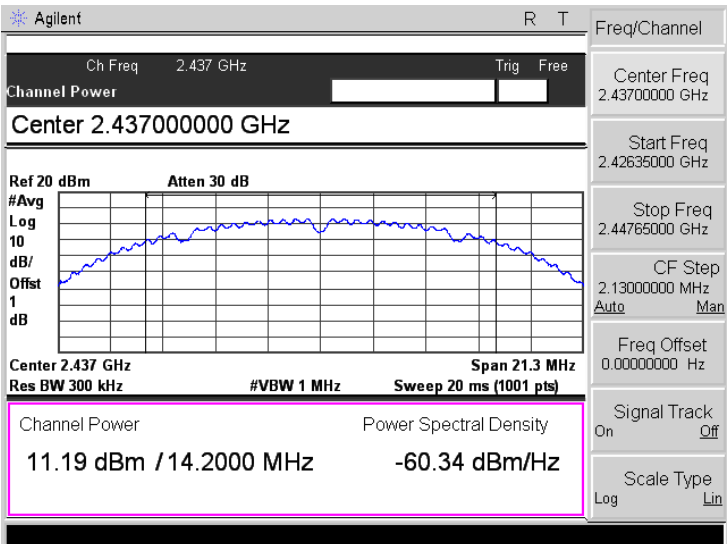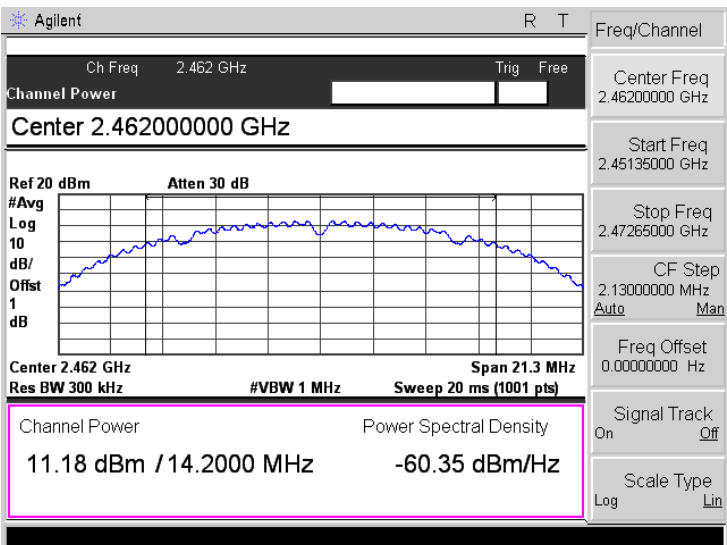
<p>802.11b-Low 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 21.3 MHz Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density 11.31 dBm / 14.2000 MHz -60.21 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.40135000 GHz</p> <p>Stop Freq 2.42265000 GHz</p> <p>CF Step 2.13000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 21.3 MHz Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density 11.19 dBm / 14.2000 MHz -60.34 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42635000 GHz</p> <p>Stop Freq 2.44765000 GHz</p> <p>CF Step 2.13000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 21.3 MHz Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density 11.18 dBm / 14.2000 MHz -60.35 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.45135000 GHz</p> <p>Stop Freq 2.47265000 GHz</p> <p>CF Step 2.13000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
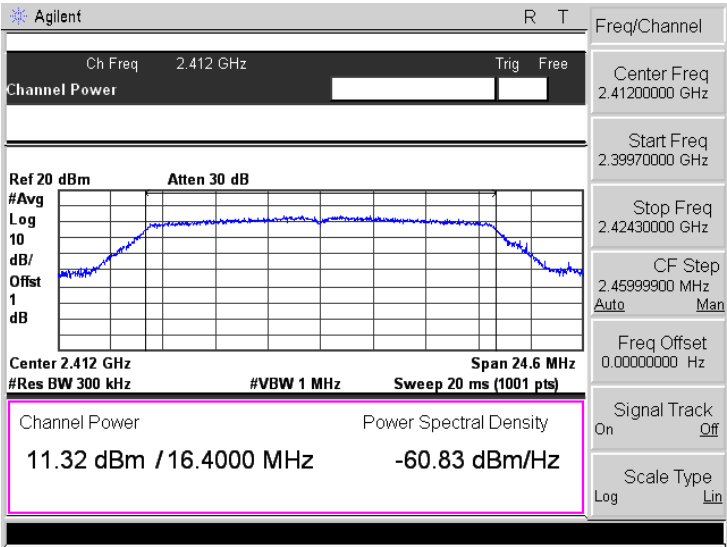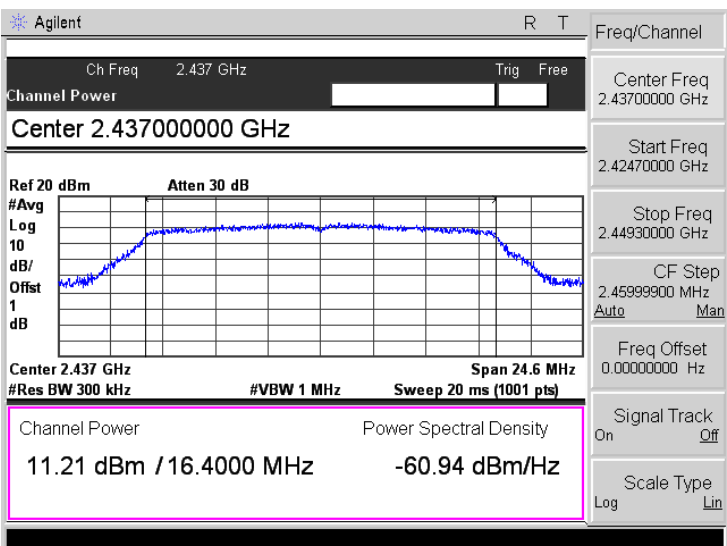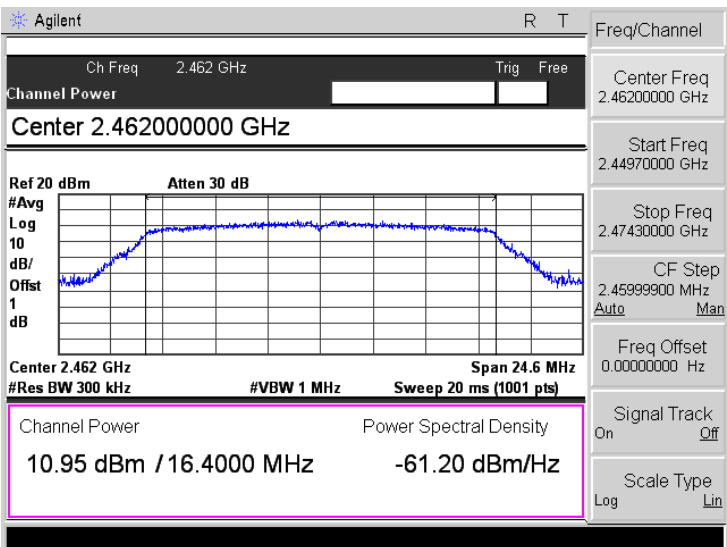
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 24.6 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.32 dBm / 16.4000 MHz -60.83 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39970000 GHz</p> <p>Stop Freq 2.42430000 GHz</p> <p>CF Step 2.45999900 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 24.6 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>11.21 dBm / 16.4000 MHz -60.94 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42470000 GHz</p> <p>Stop Freq 2.44930000 GHz</p> <p>CF Step 2.45999900 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 24.6 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>10.95 dBm / 16.4000 MHz -61.20 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44970000 GHz</p> <p>Stop Freq 2.47430000 GHz</p> <p>CF Step 2.45999900 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
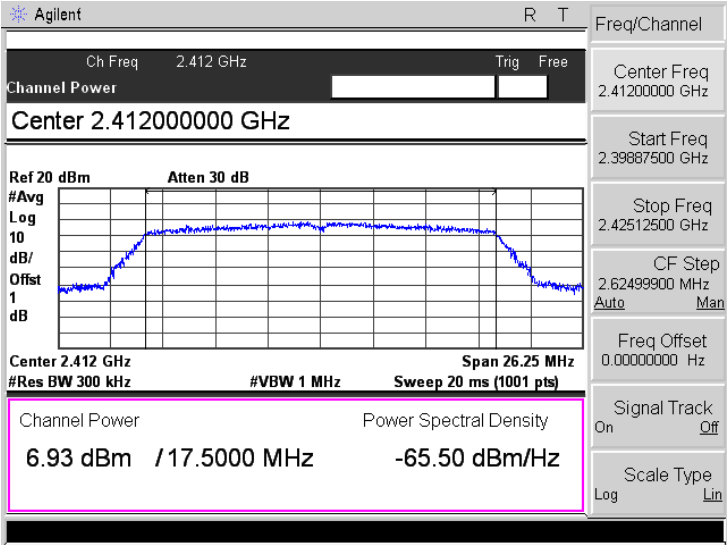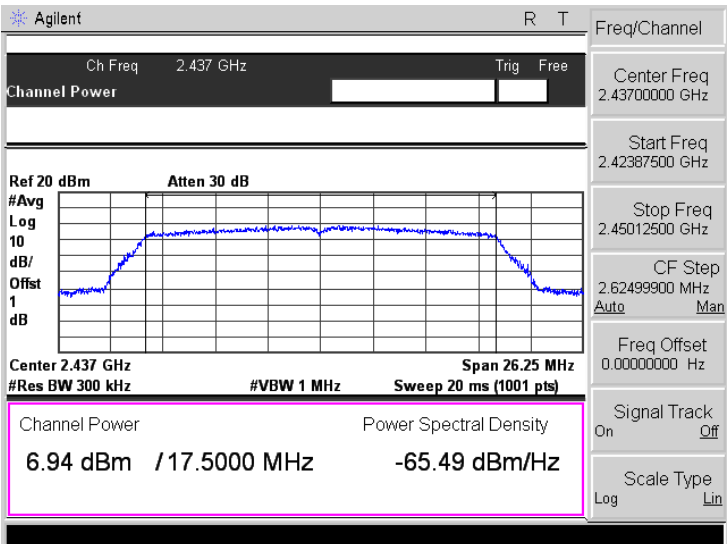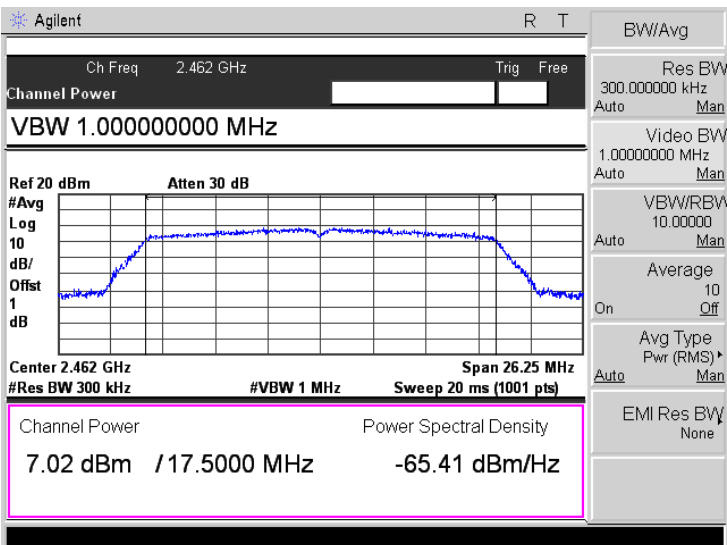
<p>802.11n-HT20-Low MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 26.25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>6.93 dBm / 17.5000 MHz -65.50 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39887500 GHz</p> <p>Stop Freq 2.42512500 GHz</p> <p>CF Step 2.62499900 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.437 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 26.25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>6.94 dBm / 17.5000 MHz -65.49 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42387500 GHz</p> <p>Stop Freq 2.45012500 GHz</p> <p>CF Step 2.62499900 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>VBW 1.000000000 MHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 26.25 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.02 dBm / 17.5000 MHz -65.41 dBm/Hz</p> <p>BW/Avg</p> <p>Res BW 300.000000 kHz Auto Man</p> <p>Video BW 1.00000000 MHz Auto Man</p> <p>VBW/RBW 10.0000 Auto Man</p> <p>Average 10 On Off</p> <p>Avg Type Pwr (RMS) Auto Man</p> <p>EMI Res BW None</p>

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

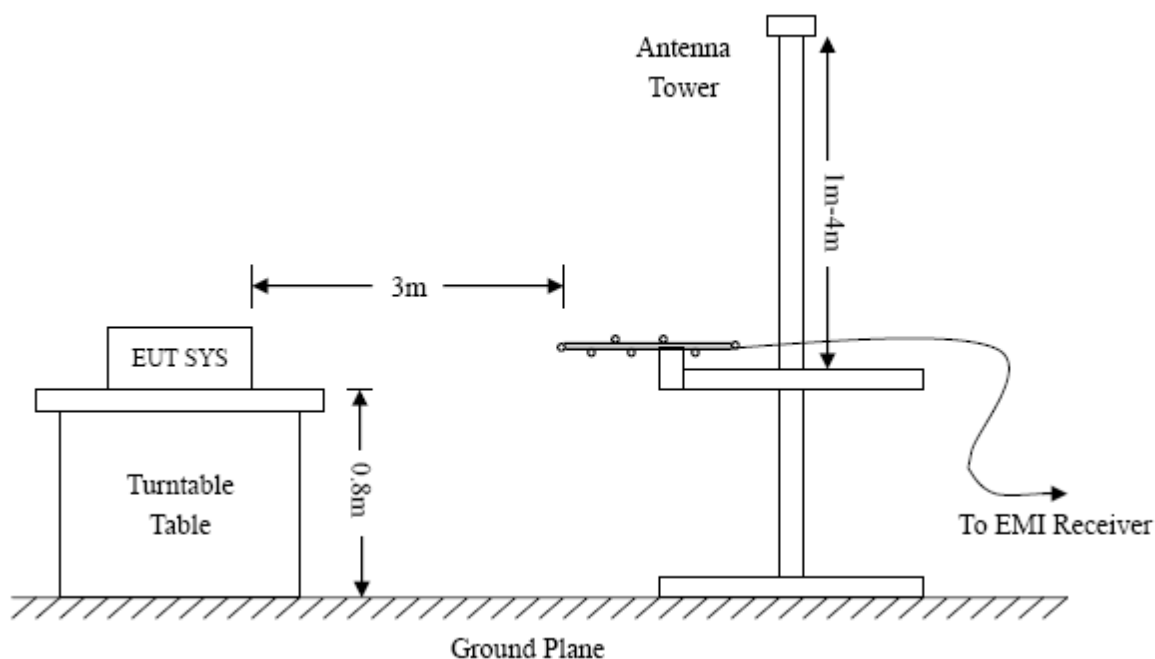

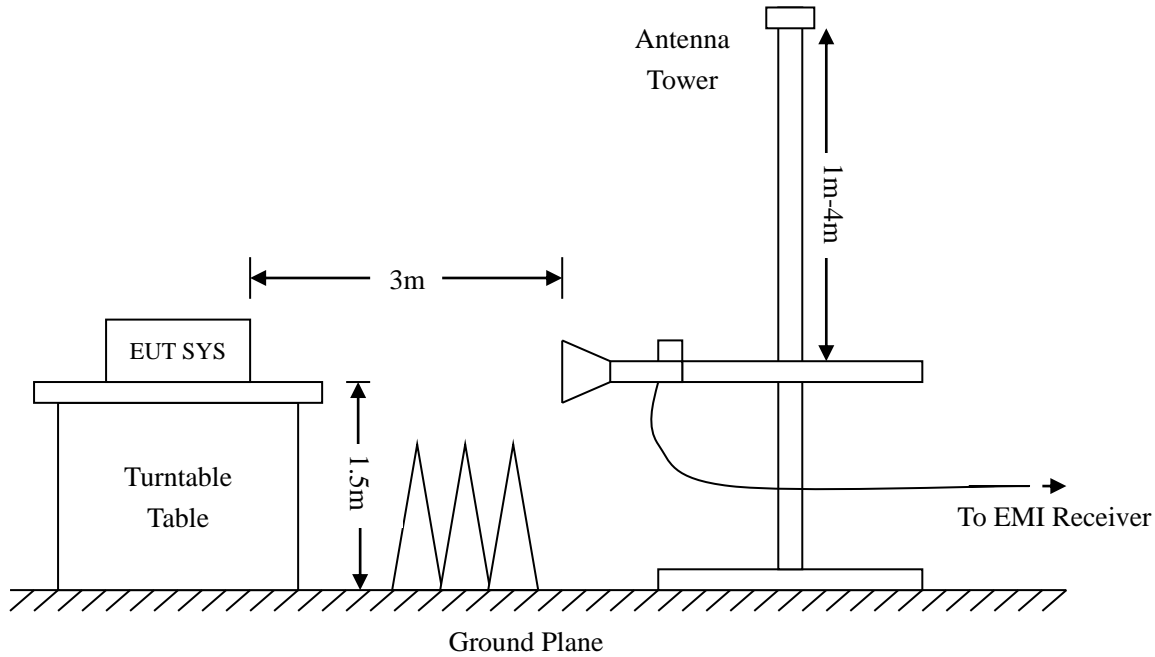

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=360KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


8.5 Summary of Test Results/Plots

Note:1. This EUT was tested in 3 orthogonal positions and the external antenna was manipulated. Then the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.


➤ Spurious Emissions Below 1GHz

802.11b			
Test Channel	Low	Polarity:	Horizontal

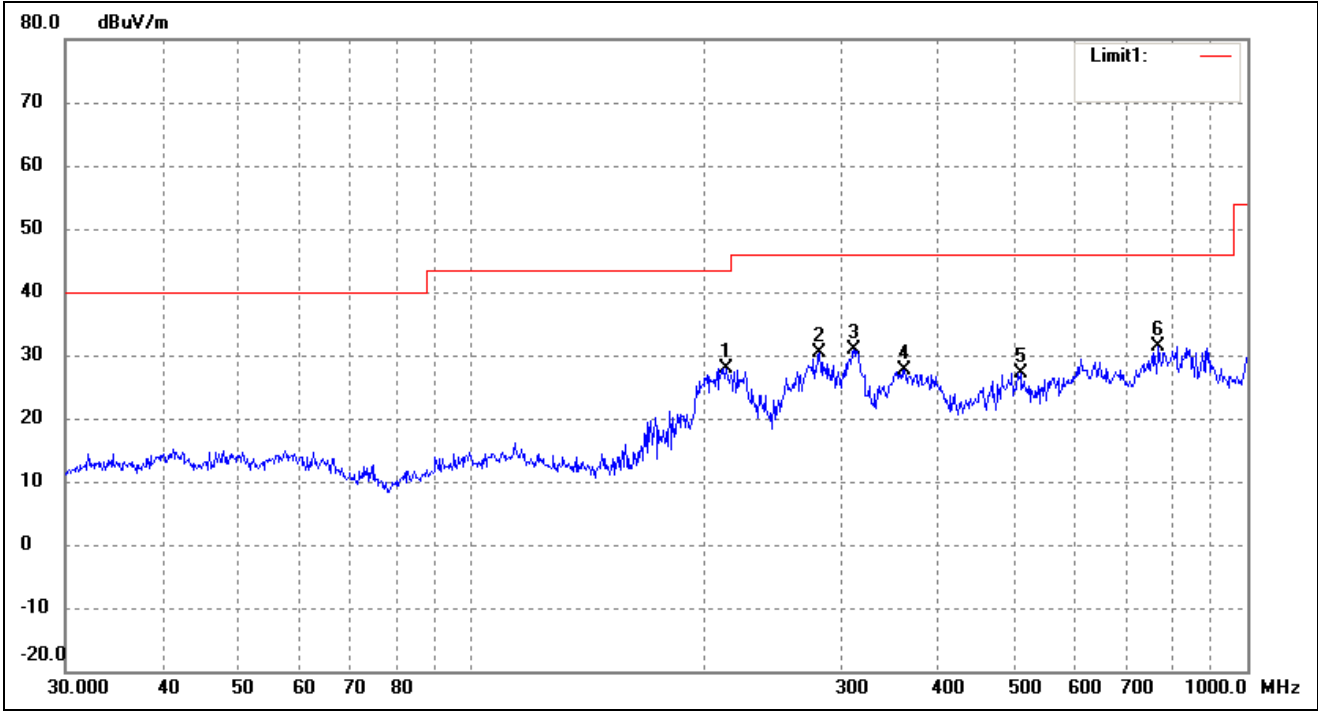

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	213.0151	43.33	-15.43	27.90	43.50	-15.60	350	100	peak
2	281.0075	39.33	-8.98	30.35	46.00	-15.65	95	100	peak
3	311.0867	38.68	-7.92	30.76	46.00	-15.24	90	100	peak
4	361.7139	35.91	-8.27	27.64	46.00	-18.36	121	100	peak
5	510.0436	34.69	-7.47	27.22	46.00	-18.78	184	100	peak
6	768.7481	35.23	-3.81	31.42	46.00	-14.58	142	100	peak

802.11b			
Test Channel	Low	Polarity:	Vertical

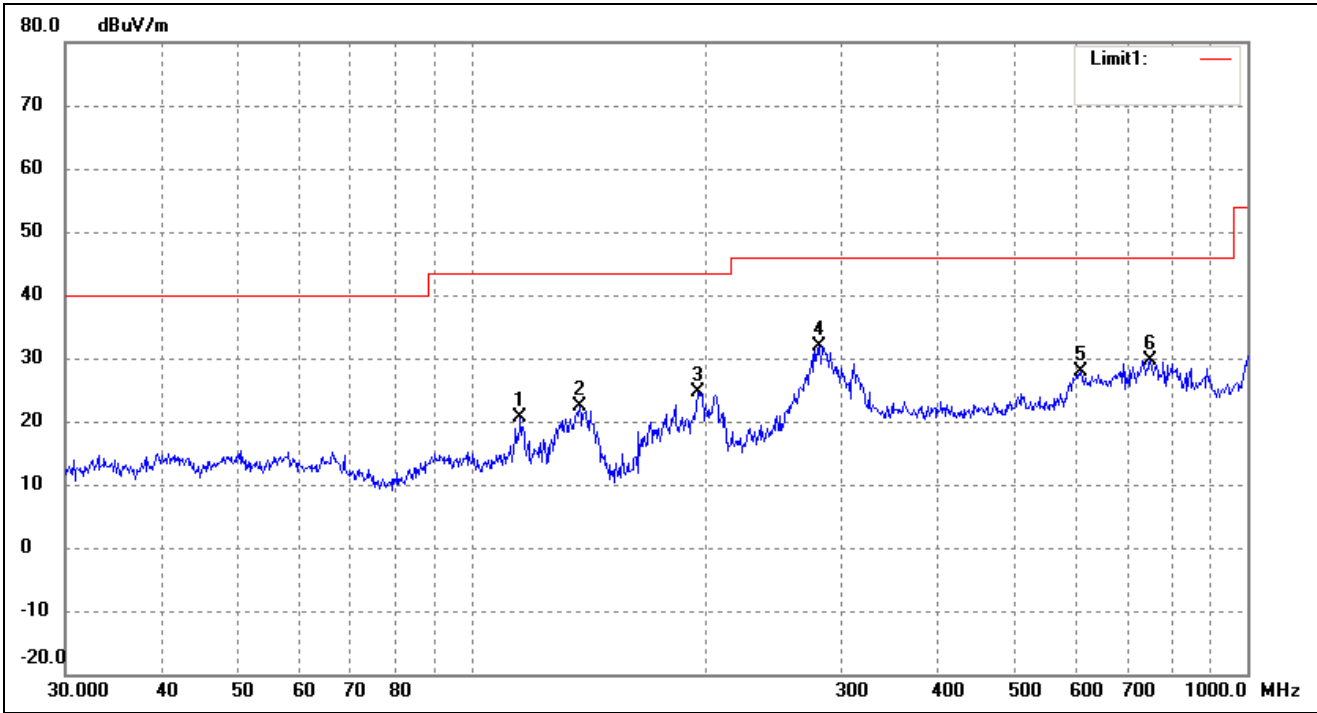

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	115.7256	38.54	-17.92	20.62	43.50	-22.88	153	100	peak
2	137.9028	41.36	-19.00	22.36	43.50	-21.14	108	100	peak
3	195.8220	43.50	-18.87	24.63	43.50	-18.87	90	100	peak
4	281.0075	40.92	-8.98	31.94	46.00	-14.06	273	100	peak
5	609.9217	31.03	-3.25	27.78	46.00	-18.22	318	100	peak
6	750.1083	32.34	-2.82	29.52	46.00	-16.48	192	100	peak

802.11b			
Test Channel	Middle	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	114.1138	34.35	-17.94	16.41	43.50	-27.09	86	100	peak
2	199.9856	46.54	-18.67	27.87	43.50	-15.63	102	100	peak
3	309.9977	41.01	-7.92	33.09	46.00	-12.91	87	100	peak
4	362.9844	37.10	-8.29	28.81	46.00	-17.19	92	100	peak
5	506.4791	34.64	-7.56	27.08	46.00	-18.92	279	100	peak
6	752.7432	35.07	-2.95	32.12	46.00	-13.88	305	100	peak

802.11b			
Test Channel	Middle	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	115.3205	36.91	-17.91	19.00	43.50	-24.50	271	100	peak
2	136.4598	41.52	-18.91	22.61	43.50	-20.89	98	100	peak
3	176.8878	41.48	-19.63	21.85	43.50	-21.65	322	100	peak
4	197.2001	41.72	-18.80	22.92	43.50	-20.58	101	100	peak
5	281.9946	40.69	-8.92	31.77	46.00	-14.23	255	100	peak
6	603.5392	32.01	-2.80	29.21	46.00	-16.79	332	100	peak

802.11b			
Test Channel	High	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	215.2678	42.58	-14.87	27.71	43.50	-15.79	343	100	peak
2	280.0237	38.03	-9.03	29.00	46.00	-17.00	346	100	peak
3	309.9977	38.09	-7.92	30.17	46.00	-15.83	58	100	peak
4	354.1831	35.82	-8.36	27.46	46.00	-18.54	223	100	peak
5	502.9395	35.48	-7.65	27.83	46.00	-18.17	104	100	peak
6	833.3171	35.94	-4.25	31.69	46.00	-14.31	149	100	peak

802.11b			
Test Channel	High	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	114.1138	36.16	-17.94	18.22	43.50	-25.28	70	100	peak
2	137.9028	40.00	-19.00	21.00	43.50	-22.50	123	100	peak
3	204.2377	41.64	-17.62	24.02	43.50	-19.48	92	100	peak
4	289.0021	40.06	-8.52	31.54	46.00	-14.46	96	100	peak
5	620.7096	32.34	-3.93	28.41	46.00	-17.59	278	100	peak
6	760.7036	33.31	-3.32	29.99	46.00	-16.01	123	100	peak

➤ Spurious Emissions Below 1GHz

➤ Test Mode: 802.11b (worst case)

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824	58.88	-3.87	55.01	74	-18.99	H	PK
4824	42.37	-3.87	38.5	54	-15.5	H	AV
7236	54.99	1.14	56.13	74	-17.87	H	PK
7236	40.92	1.19	42.11	54	-11.89	H	AV
4824	61.74	-3.86	57.88	74	-16.12	V	PK
4824	41.15	-3.86	37.29	54	-16.71	V	AV
7236	54.4	1.1	55.5	74	-18.5	V	PK
7236	39.17	1.1	40.27	54	-13.73	V	AV
Middle Channel-2437MHz							
4874	58.65	-3.74	54.91	74	-19.09	H	PK
4874	42.69	-3.74	38.95	54	-15.05	H	AV
7311	55.63	1.47	57.1	74	-16.9	H	PK
7311	38.64	1.47	40.11	54	-13.89	H	AV
4874	61.25	-3.74	57.51	74	-16.49	V	PK
4874	43.52	-3.74	39.78	54	-14.22	V	AV
7311	54.84	1.47	56.31	74	-17.69	V	PK
7311	38.56	1.47	40.03	54	-13.97	V	AV
High Channel-2462MHz							
4924	60.2	-3.59	56.61	74	-17.39	H	PK
4924	43.01	-3.59	39.42	54	-14.58	H	AV
7386	54.79	1.79	56.58	74	-17.42	H	PK
7386	39.17	1.79	40.96	54	-13.04	H	AV
4924	58.8	-3.59	55.21	74	-18.79	V	PK
4924	43.36	-3.59	39.77	54	-14.23	V	AV
7386	54.49	1.79	56.28	74	-17.72	V	PK
7386	39.47	1.79	41.26	54	-12.74	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:


1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots


➤ Radiated test

802.11b			
Test Channel	Low	Polarity:	Vertical(worst case)

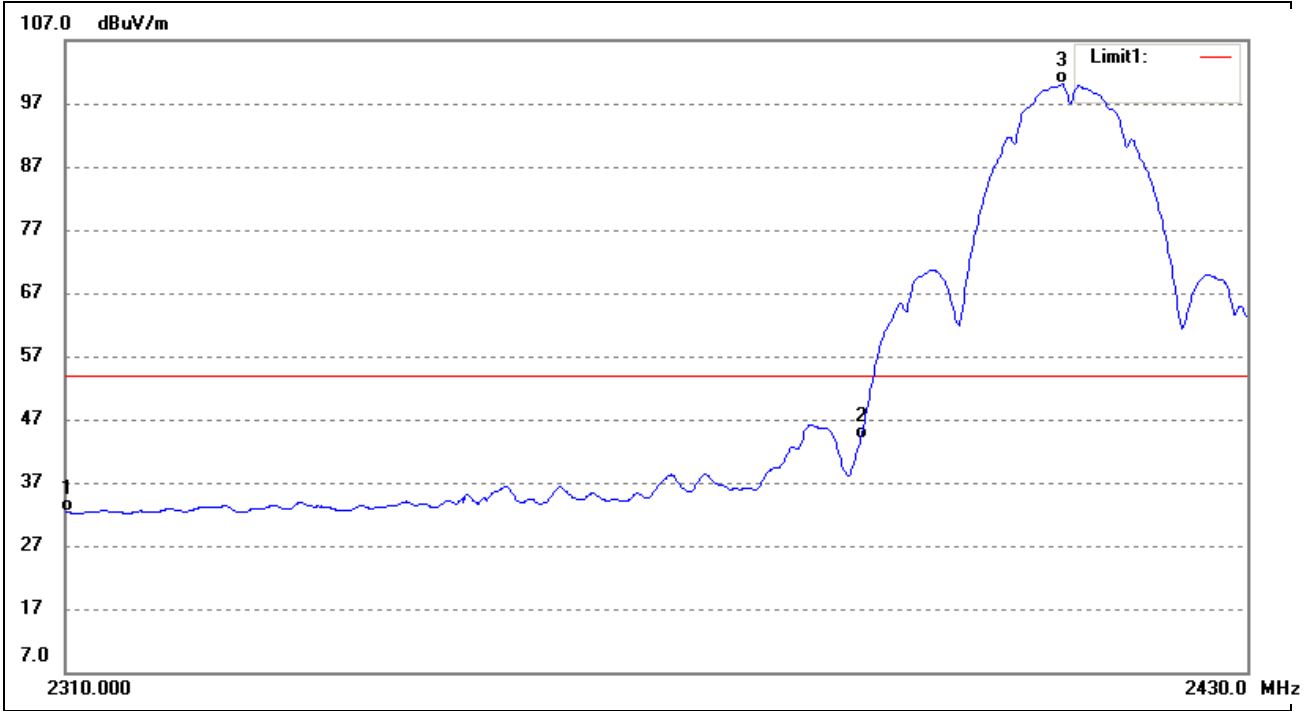


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	37.60	-5.28	32.32	54.00	-21.68	Average Detector
	2310.000	50.70	-5.28	45.42	74.00	-28.58	Peak Detector
2	2390.000	50.12	-6.12	44.00	54.00	-10.00	Average Detector
	2390.000	58.65	-6.12	52.53	74.00	-21.47	Peak Detector
3	2410.756	106.27	-6.25	100.02	/	/	Average Detector
	2410.511	110.87	-6.25	104.62	/	/	Peak Detector

802.11b			
Test Channel	High	Polarity:	Vertical(worst case)

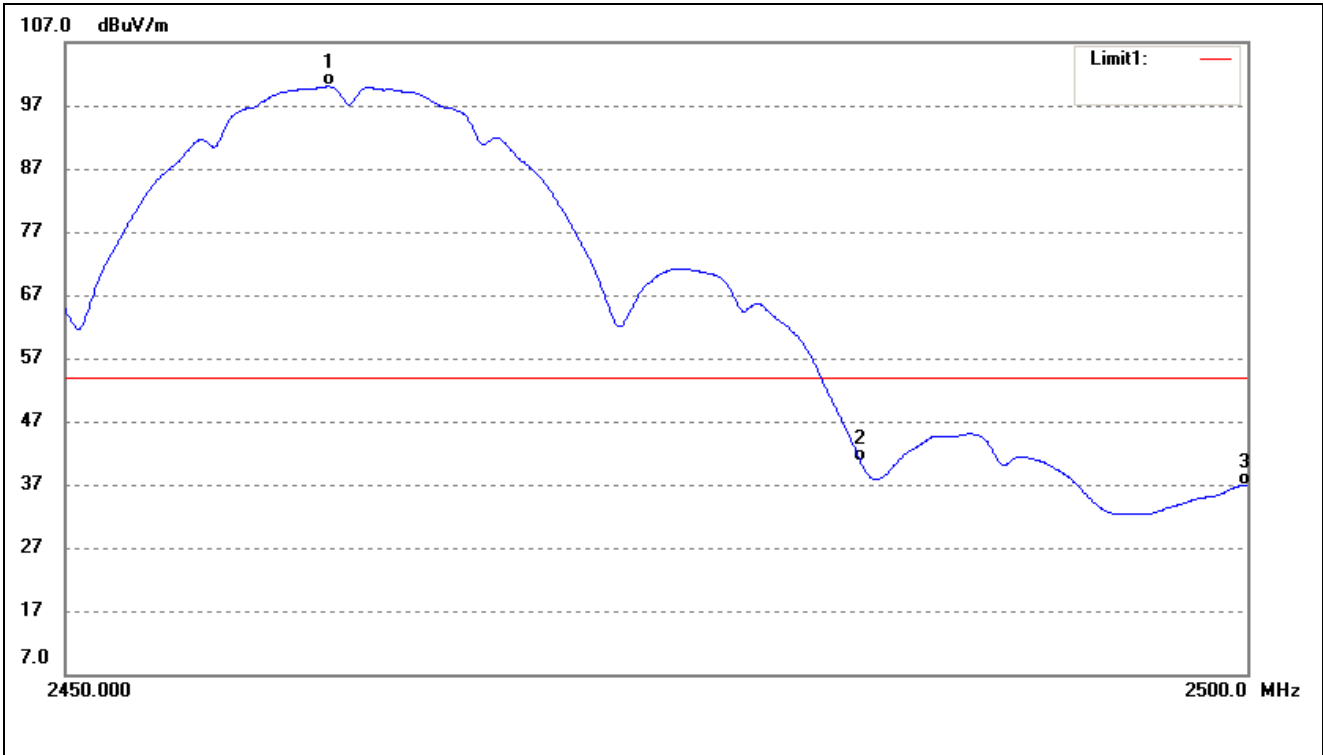


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.063	106.16	-6.13	100.03	/	/	Average Detector
	2460.764	110.74	-6.13	104.61	/	/	Peak Detector
2	2483.500	46.68	-6.08	40.60	54.00	-13.40	Average Detector
	2483.500	55.22	-6.08	49.14	74.00	-24.86	Peak Detector
3	2500.000	42.85	-6.04	36.81	54.00	-17.19	Average Detector
	2500.000	52.90	-6.04	46.86	74.00	-27.14	Peak Detector

802.11g			
Test Channel	Low	Polarity:	Vertical(worst case)

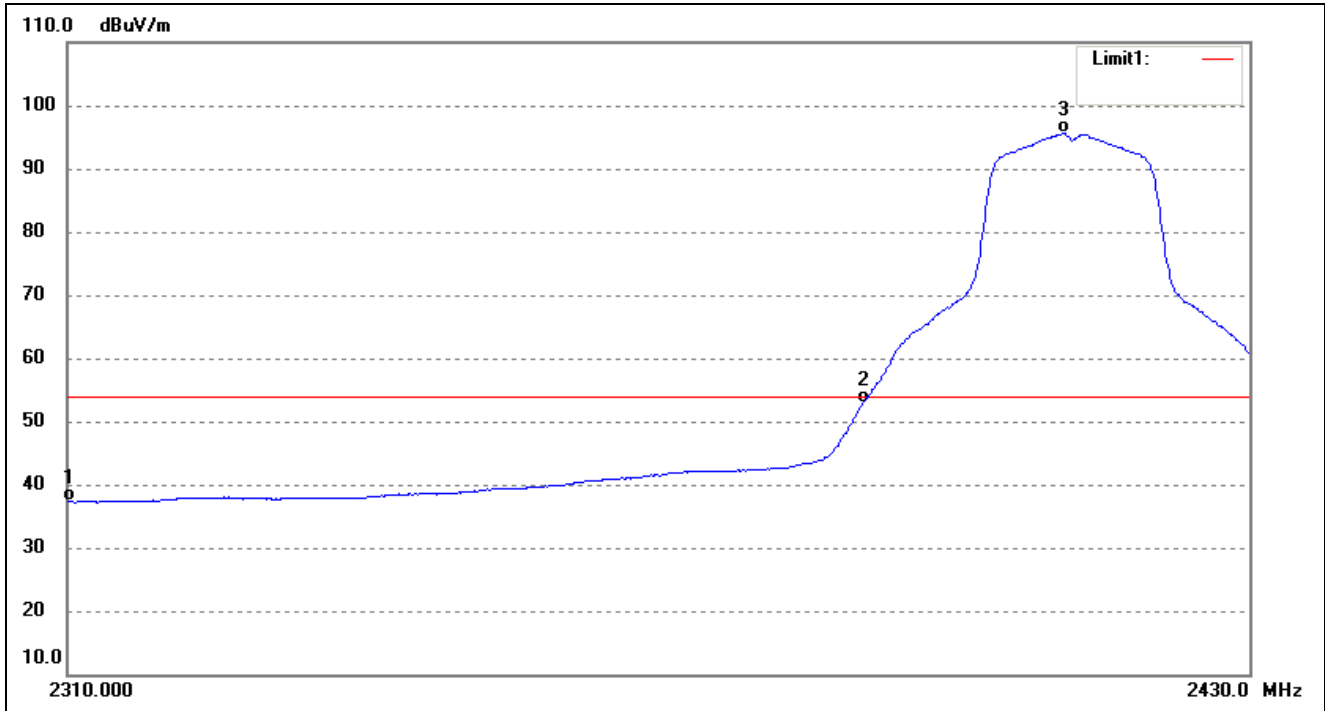


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	42.58	-5.28	37.30	54.00	-16.70	Average Detector
		53.93	-5.28	48.65	74.00	-25.35	Peak Detector
2	2390.000	58.92	-6.12	52.80	54.00	-1.20	Average Detector
		75.26	-6.12	69.14	74.00	-4.86	Peak Detector
3	2410.756	101.82	-6.25	95.57	/	/	Average Detector
		111.09	-6.25	104.84	/	/	Peak Detector

802.11g			
Test Channel	High	Polarity:	Vertical(worst case)

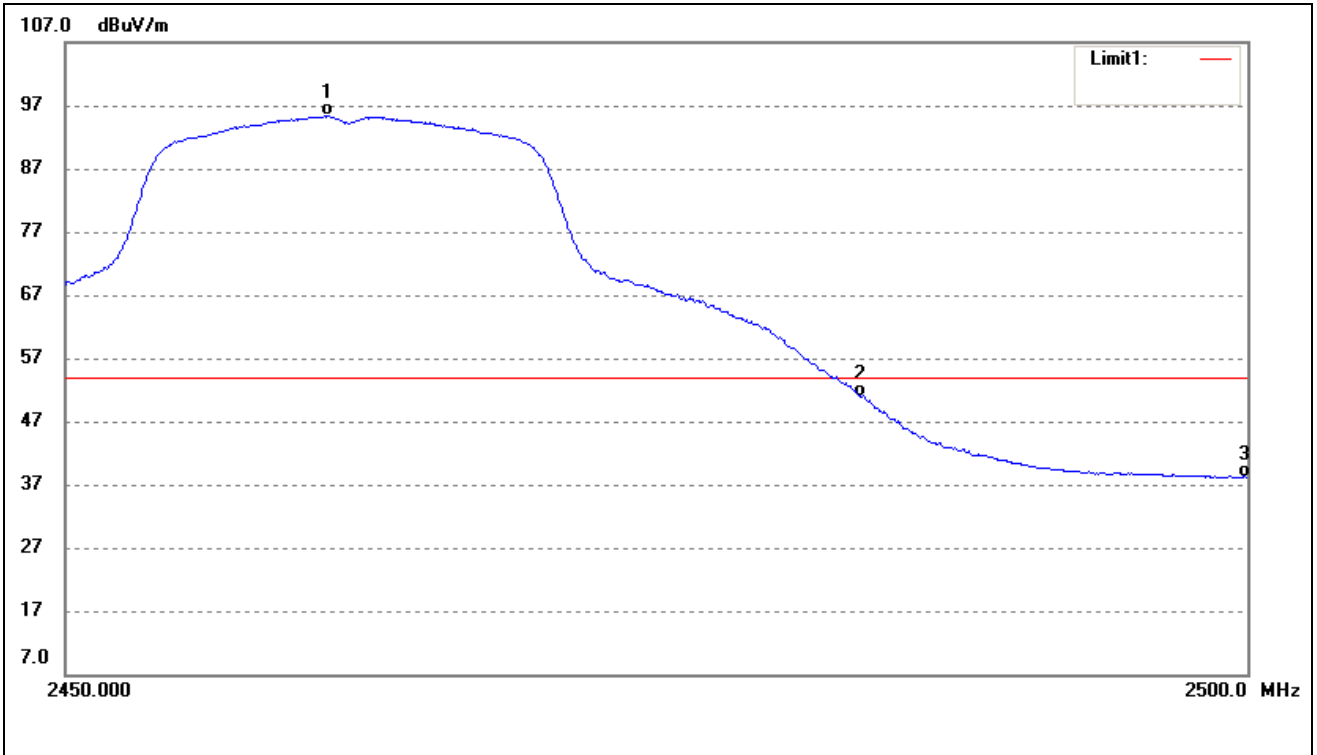


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.013	101.50	-6.13	95.37	/	/	Average Detector
	2463.500	112.00	-6.13	105.87	/	/	Peak Detector
2	2483.500	57.04	-6.08	50.96	54.00	-3.04	Average Detector
	2483.500	74.77	-6.08	68.69	74.00	-5.31	Peak Detector
3	2500.000	44.24	-6.04	38.20	54.00	-15.80	Average Detector
	2500.000	55.82	-6.04	49.78	74.00	-24.22	Peak Detector

802.11n-HT20			
Test Channel	Low	Polarity:	Vertical(worst case)

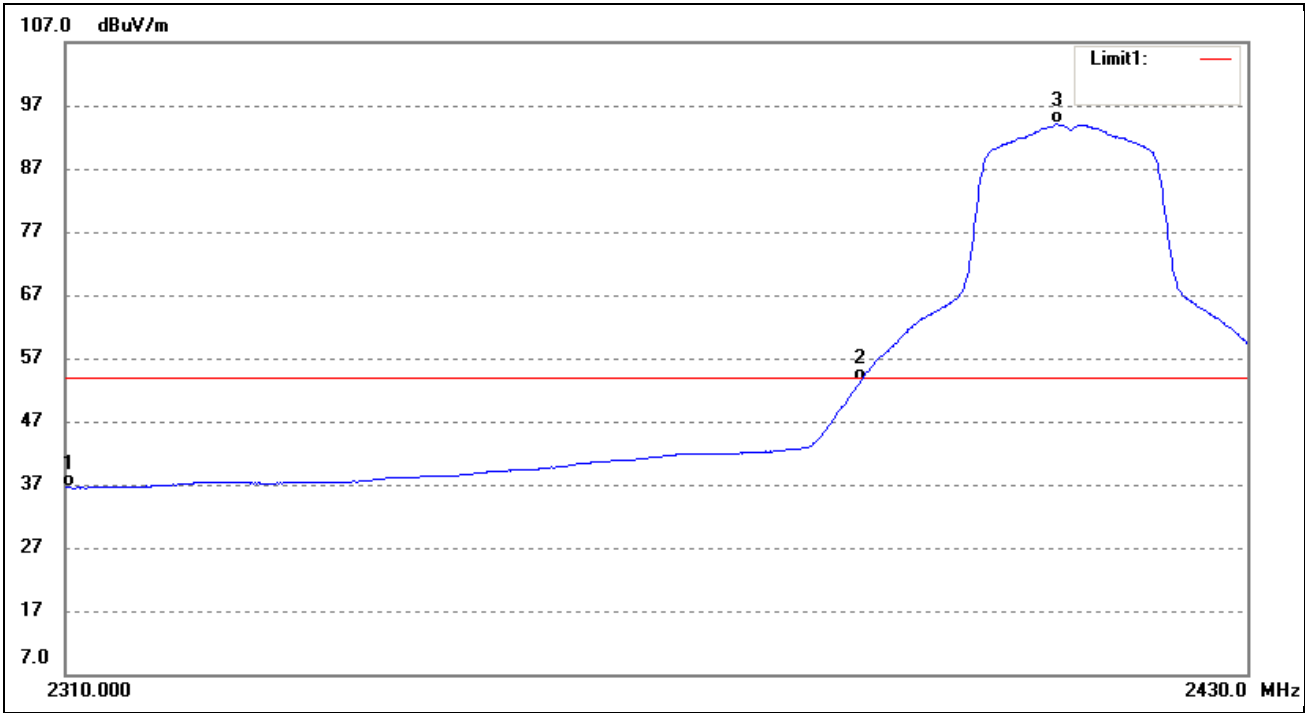

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.87	-5.28	36.59	54.00	-17.41	Average Detector
	2310.000	55.61	-5.28	50.33	74.00	-23.67	Peak Detector
2	2390.000	59.59	-6.12	53.47	54.00	-0.53	Average Detector
	2390.000	79.99	-6.12	73.87	74.00	-0.13	Peak Detector
3	2410.267	100.27	-6.25	94.02	/	/	Average Detector
	2410.878	110.95	-6.25	104.70	/	/	Peak Detector

802.11n-HT20			
Test Channel	High	Polarity:	Vertical(worst case)


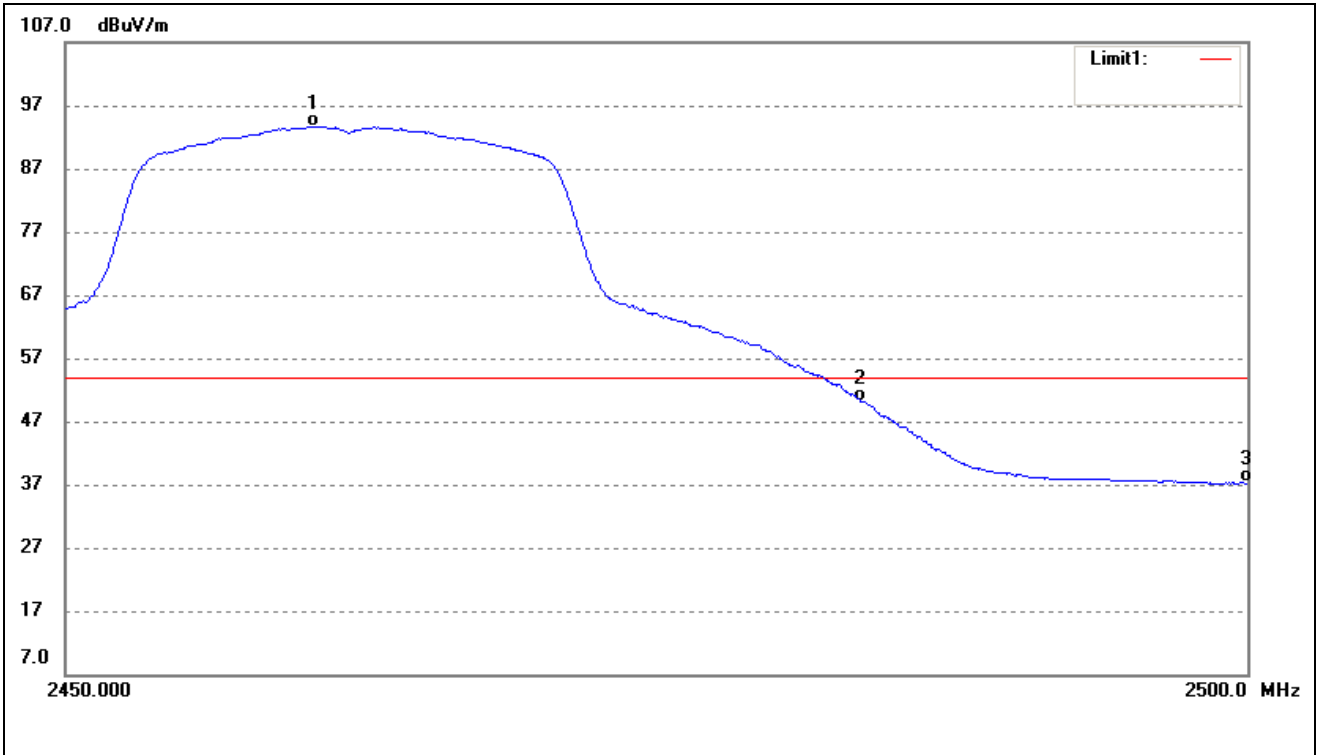


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.416	99.81	-6.13	93.68	/	/	Average Detector
	2460.118	109.65	-6.13	103.52	/	/	Peak Detector
2	2483.500	56.27	-6.08	50.19	54.00	-3.81	Average Detector
	2483.500	74.51	-6.08	68.43	74.00	-5.57	Peak Detector
3	2500.000	43.30	-6.04	37.26	54.00	-16.74	Average Detector
	2500.000	54.99	-6.04	48.95	74.00	-25.05	Peak Detector

➤ Conducted test



802.11b

Low

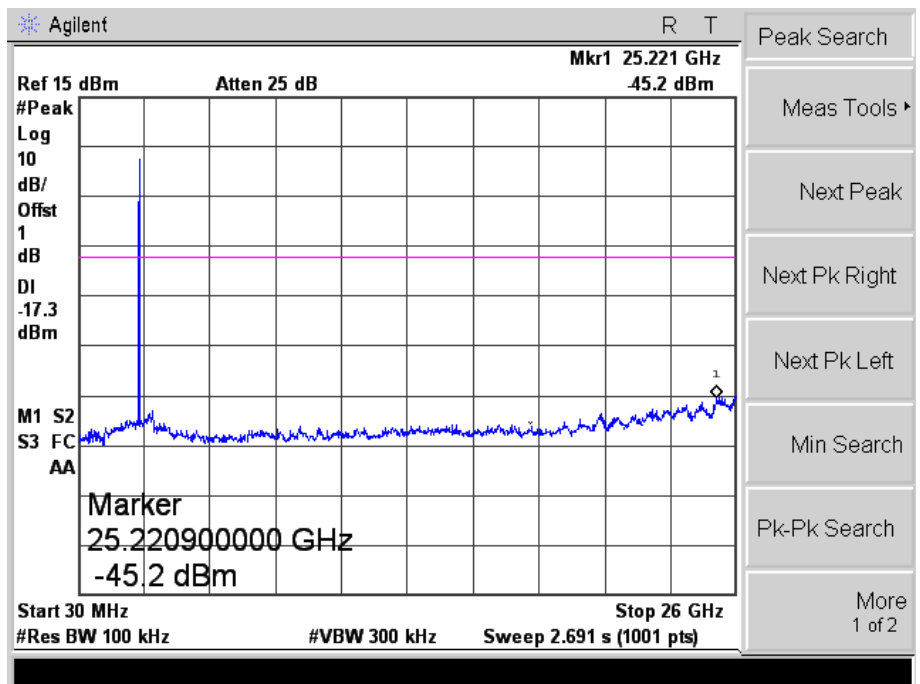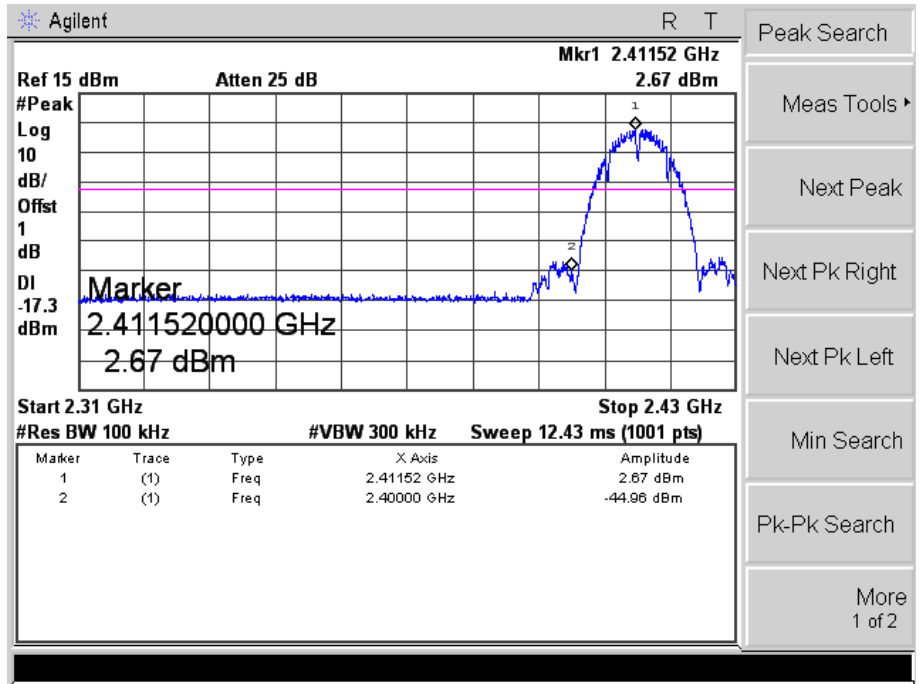



802.11b

Middle

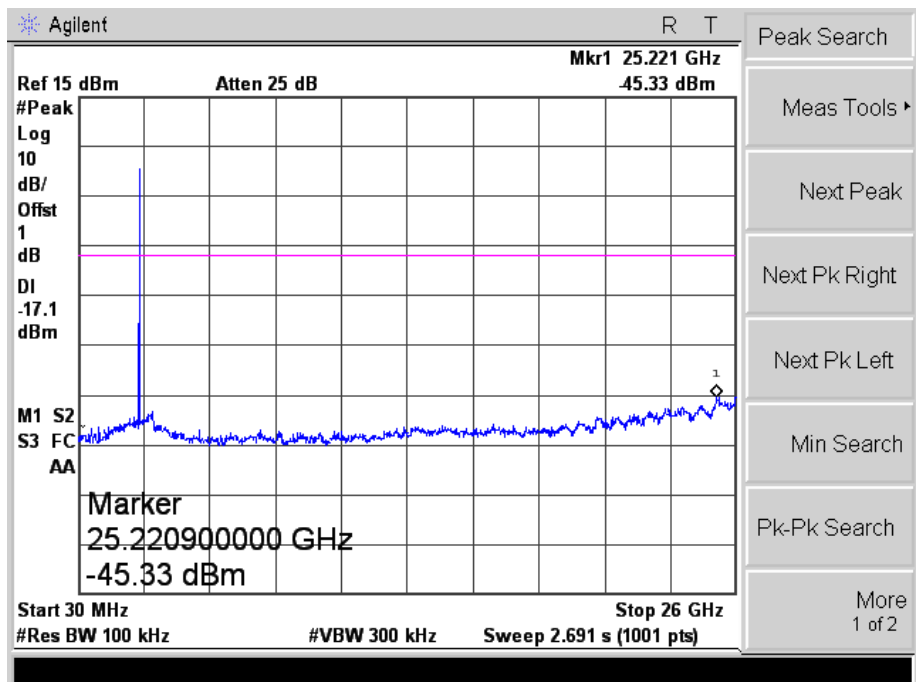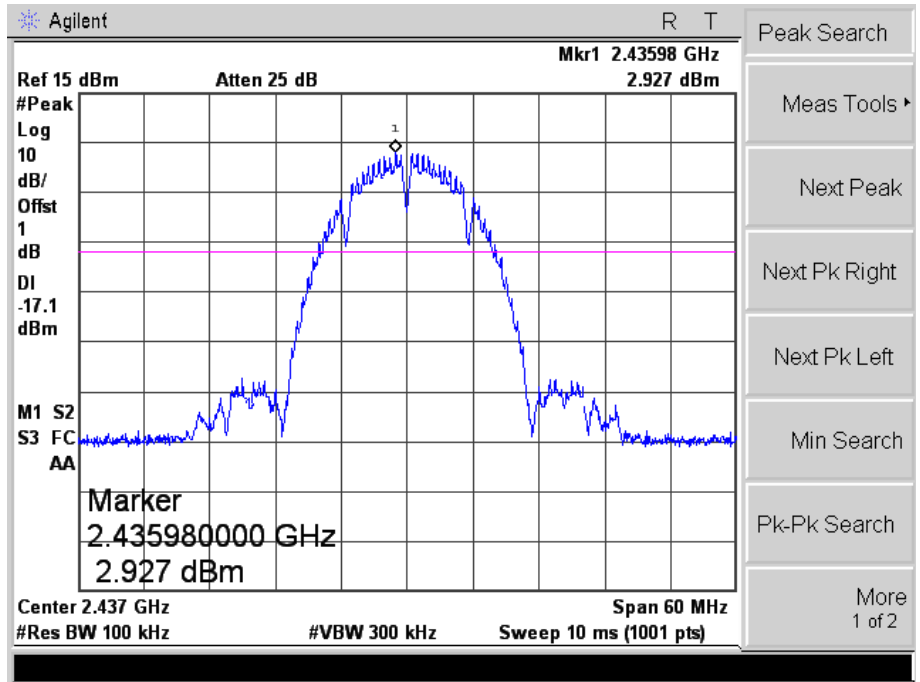



802.11b

High

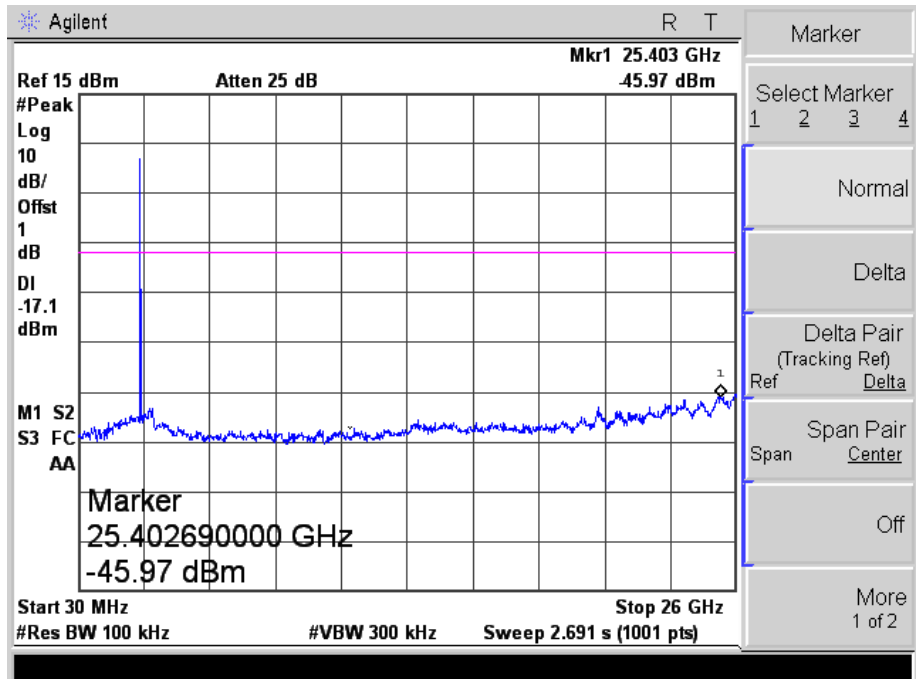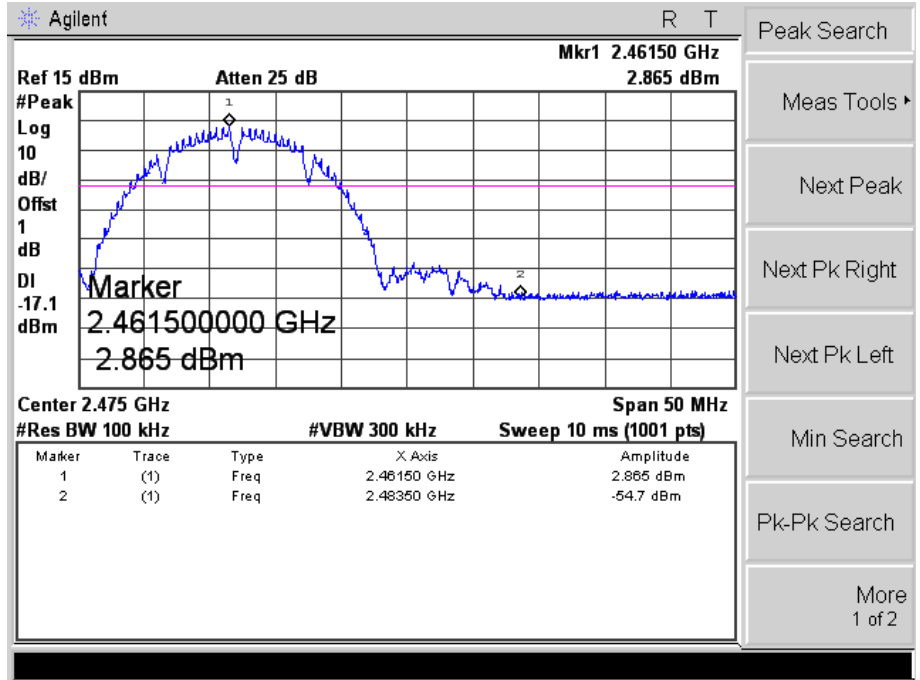



802.11g

Low

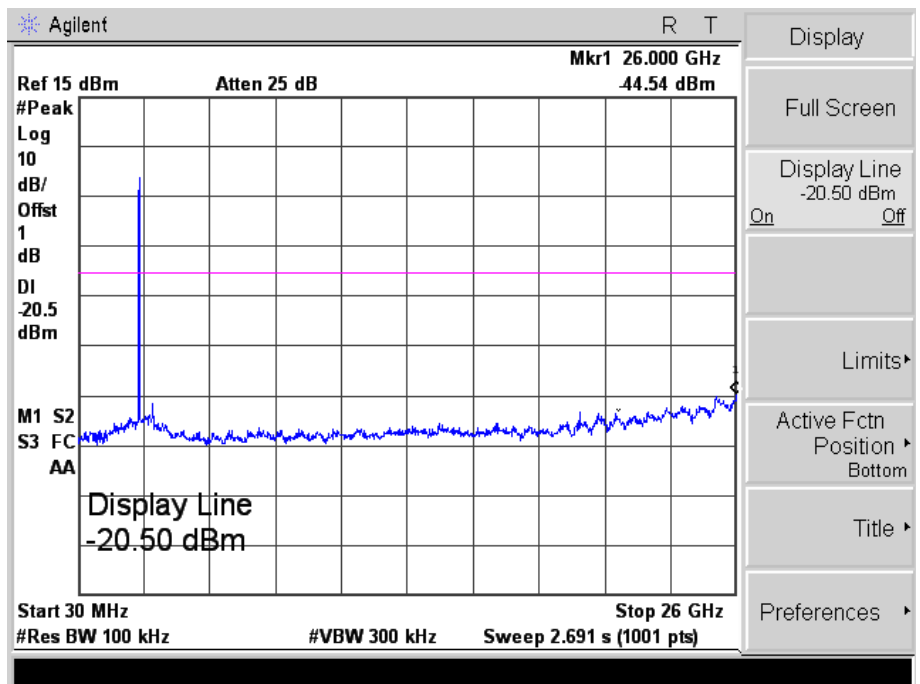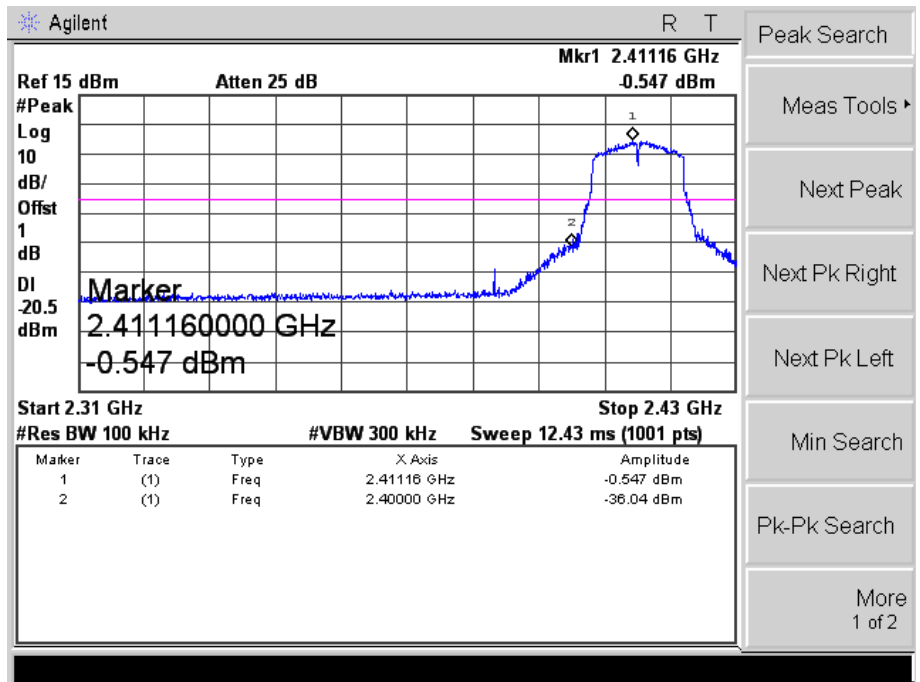



802.11g

Middle

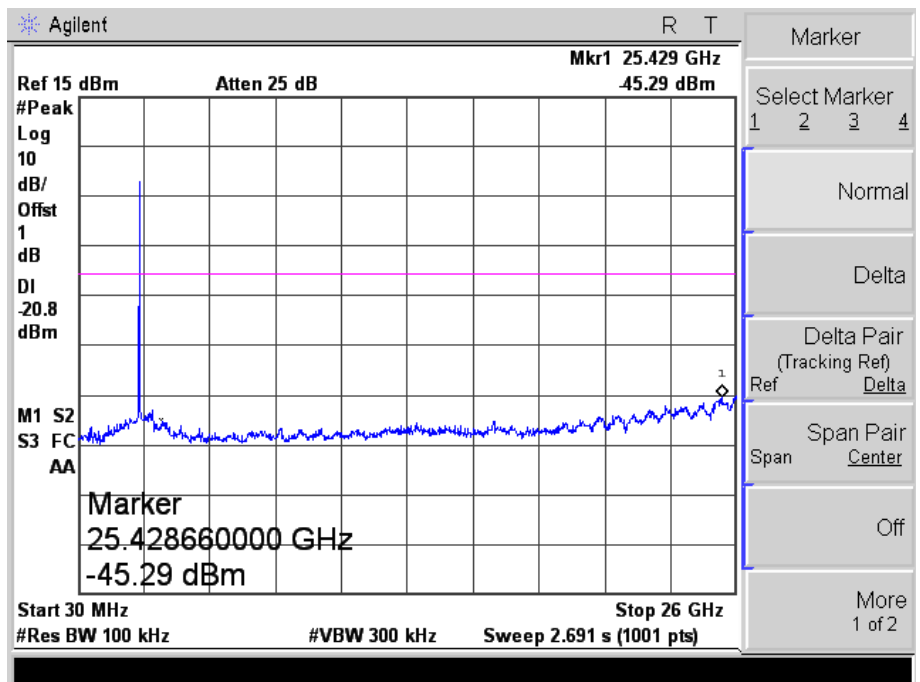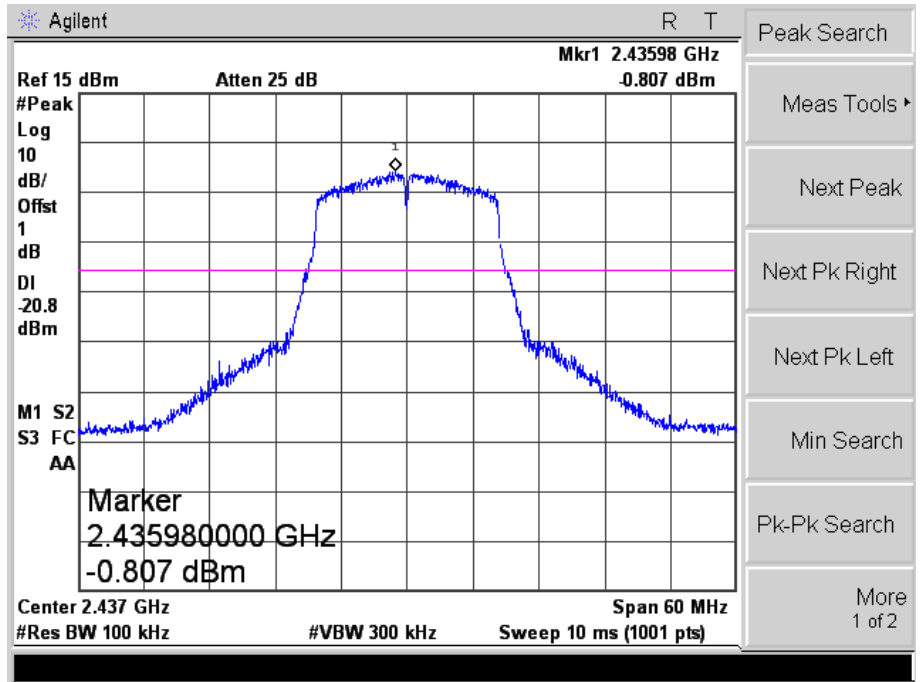



802.11g

High

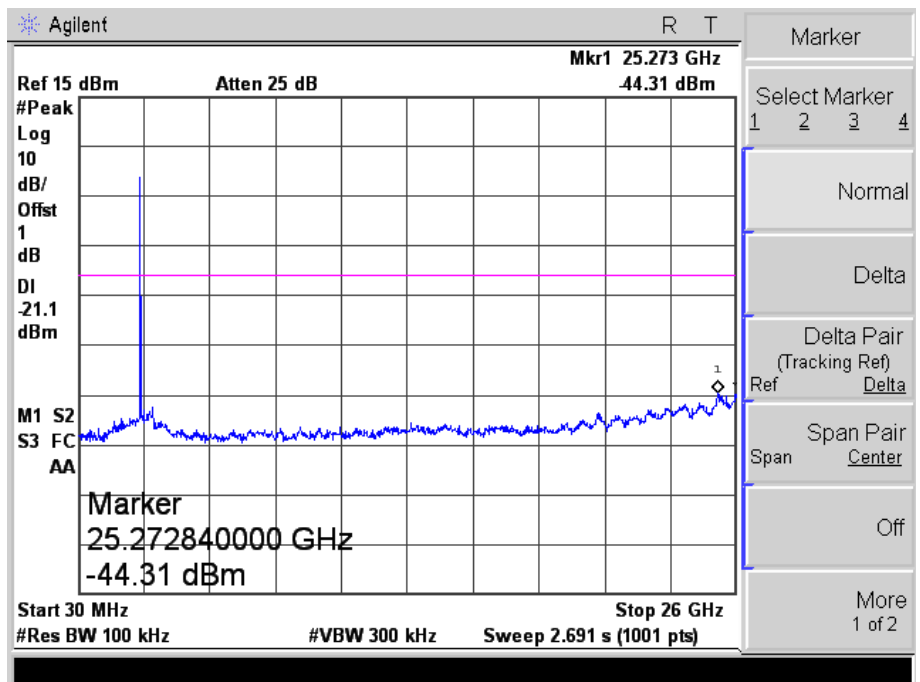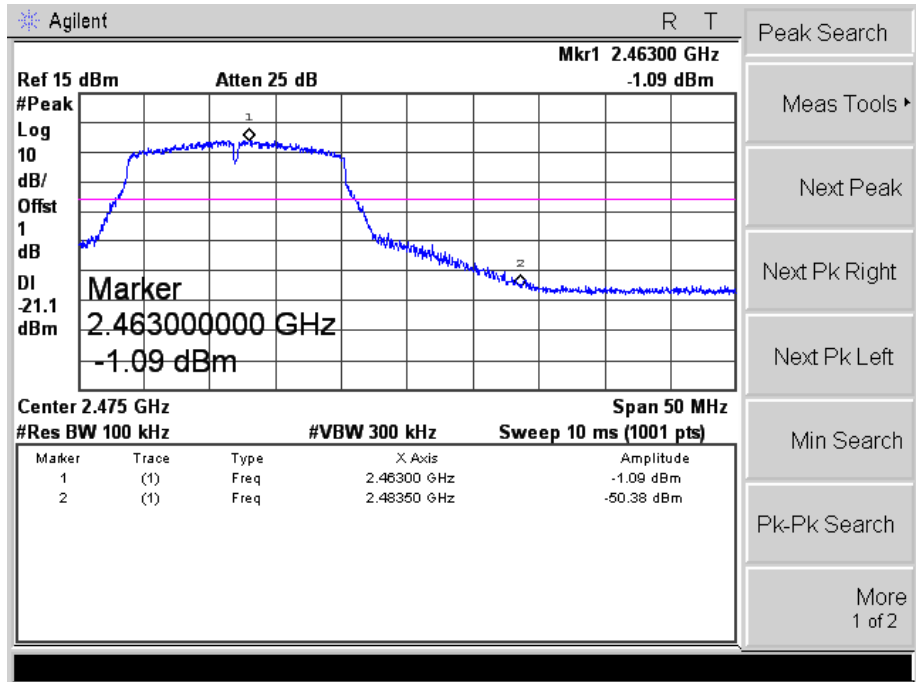



802.11n-HT20

Low

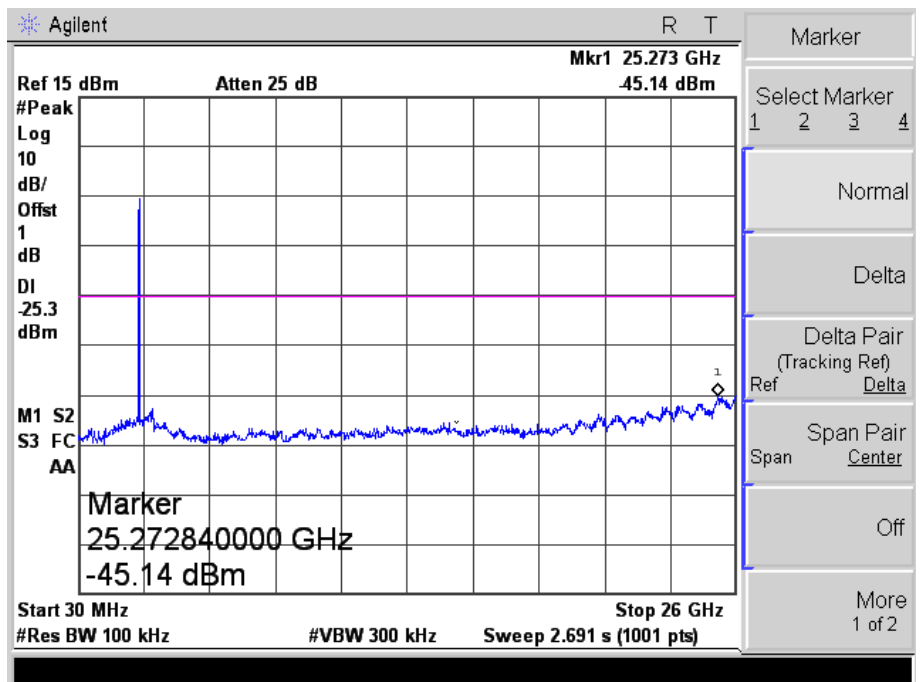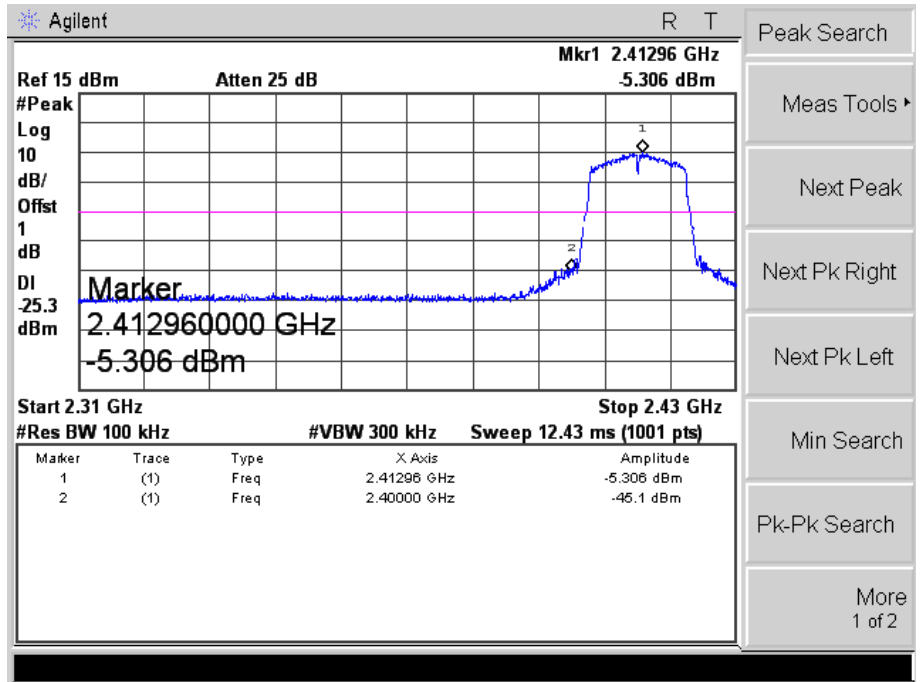



802.11n-HT20

Middle

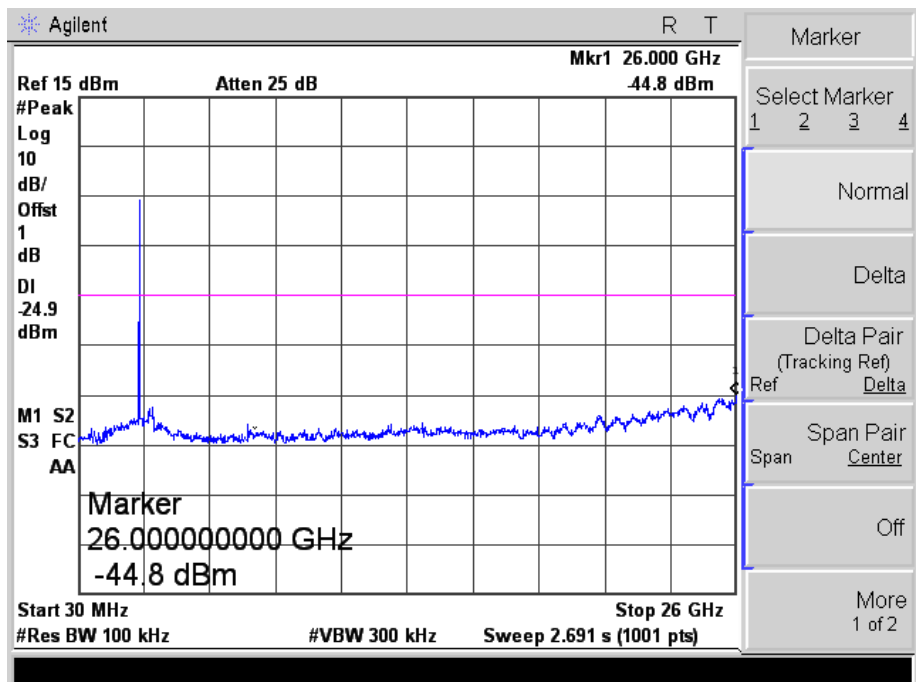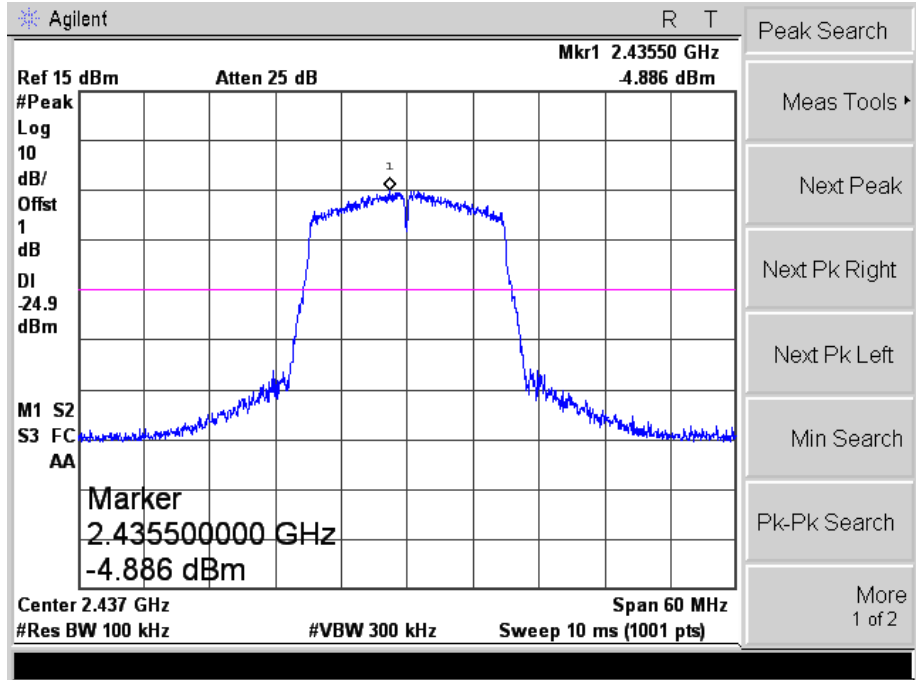

802.11n-HT20

High

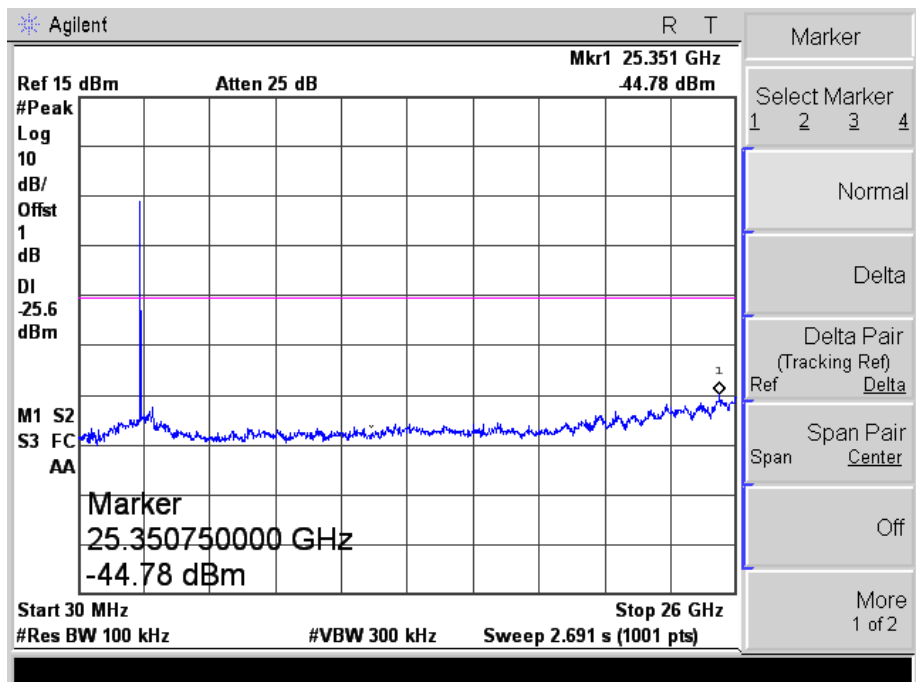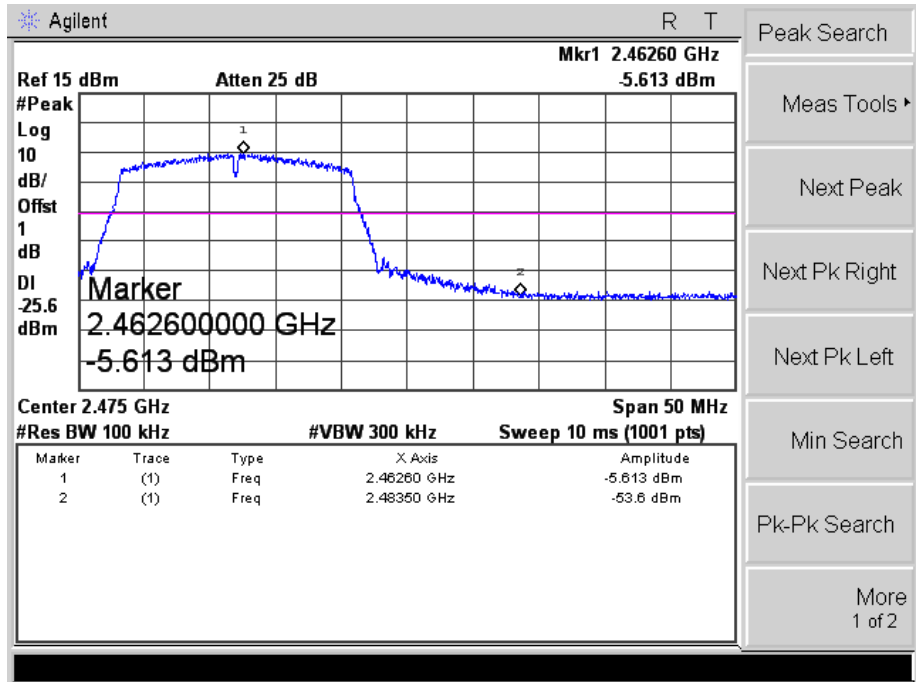


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

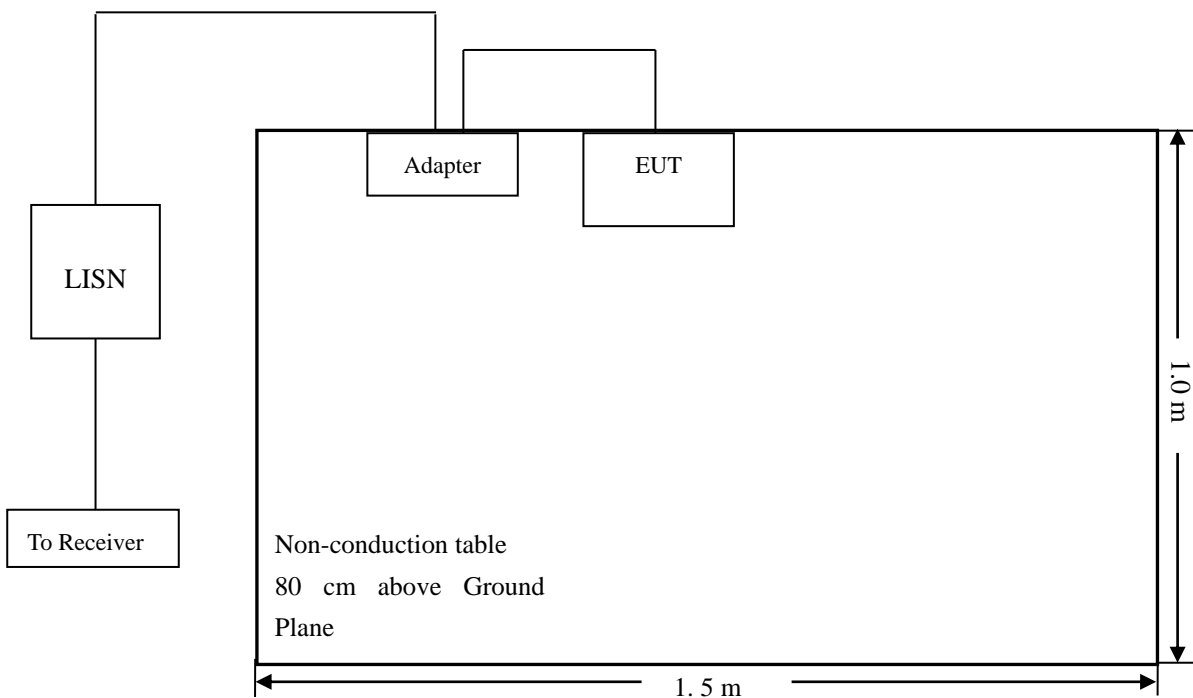


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

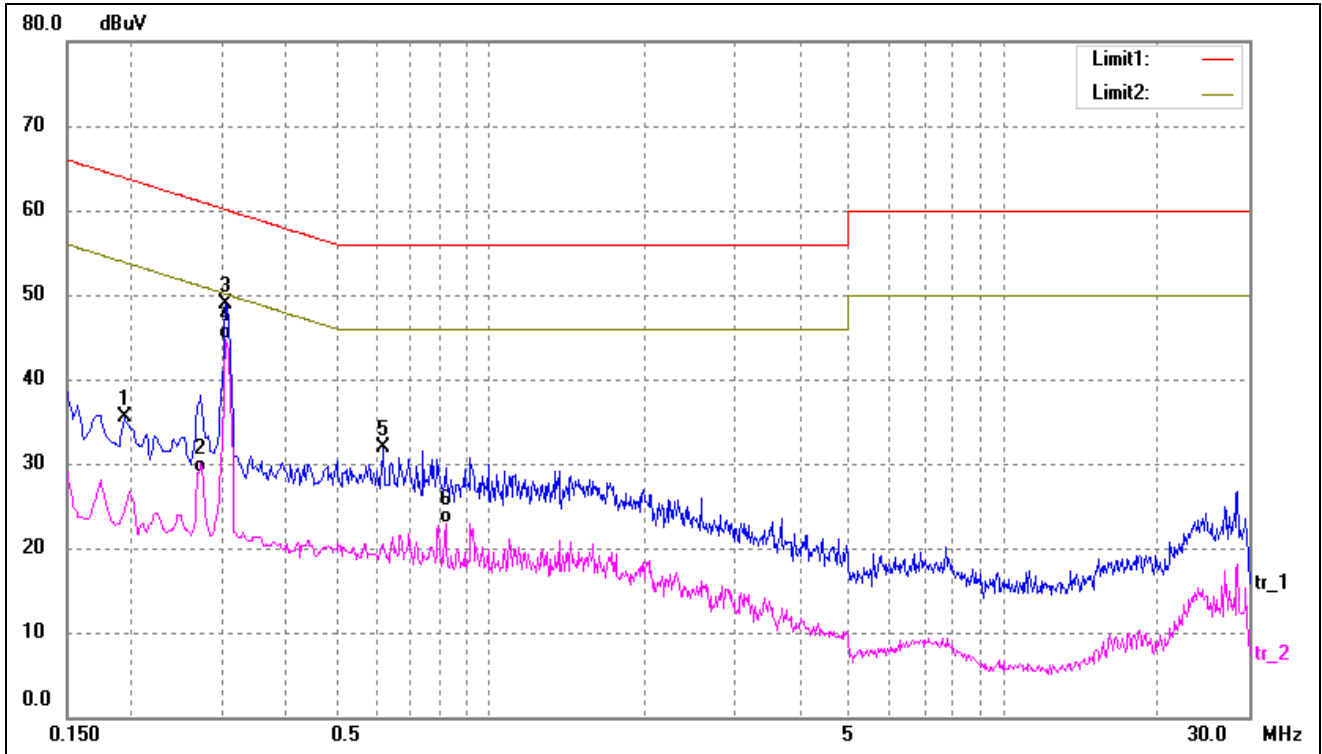

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1940	25.30	10.12	35.42	63.86	-28.44	peak
2	0.2701	18.78	10.17	28.95	51.11	-22.16	AVG
3	0.3060	38.72	10.19	48.91	60.08	-11.17	peak
4*	0.3060	34.55	10.19	44.74	50.08	-5.34	AVG
5	0.6180	21.61	10.35	31.96	56.00	-24.04	peak
6	0.8180	12.54	10.43	22.97	46.00	-23.03	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

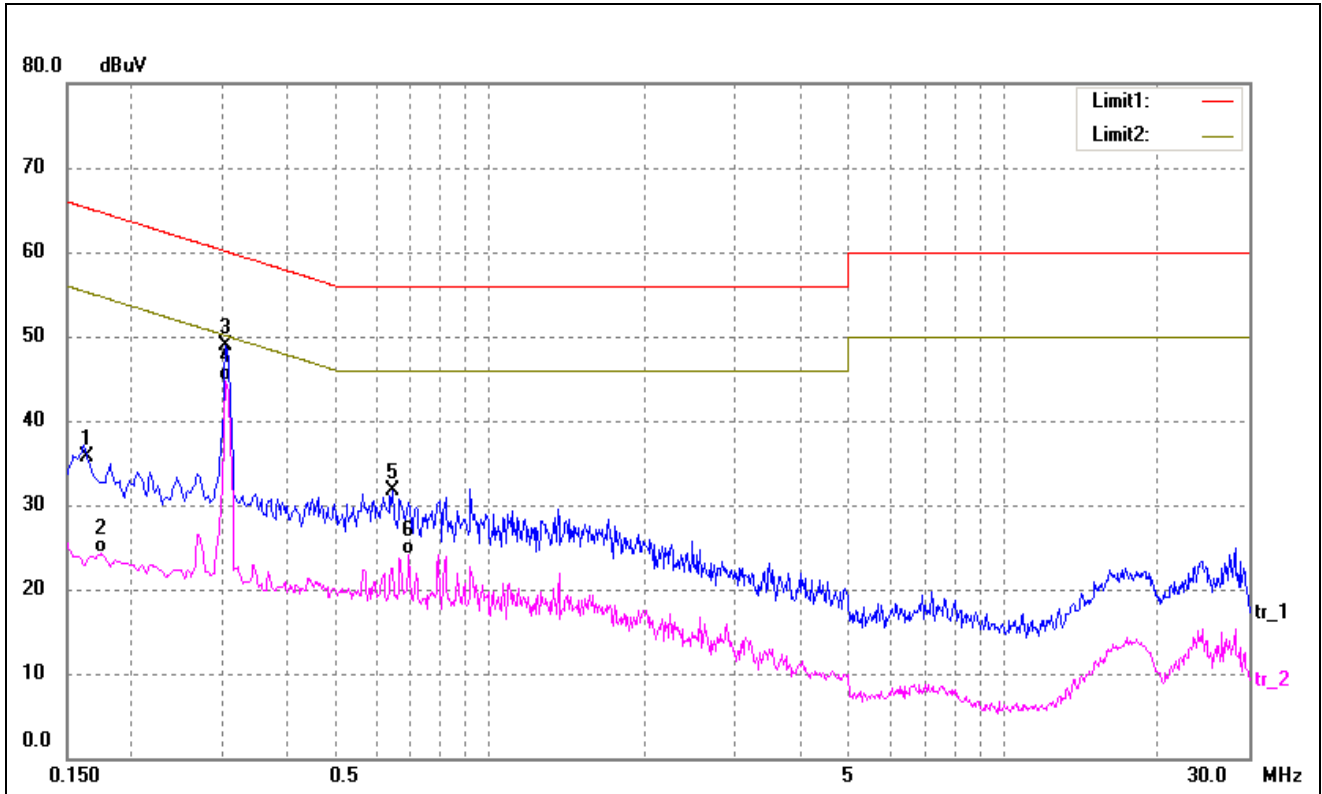

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1641	25.56	10.11	35.67	65.25	-29.58	peak
2	0.1740	14.21	10.11	24.32	54.76	-30.44	AVG
3	0.3060	38.75	10.19	48.94	60.08	-11.14	peak
4*	0.3060	34.48	10.19	44.67	50.08	-5.41	AVG
5	0.6460	21.38	10.36	31.74	56.00	-24.26	peak
6	0.6940	13.63	10.39	24.02	46.00	-21.98	AVG

***** END OF REPORT *****