



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15.247

Report Reference No.: **CTL1907261071-WF**

Compiled by: (position+printed name+signature)	Happy Guo (File administrators)	
Tested by: (position+printed name+signature)	Nice Nong (Test Engineer)	
Approved by: (position+printed name+signature)	Ivan Xie (Manager)	

Product Name: Bluetooth speaker

Model/Type reference: s-Go One

List Model(s): N/A

Trade Mark: JAYS

FCC ID: 2AJOO-SGO101

Applicant's name: JAYS Group AB

Address of applicant: Nellievagen 22 Gothenburg Sweden

Test Firm: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Test specification:

Standard: 47 CFR FCC Part 15 Subpart C 15.247
RSS 247 Issue 2, February 2017

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of receipt of test item: Aug. 07, 2019

Date of sampling: Aug. 07, 2019

Date of Test Date: Aug. 07, 2019–Sept. 03, 2019

Date of Issue: Sept. 04, 2019

Result: Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1907261071-WF	Sept. 04, 2019
		Date of issue

Equipment under Test : Bluetooth speaker

Model /Type : s-Go One

Listed Models : N/A

Applicant : **JAYS Group AB**

Address : Nellievagen 22 Gothenburg Sweden

Manufacturer : **Northbaze Group AB**

Address : Nellievagen 22 Gothenburg Sweden

Test result	Pass *
--------------------	---------------

*In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

**** Modified History ****

	Table of Contents	Page
1. SUMMARY.....		5
1.1. TEST STANDARDS.....		5
1.2. TEST DESCRIPTION.....		5
1.3. TEST FACILITY		6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....		6
2. GENERAL INFORMATION.....		8
2.1. ENVIRONMENTAL CONDITIONS		8
2.2. GENERAL DESCRIPTION OF EUT		8
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....		8
2.4. EQUIPMENTS USED DURING THE TEST		9
2.5. RELATED SUBMITTAL(S) / GRANT (S).....		10
2.6. MODIFICATIONS.....		10
3. TEST CONDITIONS AND RESULTS		11
3.1. CONDUCTED EMISSIONS TEST		11
3.2. RADIATED EMISSIONS AND BAND EDGE		14
3.3. MAXIMUM PEAK OUTPUT POWER		21
3.4. 20DB BANDWIDTH AND 99% BANDWIDTH		25
3.5. FREQUENCY SEPARATION		29
3.6. NUMBER OF HOPPING FREQUENCY.....		31
3.7. TIME OF OCCUPANCY (DWELL TIME).....		33
3.8. OUT-OF-BAND EMISSIONS		37
3.9. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....		45
3.10. ANTENNA REQUIREMENT.....		46
4. TEST SETUP PHOTOS OF THE EUT		47
5. PHOTOS OF THE EUT.....		48

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[RSS-247-Issue 2](#): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus

[KDB558074 D01 15.247 Meas Guidance v05r02](#): GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

1.2. Test Description

FCC PART 15.247 & RSS 247		
FCC Part 15.207 RSS-Gen 8.8	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(1)(i) RSS 247 5.1 (1) RSS-Gen 4.6	20dB Bandwidth& 99% Bandwidth	PASS
FCC Part 15.247(d) RSS 247 5.5	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b) RSS 247 5.4 (2)	Maximum Peak Output Power	PASS
FCC Part 15.247(b) RSS 247 5.1 (1)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii) RSS 247 5.1 (4)	Number of hopping frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1) RSS 247 5.1 (2)	Frequency Separation	PASS
FCC Part 15.205/15.209 RSS-Gen 8.9	Radiated Emissions	PASS
FCC Part 15.247(d) RSS-Gen 8.10	Band Edge Compliance of RF Emission	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9518B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9518B on Jan. 22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)

Conducted Disturbance0.15~30MHz	±3.20dB	(1)
---------------------------------	---------	-----

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Bluetooth speaker
Model/Type reference:	s-Go One
Power supply:	DC 3.7V from battery
Bluetooth :	
Supported type:	Bluetooth BR/EDR
Modulation:	GFSK, π/4DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB antenna
Antenna gain:	0dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

Operation Frequency :

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Preliminary tests were performed in each mode and packet length of BT, and found worst case as bellow, finally test were conducted at those mode and recorded in this report.

Test Items	Worst case
Conducted Emissions	DH5 Middle channel
Radiated Emissions and Band Edge	DH5
Maximum Conducted Output Power	DH5/2DH5/3DH5
20dB Bandwidth	DH5/2DH5/3DH5
Frequency Separation	DH5/2DH5/3DH5 Middle channel
Number of hopping frequency	DH5/2DH5/3DH5
Time of Occupancy (Dwell Time)	DH1/DH3/DH5 Middle channel 2DH1/2DH3/2DH5 Middle channel 3DH1/3DH3/3DH5 Middle channel
Out-of-band Emissions	DH5/2DH5/3DH5

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2019/05/21	2020/05/20
LISN	R&S	ESH2-Z5	860014/010	2019/05/21	2020/05/20
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2019/05/23	2020/05/22
EMI Test Receiver	R&S	ESCI	1166.5950.03	2019/05/21	2020/05/20
Spectrum Analyzer	Agilent	E4407B	MY41440676	2019/05/20	2020/05/19
Spectrum Analyzer	Agilent	N9020	US46220290	2019/05/20	2020/05/19
Controller	EM Electronics	EM 1000	060859	2019/05/21	2020/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2019/05/23	2020/05/22
Active Loop Antenna	Da Ze	ZN30900A	/	2019/05/23	2020/05/22
Amplifier	Agilent	8449B	3008A02306	2019/05/21	2020/05/20
Amplifier	Agilent	8447D	2944A10176	2019/05/21	2020/05/20
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/05/21	2020/05/20
High-Pass Filter	micro-tranics	HPM50108	G174	2019/05/20	2020/05/19
High-Pass Filter	micro-tranics	HPM50111	G142	2019/05/20	2020/05/19
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-10M	10m	2019/05/20	2020/05/19
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-3M	3m	2019/05/20	2020/05/19
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-3M	3m	2019/05/20	2020/05/19
RF Cable	Megalon	RF-A303	N/A	2019/05/20	2020/05/19

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules, RSS Gen and RSS 247 Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

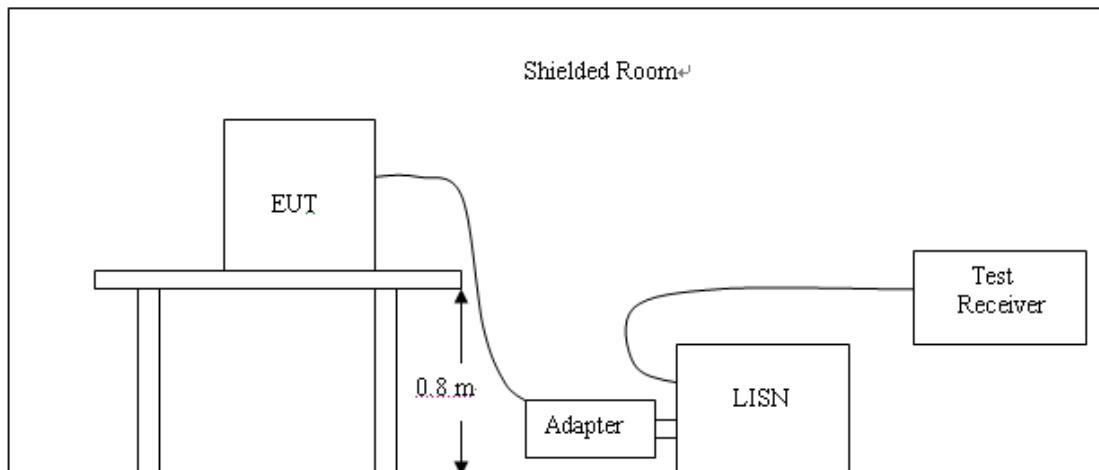


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark: All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK Middle Channel was reported as below:

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

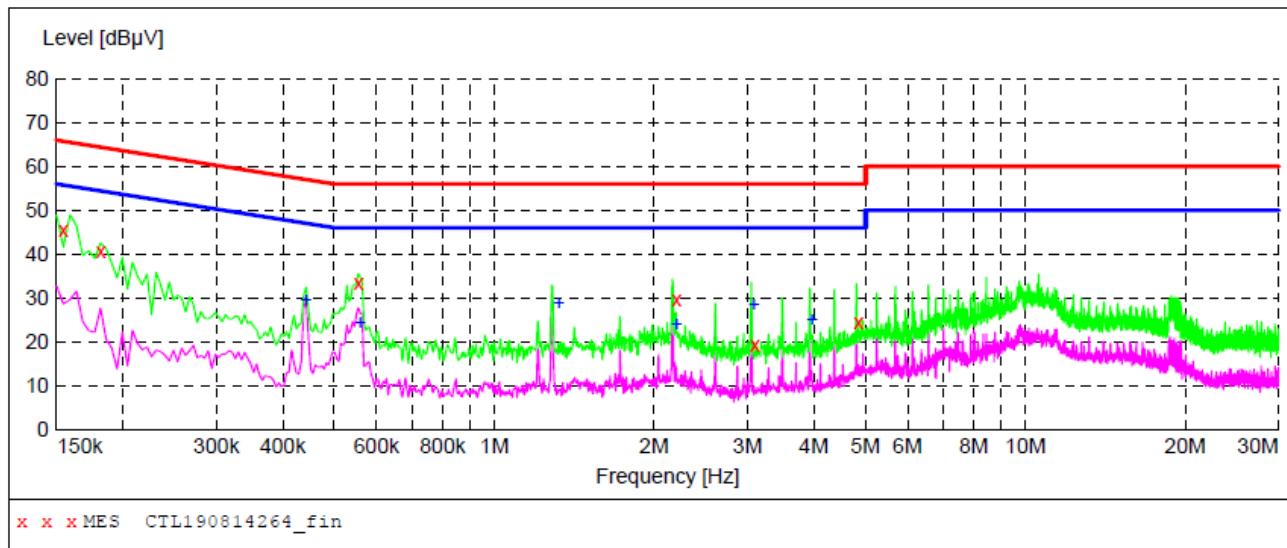

MEASUREMENT RESULT: "CTL190814264_fin"

2019-8-14 08:01??


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.154500	45.60	11.2	66	20.2	QP	L1	GND
0.181500	40.80	11.2	64	23.6	QP	L1	GND
0.555000	33.30	11.2	56	22.7	QP	L1	GND
2.206500	29.60	11.4	56	26.4	QP	L1	GND
3.093000	19.30	11.4	56	36.7	QP	L1	GND
4.852500	24.30	11.4	56	31.7	QP	L1	GND

MEASUREMENT RESULT: "CTL190814264_fin2"

2019-8-14 08:01??

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.442500	29.60	11.2	47	17.4	AV	L1	GND
0.559500	24.40	11.2	46	21.6	AV	L1	GND
1.324500	29.00	11.3	46	17.0	AV	L1	GND
2.206500	24.00	11.4	46	22.0	AV	L1	GND
3.084000	28.50	11.4	46	17.5	AV	L1	GND
3.966000	25.30	11.4	46	20.7	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

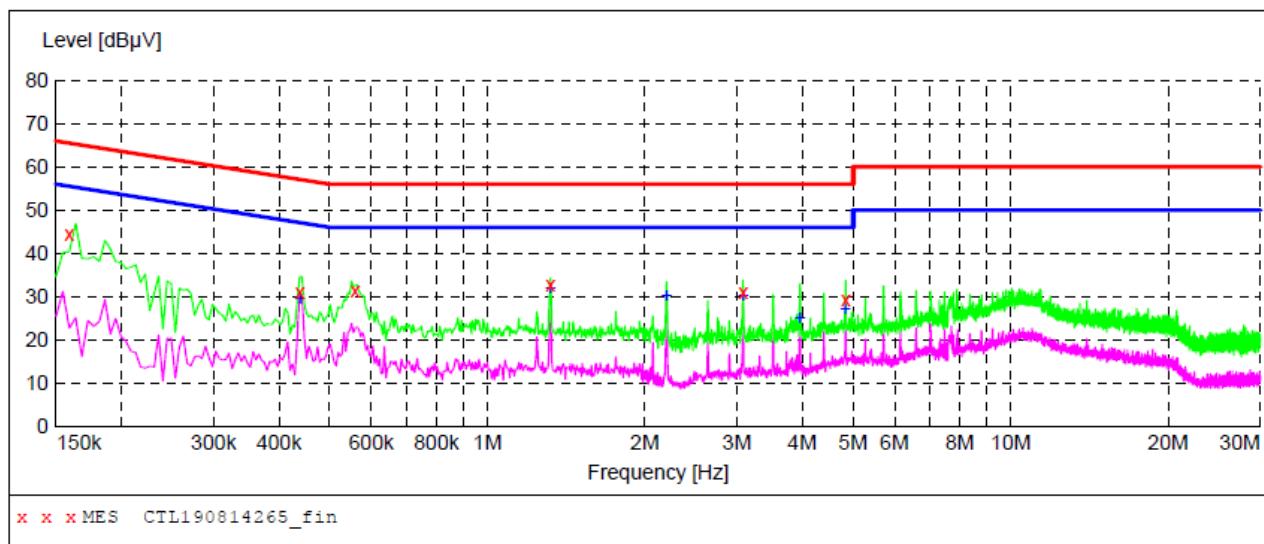

MEASUREMENT RESULT: "CTL190814265_fin"

2019-8-14 08:04??

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.159000	44.60	11.2	66	20.9	QP	N	GND
0.438000	31.00	11.2	57	26.1	QP	N	GND
0.559500	31.50	11.2	56	24.5	QP	N	GND
1.320000	32.90	11.3	56	23.1	QP	N	GND
3.079500	31.10	11.4	56	24.9	QP	N	GND
4.839000	29.20	11.4	56	26.8	QP	N	GND

MEASUREMENT RESULT: "CTL190814265_fin2"

2019-8-14 08:04??

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.438000	29.70	11.2	47	17.4	AV	N	GND
1.320000	32.20	11.3	46	13.8	AV	N	GND
2.202000	30.30	11.4	46	15.7	AV	N	GND
3.079500	30.20	11.4	46	15.8	AV	N	GND
3.957000	25.30	11.4	46	20.7	AV	N	GND
4.839000	27.10	11.4	46	18.9	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

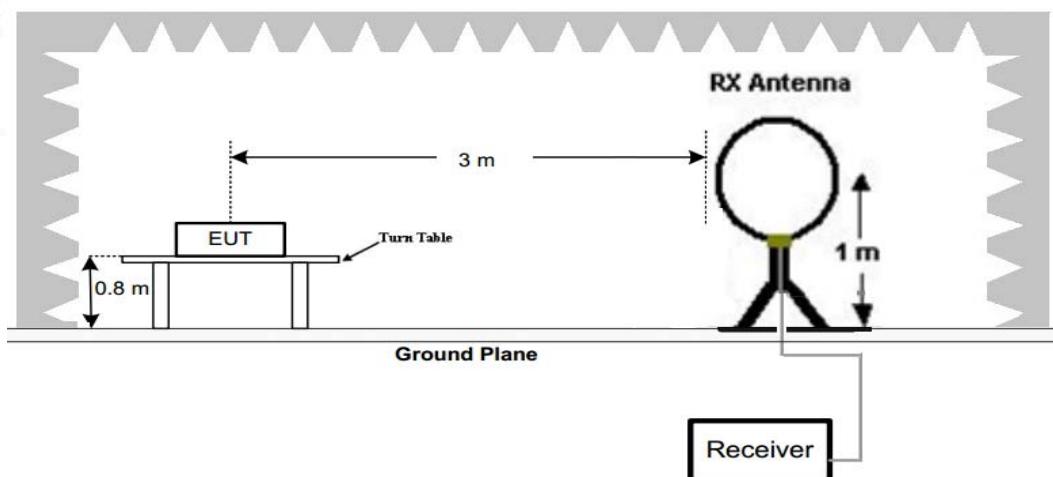

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

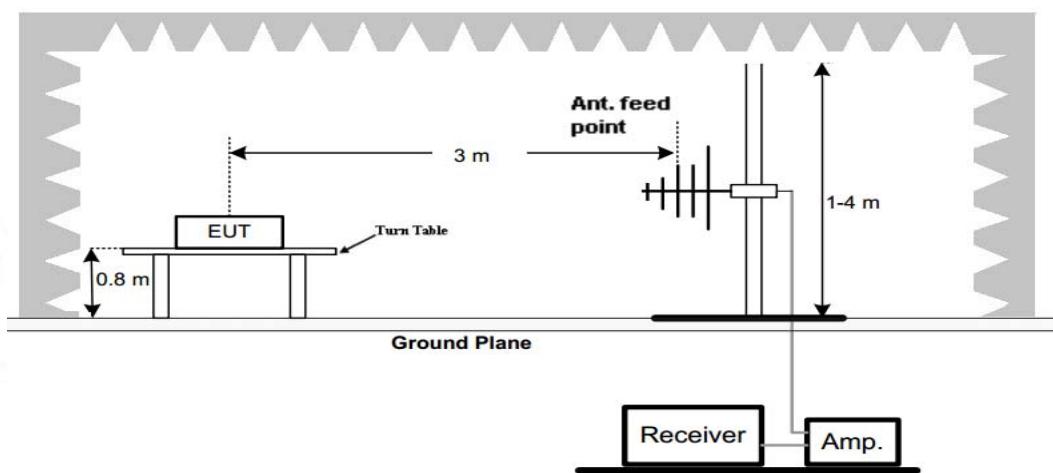

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

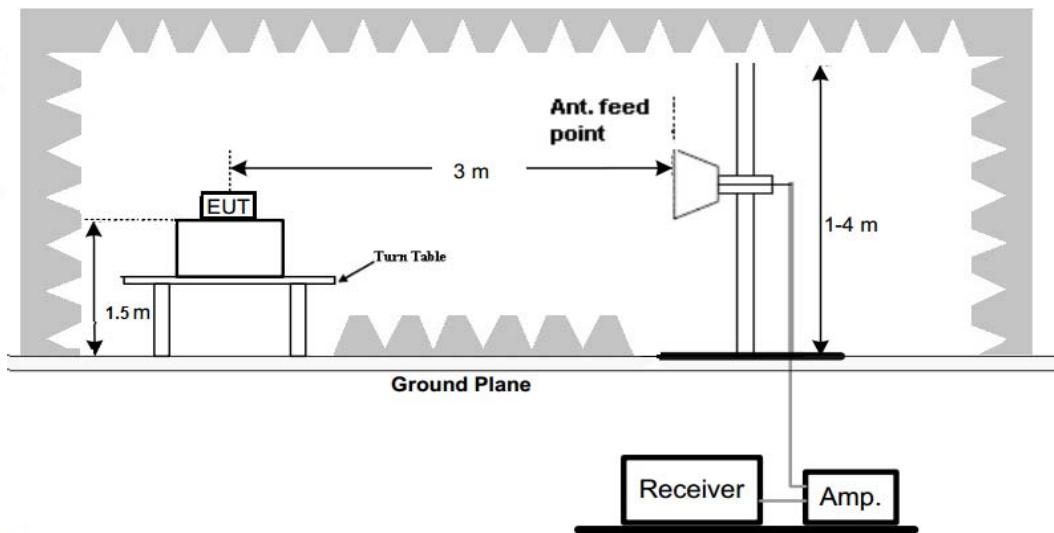

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:


1. We measured Radiated Emission at GFSK, $\pi/4$ DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
2. For below 1GHz testing recorded worst at GFSK DH5 low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer	Field Strength
30.0 MHz	1.0 GHz		MaxPeak	300.0 ms	120 kHz	VULB9168

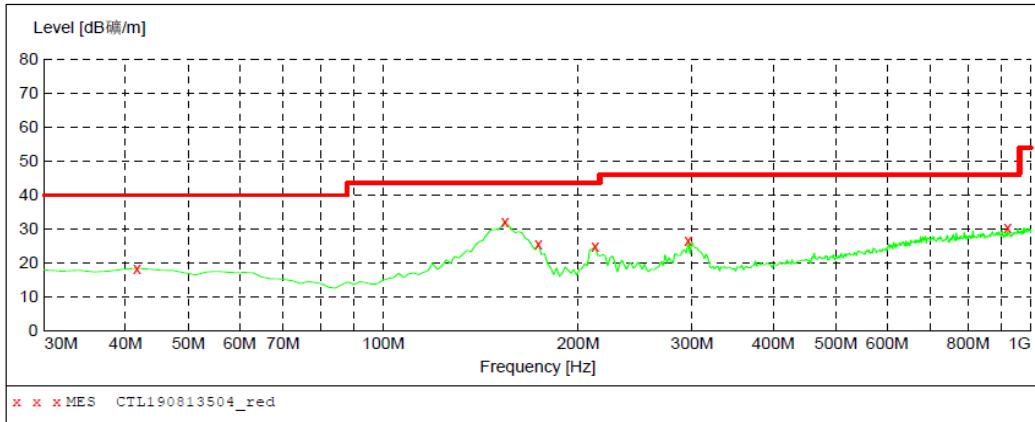

MEASUREMENT RESULT: "CTL190813504_red"


2019-8-13 8:52

Frequency MHz	Level dB _礦 /m	Transd dB	Limit dB _礦 /m	Margin dB	Det. ---	Height cm	Azimuth deg	Polarization
41.640000	18.30	14.7	40.0	21.7	---	0.0	0.00	HORIZONTAL
154.160000	32.20	15.2	43.5	11.3	---	0.0	0.00	HORIZONTAL
173.560000	25.40	13.7	43.5	18.1	---	0.0	0.00	HORIZONTAL
212.360000	24.80	11.4	43.5	18.7	---	0.0	0.00	HORIZONTAL
295.780000	26.40	14.0	46.0	19.6	---	0.0	0.00	HORIZONTAL
920.460000	30.20	24.0	46.0	15.8	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer	Field Strength
30.0 MHz	1.0 GHz		MaxPeak	300.0 ms	120 kHz	VULB9168

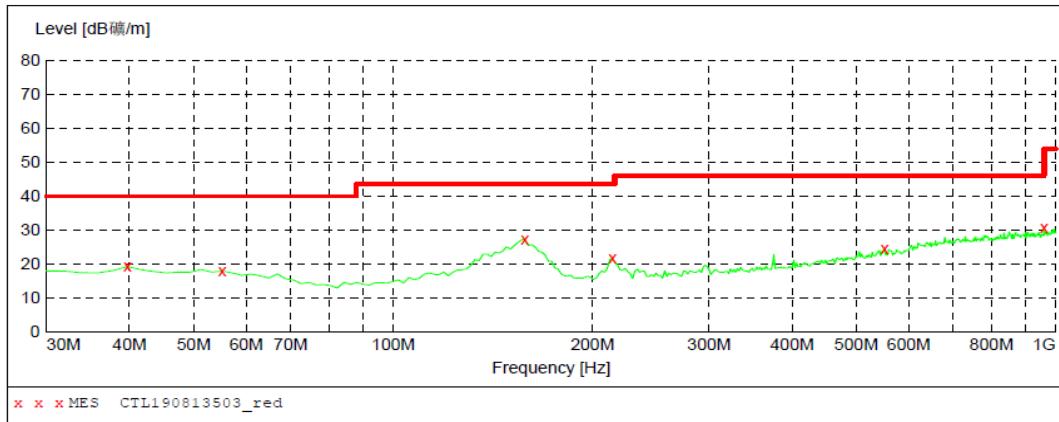

MEASUREMENT RESULT: "CTL190813503_red"

2019-8-13 8:51

Frequency MHz	Level dB _礦 /m	Transd dB	Limit dB _礦 /m	Margin dB	Det. ---	Height cm	Azimuth deg	Polarization
39.700000	19.20	14.8	40.0	20.8	---	0.0	0.00	VERTICAL
55.220000	17.90	13.8	40.0	22.1	---	0.0	0.00	VERTICAL
158.040000	27.30	15.2	43.5	16.2	---	0.0	0.00	VERTICAL
214.300000	21.70	11.5	43.5	21.8	---	0.0	0.00	VERTICAL
551.860000	24.60	19.1	46.0	21.4	---	0.0	0.00	VERTICAL
959.260000	30.80	24.3	46.0	15.2	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

GFSK (above 1GHz)

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4804.00	56.75	PK	74	17.25	52.24	33.49	6.91	35.89	4.51
4804.00	51.83	AV	54	2.17	47.32	33.49	6.91	35.89	4.51
5028.75	43.71	PK	74	30.29	36.85	34.06	7.04	34.24	6.86
5028.75	--	AV	54	--	--	--	--	--	--
7206.00	47.96	PK	74	26.04	36.86	36.95	9.18	35.03	11.10
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4804.00	56.64	PK	74	17.36	52.13	33.49	6.91	35.89	4.51
4804.00	50.77	AV	54	3.23	46.26	33.49	6.91	35.89	4.51
5028.75	43.91	PK	74	30.09	37.05	34.06	7.04	34.24	6.86
5028.75	--	AV	54	--	--	--	--	--	--
7206.00	46.18	PK	74	27.82	35.08	36.95	9.18	35.03	11.10
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2441		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4882.00	56.16	PK	74	17.84	49.8	33.60	6.95	34.19	6.36
4882.00	51.33	AV	54	2.67	44.97	33.60	6.95	34.19	6.36
5181.05	42.92	PK	74	31.08	35.32	34.56	7.15	34.11	7.60
5181.05	--	AV	54	--	--	--	--	--	--
7323.00	48.61	PK	74	25.39	36.91	37.46	9.23	35.00	11.70
7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2441		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4882.00	57.18	PK	74	16.82	50.82	33.60	6.95	34.19	6.36
4882.00	51.74	AV	54	2.26	45.38	33.60	6.95	34.19	6.36
5181.05	42.46	PK	74	31.54	34.86	34.56	7.15	34.11	7.60
5181.05	--	AV	54	--	--	--	--	--	--
7323.00	47.73	PK	74	26.27	36.03	37.46	9.23	35.00	11.70
7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):		2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4960.00	56.96	PK	74	17.04	52.04	33.84	7.00	35.92
4960.00	51.42	AV	54	2.58	46.50	33.84	7.00	35.92
5230.75	43.11	PK	74	30.89	35.83	34.45	7.12	34.29
5230.75	--	AV	54	--	--	--	--	--
7440.00	48.05	PK	74	25.95	36.10	37.64	9.28	34.97
7440.00	--	AV	54	--	--	--	--	--

Frequency(MHz):		2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4960.00	57.78	PK	74	16.22	52.86	33.84	7.00	35.92
4960.00	50.99	AV	54	3.01	46.07	33.84	7.00	35.92
5230.75	43.64	PK	74	30.36	36.36	34.45	7.12	34.29
5230.75	--	AV	54	--	--	--	--	--
7440.00	47.22	PK	74	26.78	35.27	37.64	9.28	34.97
7440.00	--	AV	54	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)	
2402.00	100.72	PK	--	--	67.33	28.78	4.61	0	33.39
2402.00	94.16	AV	--	--	60.77	28.78	4.61	0	33.39
2341.15	43.95	PK	74	30.05	10.87	28.52	4.56	0	33.08
2341.15	--	AV	54	--	--	--	--	--	--
2390.00	47.08	PK	74	26.92	13.76	28.72	4.60	0	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	49.26	PK	74	24.74	15.87	28.78	4.61	0	33.39
2400.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)	
2402.00	99.83	PK	--	--	66.44	28.78	4.61	0	33.39
2402.00	91.65	AV	--	--	58.26	28.78	4.61	0	33.39
2341.15	43.59	PK	74	30.41	10.51	28.52	4.56	0	33.08
2341.15	--	AV	54	--	--	--	--	--	--
2390.00	48.28	PK	74	25.72	14.96	28.72	4.60	0	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	49.02	PK	74	24.98	15.63	28.78	4.61	0	33.39
2400.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)	
2480.00	99.48	PK	--	--	65.86	28.92	4.70	0.00	33.62
2480.00	92.75	AV	--	--	59.13	28.92	4.70	0.00	33.62
2483.50	42.47	PK	74	31.53	8.84	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2490.75	43.01	PK	74	30.99	9.35	28.95	4.71	0.00	33.66
2490.75	--	AV	54	--	--	--	--	--	--
2500.00	42.88	PK	74	31.12	9.2	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)	
2480.00	99.62	PK	--	--	66	28.92	4.70	0.00	33.62
2480.00	91.74	AV	--	--	58.12	28.92	4.70	0.00	33.62
2483.50	43.89	PK	74	30.11	10.26	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2490.75	43.57	PK	74	30.43	9.91	28.95	4.71	0.00	33.66
2490.75	--	AV	54	--	--	--	--	--	--
2500.00	43.02	PK	74	30.98	9.34	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dB_uV/m) = Raw Value (dB_uV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

3.3. Maximum Peak Output Power

Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

Test Configuration



Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	7.908	30	Pass
	39	6.900		
	78	6.278		
$\pi/4$ DQPSK	00	9.019	20.97	Pass
	39	8.642		
	78	8.262		
8DPSK	00	9.242	20.97	Pass
	39	8.894		
	78	8.633		

Note: 1.The test results including the cable lose.

Test plot as follows:

GFSK Modulation**CH00****CH39****CH78**

$\pi/4$ DQPSK Modulation


CH00



CH39



CH78

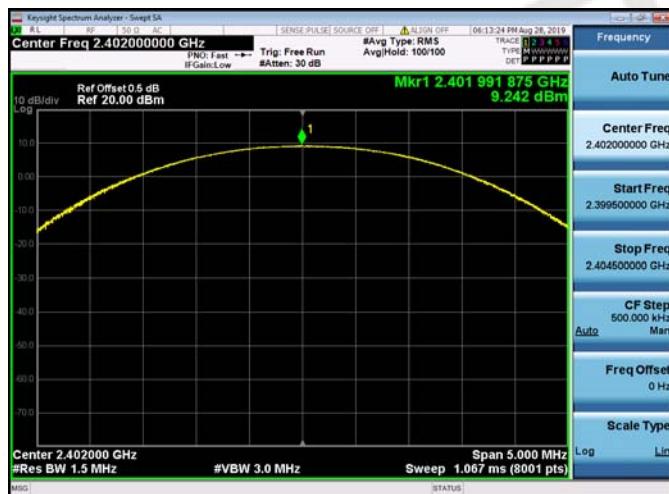8DPSK Modulation

CH00



CH39



CH78

3.4. 20dB Bandwidth and 99% bandwidth

Limit


For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration

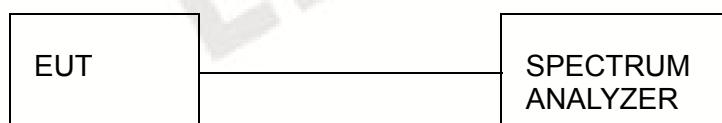


Test Results

Modulation	Channel	20dB bandwidth (MHz)	99% OBW (MHz)	Result
GFSK	CH00	0.9354	0.86148	Pass
	CH39	0.9349	0.85983	
	CH78	0.9349	0.86170	
$\pi/4$ DQPSK	CH00	1.279	1.1952	Pass
	CH39	1.281	1.1875	
	CH78	1.281	1.1852	
8DPSK	CH00	1.290	1.2114	Pass
	CH39	1.294	1.2001	
	CH78	1.296	1.1978	

Test plot as follows:

GFSK Modulation**CH00****CH39****CH78**

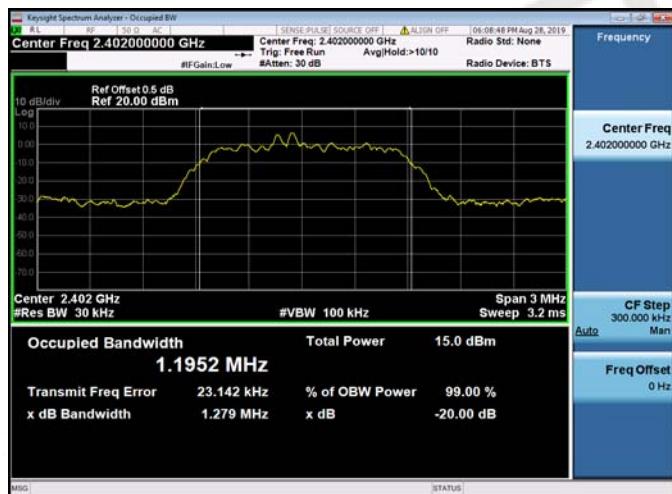$\pi/4$ DQPSK Modulation


CH00



CH39



CH78

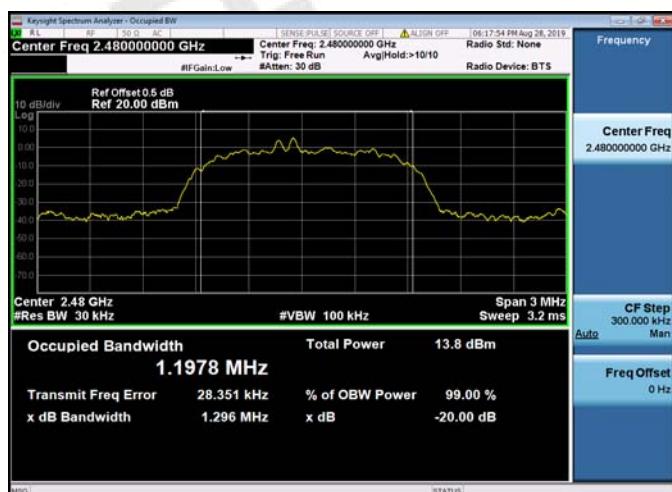8DPSK Modulation*CH00**CH39**CH78*

3.5. Frequency Separation

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

TEST CONFIGURATION



TEST RESULTS


Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	1.013	25KHz or 2/3*20dB bandwidth	Pass
	CH40			
$\pi/4$ DQPSK	CH39	1.007	25KHz or 2/3*20dB bandwidth	Pass
	CH40			
8DPSK	CH39	1.007	25KHz or 2/3*20dB bandwidth	Pass
	CH40			

Note:


We have tested all mode at high, middle and low channel, and recorded worst case at middle

Test plot as follows:


GFSK Modulation

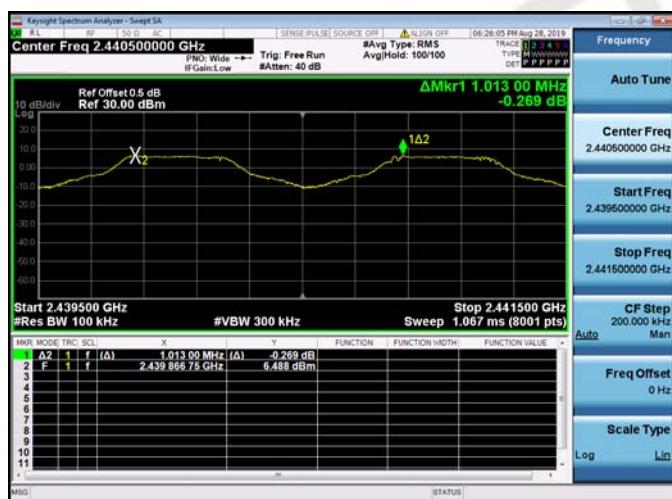

$\pi/4$ DQPSK Modulation

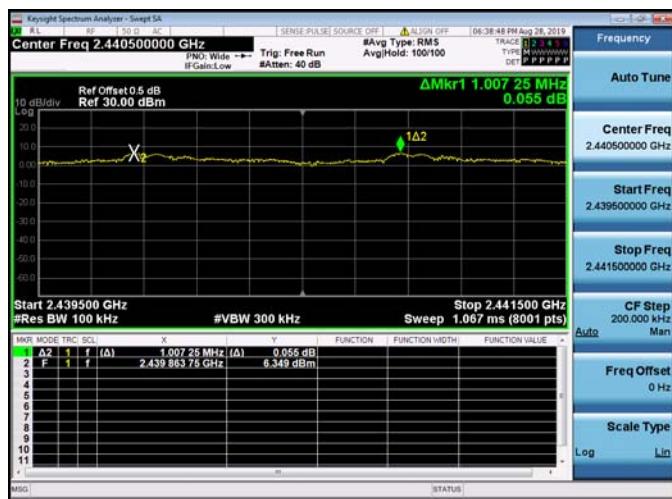

8DPSK Modulation

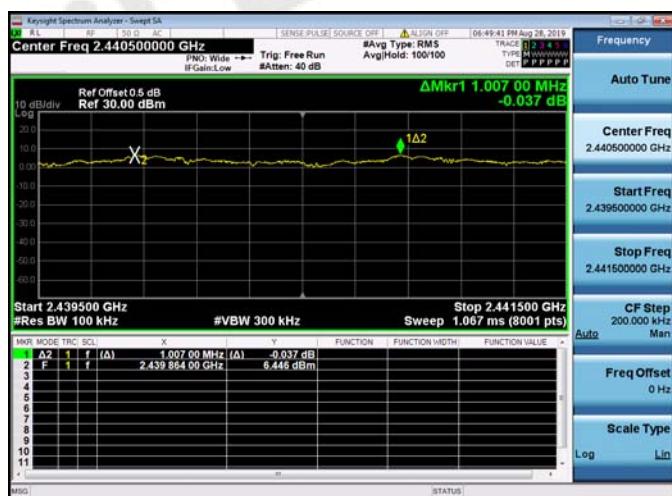

3.6. Number of hopping frequency

Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.




Test Configuration



Test Results

Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥ 15	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		

Test plot as follows:

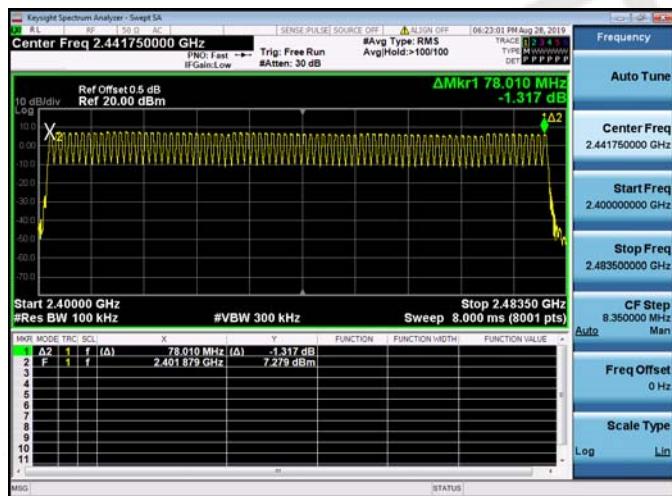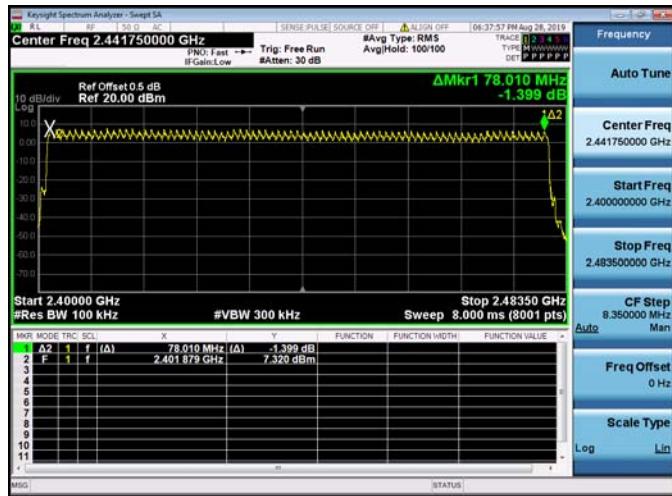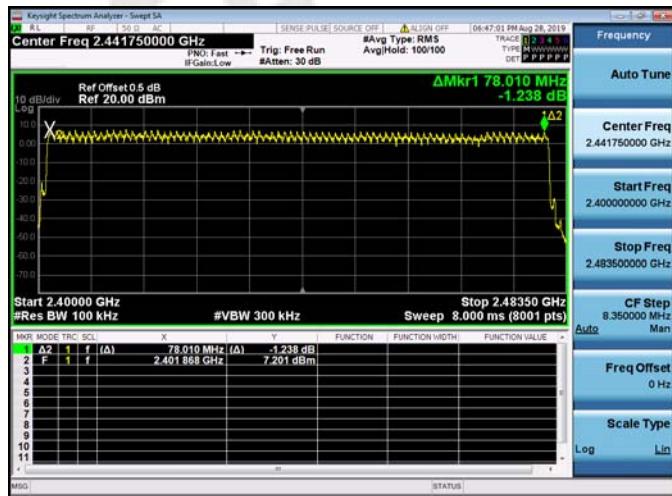GFSK Modulation **$\pi/4$ DQPSK Modulation****8DPSK Modulation**

3.7. Time of Occupancy (Dwell Time)

Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

Test Configuration



Test Results

Modulation	Packet	Pulse time (ms)	Dwell time (ms)	Limit (ms)	Result
GFSK	DH1	0.376	120.32	400	Pass
	DH3	1.631	260.96		
	DH5	2.880	307.15		
$\pi/4$ DQPSK	2-DH1	0.386	123.52	400	Pass
	2-DH3	1.637	261.92		
	2-DH5	2.884	307.66		
8DPSK	3-DH1	0.387	123.68	400	Pass
	3-DH3	1.637	261.92		
	3-DH5	2.884	307.64		

Note:

1. We have tested all mode at high,middle and low channel, and recorded worst case at middle channel.


2. Dwell time=Pulse time (ms) \times $(1600 \div 2 \div 79) \times 31.6$ Second for DH1, 2-DH1, 3-DH1

Dwell time=Pulse time (ms) \times $(1600 \div 4 \div 79) \times 31.6$ Second for DH3, 2-DH3, 3-DH3


Dwell time=Pulse time (ms) \times $(1600 \div 6 \div 79) \times 31.6$ Second for DH5, 2-DH5, 3-DH5

Test plot as follows:


GFSK Modulation

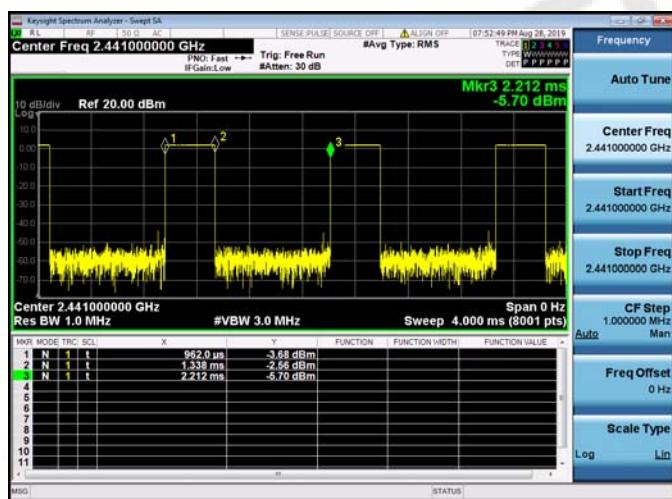


DH1

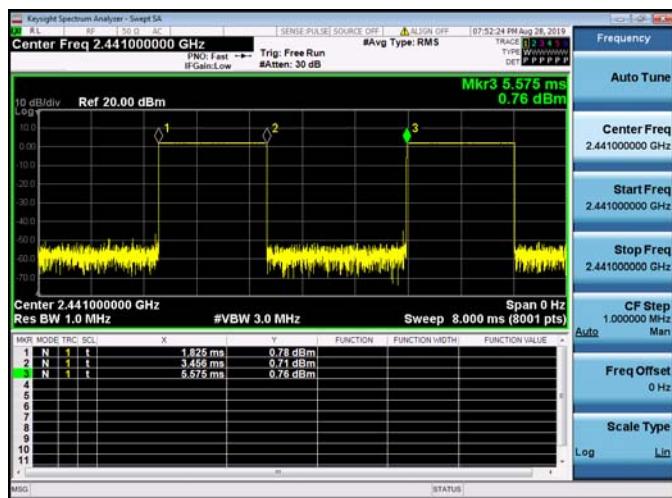


DH3

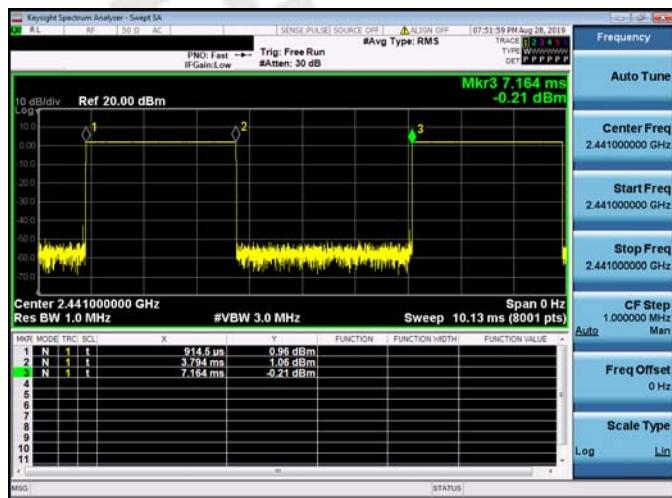


DH5

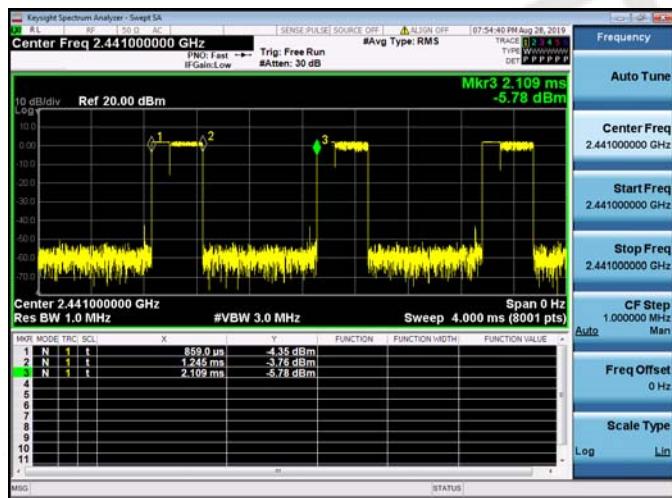$\pi/4$ DQPSK Modulation

2-DH1

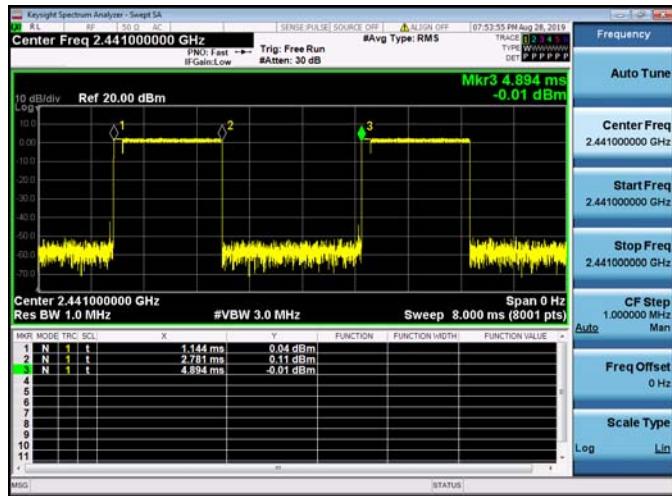


2-DH3

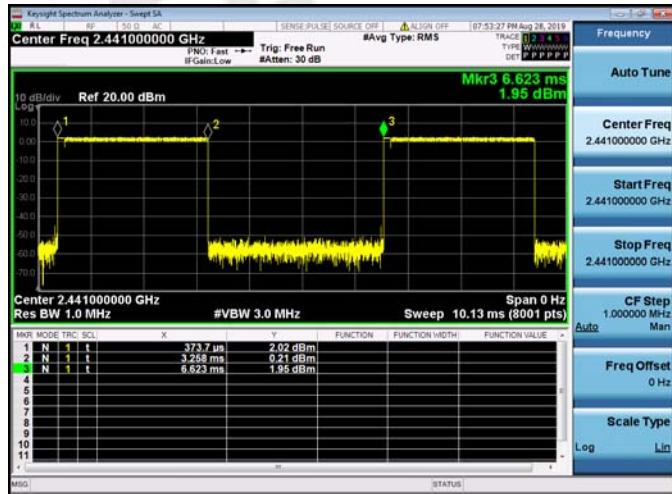


2-DH5


8DPSK Modulation

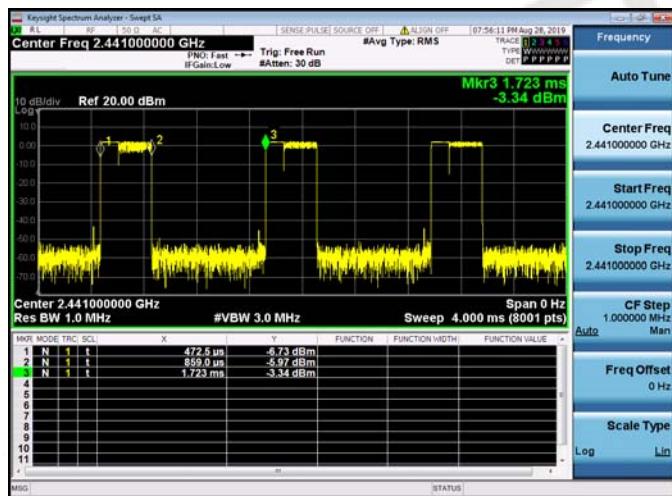

3-DH1

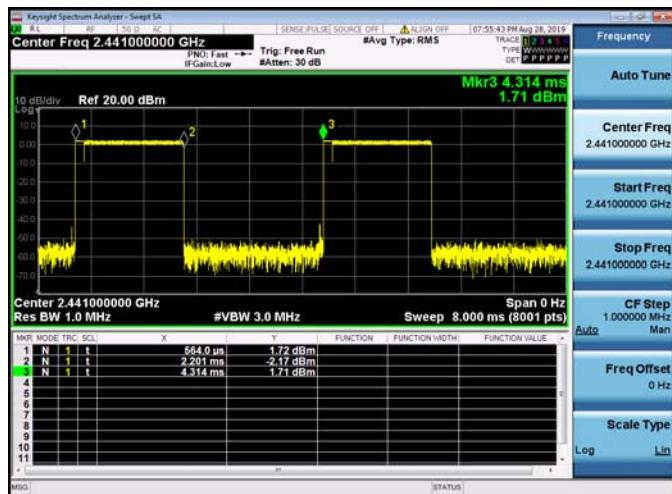

3-DH3

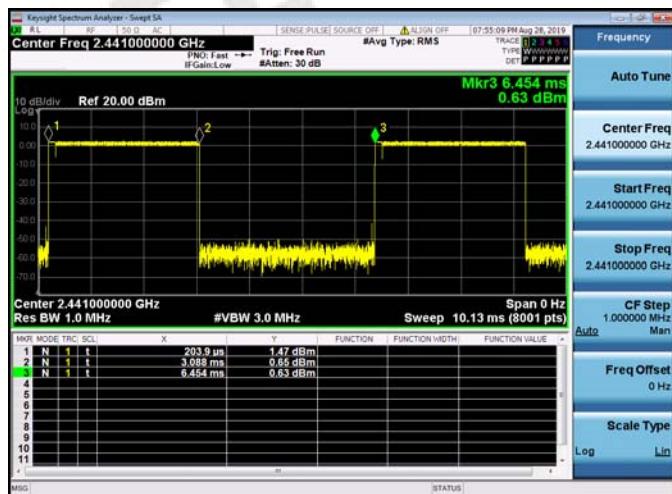

3-DH5

3.8. Out-of-band Emissions


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.

Test Configuration









Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data.

We measured all conditions (DH1, DH3, DH5) and recorded worst case at DH5


Test plot as follows:

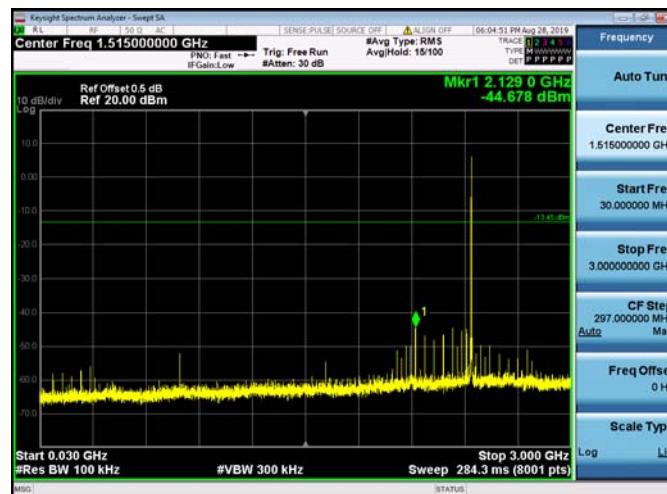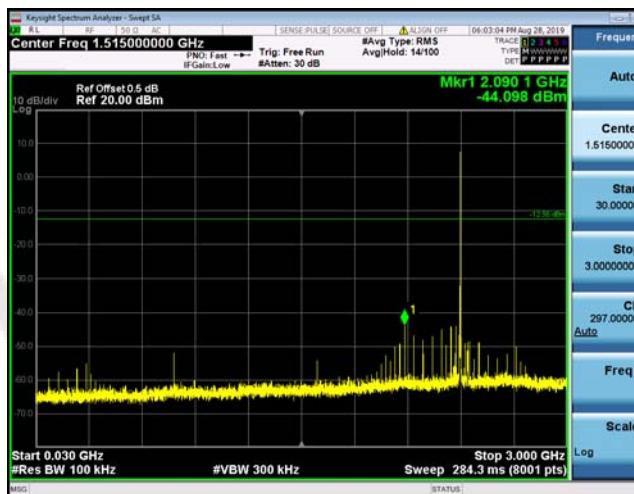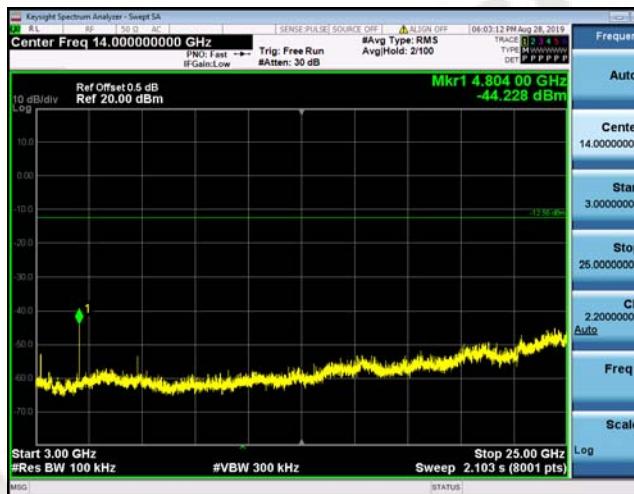GFSK CH00**GFSK CH39****Reference****30MHz-3GHz****3GHz-25GHz****3GHz-25GHz**

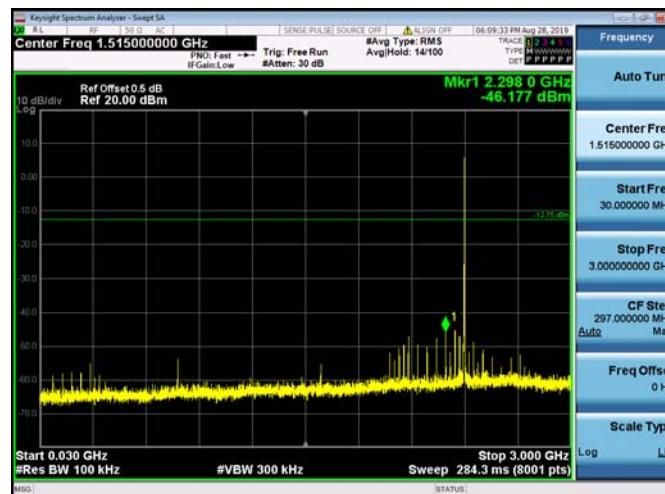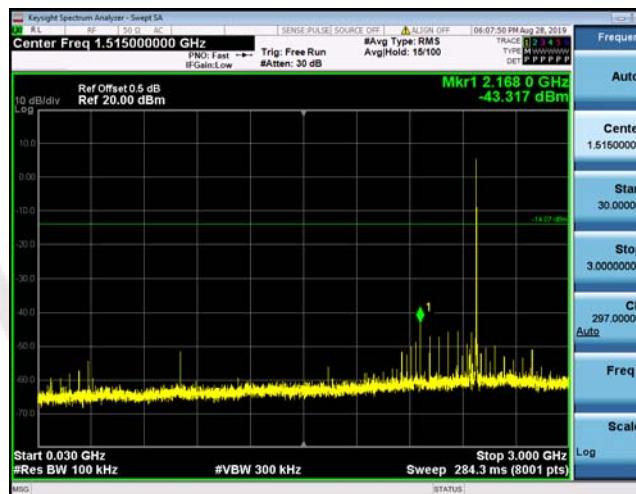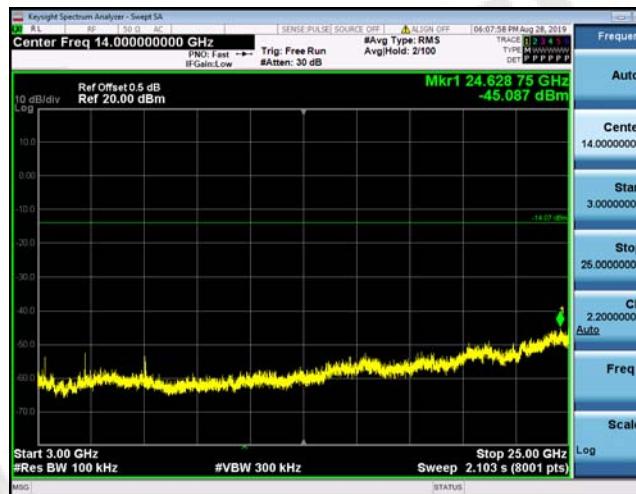
GFSK CH78 **$\pi/4$ DQPSK CH00****Reference****30MHz-3GHz****3GHz-25GHz****3GHz-25GHz**

$\pi/4$ DQPSK CH39 $\pi/4$ DQPSK CH78

Reference

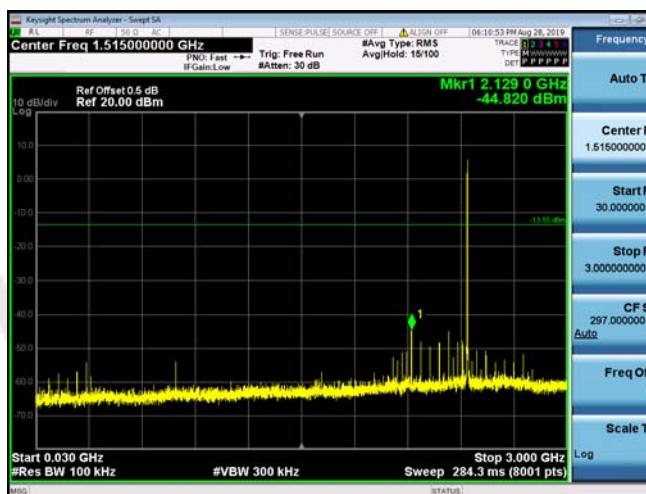


Reference

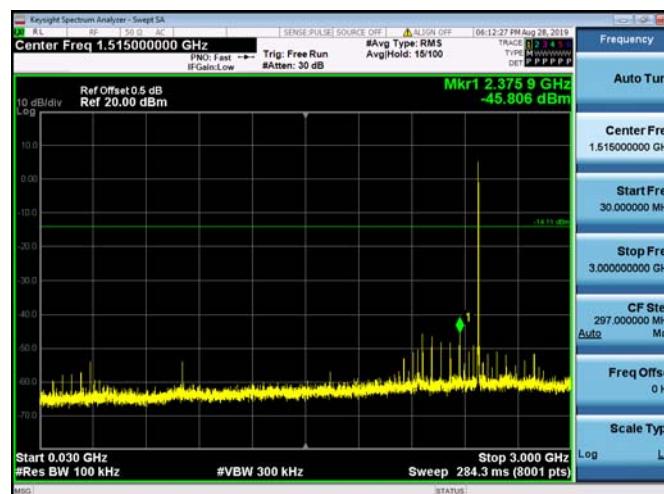

30MHz-3GHz









30MHz-3GHz

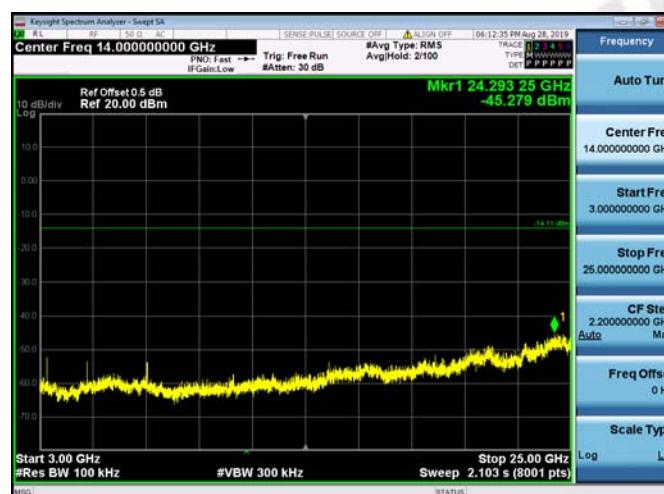





3GHz-25GHz

3GHz-25GHz

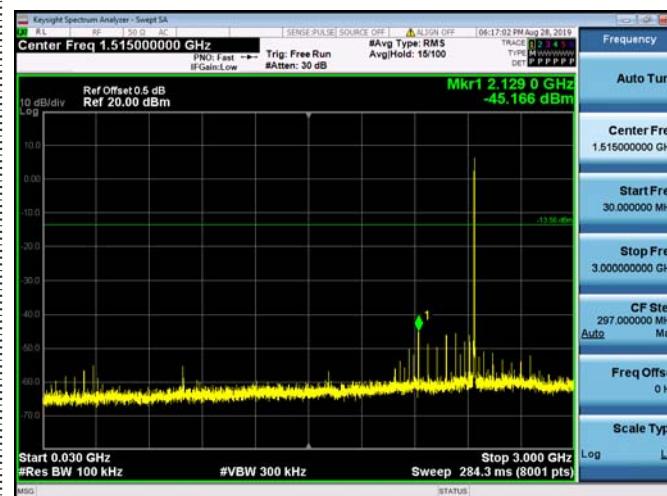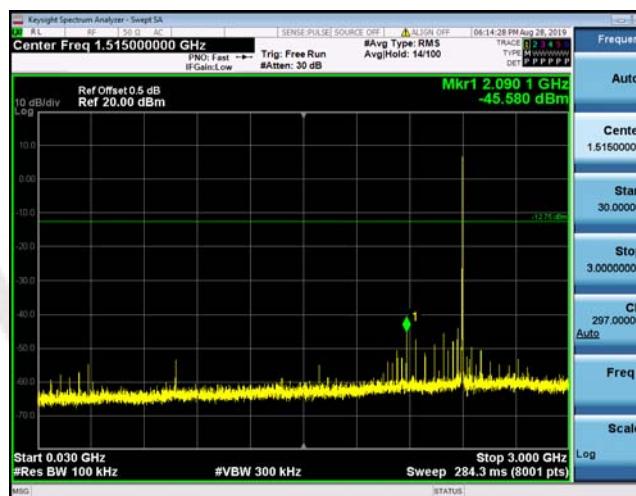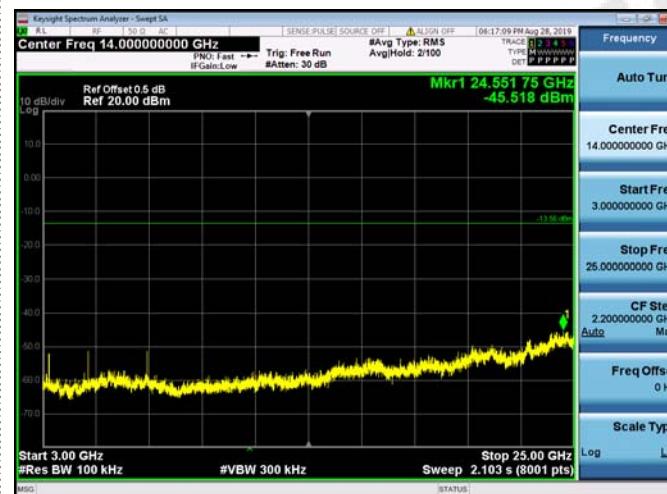
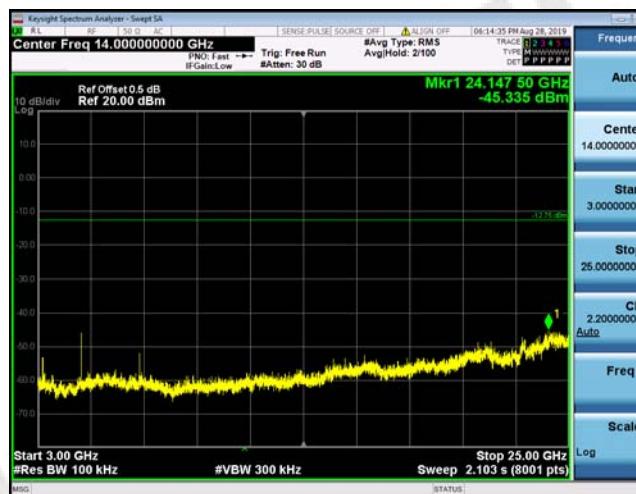
8DPSK CH00**8DPSK CH39****Reference****30MHz-3GHz****3GHz-25GHz****3GHz-25GHz**


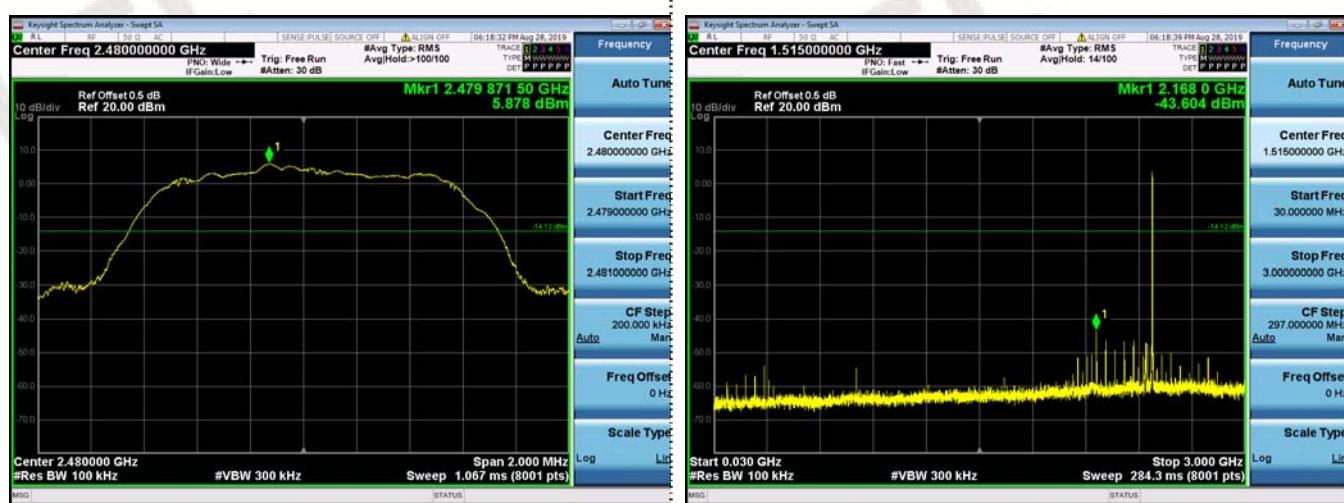
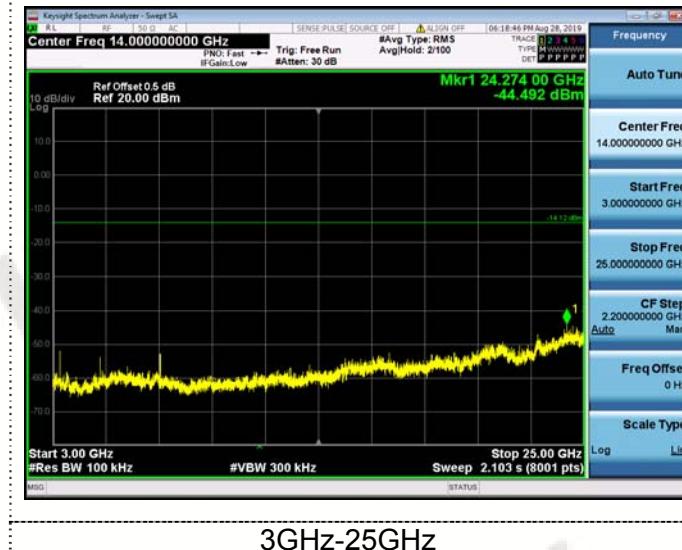
8DPSK CH78**Reference****30MHz-3GHz****3GHz-25GHz**

Band-edge Measurements for RF Conducted Emissions: GFSK

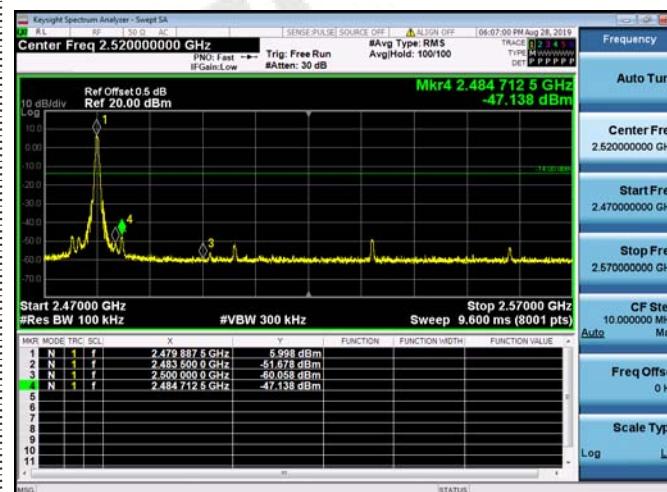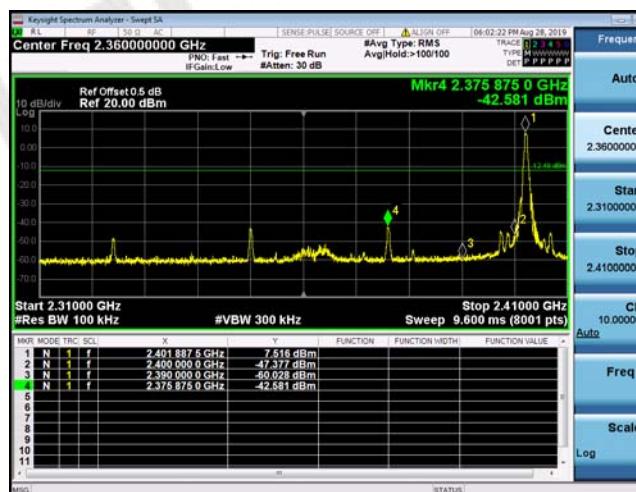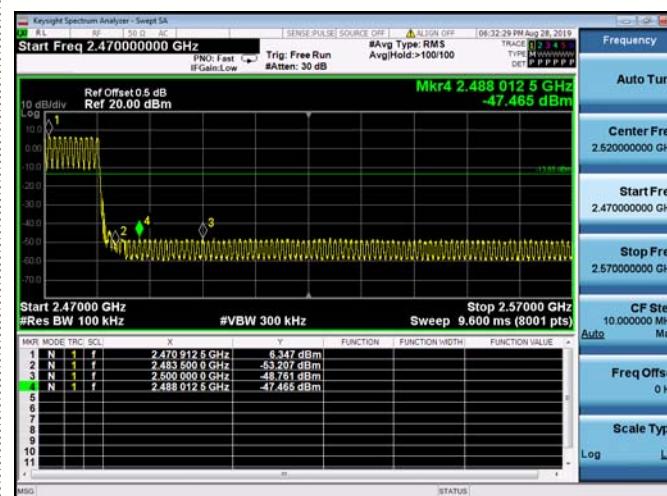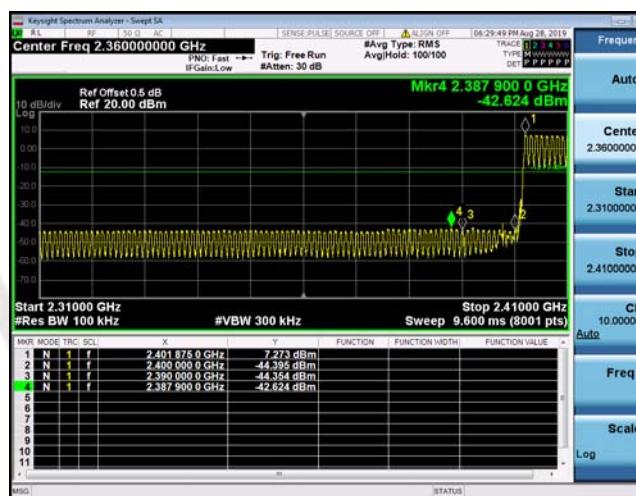**Left Band edge hoping off****Right Band edge hoping off****Left Band edge hoping on****Right Band edge hoping on**

$\pi/4$ DQPSK

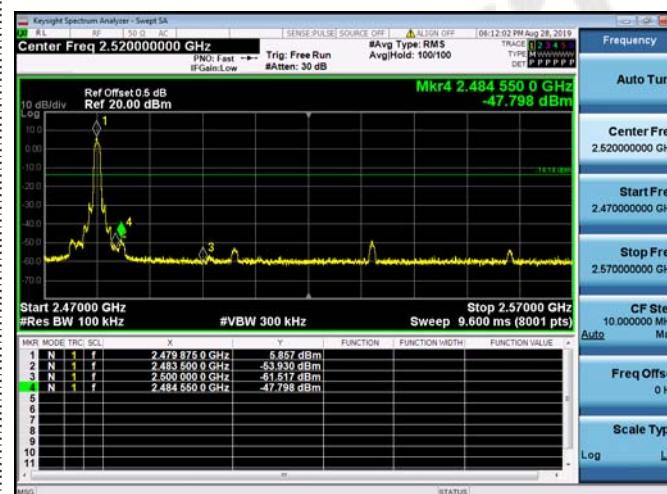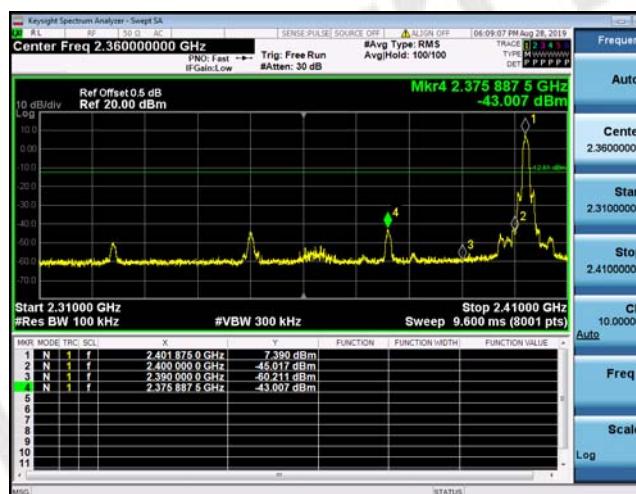**Left Band edge hoping off****Right Band edge hoping off**

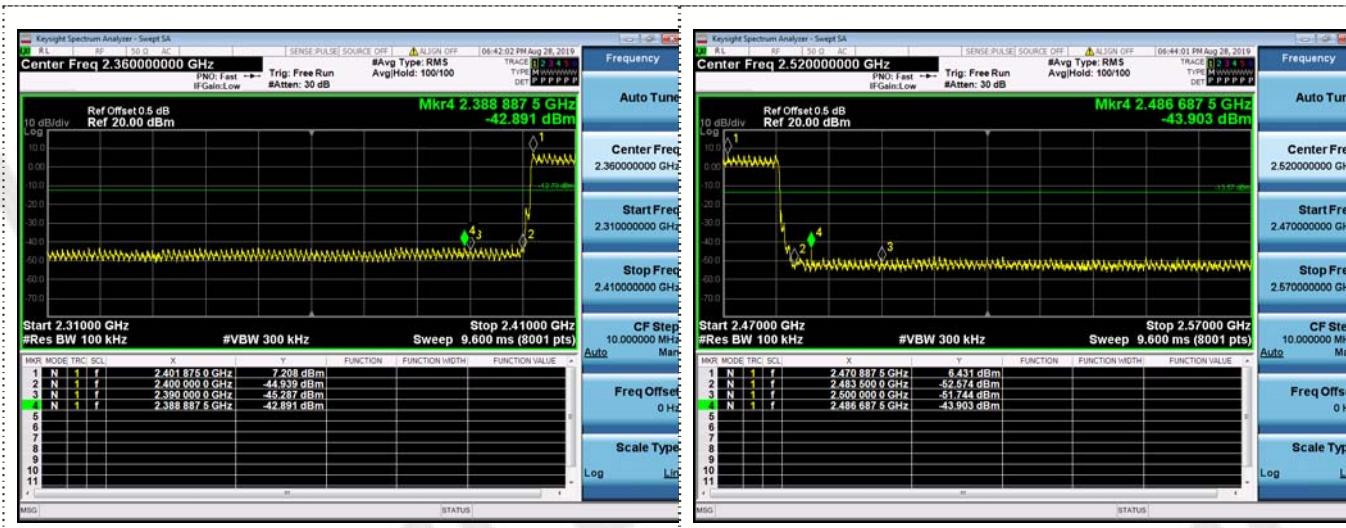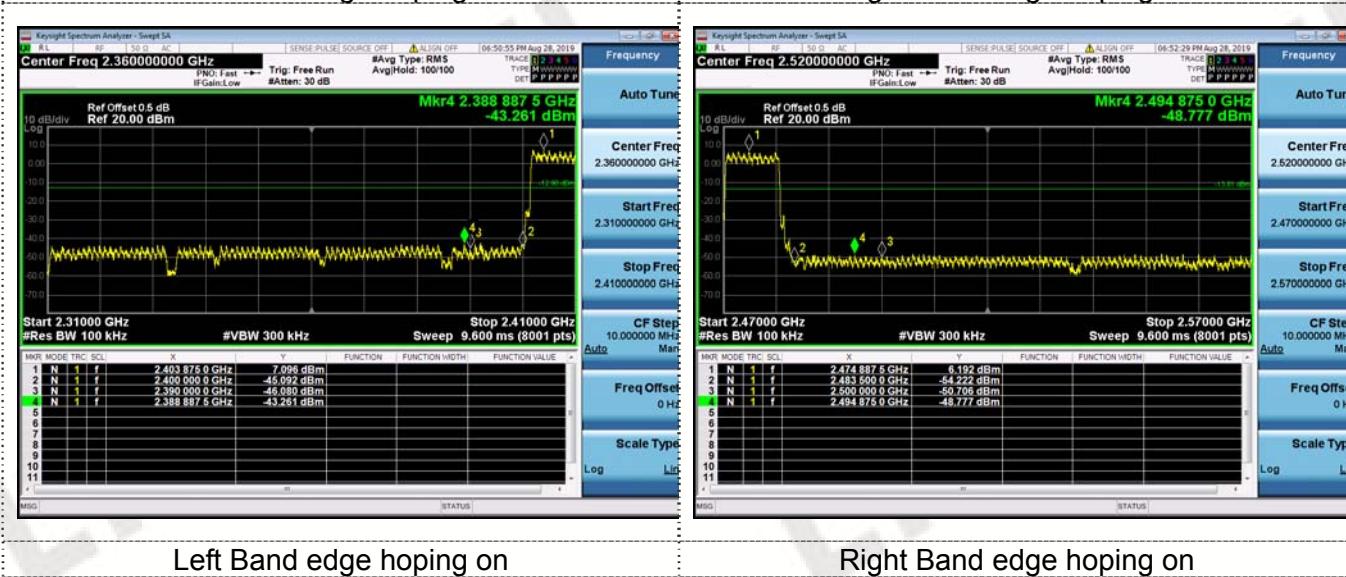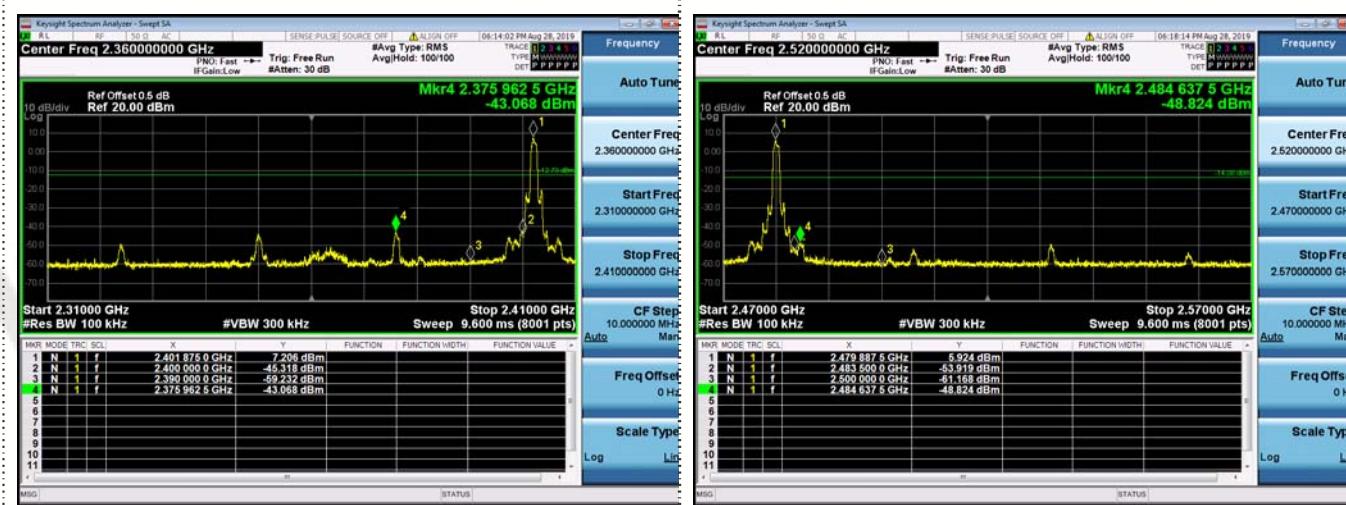**8DPSK**

3.9. Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros:8(non-inverted signal)

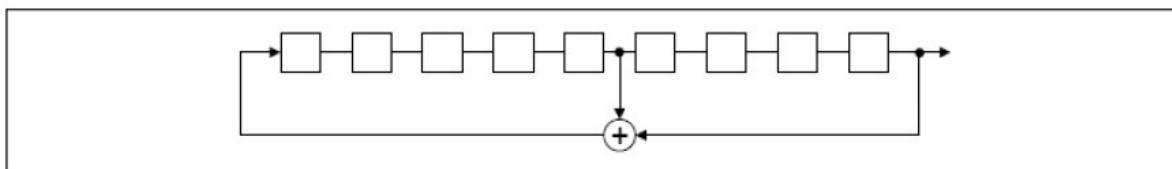

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

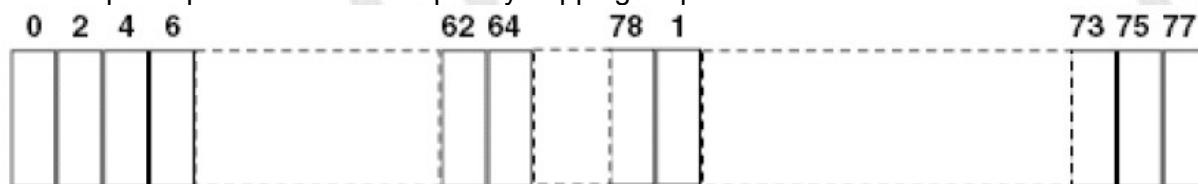

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

3.10. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The maximum gain of antenna was 0dBi.

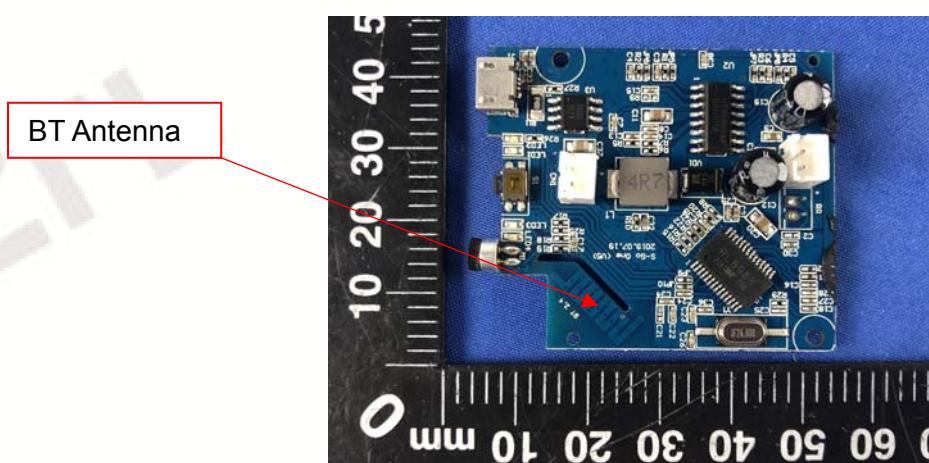


4. Test Setup Photos of the EUT

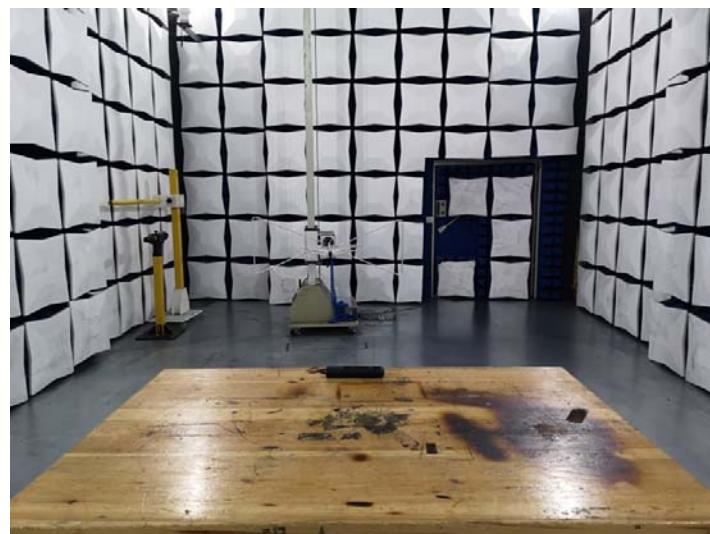

5. Photos of the EUT



External Photos of EUT



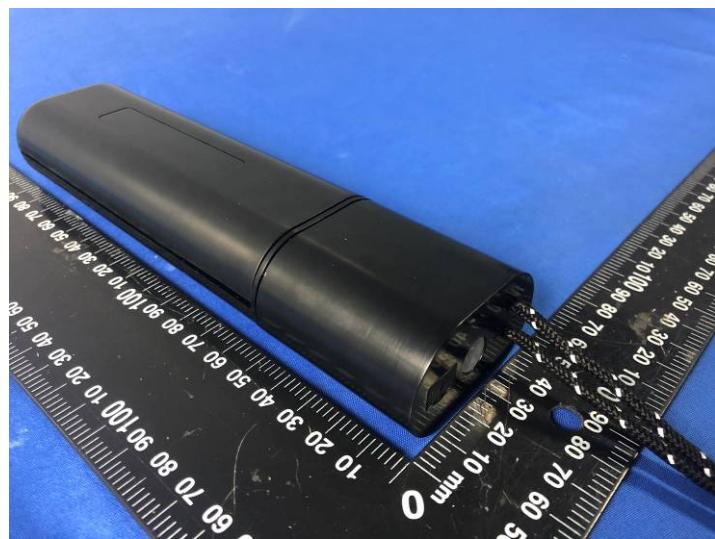

Internal Photos of EUT



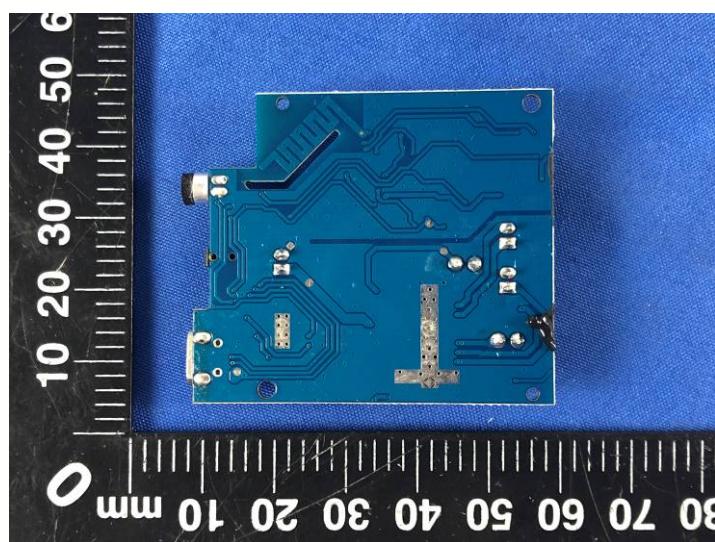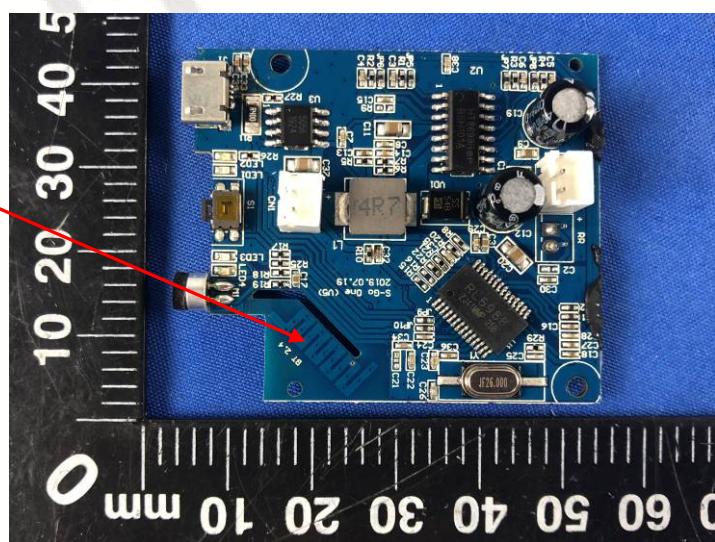



***** End of Report *****