



# TEST REPORT

No. I19Z60257-WMD03

for

**HMD Global Oy**

phone

**Model Name: TA-1182**

**FCC ID: 2AJOTTA-1182**

with

**Hardware Version: 1.0**

**Software Version: 00VZW\_0\_150**

**Issued Date: 2019-03-22**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I19Z60257-WMD03	Rev.0	1 <sup>st</sup> edition	2019-03-22



## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. INTRODUCTION &amp; ACCREDITATION .....</b>	<b>4</b>
<b>1.2. TESTING LOCATION .....</b>	<b>4</b>
<b>1.3. TESTING ENVIRONMENT .....</b>	<b>5</b>
<b>1.4. PROJECT DATA .....</b>	<b>5</b>
<b>1.5. SIGNATURE .....</b>	<b>5</b>
<b>2. CLIENT INFORMATION .....</b>	<b>6</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>6</b>
<b>2.2. MANUFACTURER INFORMATION .....</b>	<b>6</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
<b>3.1. ABOUT EUT .....</b>	<b>7</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>7</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>7</b>
<b>3.4. GENERAL DESCRIPTION .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>8</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>6.1. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>6.2. STATEMENTS .....</b>	<b>12</b>
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>13</b>
<b>TEST SOFTWARE UTILIZED .....</b>	<b>13</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>14</b>
<b>A.1 OUTPUT POWER .....</b>	<b>14</b>
<b>A.2 EMISSION LIMIT .....</b>	<b>39</b>
<b>A.3 FREQUENCY STABILITY .....</b>	<b>53</b>
<b>A.4 OCCUPIED BANDWIDTH .....</b>	<b>56</b>
<b>A.5 EMISSION BANDWIDTH .....</b>	<b>93</b>
<b>A.6 BAND EDGE COMPLIANCE .....</b>	<b>130</b>
<b>A.7 CONDUCTED SPURIOUS EMISSION .....</b>	<b>146</b>
<b>A.8 PEAK-TO-AVERAGE POWER RATIO .....</b>	<b>150</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE .....</b>	<b>151</b>



## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,  
Haidian District, Beijing, P. R. China 100191

### 1.3. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

### 1.4. Project data

Testing Start Date: 2019-02-06

Testing End Date: 2019-03-22

### 1.5. Signature



---

**Dong Yuan**  
**(Prepared this test report)**



---

**Zhou Yu**  
**(Reviewed this test report)**



---

**Zhao Hui Lin**  
**Deputy Director of the laboratory**  
**(Approved this test report)**



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: HMD Global Oy  
Address /Post: Bertel Jungin aukio 9,02600 Espoo,Finland  
Contact: NA  
Email: NA  
Telephone: NA  
Fax: NA

### **2.2. Manufacturer Information**

Company Name: HMD Global Oy  
Address /Post: Bertel Jungin aukio 9,02600 Espoo,Finland  
Contact: NA  
Email: NA  
Telephone: NA  
Fax: NA

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Phone
Model Name	TA-1182
FCC ID	2AJOTTA-1182
Antenna	Embedded
Output power	26.36dBm maximum EIRP measured for Band2
Extreme vol. Limits	3.6VDC to 4.4VDC (nominal: 3.9VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
UT36a	352910100009228	1.0	00VZW_0_150	2019-02-26
UT42a	352910100007198	1.0	00VZW_0_150	2019-02-26

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>
AE1	Battery

AE1

Model	WT241
Manufacturer	Jiade Energy Technology(Zhuhai) Co.,Ltd.
Capacitance	4000mAh

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. General Description**

The Equipment Under Test (EUT) is a model of phone with embedded antenna. Manual and specifications of the EUT were provided to fulfil the test.



## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-18 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-18 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-18 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
TIA-102.CAAA-E	DIGITAL C4FMCQPSK TRANSCEIVER MEASUREMENT METHODS	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01



## 5. LABORATORY ENVIRONMENT

**Control room / conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber FAC-3** (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of test results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

#### LTE Band 2

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	24.232(c)	A.1	P
2	Emission Limit	24.238(a), 2.1051	A.2	P
3	Frequency Stability	24.235, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	24.238(a)	A.5	P
6	Band Edge Compliance	24.238(a)	A.6	P
7	Conducted Spurious Emission	24.238, 2.1057	A.7	P
8	Peak to Average Power Ratio	24.232 (d)	A.8	P

#### LTE Band 5

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	§2.1046(a), 22.913(a)	A.1	P
2	Emission Limit	22.917, 2.1051	A.2	P
3	Frequency Stability	22.235, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	22.917(b)	A.5	P
6	Band Edge Compliance	22.917(b)	A.6	P
7	Conducted Spurious Emission	22.917, 2.1057	A.7	P



**LTE Band 13**

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(b)(10)	A.1	P
2	Emission Limit	27.53(c), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(c)	A.5	P
6	Band Edge Compliance	27.53(c)	A.6	P
7	Conducted Spurious Emission	27.53(c), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

**LTE Band 66**

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(d)(4)	A.1	P
2	Emission Limit	27.53(h), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(h)	A.5	P
6	Band Edge Compliance	27.53(h)	A.6	P
7	Conducted Spurious Emission	27.53(h), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P



## **6.2. Statements**

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by CTTL according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1.

This report only deals with the LTE functions among the features described in section 3.



### 7. Test Equipments Utilized

NO.	Description	TYPE	series number	MANUFACTURE	CAL DUE DATE	Calibration interval
1	EMI Antenna	VULB9163	9163-235	Schwarzbeck	2019-11-20	1 year
2	EMI Antenna	3117	00058889	ETS-Lindgren	2020-01-12	3 years
3	EMI Antenna	3117	00119024	ETS-Lindgren	2020-01-21	3 years
4	Universal Radio Communication Tester	CMW500	159082	R&S	2019-12-25	1 year
5	Spectrum Analyzer	FSU26	200030	R&S	2019-06-04	1 year
6	EMI Antenna	9117	167	Schwarzbeck	2019-04-13	1 year
7	Signal Generator	N5183A	MY49060052	Agilent	2019-03-31	1 year
8	Climate chamber	SH-242	93008556	ESPEC	2019-12-21	2 year
14	Test Receiver	E4440A	MY48250642	Agilent	2019-03-31	1 year
10	Universal Radio Communication Tester	CMW500	143008	R&S	2019-11-26	1 year
11	Power Amplifier	5S1G4	0341863	AR	/	
12	Universal Radio Communication Tester	MT8821C	6201623363	Anritsu	2019-07-21	1 year
13	Universal Radio Communication Tester	MT8821C	6201763159	Anritsu	2019-07-18	1 year

### Test Software Utilized

Test Item	Test Software and Version	Software Vendor
ERP/EIRP/RSE	Tile V7.2.3.5	ETS-Lindgren

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation. These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

##### **A.1.2.2 Measurement result**

#### **LTE band 2**

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	1909.3	23.60	22.47	20.97
		1880.0	23.36	22.47	20.85
		1850.7	23.49	22.38	21.00
	1 RB low	1909.3	23.45	22.49	21.01
		1880.0	23.56	22.54	20.96
		1850.7	23.42	22.86	21.07
	50% RB mid	1909.3	23.59	22.76	21.14
		1880.0	23.63	22.53	21.08
		1850.7	23.70	22.60	21.06
	100% RB	1909.3	22.66	21.59	19.86
		1880.0	22.51	21.73	19.98
		1850.7	22.53	21.47	19.93



3MHz	1 RB high	1908.5	23.34	22.58	21.02
		1880.0	23.55	22.51	20.96
		1851.5	23.61	22.32	21.03
	1 RB low	1908.5	23.44	22.59	21.03
		1880.0	23.68	22.88	21.05
		1851.5	23.65	22.86	20.95
	50% RB mid	1908.5	22.52	21.46	19.98
		1880.0	22.52	21.42	19.97
		1851.5	22.70	21.69	20.11
	100% RB	1908.5	22.50	21.42	19.94
		1880.0	22.59	21.53	19.94
		1851.5	22.68	21.69	19.95
5MHz	1 RB high	1907.5	23.35	22.24	21.05
		1880.0	23.48	22.14	20.96
		1852.5	23.32	22.43	21.02
	1 RB low	1907.5	23.34	22.31	21.08
		1880.0	23.67	22.17	21.04
		1852.5	23.40	22.34	21.01
	50% RB mid	1907.5	22.52	21.66	19.99
		1880.0	22.64	21.51	19.91
		1852.5	22.82	21.63	20.12



		1907.5	22.49	21.59	19.95
	100% RB	1880.0	22.63	21.66	19.92
		1852.5	22.67	21.70	19.91
10MHz	1 RB high	1905.0	23.60	22.71	21.00
		1880.0	23.64	22.87	20.93
		1855.0	23.53	22.64	21.05
	1 RB low	1905.0	23.58	22.74	21.01
		1880.0	23.56	22.10	21.00
		1855.0	23.64	22.49	20.97
	50% RB mid	1905.0	22.59	21.58	20.02
		1880.0	22.61	21.55	19.93
		1855.0	22.73	21.80	20.09
	100% RB	1905.0	22.52	21.51	19.89
		1880.0	22.53	21.61	19.95
		1855.0	22.61	21.66	19.92
15MHz	1 RB high	1902.5	23.73	22.73	20.97
		1880.0	23.38	22.57	20.89
		1857.5	23.45	22.89	20.99
	1 RB low	1902.5	23.61	22.46	21.08
		1880.0	23.54	22.65	21.03
		1857.5	23.61	22.95	21.02





	50% RB mid	1902.5	22.51	21.45	20.06
		1880.0	22.54	21.60	19.97
		1857.5	22.61	21.53	20.17
	100% RB	1902.5	22.36	21.53	19.94
		1880.0	22.41	21.55	19.95
		1857.5	22.57	21.60	19.93
20MHz	1 RB high	1900.0	23.75	22.61	21.02
		1880.0	23.19	22.51	20.93
		1860.0	23.28	22.25	21.01
	1 RB low	1900.0	23.53	22.23	21.05
		1880.0	23.44	22.11	21.04
		1860.0	23.45	22.09	21.02
	50% RB mid	1900.0	22.54	21.65	20.05
		1880.0	22.61	21.49	19.94
		1860.0	22.65	21.66	20.14
	100% RB	1900.0	22.54	21.45	19.92
		1880.0	22.47	21.42	19.96
		1860.0	22.66	21.63	19.97



**LTE band 5**

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	848.3	23.71	22.91	21.54
		836.5	23.97	22.88	21.53
		824.7	23.99	22.89	21.45
	1 RB low	848.3	24.09	22.88	21.37
		836.5	23.97	22.83	21.70
		824.7	23.92	23.11	21.50
	50% RB mid	848.3	24.14	22.88	21.77
		836.5	24.03	22.75	21.89
		824.7	24.18	23.05	21.87
	100% RB	848.3	22.98	22.13	20.73
		836.5	22.91	22.18	20.70
		824.7	23.12	22.05	20.69
3MHz	1 RB high	847.5	23.80	22.94	21.47
		836.5	23.98	22.86	21.53
		825.5	24.21	23.39	21.49
	1 RB low	847.5	23.95	22.95	21.43
		836.5	24.13	22.78	21.69
		825.5	24.06	23.25	21.50
	50% RB mid	847.5	23.02	22.12	20.87
		836.5	22.92	22.35	20.85



		825.5	23.06	22.05	20.64	
	100% RB	847.5	22.98	22.08	20.69	
		836.5	22.91	22.01	20.76	
		825.5	23.12	22.19	20.64	
5MHz	1 RB high	846.5	23.86	22.64	21.47	
		836.5	23.92	22.80	21.57	
		826.5	23.90	22.99	21.52	
	1 RB low	846.5	23.87	22.74	21.44	
		836.5	24.14	22.55	21.76	
		826.5	24.00	23.09	21.51	
	50% RB mid	846.5	23.02	21.84	20.98	
		836.5	23.01	22.08	20.85	
		826.5	23.06	22.10	20.64	
	100% RB	846.5	22.95	21.79	20.71	
		836.5	22.95	22.04	20.68	
		826.5	23.11	22.08	20.67	
	10MHz	1 RB high	844.0	23.93	22.89	21.54
			836.5	24.19	23.06	21.56
			829.0	23.96	23.38	21.52
1 RB low		844.0	23.83	22.78	21.43	
		836.5	24.07	22.81	21.74	



		829.0	23.98	22.91	21.50
	50% RB mid	844.0	23.03	22.08	20.94
		836.5	23.00	22.02	20.85
		829.0	22.97	22.00	20.62
	100% RB	844.0	23.02	21.85	20.73
		836.5	22.90	21.80	20.73
		829.0	23.06	22.17	20.68

**LTE band 13**

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
5MHz	1 RB high	784.5	23.77	22.73	21.59
		782	23.73	22.67	21.28
		779.5	23.97	22.71	21.45
	1 RB low	784.5	23.86	22.49	21.46
		782	24.22	22.65	21.28
		779.5	24.10	23.40	21.62
	50% RB mid	784.5	22.80	22.00	20.68
		782	22.94	21.89	20.93
		779.5	23.17	22.23	20.63
	100% RB	784.5	22.93	22.03	20.74
		782	22.92	21.99	20.65
		779.5	23.09	22.08	20.71
10MHz	1 RB high	782.0	24.05	22.59	21.20
	1 RB low	782.0	23.92	22.65	21.72
	50% RB mid	782.0	22.89	22.05	20.79
	100% RB	782.0	22.97	21.77	20.58

**LTE band 66**

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	64QAM
1.4MHz	1 RB high	1779.3	23.43	22.86	20.85
		1745.0	23.27	22.63	20.69
		1710.7	23.46	22.57	20.82
	1 RB low	1779.3	23.54	22.52	20.84
		1745.0	23.33	22.46	20.73
		1710.7	23.42	22.10	20.79
	50% RB mid	1779.3	23.88	22.39	20.82
		1745.0	23.51	21.90	21.10
		1710.7	23.46	22.39	20.96
	100% RB	1779.3	22.47	21.76	19.51
		1745.0	22.55	21.29	19.34
		1710.7	22.42	21.18	19.59
3MHz	1 RB high	1778.5	23.58	22.42	20.80
		1745.0	23.44	22.12	20.64
		1711.5	23.34	22.49	20.83
	1 RB low	1778.5	23.76	22.90	20.83
		1745.0	23.50	22.96	20.77
		1711.5	23.54	22.43	20.75
	50% RB mid	1778.5	22.61	21.80	19.82
		1745.0	22.50	21.83	19.76



	100% RB	1711.5	22.51	21.29	19.72
		1778.5	22.69	21.50	19.56
		1745.0	22.51	21.47	19.42
		1711.5	22.50	21.28	19.59
5MHz	1 RB high	1777.5	23.74	22.01	20.81
		1745.0	23.10	22.13	20.61
		1712.5	23.25	22.66	20.80
	1 RB low	1777.5	23.63	21.86	20.85
		1745.0	23.25	22.07	20.79
		1712.5	23.54	21.92	20.72
	50% RB mid	1777.5	22.73	21.62	19.80
		1745.0	22.51	21.52	19.82
		1712.5	22.50	21.48	19.65
	100% RB	1777.5	22.60	21.78	19.53
		1745.0	22.49	21.50	19.41
		1712.5	22.43	21.52	19.55
10MHz	1 RB high	1775.0	23.62	22.74	20.87
		1745.0	23.42	22.74	20.68
		1715.0	23.41	22.44	20.85
	1 RB low	1775.0	23.49	22.32	20.84
		1745.0	23.50	22.60	20.76



	50% RB mid	1715.0	23.45	22.23	20.73	
		1775.0	22.67	21.55	19.89	
		1745.0	22.60	21.62	19.74	
		1715.0	22.46	21.57	19.72	
	100% RB	1775.0	22.57	21.48	19.52	
		1745.0	22.57	21.59	19.42	
		1715.0	22.41	21.45	19.64	
	15MHz	1 RB high	1772.5	23.61	22.85	20.85
			1745.0	23.30	22.02	20.67
1717.5			23.42	22.42	20.81	
1 RB low		1772.5	23.67	22.69	20.84	
		1745.0	23.46	22.85	20.80	
		1717.5	23.36	22.95	20.76	
50% RB mid		1772.5	22.52	21.53	19.90	
		1745.0	22.51	21.55	19.81	
		1717.5	22.44	21.34	19.69	
100% RB		1772.5	22.57	21.55	19.58	
		1745.0	22.57	21.57	19.36	
		1717.5	22.45	21.43	19.62	
20MHz		1 RB high	1770.0	23.64	22.46	20.86
			1745.0	23.28	22.32	20.66





		1720.0	23.08	21.97	20.82
	1 RB low	1770.0	23.46	22.27	20.84
		1745.0	23.37	22.03	20.77
		1720.0	22.97	21.80	20.78
	50% RB mid	1770.0	22.46	21.51	19.87
		1745.0	22.49	21.43	19.79
		1720.0	22.38	21.46	19.71
	100% RB	1770.0	22.33	21.30	19.55
		1745.0	22.49	21.47	19.41
		1720.0	22.42	21.36	19.61

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 22.913(a) specifies "Mobile stations are limited to 2.0 watts EIRP."


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".


#### A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

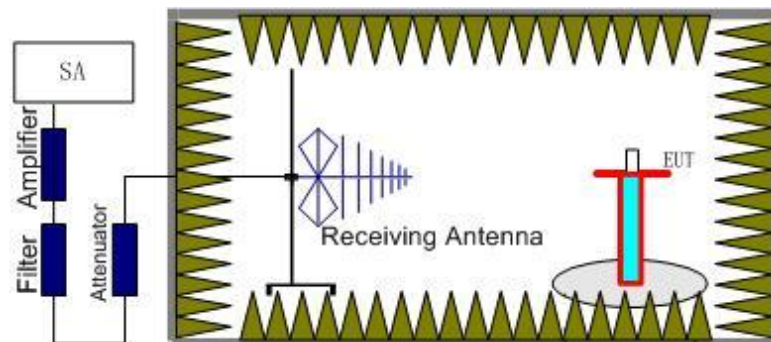

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

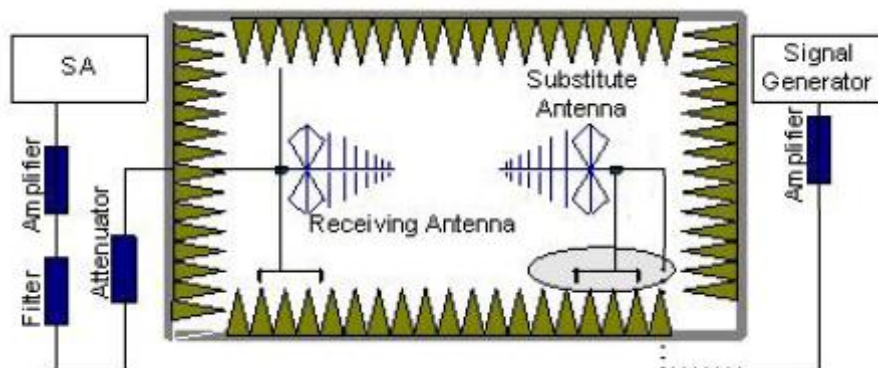

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is

connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.  
The cable loss ( $P_{cl}$ ), the substitution antenna Gain ( $G_a$ ) and the amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15$ .

### A.1.3.3 Measurement result

#### LTE Band 2- EIRP 24. 232(b)

Limits:  $\leq 33\text{dBm}$  (2W)

#### LTE Band 2\_1.4MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>o</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1850.70	-20.95	2.92	43.75	4.87	24.75	33.00	8.25	V
1880.00	-19.59	2.85	43.75	4.82	26.13	33.00	6.87	V
1909.30	-20.13	2.87	43.77	4.76	25.53	33.00	7.47	H

#### LTE Band 2\_3MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>o</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.50	-20.96	2.87	43.75	4.87	24.79	33.00	8.21	V
1880.00	-19.58	2.85	43.75	4.82	26.14	33.00	6.86	V
1908.50	-20.14	2.89	43.78	4.76	25.51	33.00	7.49	H

#### LTE Band 2\_5MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>o</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.50	-21.02	2.87	43.75	4.87	24.73	33.00	8.27	V
1880.00	-19.48	2.85	43.75	4.82	26.24	33.00	6.76	V
1907.50	-20.29	2.84	43.77	4.77	25.41	33.00	7.59	H

#### LTE Band 2\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>o</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1855.00	-21.02	2.88	43.74	4.86	24.70	33.00	8.30	H
1880.00	-19.64	2.85	43.75	4.82	26.08	33.00	6.92	V
1905.00	-20.46	2.87	43.77	4.77	25.21	33.00	7.79	H

#### LTE Band 2\_15MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>o</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1857.50	-21.07	2.87	43.75	4.86	24.67	33.00	8.33	V
1880.00	-19.72	2.85	43.75	4.82	26.00	33.00	7.00	V
1902.50	-20.77	2.86	43.77	4.78	24.92	33.00	8.08	H

#### LTE Band 2\_20 MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>o</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1860.00	-20.93	2.86	43.75	4.85	24.81	33.00	8.19	V
1880.00	-19.36	2.85	43.75	4.82	26.36	33.00	6.64	V
1900.00	-20.56	2.87	43.77	4.78	25.12	33.00	7.88	H



**LTE Band 2\_1.4MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1850.70	-21.65	2.92	43.75	4.87	24.05	33.00	8.95	H
1880.00	-20.14	2.85	43.75	4.82	25.58	33.00	7.42	V
1909.30	-21.28	2.87	43.77	4.76	24.38	33.00	8.62	H

**LTE Band 2\_3MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.50	-21.81	2.87	43.75	4.87	23.94	33.00	9.06	H
1880.00	-20.11	2.85	43.75	4.82	25.61	33.00	7.39	V
1908.50	-21.23	2.89	43.78	4.76	24.42	33.00	8.58	H

**LTE Band 2\_5MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.50	-21.79	2.87	43.75	4.87	23.96	33.00	9.04	H
1880.00	-20.78	2.85	43.75	4.82	24.94	33.00	8.06	V
1907.50	-21.27	2.84	43.77	4.77	24.43	33.00	8.57	H

**LTE Band 2\_10MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1855.00	-22.19	2.88	43.74	4.86	23.53	33.00	9.47	H
1880.00	-20.51	2.85	43.75	4.82	25.21	33.00	7.79	V
1905.00	-21.31	2.87	43.77	4.77	24.36	33.00	8.64	H

**LTE Band 2\_15MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1857.50	-22.34	2.87	43.75	4.86	23.40	33.00	9.60	V
1880.00	-20.45	2.85	43.75	4.82	25.27	33.00	7.73	V
1902.50	-21.83	2.86	43.77	4.78	23.86	33.00	9.14	H

**LTE Band 2\_20 MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1860.00	-22.02	2.86	43.75	4.85	23.72	33.00	9.28	V
1880.00	-20.39	2.85	43.75	4.82	25.33	33.00	7.67	V
1900.00	-21.17	2.87	43.77	4.78	24.51	33.00	8.49	H



**LTE Band 2\_1.4MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1850.70	-22.76	2.92	43.75	4.87	22.94	33.00	10.06	H
1880.00	-21.95	2.85	43.75	4.82	23.77	33.00	9.23	V
1909.30	-21.91	2.87	43.77	4.76	23.75	33.00	9.25	H

**LTE Band 2\_3MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.50	-23.44	2.87	43.75	4.87	22.31	33.00	10.69	H
1880.00	-21.93	2.85	43.75	4.82	23.79	33.00	9.21	V
1908.50	-22.20	2.89	43.78	4.76	23.45	33.00	9.55	H

**LTE Band 2\_5MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1852.50	-23.26	2.87	43.75	4.87	22.49	33.00	10.51	H
1880.00	-22.00	2.85	43.75	4.82	23.72	33.00	9.28	V
1907.50	-22.39	2.84	43.77	4.77	23.31	33.00	9.69	H

**LTE Band 2\_10MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1855.00	-23.31	2.88	43.74	4.86	22.41	33.00	10.59	H
1880.00	-21.98	2.85	43.75	4.82	23.74	33.00	9.26	V
1905.00	-22.49	2.87	43.77	4.77	23.18	33.00	9.82	H

**LTE Band 2\_15MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1857.50	-23.19	2.87	43.75	4.86	22.55	33.00	10.45	H
1880.00	-21.97	2.85	43.75	4.82	23.75	33.00	9.25	V
1902.50	-22.71	2.86	43.77	4.78	22.98	33.00	10.02	H

**LTE Band 2\_20 MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1860.00	-22.91	2.86	43.75	4.85	22.83	33.00	10.17	H
1880.00	-21.96	2.85	43.75	4.82	23.76	33.00	9.24	V
1900.00	-22.85	2.87	43.77	4.78	22.83	33.00	10.17	H



**LTE Band 5- ERP 22.913(a)**

**Limits:** ≤38.45dBm (7W)

**LTE Band 5\_1.4MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>α</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-19.67	2.26	45.79	0.95	2.15	22.66	38.45	15.79	H
836.50	-19.21	2.26	45.66	0.82	2.15	22.86	38.45	15.59	H
848.30	-19.97	2.27	45.55	0.80	2.15	21.96	38.45	16.49	H

**LTE Band 5\_3MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>α</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
825.50	-19.62	2.26	45.79	0.94	2.15	22.70	38.45	15.75	H
836.50	-19.50	2.26	45.66	0.82	2.15	22.57	38.45	15.88	H
847.50	-20.09	2.27	45.56	0.81	2.15	21.86	38.45	16.59	H

**LTE Band 5\_5MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>α</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.50	-19.65	2.25	45.77	0.93	2.15	22.65	38.45	15.80	H
836.50	-19.47	2.26	45.66	0.82	2.15	22.60	38.45	15.85	H
846.50	-19.94	2.26	45.56	0.82	2.15	22.03	38.45	16.42	H

**LTE Band 5\_10MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>α</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
829.00	-19.55	2.13	45.74	0.90	2.15	22.81	38.45	15.64	H
836.50	-19.16	2.26	45.66	0.82	2.15	22.91	38.45	15.54	H
844.00	-20.03	2.26	45.59	0.82	2.15	21.97	38.45	16.48	H



**LTE Band 5\_1.4MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-20.26	2.26	45.79	0.95	2.15	22.07	38.45	16.38	H
836.50	-19.80	2.26	45.66	0.82	2.15	22.27	38.45	16.18	H
848.30	-20.85	2.27	45.55	0.80	2.15	21.08	38.45	17.37	H

**LTE Band 5\_3MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
825.50	-20.92	2.26	45.79	0.94	2.15	21.40	38.45	17.05	H
836.50	-19.96	2.26	45.66	0.82	2.15	22.11	38.45	16.34	H
847.50	-21.08	2.27	45.56	0.81	2.15	20.87	38.45	17.58	H

**LTE Band 5\_5MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.50	-20.81	2.25	45.77	0.93	2.15	21.49	38.45	16.96	H
836.50	-20.05	2.26	45.66	0.82	2.15	22.02	38.45	16.43	H
846.50	-20.83	2.26	45.56	0.82	2.15	21.14	38.45	17.31	H

**LTE Band 5\_10MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
829.00	-20.30	2.13	45.74	0.90	2.15	22.06	38.45	16.39	H
836.50	-20.14	2.26	45.66	0.82	2.15	21.93	38.45	16.52	H
844.00	-20.64	2.26	45.59	0.82	2.15	21.36	38.45	17.09	H





**LTE Band 5\_1.4MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-21.55	2.26	45.79	0.95	2.15	20.78	38.45	17.67	H
836.50	-21.16	2.26	45.66	0.82	2.15	20.91	38.45	17.54	H
848.30	-22.16	2.27	45.55	0.80	2.15	19.77	38.45	18.68	H

**LTE Band 5\_3MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
825.50	-22.11	2.26	45.79	0.94	2.15	20.21	38.45	18.24	H
836.50	-21.45	2.26	45.66	0.82	2.15	20.62	38.45	17.83	H
847.50	-22.13	2.27	45.56	0.81	2.15	19.82	38.45	18.63	H

**LTE Band 5\_5MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.50	-21.83	2.25	45.77	0.93	2.15	20.47	38.45	17.98	H
836.50	-21.38	2.26	45.66	0.82	2.15	20.69	38.45	17.76	H
846.50	-22.12	2.26	45.56	0.82	2.15	19.85	38.45	18.60	H

**LTE Band 5\_10MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
829.00	-21.42	2.13	45.74	0.90	2.15	20.94	38.45	17.51	H
836.50	-21.24	2.26	45.66	0.82	2.15	20.83	38.45	17.62	H
844.00	-21.77	2.26	45.59	0.82	2.15	20.23	38.45	18.22	H



**LTE Band 13- ERP 27.50(b)(10)**

Limits: ≤34.77 dBm (3W)

**LTE Band 13\_5MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
779.50	-20.57	2.01	45.64	0.04	2.15	20.95	34.77	13.82	V
782.00	-20.35	2.01	45.65	0.09	2.15	21.23	34.77	13.54	V
784.50	-20.34	2.01	45.67	0.16	2.15	21.33	34.77	13.44	V

**LTE Band 13\_10MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
782.00	-20.16	2.01	45.65	0.09	2.15	21.42	34.77	13.35	V

**LTE Band 13\_5MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
779.50	-21.54	2.01	45.64	0.04	2.15	19.98	34.77	14.79	V
782.00	-21.55	2.01	45.65	0.09	2.15	20.03	34.77	14.74	V
784.50	-21.07	2.01	45.67	0.16	2.15	20.60	34.77	14.17	V

**LTE Band 13\_10MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
782.00	-21.31	2.01	45.65	0.09	2.15	20.27	34.77	14.50	V

**LTE Band 13\_5MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
779.50	-22.85	2.01	45.64	0.04	2.15	18.67	34.77	16.10	V
782.00	-22.56	2.01	45.65	0.09	2.15	19.02	34.77	15.75	V
784.50	-22.55	2.01	45.67	0.16	2.15	19.12	34.77	15.65	V

**LTE Band 13\_10MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
782.00	-22.85	2.01	45.65	0.09	2.15	18.73	34.77	16.04	V



**LTE Band 66- EIRP 27.50(d)**

**Limits:** ≤30dBm (1W)

**LTE Band 66\_1.4MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1710.70	-29.02	3.17	44.10	5.12	23.37	33.00	9.63	H
1745.00	-29.59	3.68	44.16	5.06	23.31	33.00	9.69	H
1779.30	-27.49	3.04	44.03	5.00	24.58	33.00	8.42	H

**LTE Band 66\_3MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1711.50	-29.62	3.40	44.10	5.12	23.00	33.00	10.00	H
1745.00	-29.86	3.68	44.16	5.06	23.04	33.00	9.96	H
1778.50	-27.50	3.04	44.03	5.00	24.57	33.00	8.43	H

**LTE Band 66\_5MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.50	-22.66	3.66	44.10	5.12	22.90	33.00	10.10	H
1745.00	-22.19	3.68	44.16	5.06	23.35	33.00	9.65	H
1777.50	-21.93	3.04	44.04	5.00	24.07	33.00	8.93	H

**LTE Band 66\_10MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1715.00	-23.14	3.56	44.10	5.11	22.51	33.00	10.49	H
1745.00	-22.42	3.68	44.16	5.06	23.12	33.00	9.88	H
1775.00	-21.78	3.05	44.05	5.01	24.22	33.00	8.78	V

**LTE Band 66\_15MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1717.50	-23.63	3.47	44.11	5.11	22.12	33.00	10.88	H
1745.00	-22.54	3.68	44.16	5.06	23.00	33.00	10.00	H
1772.50	-22.44	3.05	44.06	5.01	23.58	33.00	9.42	V

**LTE Band 66\_20MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1720.00	-23.85	3.37	44.11	5.10	21.99	33.00	11.01	V
1745.00	-22.52	3.68	44.16	5.06	23.02	33.00	9.98	V
1770.00	-22.40	3.05	44.07	5.01	23.64	33.00	9.36	H



**LTE Band 66\_1.4MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1710.70	-30.54	3.17	44.10	5.12	21.85	33.00	11.15	H
1745.00	-30.97	3.68	44.16	5.06	21.93	33.00	11.07	H
1779.30	-28.95	3.04	44.03	5.00	23.12	33.00	9.88	H

**LTE Band 66\_3MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1711.50	-31.16	3.40	44.10	5.12	21.46	33.00	11.54	H
1745.00	-31.55	3.68	44.16	5.06	21.35	33.00	11.65	H
1778.50	-28.78	3.04	44.03	5.00	23.29	33.00	9.71	H

**LTE Band 66\_5MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.50	-24.19	3.66	44.10	5.12	21.37	33.00	11.63	H
1745.00	-24.14	3.68	44.16	5.06	21.40	33.00	11.60	V
1777.50	-23.22	3.04	44.04	5.00	22.78	33.00	10.22	H

**LTE Band 66\_10MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1715.00	-24.22	3.56	44.10	5.11	21.43	33.00	11.57	H
1745.00	-23.90	3.68	44.16	5.06	21.64	33.00	11.36	H
1775.00	-23.27	3.05	44.05	5.01	22.73	33.00	10.27	H

**LTE Band 66\_15MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1717.50	-25.07	3.47	44.11	5.11	20.68	33.00	12.32	H
1745.00	-23.52	3.68	44.16	5.06	22.02	33.00	10.98	V
1772.50	-23.52	3.05	44.06	5.01	22.50	33.00	10.50	H

**LTE Band 66\_20MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1720.00	-24.81	3.37	44.11	5.10	21.03	33.00	11.97	V
1745.00	-23.45	3.68	44.16	5.06	22.09	33.00	10.91	V
1770.00	-24.01	3.05	44.07	5.01	22.03	33.00	10.97	H



**LTE Band 66\_1.4MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1710.70	-31.06	3.17	44.10	5.12	21.33	33.00	11.67	H
1745.00	-31.58	3.68	44.16	5.06	21.32	33.00	11.68	H
1779.30	-29.76	3.04	44.03	5.00	22.31	33.00	10.69	H

**LTE Band 66\_3MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1711.50	-31.69	3.40	44.10	5.12	20.93	33.00	12.07	H
1745.00	-32.25	3.68	44.16	5.06	20.65	33.00	12.35	H
1778.50	-29.59	3.04	44.03	5.00	22.48	33.00	10.52	H

**LTE Band 66\_5MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1712.50	-24.92	3.66	44.10	5.12	20.64	33.00	12.36	H
1745.00	-24.71	3.68	44.16	5.06	20.83	33.00	12.17	H
1777.50	-24.03	3.04	44.04	5.00	21.97	33.00	11.03	H

**LTE Band 66\_10MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1715.00	-25.11	3.56	44.10	5.11	20.54	33.00	12.46	H
1745.00	-24.77	3.68	44.16	5.06	20.77	33.00	12.23	H
1775.00	-24.28	3.05	44.05	5.01	21.72	33.00	11.28	H

**LTE Band 66\_15MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1717.50	-25.69	3.47	44.11	5.11	20.06	33.00	12.94	H
1745.00	-24.74	3.68	44.16	5.06	20.80	33.00	12.20	V
1772.50	-24.77	3.05	44.06	5.01	21.25	33.00	11.75	H

**LTE Band 66\_20MHz\_64QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1720.00	-25.93	3.37	44.11	5.10	19.91	33.00	13.09	V
1745.00	-24.64	3.68	44.16	5.06	20.90	33.00	12.10	V
1770.00	-24.62	3.05	44.07	5.01	21.42	33.00	11.58	H

$$\text{Peak EIRP(dBm)} = P_{\text{Mea}}(-19.36\text{dBm}) - G_a(-4.82\text{dBi}) - P_{\text{Ag}}(-43.75\text{dB}) - P_{\text{cl}}(2.85\text{dB}) = 26.36\text{dBm}$$



**ANALYZER SETTINGS:**

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is  $U = 2.84$  dB,  $k = 2$ .

## **A.2 EMISSION LIMIT**


### **A.2.1 Measurement Method**

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 2 5 13 66.

#### **The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

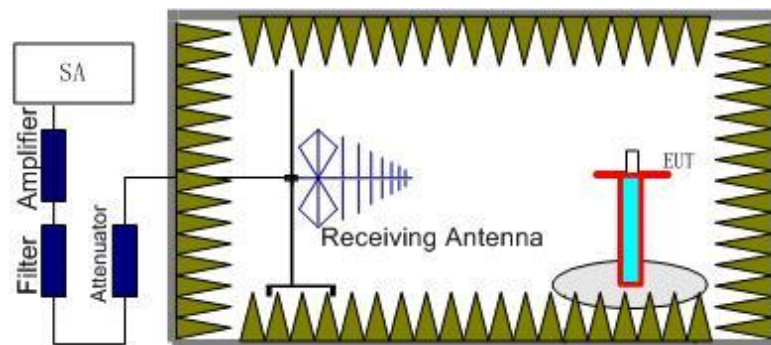

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

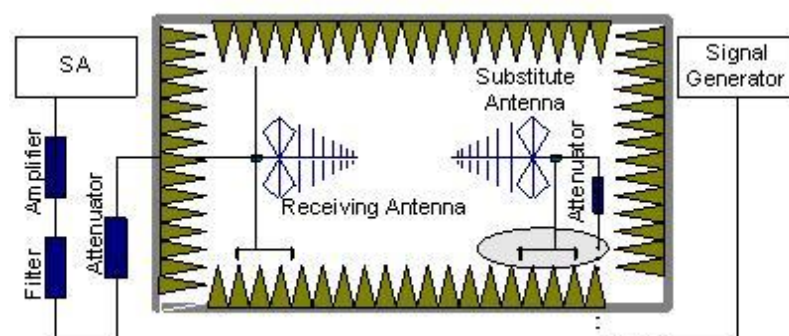

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the

receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.  
An amplifier should be connected in for the test.  
The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.  
The measurement results are obtained as described below:  
Power (EIRP)= $P_{Mea} + P_{pl} + G_a$
5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15dB$ .

#### **A.2.2 Measurement Limit**

Part 22.917, Part 24.238(a), Part 27.53(g), Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

#### **A.2.3 Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 2 5 13 66. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 2 5 13 66 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.



**LTE Band 2, 1.4MHz, QPSK, Channel 18607**

Frequency(MHz )	P <sub>Mea</sub> (dB m)	Path Loss	Antenna Gain	Peak EIRP(dBm )	Limit (dBm )	Margin(dB )	Polarization
3702.02	-56.25	6.42	8.48	-54.19	-13.00	41.19	H
5553.02	-46.90	7.18	10.59	-43.49	-13.00	30.49	H
7406.01	-54.33	8.13	12.09	-50.37	-13.00	37.37	V
9265.01	-54.42	9.07	13.26	-50.23	-13.00	37.23	V
11083.01	-51.10	9.87	13.18	-47.79	-13.00	34.79	H
12918.01	-49.70	10.50	13.45	-46.75	-13.00	33.75	H

**LTE Band 2, 1.4MHz, QPSK, Channel 18900**

Frequency(MHz )	P <sub>Mea</sub> (dB m)	Path Loss	Antenna Gain	Peak EIRP(dBm )	Limit (dBm )	Margin(dB )	Polarization
3760.02	-55.56	6.26	8.56	-53.26	-13.00	40.26	H
5642.02	-47.68	7.27	10.57	-44.38	-13.00	31.38	V
7522.01	-52.05	8.30	12.22	-48.13	-13.00	35.13	V
9406.01	-52.67	9.07	13.34	-48.40	-13.00	35.40	H
11307.01	-51.03	10.00	13.14	-47.89	-13.00	34.89	H
13145.01	-47.55	10.74	13.70	-44.59	-13.00	31.59	H

**LTE Band 2, 1.4MHz, QPSK, Channel 19193**

Frequency(MHz )	P <sub>Mea</sub> (dB m)	Path Loss	Antenna Gain	Peak EIRP(dBm )	Limit (dBm )	Margin(dB )	Polarization
3798.02	-56.61	6.14	8.62	-54.13	-13.00	41.13	H
5731.02	-48.43	7.29	10.55	-45.17	-13.00	32.17	V
7643.01	-53.18	8.17	12.31	-49.04	-13.00	36.04	H
9553.01	-50.29	9.35	13.35	-46.29	-13.00	33.29	H
11429.01	-50.90	9.99	13.11	-47.78	-13.00	34.78	H
13362.01	-48.38	10.57	14.01	-44.94	-13.00	31.94	H



**LTE Band 2, 1.4MHz, 16QAM, Channel 18607**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3702.02	-56.70	6.42	8.48	-54.64	-13.00	41.64	V
5553.02	-46.26	7.18	10.59	-42.85	-13.00	29.85	H
7409.01	-54.15	8.14	12.09	-50.20	-13.00	37.20	H
9239.01	-54.02	9.02	13.24	-49.80	-13.00	36.80	H
11143.01	-51.53	9.65	13.17	-48.01	-13.00	35.01	H
12913.01	-49.49	10.50	13.45	-46.54	-13.00	33.54	V

**LTE Band 2, 1.4MHz, 16QAM, Channel 18900**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3760.02	-55.90	6.26	8.56	-53.60	-13.00	40.60	H
5642.02	-48.20	7.27	10.57	-44.90	-13.00	31.90	V
7522.01	-52.77	8.30	12.22	-48.85	-13.00	35.85	V
9406.01	-53.39	9.07	13.34	-49.12	-13.00	36.12	H
11272.01	-50.84	9.83	13.15	-47.52	-13.00	34.52	H
13201.01	-47.78	10.50	13.78	-44.50	-13.00	31.50	H

**LTE Band 2, 1.4MHz, 16QAM, Channel 19193**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3819.02	-56.43	6.08	8.65	-53.86	-13.00	40.86	H
5731.02	-47.46	7.29	10.55	-44.20	-13.00	31.20	V
7603.01	-54.24	7.99	12.28	-49.95	-13.00	36.95	H
9553.01	-50.83	9.35	13.35	-46.83	-13.00	33.83	H
11425.01	-51.27	10.00	13.11	-48.16	-13.00	35.16	H
13389.01	-48.18	10.57	14.04	-44.71	-13.00	31.71	H

**LTE Band 2, 1.4MHz, 64QAM, Channel 18607**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3702.02	-55.33	6.42	8.48	-53.27	-13.00	40.27	H
5557.02	-52.70	7.19	10.59	-49.30	-13.00	36.30	H
7403.01	-53.89	8.13	12.08	-49.94	-13.00	36.94	V
9264.01	-52.53	9.07	13.26	-48.34	-13.00	35.34	H
11067.01	-51.75	9.90	13.19	-48.46	-13.00	35.46	H
12950.01	-49.48	10.49	13.47	-46.50	-13.00	33.50	V

**LTE Band 2, 1.4MHz, 64QAM, Channel 18900**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3760.02	-53.29	6.26	8.56	-50.99	-13.00	37.99	H
5646.02	-55.72	7.27	10.57	-52.42	-13.00	39.42	H
7520.01	-51.69	8.31	12.22	-47.78	-13.00	34.78	V
9410.01	-53.54	9.09	13.35	-49.28	-13.00	36.28	H
11240.01	-51.05	9.64	13.15	-47.54	-13.00	34.54	V
13112.01	-47.44	10.88	13.66	-44.66	-13.00	31.66	H

**LTE Band 2, 1.4MHz, 64QAM, Channel 19193**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3819.02	-53.33	6.08	8.65	-50.76	-13.00	37.76	H
5730.02	-54.07	7.29	10.55	-50.81	-13.00	37.81	V
7638.01	-52.37	8.15	12.31	-48.21	-13.00	35.21	V
9557.01	-50.81	9.34	13.34	-46.81	-13.00	33.81	H
11494.01	-51.03	9.83	13.10	-47.76	-13.00	34.76	H
13411.01	-48.35	10.58	14.08	-44.85	-13.00	31.85	V



**LTE Band 5, 1.4MHz, QPSK, Channel 20407**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1650.01	-56.06	3.57	5.23	2.15	-56.55	-13.00	43.55	V
2474.00	-46.54	4.60	6.02	2.15	-47.27	-13.00	34.27	V
3287.02	-54.68	5.28	7.69	2.15	-54.42	-13.00	41.42	H
4116.02	-55.35	6.04	9.02	2.15	-54.52	-13.00	41.52	H
4943.01	-55.28	6.70	9.84	2.15	-54.29	-13.00	41.29	H
5774.01	-54.37	7.23	10.55	2.15	-53.20	-13.00	40.20	V

**LTE Band 5, 1.4MHz, QPSK, Channel 20525**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1673.01	-57.43	3.58	5.19	2.15	-57.97	-13.00	44.97	H
2510.00	-52.01	4.63	6.12	2.15	-52.67	-13.00	39.67	V
3347.02	-54.70	5.32	7.83	2.15	-54.34	-13.00	41.34	H
4190.02	-54.91	6.18	9.09	2.15	-54.15	-13.00	41.15	V
5028.01	-55.70	6.57	9.94	2.15	-54.48	-13.00	41.48	H
5867.01	-53.06	7.29	10.53	2.15	-51.97	-13.00	38.97	H

**LTE Band 5, 1.4MHz, QPSK, Channel 20643**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1697.01	-53.20	3.60	5.15	2.15	-53.80	-13.00	40.80	H
2545.00	-50.81	4.66	6.18	2.15	-51.44	-13.00	38.44	V
3389.02	-55.15	5.35	7.93	2.15	-54.72	-13.00	41.72	V
4244.02	-55.44	6.25	9.14	2.15	-54.70	-13.00	41.70	H
5081.01	-55.66	6.72	10.01	2.15	-54.52	-13.00	41.52	H
5946.01	-53.38	7.47	10.51	2.15	-52.49	-13.00	39.49	V

**LTE Band 5, 1.4MHz, 16QAM, Channel 20407**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1650.01	-56.02	3.57	5.23	2.15	-56.51	-13.00	43.51	H
2474.00	-46.88	4.60	6.02	2.15	-47.61	-13.00	34.61	V
3301.02	-54.76	5.29	7.72	2.15	-54.48	-13.00	41.48	H
4122.02	-56.54	6.04	9.02	2.15	-55.71	-13.00	42.71	V
4946.01	-55.66	6.70	9.85	2.15	-54.66	-13.00	41.66	V
5783.01	-53.79	7.22	10.54	2.15	-52.62	-13.00	39.62	H

**LTE Band 5, 1.4MHz, 16QAM, Channel 20525**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1673.01	-56.36	3.58	5.19	2.15	-56.90	-13.00	43.90	H
2510.00	-52.02	4.63	6.12	2.15	-52.68	-13.00	39.68	V
3358.02	-54.27	5.33	7.86	2.15	-53.89	-13.00	40.89	H
4182.02	-55.11	6.17	9.08	2.15	-54.35	-13.00	41.35	H
5033.01	-53.96	6.58	9.95	2.15	-52.74	-13.00	39.74	H
5854.01	-53.72	7.25	10.53	2.15	-52.59	-13.00	39.59	H

**LTE Band 5, 1.4MHz, 16QAM, Channel 20643**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1697.01	-52.29	3.60	5.15	2.15	-52.89	-13.00	39.89	H
2545.00	-51.90	4.66	6.18	2.15	-52.53	-13.00	39.53	V
3380.02	-55.29	5.34	7.91	2.15	-54.87	-13.00	41.87	H
4249.02	-55.59	6.24	9.15	2.15	-54.83	-13.00	41.83	H
5085.01	-55.44	6.73	10.02	2.15	-54.30	-13.00	41.30	H
5937.01	-53.43	7.47	10.51	2.15	-52.54	-13.00	39.54	H



**LTE Band 5, 1.4MHz, 64QAM, Channel 20407**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1650.01	-55.15	3.57	5.23	2.15	-55.64	-13.00	42.64	H
2474.00	-49.82	4.60	6.02	2.15	-50.55	-13.00	37.55	H
3313.02	-54.75	5.29	7.75	2.15	-54.44	-13.00	41.44	H
4113.02	-55.02	6.04	9.01	2.15	-54.20	-13.00	41.20	H
4935.01	-55.15	6.72	9.84	2.15	-54.18	-13.00	41.18	V
5769.01	-53.48	7.24	10.55	2.15	-52.32	-13.00	39.32	H

**LTE Band 5, 1.4MHz, 64QAM, Channel 20525**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1673.01	-50.98	3.58	5.19	2.15	-51.52	-13.00	38.52	H
2510.00	-48.14	4.63	6.12	2.15	-48.80	-13.00	35.80	H
3342.02	-53.93	5.31	7.82	2.15	-53.57	-13.00	40.57	H
4187.02	-55.30	6.18	9.09	2.15	-54.54	-13.00	41.54	V
5019.01	-55.36	6.57	9.93	2.15	-54.15	-13.00	41.15	V
5842.01	-52.94	7.21	10.53	2.15	-51.77	-13.00	38.77	V

**LTE Band 5, 1.4MHz, 64QAM, Channel 20643**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1697.01	-48.04	3.60	5.15	2.15	-48.64	-13.00	35.64	H
2545.00	-50.10	4.66	6.18	2.15	-50.73	-13.00	37.73	H
3385.02	-54.90	5.35	7.92	2.15	-54.48	-13.00	41.48	V
4255.02	-56.11	6.24	9.16	2.15	-55.34	-13.00	42.34	V
5078.01	-54.84	6.71	10.01	2.15	-53.69	-13.00	40.69	H
5940.01	-52.75	7.47	10.51	2.15	-51.86	-13.00	38.86	H



**LTE Band 13, 5MHz, QPSK, Channel 23205**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1559.01	-54.20	3.47	5.39	2.15	-54.43	-13.00	41.43	V
2351.00	-54.49	4.46	5.65	2.15	-55.45	-13.00	42.45	V
3105.02	-53.99	5.34	7.25	2.15	-54.23	-13.00	41.23	H
3893.02	-55.51	6.10	8.75	2.15	-55.01	-13.00	42.01	V
4682.02	-55.22	6.49	9.58	2.15	-54.28	-13.00	41.28	V
5461.01	-54.98	6.91	10.55	2.15	-53.49	-13.00	40.49	H

**LTE Band 13, 5MHz, QPSK, Channel 23230**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1564.01	-59.73	3.48	5.38	2.15	-59.98	-13.00	46.98	V
2346.00	-51.97	4.45	5.64	2.15	-52.93	-13.00	39.93	H
3113.02	-54.24	5.36	7.27	2.15	-54.48	-13.00	41.48	H
3904.02	-55.14	6.11	8.77	2.15	-54.63	-13.00	41.63	V
4677.02	-54.64	6.49	9.58	2.15	-53.70	-13.00	40.70	V
5481.01	-55.26	6.99	10.57	2.15	-53.83	-13.00	40.83	H

**LTE Band 13, 5MHz, QPSK, Channel 23255**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1569.01	-55.43	3.48	5.38	2.15	-55.68	-13.00	42.68	H
2354.00	-52.86	4.46	5.66	2.15	-53.81	-13.00	40.81	H
3140.02	-54.67	5.38	7.34	2.15	-54.86	-13.00	41.86	V
3908.02	-55.76	6.11	8.77	2.15	-55.25	-13.00	42.25	V
4699.02	-55.52	6.50	9.60	2.15	-54.57	-13.00	41.57	V
5487.01	-55.39	7.01	10.58	2.15	-53.97	-13.00	40.97	H



**LTE Band 13, 5MHz, 16QAM, Channel 23205**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1559.01	-54.27	3.47	5.39	2.15	-54.50	-13.00	41.50	V
2328.00	-53.83	4.43	5.58	2.15	-54.83	-13.00	41.83	H
3111.02	-54.63	5.36	7.27	2.15	-54.87	-13.00	41.87	H
3911.02	-55.63	6.12	8.78	2.15	-55.12	-13.00	42.12	H
4671.02	-54.43	6.48	9.57	2.15	-53.49	-13.00	40.49	V
5467.01	-54.99	6.93	10.55	2.15	-53.52	-13.00	40.52	V

**LTE Band 13, 5 MHz, 16QAM, Channel 23230**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1564.01	-60.26	3.48	5.38	2.15	-60.51	-13.00	47.51	H
2342.00	-54.03	4.45	5.63	2.15	-55.00	-13.00	42.00	V
3123.02	-54.03	5.40	7.30	2.15	-54.28	-13.00	41.28	H
3921.02	-55.68	6.12	8.79	2.15	-55.16	-13.00	42.16	V
4701.02	-55.16	6.51	9.60	2.15	-54.22	-13.00	41.22	V
5483.01	-54.82	7.00	10.58	2.15	-53.39	-13.00	40.39	V

**LTE Band13, 5MHz, 16QAM, Channel 23255**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1569.01	-55.36	3.48	5.38	2.15	-55.61	-13.00	42.61	V
2354.00	-36.17	4.46	5.66	2.15	-37.12	-13.00	24.12	V
3146.02	-53.63	5.37	7.35	2.15	-53.80	-13.00	40.80	H
3934.02	-54.54	6.12	8.81	2.15	-54.00	-13.00	41.00	H
4695.02	-54.83	6.50	9.60	2.15	-53.88	-13.00	40.88	H
5489.01	-55.73	7.02	10.58	2.15	-54.32	-13.00	41.32	V





**LTE Band 13, 5MHz, 64QAM, Channel 23205**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1559.01	-48.24	3.47	5.39	2.15	-48.47	-13.00	35.47	H
2346.00	-53.78	4.45	5.64	2.15	-54.74	-13.00	41.74	V
3108.02	-54.33	5.35	7.26	2.15	-54.57	-13.00	41.57	V
3911.02	-56.21	6.12	8.78	2.15	-55.70	-13.00	42.70	H
4677.02	-54.68	6.49	9.58	2.15	-53.74	-13.00	40.74	H
5466.01	-55.76	6.93	10.55	2.15	-54.29	-13.00	41.29	H

**LTE Band 13, 5 MHz, 64QAM, Channel 23230**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1564.01	-54.81	3.48	5.38	2.15	-55.06	-13.00	42.06	H
2347.00	-52.63	4.45	5.64	2.15	-53.59	-13.00	40.59	H
3123.02	-54.08	5.40	7.30	2.15	-54.33	-13.00	41.33	H
3900.02	-55.36	6.11	8.76	2.15	-54.86	-13.00	41.86	V
4689.02	-55.19	6.50	9.59	2.15	-54.25	-13.00	41.25	V
5478.01	-54.76	6.98	10.57	2.15	-53.32	-13.00	40.32	H

**LTE Band13, 5MHz, 64QAM, Channel 23255**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1569.01	-48.36	3.48	5.38	2.15	-48.61	-13.00	35.61	H
2354.00	-54.33	4.46	5.66	2.15	-55.28	-13.00	42.28	H
3139.02	-54.97	5.38	7.33	2.15	-55.17	-13.00	42.17	H
3917.02	-55.59	6.12	8.78	2.15	-55.08	-13.00	42.08	H
4719.02	-55.25	6.52	9.62	2.15	-54.30	-13.00	41.30	H
5498.01	-55.23	7.05	10.60	2.15	-53.83	-13.00	40.83	H



**LTE Band 66, 1.4MHz QPSK, Channel 131979**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3422.02	-35.15	5.38	8.01	-32.52	-13.00	19.52	H
5136.02	-52.50	6.86	10.09	-49.27	-13.00	36.27	H
6846.01	-50.38	7.83	11.42	-46.79	-13.00	33.79	V
8551.01	-55.75	8.58	13.01	-51.32	-13.00	38.32	H
10263.01	-52.49	9.52	13.01	-49.00	-13.00	36.00	H
11978.01	-50.14	10.15	13.00	-47.29	-13.00	34.29	H

**LTE Band 66, 1.4MHz, QPSK, Channel 132322**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3490.02	-32.89	5.50	8.18	-30.21	-13.00	17.21	H
5235.02	-52.74	7.00	10.23	-49.51	-13.00	36.51	H
6981.01	-48.66	8.15	11.58	-45.23	-13.00	32.23	H
8728.01	-55.42	8.44	13.05	-50.81	-13.00	37.81	H
10472.01	-51.99	9.69	13.09	-48.59	-13.00	35.59	H
12215.01	-50.13	10.05	13.09	-47.09	-13.00	34.09	H

**LTE Band 66, 1.4MHz, QPSK, Channel 132665**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3559.02	-37.22	5.92	8.28	-34.86	-13.00	21.86	H
5339.02	-49.47	6.96	10.37	-46.06	-13.00	33.06	H
7120.01	-50.28	8.16	11.74	-46.70	-13.00	33.70	V
8901.01	-54.15	8.85	13.08	-49.92	-13.00	36.92	H
10676.01	-51.52	9.30	13.14	-47.68	-13.00	34.68	V
12457.01	-49.76	10.29	13.18	-46.87	-13.00	33.87	V



**LTE Band 66, 1.4MHz, 16QAM, Channel 131979**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3422.02	-35.02	5.38	8.01	-32.39	-13.00	19.39	H
5136.02	-52.27	6.86	10.09	-49.04	-13.00	36.04	H
6846.01	-51.13	7.83	11.42	-47.54	-13.00	34.54	V
8549.01	-55.52	8.58	13.01	-51.09	-13.00	38.09	H
10267.01	-52.59	9.53	13.01	-49.11	-13.00	36.11	V
11979.01	-50.52	10.15	13.00	-47.67	-13.00	34.67	V

**LTE Band 66, 1.4MHz, 16QAM, Channel 132322**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3490.02	-32.40	5.50	8.18	-29.72	-13.00	16.72	H
5235.02	-53.21	7.00	10.23	-49.98	-13.00	36.98	H
6981.01	-49.29	8.15	11.58	-45.86	-13.00	32.86	H
8720.01	-55.23	8.42	13.04	-50.61	-13.00	37.61	H
10470.01	-52.69	9.70	13.09	-49.30	-13.00	36.30	H
12210.01	-50.54	10.05	13.08	-47.51	-13.00	34.51	H

**LTE Band 66, 1.4MHz, 16QAM, Channel 132665**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3559.02	-37.58	5.92	8.28	-35.22	-13.00	22.22	H
5339.02	-47.38	6.96	10.37	-43.97	-13.00	30.97	H
7121.01	-50.60	8.16	11.75	-47.01	-13.00	34.01	V
8900.01	-54.35	8.85	13.08	-50.12	-13.00	37.12	H
10676.01	-52.35	9.30	13.14	-48.51	-13.00	35.51	V
12457.01	-50.13	10.29	13.18	-47.24	-13.00	34.24	V

**LTE Band 66, 1.4MHz, 64QAM, Channel 131979**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3422.02	-34.59	5.38	8.01	-31.96	-13.00	18.96	H
5136.02	-52.87	6.86	10.09	-49.64	-13.00	36.64	H
6844.01	-50.05	7.83	11.41	-46.47	-13.00	33.47	V
8558.01	-55.25	8.57	13.01	-50.81	-13.00	37.81	V
10262.01	-52.77	9.51	13.00	-49.28	-13.00	36.28	V
11979.01	-49.78	10.15	13.00	-46.93	-13.00	33.93	H

**LTE Band 66, 1.4MHz, 64QAM, Channel 132322**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3490.02	-32.66	5.50	8.18	-29.98	-13.00	16.98	H
5236.02	-52.87	7.00	10.23	-49.64	-13.00	36.64	V
6981.01	-49.08	8.15	11.58	-45.65	-13.00	32.65	V
8727.01	-55.62	8.44	13.05	-51.01	-13.00	38.01	H
10474.01	-52.34	9.69	13.09	-48.94	-13.00	35.94	H
12215.01	-49.85	10.05	13.09	-46.81	-13.00	33.81	V

**LTE Band 66, 1.4MHz, 64QAM, Channel 132665**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3559.02	-36.90	5.92	8.28	-34.54	-13.00	21.54	H
5339.02	-49.99	6.96	10.37	-46.58	-13.00	33.58	H
7119.01	-49.46	8.16	11.74	-45.88	-13.00	32.88	V
8892.01	-53.93	8.83	13.08	-49.68	-13.00	36.68	H
10674.01	-52.38	9.30	13.13	-48.55	-13.00	35.55	H
12456.01	-50.22	10.29	13.18	-47.33	-13.00	34.33	H

Note: The maximum value of expanded measurement uncertainty for this test item is  $U = 5.16$  dB,  $k = 2$ .

### **A.3 FREQUENCY STABILITY**

#### **A.3.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 2 5 13 66, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### **A.3.2 Measurement Limit**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.4VDC, with a nominal voltage of 3.9VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -5.4% to 10.8%. For the purposes of measuring frequency stability these voltage limits are to be used.

### A.3.3 Measurement results

#### LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths)

##### Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	-5.74	-27.18	-5.70	0.0031	0.0145	0.0030
3.9	-7.28	-30.00	-6.30	0.0039	0.0160	0.0034
4.4	-8.08	-29.80	-7.00	0.0043	0.0159	0.0037

##### Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
50°	-8.13	-30.73	-6.70	0.0043	0.0163	0.0036
40°	-11.16	-30.26	-4.80	0.0059	0.0161	0.0026
30°	-8.75	-27.97	-10.40	0.0047	0.0149	0.0055
20°	-6.37	-31.10	-6.10	0.0034	0.0165	0.0032
10°	-7.27	-29.71	-7.80	0.0039	0.0158	0.0041
0°	-9.03	-27.95	-5.80	0.0048	0.0149	0.0031
- 10°	-5.88	-29.10	-6.20	0.0031	0.0155	0.0033

#### LTE Band 5, 1.4MHz bandwidth (worst case of all bandwidths)

##### Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	-4.88	-25.69	1.30	0.0058	0.0307	0.0016
3.9	-2.59	-24.52	1.60	0.0031	0.0293	0.0019
4.4	-3.13	-25.08	-1.40	0.0037	0.0300	0.0017

##### Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
50°	-1.72	-24.99	-1.60	0.0021	0.0299	0.0019
40°	-2.55	-26.11	1.30	0.0030	0.0312	0.0016
30°	-3.56	-25.98	-1.80	0.0043	0.0311	0.0022
20°	-3.30	-27.19	-2.30	0.0039	0.0325	0.0027
10°	-2.85	-25.52	-2.10	0.0034	0.0305	0.0025
0°	-4.16	-24.66	-1.20	0.0050	0.0295	0.0014
- 10°	-2.88	-25.68	-2.40	0.0034	0.0307	0.0029

**LTE Band 13, 5MHz bandwidth (worst case of all bandwidths)**

**Frequency Error vs Voltage**

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	-3.25	-10.93	1.60	0.0042	0.0140	0.0020
3.9	-3.76	-10.86	-1.20	0.0048	0.0139	0.0015
4.4	-2.22	-10.83	-1.80	0.0028	0.0138	0.0023

**Frequency Error vs Temperature**

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
50°	-3.38	-11.49	-0.70	0.0043	0.0147	0.0009
40°	-2.80	-10.79	-1.30	0.0036	0.0138	0.0017
30°	-2.43	-11.60	1.40	0.0031	0.0148	0.0018
20°	-4.48	-10.13	-1.00	0.0057	0.0130	0.0013
10°	-2.92	-11.23	-1.20	0.0037	0.0144	0.0015
0°	-2.02	-10.96	-1.10	0.0026	0.0140	0.0014
- 10°	-3.69	-11.14	-0.80	0.0047	0.0142	0.0010

**LTE Band 66, 1.4MHz bandwidth (worst case of all bandwidths)**

**Frequency Error vs Voltage**

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.6	-6.31	-25.86	-4.90	0.0036	0.0148	0.0028
3.9	-6.87	-28.31	2.00	0.0039	0.0162	0.0011
4.4	-7.95	-27.88	-1.60	0.0046	0.0160	0.0009

**Frequency Error vs Temperature**

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
50°	-6.31	-25.86	-4.50	0.0036	0.0148	0.0026
40°	-6.87	-28.31	-2.80	0.0039	0.0162	0.0016
30°	-7.95	-27.88	-4.40	0.0046	0.0160	0.0025
20°	-6.45	-26.65	-5.40	0.0037	0.0153	0.0031
10°	-7.31	-26.41	-2.90	0.0042	0.0151	0.0017
0°	-8.03	-26.35	6.40	0.0046	0.0151	0.0037
- 10°	-8.21	-26.76	-3.70	0.0047	0.0153	0.0021



## **A.4 OCCUPIED BANDWIDTH**

### **A.4.1 Occupied Bandwidth Results**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from KDB 971168 4.2:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least  $10\log(\text{OBW} / \text{RBW})$  below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



**LTE band 2, 1.4MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1880.0	1097.76	1097.76	1089.74

**LTE band 2, 1.4MHz Bandwidth, QPSK (99% BW)**

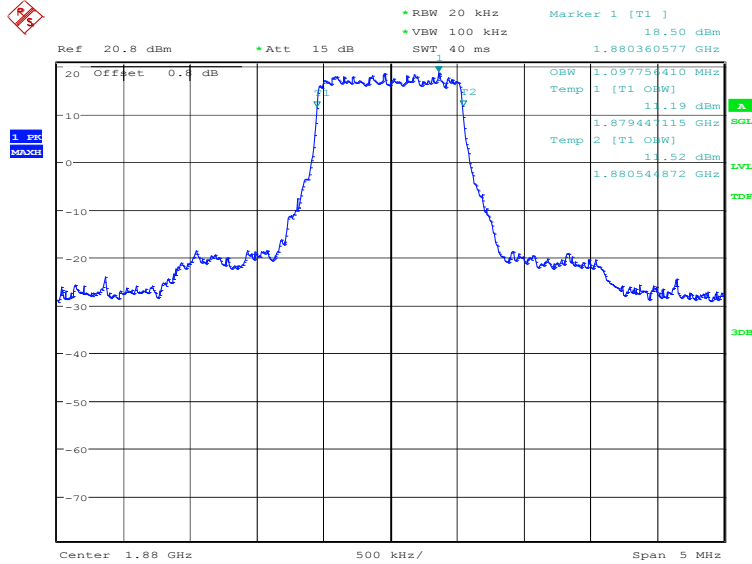

Date: 26.FEB.2019 19:55:54


**LTE band 2, 1.4MHz Bandwidth, 16QAM (99% BW)**

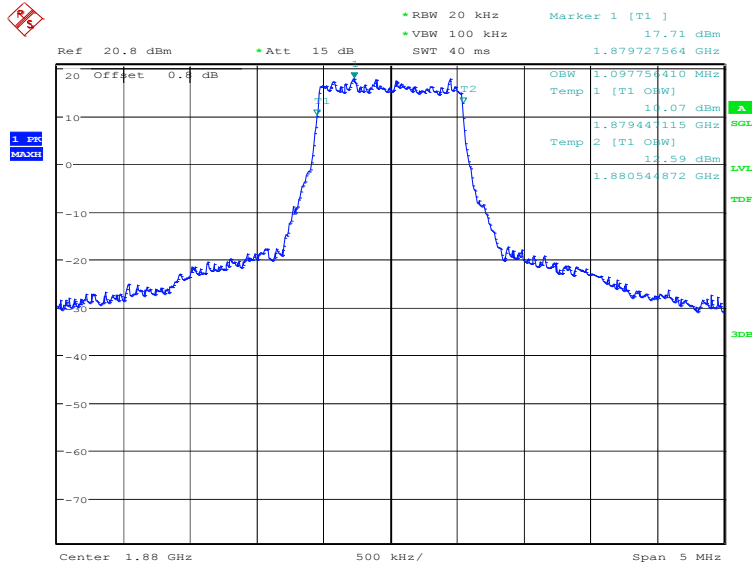

Date: 26.FEB.2019 19:57:18



### LTE band 2, 1.4MHz Bandwidth, 64QAM (99% BW)

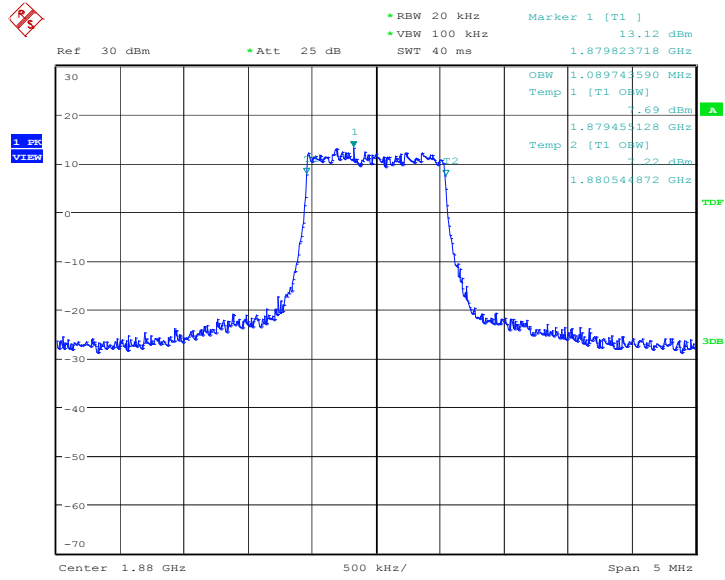


Date: 27.FEB.2019 14:09:40

**LTE band 2, 3MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1880.0	2692.31	2708.33	2692.31

**LTE band 2, 3MHz Bandwidth, QPSK (99% BW)**

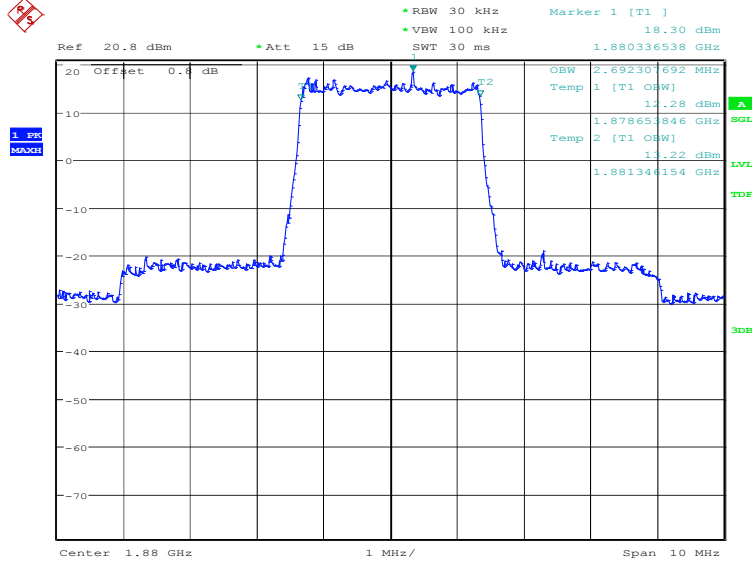

Date: 26.FEB.2019 19:58:44


**LTE band 2, 3MHz Bandwidth, 16QAM (99% BW)**

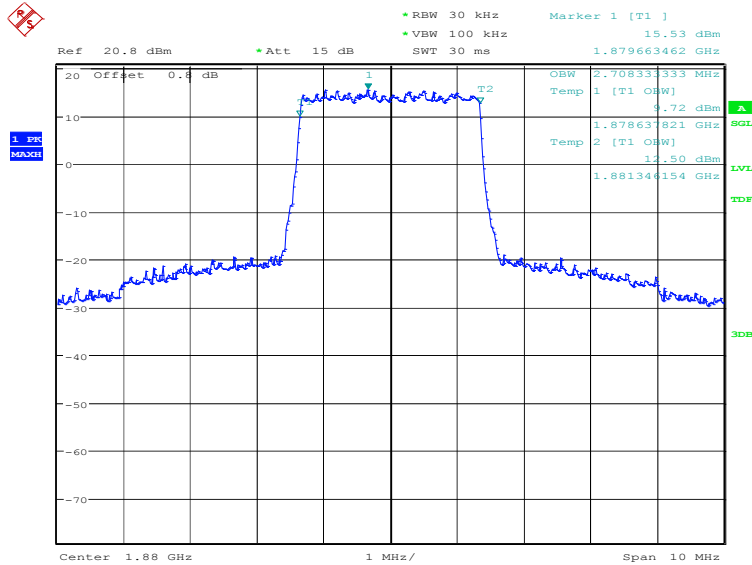

Date: 26.FEB.2019 20:00:08



### LTE band 2, 3MHz Bandwidth, 64QAM (99% BW)

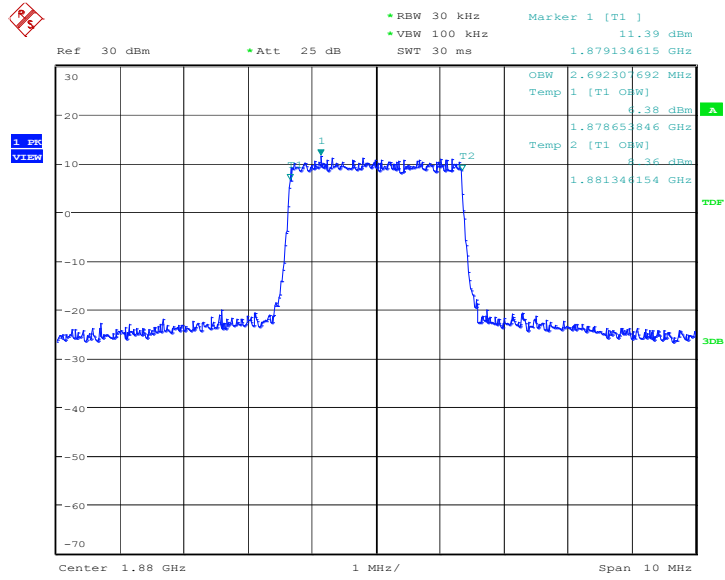


Date: 27.FEB.2019 14:11:32

**LTE band 2, 5MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1880.0	4519.23	4519.23	4519.23

**LTE band 2, 5MHz Bandwidth, QPSK (99% BW)**

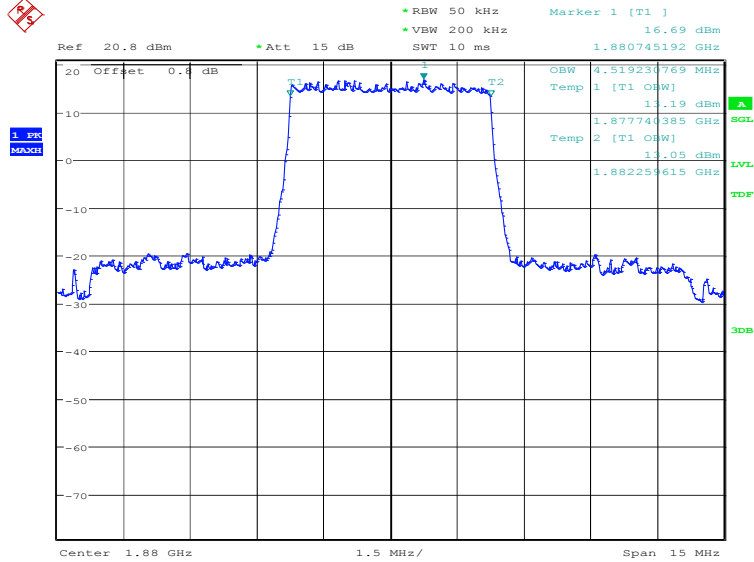

Date: 26.FEB.2019 20:01:33


**LTE band 2, 5MHz Bandwidth, 16QAM (99% BW)**

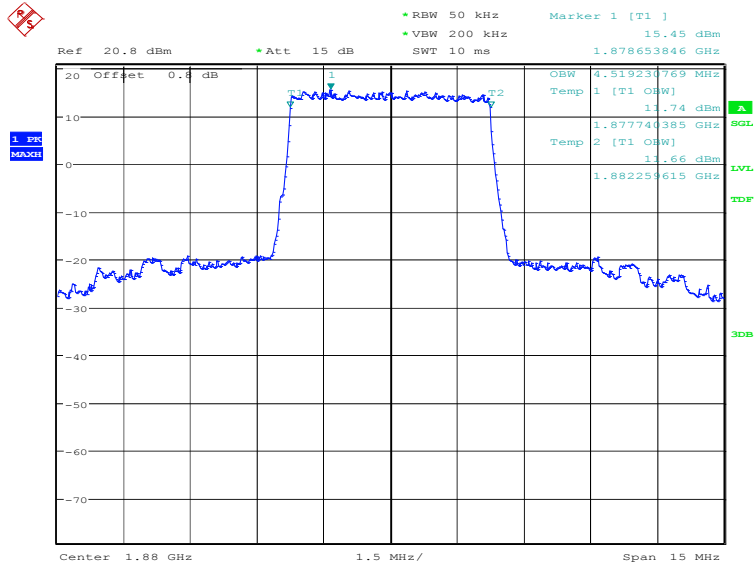

Date: 26.FEB.2019 20:02:57



### LTE band 2, 5MHz Bandwidth, 64QAM (99% BW)

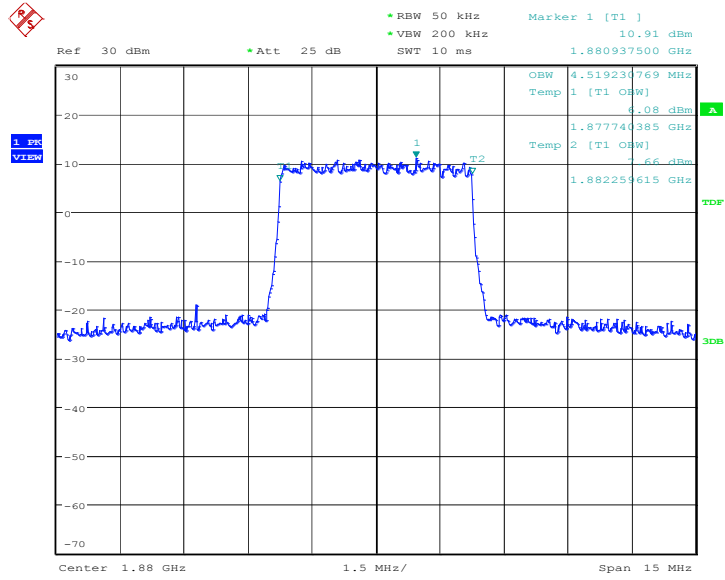


Date: 27.FEB.2019 14:15:00

**LTE band 2, 10MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1880.0	8942.31	8990.38	8990.38

**LTE band 2, 10MHz Bandwidth, QPSK (99% BW)**

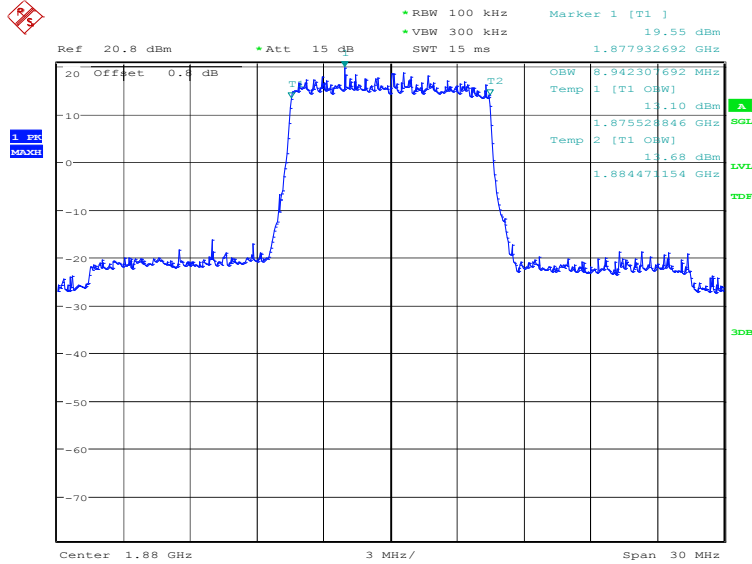

Date: 26.FEB.2019 20:04:22


**LTE band 2, 10MHz Bandwidth, 16QAM (99% BW)**

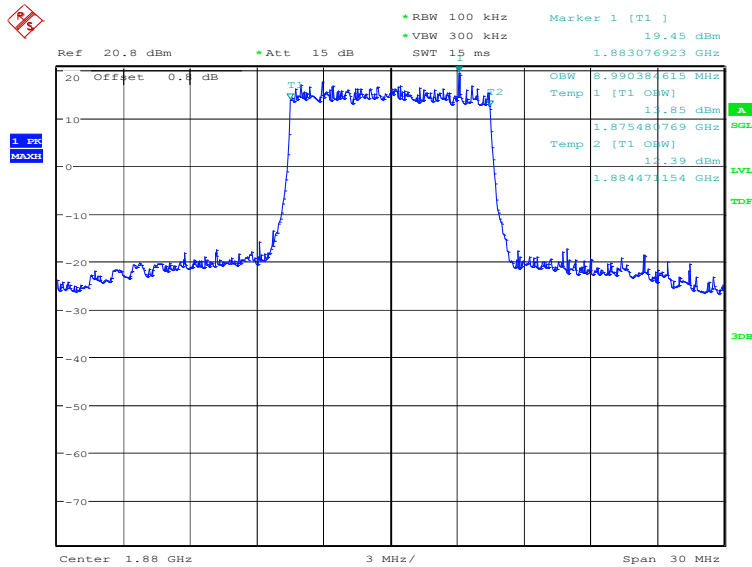

Date: 26.FEB.2019 20:05:46



### LTE band 2, 10MHz Bandwidth, 64QAM (99% BW)

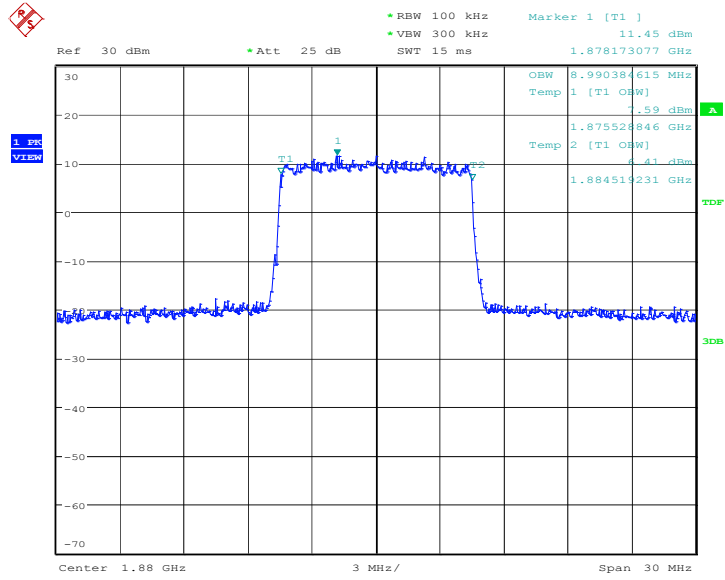


Date: 27.FEB.2019 14:17:03



**LTE band 2, 15MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1880.0	13485.58	13413.46	13485.58

**LTE band 2, 15MHz Bandwidth, QPSK (99% BW)**

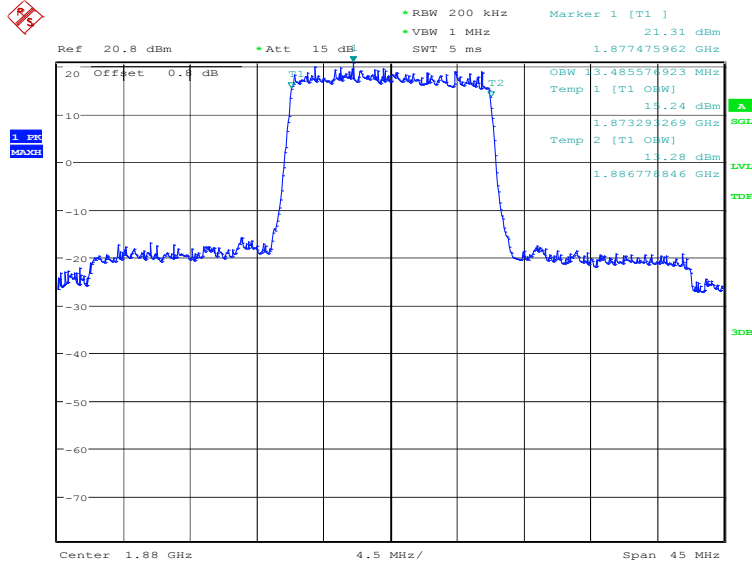

Date: 26.FEB.2019 20:07:12


**LTE band 2, 15MHz Bandwidth, 16QAM (99% BW)**

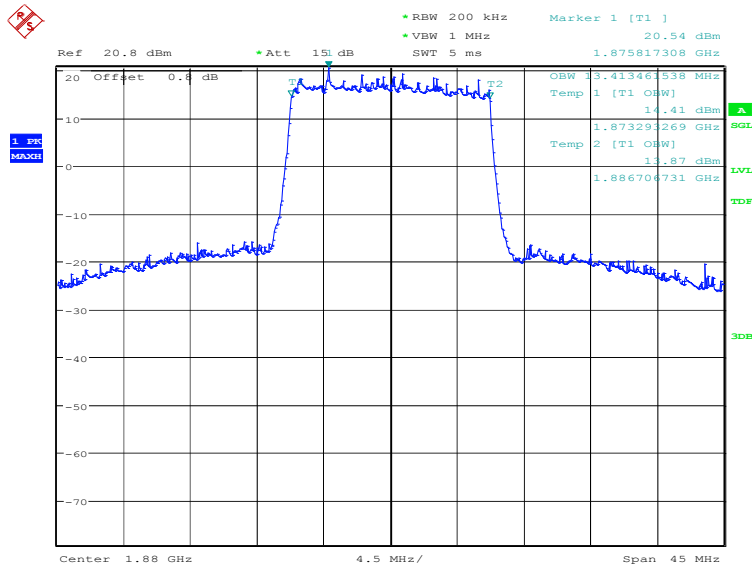

Date: 26.FEB.2019 20:08:35



LTE band 2, 15MHz Bandwidth, 64QAM (99% BW)

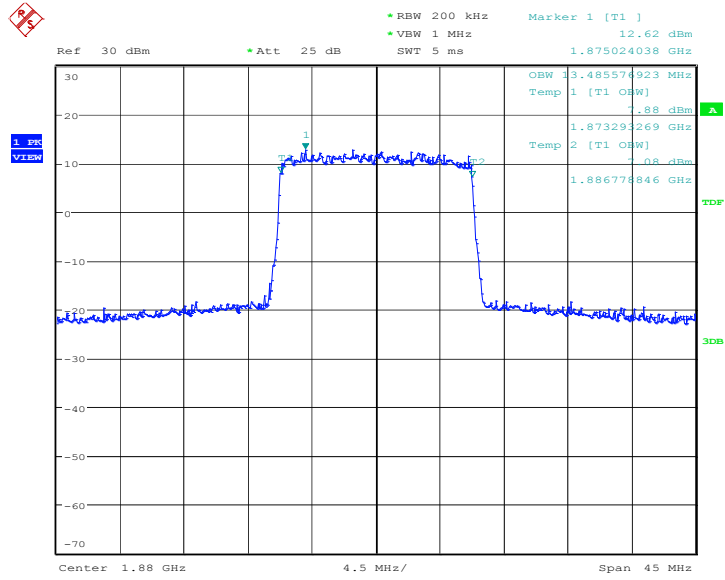


Date: 27.FEB.2019 14:21:32

**LTE band 2, 20MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1880.0	17980.77	17884.62	17884.62

**LTE band 2, 20MHz Bandwidth, QPSK (99% BW)**

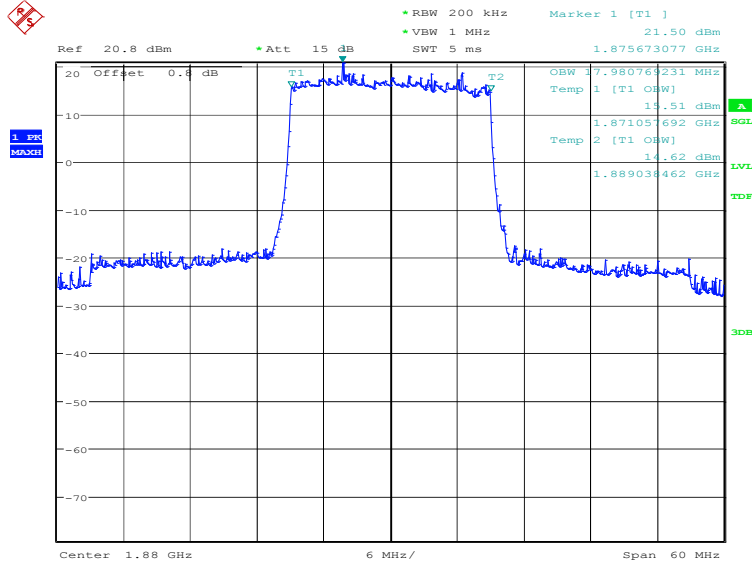

Date: 26.FEB.2019 20:10:01


**LTE band 2, 20MHz Bandwidth, 16QAM (99% BW)**

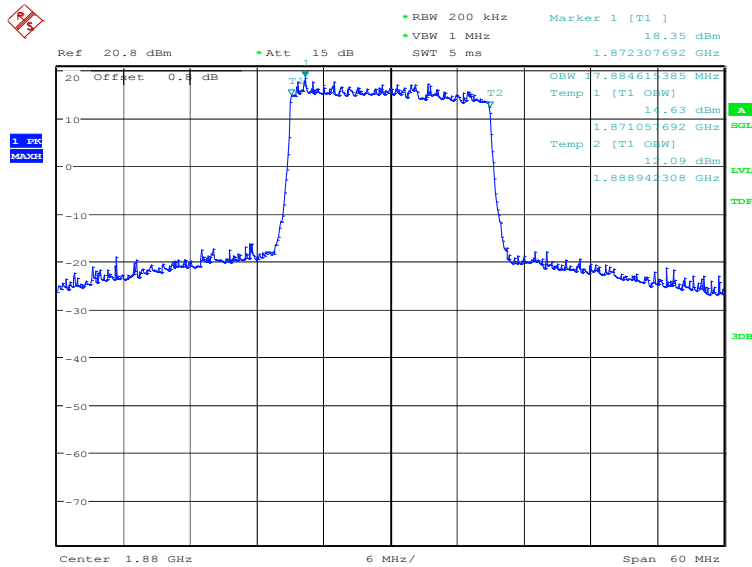

Date: 26.FEB.2019 20:11:25



### LTE band 2, 20MHz Bandwidth, 64QAM (99% BW)

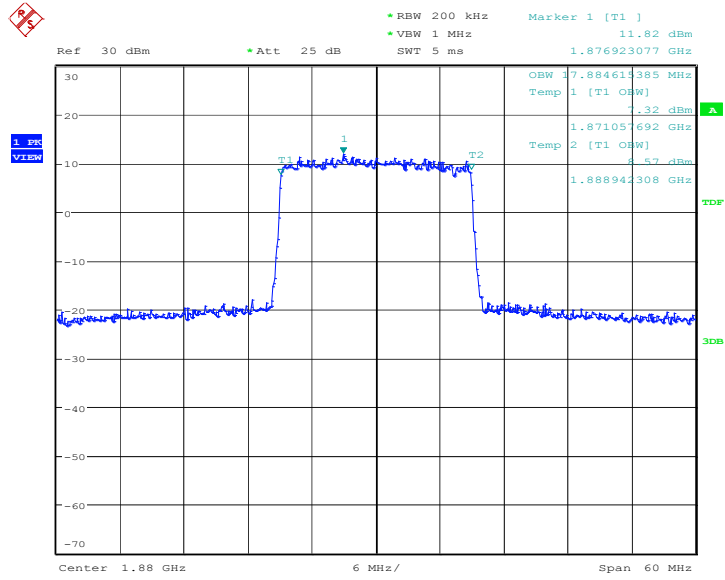


Date: 27.FEB.2019 14:23:29

**LTE band 5, 1.4MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
836.5	1097.76	1097.76	1089.74

**LTE band 5, 1.4MHz Bandwidth, QPSK (99% BW)**

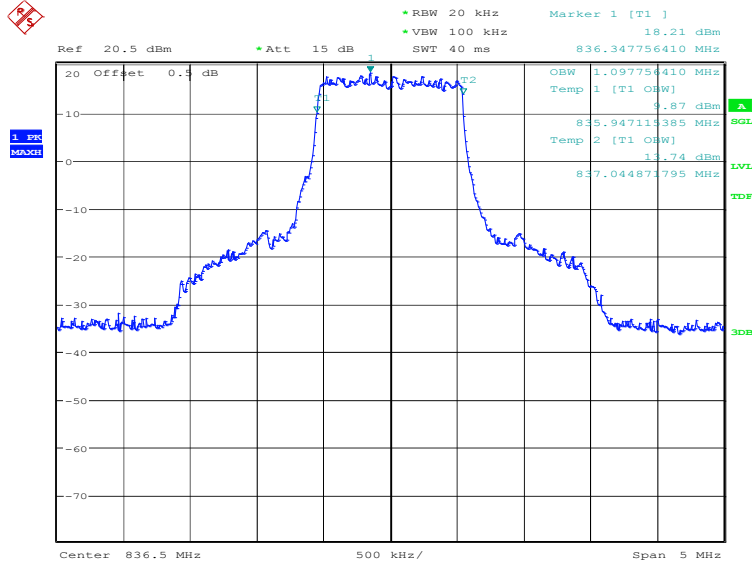


Date: 26.FEB.2019 20:13:38

**LTE band 5, 1.4MHz Bandwidth, 16QAM (99% BW)**

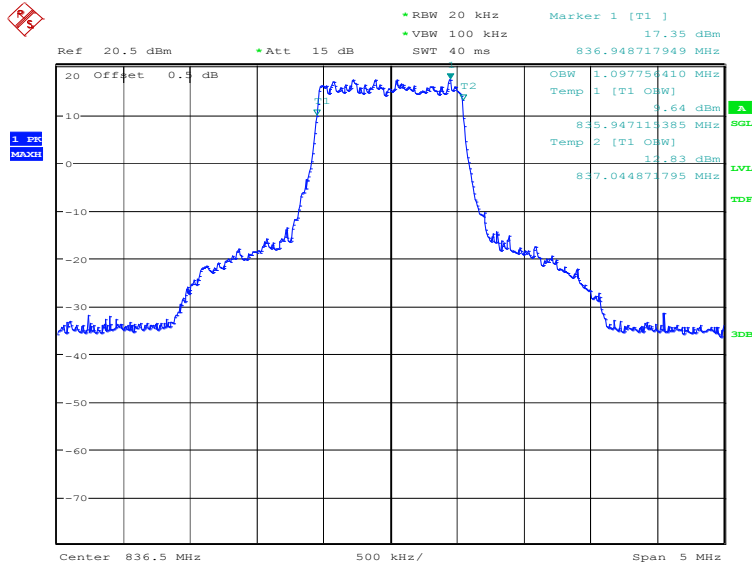

Date: 26.FEB.2019 20:15:02

LTE band 5, 1.4MHz Bandwidth, 64QAM (99% BW)

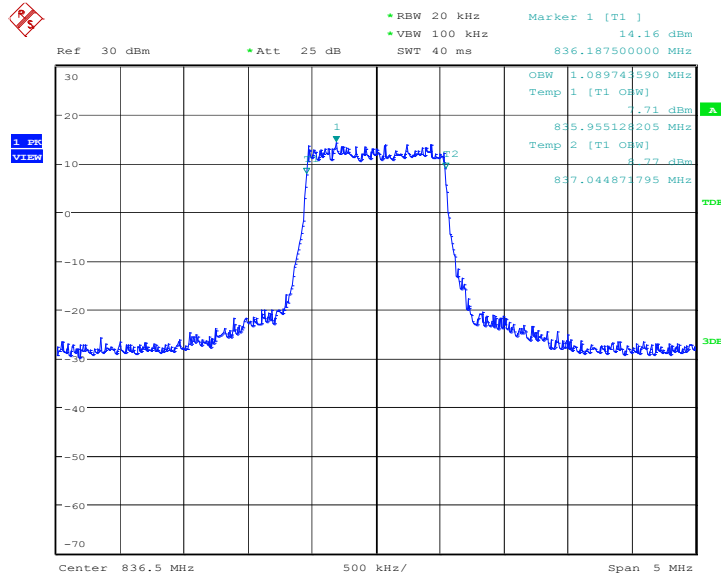


Date: 27.FEB.2019 14:43:16

**LTE band 5, 3MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
836.5	2692.31	2708.33	2692.31

**LTE band 5, 3MHz Bandwidth, QPSK (99% BW)**

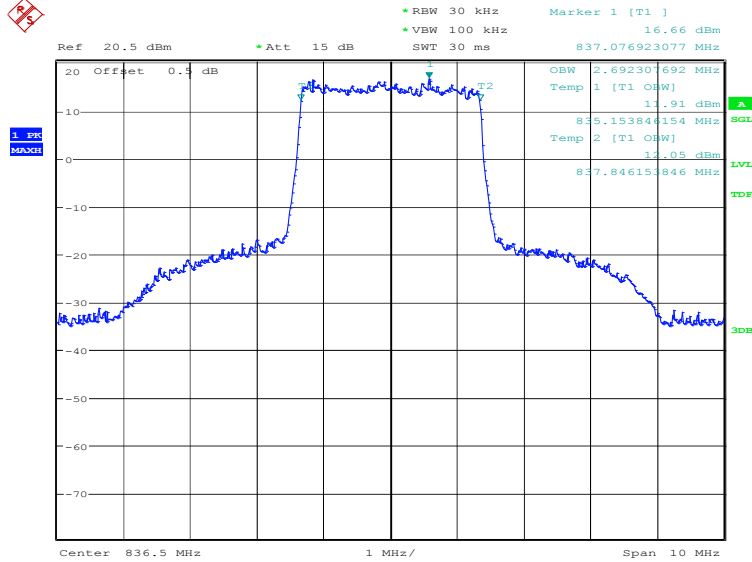

Date: 26.FEB.2019 20:16:27


**LTE band 5, 3MHz Bandwidth, 16QAM (99% BW)**

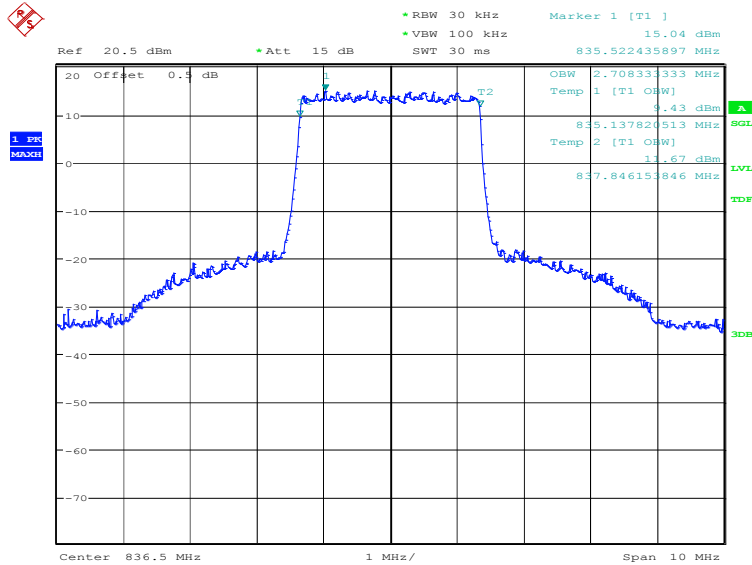

Date: 26.FEB.2019 20:17:51



### LTE band 5, 3MHz Bandwidth, 64QAM (99% BW)

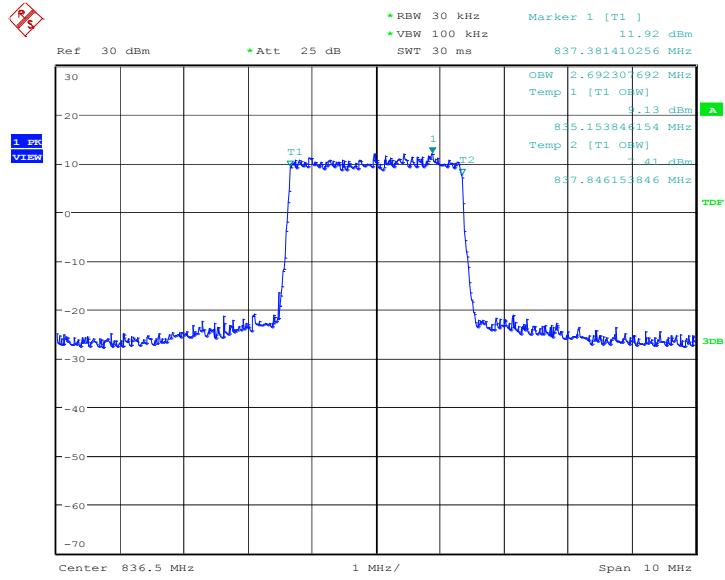


Date: 27.FEB.2019 14:44:54



**LTE band 5, 5MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
836.5	4495.19	4519.23	4495.19

**LTE band 5, 5MHz Bandwidth, QPSK (99% BW)**

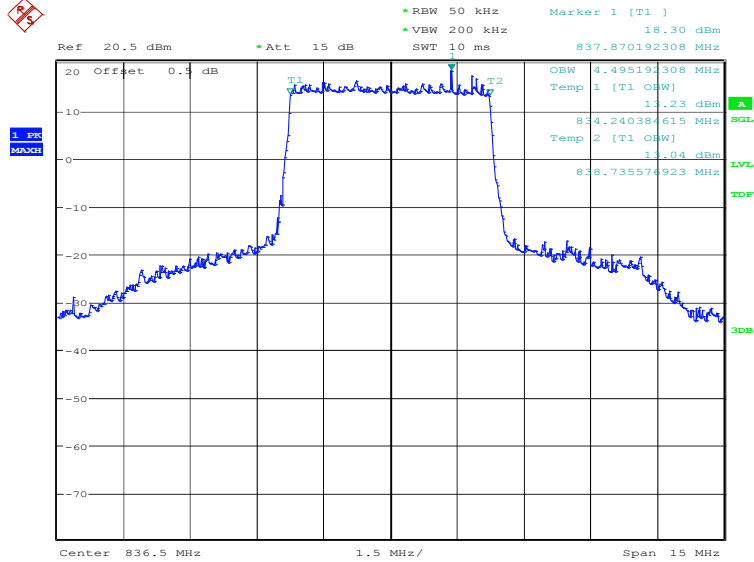

Date: 26.FEB.2019 20:19:17


**LTE band 5, 5MHz Bandwidth, 16QAM (99% BW)**

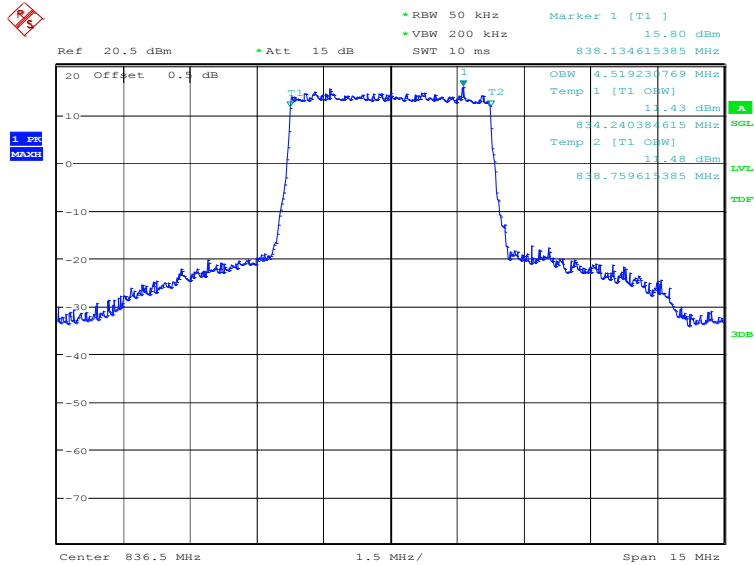

Date: 26.FEB.2019 20:20:41



LTE band 5, 5MHz Bandwidth, 64QAM (99% BW)

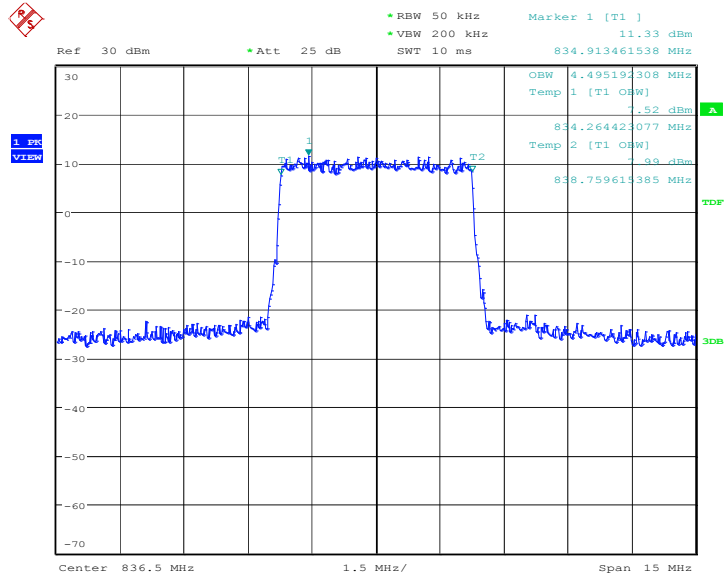


Date: 27.FEB.2019 14:46:12

**LTE band 5, 10MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
836.5	8942.31	8942.31	8942.31

**LTE band 5, 10MHz Bandwidth, QPSK (99% BW)**

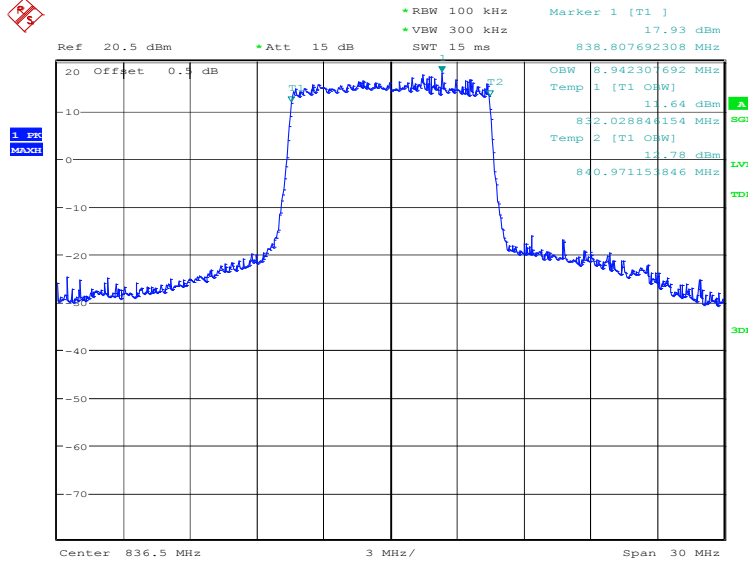

Date: 26.FEB.2019 20:22:06


**LTE band 5, 10MHz Bandwidth, 16QAM (99% BW)**

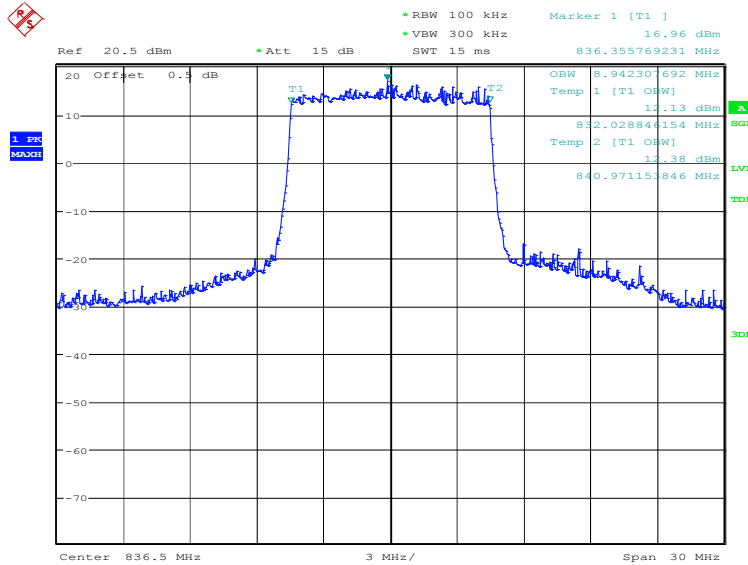

Date: 26.FEB.2019 20:23:30



LTE band 5, 10MHz Bandwidth, 64QAM (99% BW)

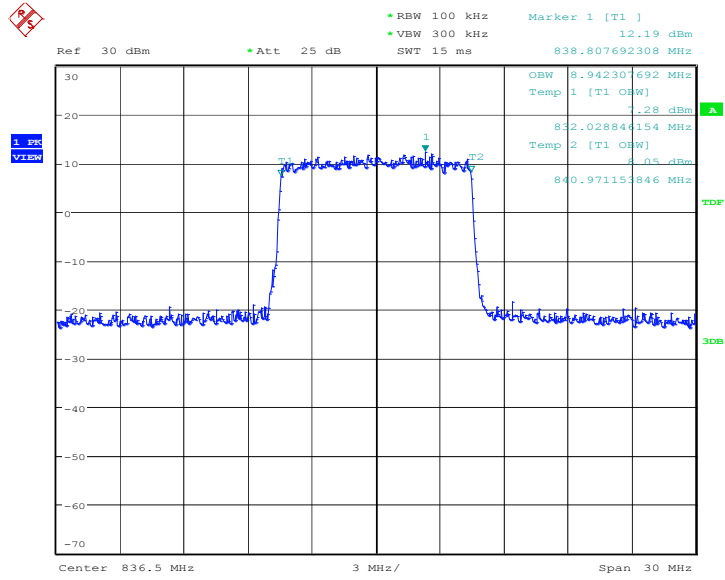


Date: 27.FEB.2019 14:47:42

**LTE band 13, 5MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
782.0	4519.23	4495.19	4495.19

**LTE band 13, 5MHz Bandwidth, QPSK (99% BW)**

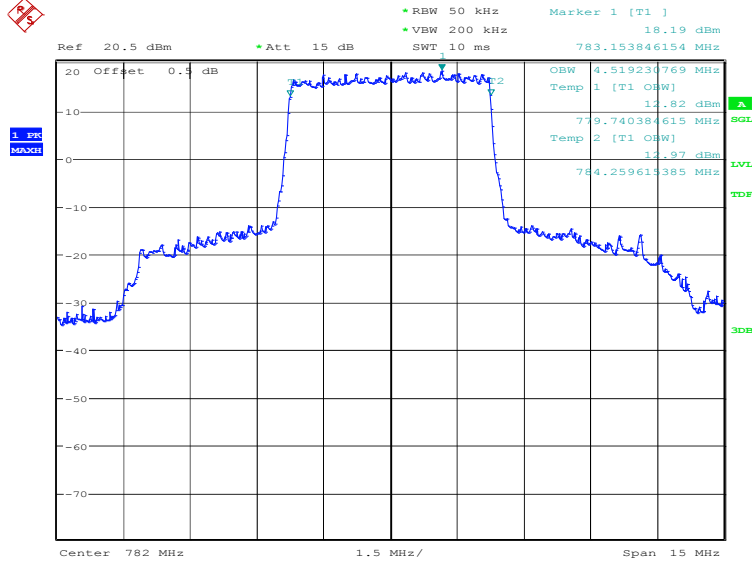

Date: 26.FEB.2019 20:24:57


**LTE band 13, 5MHz Bandwidth, 16QAM (99% BW)**

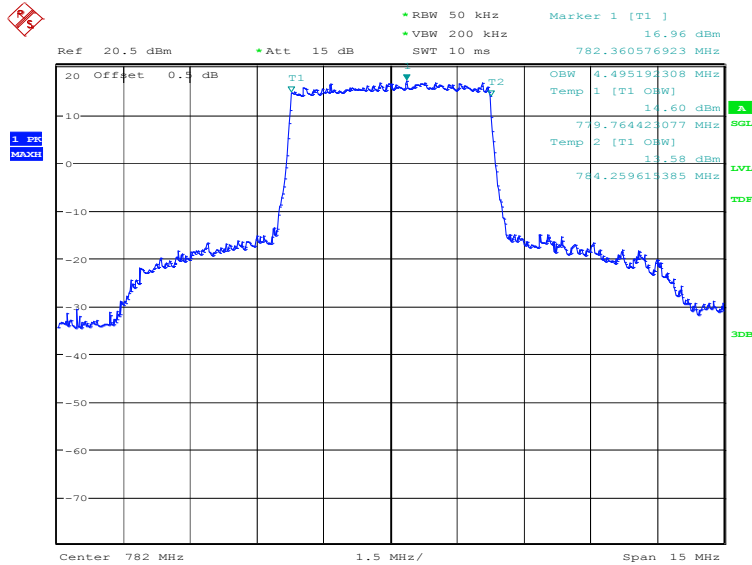

Date: 26.FEB.2019 20:26:21



LTE band 13, 5MHz Bandwidth, 64QAM (99% BW)

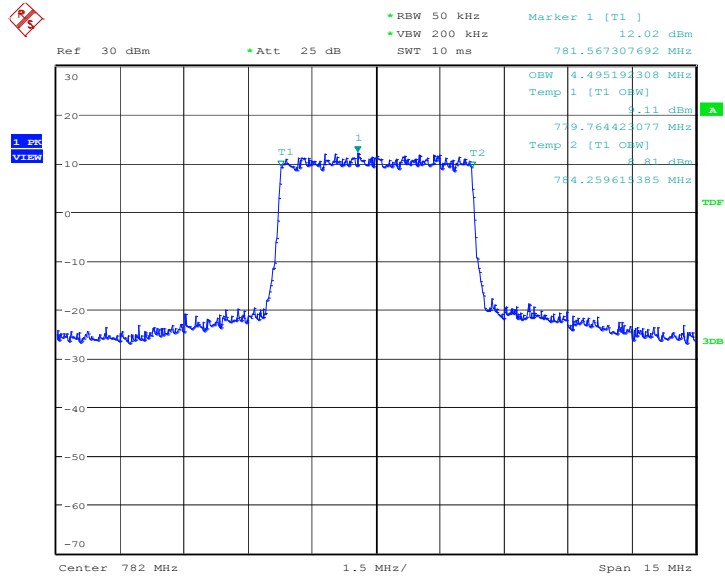


Date: 27.FEB.2019 14:56:35

**LTE band 13, 10MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
782.0	8990.38	8990.38	8990.38

**LTE band 13, 10MHz Bandwidth, QPSK (99% BW)**

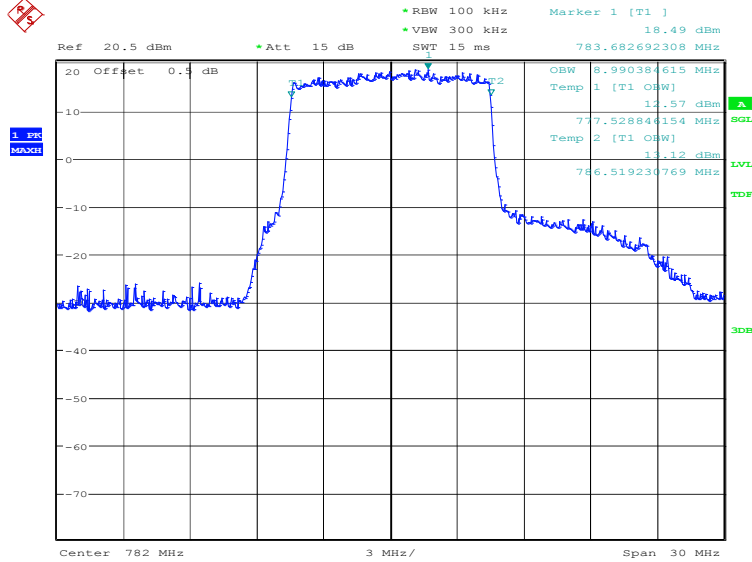

Date: 26.FEB.2019 20:27:46


**LTE band 13, 10MHz Bandwidth,16QAM (99% BW)**

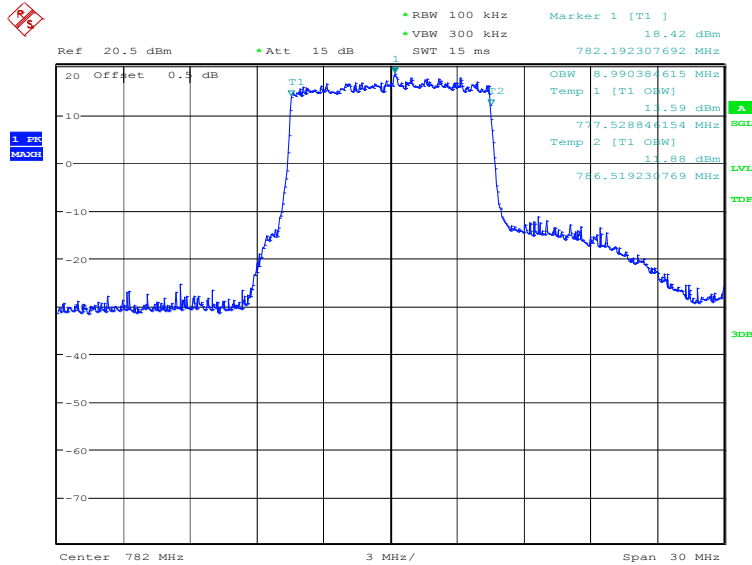

Date: 26.FEB.2019 20:29:10



LTE band 13, 10MHz Bandwidth, 64QAM (99% BW)

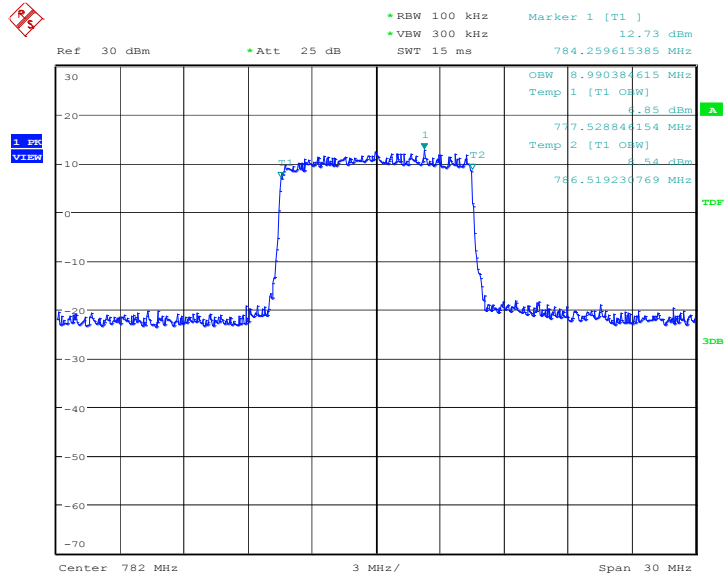


Date: 27.FEB.2019 14:57:38



**LTE band 66, 1.4MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1745.0	1097.76	1105.77	1089.74

**LTE band 66, 1.4MHz Bandwidth, QPSK (99% BW)**

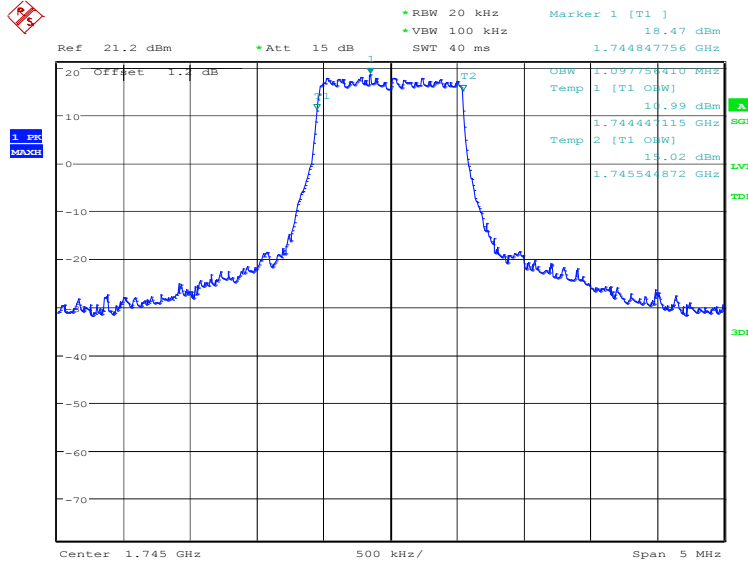


Date: 26.FEB.2019 20:30:38

**LTE band 66, 1.4MHz Bandwidth, 16QAM (99% BW)**

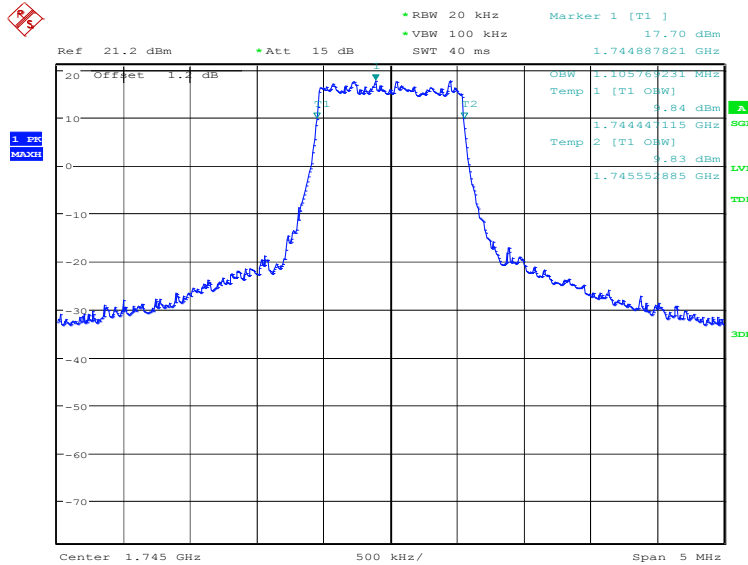

Date: 26.FEB.2019 20:32:02

LTE band 66, 1.4MHz Bandwidth, 64QAM (99% BW)

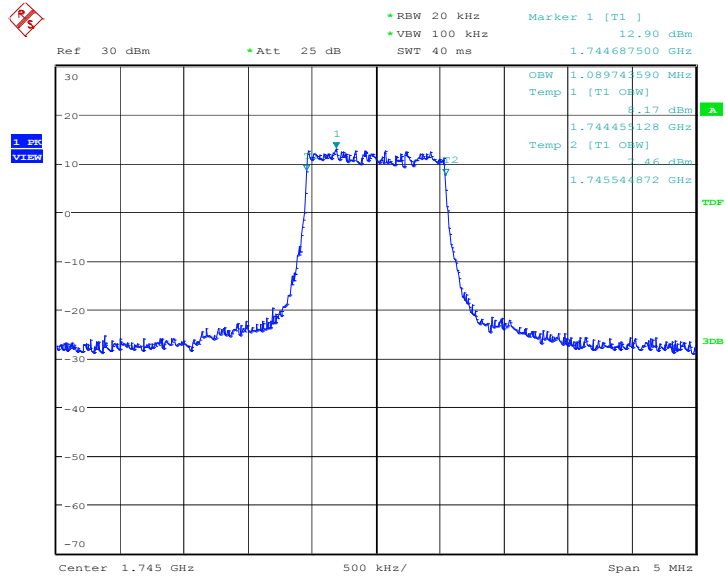


Date: 27.FEB.2019 15:03:28

**LTE band 66, 3MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1745.0	2692.31	2708.33	2692.31

**LTE band 66, 3MHz Bandwidth, QPSK (99% BW)**

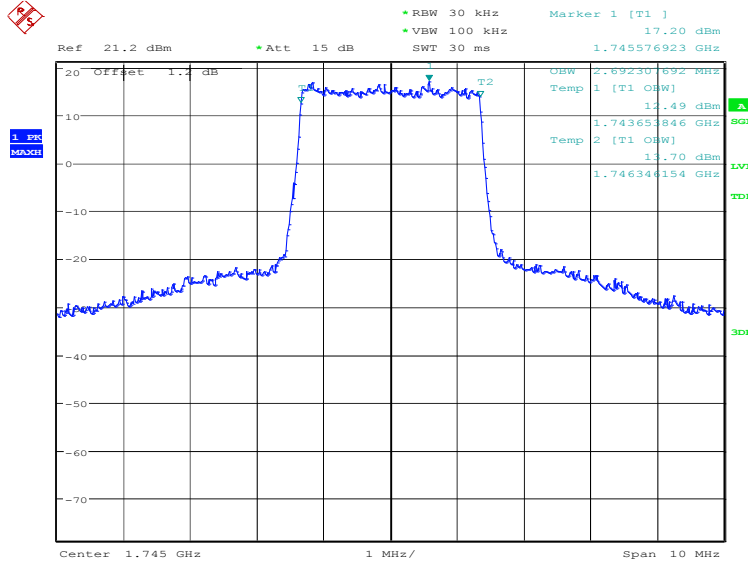

Date: 26.FEB.2019 20:33:27


**LTE band 66, 3MHz Bandwidth, 16QAM (99% BW)**

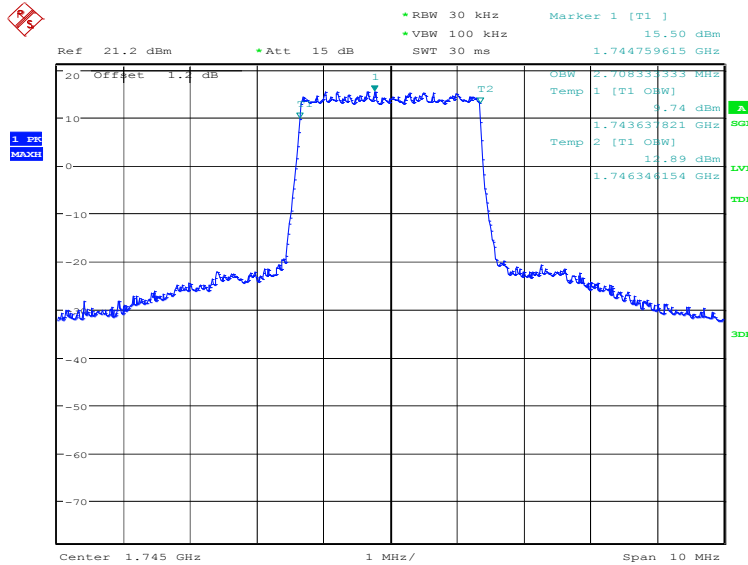

Date: 26.FEB.2019 20:34:51



### LTE band 66, 3MHz Bandwidth, 64QAM (99% BW)

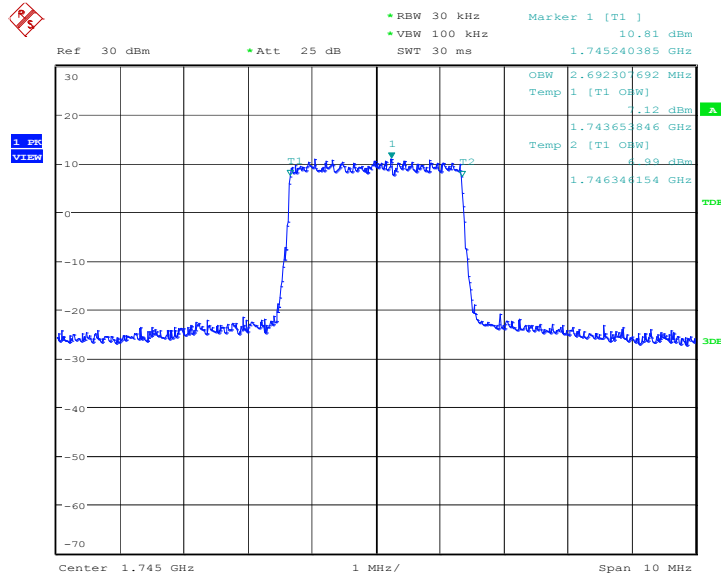


Date: 27.FEB.2019 15:04:48

**LTE band 66, 5MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1745.0	4495.19	4495.19	4495.19

**LTE band 66, 5MHz Bandwidth, QPSK (99% BW)**

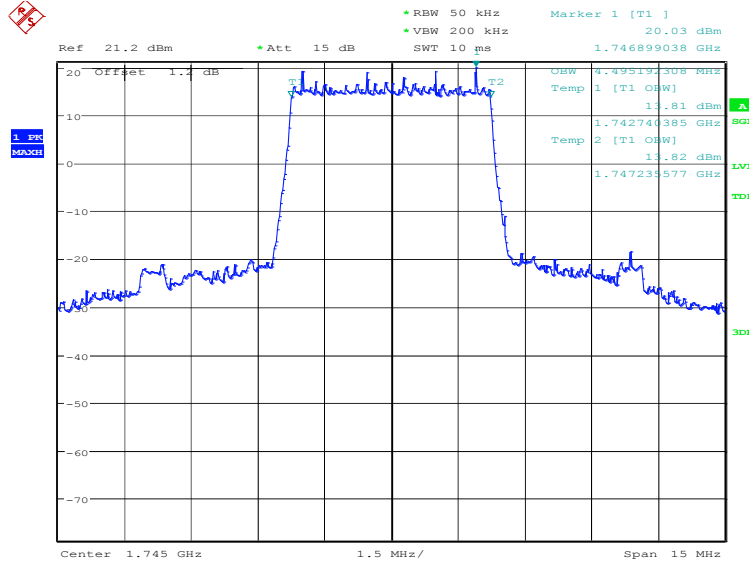

Date: 26.FEB.2019 20:36:17


**LTE band 66, 5MHz Bandwidth, 16QAM (99% BW)**

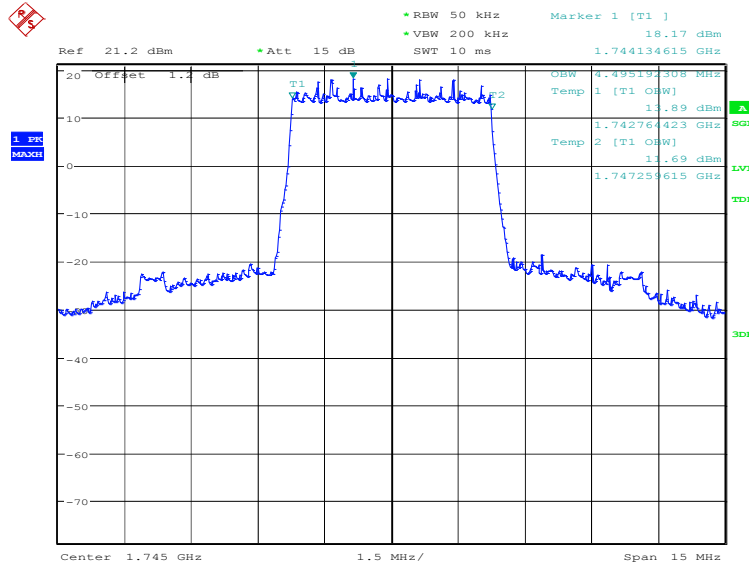

Date: 26.FEB.2019 20:37:41



### LTE band 66, 5MHz Bandwidth, 64QAM (99% BW)

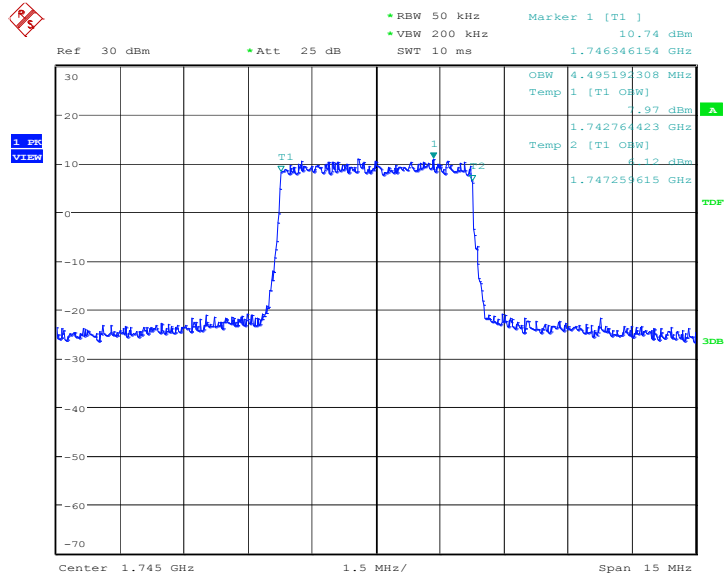


Date: 27.FEB.2019 15:05:48

**LTE band 66, 10MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1745.0	8942.31	8990.38	8990.38

**LTE band 66, 10MHz Bandwidth, QPSK (99% BW)**

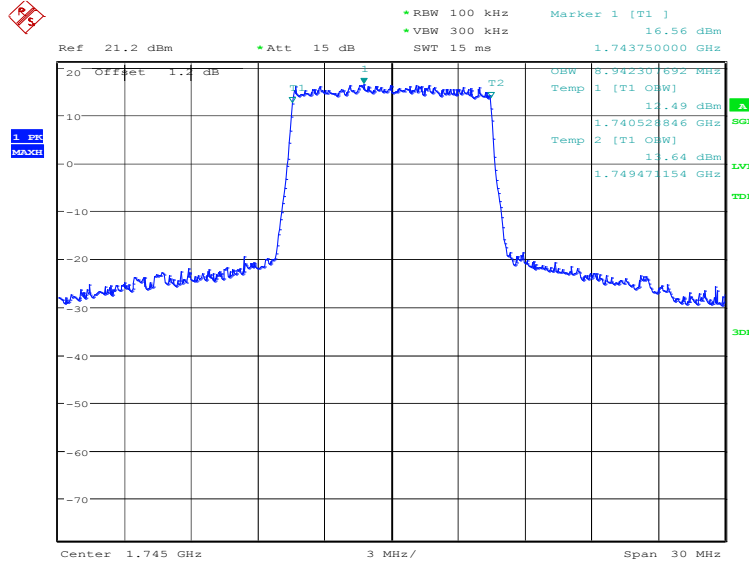

Date: 26.FEB.2019 20:39:07


**LTE band 66, 10MHz Bandwidth, 16QAM (99% BW)**

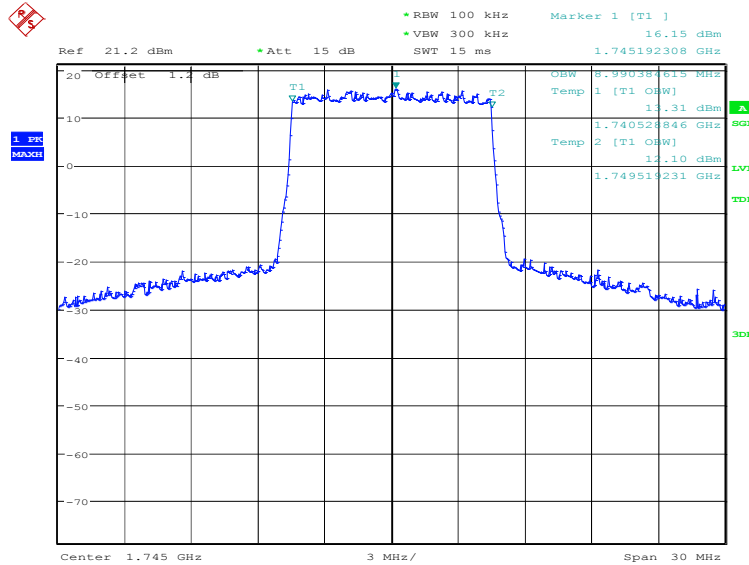

Date: 26.FEB.2019 20:40:31



LTE band 66, 10MHz Bandwidth, 64QAM (99% BW)

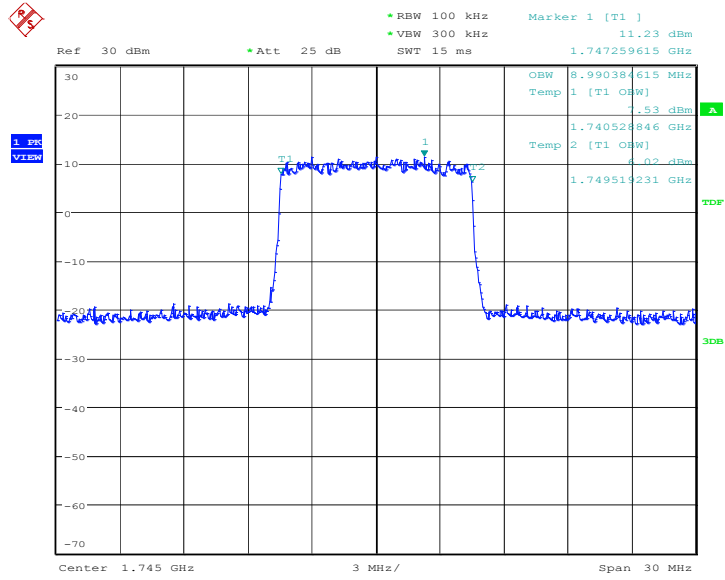


Date: 27.FEB.2019 15:06:47



**LTE band 66, 15MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1745.0	13413.46	13413.46	13485.58

**LTE band 66, 15MHz Bandwidth, QPSK (99% BW)**

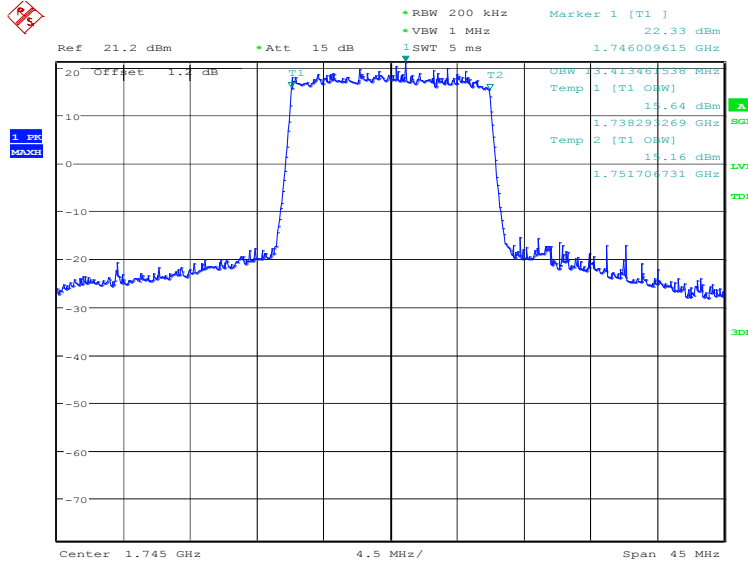

Date: 26.FEB.2019 20:41:56


**LTE band 66, 15MHz Bandwidth, 16QAM (99% BW)**

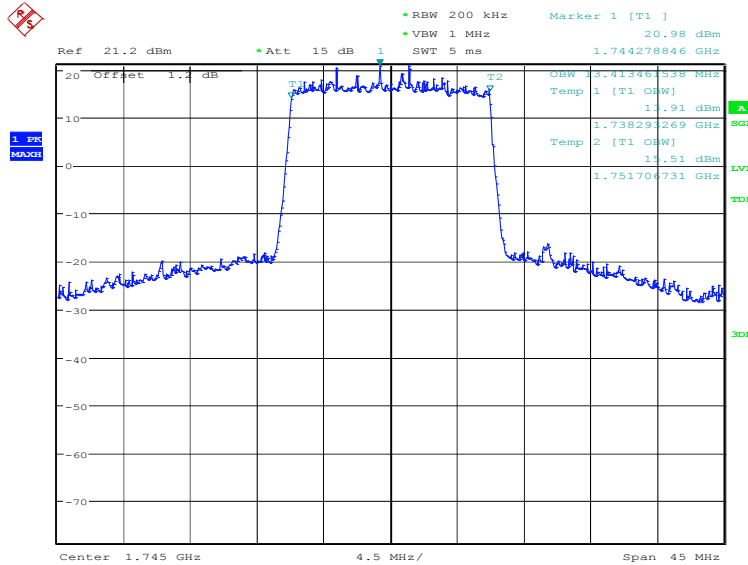

Date: 26.FEB.2019 20:43:20



### LTE band 66, 15MHz Bandwidth, 64QAM (99% BW)

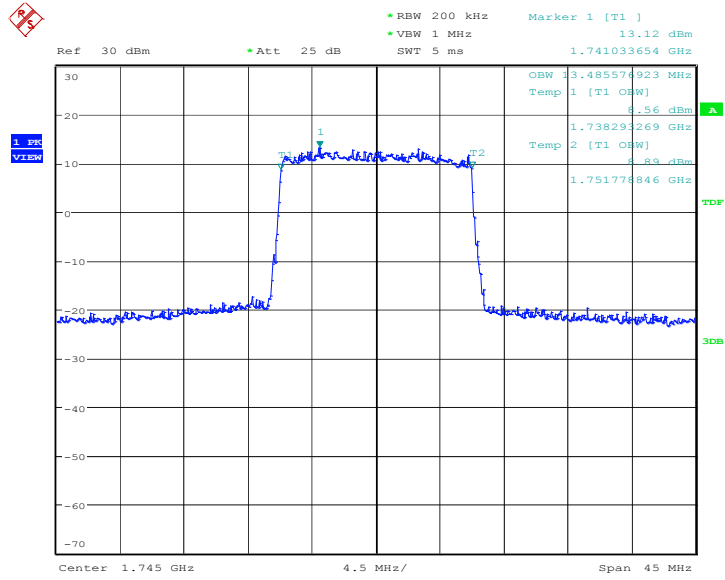


Date: 27.FEB.2019 15:07:54

**LTE band 66, 20MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)( kHz)		
	QPSK	16QAM	64QAM
1745.0	17884.62	17884.62	17884.62

**LTE band 66, 20MHz Bandwidth, QPSK (99% BW)**

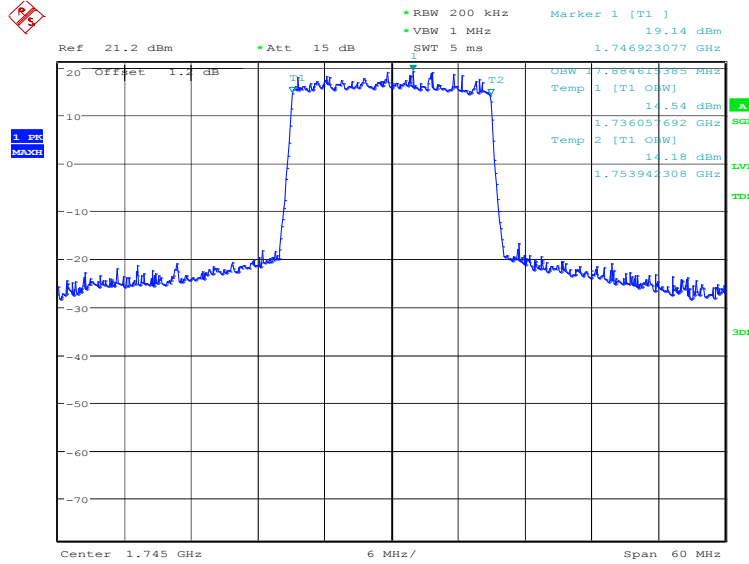

Date: 26.FEB.2019 20:44:46


**LTE band 66, 20MHz Bandwidth, 16QAM (99% BW)**

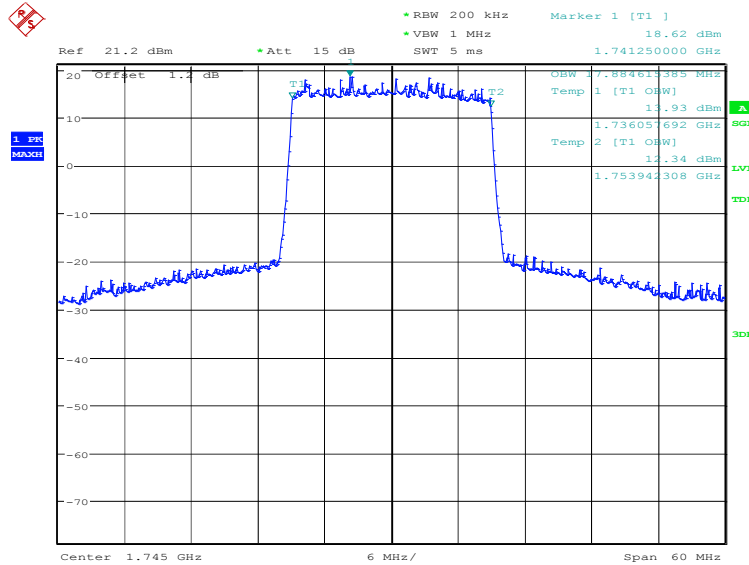

Date: 26.FEB.2019 20:46:10



### LTE band 66, 20MHz Bandwidth, 64QAM (99% BW)

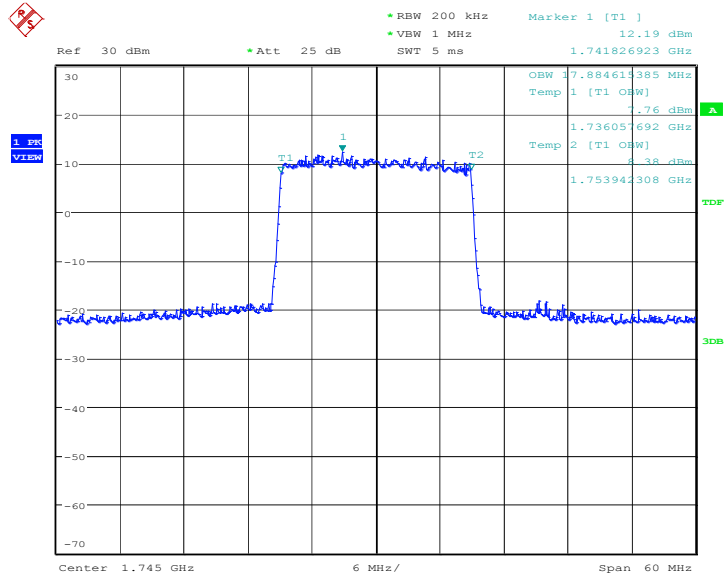

Date: 27.FEB.2019 15:08:54



## **A.5 EMISSION BANDWIDTH**


### **A.5.1 Emission Bandwidth Results**

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

**LTE band 2, 1.4MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1880.0	1354.17	1354.17	1298.08

**LTE band 2, 1.4MHz Bandwidth, QPSK (-26dBc BW)**

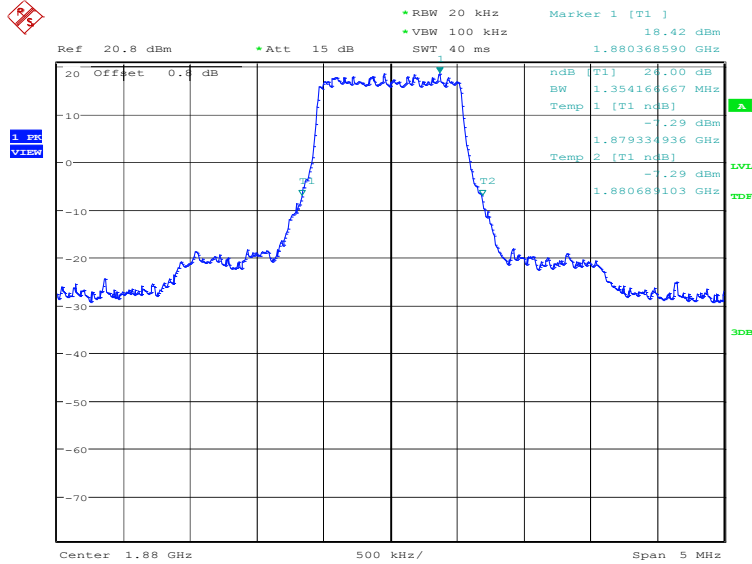

Date: 26.FEB.2019 20:48:09


**LTE band 2, 1.4MHz Bandwidth, 16QAM (-26dBc BW)**

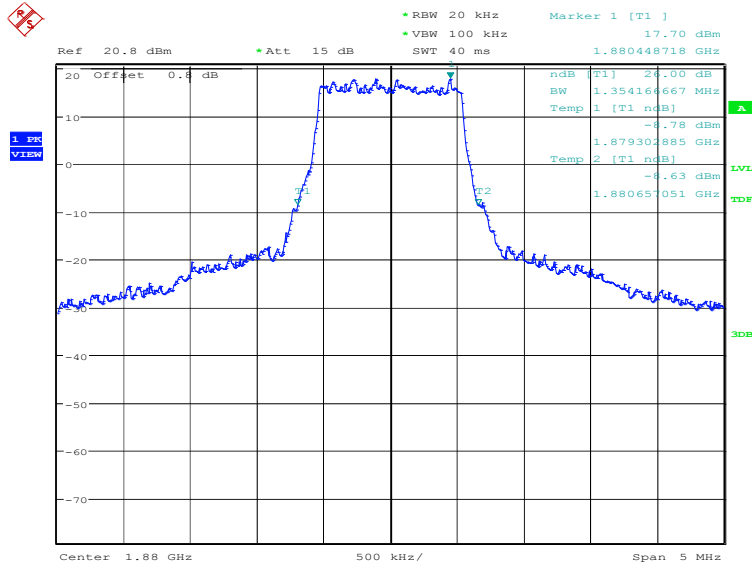

Date: 26.FEB.2019 20:49:34



### LTE band 2, 1.4MHz Bandwidth, 64QAM (-26dBc BW)

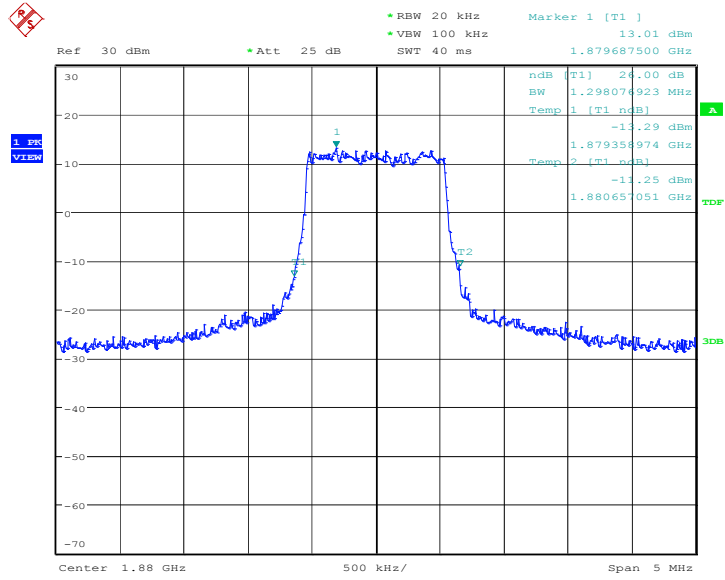


Date: 27.FEB.2019 14:10:26

**LTE band 2, 3MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1880.0	2980.77	3012.82	2964.74

**LTE band 2, 3MHz Bandwidth, QPSK (-26dBc BW)**

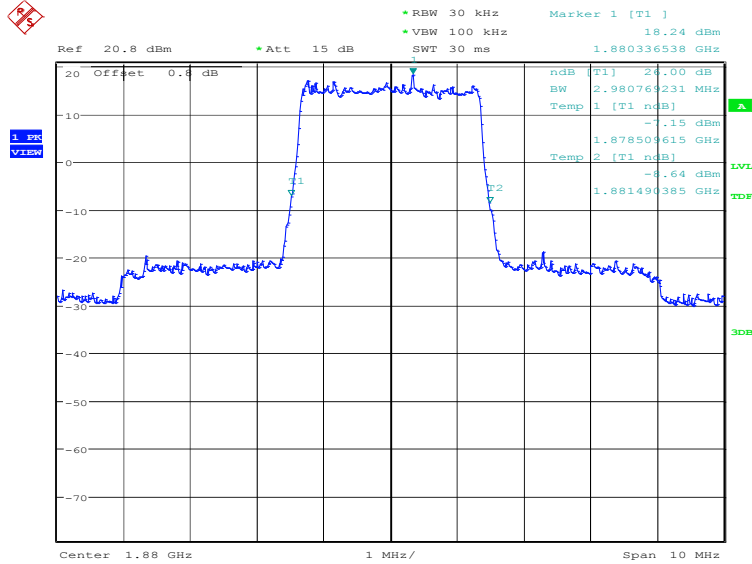

Date: 26.FEB.2019 20:51:00

**LTE band 2, 3MHz Bandwidth, 16QAM (-26dBc BW)**

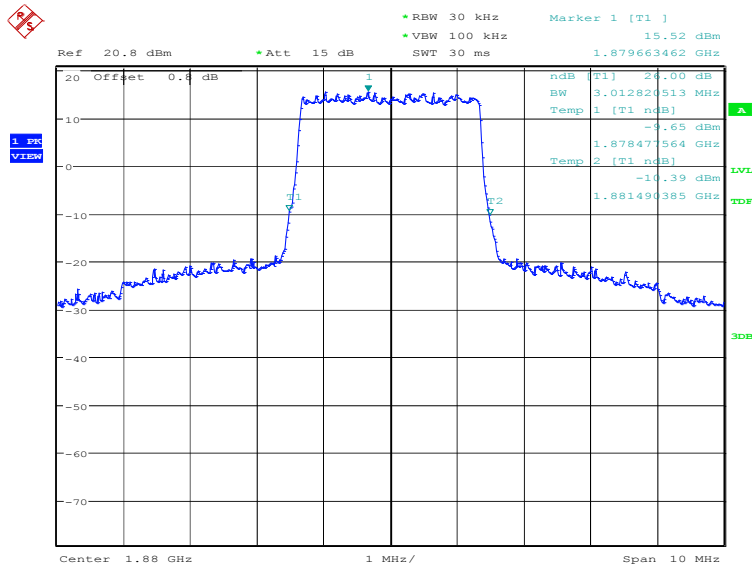


Date: 26.FEB.2019 20:52:24





### LTE band 2, 3MHz Bandwidth, 64QAM (-26dBc BW)

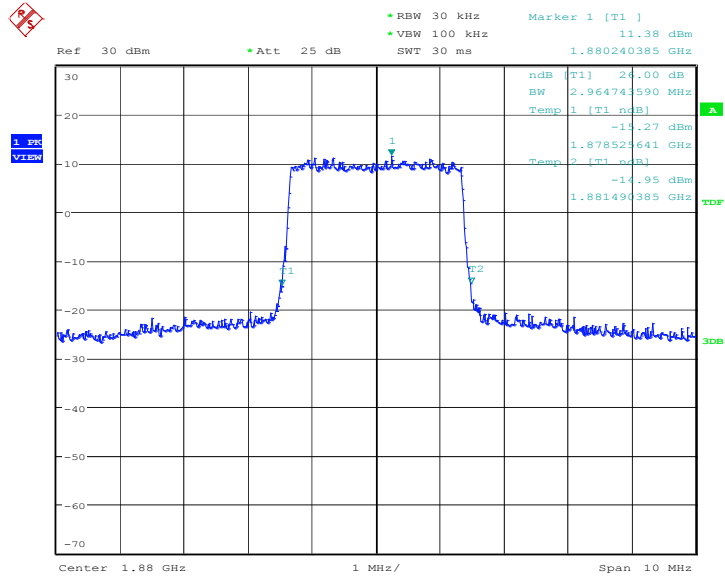


Date: 27.FEB.2019 14:12:22

**LTE band 2, 5MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1880.0	5024.04	5024.04	4951.92

**LTE band 2, 5MHz Bandwidth, QPSK (-26dBc BW)**

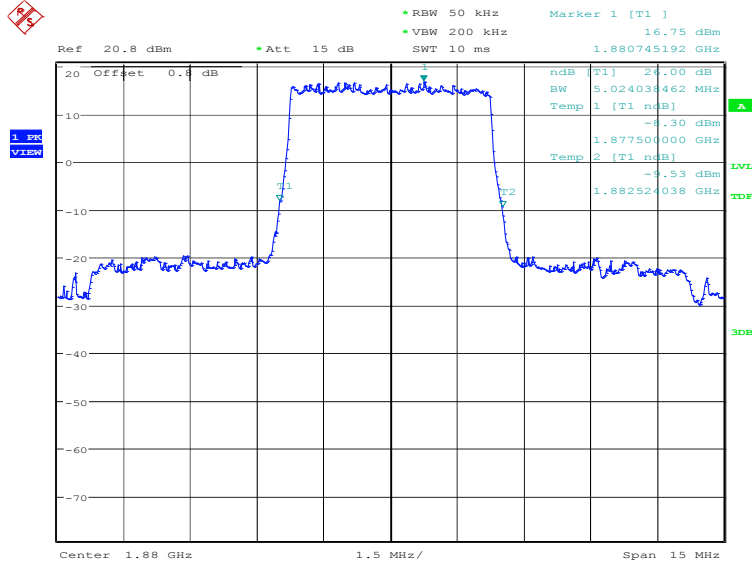

Date: 26.FEB.2019 20:53:50


**LTE band 2, 5MHz Bandwidth, 16QAM (-26dBc BW)**

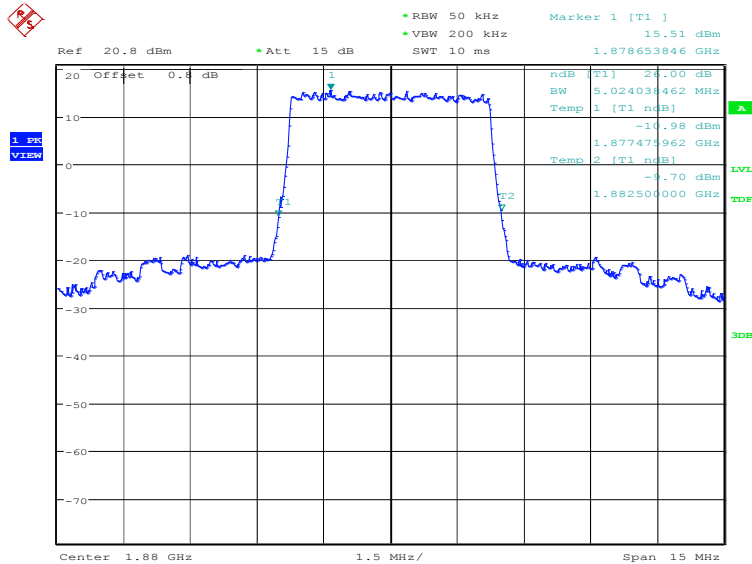

Date: 26.FEB.2019 20:55:15



### LTE band 2, 5MHz Bandwidth,64QAM (-26dBc BW)

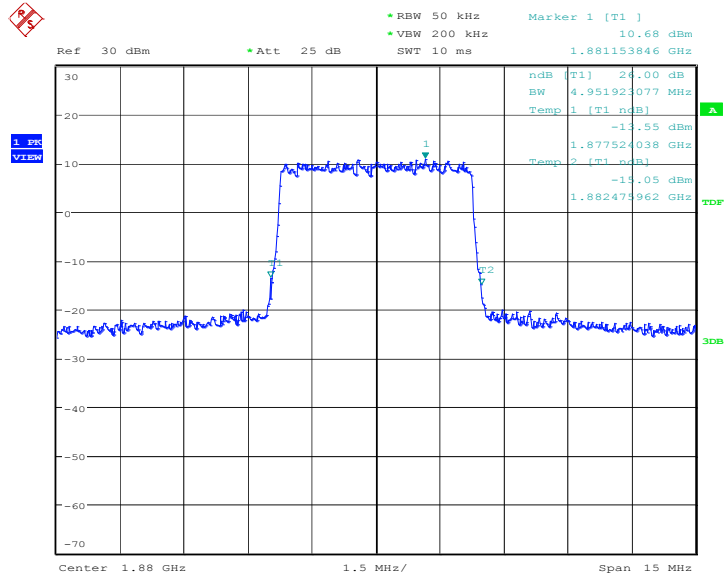


Date: 27.FEB.2019 14:15:19

**LTE band 2, 10MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1880.0	9903.85	9807.69	9759.62

**LTE band 2, 10MHz Bandwidth, QPSK (-26dBc BW)**

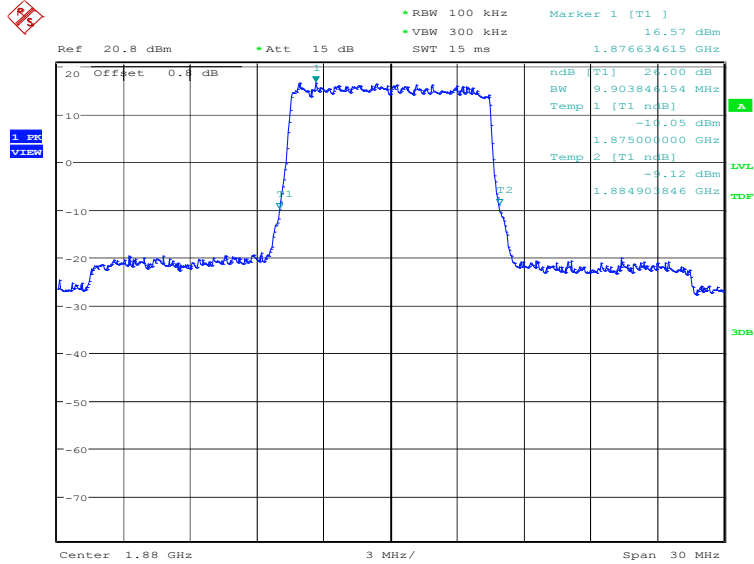

Date: 26.FEB.2019 20:56:41


**LTE band 2, 10MHz Bandwidth, 16QAM (-26dBc BW)**

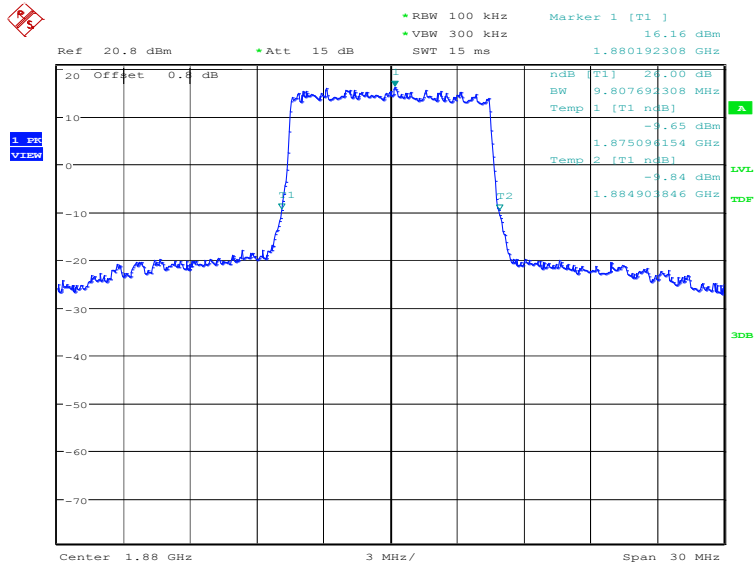

Date: 26.FEB.2019 20:58:06



### LTE band 2, 10MHz Bandwidth, 64QAM (-26dBc BW)

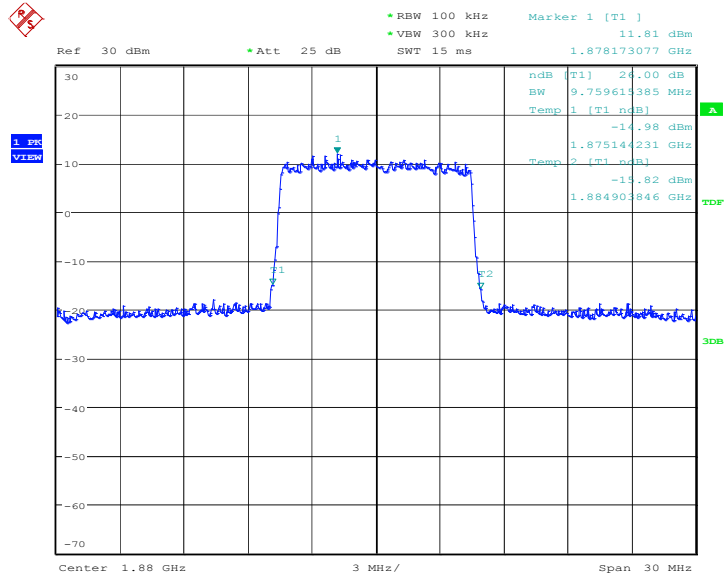


Date: 27.FEB.2019 14:20:27

**LTE band 2, 15MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1880.0	14783.65	14855.77	14639.42

**LTE band 2, 15MHz Bandwidth, QPSK (-26dBc BW)**

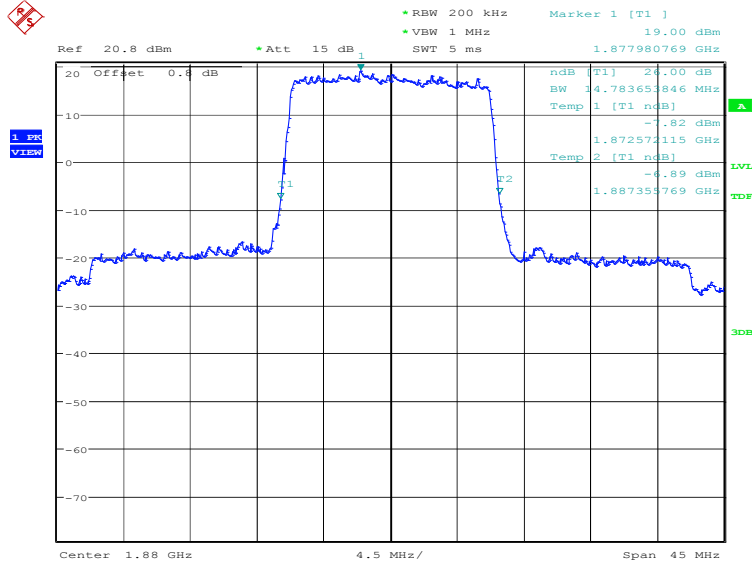

Date: 26.FEB.2019 20:59:32


**LTE band 2, 15MHz Bandwidth, 16QAM (-26dBc BW)**

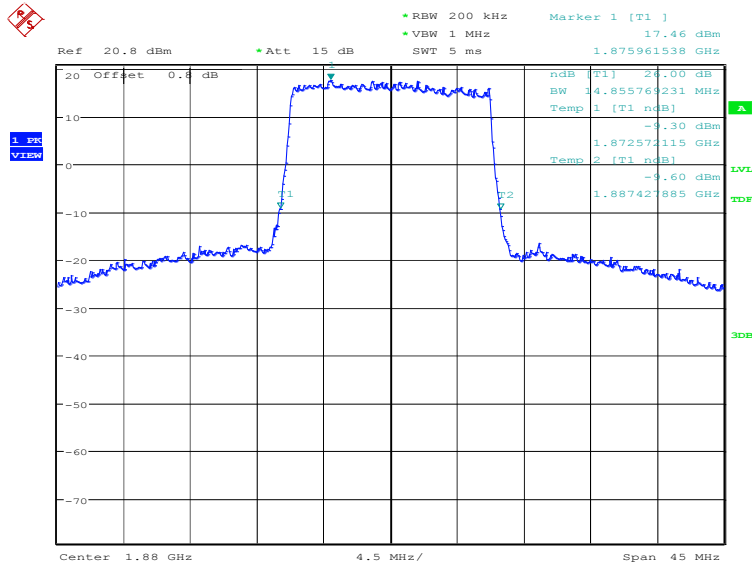

Date: 26.FEB.2019 21:00:56



### LTE band 2, 15MHz Bandwidth, 64QAM (-26dBc BW)

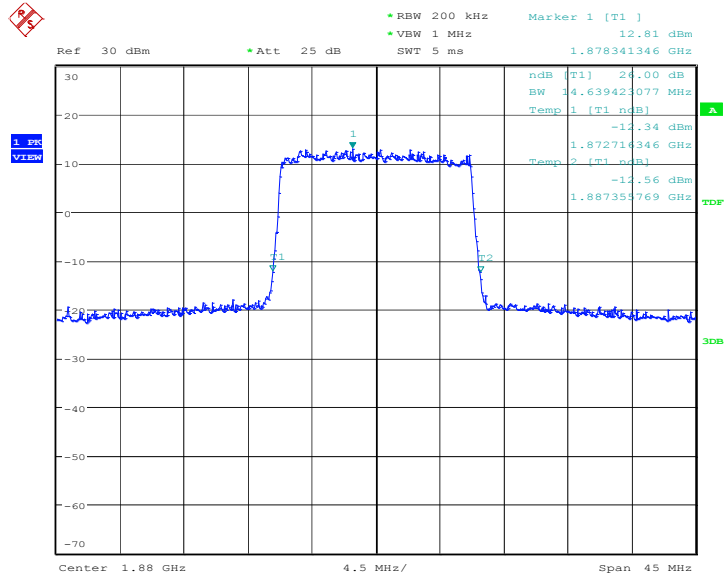


Date: 27.FEB.2019 14:22:18

**LTE band 2, 20MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1880.0	19326.92	19326.92	19134.62

**LTE band 2, 20MHz Bandwidth, QPSK (-26dBc BW)**

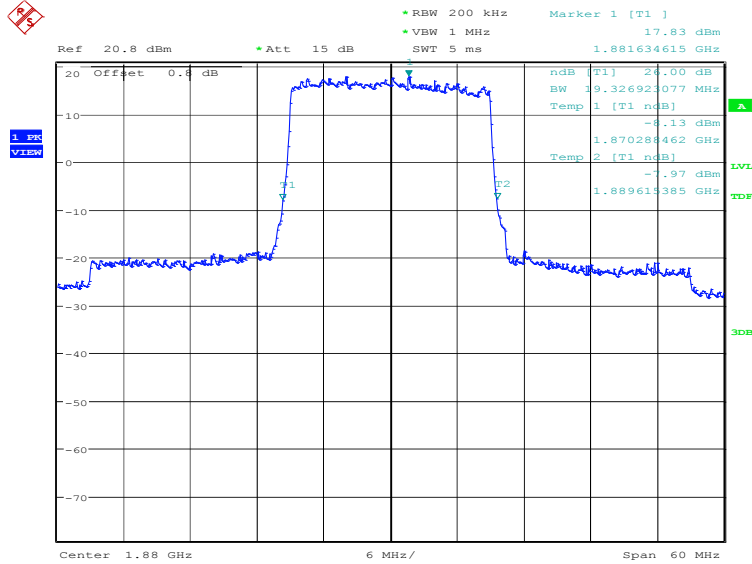

Date: 26.FEB.2019 21:02:22

**LTE band 2, 20MHz Bandwidth, 16QAM (-26dBc BW)**

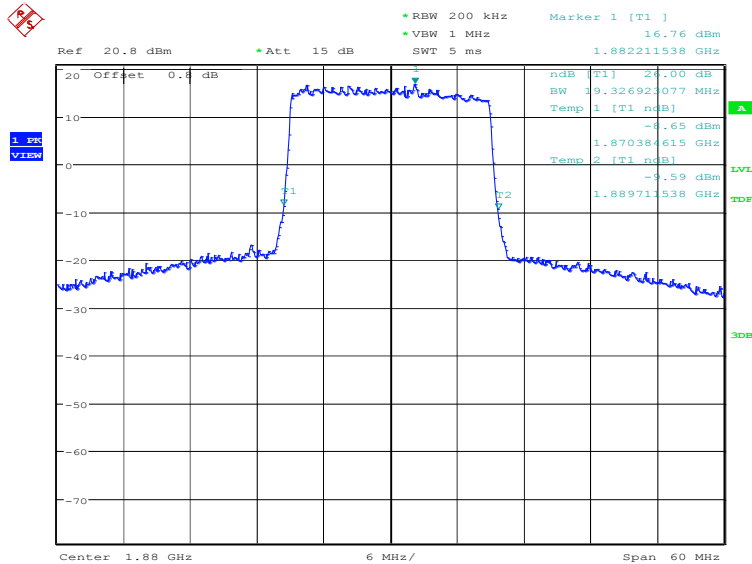


Date: 26.FEB.2019 21:03:47





### LTE band 2, 20MHz Bandwidth, 64QAM (-26dBc BW)

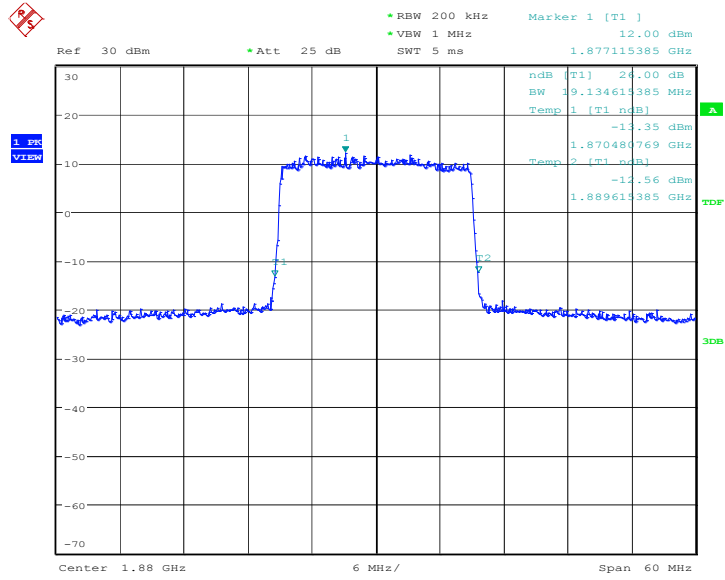


Date: 27.FEB.2019 14:23:54

**LTE band 5, 1.4MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
836.5	1322.12	1330.13	1290.06

**LTE band 5, 1.4MHz Bandwidth, QPSK (-26dBc BW)**

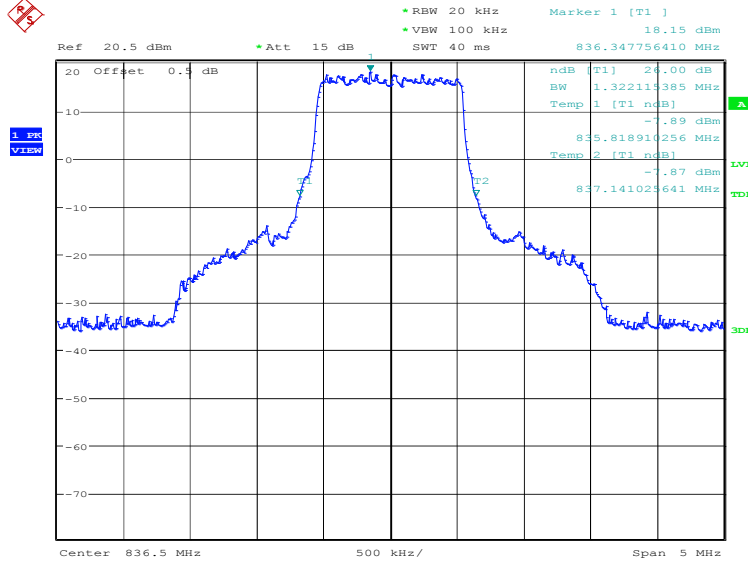

Date: 26.FEB.2019 21:06:01


**LTE band 5, 1.4MHz Bandwidth, 16QAM (-26dBc BW)**

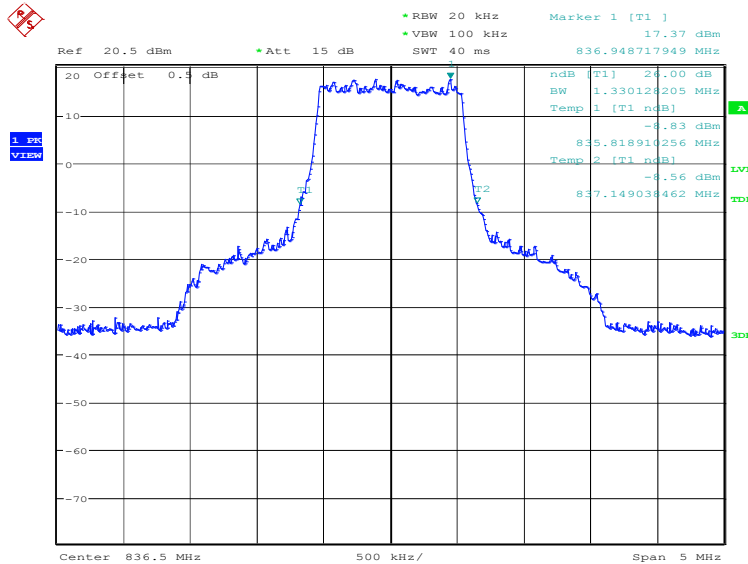

Date: 26.FEB.2019 21:07:25



### LTE band 5, 1.4MHz Bandwidth, 64QAM (-26dBc BW)

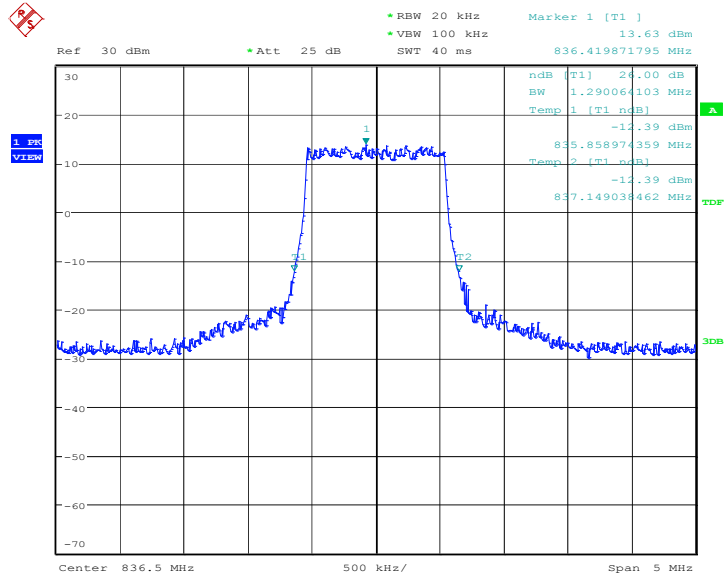


Date: 27.FEB.2019 14:44:05

**LTE band 5, 3MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
836.5	2996.79	2964.74	2932.69

**LTE band 5, 3MHz Bandwidth, QPSK (-26dBc BW)**

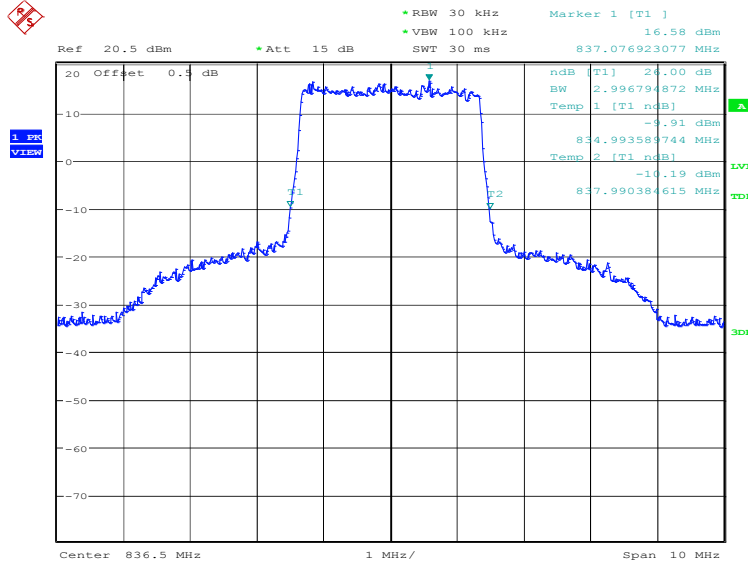

Date: 26.FEB.2019 21:08:51


**LTE band 5, 3MHz Bandwidth, 16QAM (-26dBc BW)**

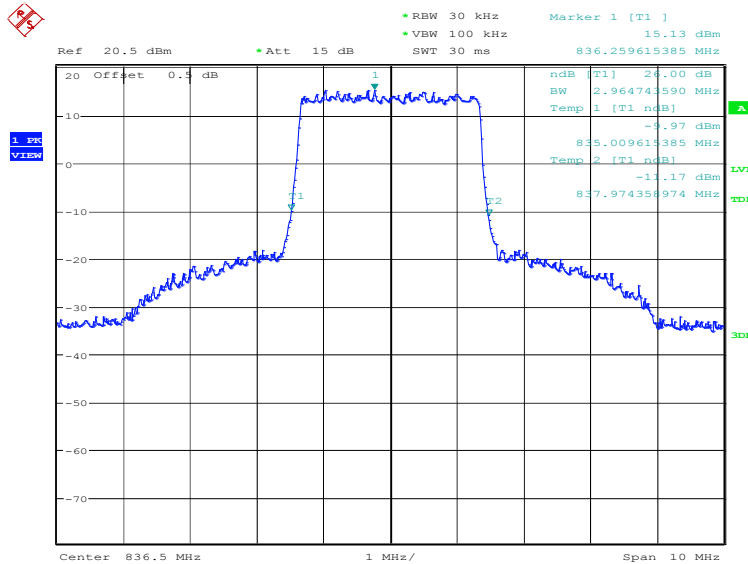

Date: 26.FEB.2019 21:10:16



### LTE band 5, 3MHz Bandwidth, 64QAM (-26dBc BW)

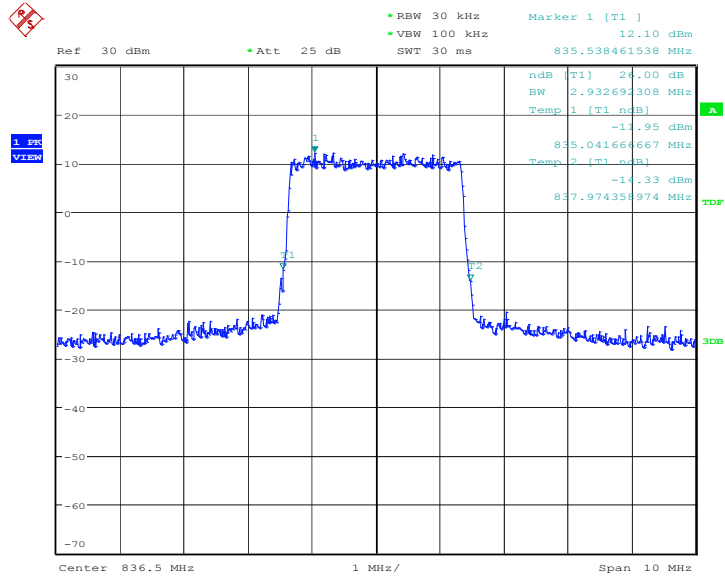


Date: 27.FEB.2019 14:45:25

**LTE band 5, 5MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
836.5	5000.00	4975.96	4955.77

**LTE band 5, 5MHz Bandwidth, QPSK (-26dBc BW)**

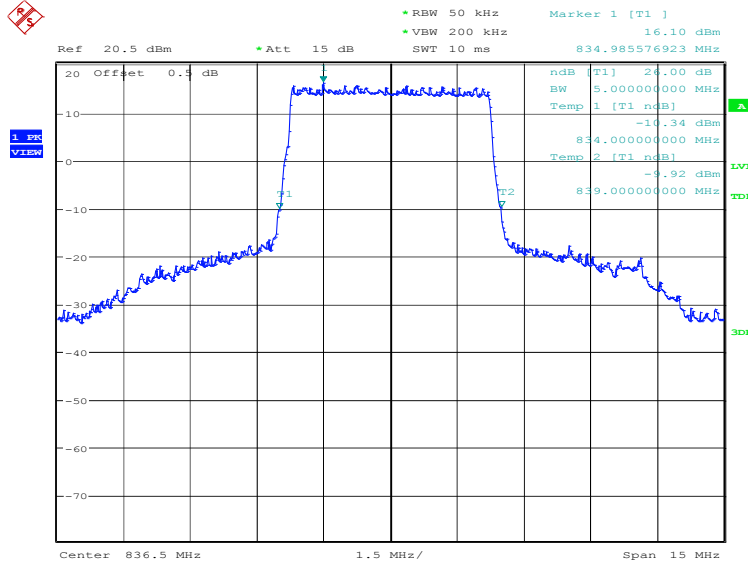

Date: 26.FEB.2019 21:11:42


**LTE band 5, 5MHz Bandwidth, 16QAM (-26dBc BW)**

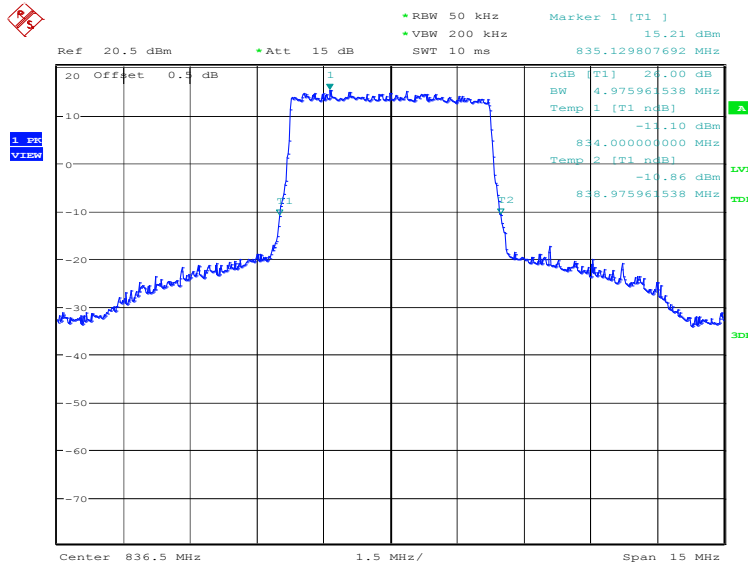

Date: 26.FEB.2019 21:13:06



### LTE band 5, 5MHz Bandwidth, 64QAM (-26dBc BW)

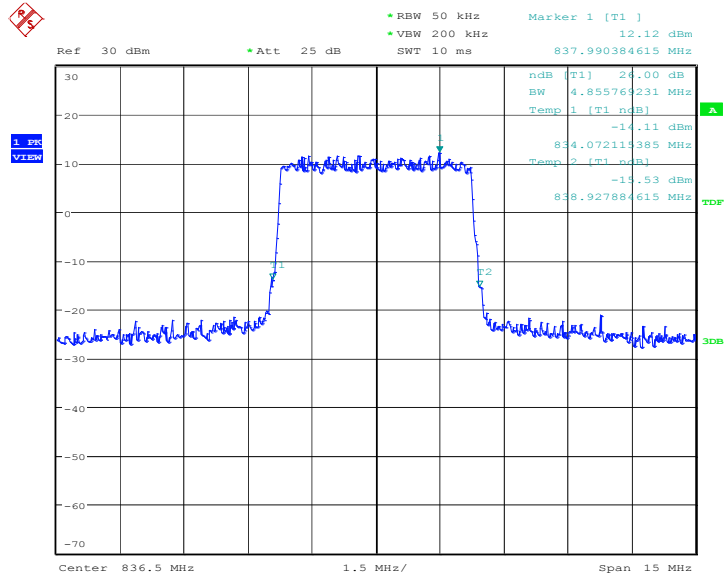


Date: 27.FEB.2019 14:46:32

**LTE band 5, 10MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
836.5	9807.69	9759.62	9663.46

**LTE band 5, 10MHz Bandwidth, QPSK (-26dBc BW)**

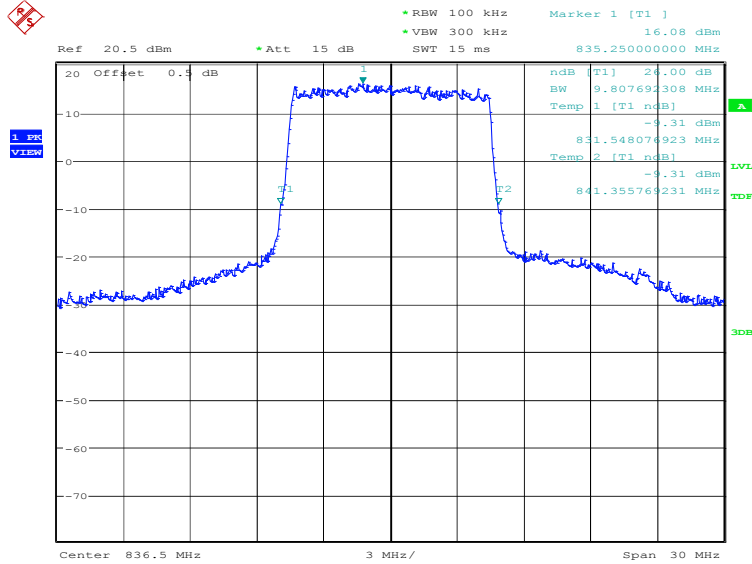

Date: 26.FEB.2019 21:14:33

**LTE band 5, 10MHz Bandwidth, 16QAM (-26dBc BW)**

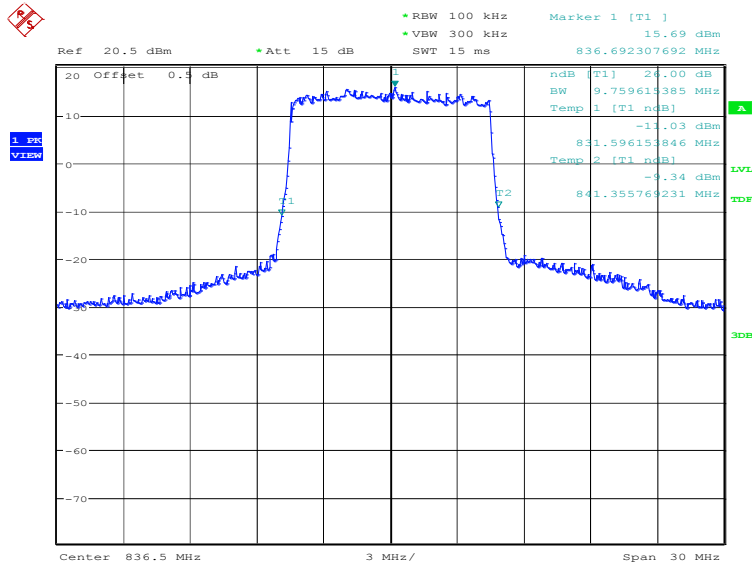


Date: 26.FEB.2019 21:15:57





### LTE band 5, 10MHz Bandwidth, 64QAM (-26dBc BW)

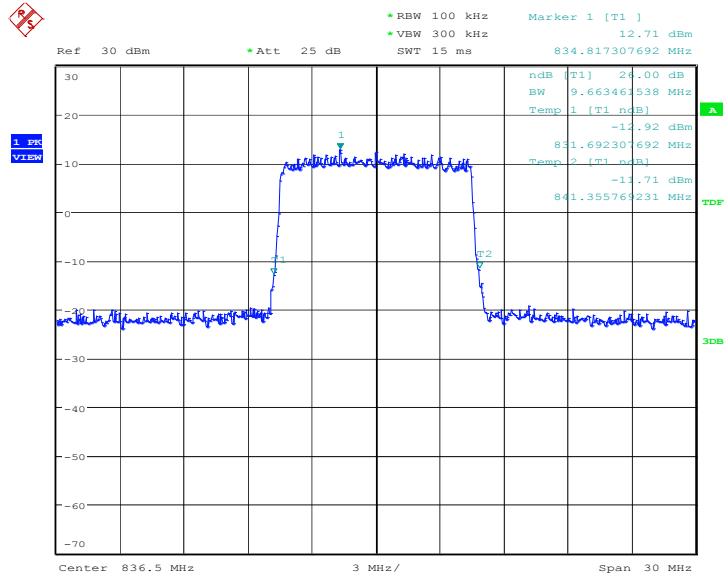


Date: 27.FEB.2019 14:49:03

**LTE band 13, 5MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
782.0	4975.96	5024.04	4903.85

**LTE band 13, 5MHz Bandwidth, QPSK (-26dBc BW)**

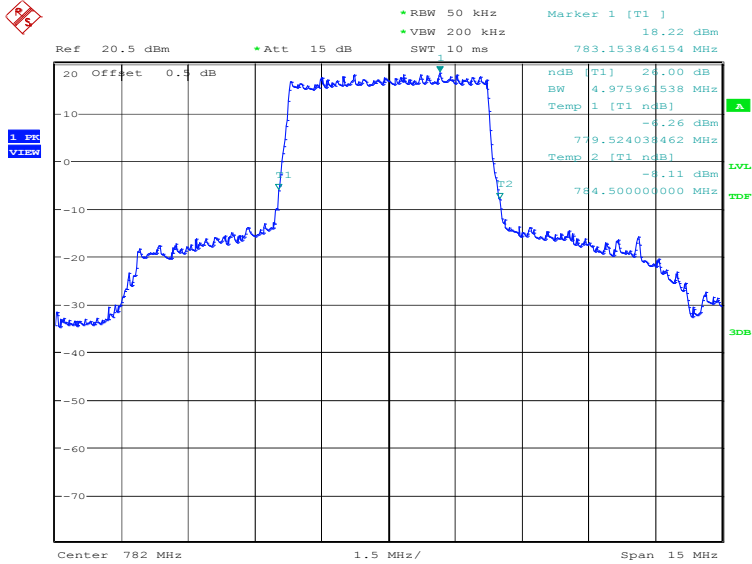

Date: 26.FEB.2019 21:17:25


**LTE band 13, 5MHz Bandwidth,16QAM (-26dBc BW)**

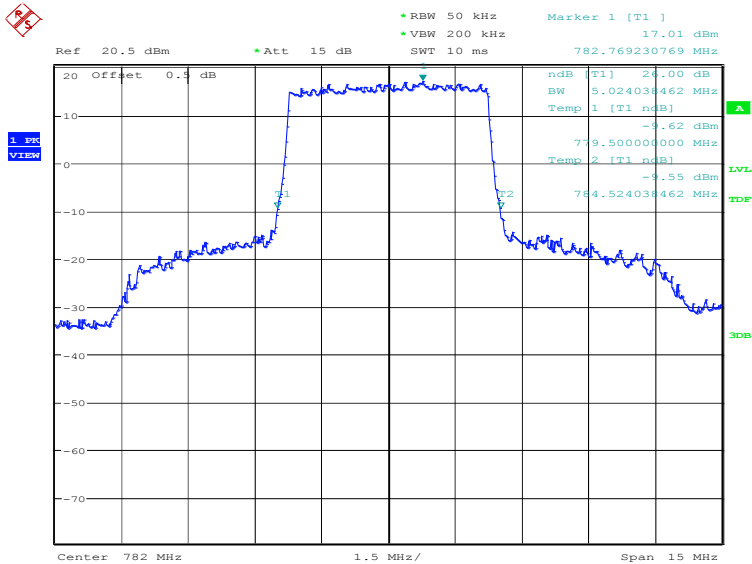

Date: 26.FEB.2019 21:18:50



### LTE band 13, 5MHz Bandwidth,64QAM (-26dBc BW)

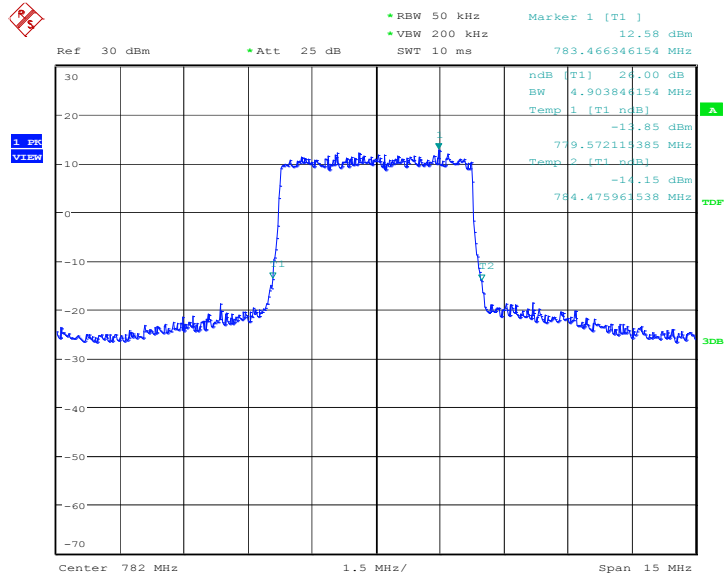


Date: 27.FEB.2019 14:56:54

**LTE band 13, 10MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
782.0	9807.69	9759.62	9663.46

**LTE band 13, 10MHz Bandwidth, QPSK (-26dBc BW)**

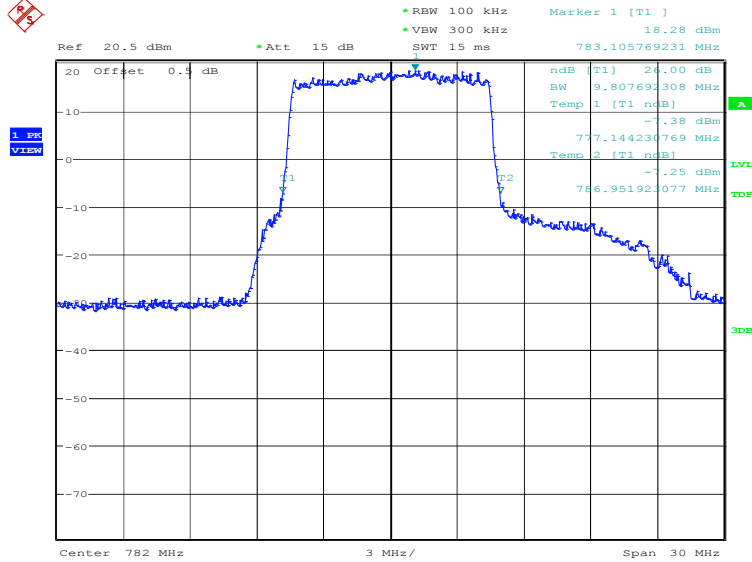

Date: 26.FEB.2019 21:20:16


**LTE band 13, 10MHz Bandwidth,16QAM (-26dBc BW)**

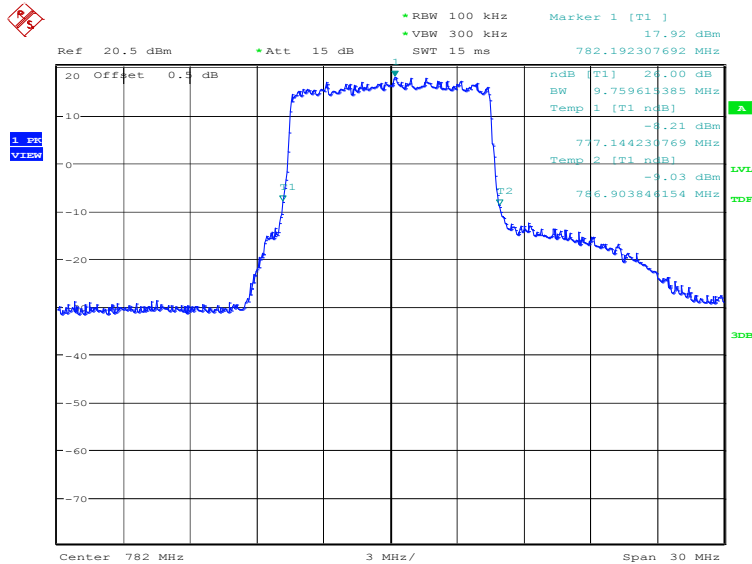

Date: 26.FEB.2019 21:21:40



### LTE band 13, 10MHz Bandwidth, 64QAM (-26dBc BW)

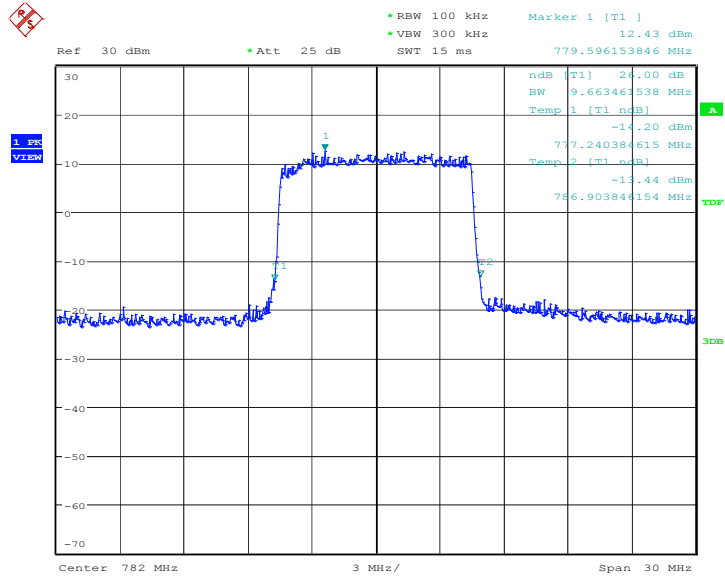


Date: 27.FEB.2019 14:57:59

**LTE band 66, 1.4MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1745.0	1322.12	1322.12	1298.08

**LTE band 66, 1.4MHz Bandwidth, QPSK (-26dBc BW)**

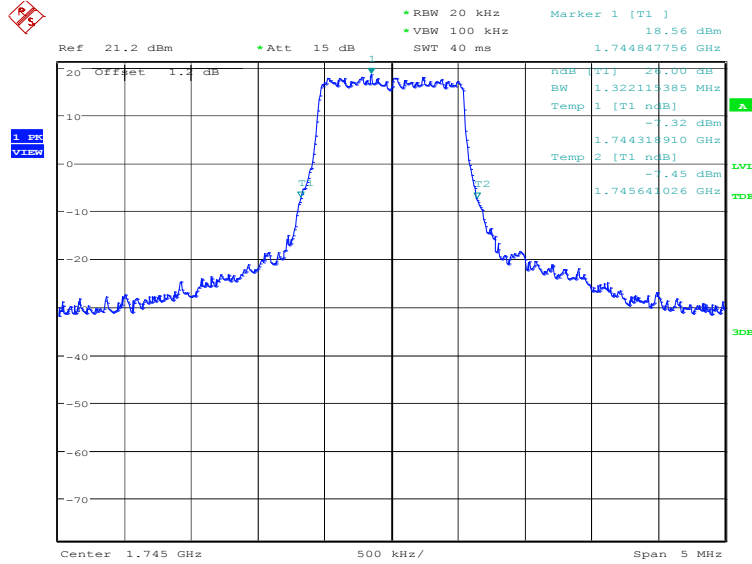

Date: 26.FEB.2019 21:23:12


**LTE band 66, 1.4MHz Bandwidth, 16QAM (-26dBc BW)**

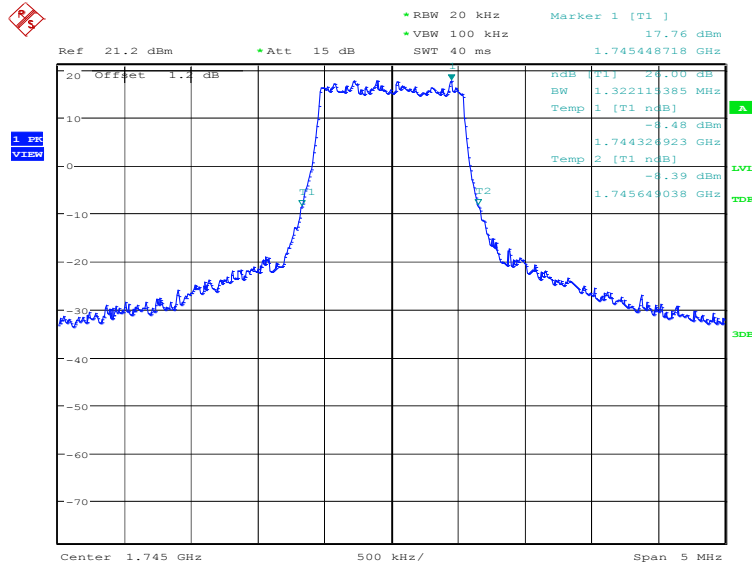

Date: 26.FEB.2019 21:24:36



### LTE band 66, 1.4MHz Bandwidth, 64QAM (-26dBc BW)

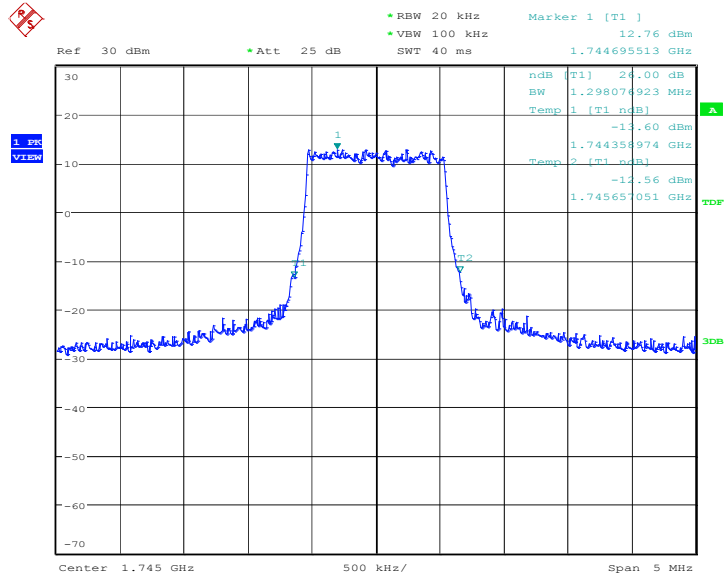


Date: 27.FEB.2019 15:04:11

**LTE band 66, 3MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1745.0	2980.77	2980.77	2948.72

**LTE band 66, 3MHz Bandwidth, QPSK (-26dBc BW)**

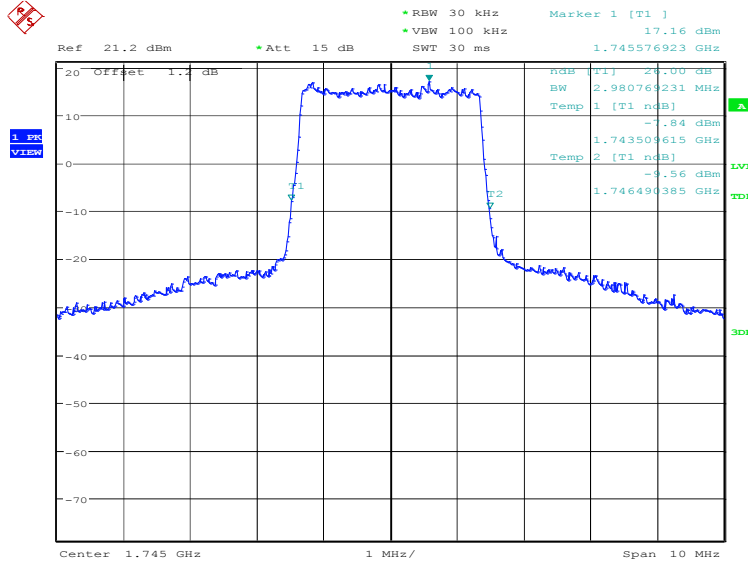

Date: 26.FEB.2019 21:26:03

**LTE band 66, 3MHz Bandwidth, 16QAM (-26dBc BW)**

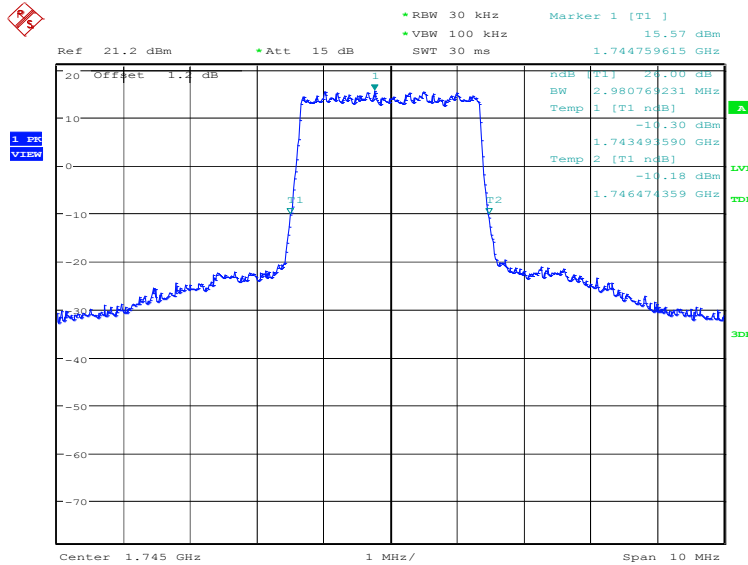


Date: 26.FEB.2019 21:27:27





### LTE band 66, 3MHz Bandwidth, 64QAM (-26dBc BW)

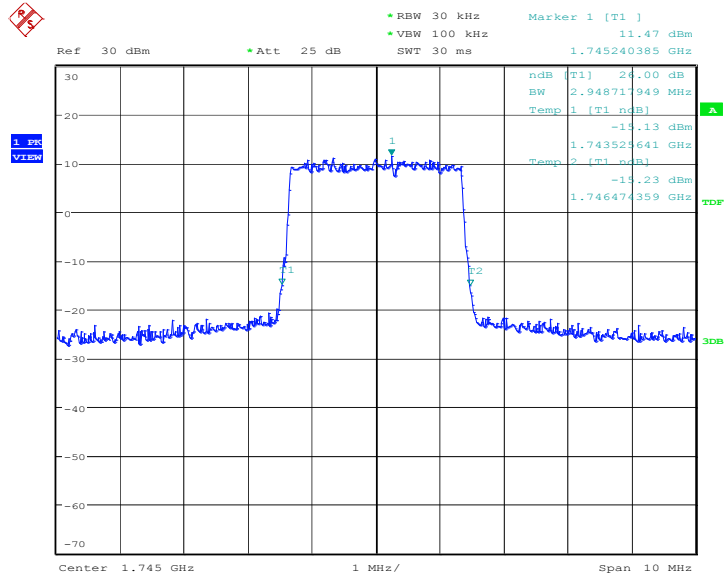


Date: 27.FEB.2019 15:05:06

**LTE band 66, 5MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1745.0	4975.96	4975.96	4903.85

**LTE band 66, 5MHz Bandwidth, QPSK (-26dBc BW)**

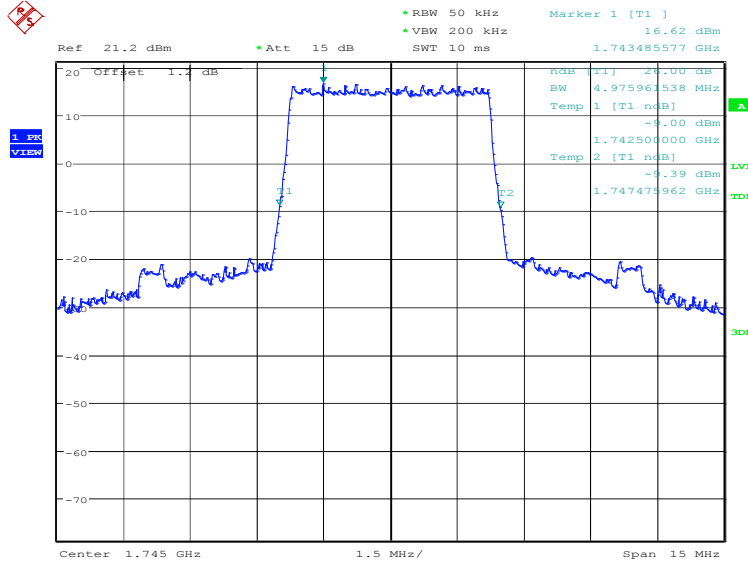

Date: 26.FEB.2019 21:28:54


**LTE band 66, 5MHz Bandwidth, 16QAM (-26dBc BW)**

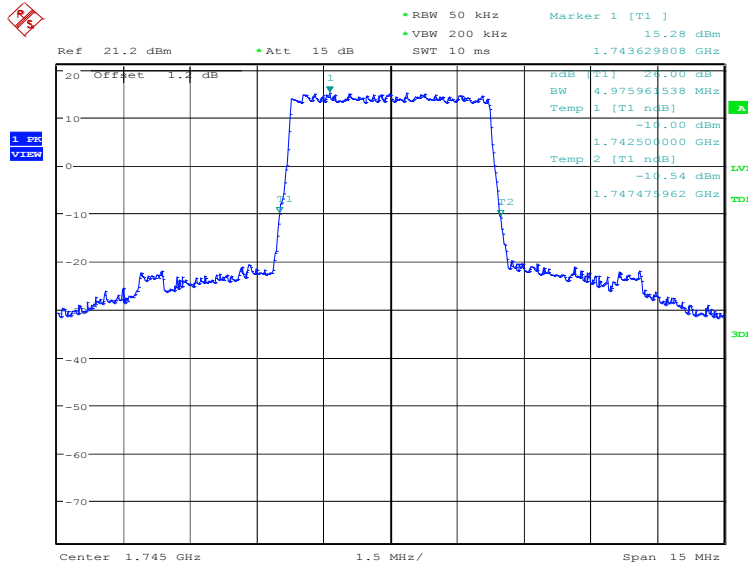

Date: 26.FEB.2019 21:30:18



### LTE band 66, 5MHz Bandwidth,64QAM (-26dBc BW)

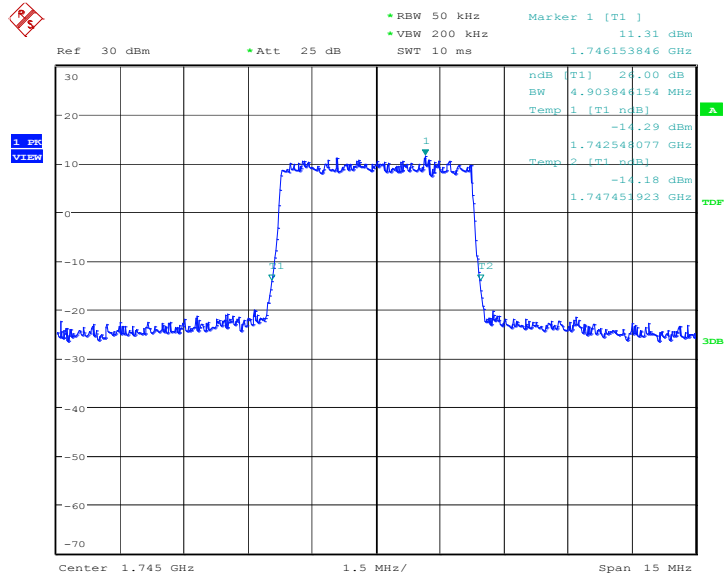


Date: 27.FEB.2019 15:06:11

**LTE band 66, 10MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1745.0	9903.85	9759.62	9663.46

**LTE band 66, 10MHz Bandwidth, QPSK (-26dBc BW)**

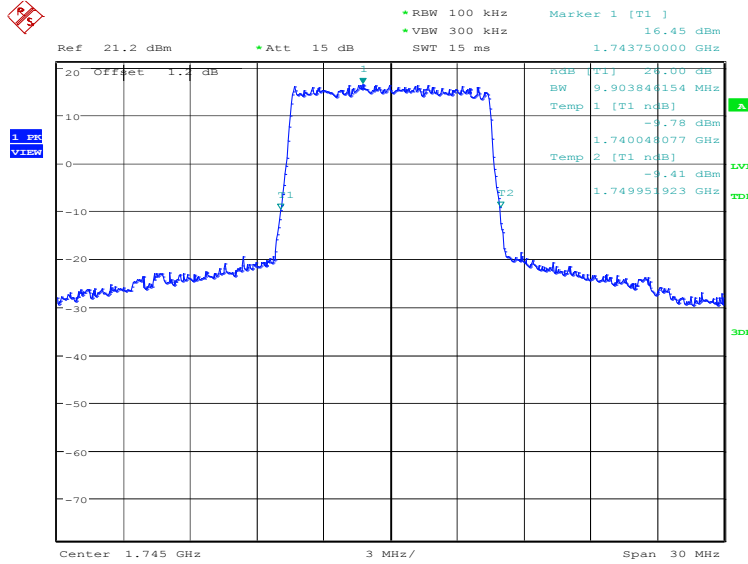

Date: 26.FEB.2019 21:31:44


**LTE band 66, 10MHz Bandwidth, 16QAM (-26dBc BW)**

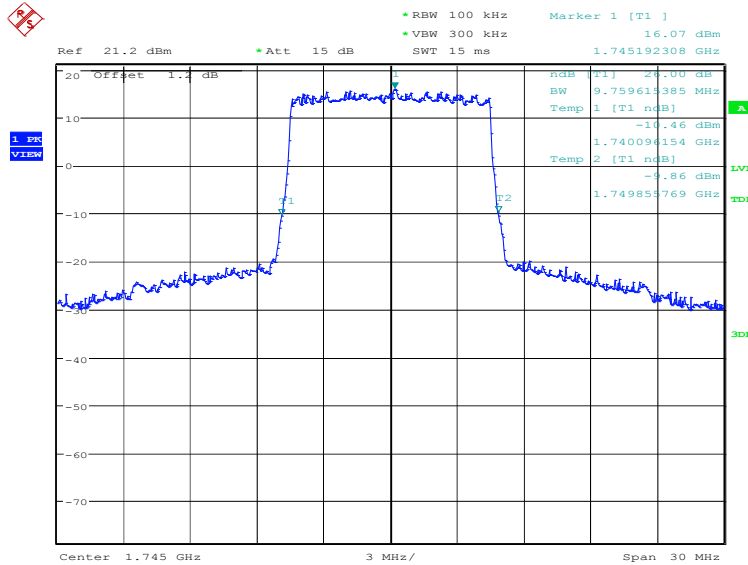

Date: 26.FEB.2019 21:33:09



### LTE band 66, 10MHz Bandwidth, 64QAM (-26dBc BW)

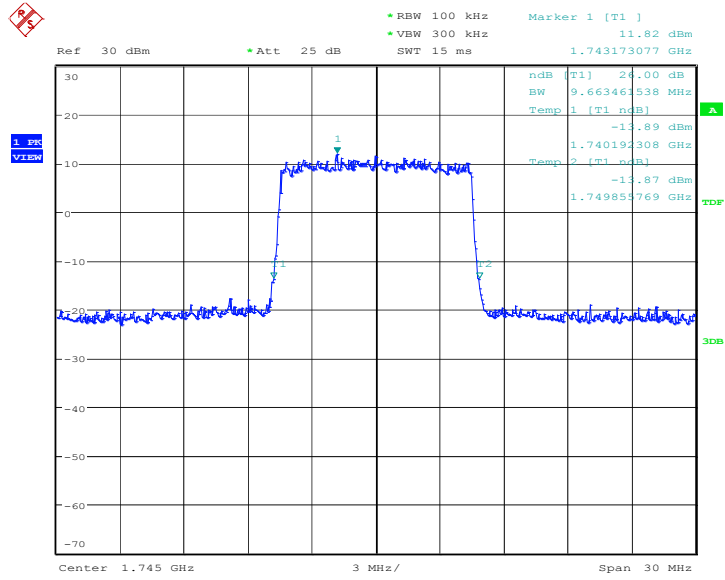


Date: 27.FEB.2019 15:07:10

**LTE band 66, 15MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1745.0	14711.54	14711.54	14783.65

**LTE band 66, 15MHz Bandwidth, QPSK (-26dBc BW)**

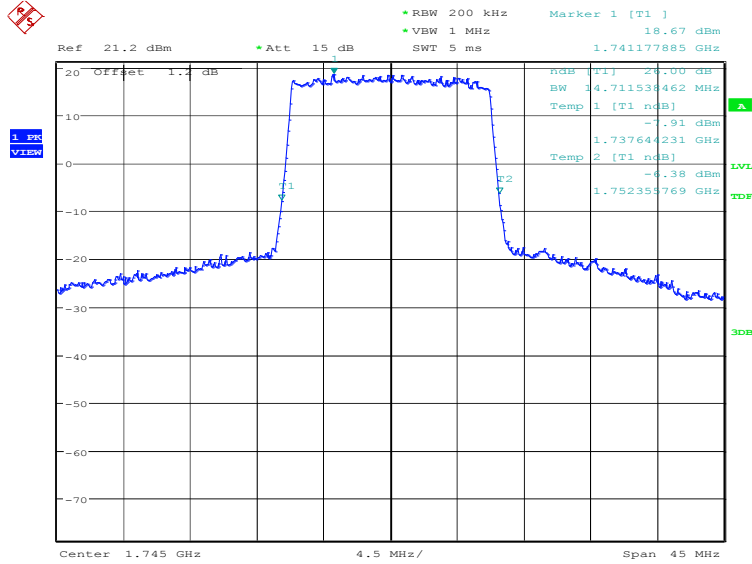

Date: 26.FEB.2019 21:34:35


**LTE band 66, 15MHz Bandwidth, 16QAM (-26dBc BW)**

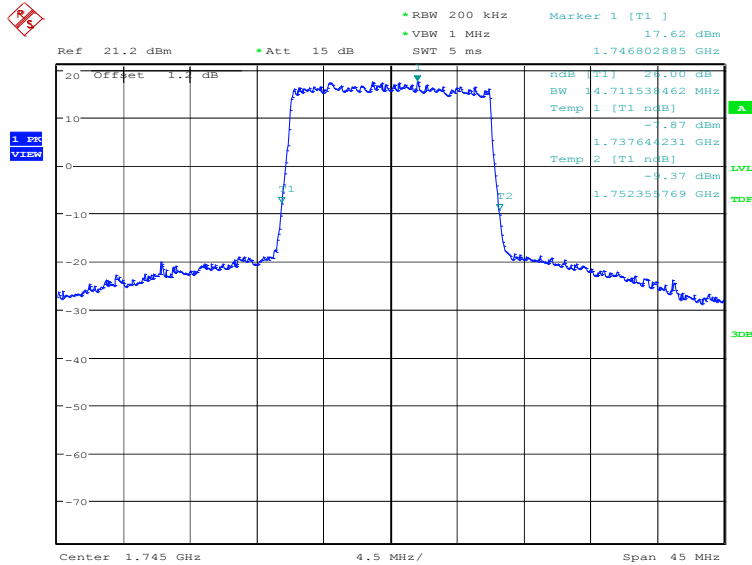

Date: 26.FEB.2019 21:36:00



LTE band 66, 15MHz Bandwidth, 64QAM (-26dBc BW)

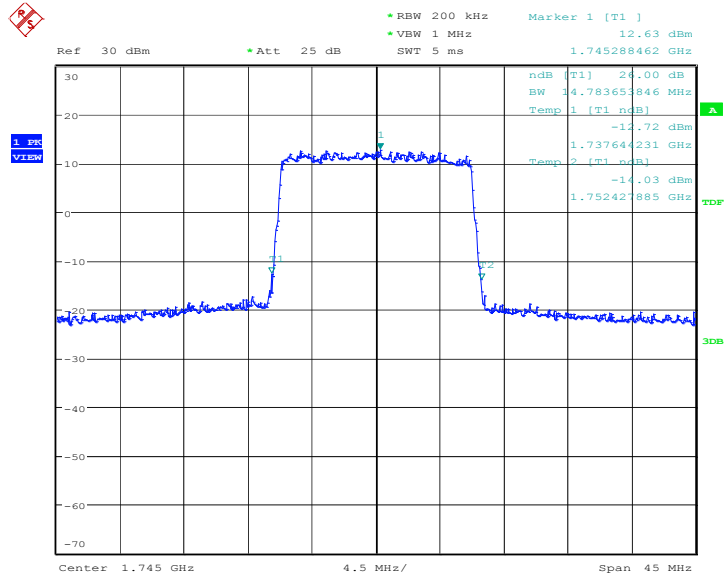


Date: 27.FEB.2019 15:08:16



**LTE band 66, 20MHz (-26dBc)**


Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)		
	QPSK	16QAM	64QAM
1745.0	19230.77	19230.77	19230.77

**LTE band 66, 20MHz Bandwidth, QPSK (-26dBc BW)**

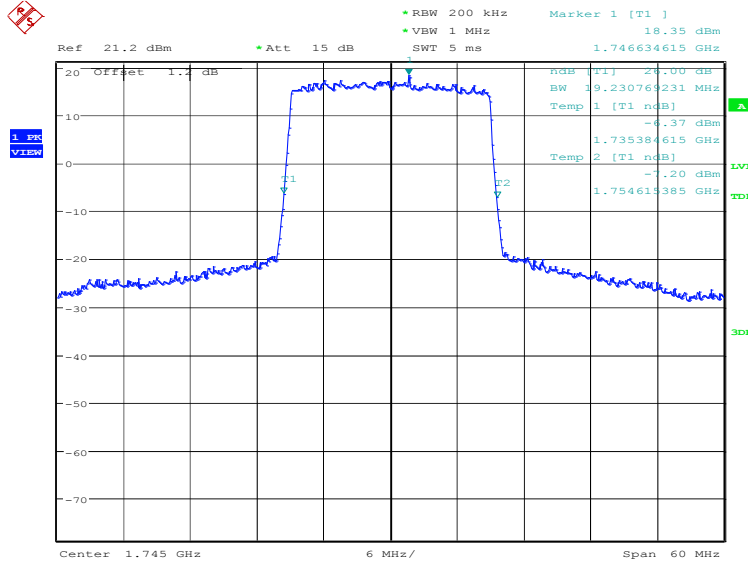

Date: 26.FEB.2019 21:37:26

**LTE band 66, 20MHz Bandwidth, 16QAM (-26dBc BW)**

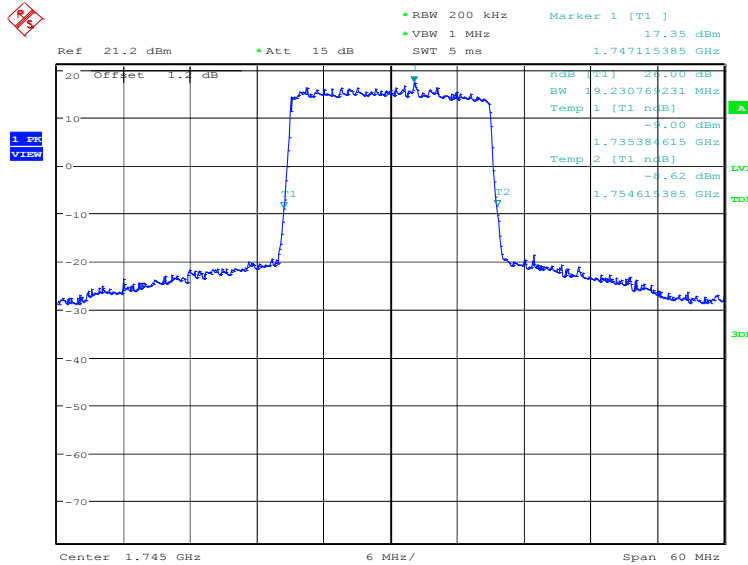


Date: 26.FEB.2019 21:38:50





### LTE band 66, 20MHz Bandwidth, 64QAM (-26dBc BW)

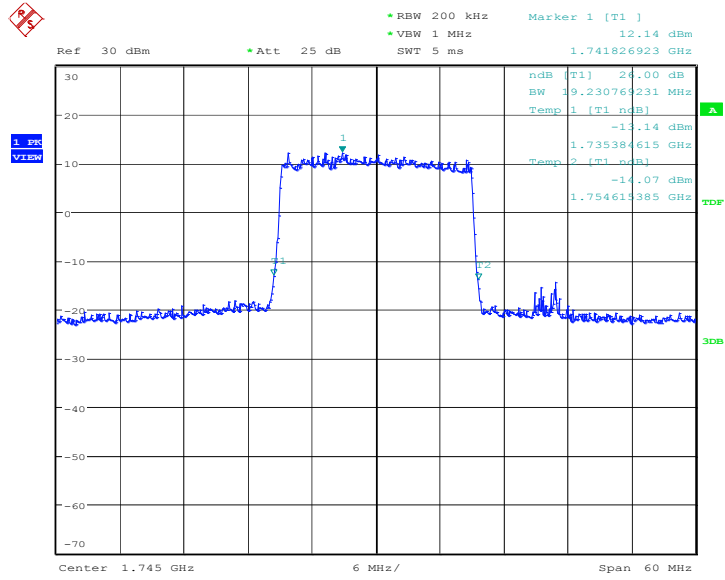

Date: 27.FEB.2019 15:09:13



## **A.6 BAND EDGE COMPLIANCE**

### **A.6.1 Measurement limit**

Part 22.917(b), 24.238(a), 27.53(h) state that on any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

According to KDB 971168 6.0, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.


Part 27.53(c) states for operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log(P)$  dB in a 6.25 kHz band segment, for mobile and portable stations

### A.6.2 Measurement result

Only worst case result is given below


LTE band 2

OBW: 1RB-low\_offset

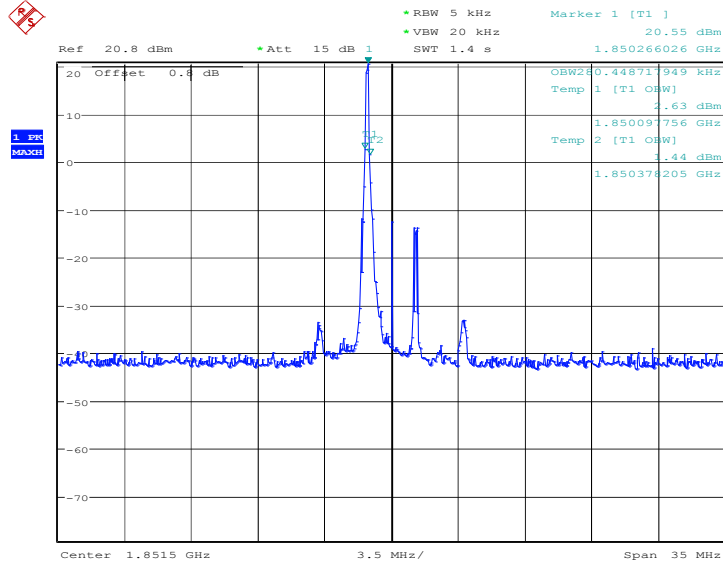


Date: 13.MAR.2019 10:11:34

### LOW BAND EDGE BLOCK-1RB-low\_offset

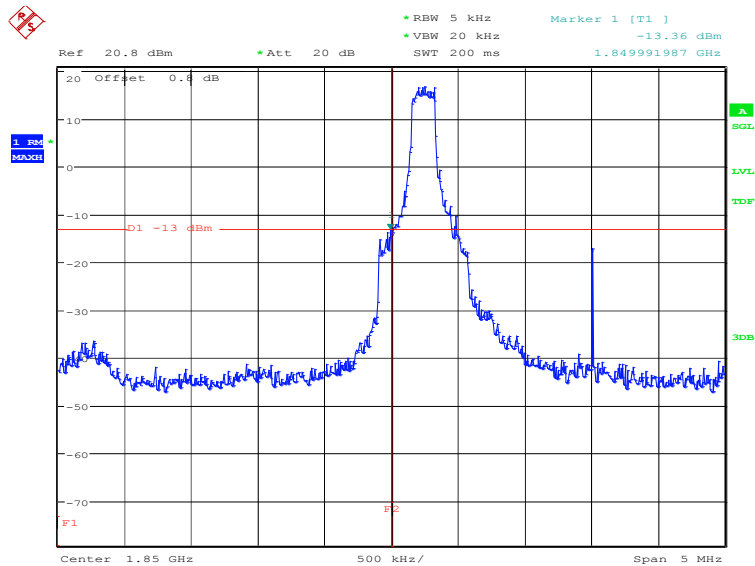


Date: 13.MAR.2019 10:11:50

**OBW: 1RB-high\_offset**

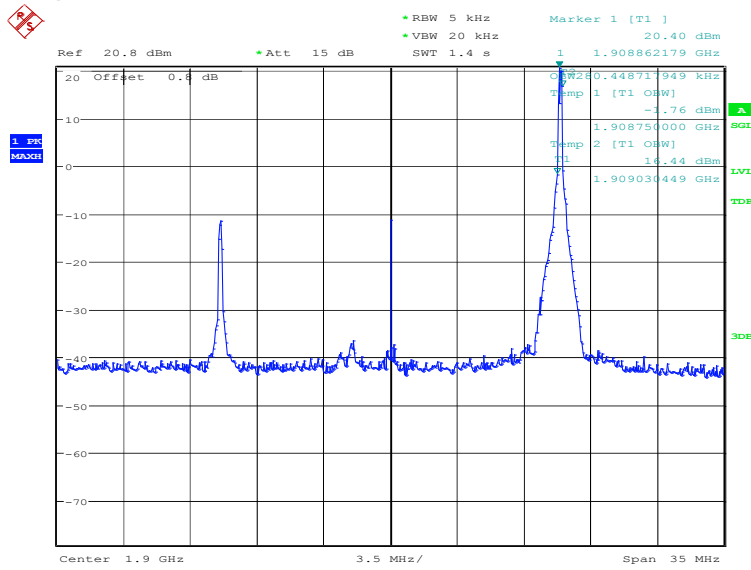


Date: 13.MAR.2019 10:15:45

**HIGH BAND EDGE BLOCK-1RB-high\_offset**

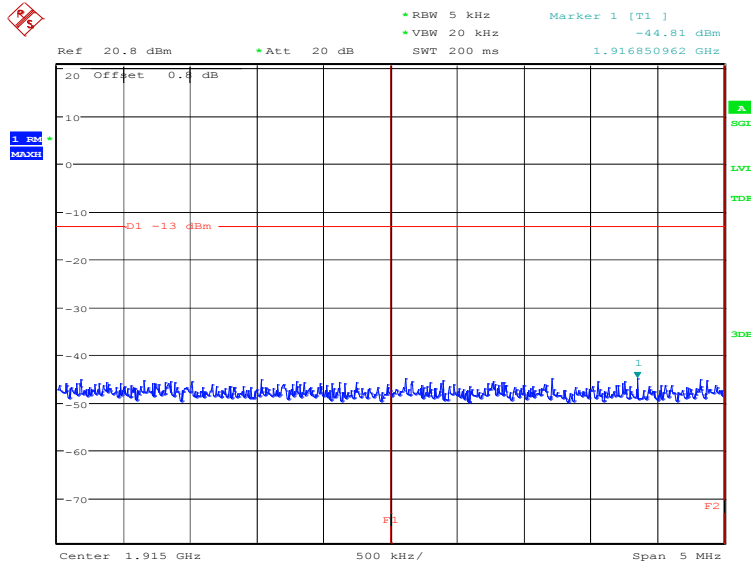


Date: 13.MAR.2019 10:16:00

### LOW BAND EDGE BLOCK-20MHz-100%RB

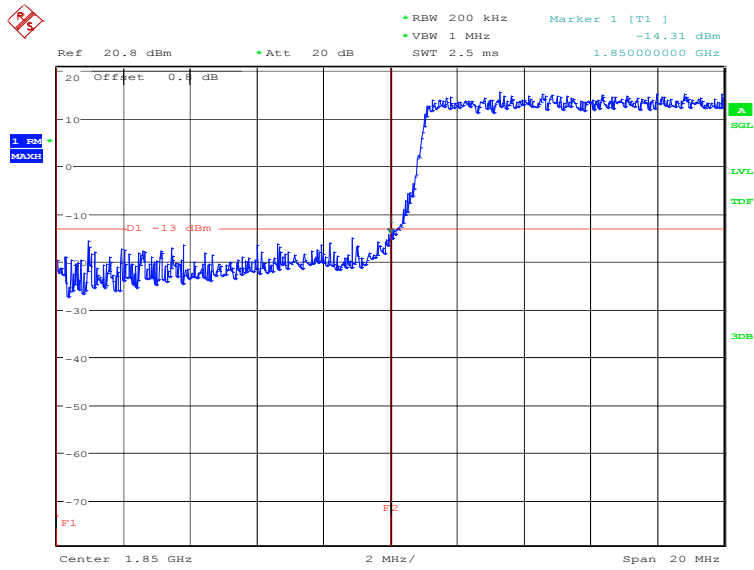

Date: 13.MAR.2019 10:18:58


### HIGH BAND EDGE BLOCK-20MHz-100%RB

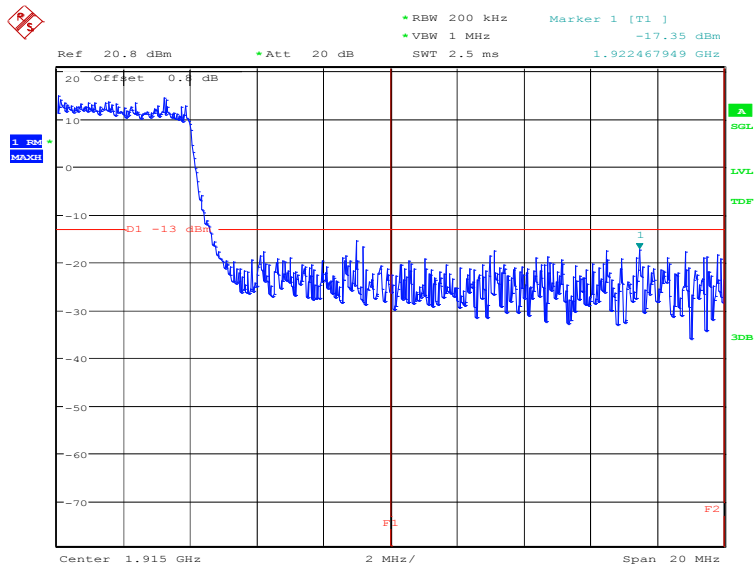

Date: 13.MAR.2019 10:19:27




### LTE band 5 OBW: 1RB-low\_offset

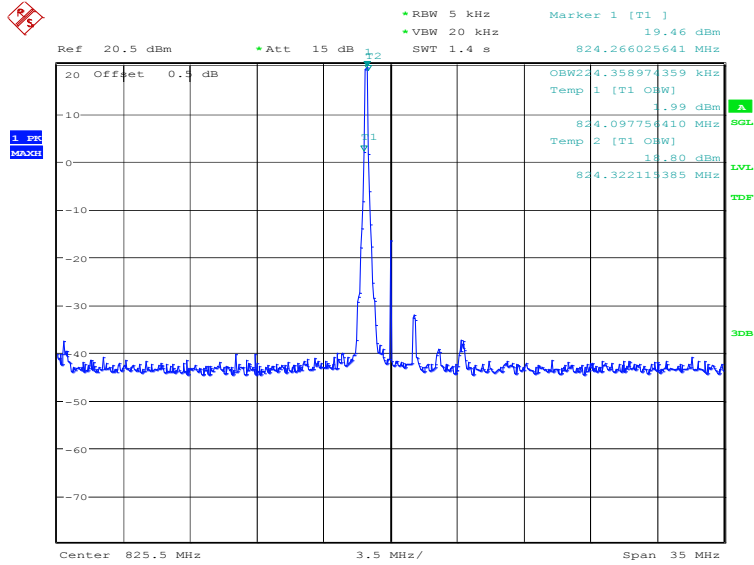


Date: 13.MAR.2019 10:22:21

### LOW BAND EDGE BLOCK-1RB-low\_offset

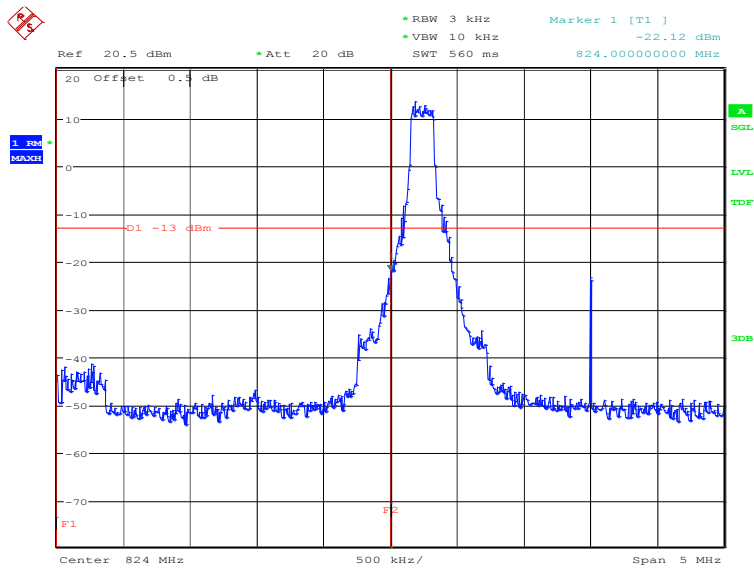


Date: 13.MAR.2019 10:22:36

**OBW: 1RB-high\_offset**

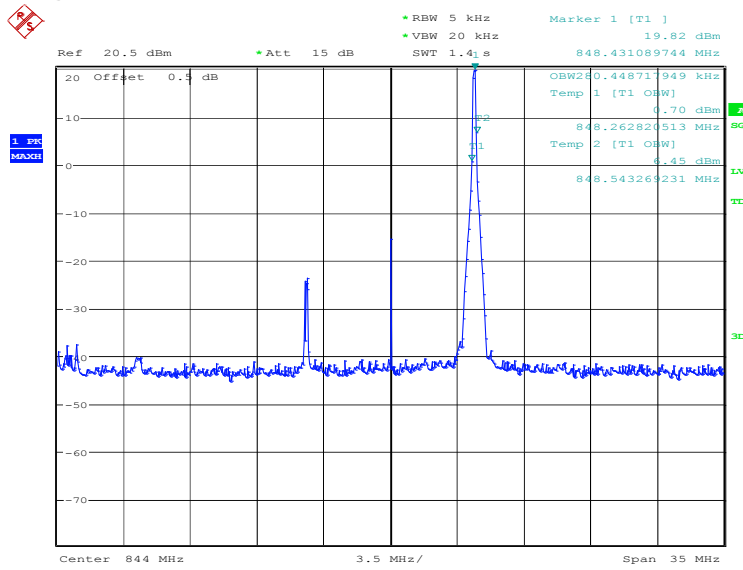


Date: 13.MAR.2019 10:25:58

**HIGH BAND EDGE BLOCK-1RB-high\_offset**

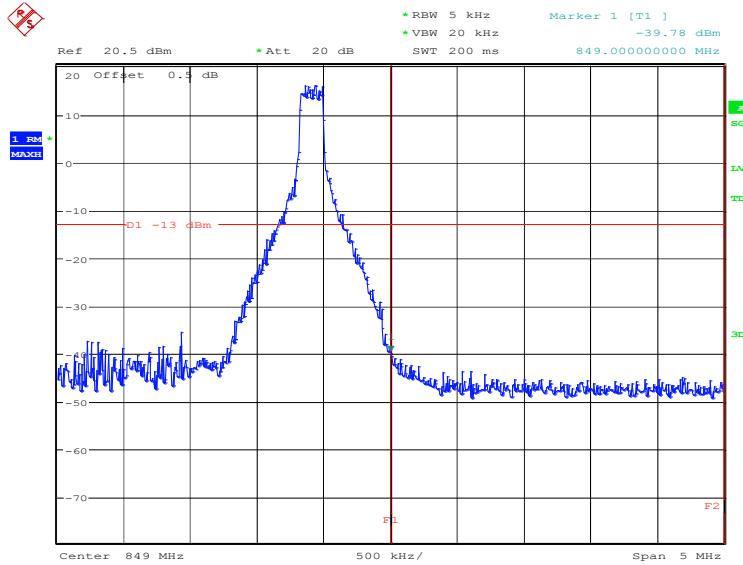


Date: 13.MAR.2019 10:26:13

### LOW BAND EDGE BLOCK-10MHz-100%RB

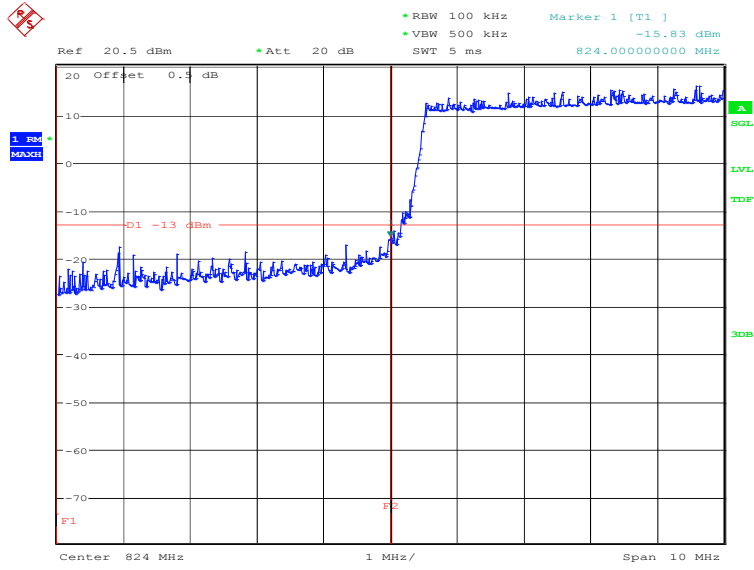

Date: 13.MAR.2019 10:28:08

### HIGH BAND EDGE BLOCK-10MHz-100%RB

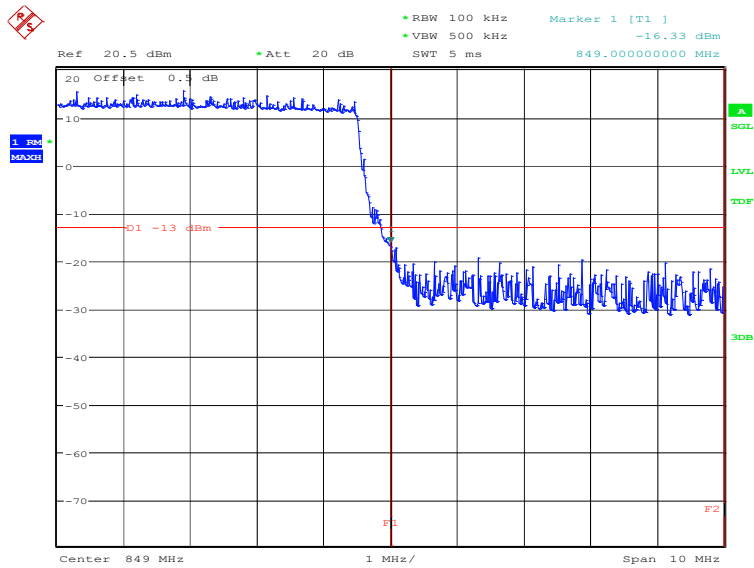


Date: 13.MAR.2019 10:28:36






LTE band 13  
OBW: 1RB-low\_offset

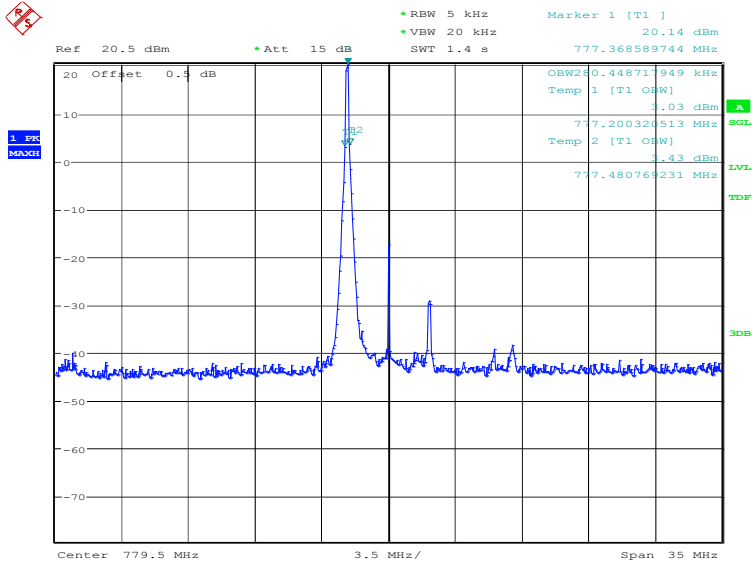


Date: 13.MAR.2019 10:34:21

LOW BAND EDGE BLOCK-1RB-low\_offset

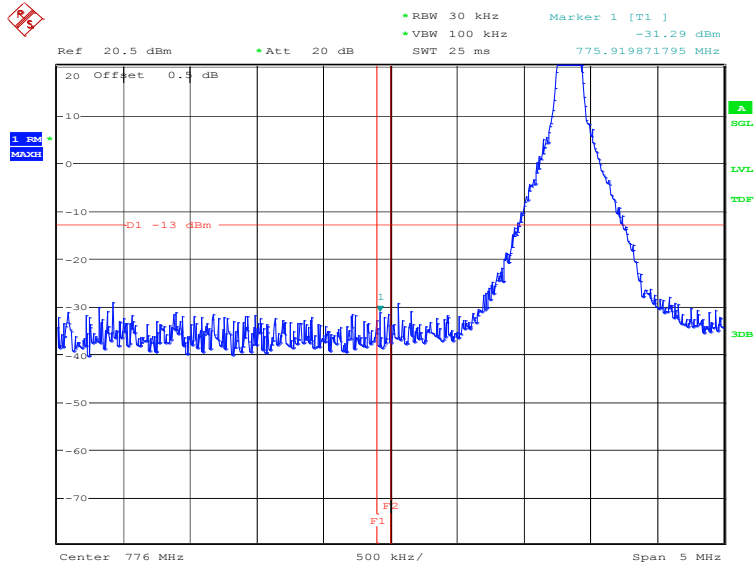


Date: 13.MAR.2019 10:34:36

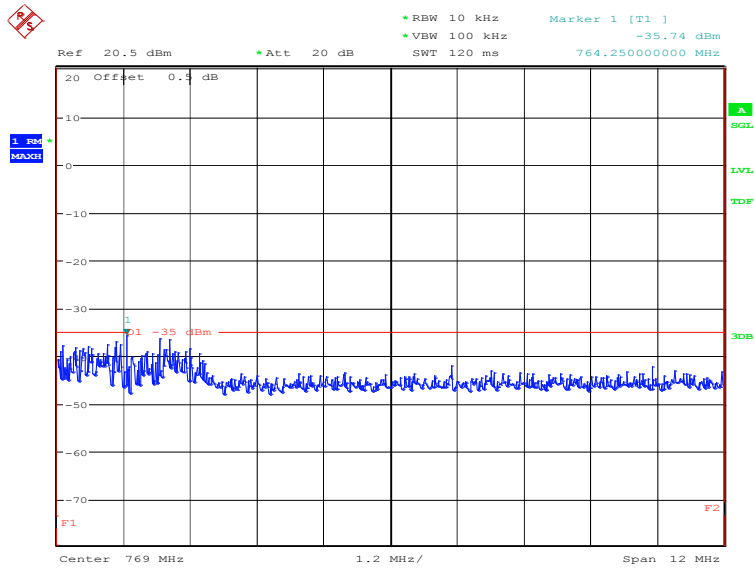

Date: 13.MAR.2019 10:34:50




### OBW: 1RB-high\_offset

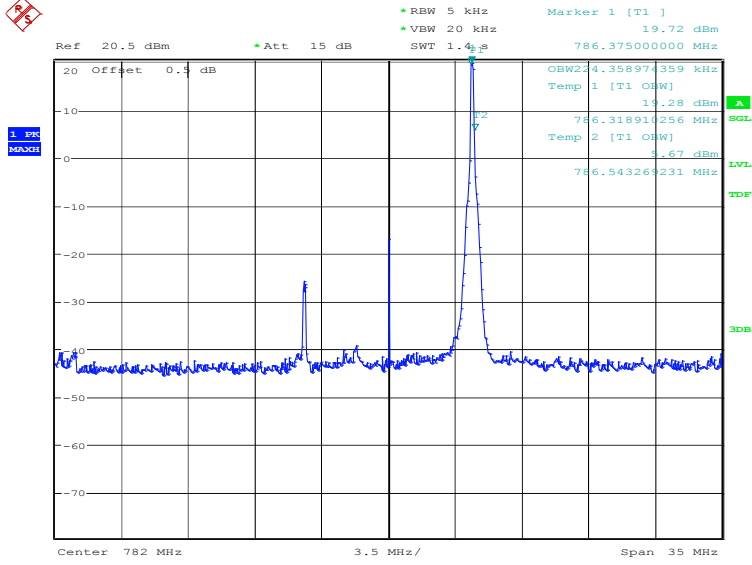


Date: 13.MAR.2019 10:42:49

### HIGH BAND EDGE BLOCK-1RB-high\_offset

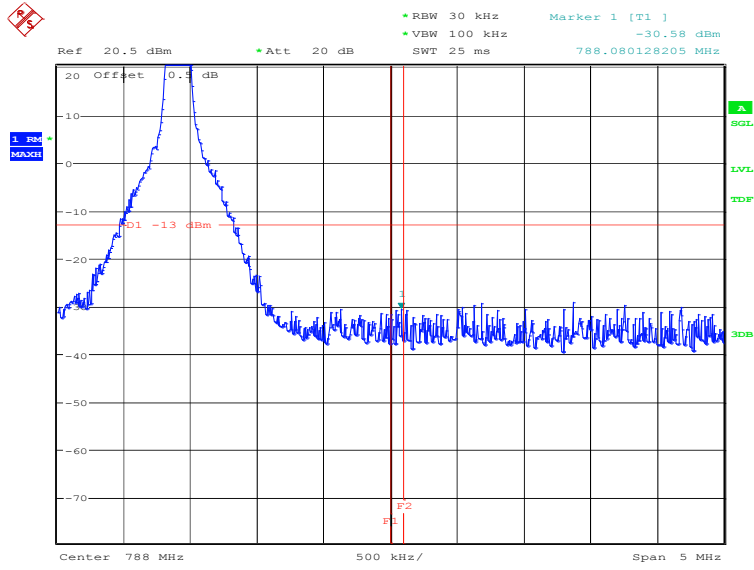


Date: 13.MAR.2019 10:43:04

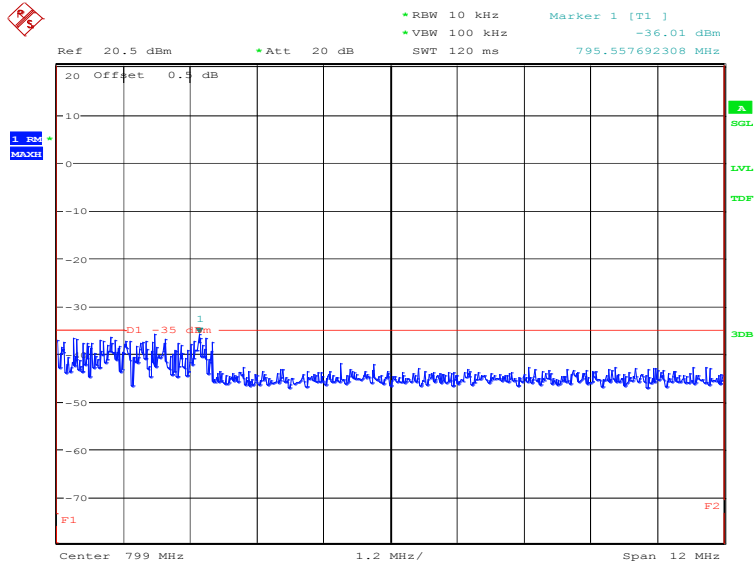


Date: 13.MAR.2019 10:43:18



### LOW BAND EDGE BLOCK-10MHz-100%RB

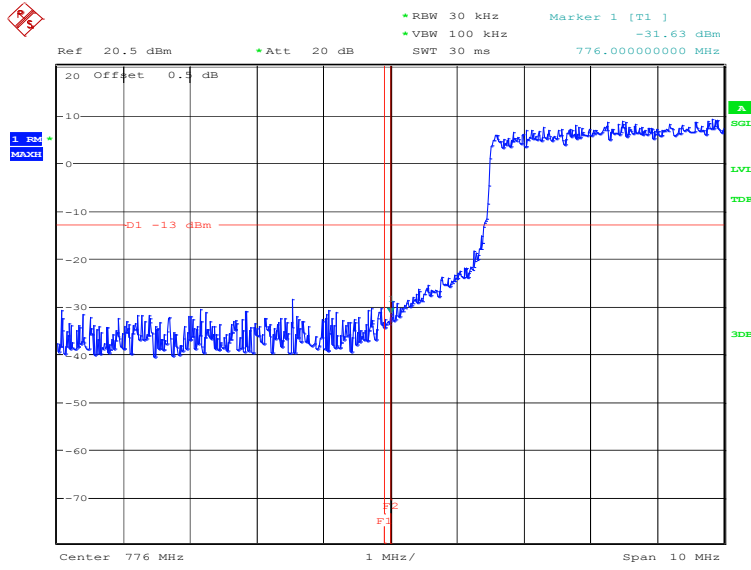


Date: 13.MAR.2019 10:46:29

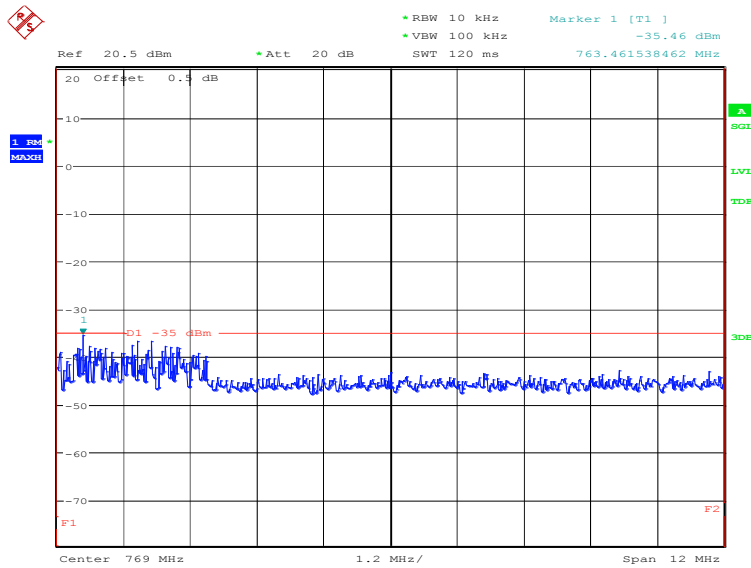


Date: 13.MAR.2019 10:46:43

### HIGH BAND EDGE BLOCK-10MHz-100%RB

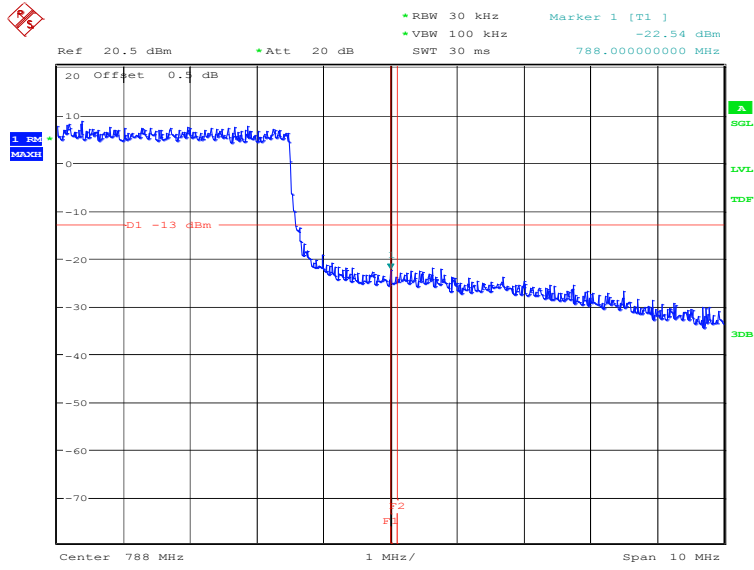


Date: 13.MAR.2019 10:57:21

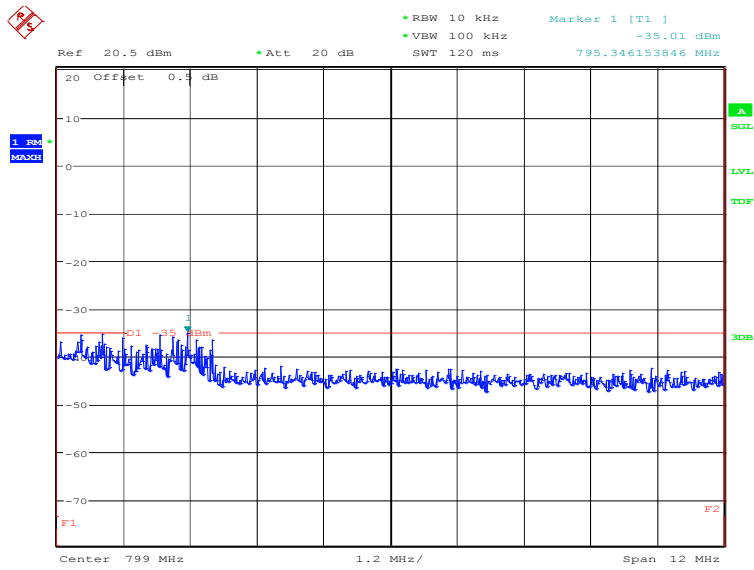

Date: 13.MAR.2019 10:57:36




LTE band 66  
OBW: 1RB-low\_offset

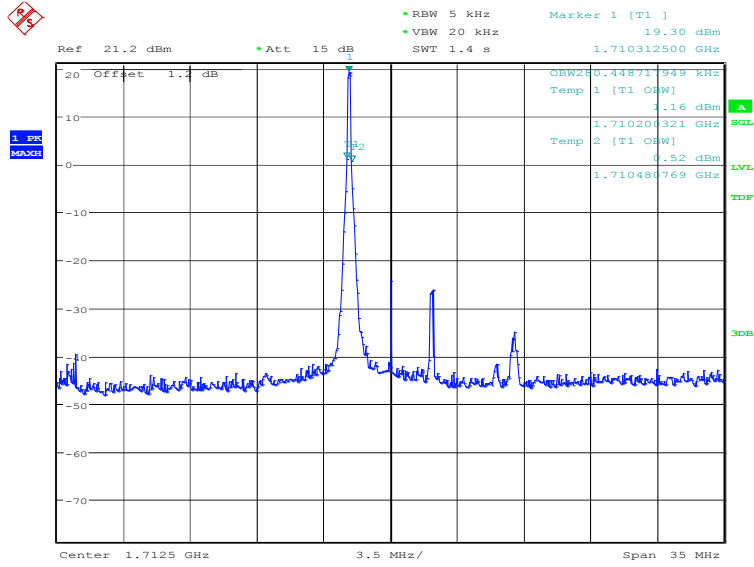


Date: 13.MAR.2019 11:05:17

LOW BAND EDGE BLOCK-1RB-low\_offset

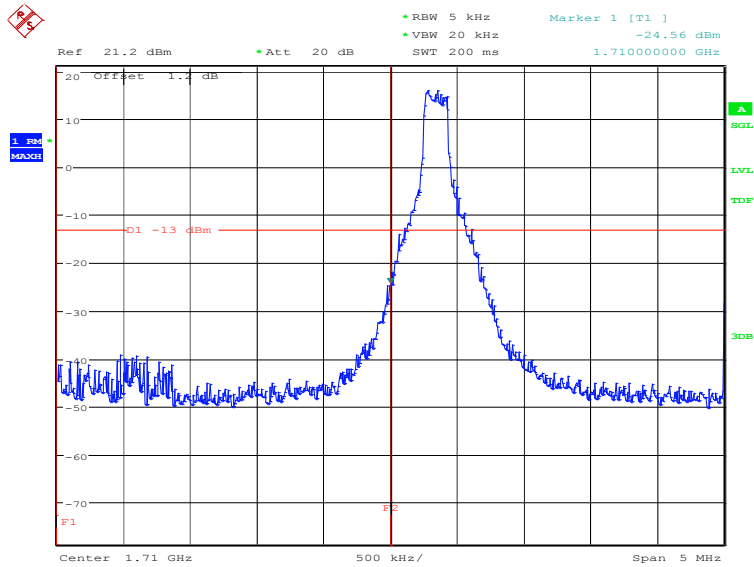


Date: 13.MAR.2019 11:05:32

**OBW: 1RB-high\_offset**

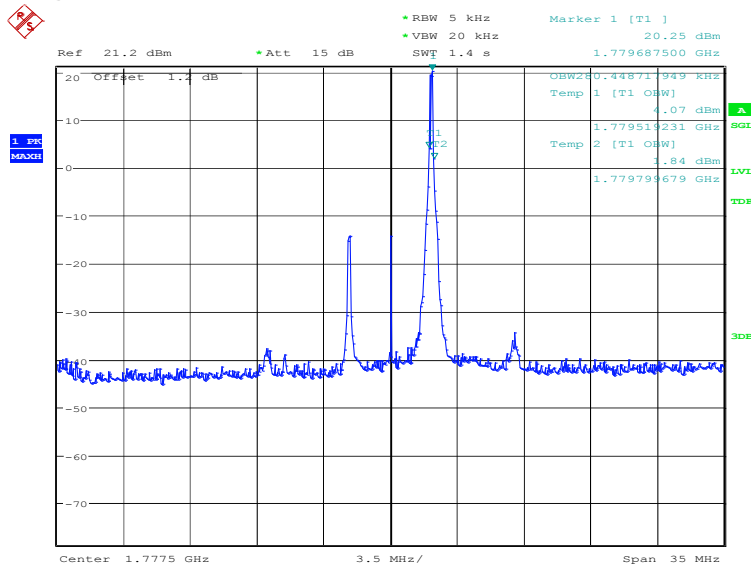

Date: 13.MAR.2019 13:51:55


**HIGH BAND EDGE BLOCK-1RB-high\_offset**

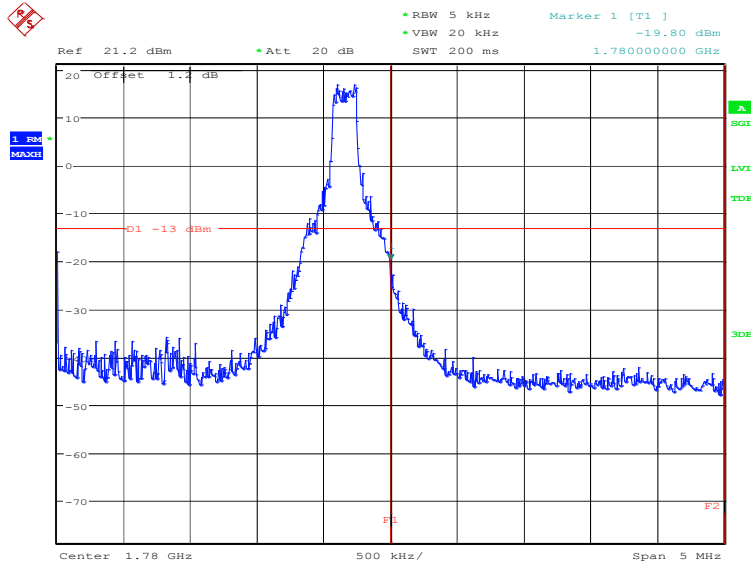

Date: 13.MAR.2019 13:52:10




### LOW BAND EDGE BLOCK-20MHz-100%RB

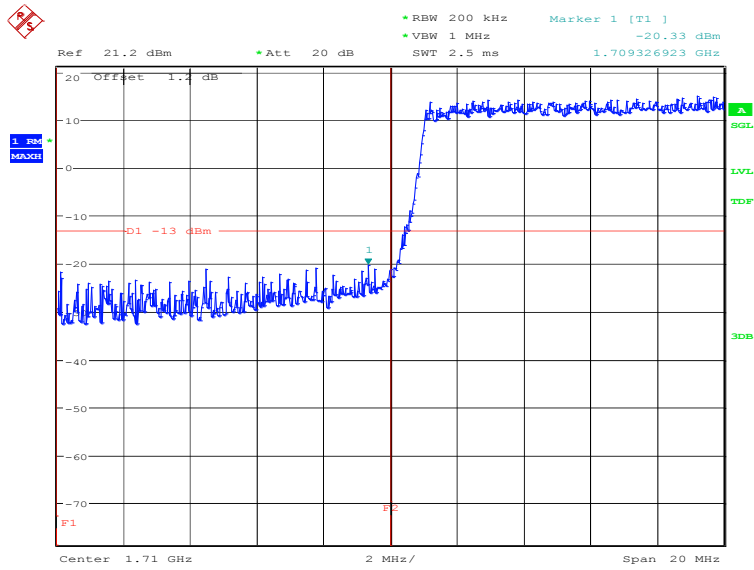

Date: 13.MAR.2019 13:54:10

### HIGH BAND EDGE BLOCK-20MHz-100%RB

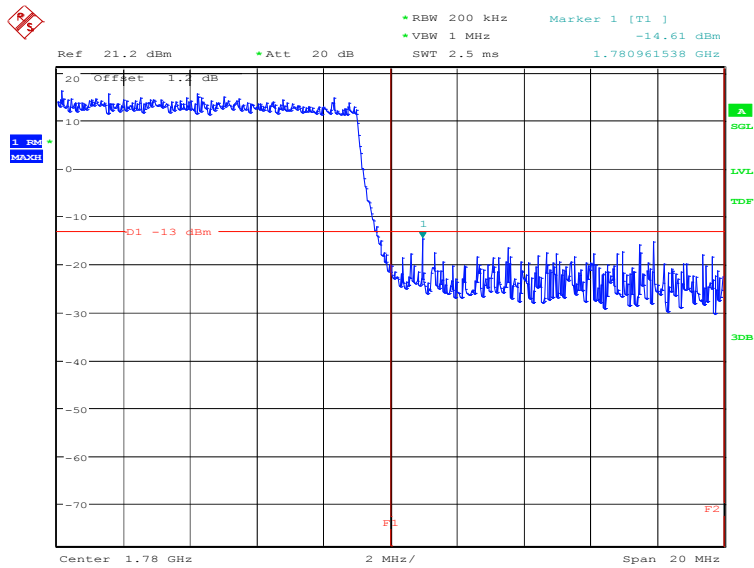

Date: 13.MAR.2019 11:15:24

## **A.7 CONDUCTED SPURIOUS EMISSION**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.


### **A. 7.2 Measurement Limit**

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


**A. 7.2 Measurement result**  
Only worst case result is given below

**LTE band 2: 30MHz – 19.15GHz**  
Spurious emission limit –13dBm.

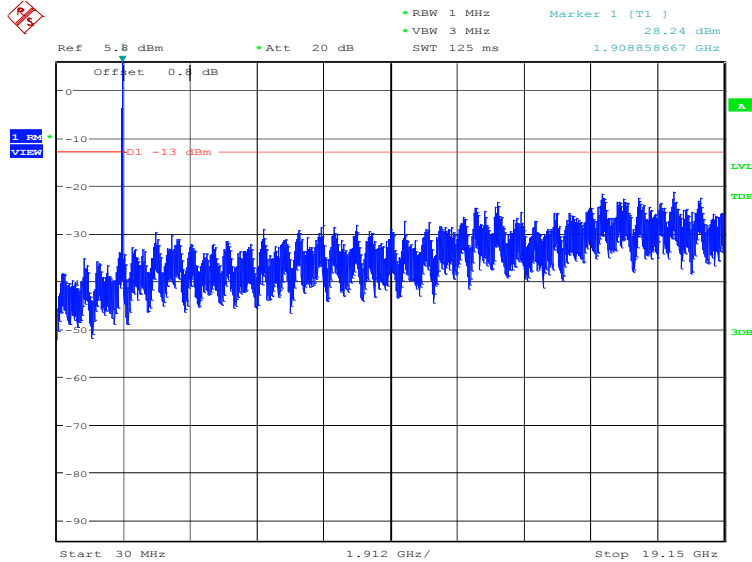


Date: 12.MAR.2019 16:45:56

**LTE band 5: 30MHz – 8.49GHz**  
Spurious emission limit –13dBm.

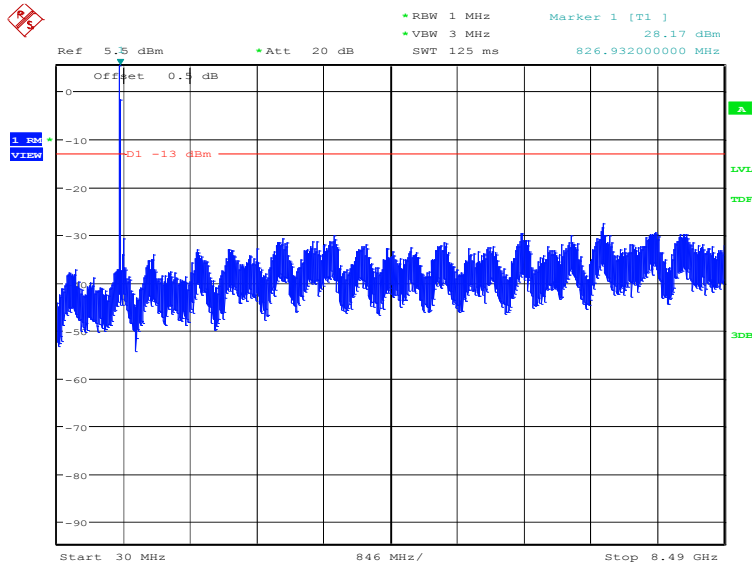


Date: 12.MAR.2019 16:41:52

**LTE band 13: 30MHz – 7.88GHz**  
Spurious emission limit –13dBm.

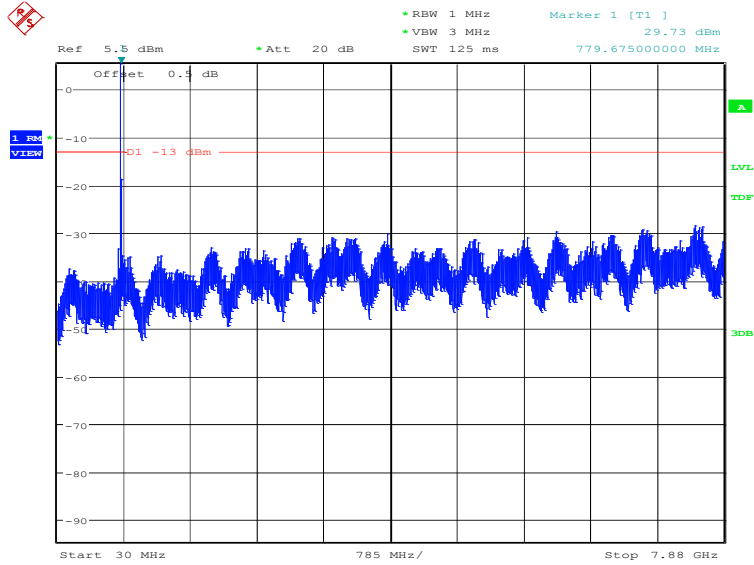

Date: 12.MAR.2019 16:47:57


**LTE band 13: 1559MHz – 1610MHz**  
Spurious emission limit –13dBm.

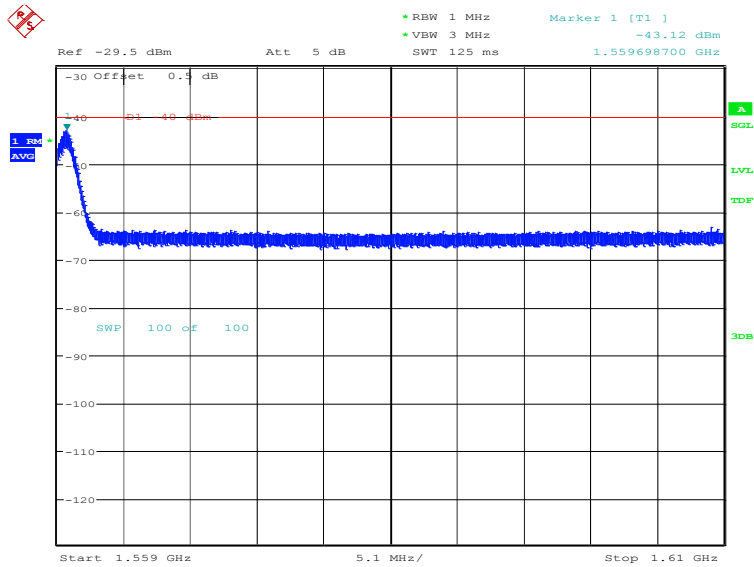

Date: 12.MAR.2019 16:48:31



**LTE band 66: 30MHz – 17.8GHz**  
Spurious emission limit –13dBm.

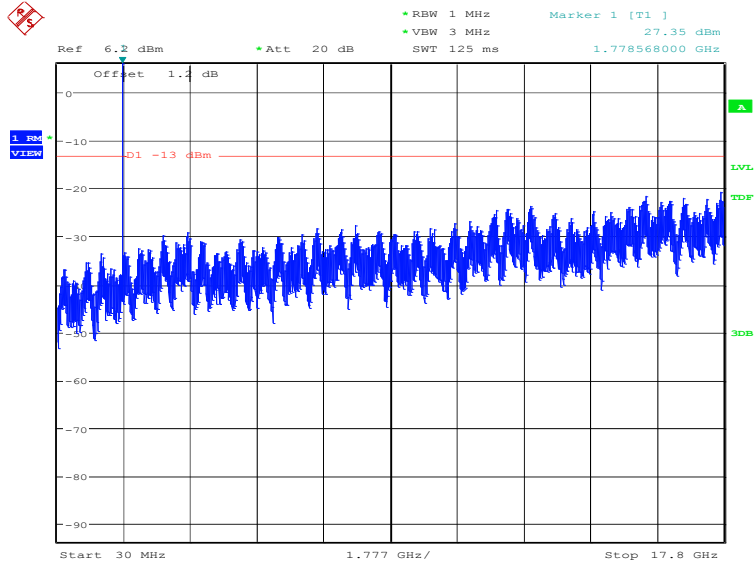

Date: 12.MAR.2019 16:53:27

## **A.8 PEAK-TO-AVERAGE POWER RATIO**

### **Reference**

FCC: CFR Part 24.232 (d), 27.50(a)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 5.7.1:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

### **A.8.1 Measurement limit**

not exceed 13 dB

### **A.8.2 Measurement results**

#### **LTE band 2, 20MHz**

Frequency(MHz)	PAPR(dB)		
1860.0	QPSK	16QAM	64QAM
	6.76	7.28	8.37

#### **LTE band 13,10MHz**

Frequency(MHz)	PAPR(dB)		
782.0	QPSK	16QAM	64QAM
	4.78	5.61	8.56

#### **LTE band 66, 20MHz**

Frequency(MHz)	PAPR(dB)		
1745.0	QPSK	16QAM	64QAM
	6.60	7.34	8.53

**ANNEX B: Accreditation Certificate**

United States Department of Commerce  
National Institute of Standards and Technology



---

**Certificate of Accreditation to ISO/IEC 17025:2005**

---

NVLAP LAB CODE: 600118-0

**Telecommunication Technology Labs, CAICT**  
Beijing  
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

**Electromagnetic Compatibility & Telecommunications**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).*

2018-09-28 through 2019-09-30  
*Effective Dates*



  
*For the National Voluntary Laboratory Accreditation Program*

\*\*\*END OF REPORT\*\*\*