



No. I22Z60846-SEM10

For

HMD Global Oy

5G Mobile Phone

Model Name: TA-1479

with

Hardware Version: V1.0

Software Version: 00WW_0_043

FCC ID: 2AJOTTA-1479

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample




Picture 2: Left Hand Touch Cheek Position

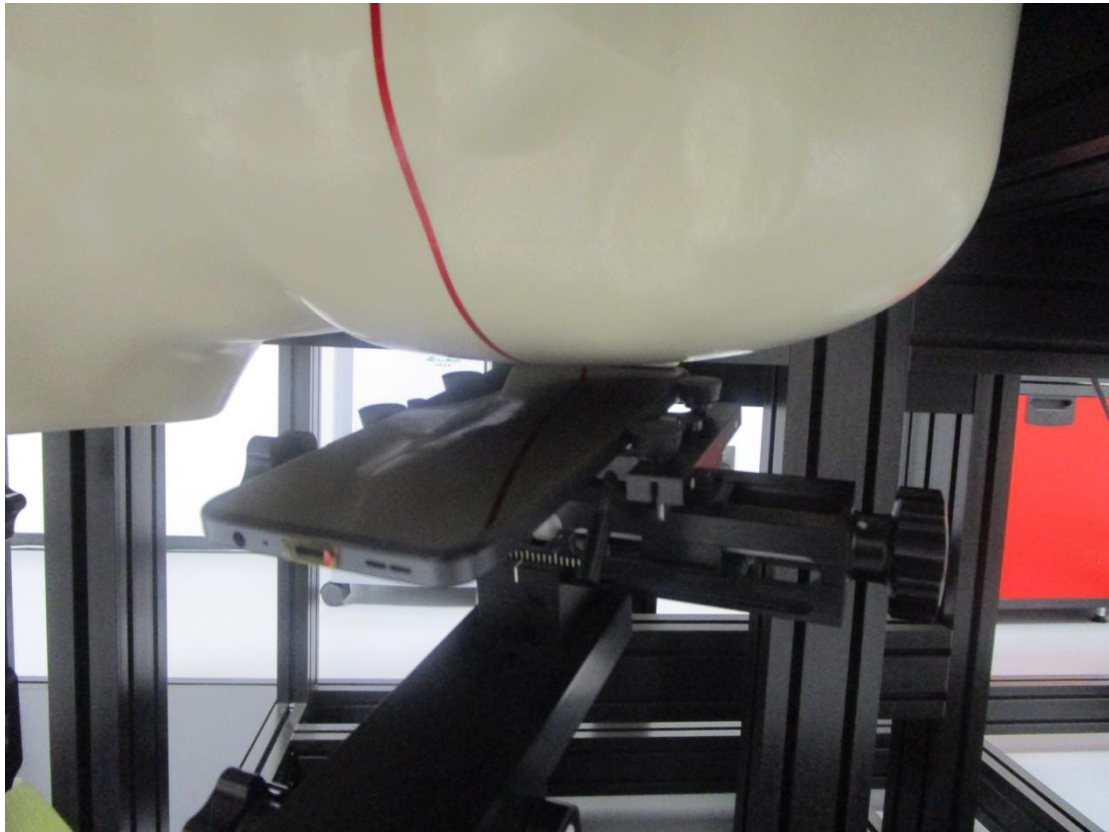

Picture 3: Left Hand Tilt 15° Position

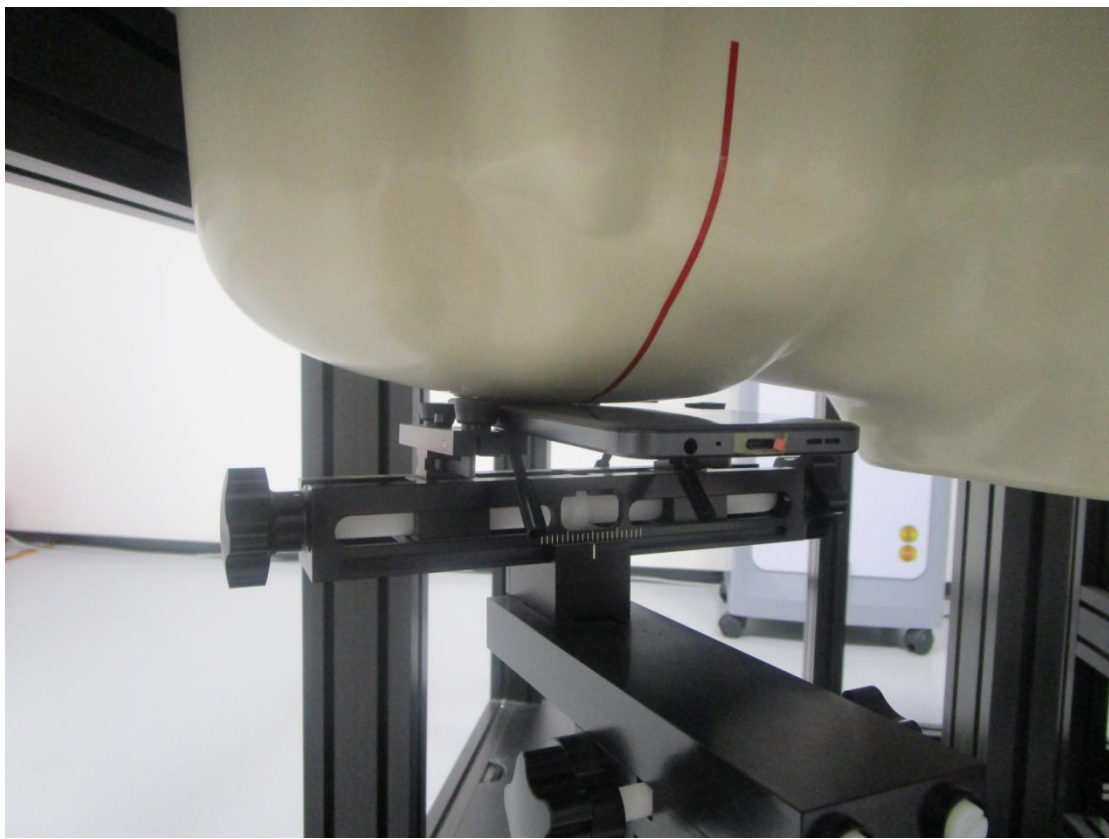


Picture 4: Right Hand Touch Cheek Position

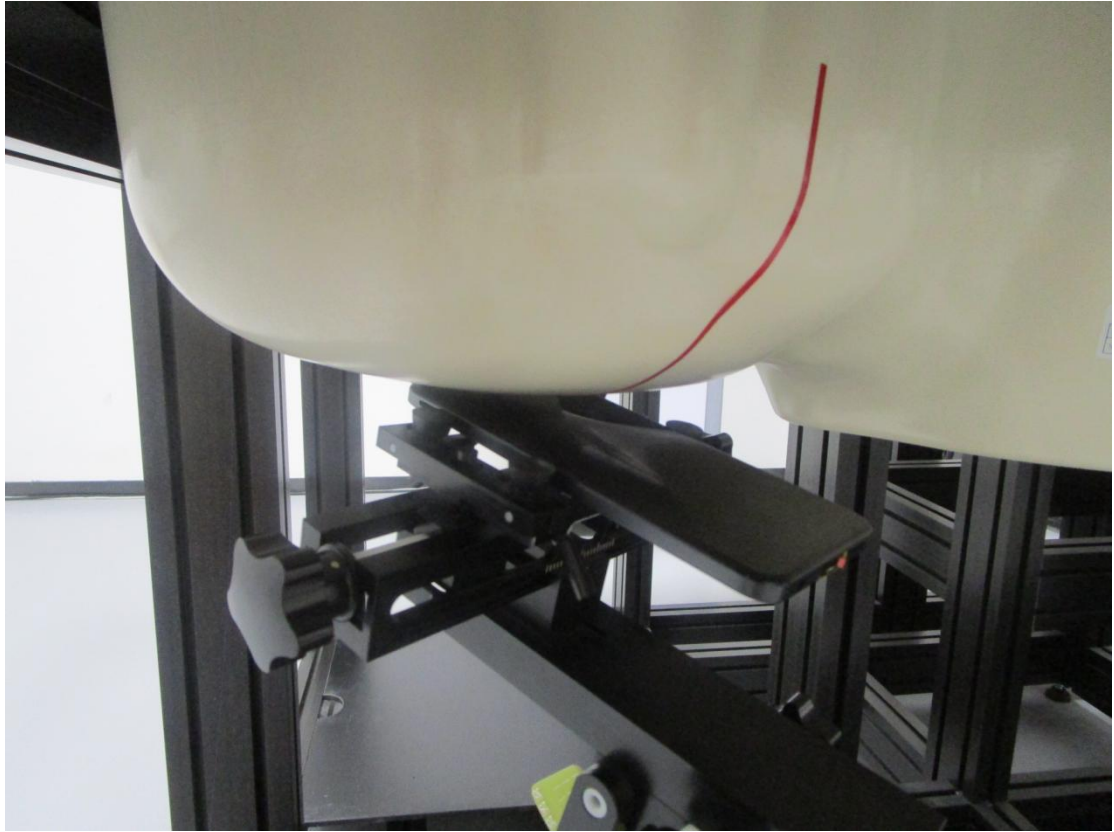


Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 10 test positions all with the distance =10mm/15mm/0mm between the EUT and the phantom bottom:

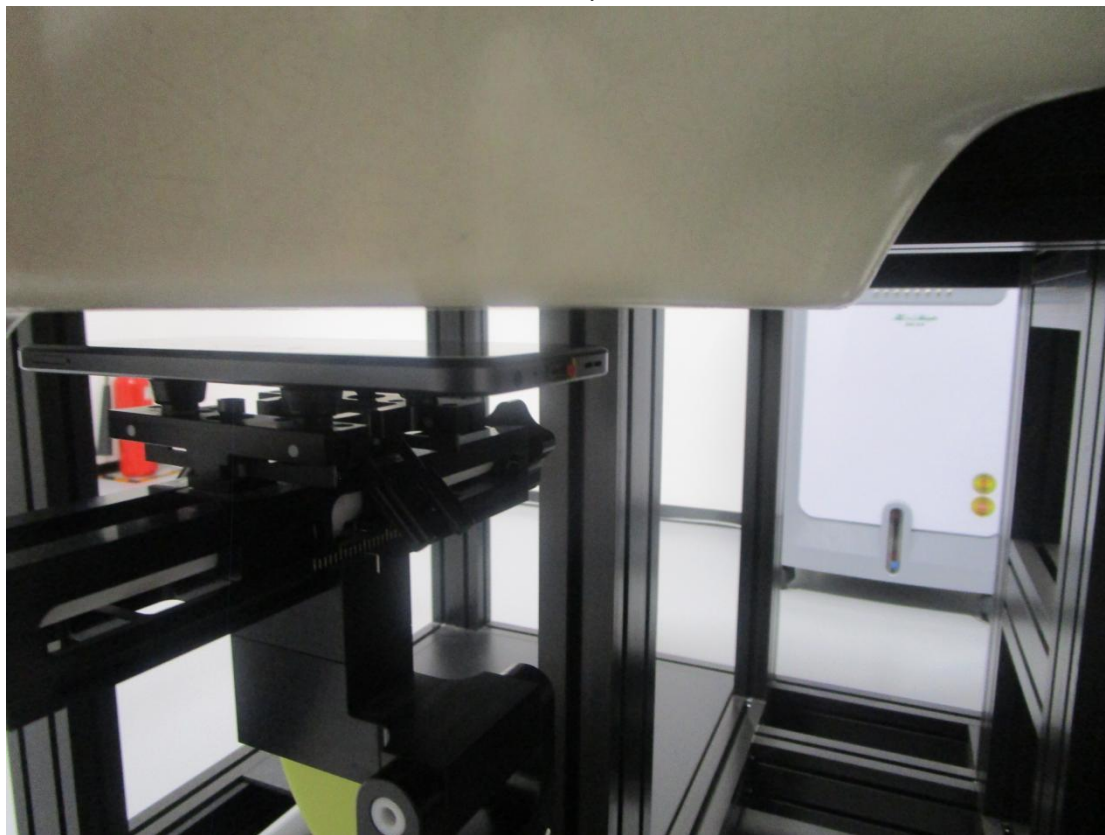


Picture 6: Front 10mm

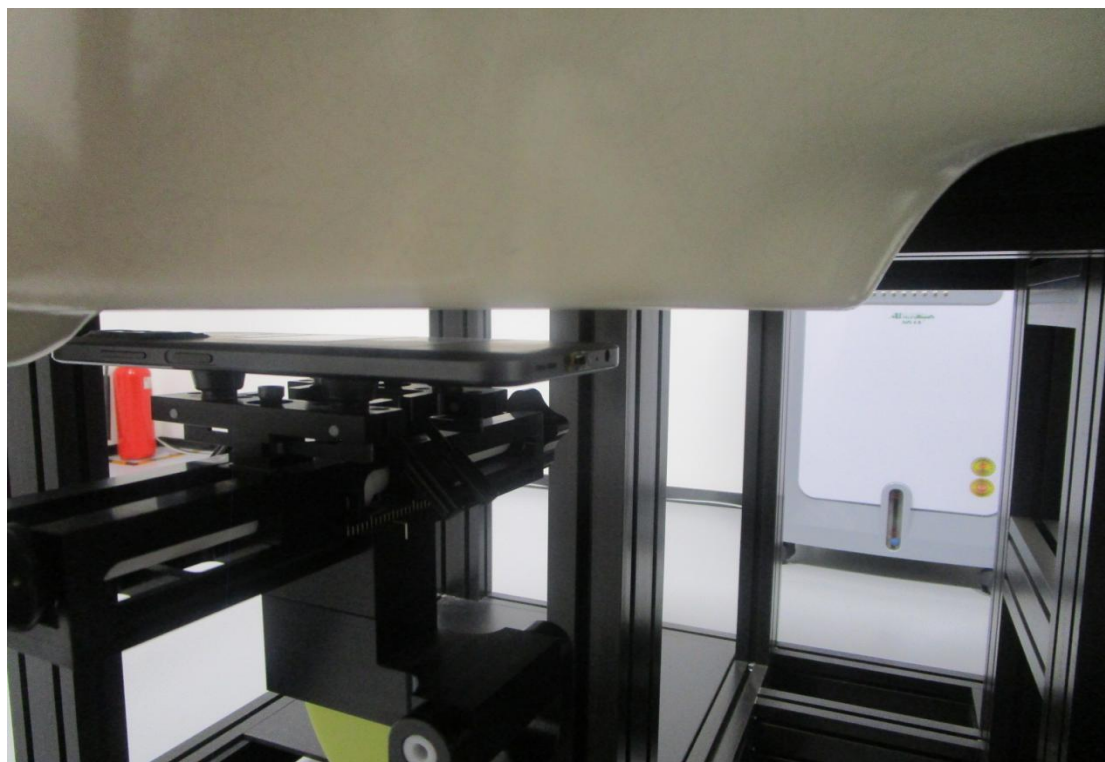


Picture 7: Rear 10mm

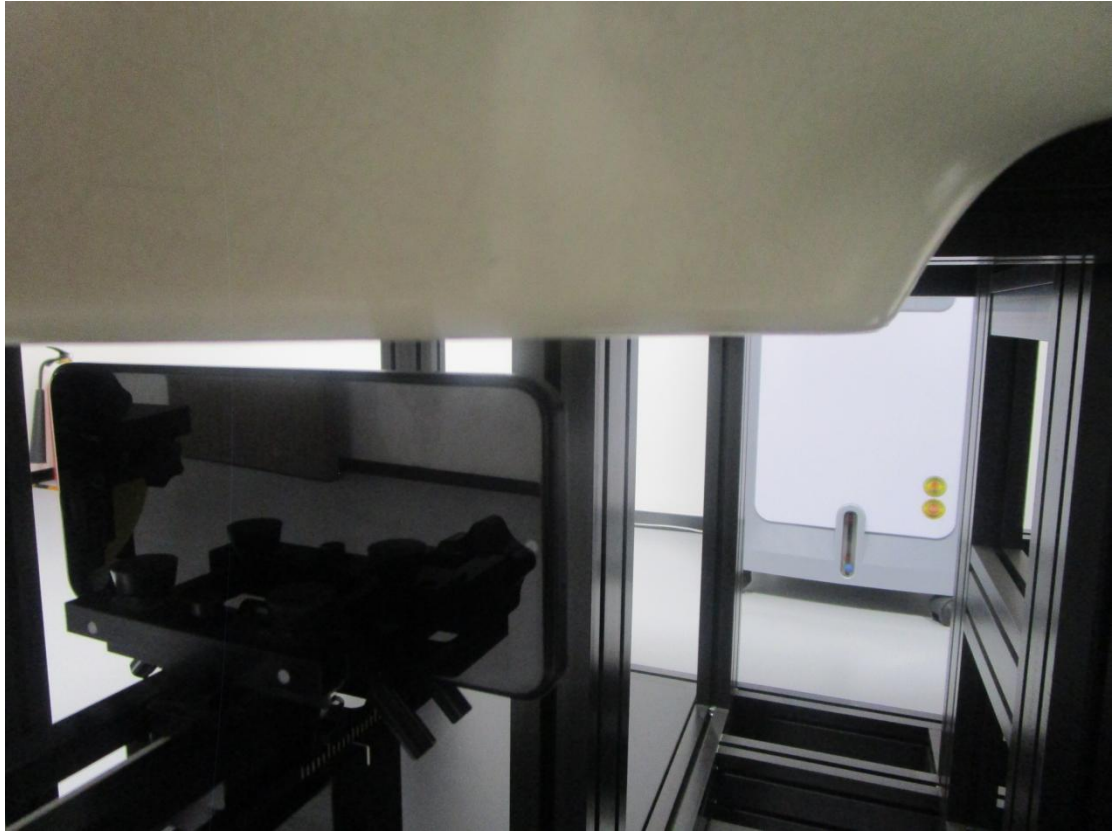

Picture 8: Left 10mm

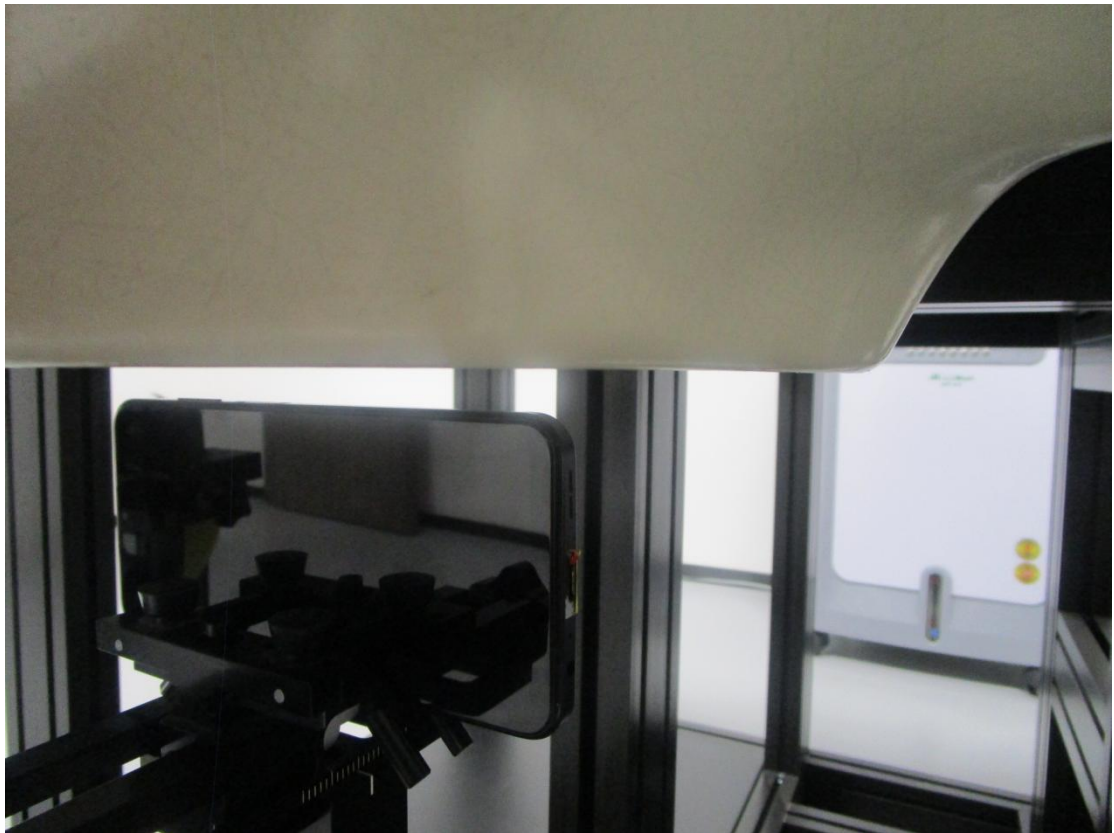


Picture 9: Right 10mm

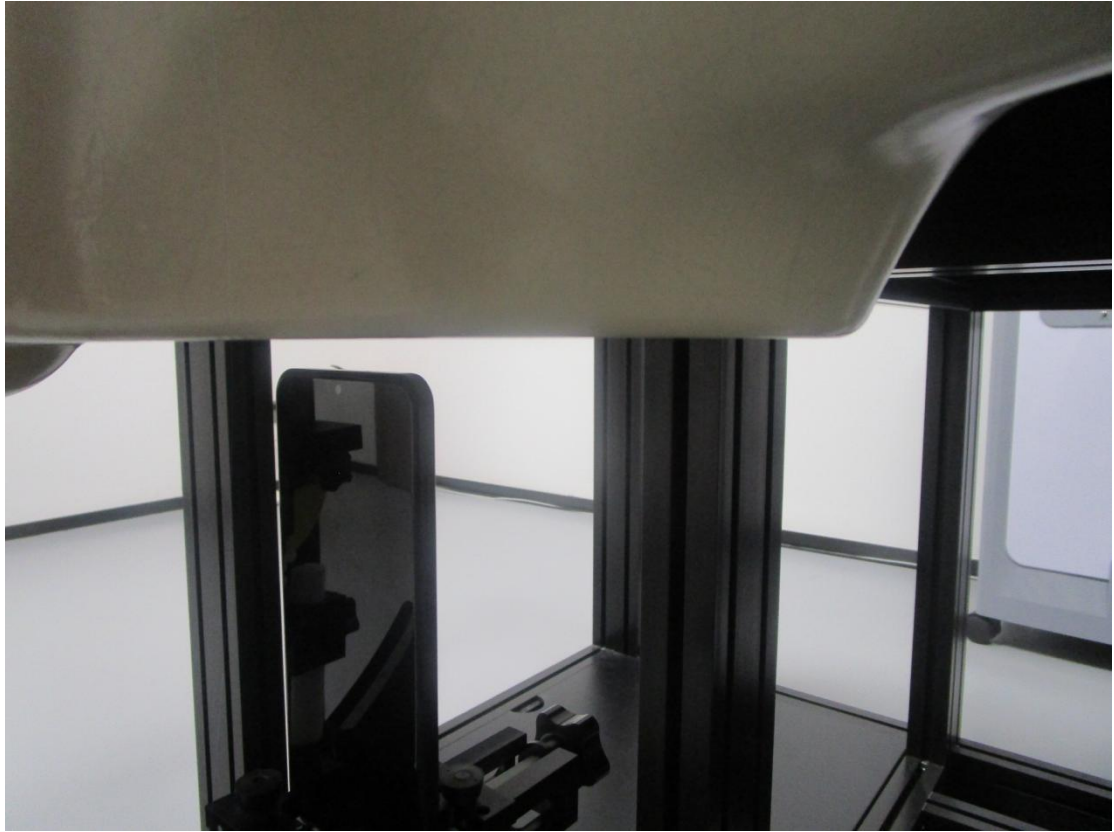

Picture 10: Top 10mm




Picture 11: Bottom 10mm

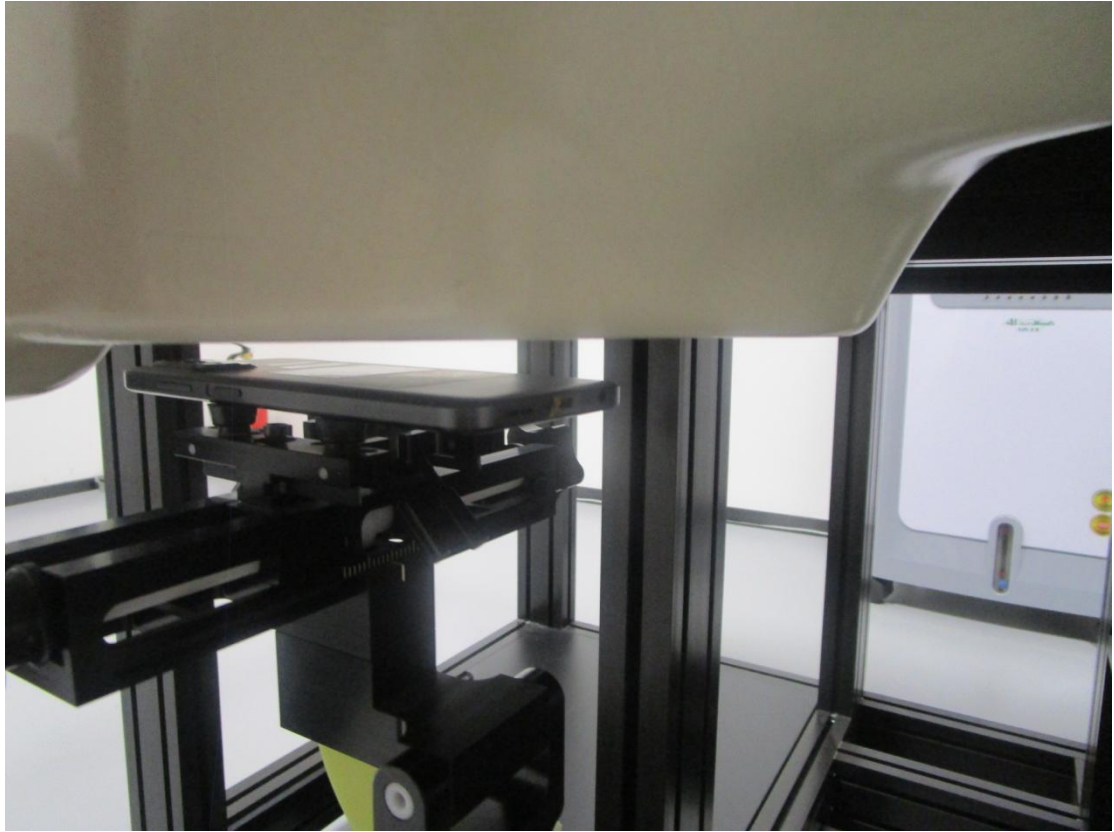


Picture 12: Rear 15mm



Picture 13: Front 15mm

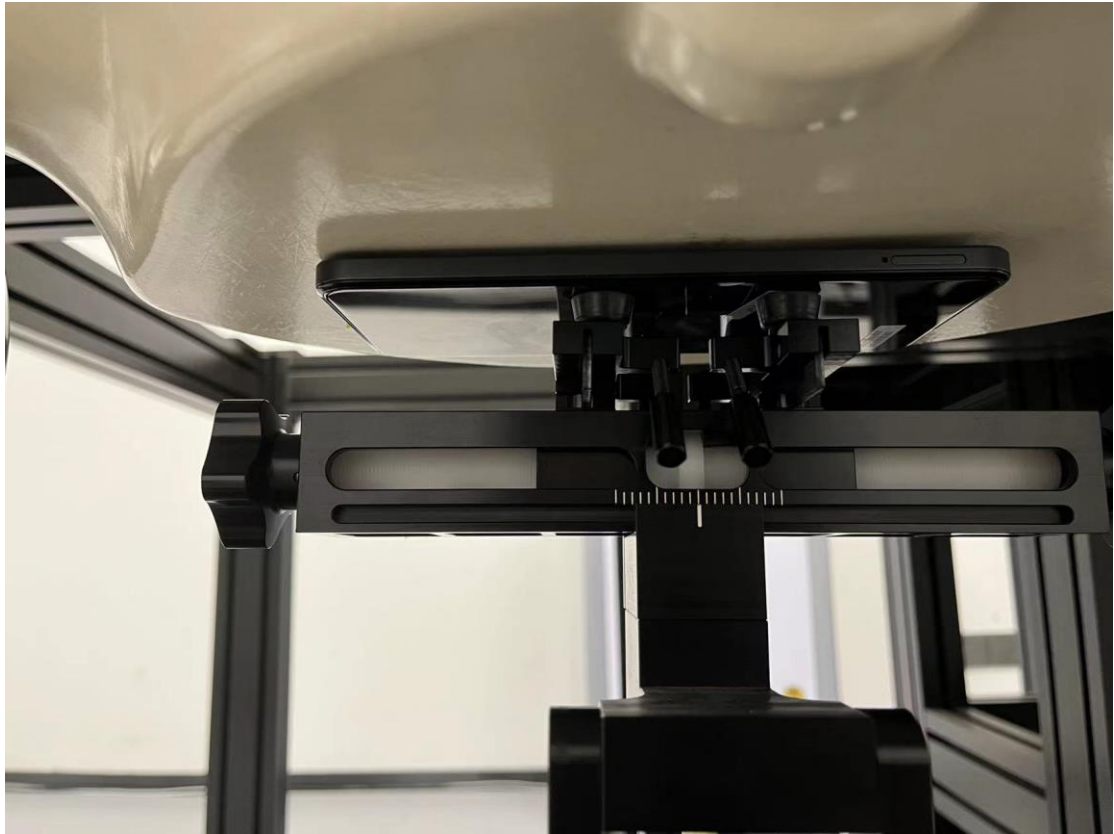

Picture 14: Front 0mm

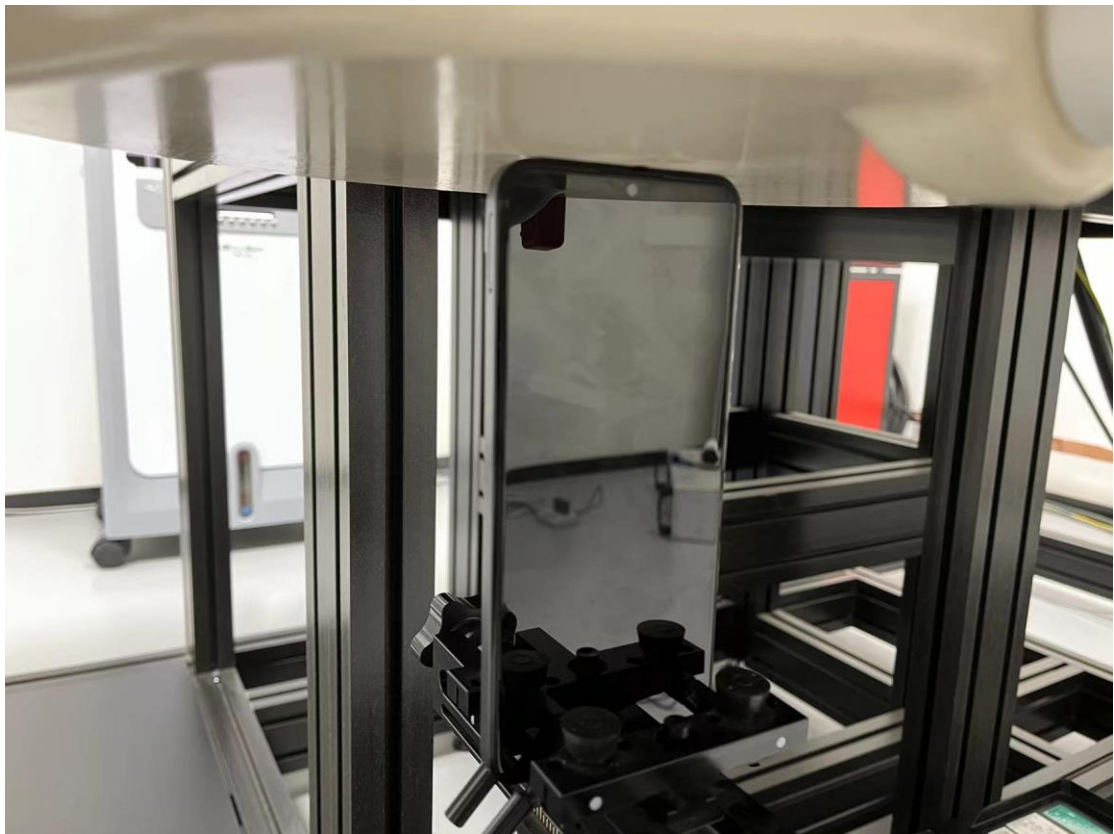

Picture 14: Top Edge 0mm