

BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02



Certificate #6613.01

# FCC TEST REPORT

## (PART 24)


Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9 Espoo 02600 Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9 Espoo 02600 Finland
Product:	Smartphone
Brand Name:	HMD
Model Name:	N159V
FCC ID:	2AJOTTA-1590
Date of tests:	Jan. 02, 2024 ~ Jan. 30, 2024

The tests have been carried out according to the requirements of the following standard:

- FCC PART 24, Subpart E    FCC PART 2  
 ANSI/TIA/EIA-603-D    ANSI/TIA/EIA-603-E    ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Jan. 30, 2024	 Date: Jan. 30, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>5</b>
<b>1 SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
1.1 MEASUREMENT UNCERTAINTY .....	7
1.2 TEST SITE AND INSTRUMENTS .....	8
<b>2 GENERAL INFORMATION .....</b>	<b>10</b>
2.1 GENERAL DESCRIPTION OF EUT .....	10
2.2 CONFIGURATION OF SYSTEM UNDER TEST .....	13
2.3 DESCRIPTION OF SUPPORT UNITS .....	14
2.4 TEST ITEM AND TEST CONFIGURATION.....	14
2.5 EUT OPERATING CONDITIONS .....	17
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	17
<b>3 TEST TYPES AND RESULTS .....</b>	<b>18</b>
3.1 OUTPUT POWER MEASUREMENT .....	18
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT .....	18
3.1.2 TEST PROCEDURES.....	18
3.1.3 TEST SETUP .....	19
3.1.4 TEST RESULTS .....	19
3.2 FREQUENCY STABILITY MEASUREMENT .....	33
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	33
3.2.2 TEST PROCEDURE .....	33
3.2.3 TEST SETUP .....	33
3.2.4 TEST RESULTS .....	34
3.3 OCCUPIED BANDWIDTH MEASUREMENT .....	35
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT .....	35
3.3.2 TEST SETUP .....	35
3.3.3 TEST PROCEDURES.....	35
3.3.4 TEST RESULTS .....	36
3.4 BAND EDGE MEASUREMENTC .....	37
3.4.1 LIMITS OF BAND EDGE MEASUREMENT .....	37
3.4.2 TEST SETUP .....	37
3.4.3 TEST PROCEDURES.....	38
3.4.4. TEST RESULTS .....	39
3.5 CONDUCTED SPURIOUS EMISSIONS.....	40
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT .....	40
3.5.2 TEST PROCEDURE .....	40
3.5.3 TEST SETUP .....	40
3.5.4 TEST RESULTS .....	41
3.6 RADIATED EMISSION MEASUREMENT .....	42
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	42
3.6.2 TEST PROCEDURES.....	42
3.6.3 DEVIATION FROM TEST STANDARD.....	42



BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02

3.6.4 TEST SETUP .....	43
3.6.5 TEST RESULTS .....	45
3.7 PEAK TO AVERAGE RATIO .....	81
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT .....	81
3.7.2 TEST SETUP .....	81
3.7.3 TEST PROCEDURES .....	81
3.7.4 TEST RESULTS .....	82
<b>4 INFORMATION ON THE TESTING LABORATORIES .....</b>	<b>83</b>
<b>5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....</b>	<b>84</b>
<b>6 APPENDIX .....</b>	<b>85</b>
GSM 1900 .....	85
PEAK-TO-AVERAGE RATIO(CCDF) .....	85
TEST RESULT .....	85
TEST GRAPHS .....	85
26DB BANDWIDTH AND OCCUPIED BANDWIDTH .....	89
TEST RESULT .....	89
TEST GRAPHS .....	90
BAND EDGE .....	96
TEST RESULT .....	96
TEST GRAPHS .....	97
CONDUCTED SPURIOUS EMISSION .....	99
TEST RESULT .....	99
TEST GRAPHS .....	100
FREQUENCY STABILITY .....	103
TEST RESULT .....	103
WCDMA BAND2 .....	106
PEAK-TO-AVERAGE RATIO .....	106
TEST RESULT .....	106
TEST GRAPHS .....	107
26DB BANDWIDTH AND OCCUPIED BANDWIDTH .....	109
TEST RESULT .....	109
TEST GRAPHS .....	110
BAND EDGE .....	113
TEST RESULT .....	113
TEST GRAPHS .....	114
CONDUCTED SPURIOUS EMISSION .....	115
TEST RESULT .....	115
TEST GRAPHS .....	116
FREQUENCY STABILITY .....	118
TEST RESULT .....	118
LTE BAND2 .....	119
PEAK-TO-AVERAGE RATIO(CCDF) .....	119
TEST RESULT .....	119
26DB BANDWIDTH AND OCCUPIED BANDWIDTH .....	129
TEST RESULT .....	129



BUREAU  
VERITAS

**Test Report No.: PSU-NQN2311090109RF02**

TEST GRAPHS .....	131
BAND EDGE .....	185
TEST RESULT .....	185
TEST GRAPHS .....	186
CONDUCTED SPURIOUS EMISSION.....	223
TEST RESULT .....	223
TEST GRAPHS .....	224
FREQUENCY STABILITY .....	252
TEST RESULT .....	252



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2311090109RF02	Original release	Jan. 30, 2024



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	Test lab*
§2.1046	Coducted Output Power	Compliance	A
§24.232(c)	Equivalent Isotropic Radiated Power	Compliance	A
§2.1055 §24.235	Frequency Stability	Compliance	A
§2.1049	Occupied Bandwidth	Compliance	A
§24.232(d)	Peak to average ratio	Compliance	A
§24.238(a)(b)	Band Edge Measurements	Compliance	A
§2.1051 §24.238(a)(b)	Conducted Spurious Emissions	Compliance	A
§2.1053 §24.238(a)(b)	Radiated Spurious Emissions	Compliance	A

### \*Test Lab Information Reference

#### Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

#### Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

#### Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	± 76.97Hz
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions & Radiated Power (30MHz~1GHz)	±4.98dB
Radiated emissions & Radiated Power (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Band Edge Measurements	±4.70dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## 1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Bilog Antenna	SCHWARZBEC K	VULB 9163	1264	Feb.28,22	Feb.27,24
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Stearite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna	Stearite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	W12.14	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Oct.27,23	Apr.26,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Oct.27,23	Apr.26,24



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

**NOTE:**

1. The calibration interval of the above test instruments is 12 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT*</b>	Smartphone	
<b>BRAND NAME*</b>	HMD	
<b>MODEL NAME*</b>	N159V	
<b>NOMINAL VOLTAGE*</b>	5.0Vdc (adapter) 3.87Vdc (battery)	
<b>MODULATION TYPE*</b>	<b>GSM:</b> GMSK <b>EDGE:</b> 8PSK <b>WCDMA:</b> HSDPA/HSUPA/DC-HSDPA <b>LTE Band 2/25:</b> QPSK, 16QAM, 64QAM	
<b>FREQUENCY RANGE</b>	<b>GSM, EDGE</b>	1850.2MHz ~ 1909.8MHz
	<b>WCDMA</b>	1852.4MHz ~ 1907.6MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 1.4MHz</b>	1850.7MHz ~ 1909.3MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 3MHz</b>	1851.5MHz ~ 1908.5MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 5MHz</b>	1852.5MHz ~ 1907.5MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 10MHz</b>	1855.0MHz ~ 1905.0MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 15MHz</b>	1857.5MHz ~ 1902.5MHz
	<b>LTE Band 2</b> <b>Channel Bandwidth: 20MHz</b>	1860.0MHz ~ 1900.0MHz
<b>MAX. EIRP POWER</b>	<b>GSM</b>	696.63mW
	<b>EDGE</b>	269.77mW
	<b>WCDMA</b>	99.77mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 1.4MHz</b>	95.72mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 3MHz</b>	93.97mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 5MHz</b>	95.06mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 10MHz</b>	95.94mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 15MHz</b>	93.97mW
	<b>LTE Band 2</b> <b>Channel Bandwidth: 20MHz</b>	96.61mW

BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

EMISSION DESIGNATOR	GSM	247KGXW
	EDGE	246KG7W
	WCDMA	4M15F9W
	LTE Band 2 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D
		16QAM: 1M09W7D
		64QAM: 1M09W7D
	LTE Band 2 Channel Bandwidth: 3MHz	QPSK: 2M69G7D
		16QAM: 2M69W7D
		64QAM: 2M69W7D
EMISSION DESIGNATOR	LTE Band 2 Channel Bandwidth: 5MHz	QPSK: 4M49G7D
		16QAM: 4M49W7D
		64QAM: 4M48W7D
	LTE Band 2 Channel Bandwidth: 10MHz	QPSK: 8M96G7D
		16QAM: 8M95W7D
		64QAM: 8M95W7D
	LTE Band 2 Channel Bandwidth: 15MHz	QPSK: 13M5G7D
		16QAM: 13M4W7D
		64QAM: 13M4W7D
	LTE Band 2 Channel Bandwidth: 20MHz	QPSK: 17M9G7D
		16QAM: 17M9W7D
		64QAM: 17M9W7D
ANTENNA TYPE*	PIFA Antenna with -3.7dBi gain for GSM1900/ WCDMA II/ LTE B2	
HW VERSION*	V 1.0	
SW VERSION*	02US_0_101	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	USB cable1: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable2: non-shielded cable, with w/o ferrite core, 1.0 meter	
EXTREME TEMPERATURE*	-20 ~ 60 °C	
EXTREME VOLTAGE*	3.4V ~ 4.45V	

**NOTE:**

- \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
GSM/GPRS/EDGE	1TX/1RX
WCDMA	1TX/1RX
LTE	1TX/1RX

4. For the product of N159V(FCC ID 2AJOTTA-1590), the following components are different between the first and second supply, other parameters are the same.

Component	First supply		Second supply	
	Supplier	specificatons	Supplier	specificatons
PCBA	3GB LPDDR	Longsys	3GB	biwin
	64GB EMMC	Longsys	64GB	biwin
	Charger IC	SGMICRO	3.78A Single Cell Switching Battery Charger IC	Unisemi
LCM	LCD	TCL	LCD a-Si TFT;720*1612	Icetron
Front camera	Camera	Union Image	5M;FF	Imaging
CAM	Camera	Union Image	13 AF	Sunwin
	Camera	SEGA	2M	Imaging
Acoustic	Vibrator	KunWang	0830	HONGZHIFA
	FPC	XINYE	Speaker FPC : 32.1*11.46*0.15	Lat
LED	Runlite	White LED;500mA;1500mA	latticepower	White LED;500mA;1500mA
Battery	gaoyuan	4000mAh;3.87V;4.45V	highpower	4000mAh;3.87V;4.45V
antenna	Haitong	Omni-directional,Linear, antenna shrapnel	Kexinhuacheng	Omni-directional, Linear,antenna shrapnel
MIC	Gettop	L2.75xW1.85xH0.9 mm	goertek	L2.75xW1.85xH0.9 mm
Data cable	Saibao	5V2A	TorchWay	5V2A

#### List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery 1	Gaoyuan	N/A	CH426385	Power Rating: 15.48Wh
Battery 2	Highpower	N/A	CH426385	Power Rating: 15.48Wh
AC Adapter	BaiJunDa	BaiJunDa	HAD-010U	I/P: 100-240Vac, O/P: 4.8~5.4Vdc, 2.0A
USB Cable 1	Saibao	N/A	SZN-A036A	Signal Line, 1.0meter 5V 2A
USB Cable 2	TorchWay	N/A	JWUB1651-ZN01H	Signal Line, 1.0meter 5V 2A







BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## 2.2 CONFIGURATION OF SYSTEM UNDER TEST

### FOR RADIATION EMISSION TEST

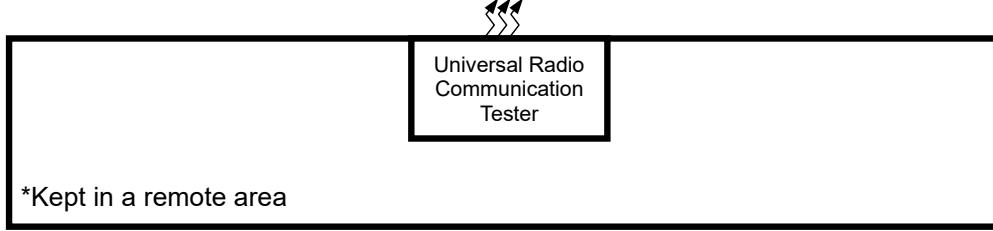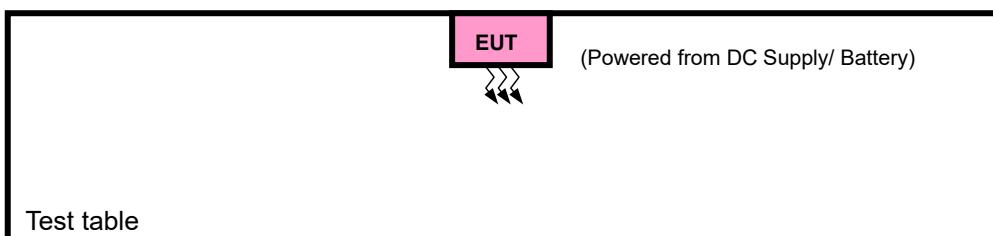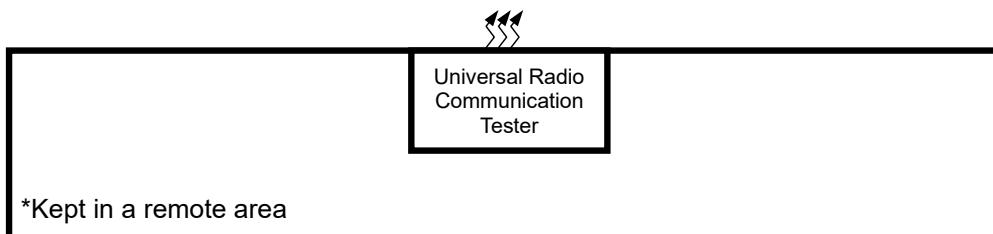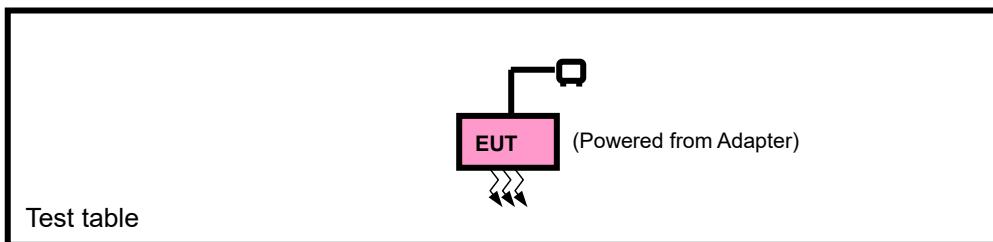



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC Source	HYELEC	HY3010B	551016	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

## 2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter with GSM or WCDMA or LTE link
B	EUT + DC Supply with GSM or WCDMA or LTE link

### GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	EIRP	512 to 810	512, 661, 810	GSM,EDGE
B	FREQUENCY STABILITY	512 to 810	512, 661, 810	GSM,EDGE
A	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GSM,EDGE
A	PEAK TO AVERAGE RATIO	512 to 810	512, 661, 810	GSM,EDGE
A	BAND EDGE	512 to 810	512, 810	GSM,EDGE
A	CONDUCETED EMISSION	512 to 810	512, 661, 810	GSM,EDGE
A	RADIATED EMISSION	512 to 810	512, 661, 810	GSM,EDGE

BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## WCDMA

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
B	FREQUENCY STABILITY	9262 to 9538	9262, 9400, 9538	WCDMA
A	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
A	PEAK TO AVERAGE RATIO	9262 to 9538	9262, 9400, 9538	WCDMA
A	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
A	CONDUCED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
A	RADIATED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA

## LTE BAND 2 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM,64QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	100 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	100 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset 100 RB / 0 RB Offset

BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02

A	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
			19193	1.4MHz	QPSK,16QAM, 64QAM	6 RB / 0 RB Offset
		18615 to 19185	18615	3MHz	QPSK,16QAM, 64QAM	1 RB / 5 RB Offset
			19185	3MHz	QPSK,16QAM, 64QAM	6 RB / 0 RB Offset
		18625 to 19175	18625	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
			19175	5MHz	QPSK,16QAM, 64QAM	25 RB / 0 RB Offset
		18650 to 19150	18650	10MHz	QPSK,16QAM, 64QAM	1 RB / 24 RB Offset
			19150	10MHz	QPSK,16QAM, 64QAM	50 RB / 0 RB Offset
		18675 to 19125	18675	15MHz	QPSK,16QAM, 64QAM	1 RB / 74 RB Offset
			19125	15MHz	QPSK,16QAM, 64QAM	75 RB / 0 RB Offset
		18700 to 19100	26140	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
			26590	20MHz	QPSK,16QAM, 64QAM	100 RB / 0 RB Offset
A	CONDUCTED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM, 64QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	DC 5V By Adapter	Hanwen Xu
FREQUENCY STABILITY	23deg. C, 61%RH	DC 3.85V By DC Supply	Hanwen Xu
OCCUPIED BANDWIDTH	23deg. C, 61%RH	DC5V By Adapter	Hanwen Xu
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	DC 5V By Adapter	Hanwen Xu
BAND EDGE	23deg. C, 61%RH	DC5V By Adapter	Hanwen Xu
CONDUCUDET EMISSION	23deg. C, 61%RH	DC5V By Adapter	Hanwen Xu
RADIATED EMISSION	23deg. C, 70%RH	DC5V By Adapter	Hanwen Xu

**2.5 EUT OPERATING CONDITIONS**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

**2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-D**

**ANSI/TIA/EIA-603-E**

**ANSI C63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.



## 3 TEST TYPES AND RESULTS

### 3.1 OUTPUT POWER MEASUREMENT

#### 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

#### 3.1.2 TEST PROCEDURES

##### EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_c$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_T$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_c$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

##### CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

### 3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:

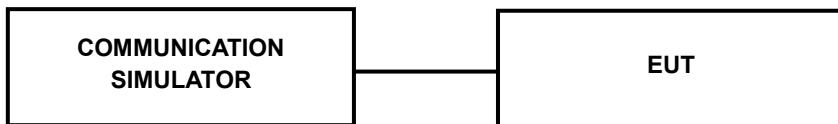

### 3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency	1850.2	1880	1909.8
GSM	30.04	29.93	29.92
GPRS (GMSK, 1Tx-slot)	29.84	29.97	<b>30.09</b>
GPRS (GMSK, 2Tx-slot)	27.89	27.83	28.08
GPRS (GMSK, 3Tx-slot)	26.79	26.76	26.93
GPRS (GMSK, 4Tx-slot)	25.62	25.54	25.84
EDGE (8PSK, 1Tx-slot)	25.44	25.76	25.97
EDGE (8PSK, 2Tx-slot)	24.16	24.22	24.45
EDGE (8PSK, 3Tx-slot)	23.07	23.12	23.37
EDGE (8PSK, 4Tx-slot)	21.78	21.76	21.88

Band	WCDMA II		
Channel	9262	9400	9538
Frequency	1852.4	1880	1907.6
RMC 12.2K	23.56	23.52	<b>23.69</b>
HSDPA Subtest-1	22.63	22.52	22.66
HSDPA Subtest-2	22.61	22.56	22.57
HSDPA Subtest-3	22.23	22.00	22.15
HSDPA Subtest-4	22.20	22.04	22.19
DC-HSDPA Subtest-1	22.40	22.40	22.47
DC-HSDPA Subtest-2	22.47	22.50	22.53
DC-HSDPA Subtest-3	22.14	21.91	21.95
DC-HSDPA Subtest-4	22.22	21.90	22.09
HSUPA Subtest-1	22.56	22.39	22.55
HSUPA Subtest-2	21.63	21.52	21.51
HSUPA Subtest-3	22.13	21.90	21.92
HSUPA Subtest-4	21.58	21.50	21.50
HSUPA Subtest-5	22.63	22.50	22.52

BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## LTE BAND 2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz
2/ 1.4	QPSK	1	0	23.24	23.21	23.23
		1	2	23.41	<b>23.51</b>	23.35
		1	5	23.08	23.01	22.94
		3	0	23.02	23.10	23.04
		3	1	23.12	23.15	<b>23.20</b>
		3	3	23.13	23.09	23.11
		6	0	22.37	22.45	22.32
	16QAM	1	0	22.38	22.42	22.39
		1	2	22.67	22.74	22.61
		1	5	22.28	22.33	22.11
		3	0	22.24	22.38	22.34
		3	1	22.52	22.41	22.49
		3	3	22.18	22.33	22.20
		6	0	21.25	21.39	21.37
	64QAM	1	0	21.17	21.27	21.22
		1	2	21.46	21.40	21.50
		1	5	21.14	21.07	21.12
		3	0	21.22	21.23	21.14
		3	1	21.30	21.28	21.42
		3	3	21.12	21.16	21.25
		6	0	20.26	20.21	20.33



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz
2/3	QPSK	1	0	23.13	23.27	<b>23.43</b>
		1	7	23.35	23.42	23.36
		1	14	23.04	23.07	23.11
		8	0	22.31	22.49	22.36
		8	3	<b>22.51</b>	22.33	22.46
		8	7	22.28	22.31	22.31
		15	0	22.34	22.38	22.36
	16QAM	1	0	22.34	22.33	22.34
		1	7	22.63	22.75	22.60
		1	14	22.32	22.38	22.11
		8	0	21.31	21.39	21.39
		8	3	21.51	21.56	21.46
		8	7	21.27	21.35	21.35
		15	0	21.34	21.42	21.48
	64QAM	1	0	21.12	21.28	21.26
		1	7	21.52	21.38	21.43
		1	14	21.07	21.05	21.06
		8	0	20.34	20.46	20.36
		8	3	20.42	20.39	20.53
		8	7	20.22	20.30	20.30
		15	0	20.28	20.35	20.35



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz
2/ 5	QPSK	1	0	23.16	23.23	23.21
		1	12	23.36	<b>23.48</b>	23.35
		1	24	23.07	23.16	23.09
		12	0	22.38	<b>22.49</b>	22.36
		12	6	22.42	22.45	22.43
		12	13	22.23	22.27	22.34
		25	0	22.38	22.33	22.36
	16QAM	1	0	22.41	22.33	22.37
		1	12	22.75	22.65	22.72
		1	24	22.28	22.39	22.14
		12	0	21.26	21.33	21.36
		12	6	21.49	21.45	21.53
		12	13	21.28	21.37	21.35
		25	0	21.33	21.41	21.38
	64QAM	1	0	21.14	21.34	21.21
		1	12	21.56	21.45	21.45
		1	24	21.06	21.07	21.13
		12	0	20.29	20.37	20.38
		12	6	20.46	20.39	20.52
		12	13	20.19	20.31	20.36
		25	0	20.37	20.35	20.36



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz
2/ 10	QPSK	1	0	23.21	23.15	23.29
		1	24	23.33	<b>23.52</b>	23.38
		1	49	23.09	23.11	22.92
		25	0	22.40	<b>22.53</b>	22.40
		25	12	22.43	22.47	22.47
		25	25	22.23	22.38	22.31
		50	0	22.39	22.36	22.33
	16QAM	1	0	22.35	22.34	22.37
		1	24	22.69	22.65	22.66
		1	49	22.25	22.37	22.13
		25	0	21.36	21.37	21.27
		25	12	21.44	21.56	21.47
		25	25	21.19	21.33	21.31
		50	0	21.28	21.41	21.37
	64QAM	1	0	21.23	21.28	21.25
		1	24	21.45	21.34	21.44
		1	49	21.07	21.13	21.04
		25	0	20.29	20.45	20.31
		25	12	20.38	20.39	20.57
		25	25	20.23	20.29	20.34
		50	0	20.32	20.34	20.32



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz
2/ 15	QPSK	1	0	23.20	23.28	23.27
		1	37	<b>23.43</b>	23.39	23.34
		1	74	22.99	23.05	22.90
		36	0	22.28	22.42	22.38
		36	19	22.51	22.51	22.48
		36	39	22.29	22.24	22.31
		75	0	22.32	22.42	22.35
	16QAM	1	0	22.36	22.40	22.34
		1	37	22.66	22.77	22.69
		1	74	22.25	22.29	22.22
		36	0	21.34	21.46	21.30
		36	19	21.45	21.43	21.53
		36	39	21.25	21.31	21.32
		75	0	21.22	21.32	21.45
	64QAM	1	0	21.22	21.30	21.17
		1	37	21.46	21.46	21.50
		1	74	21.02	21.18	21.13
		36	0	20.24	20.43	20.42
		36	19	20.34	20.35	20.53
		36	39	20.33	20.22	20.32
		75	0	20.30	20.22	20.36



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz
2/ 20	QPSK	1	0	23.28	23.29	23.36
		1	50	23.42	23.55	23.49
		1	99	23.01	23.08	23.02
		50	0	22.41	22.56	22.49
		50	25	22.56	<b>22.62</b>	22.56
		50	50	22.33	22.39	22.38
		100	0	22.42	22.46	22.44
	16QAM	1	0	22.44	22.48	22.46
		1	50	22.76	22.78	22.74
		1	99	22.35	22.43	22.23
		50	0	21.38	21.48	21.42
		50	25	21.56	21.58	21.55
		50	50	21.33	21.41	21.37
		100	0	21.36	21.43	21.50
	64QAM	1	0	21.24	21.35	21.32
		1	50	21.58	21.48	21.56
		1	99	21.12	21.19	21.14
		50	0	20.37	20.48	20.43
		50	25	20.48	20.47	20.58
		50	50	20.34	20.35	20.43
		100	0	20.41	20.36	20.45



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

### EIRP POWER (dBm)

#### GSM

Channel	Frequency (MHz)	Conducted Power (dBm)	$G_T-L_C$ (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	30.04	-1.66	28.38	688.65	2
661	1880.0	29.97	-1.66	28.31	677.64	2
810	1909.8	30.09	-1.66	28.43	696.63	2

#### EDGE

Channel	Frequency (MHz)	Conducted Power (dBm)	$G_T-L_C$ (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	25.64	-1.66	23.98	250.03	2
661	1880.0	25.76	-1.66	24.1	257.04	2
810	1909.8	25.97	-1.66	24.31	269.77	2

#### WCDMA

Channel	Frequency (MHz)	Conducted Power (dBm)	$G_T-L_C$ (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
9262	1852.4	23.56	-3.7	19.86	96.83	2
9400	1880	23.52	-3.7	19.82	95.94	2
9538	1907.6	23.69	-3.7	19.99	99.77	2



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## LTE BAND 2

### CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	23.41	-3.7	19.71	93.54	2
18900	1880.0	23.51	-3.7	19.81	95.72	2
19193	1909.3	23.35	-3.7	19.65	92.26	2

### CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.67	-3.7	18.97	78.89	2
18900	1880.0	22.74	-3.7	19.04	80.17	2
19193	1909.3	22.61	-3.7	18.91	77.8	2

### CHANNEL BANDWIDTH: 1.4MHz 64QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	21.46	-3.7	17.76	59.7	2
18900	1880.0	21.4	-3.7	17.7	58.88	2
19193	1908.3	21.5	-3.7	17.8	60.26	2



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

**CHANNEL BANDWIDTH: 3MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	23.35	-3.7	19.65	92.26	2
18900	1880.0	23.42	-3.7	19.72	93.76	2
19185	1908.5	23.43	-3.7	19.73	93.97	2

**CHANNEL BANDWIDTH: 3MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.63	-3.7	18.93	78.16	2
18900	1880.0	22.75	-3.7	19.05	80.35	2
19185	1908.5	22.6	-3.7	18.9	77.62	2

**CHANNEL BANDWIDTH: 3MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	21.52	-3.7	17.82	60.53	2
18900	1880.0	21.38	-3.7	17.68	58.61	2
19185	1908.5	21.43	-3.7	17.73	59.29	2



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	23.36	-3.7	19.66	92.47	2
18900	1880.0	23.48	-3.7	19.78	95.06	2
19175	1907.5	23.35	-3.7	19.65	92.26	2

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.75	-3.7	19.05	80.35	2
18900	1880.0	22.65	-3.7	18.95	78.52	2
19175	1907.5	22.72	-3.7	19.02	79.8	2

**CHANNEL BANDWIDTH: 5MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	21.56	-3.7	17.86	61.09	2
18900	1880.0	21.45	-3.7	17.75	59.57	2
19175	1907.5	21.45	-3.7	17.75	59.57	2



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	23.33	-3.7	19.63	91.83	2
18900	1880.0	23.52	-3.7	19.82	95.94	2
19150	1905.0	23.38	-3.7	19.68	92.9	2

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.69	-3.7	18.99	79.25	2
18900	1880.0	22.65	-3.7	18.95	78.52	2
19150	1905.0	22.66	-3.7	18.96	78.7	2

**CHANNEL BANDWIDTH: 10MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	21.45	-3.7	17.75	59.57	2
18900	1880.0	21.34	-3.7	17.64	58.08	2
19150	1905.0	21.44	-3.7	17.74	59.43	2



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

**CHANNEL BANDWIDTH: 15MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	23.43	-3.7	19.73	93.97	2
18900	1880.0	23.39	-3.7	19.69	93.11	2
19125	1902.5	23.34	-3.7	19.64	92.04	2

**CHANNEL BANDWIDTH: 15MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.66	-3.7	18.96	78.7	2
18900	1880.0	22.77	-3.7	19.07	80.72	2
19125	1902.5	22.69	-3.7	18.99	79.25	2

**CHANNEL BANDWIDTH: 15MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	21.46	-3.7	17.76	59.7	2
18900	1880.0	21.46	-3.7	17.76	59.7	2
19125	1902.5	21.5	-3.7	17.8	60.26	2



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

**CHANNEL BANDWIDTH: 20MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	23.42	-3.7	19.72	93.76	2
18900	1880	23.55	-3.7	19.85	96.61	2
19100	1900	23.49	-3.7	19.79	95.28	2

**CHANNEL BANDWIDTH: 20MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.76	-3.7	19.06	80.54	2
18900	1880	22.78	-3.7	19.08	80.91	2
19100	1900	22.74	-3.7	19.04	80.17	2

**CHANNEL BANDWIDTH: 20MHz 64QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>C</sub> (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	21.58	-3.7	17.88	61.38	2
18900	1880	21.48	-3.7	17.78	59.98	2
19100	1900	21.56	-3.7	17.86	61.09	2

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## 3.2 FREQUENCY STABILITY MEASUREMENT

### 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

#### 3.2.3 TEST SETUP

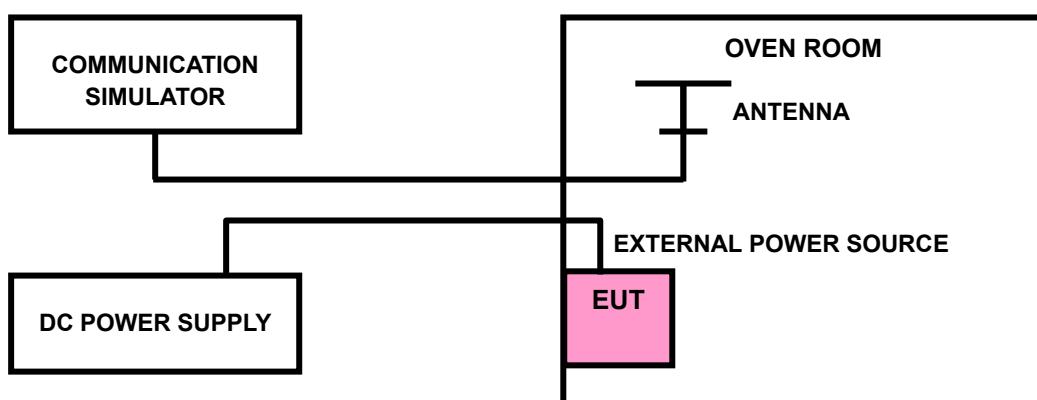



**Test Report No.: PSU-NQN2311090109RF02**

### 3.2.4 TEST RESULTS

Please Refer to Appendix Of this test report.

Note: VL = Low voltage(3.4V); VN/NV = Normal voltage(3.85V); VH = High voltage(4.45V);  
NT = Normal temperature (25°C)



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

### 3.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### 3.3.2 TEST SETUP

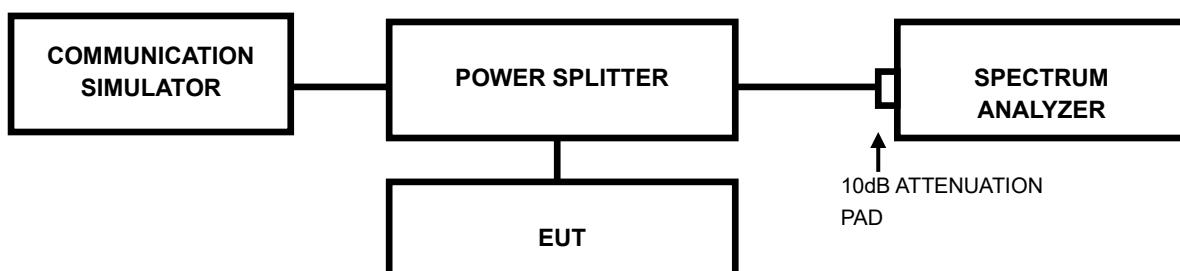

#### 3.3.3 TEST PROCEDURES

- a. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

### 3.3.4 TEST RESULTS

Please Refer to Appendix Of this test report.



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

### 3.4 BAND EDGE MEASUREMENTC

#### 3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 3.4.2 TEST SETUP

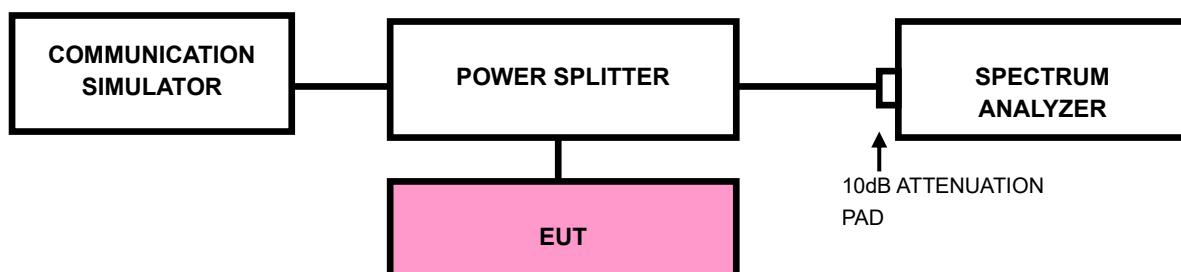



### 3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW)
- d) Set the resolution bandwidth (RBW)  $\geq 1\%$  EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to  $\geq 3 \times$  RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to  $\geq 1001$ .
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

### 3.4.4. TEST RESULTS

Please Refer to Appendix Of this test report.



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

### 3.5 CONDUCTED SPURIOUS EMISSIONS


#### 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30MHz up to a frequency including its 10<sup>th</sup> harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

#### 3.5.3 TEST SETUP

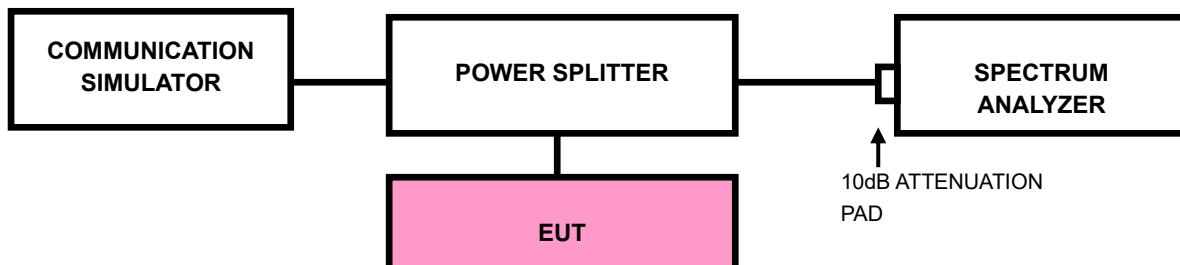



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

### 3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Appendix Of this test report.



Test Report No.: PSU-NQN2311090109RF02

### 3.6 RADIATED EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

#### 3.6.3 DEVIATION FROM TEST STANDARD

No deviation




BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

### 3.6.4 TEST SETUP

#### < Frequency Range below 30MHz >

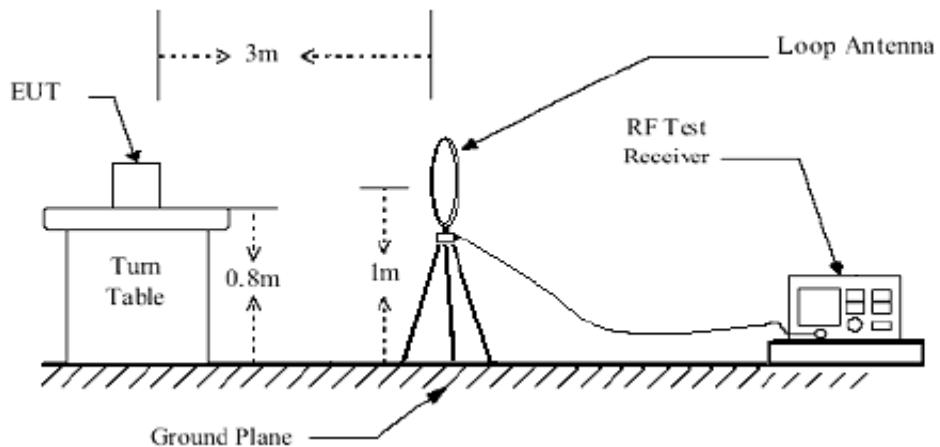

#### < Frequency Range 30MHz~1GHz >

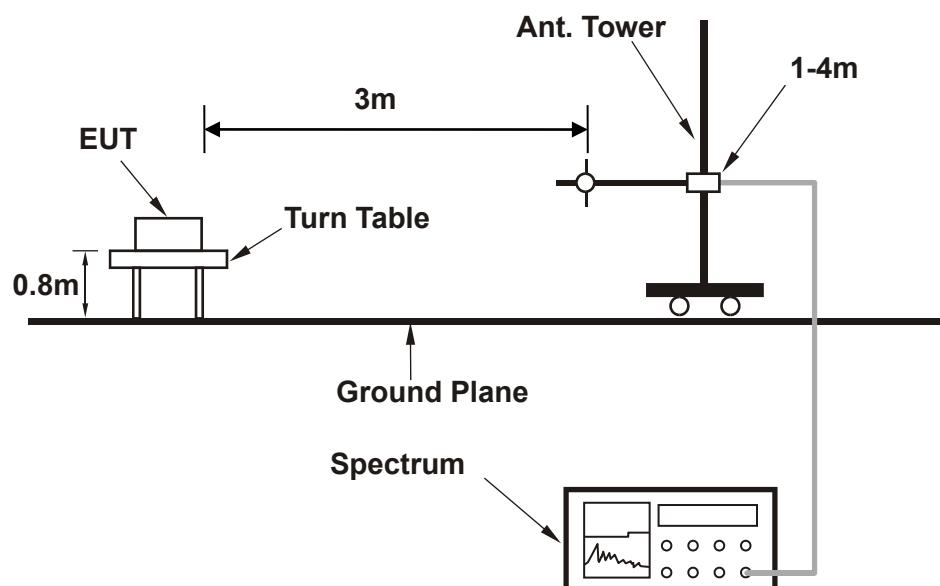




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

<Frequency Range above 1GHz>

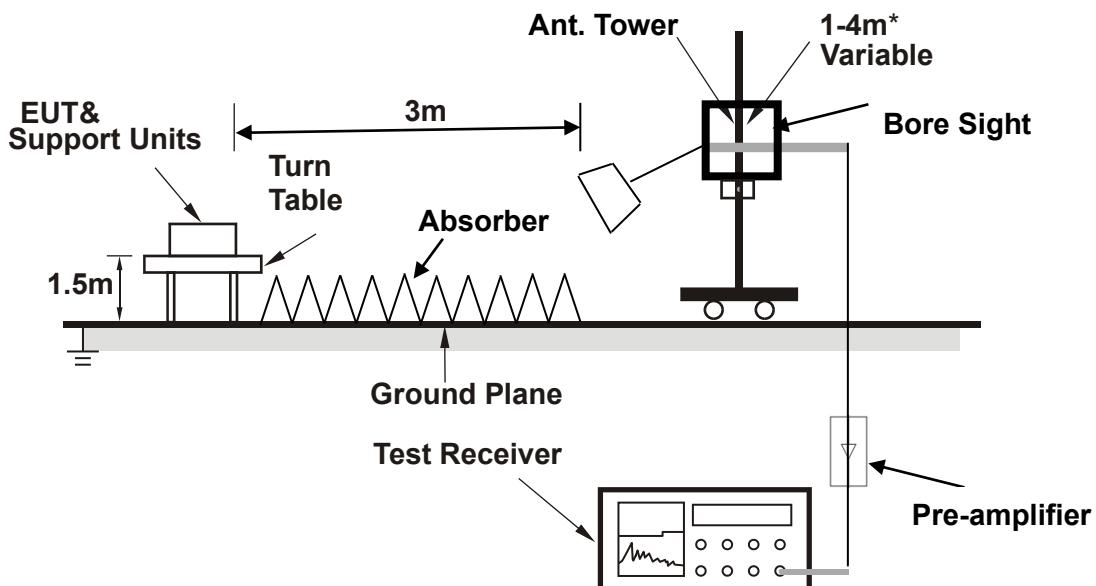

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

### 3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.


#### BELOW 1GHz WORST-CASE DATA

30 MHz – 1GHz data:

GSM 1900: CH 661

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	36.305	-51.12	-13.00	38.12	5.98	H	296.2	2.00
1	58.615	-43.42	-13.00	30.42	3.31	H	359	2.00
1	104.205	-57.77	-13.00	44.77	-4.05	H	277.8	1.00
1	233.215	-40.08	-13.00	27.08	8.96	H	88.2	2.00
1	463.105	-52.79	-13.00	39.79	7.62	H	68.6	1.00
1	861.775	-50.96	-13.00	37.96	13.91	H	296.2	2.00

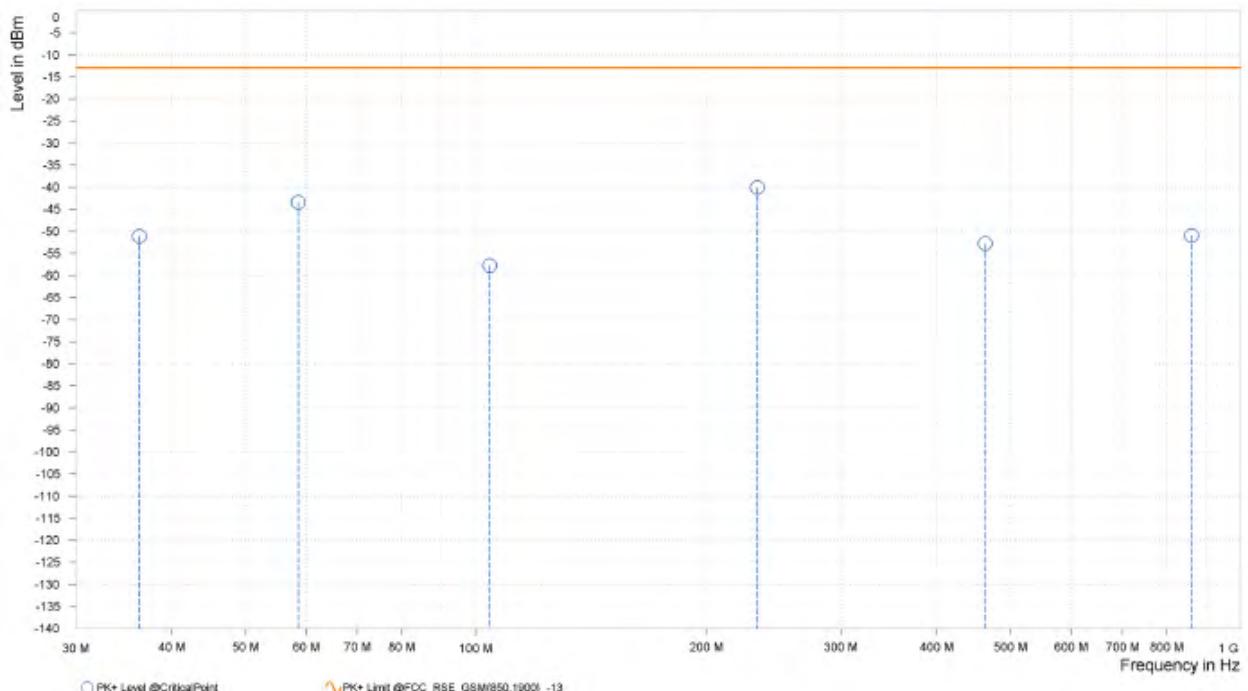




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	32.425	-54.08	-13.00	41.08	-1.76	V	66.2	1.00
1	58.130	-46.48	-13.00	33.48	3.30	V	359.1	1.00
1	106.145	-43.11	-13.00	30.11	11.11	V	66.2	1.00
1	192.475	-51.88	-13.00	38.88	-0.63	V	353.8	1.00
1	312.755	-50.49	-13.00	37.49	4.78	V	88.2	2.00
1	862.745	-52.06	-13.00	39.06	13.45	V	1	2.00

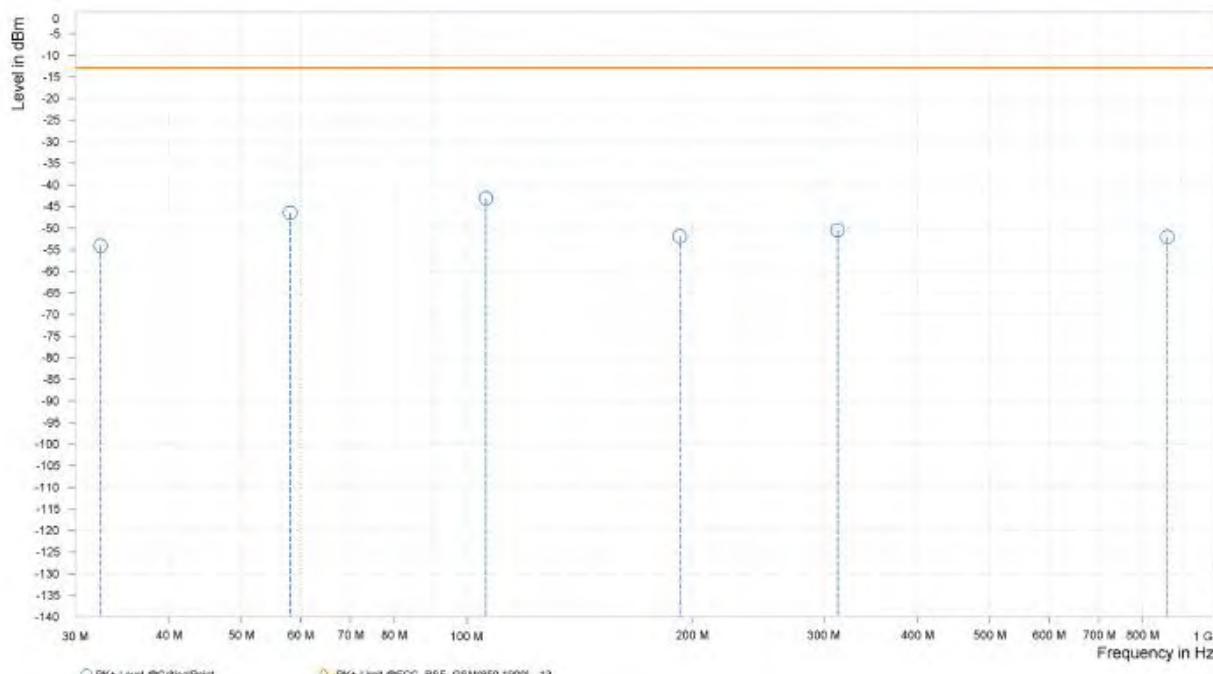



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.


## WORST-CASE DATA

GSM 1900:

CH 512

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,700.500	-50.03	-13.00	37.03	22.48	H	0.8	2.00
4	5,550.500	-46.81	-13.00	33.81	25.81	H	359.1	1.00

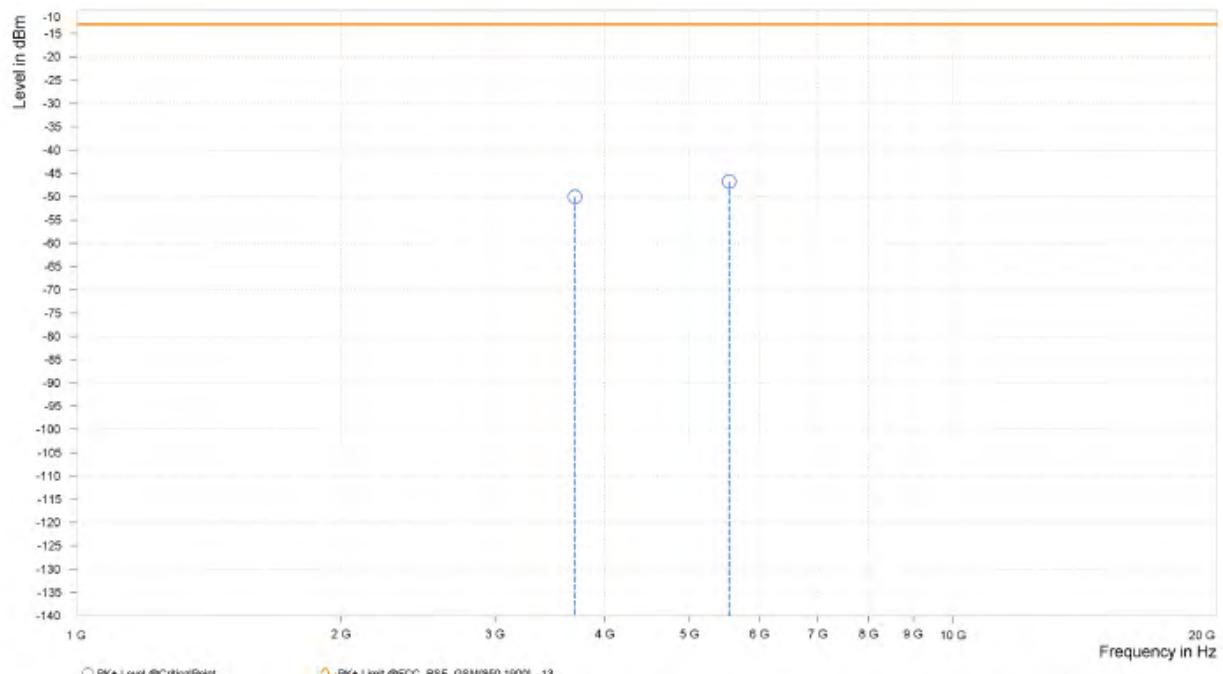




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,700.500	-48.22	-13.00	35.22	23.07	V	1	1.00
4	5,550.500	-44.57	-13.00	31.57	26.51	V	1	1.00

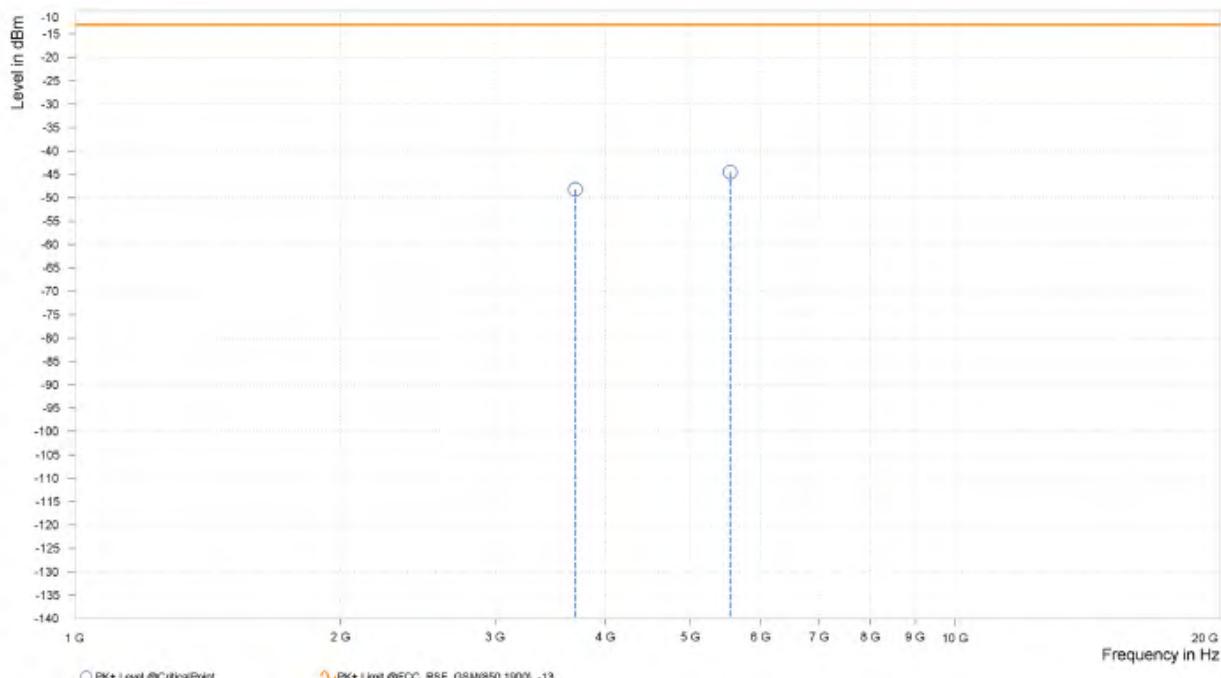




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

CH 661

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.760.000	-48.33	-13.00	35.33	23.12	H	359	1.00
4	5.640.000	-46.39	-13.00	33.39	26.20	H	107.2	2.00

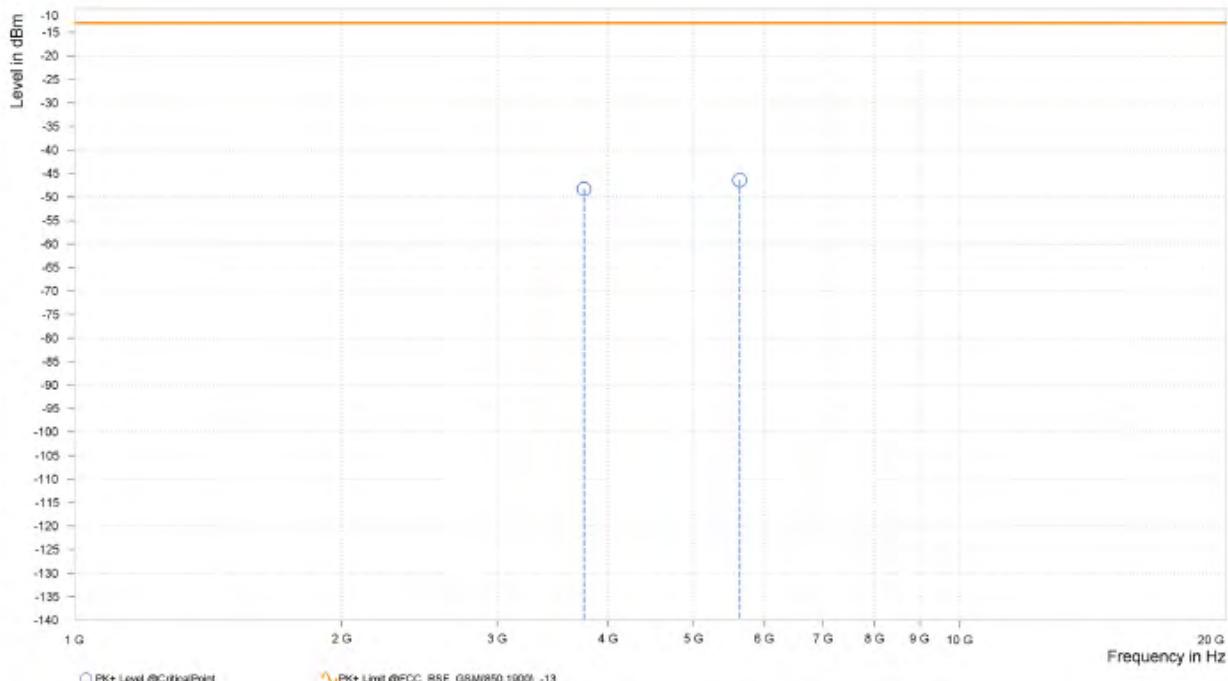




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.760.000	-48.38	-13.00	35.38	23.61	V	246.7	1.00
4	5.640.000	-44.72	-13.00	31.72	26.55	V	359	2.00

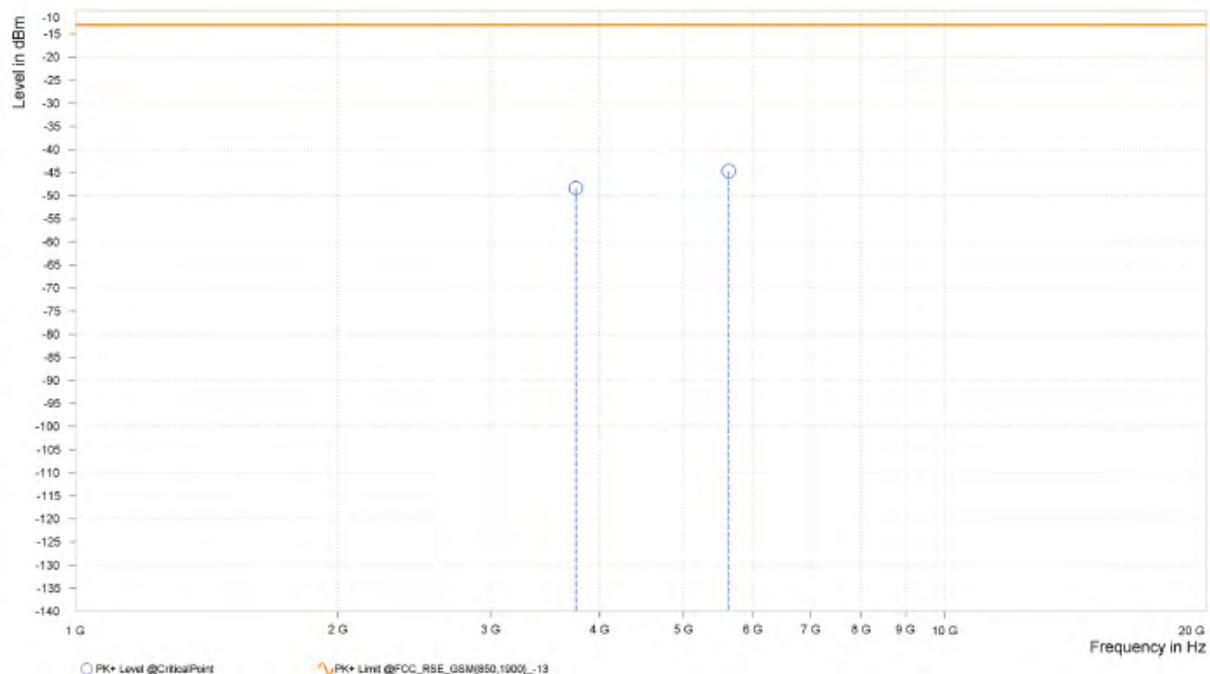




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

CH 810

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,820.000	-48.14	-13.00	35.14	23.26	H	246.8	1.00
4	5,730.000	-45.79	-13.00	32.79	26.76	H	112	2.00

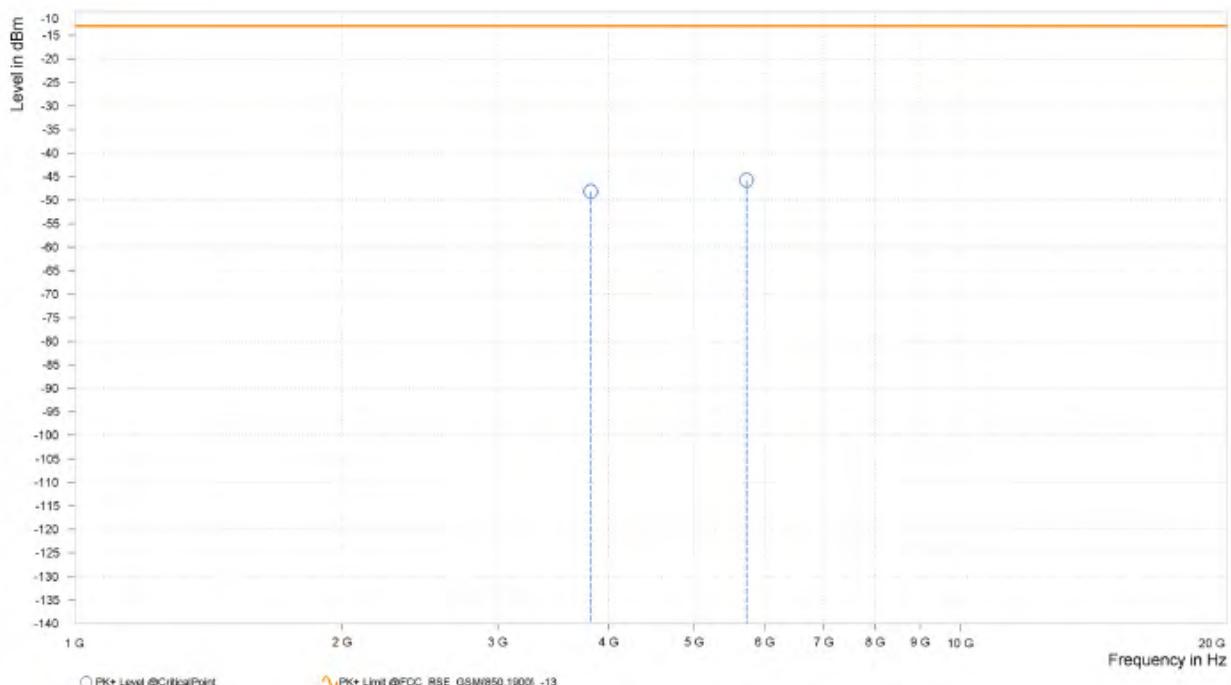




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,820.000	-46.11	-13.00	33.11	23.61	V	109.7	2.00
4	5,730.000	-45.97	-13.00	32.97	27.22	V	247.9	1.00

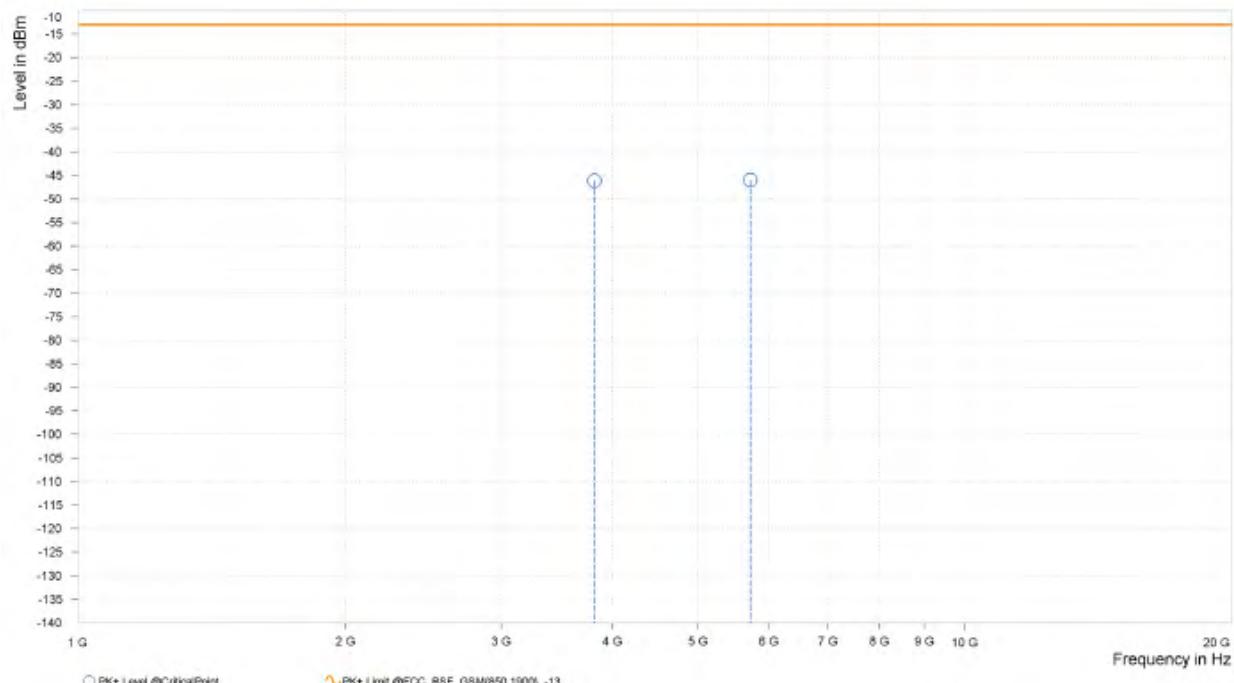



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

**EDGE 1900:**

**CH 512**

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,700.400	-49.31	-13.00	36.31	22.48	H	0.9	2.00
4	5,550.600	-46.83	-13.00	33.83	25.81	H	108.4	2.00

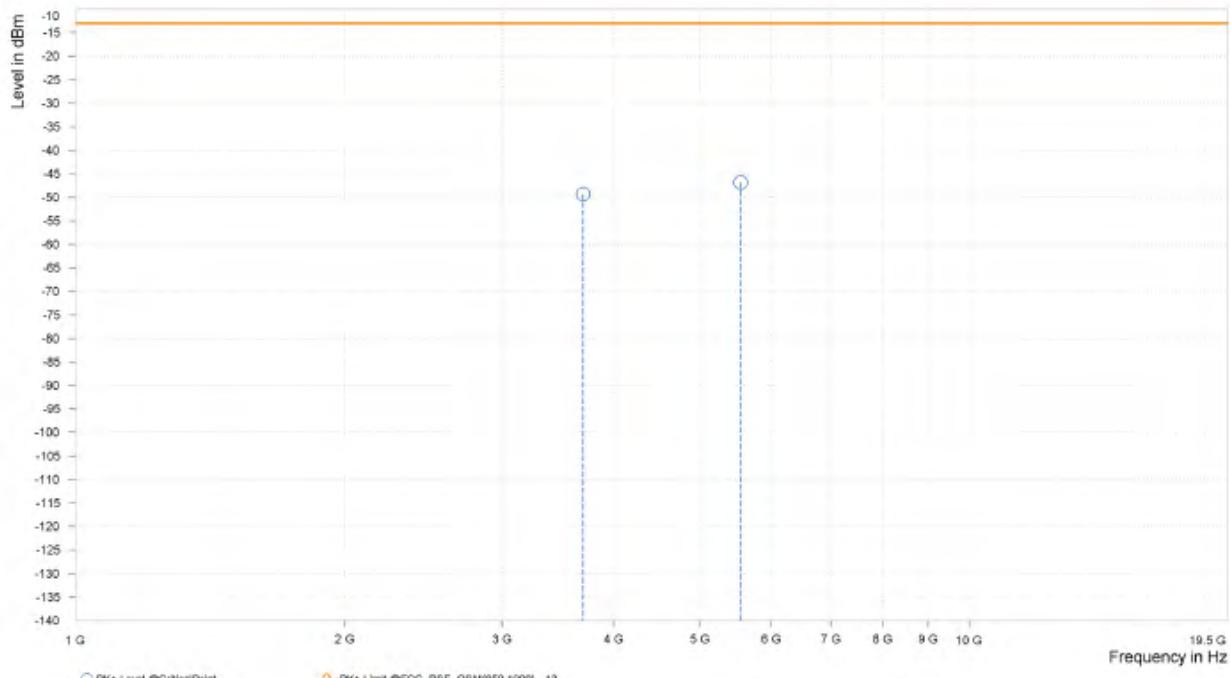




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,700.400	-44.89	-13.00	31.89	23.07	V	1	1.00
4	5,550.600	-46.78	-13.00	33.78	26.51	V	107.2	2.00

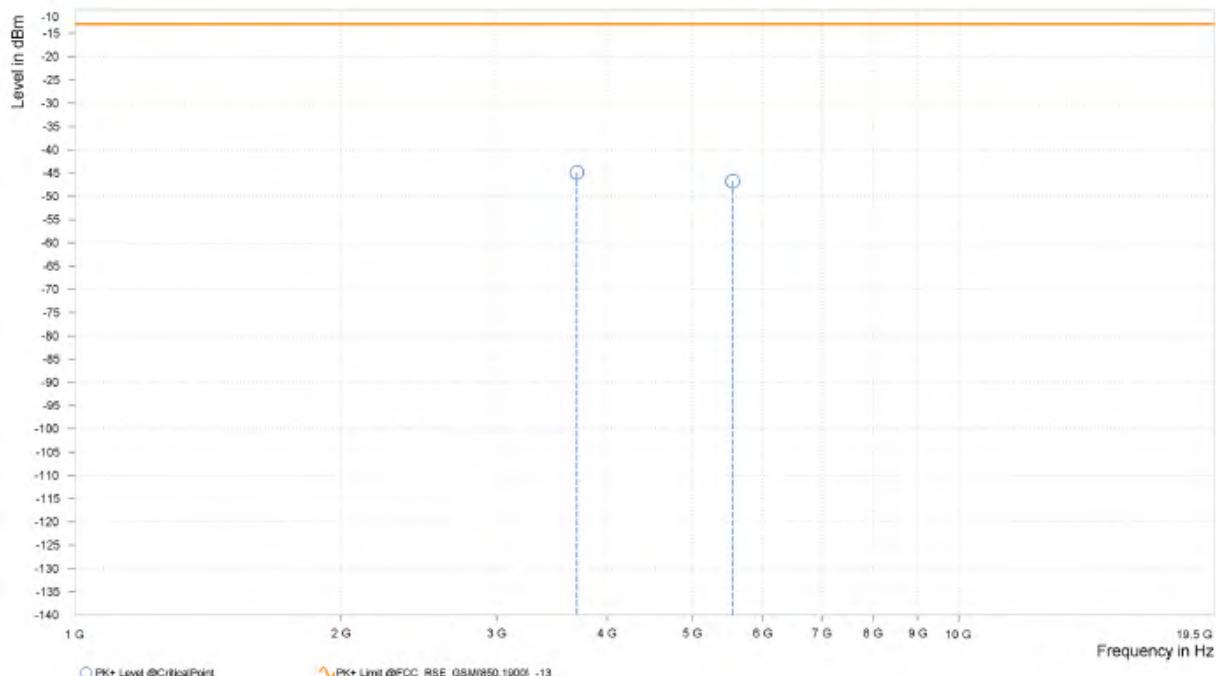




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

CH 661

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.760.000	-46.52	-13.00	33.52	23.12	H	0.9	2.00
4	5.640.000	-47.60	-13.00	34.60	26.20	H	359	2.00

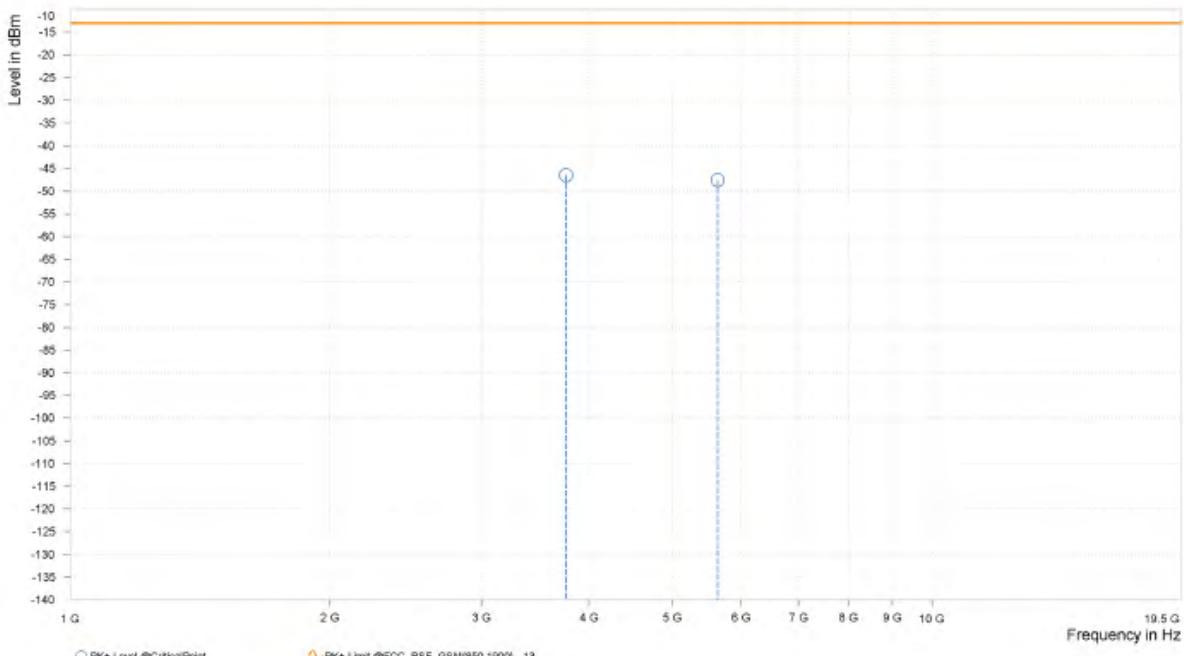




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.760.000	-47.56	-13.00	34.56	23.61	V	269.4	1.00
4	5.640.000	-43.65	-13.00	30.65	26.55	V	359	2.00

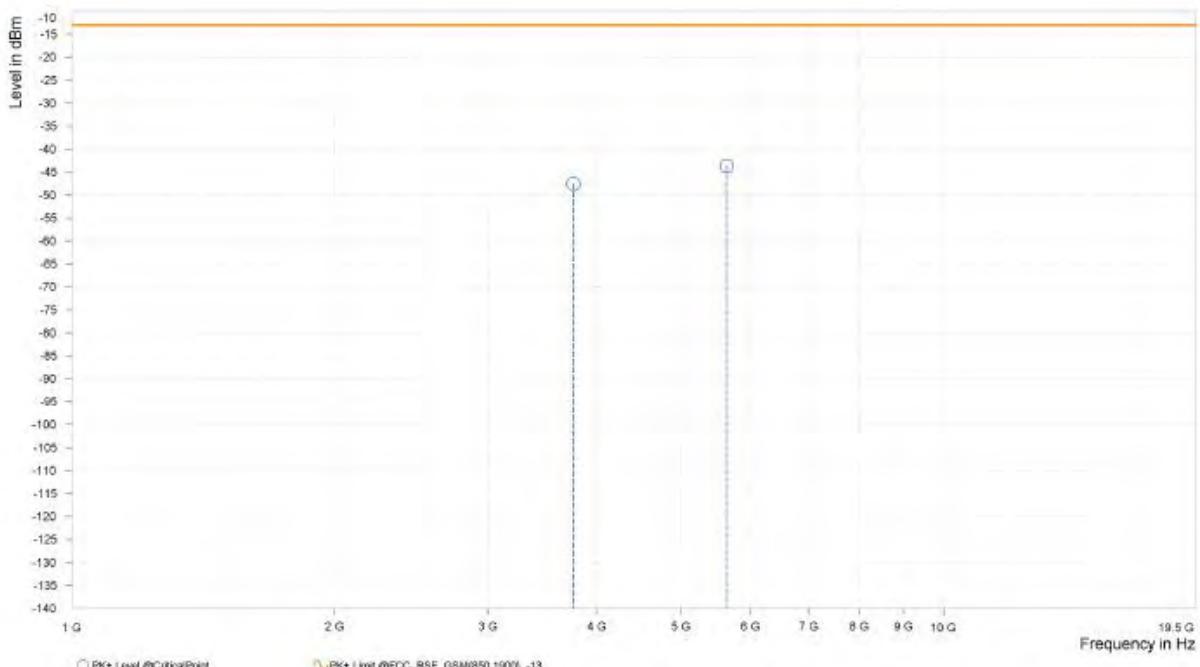




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## CH 810

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,819.600	-47.45	-13.00	34.45	23.26	H	106	2.00
4	5,729.400	-46.04	-13.00	33.04	26.75	H	252.7	1.00

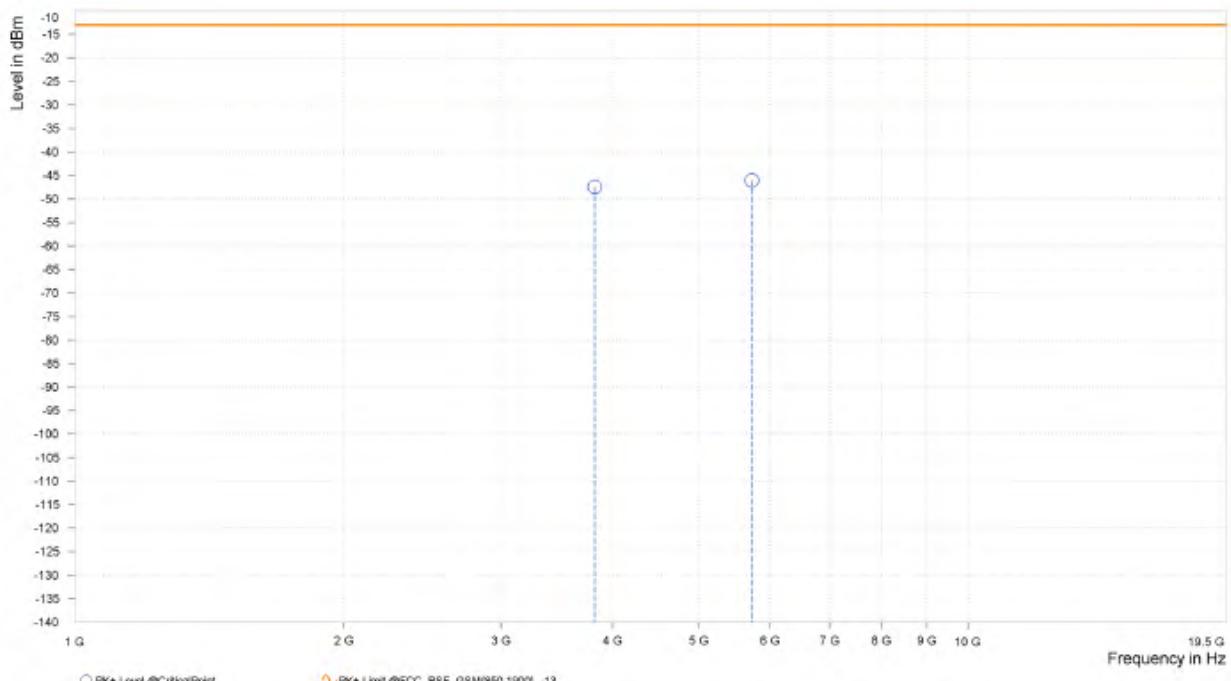




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.819.600	-46.32	-13.00	33.32	23.61	V	0.9	2.00
4	5.729.400	-45.35	-13.00	32.35	27.21	V	252.6	1.00

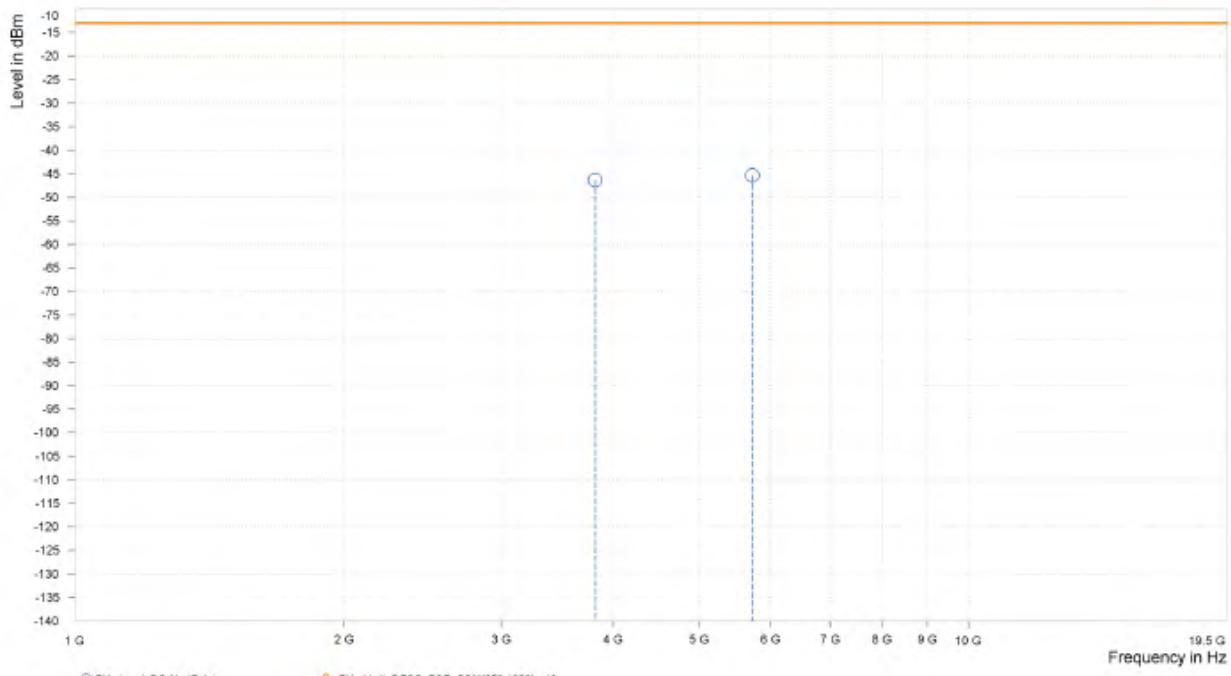



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

## WCDMA Band II

### CH 9262

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.704.800	-50.79	-13.00	37.79	22.50	H	359	1.00
4	5.557.200	-47.29	-13.00	34.29	25.79	H	190.9	2.00

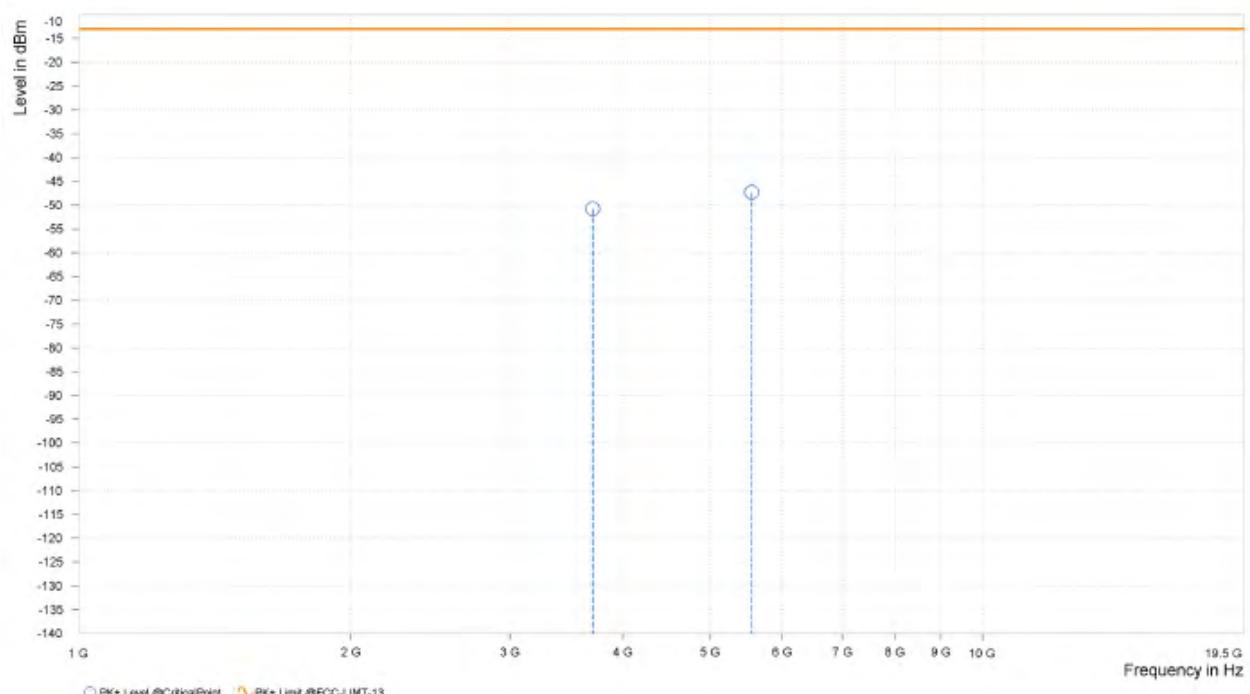




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,704.800	-48.66	-13.00	35.66	23.10	V	1	1.00
4	5,557.200	-48.26	-13.00	35.26	26.49	V	359	1.00

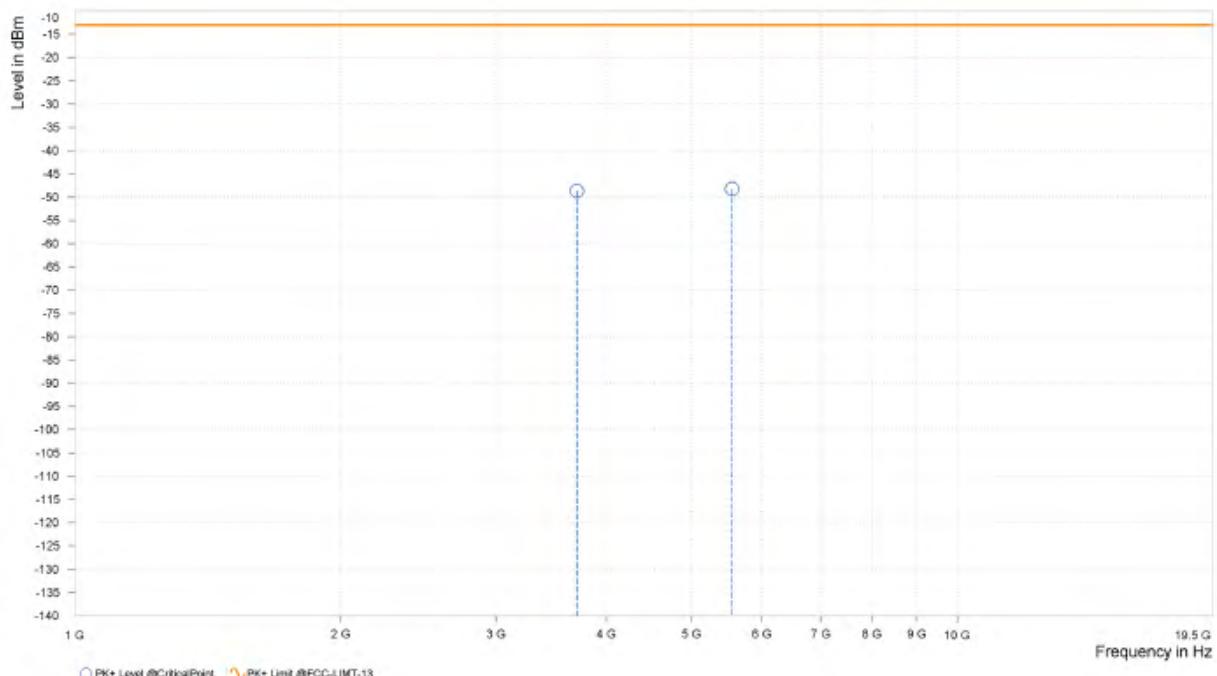




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

**CH 9400**

<b>MODE</b>	TX channel 9400	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Hanwen Xu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.760.000	-51.61	-13.00	38.61	23.12	H	172.6	1.00
4	5.640.000	-48.24	-13.00	35.24	26.20	H	8.8	2.00

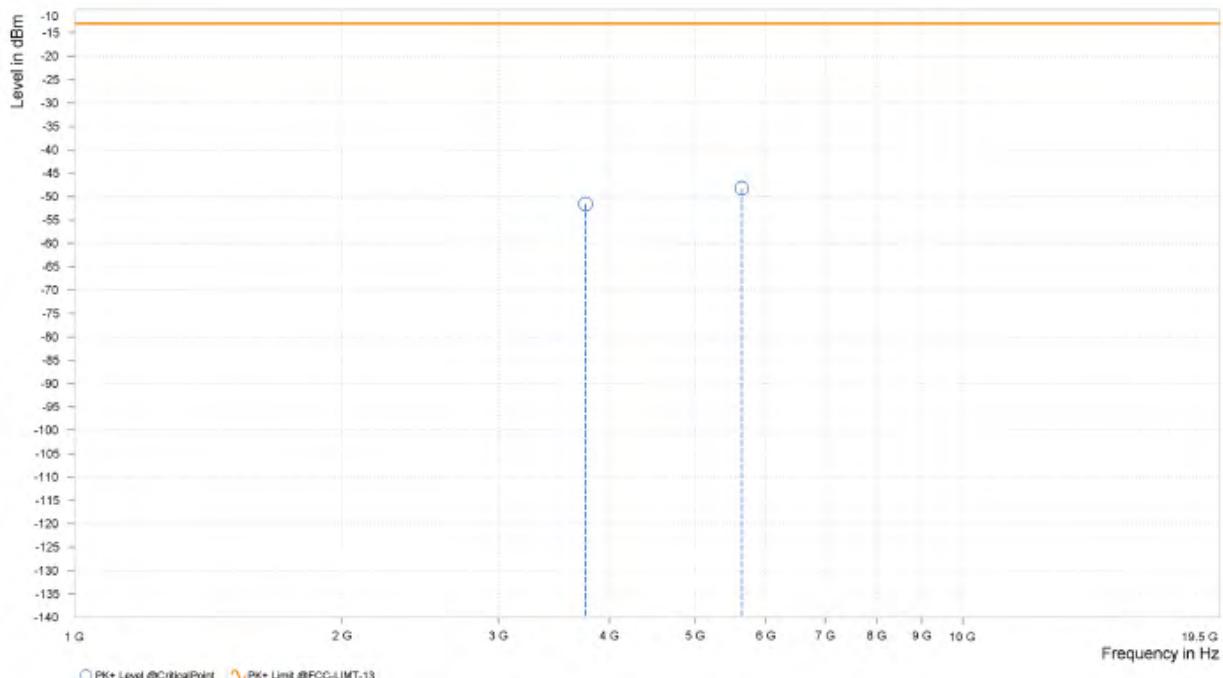




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,760.000	-49.05	-13.00	36.05	23.61	V	353.4	1.00
4	5,640.000	-46.98	-13.00	33.98	26.55	V	1	2.00

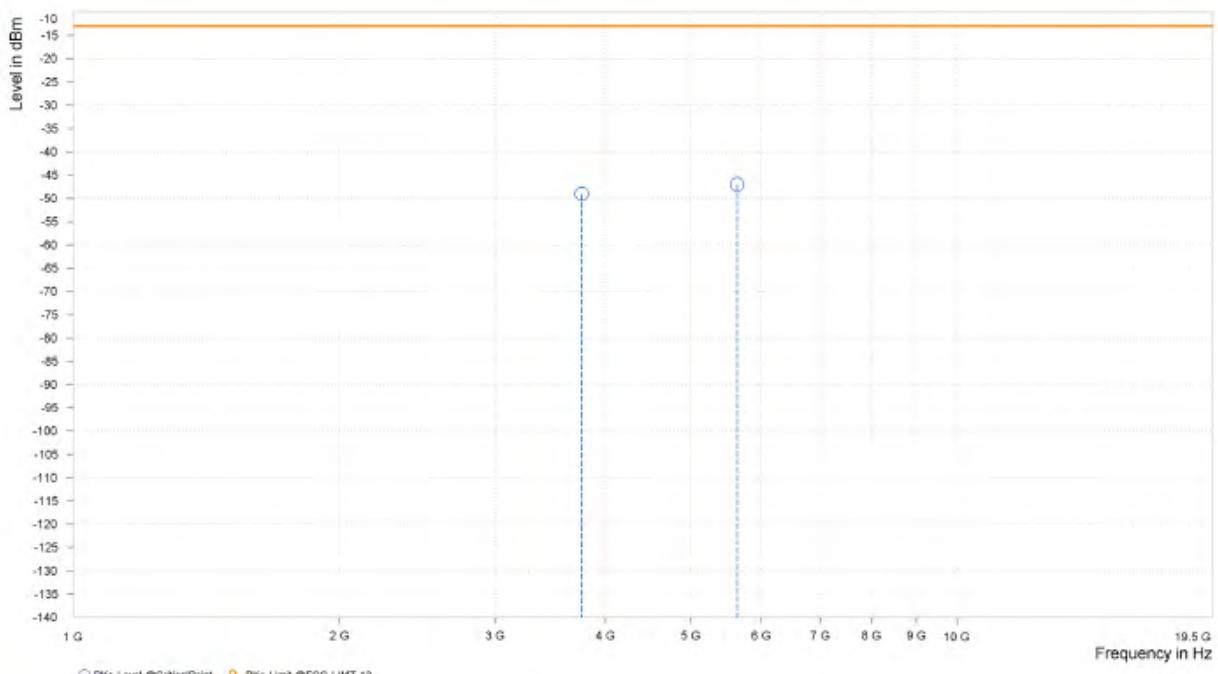




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

CH 9538

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,815.200	-49.73	-13.00	36.73	23.25	H	1	1.00
4	5,722.800	-46.99	-13.00	33.99	26.63	H	351.1	1.00

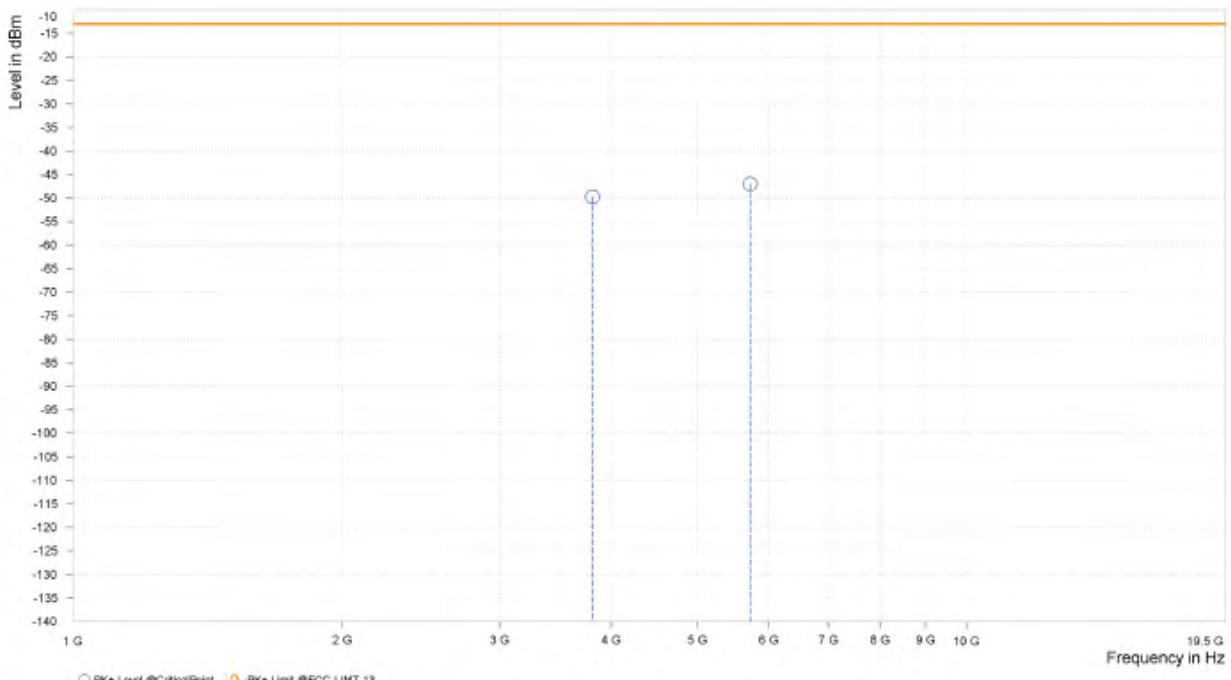




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,815.200	-49.12	-13.00	36.12	23.58	V	351.8	1.00
4	5,722.800	-47.29	-13.00	34.29	27.08	V	351.8	1.00

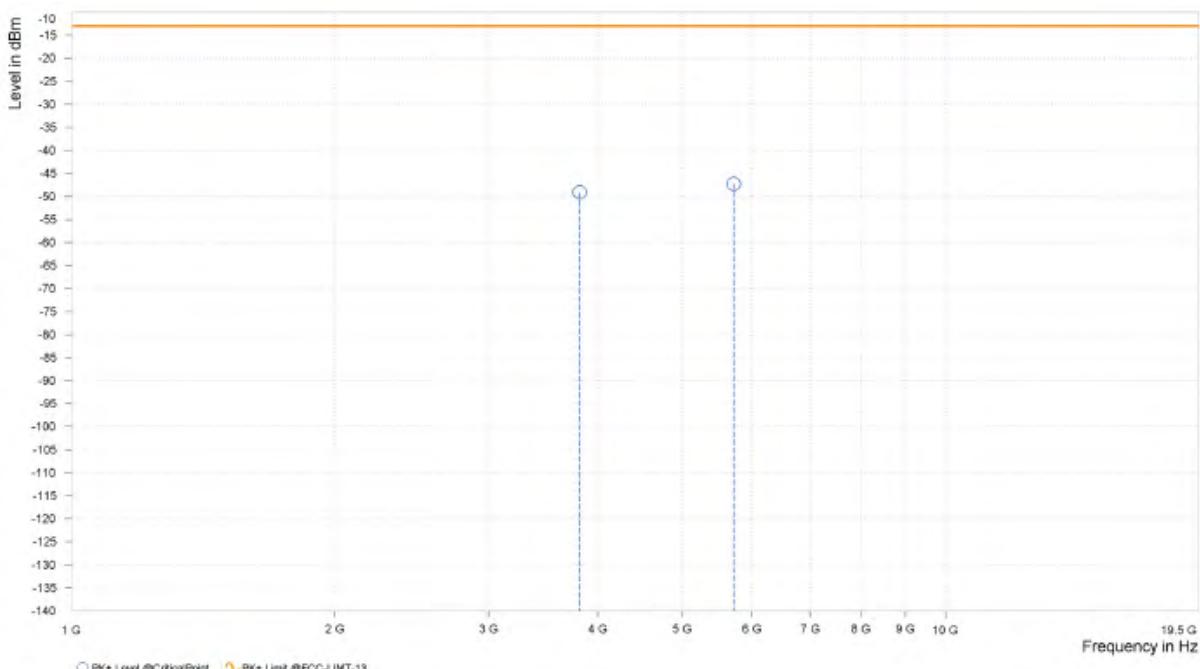



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

## LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,758.740	-50.51	-13.00	37.51	23.10	H	0.9	2.00
4	5,638.110	-48.02	-13.00	35.02	26.22	H	1	1.00

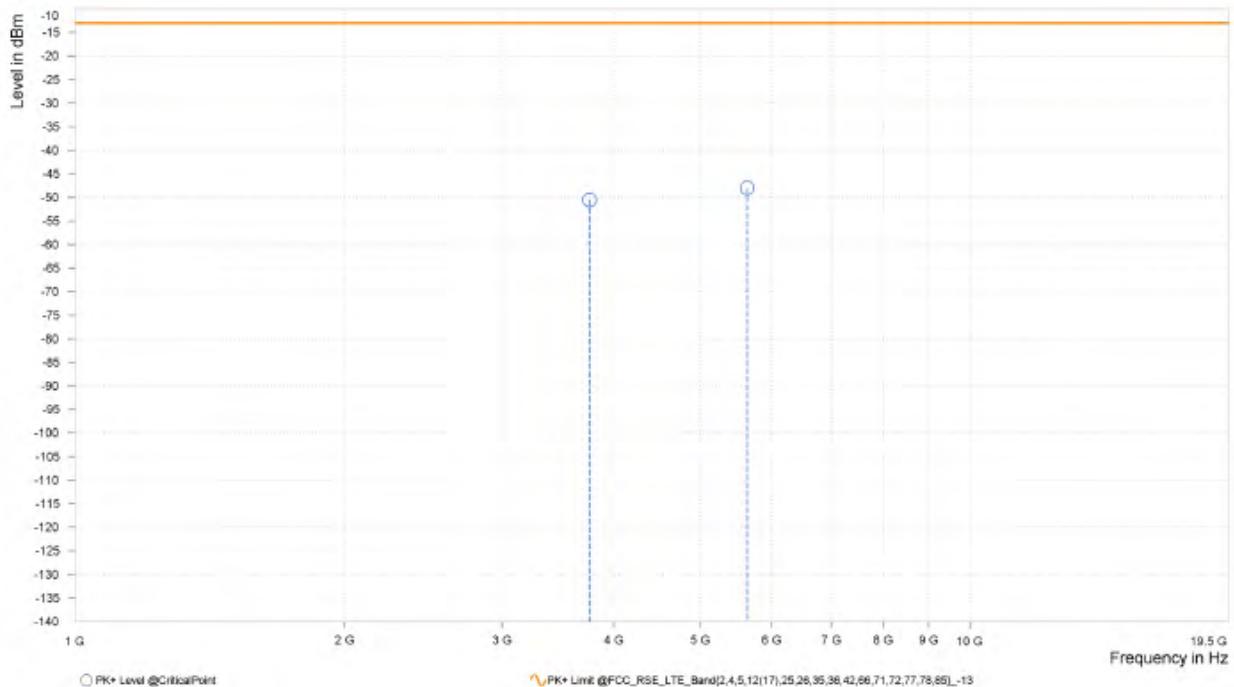




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,758.740	-48.24	-13.00	35.24	23.61	V	359.1	1.00
4	5,638.110	-46.76	-13.00	33.76	26.56	V	359	2.00

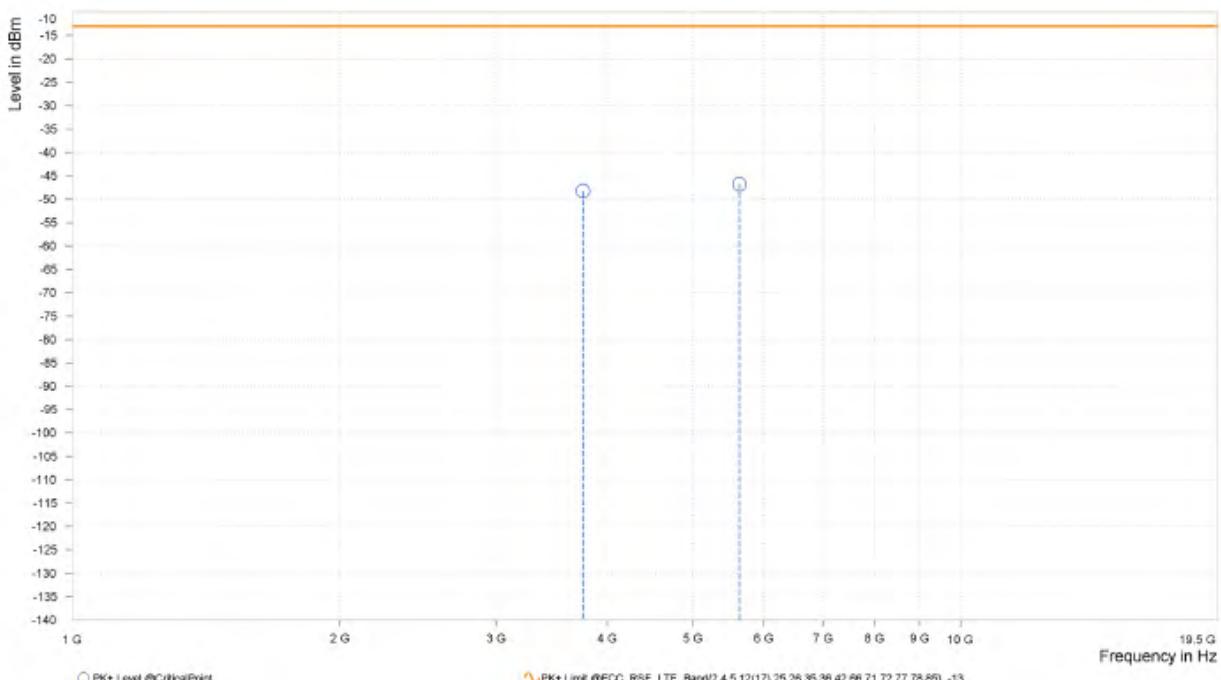


BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,757.300	-47.84	-13.00	34.84	23.09	H	244.3	1.00
4	5,635.950	-47.71	-13.00	34.71	26.24	H	358.9	1.00

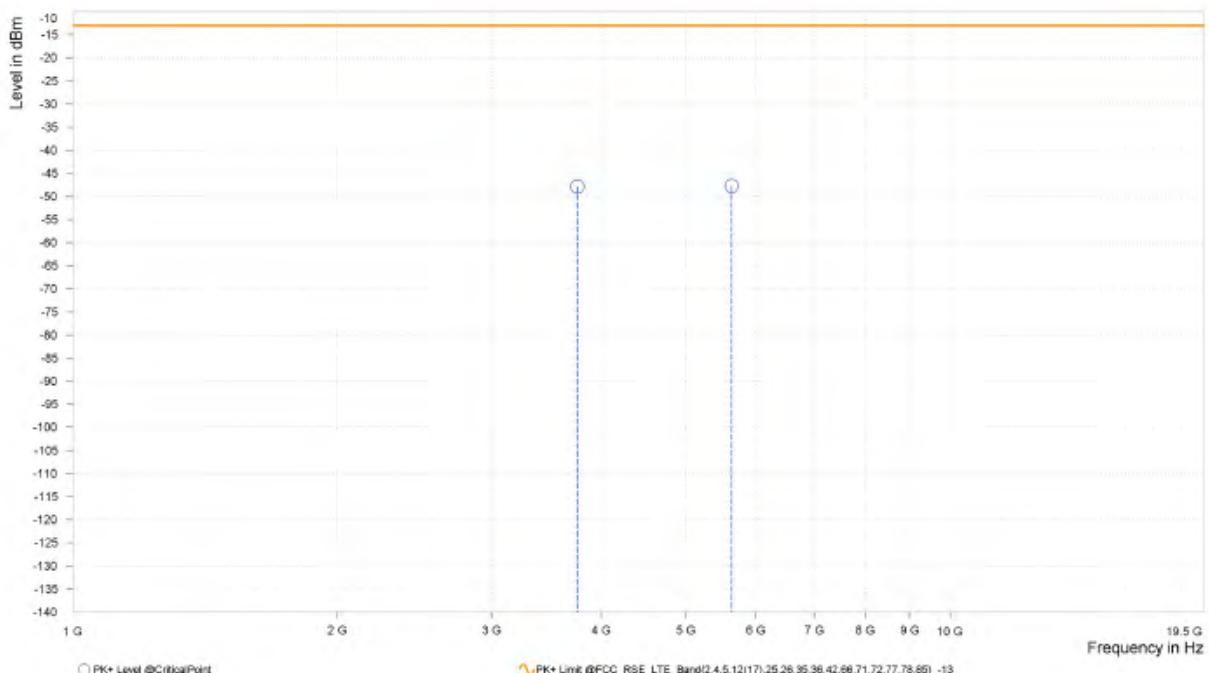




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,757.300	-49.17	-13.00	36.17	23.61	V	205.3	2.00
4	5,635.950	-46.88	-13.00	33.88	26.58	V	52.2	2.00

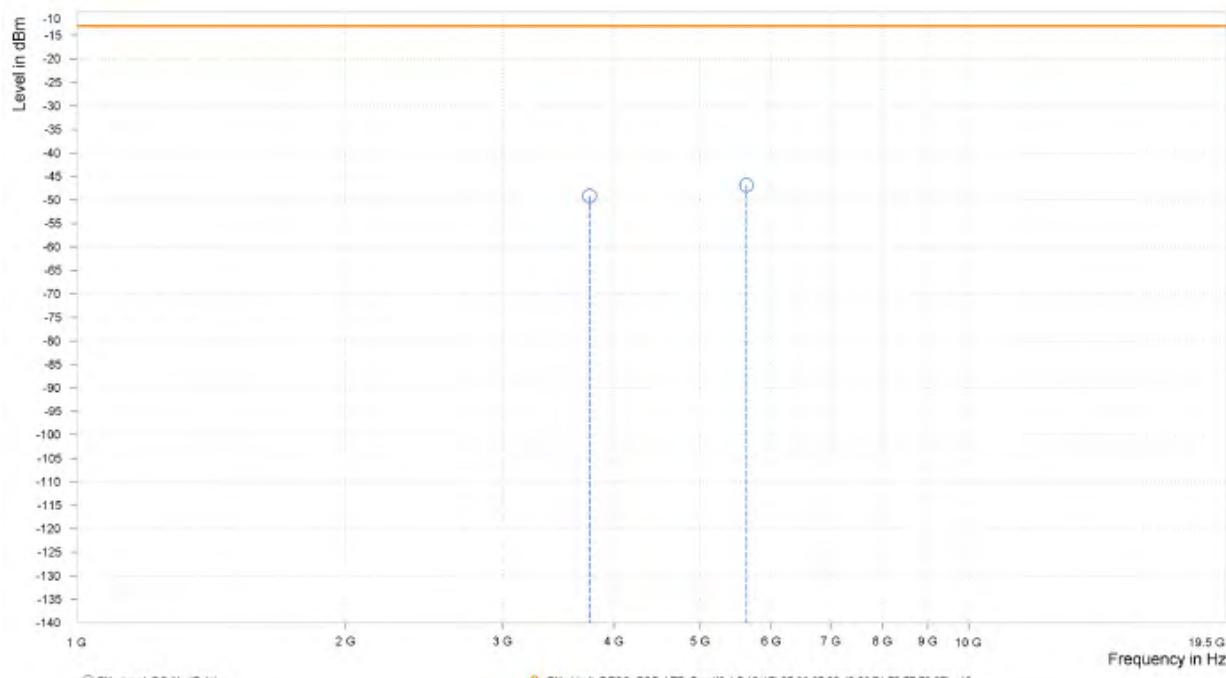




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

**CHANNEL BANDWIDTH: 5MHz / QPSK**

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,755.500	-48.38	-13.00	35.38	23.06	H	359	1.00
4	5,633.250	-48.52	-13.00	35.52	26.26	H	155.8	1.00

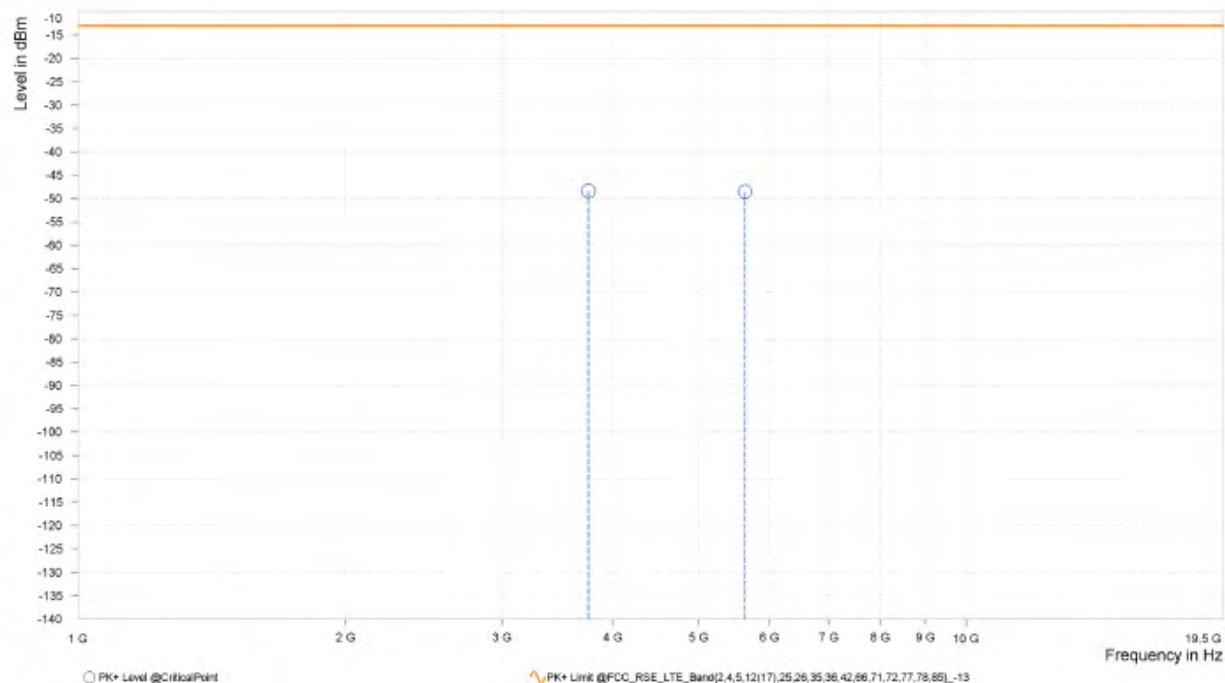




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.755.500	-48.09	-13.00	35.09	23.61	V	359.1	1.00
4	5.633.250	-47.37	-13.00	34.37	26.60	V	42.7	2.00

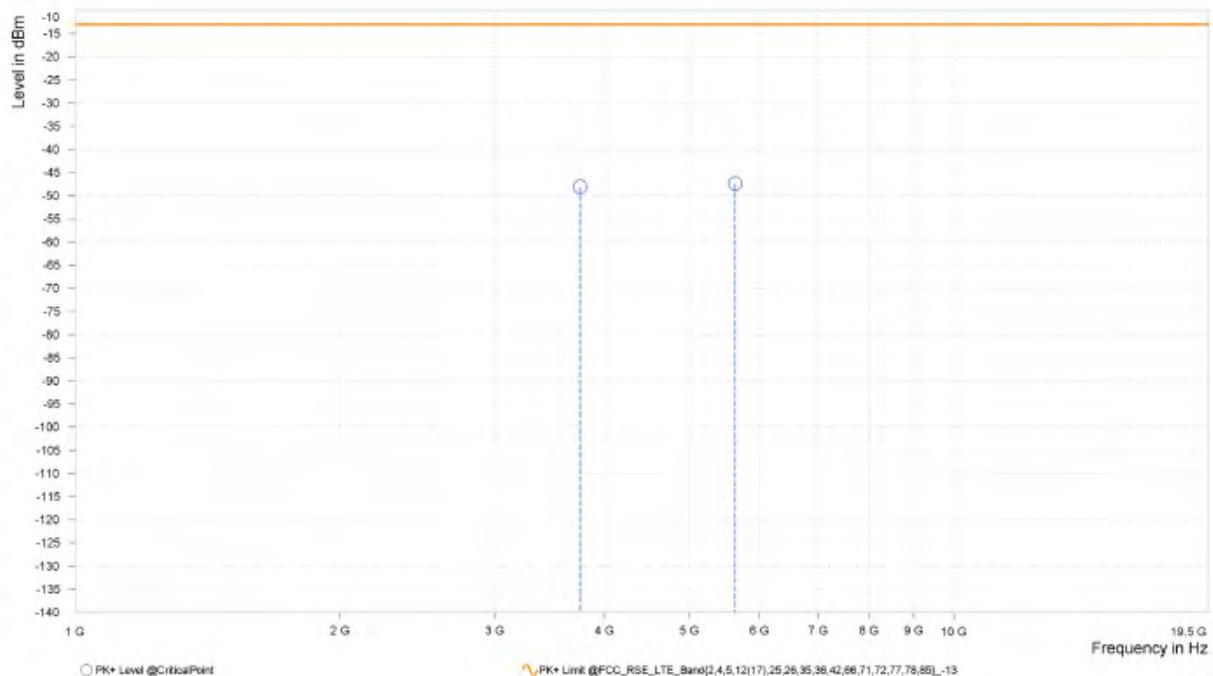



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

**CHANNEL BANDWIDTH: 10MHz / QPSK**

**CH18650**

MODE	TX channel 18650	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.701.000	-50.11	-13.00	37.11	22.48	H	358.7	1.00
4	5.551.500	-47.99	-13.00	34.99	25.81	H	316.1	1.00

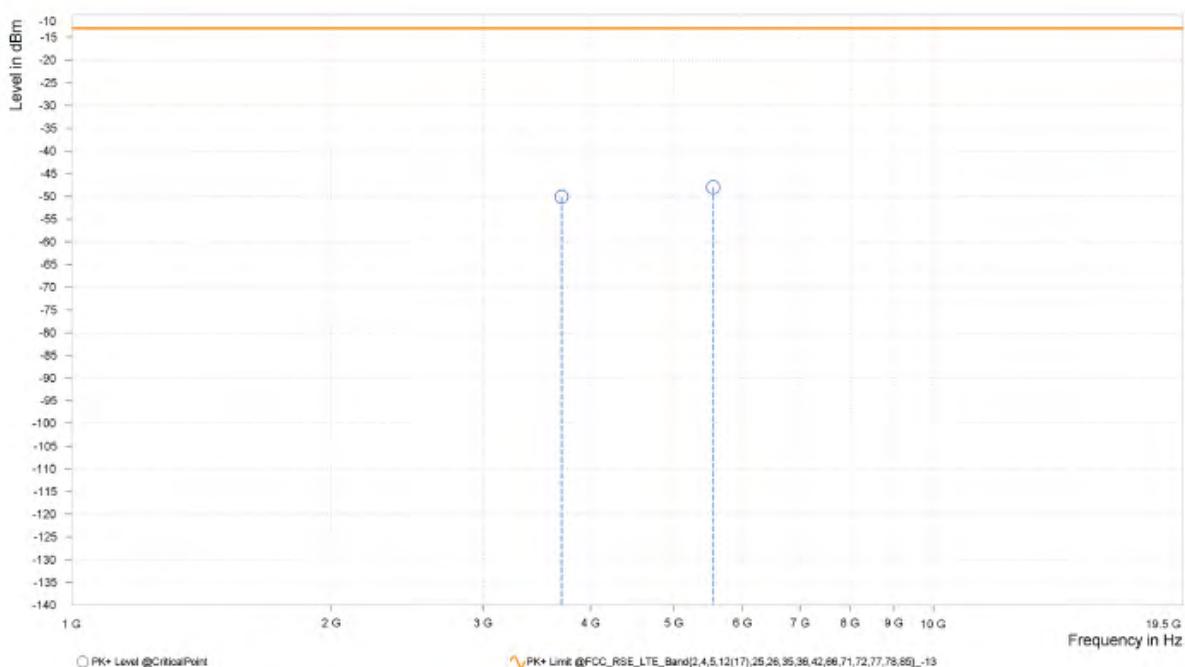




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 18650	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,701.000	-50.30	-13.00	37.30	23.08	V	359.1	1.00
4	5,551.500	-47.59	-13.00	34.59	26.51	V	359.1	1.00

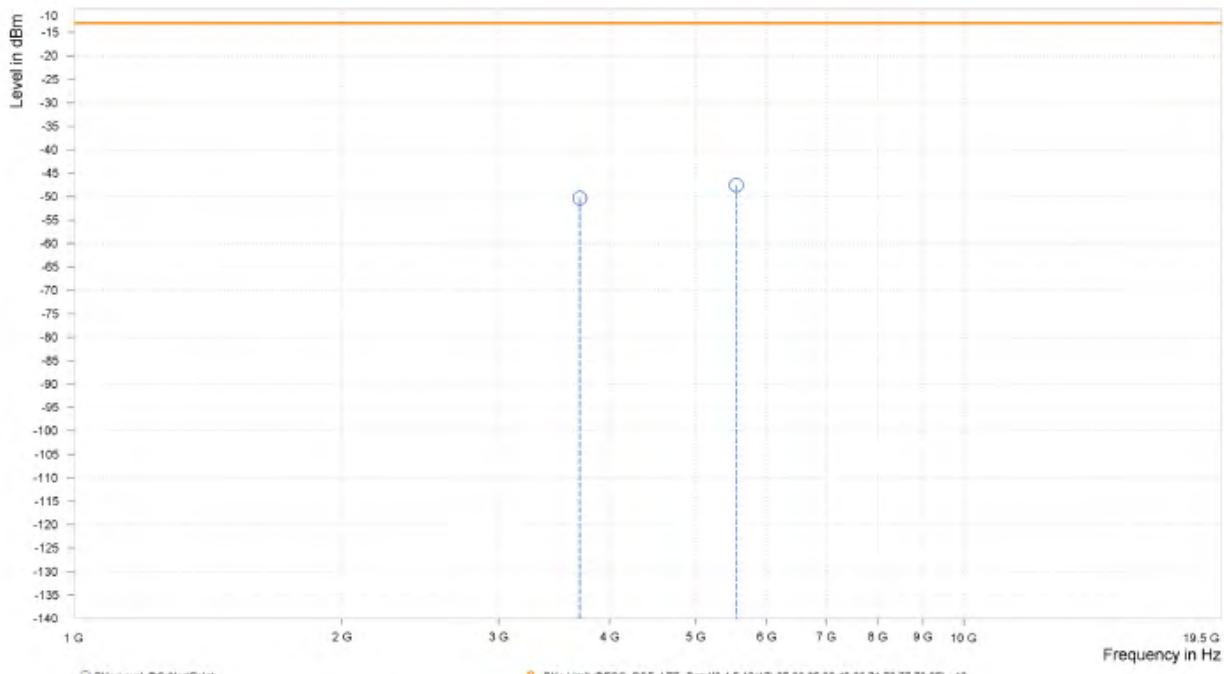




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

CH18900

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.751.000	-48.43	-13.00	35.43	22.99	H	155.8	1.00
4	5.626.500	-48.24	-13.00	35.24	26.24	H	1	1.00

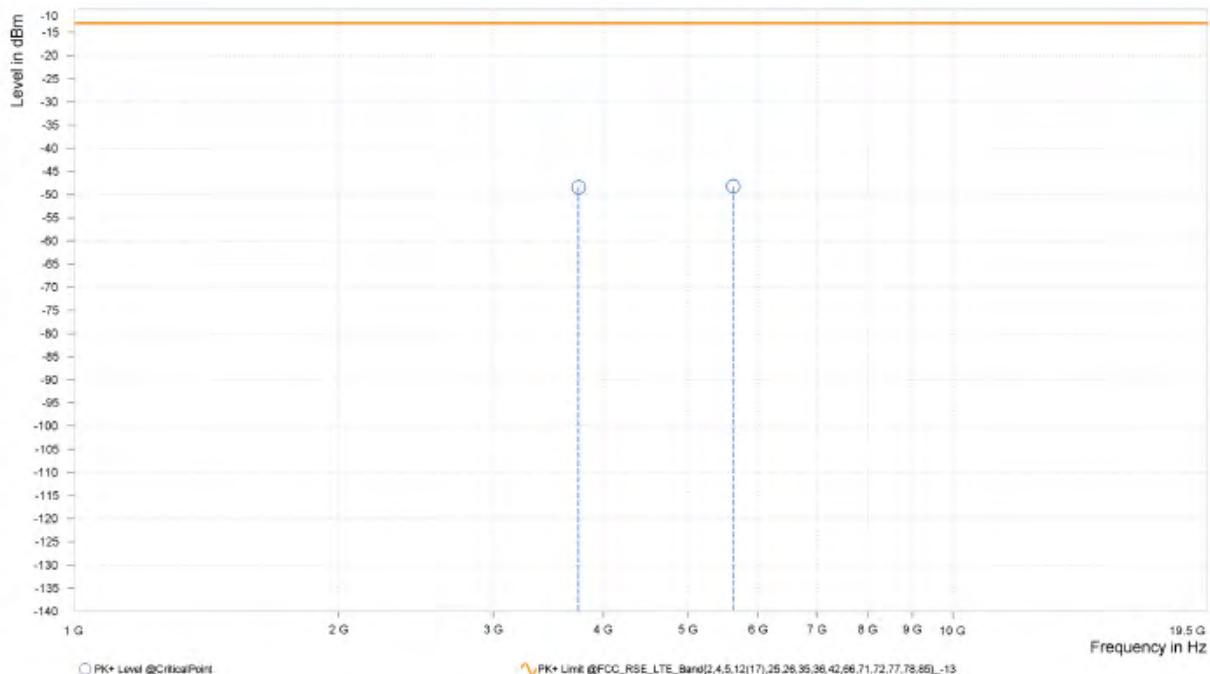




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,751.000	-48.05	-13.00	35.05	23.60	V	1	1.00
4	5,626.500	-45.93	-13.00	32.93	26.60	V	359	1.00

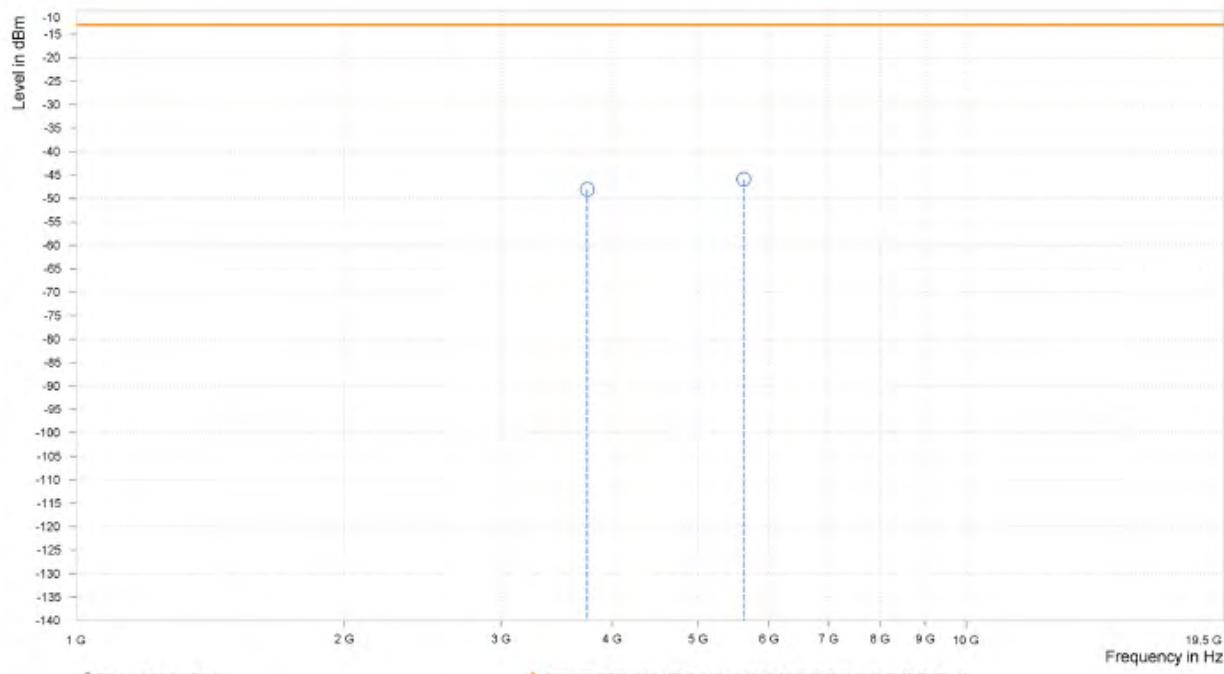




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

CH19150

MODE	TX channel 19150	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.801.000	-49.05	-13.00	36.05	23.35	H	157	1.00
4	5.701.500	-46.33	-13.00	33.33	26.46	H	157	1.00

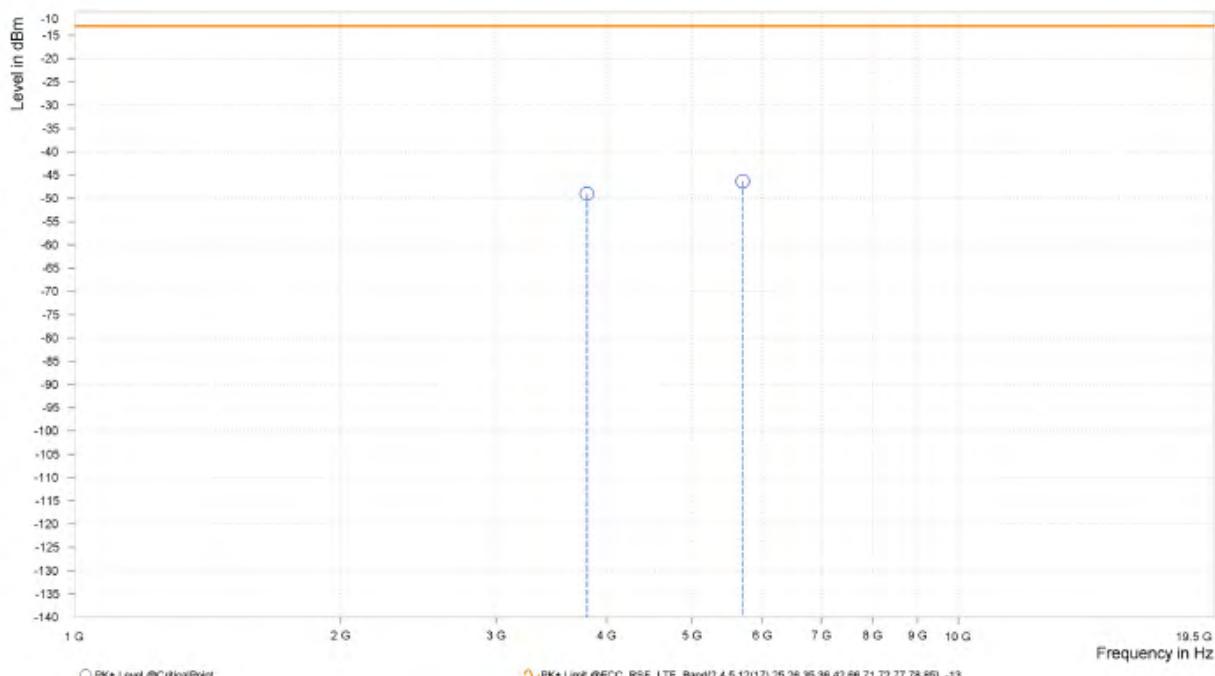




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 19150	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,801.000	-49.01	-13.00	36.01	23.61	V	1	1.00
4	5,701.500	-47.49	-13.00	34.49	26.90	V	309	1.00

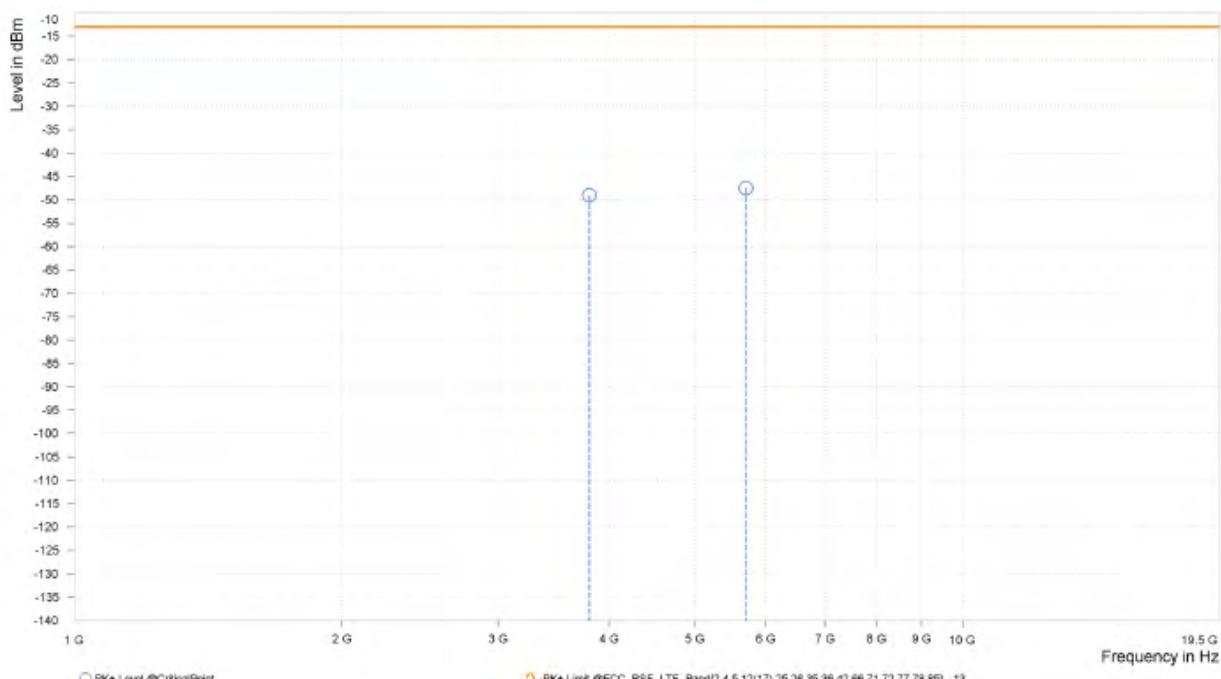




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.746.500	-50.30	-13.00	37.30	22.89	H	1.4	2.00
4	5.619.500	-47.31	-13.00	34.31	26.16	H	195.3	1.00

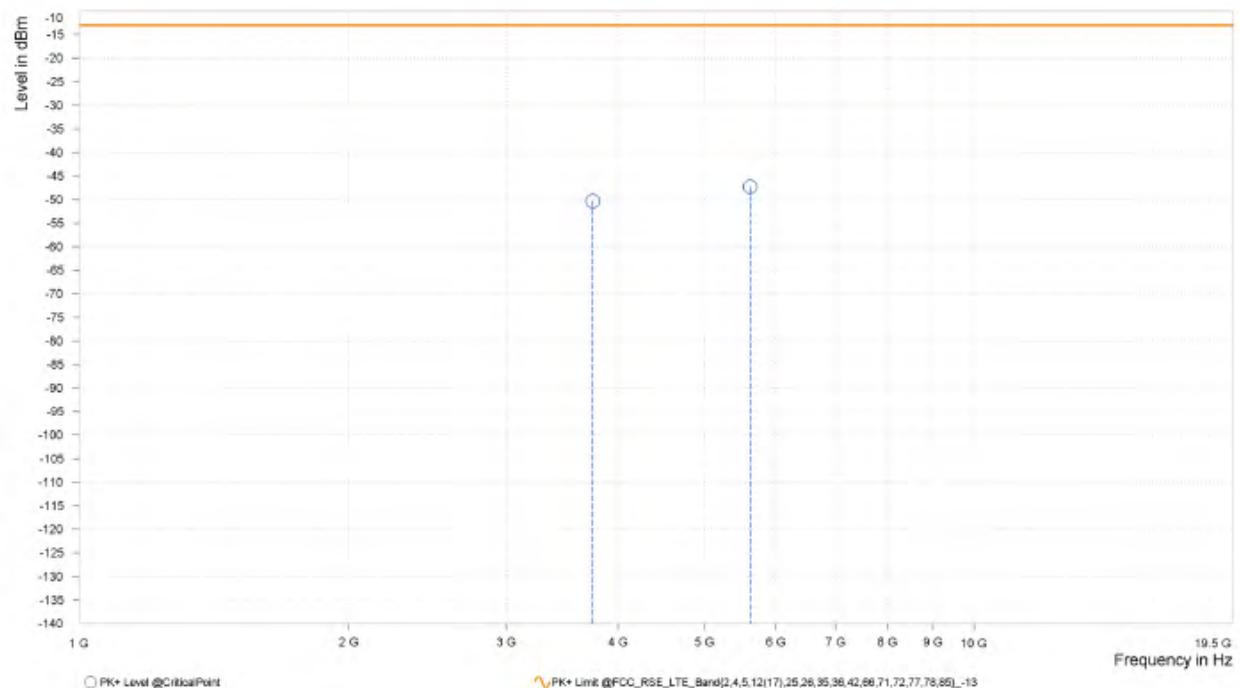




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.746.500	-49.02	-13.00	36.02	23.54	V	359	2.00
4	5.619.500	-47.57	-13.00	34.57	26.56	V	1.7	2.00

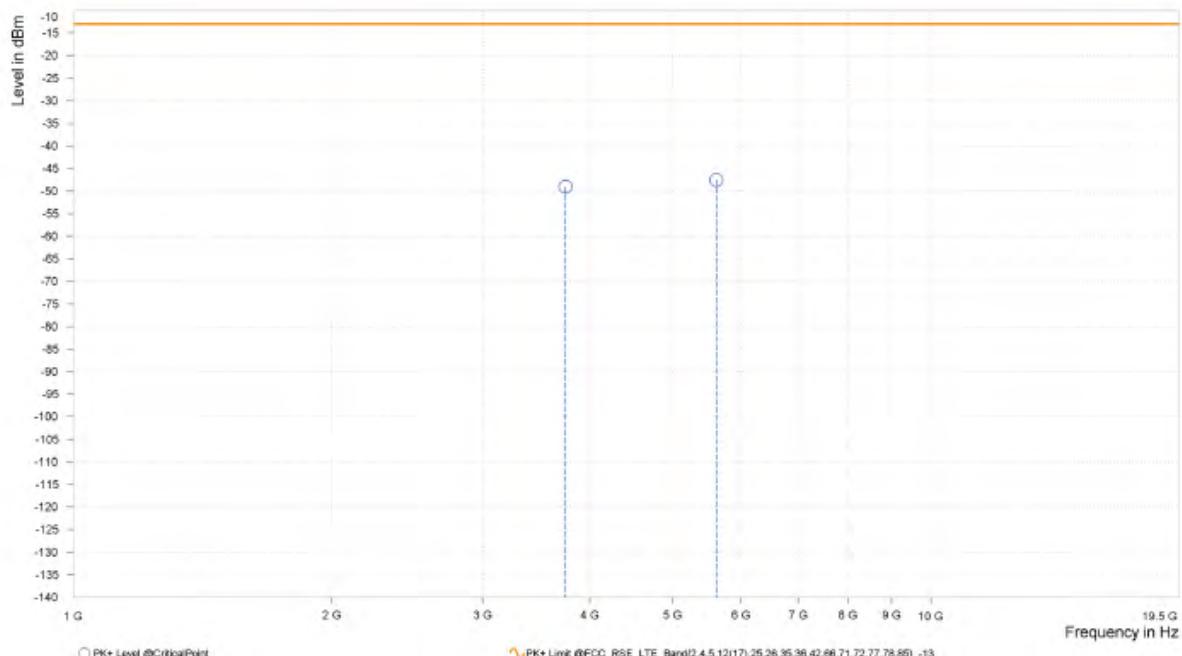




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3.742.000	-50.11	-13.00	37.11	22.81	H	359.1	1.00
4	5.613.000	-49.51	-13.00	36.51	26.03	H	176.2	1.00

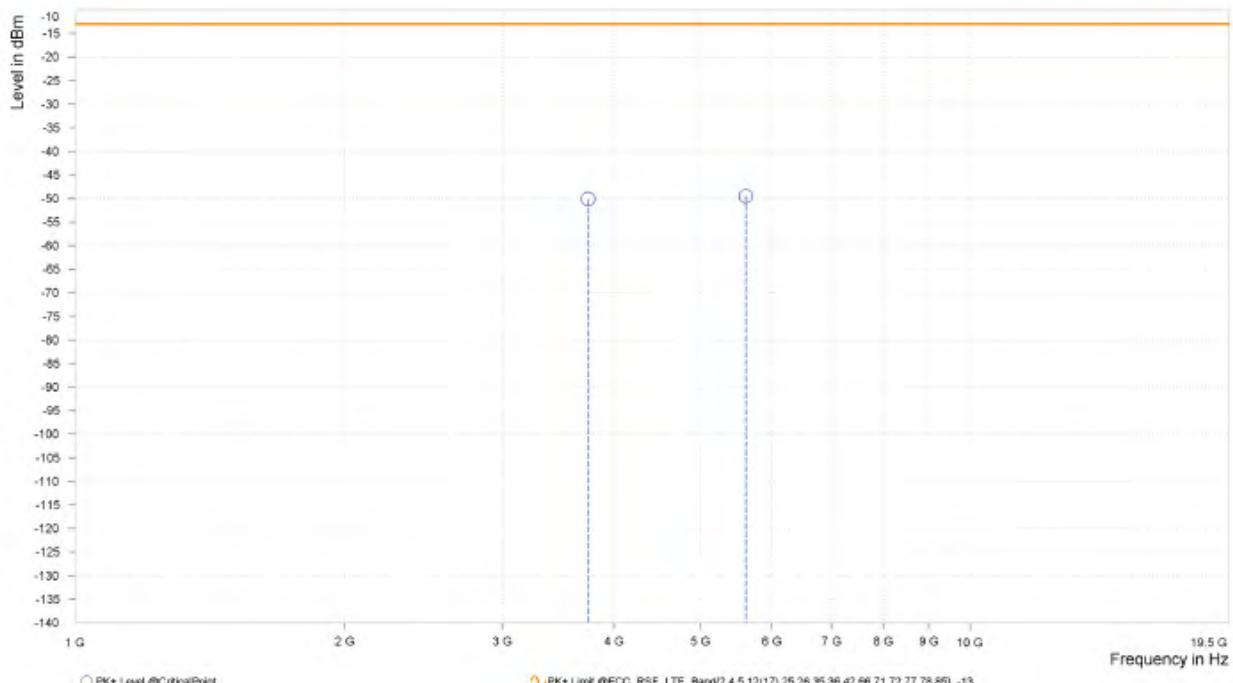




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Hanwen Xu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	3,742.000	-47.98	-13.00	34.98	23.46	V	359	2.00
4	5,613.000	-47.93	-13.00	34.93	26.48	V	177.4	1.00

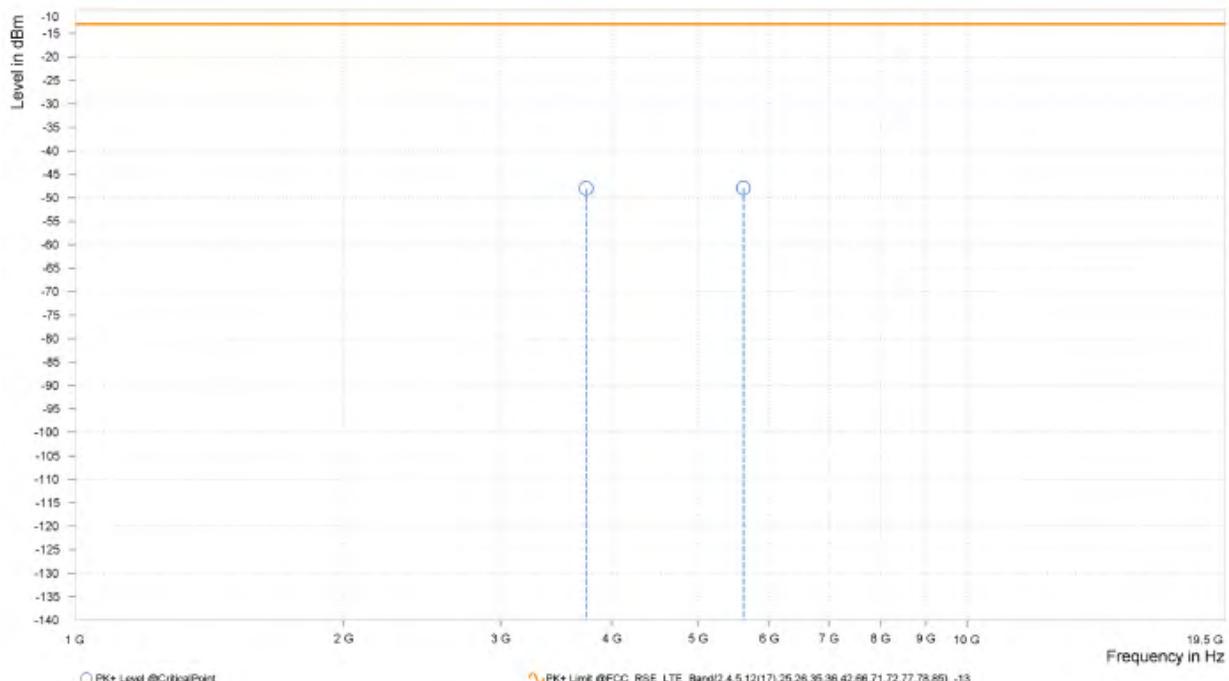



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

### 3.7 PEAK TO AVERAGE RATIO

#### 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

#### 3.7.2 TEST SETUP

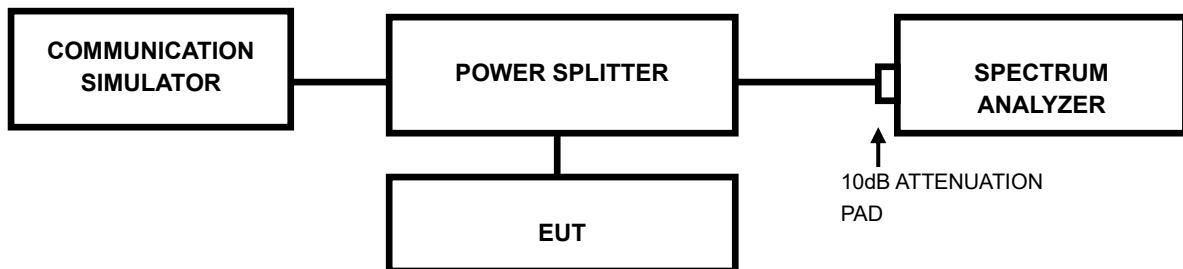

#### 3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

### 3.7.4 TEST RESULTS

Please Refer to Appendix Of this test report.



Test Report No.: PSU-NQN2311090109RF02

## 4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Shenzhen EMC/RF Lab:**

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)

Web Site: [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



Test Report No.: PSU-NQN2311090109RF02

## 5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## 6 Appendix

### GSM 1900

#### PEAK-TO-AVERAGE RATIO(CCDF)

##### Test Result

Band	Channel	Result(dB)	Limit(dB)	Verdict
GSM1900	512	2.77	13	PASS
GSM1900	661	2.77	13	PASS
GSM1900	810	2.79	13	PASS
EGPRS1900	512	5.84	13	PASS
EGPRS1900	661	5.78	13	PASS
EGPRS1900	810	5.88	13	PASS


### Test Graphs





BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

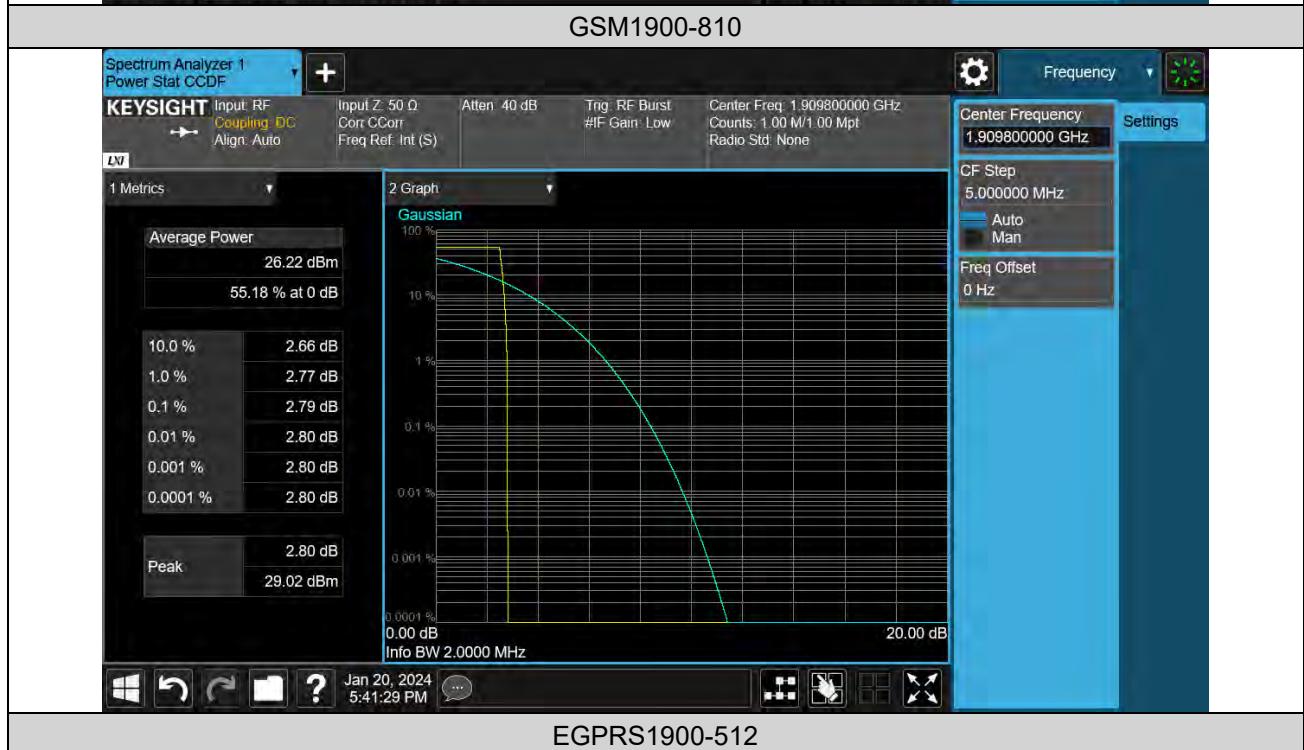


EGPRS1900-512



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

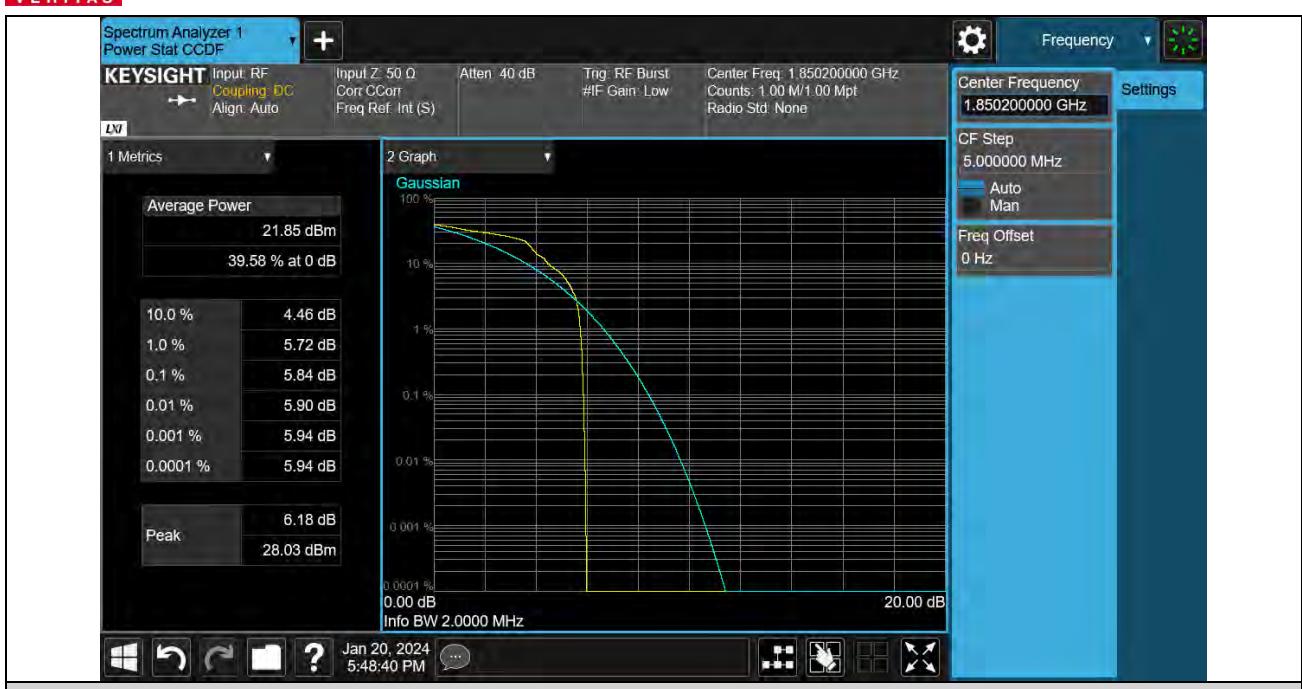

EGPRS1900-661



EGPRS1900-810



BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02





BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## 26DB BANDWIDTH AND OCCUPIED BANDWIDTH

### Test Result

Band	Channel	Occupied Bandwidth (KHz)	26dB Bandwidth (KHz)	Limit (MHz)	Verdict
GSM1900	512	245.025	315.180	---	PASS
GSM1900	661	246.999	318.680	---	PASS
GSM1900	810	246.232	320.680	---	PASS
EGPRS1900	512	243.831	312.690	---	PASS
EGPRS1900	661	246.039	312.690	---	PASS
EGPRS1900	810	244.696	311.690	---	PASS




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## Test Graphs

26dB Bandwidth

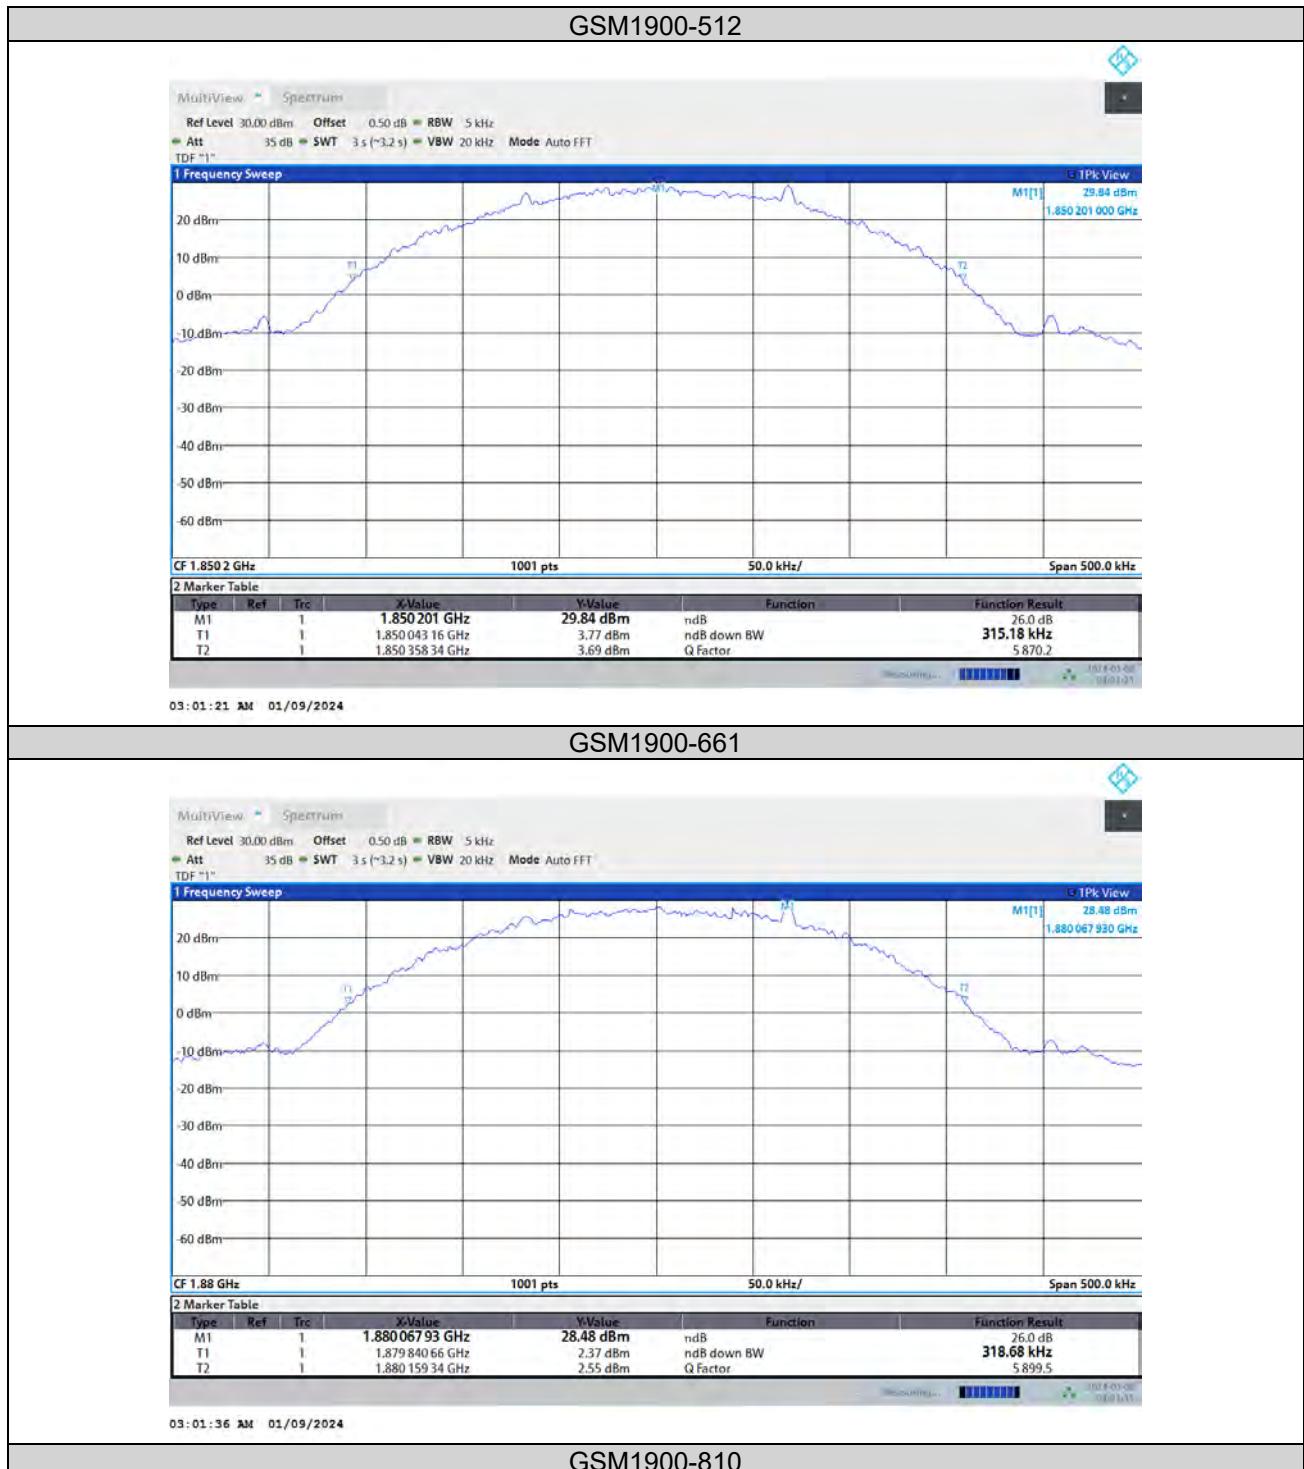




BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02



## EGPRS1900-512

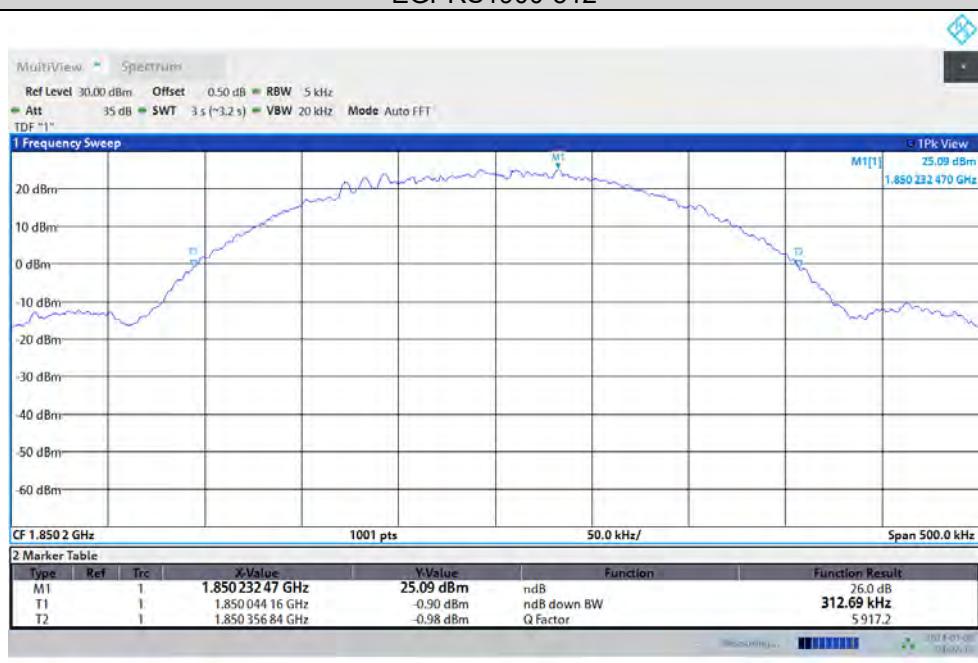


## EGPRS1900-661



BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02

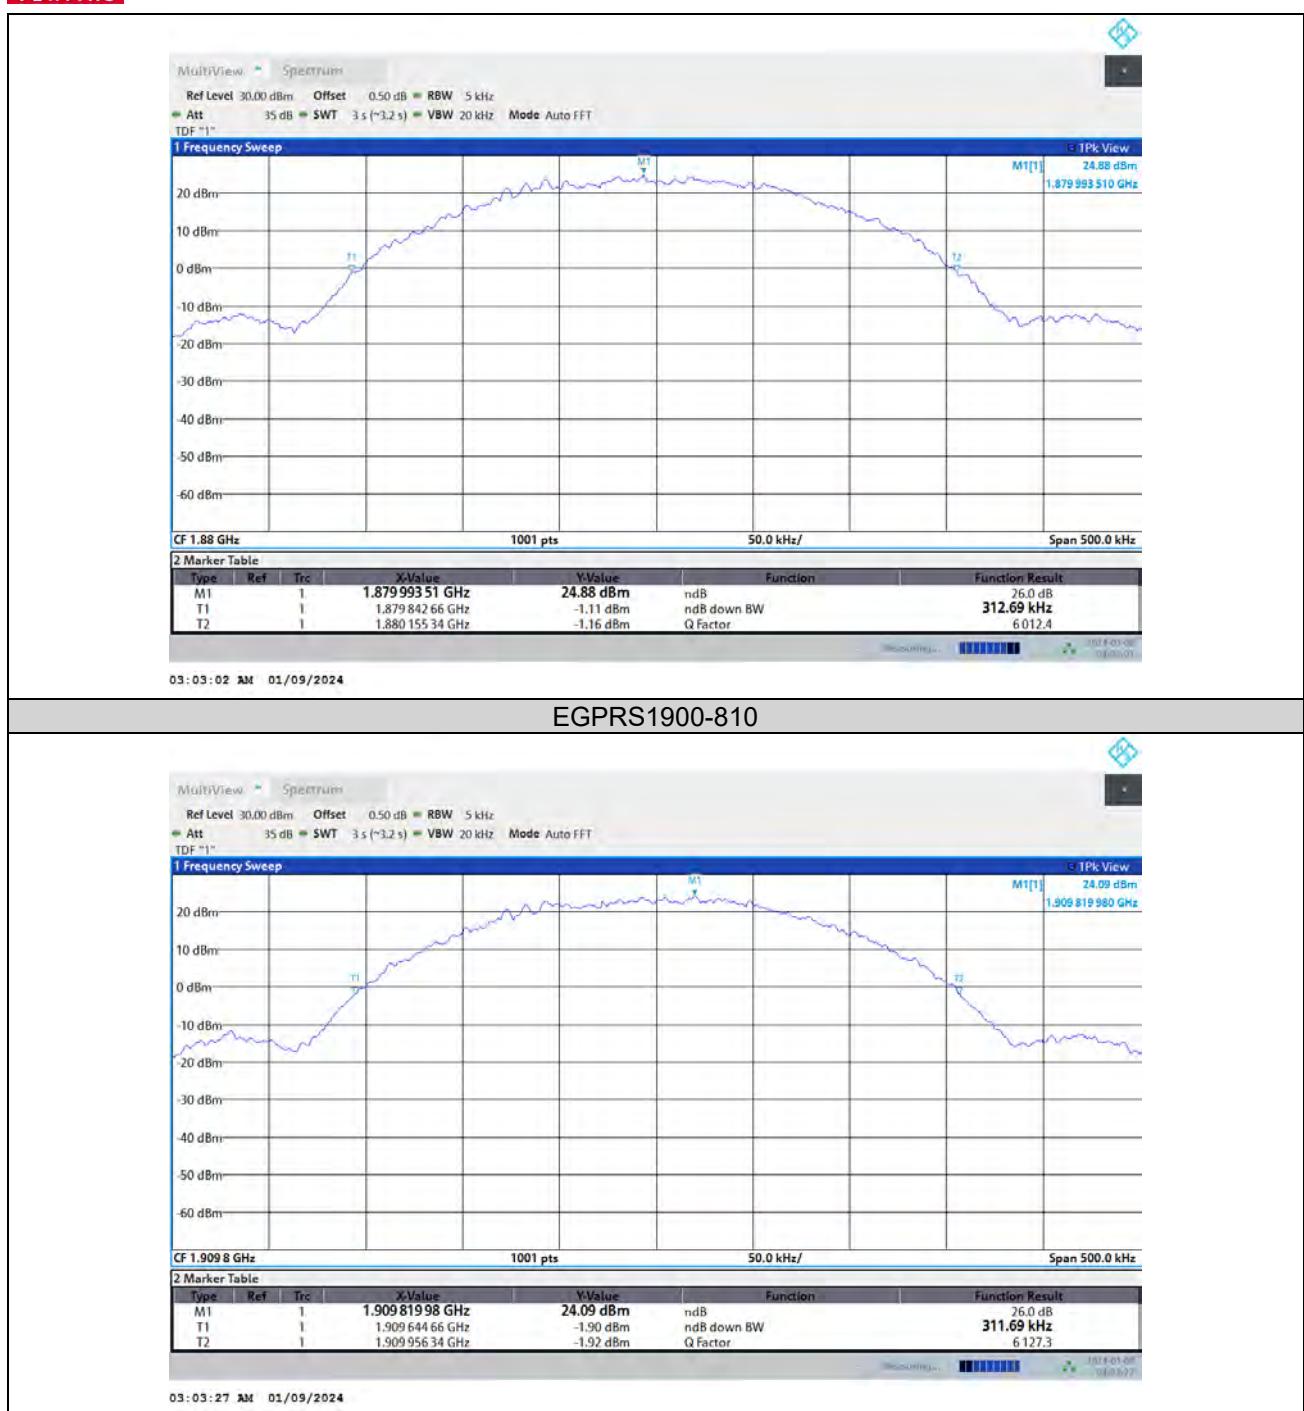



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

### Occupied Bandwidth

#### GSM1900-512



#### GSM1900-661

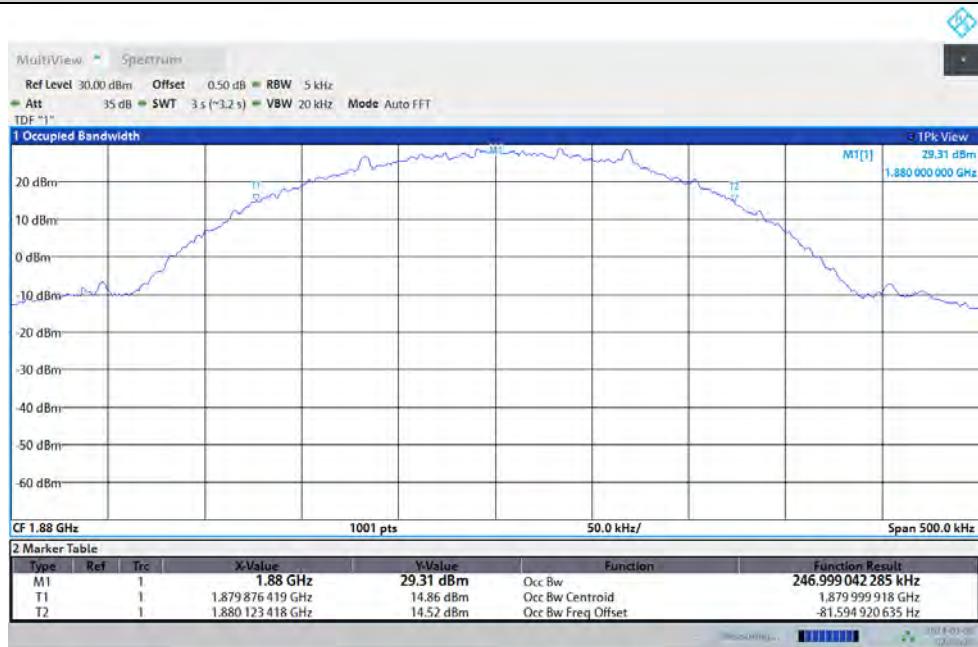


#### GSM1900-810




BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02

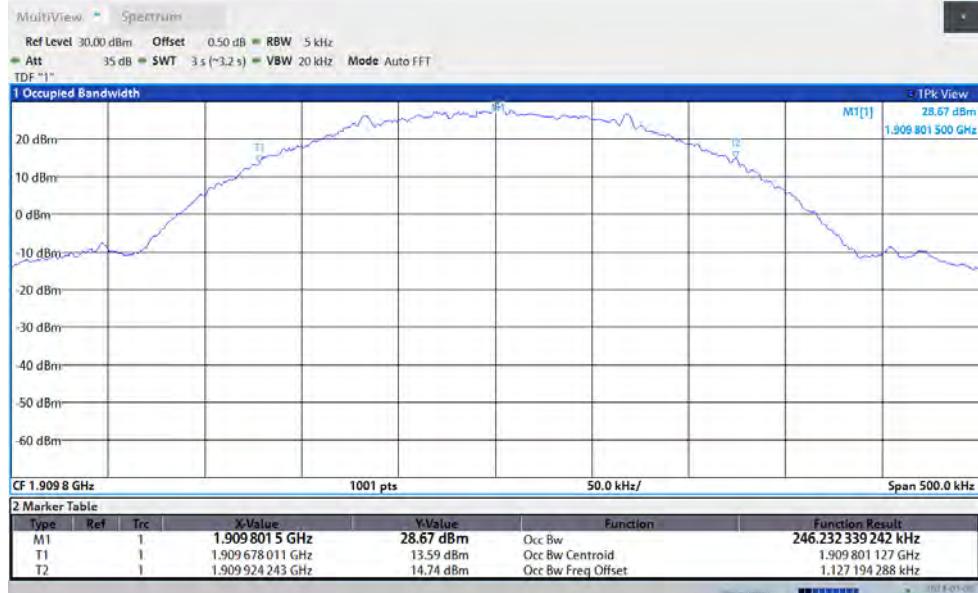

## EGPRS1900-512

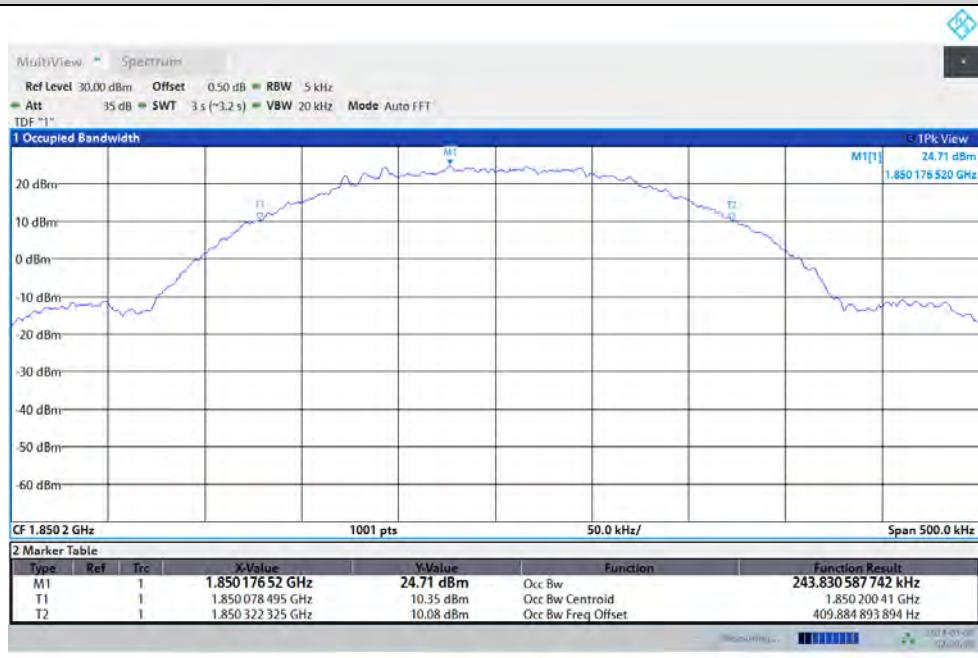


## EGPRS1900-661




BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02

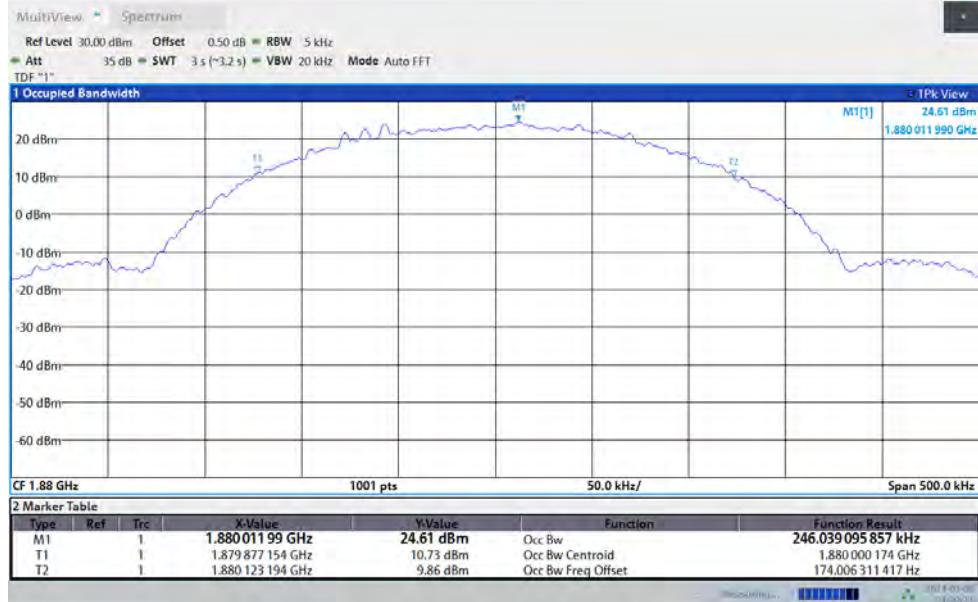

## EGPRS1900-810

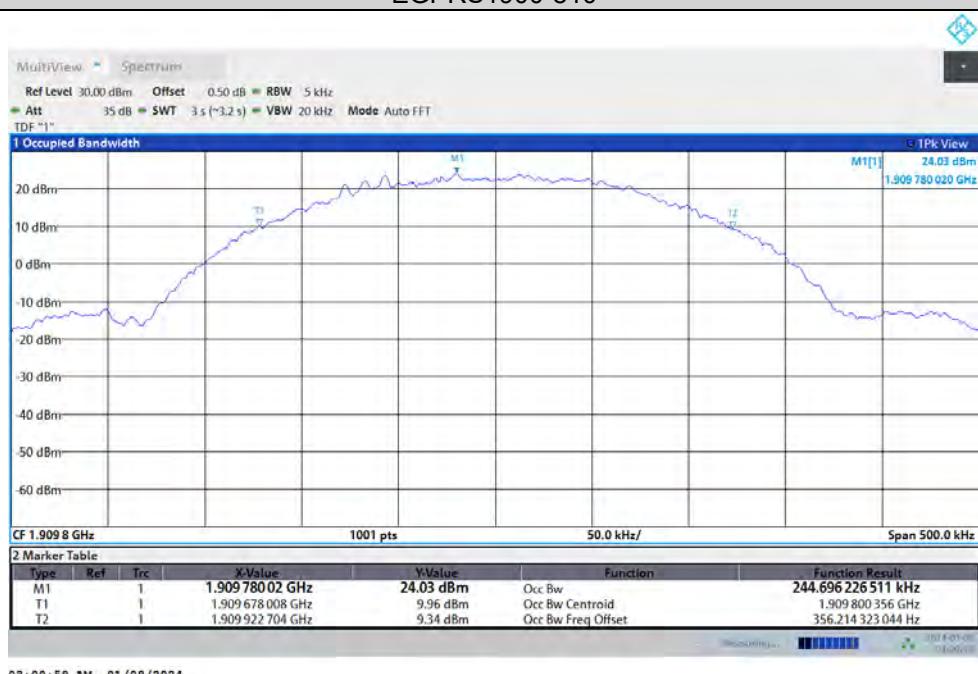



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## BAND EDGE

### Test Result


Band	Channel	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM1900	512	1849.996	-27.45	-13	PASS
GSM1900	810	1910.022	-27.51	-13	PASS
EGPRS1900	512	1849.988	-32.66	-13	PASS
EGPRS1900	810	1910.008	-33.97	-13	PASS



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## Test Graphs

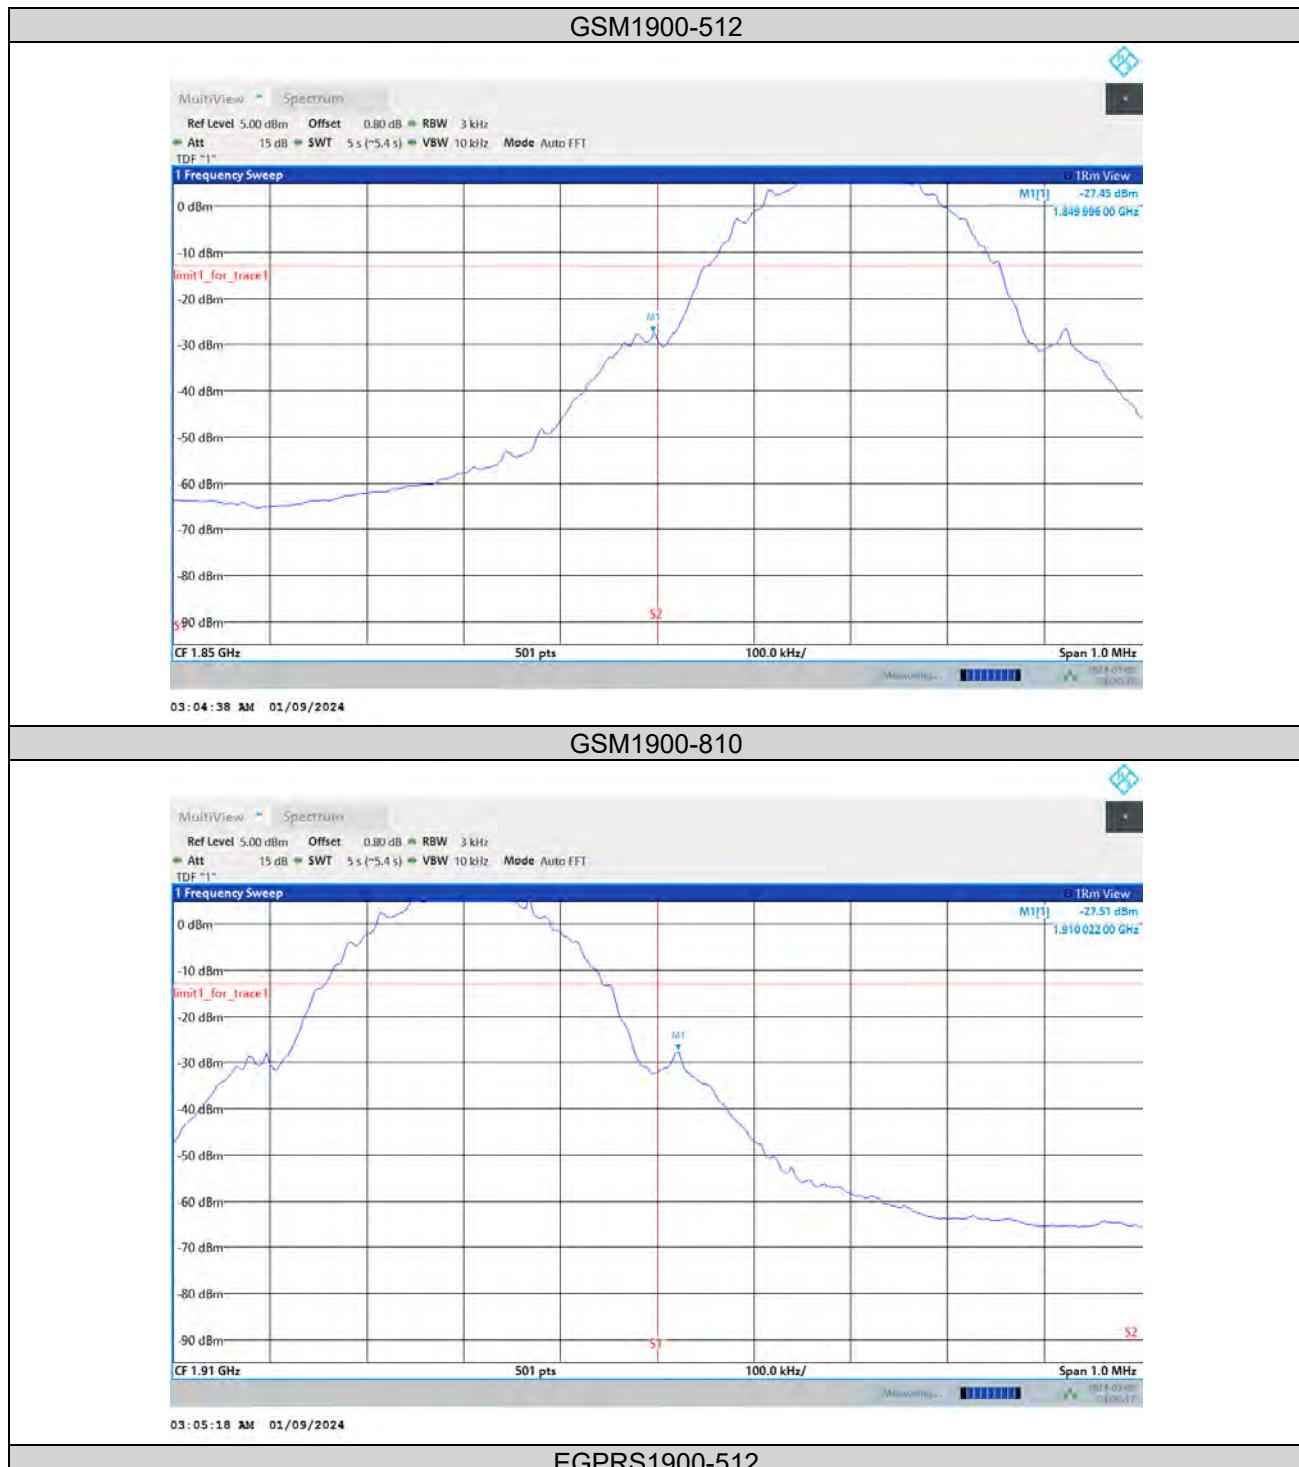




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02



### EGPRS1900-810

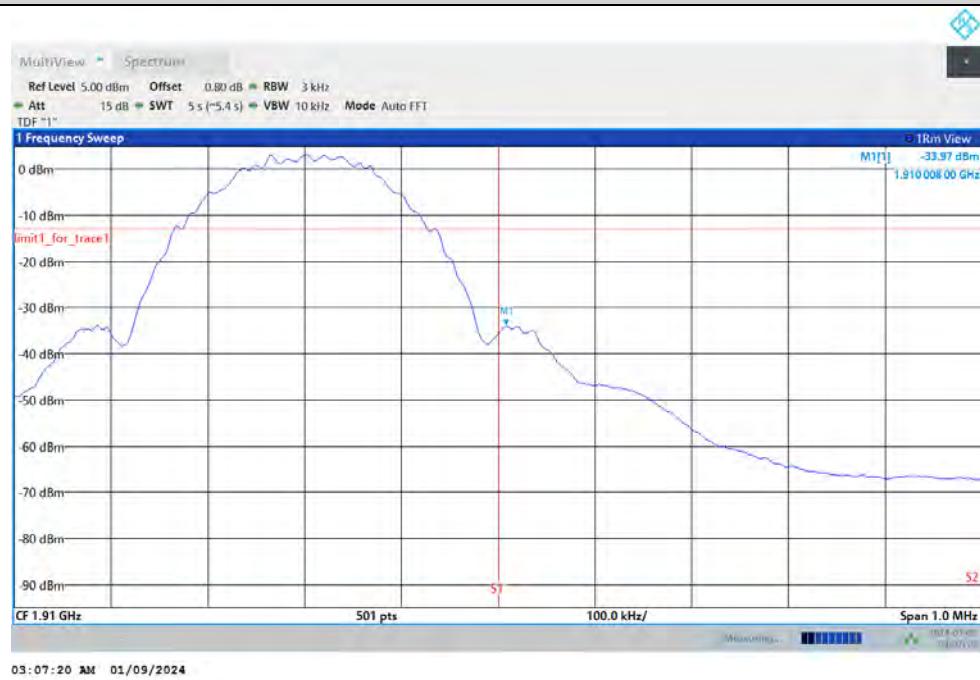



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## CONDUCTED SPURIOUS EMISSION

### Test Result


Band	Channel	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM1900	512	30~19100MHz	1766.006	-31.787	-13	PASS
GSM1900	661	30~19100MHz	1766.006	-31.660	-13	PASS
GSM1900	810	30~19100MHz	1766.006	-30.236	-13	PASS
EGPRS1900	512	30~19100MHz	18960.153	-32.723	-13	PASS
EGPRS1900	661	30~19100MHz	18948.711	-33.377	-13	PASS
EGPRS1900	810	30~19100MHz	19084.108	-33.163	-13	PASS



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02


## Test Graphs

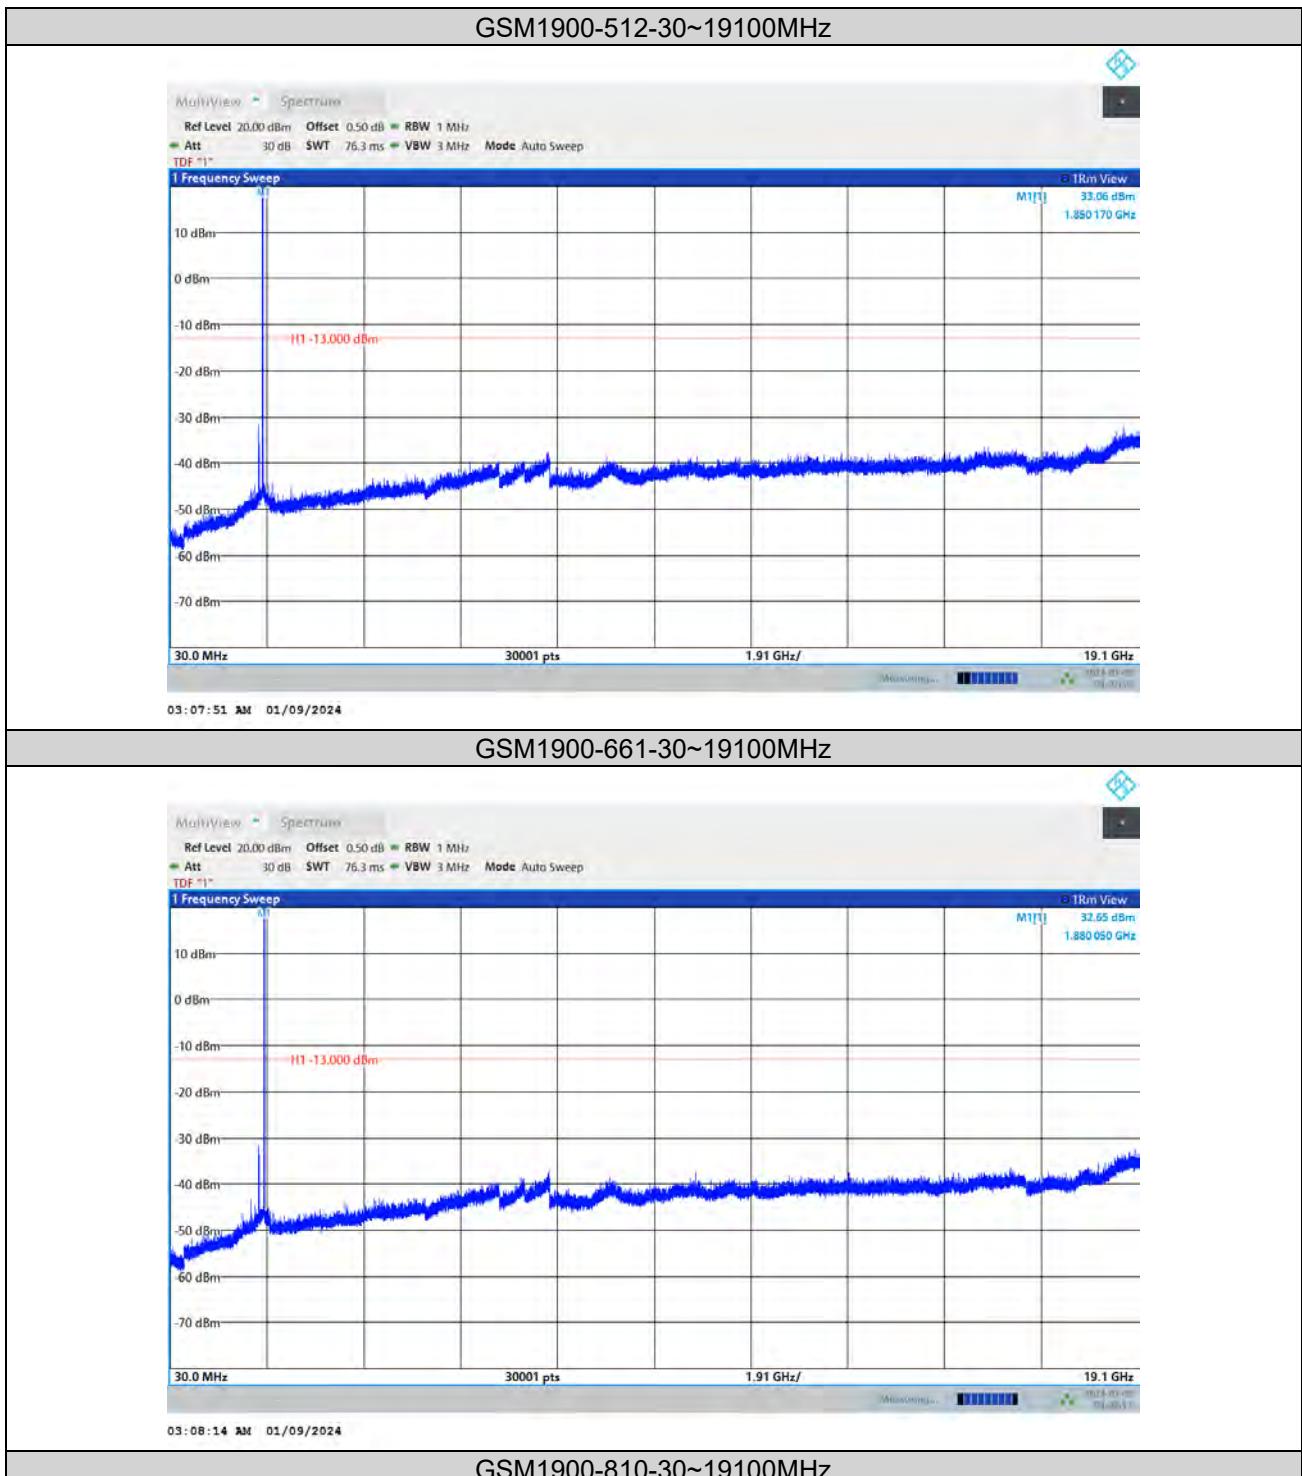




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

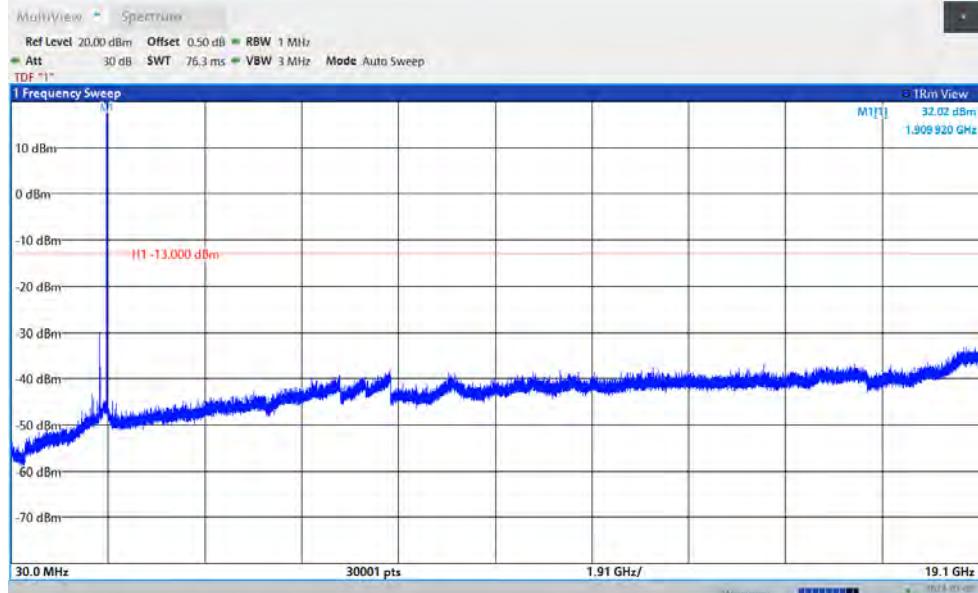

EGPRS1900-512-30~19100MHz

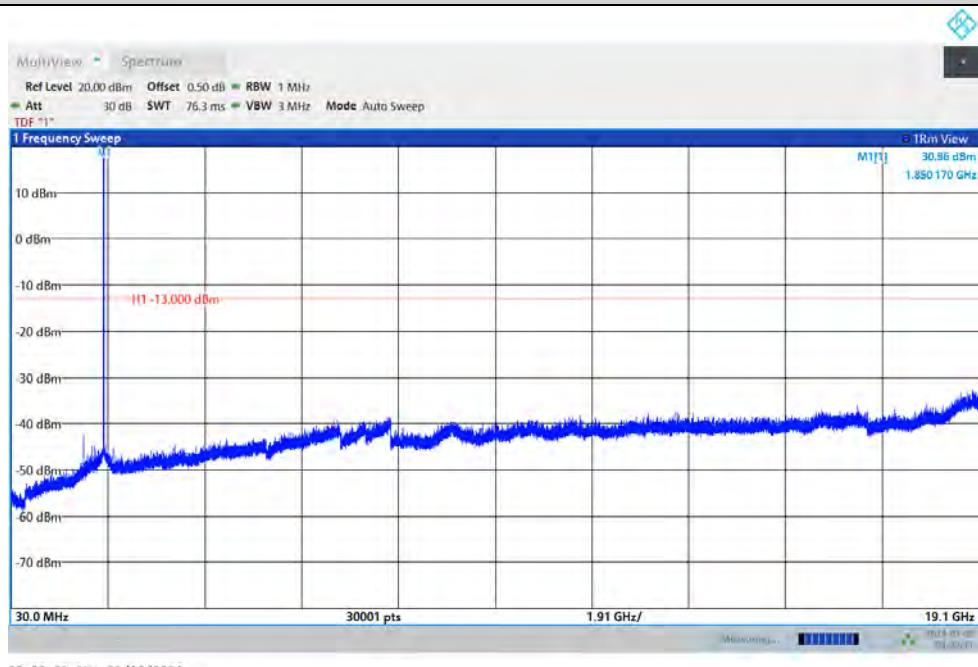


EGPRS1900-661-30~19100MHz



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

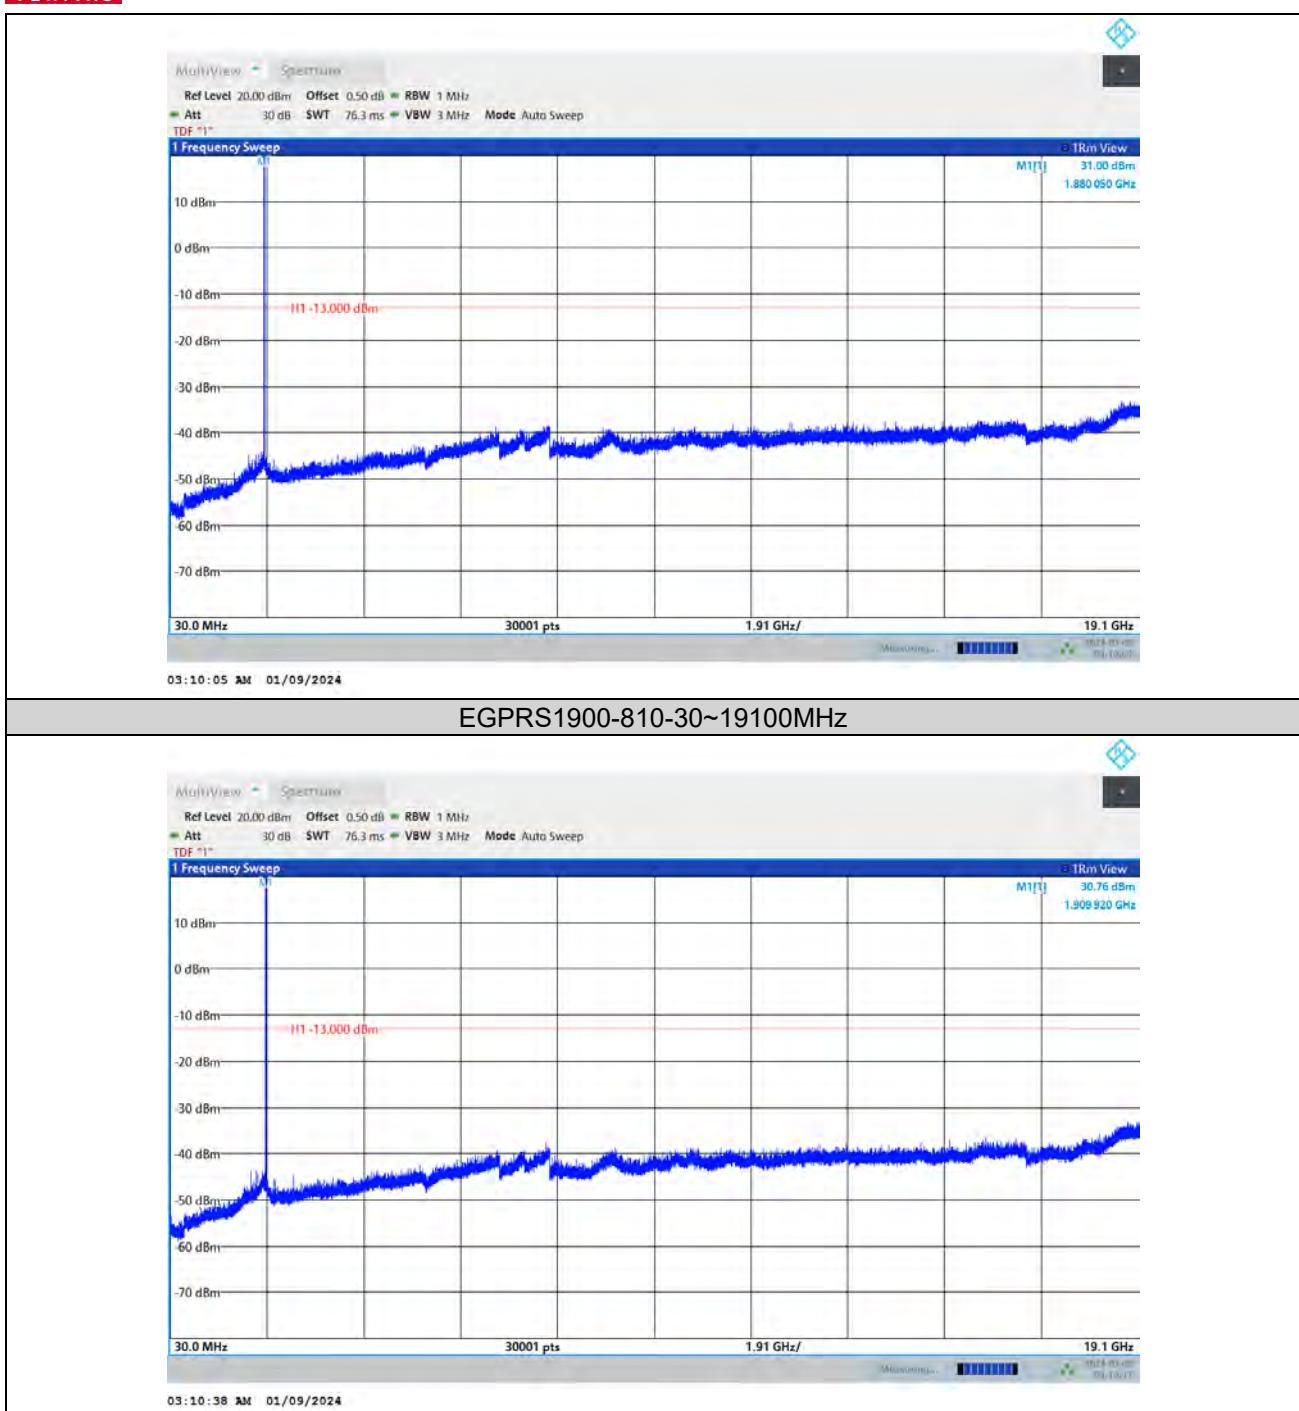

BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## FREQUENCY STABILITY

### Test Result

Band	Channel	Voltage						Verdict
		Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)		
GSM1900	512	VL	NT	-0.82	-0.000443	±2.5	PASS	
GSM1900	512	VN	NT	7.61	0.004113	±2.5	PASS	
GSM1900	512	VH	NT	-3.82	-0.002065	±2.5	PASS	
GSM1900	661	VL	NT	-3.83	-0.002037	±2.5	PASS	
GSM1900	661	VN	NT	-3.57	-0.001899	±2.5	PASS	
GSM1900	661	VH	NT	-1.04	-0.000553	±2.5	PASS	
GSM1900	810	VL	NT	-7.35	-0.003849	±2.5	PASS	
GSM1900	810	VN	NT	-7.36	-0.003854	±2.5	PASS	
GSM1900	810	VH	NT	0.9	0.000471	±2.5	PASS	
EGPRS1900	512	VL	NT	-6.25	-0.003378	±2.5	PASS	
EGPRS1900	512	VN	NT	-8.48	-0.004583	±2.5	PASS	
EGPRS1900	512	VH	NT	2.33	0.001259	±2.5	PASS	
EGPRS1900	661	VL	NT	-4.17	-0.002218	±2.5	PASS	
EGPRS1900	661	VN	NT	4.5	0.002394	±2.5	PASS	
EGPRS1900	661	VH	NT	1.45	0.000771	±2.5	PASS	
EGPRS1900	810	VL	NT	-2.54	-0.001330	±2.5	PASS	
EGPRS1900	810	VN	NT	-0.53	-0.000278	±2.5	PASS	
EGPRS1900	810	VH	NT	-5.52	-0.002890	±2.5	PASS	

BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

Temperature							
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM1900	512	NV	-30	0.06	0.000032	±2.5	PASS
GSM1900	512	NV	-20	-9.56	-0.005167	±2.5	PASS
GSM1900	512	NV	-10	-2.44	-0.001319	±2.5	PASS
GSM1900	512	NV	0	-9.09	-0.004913	±2.5	PASS
GSM1900	512	NV	10	0.11	0.000059	±2.5	PASS
GSM1900	512	NV	20	-2.57	-0.001389	±2.5	PASS
GSM1900	512	NV	30	6.23	0.003367	±2.5	PASS
GSM1900	512	NV	40	1.41	0.000762	±2.5	PASS
GSM1900	512	NV	50	-8.3	-0.004486	±2.5	PASS
GSM1900	661	NV	-30	1.41	0.000750	±2.5	PASS
GSM1900	661	NV	-20	-2.37	-0.001261	±2.5	PASS
GSM1900	661	NV	-10	-7.83	-0.004165	±2.5	PASS
GSM1900	661	NV	0	2.98	0.001585	±2.5	PASS
GSM1900	661	NV	10	5.43	0.002888	±2.5	PASS
GSM1900	661	NV	20	-9.79	-0.005207	±2.5	PASS
GSM1900	661	NV	30	8.25	0.004388	±2.5	PASS
GSM1900	661	NV	40	-5.23	-0.002782	±2.5	PASS
GSM1900	661	NV	50	-5.27	-0.002803	±2.5	PASS
GSM1900	810	NV	-30	5.26	0.002754	±2.5	PASS
GSM1900	810	NV	-20	2.57	0.001346	±2.5	PASS
GSM1900	810	NV	-10	-0.76	-0.000398	±2.5	PASS
GSM1900	810	NV	0	3.95	0.002068	±2.5	PASS
GSM1900	810	NV	10	-4.38	-0.002293	±2.5	PASS
GSM1900	810	NV	20	-7.59	-0.003974	±2.5	PASS
GSM1900	810	NV	30	-5.62	-0.002943	±2.5	PASS
GSM1900	810	NV	40	-9.19	-0.004812	±2.5	PASS
GSM1900	810	NV	50	-8.65	-0.004529	±2.5	PASS
EGPRS1900	512	NV	-30	1.23	0.000665	±2.5	PASS
EGPRS1900	512	NV	-20	7.05	0.003810	±2.5	PASS
EGPRS1900	512	NV	-10	5.94	0.003210	±2.5	PASS
EGPRS1900	512	NV	0	9.62	0.005199	±2.5	PASS
EGPRS1900	512	NV	10	0.96	0.000519	±2.5	PASS
EGPRS1900	512	NV	20	2.11	0.001140	±2.5	PASS
EGPRS1900	512	NV	30	-1.59	-0.000859	±2.5	PASS
EGPRS1900	512	NV	40	-5.09	-0.002751	±2.5	PASS
EGPRS1900	512	NV	50	5.28	0.002854	±2.5	PASS
EGPRS1900	661	NV	-30	-3.13	-0.001665	±2.5	PASS
EGPRS1900	661	NV	-20	0.89	0.000473	±2.5	PASS
EGPRS1900	661	NV	-10	-7.53	-0.004005	±2.5	PASS
EGPRS1900	661	NV	0	-4.94	-0.002628	±2.5	PASS
EGPRS1900	661	NV	10	3.39	0.001803	±2.5	PASS
EGPRS1900	661	NV	20	-9.23	-0.004910	±2.5	PASS
EGPRS1900	661	NV	30	9.23	0.004910	±2.5	PASS
EGPRS1900	661	NV	40	2.43	0.001293	±2.5	PASS
EGPRS1900	661	NV	50	4.96	0.002638	±2.5	PASS
EGPRS1900	810	NV	-30	5.56	0.002911	±2.5	PASS



BUREAU  
VERITAS

**Test Report No.: PSU-NQN2311090109RF02**

EGPRS1900	810	NV	-20	5.24	0.002744	$\pm 2.5$	PASS
EGPRS1900	810	NV	-10	-2.25	-0.001178	$\pm 2.5$	PASS
EGPRS1900	810	NV	0	-1.99	-0.001042	$\pm 2.5$	PASS
EGPRS1900	810	NV	10	3	0.001571	$\pm 2.5$	PASS
EGPRS1900	810	NV	20	-4.76	-0.002492	$\pm 2.5$	PASS
EGPRS1900	810	NV	30	9.3	0.004870	$\pm 2.5$	PASS
EGPRS1900	810	NV	40	-6.02	-0.003152	$\pm 2.5$	PASS
EGPRS1900	810	NV	50	9.74	0.005100	$\pm 2.5$	PASS



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## WCDMA BAND2

### PEAK-TO-AVERAGE RATIO

#### Test Result


Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
Band2	9262	2.60	13	PASS
Band2	9400	2.80	13	PASS
Band2	9538	2.76	13	PASS



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02


## Test Graphs

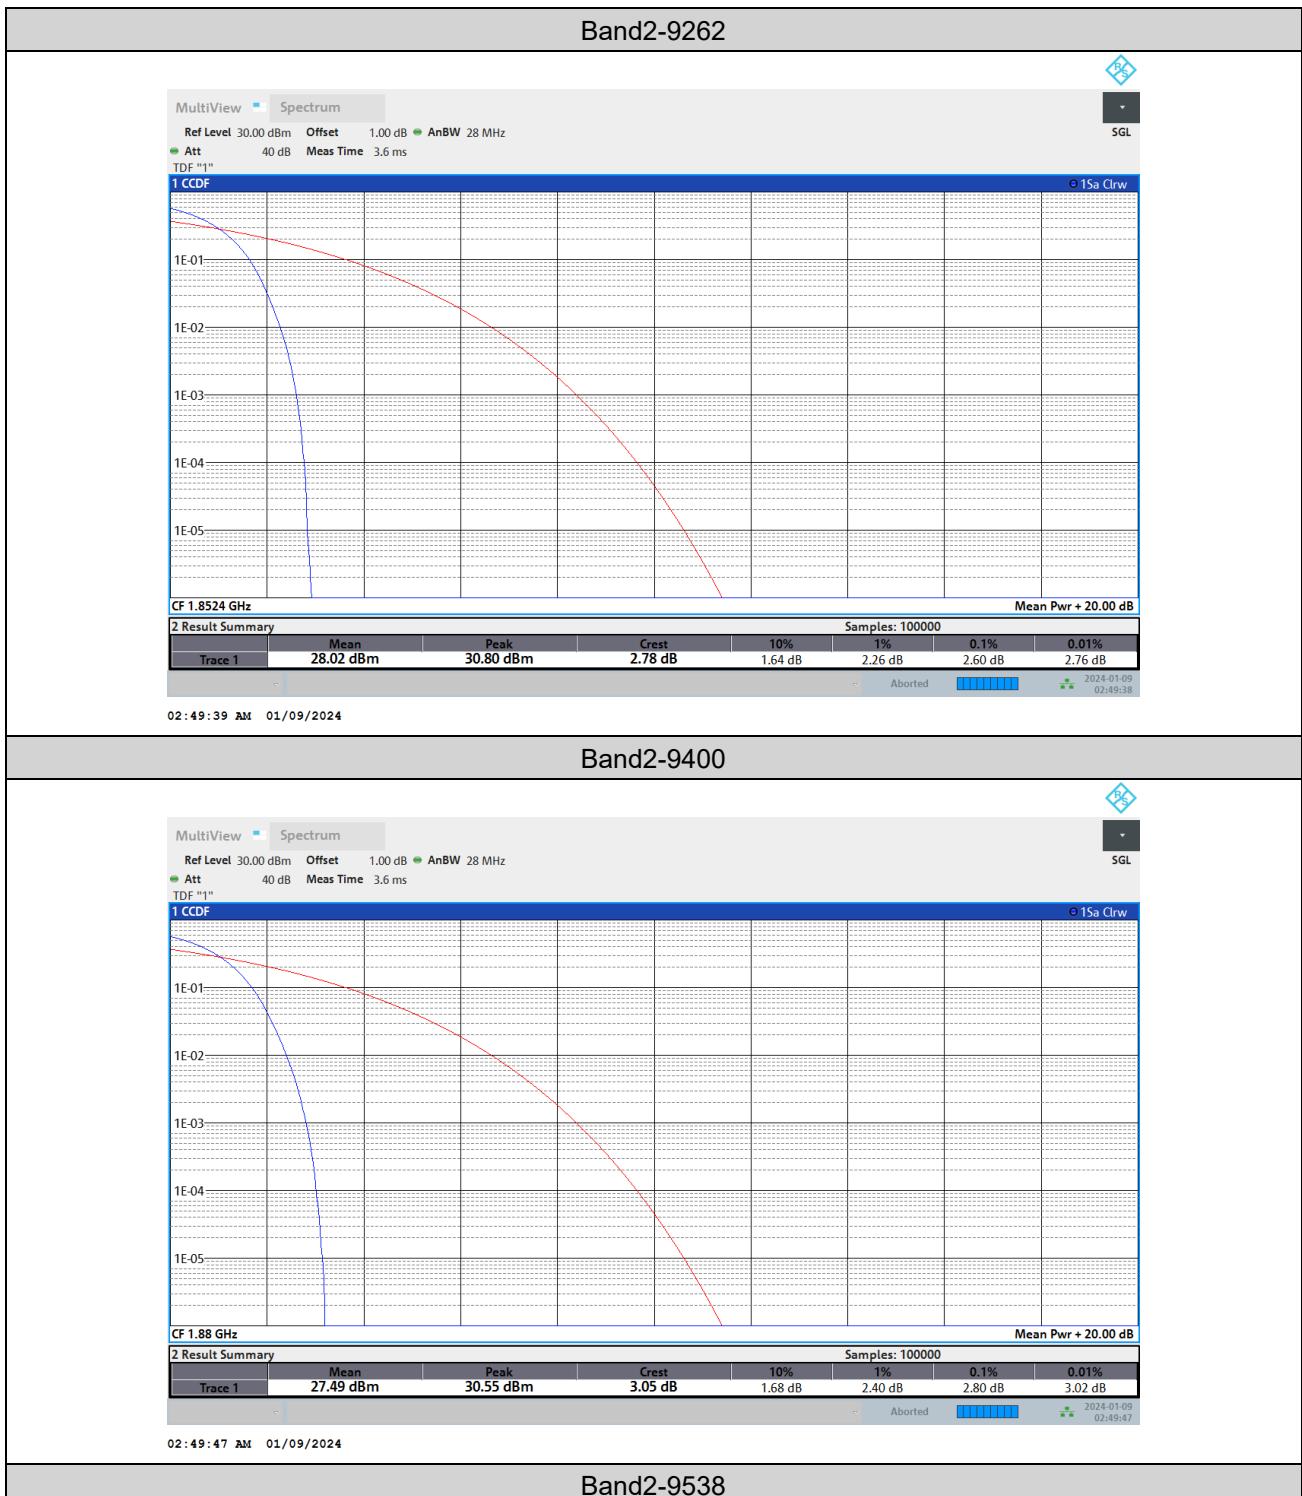



BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02

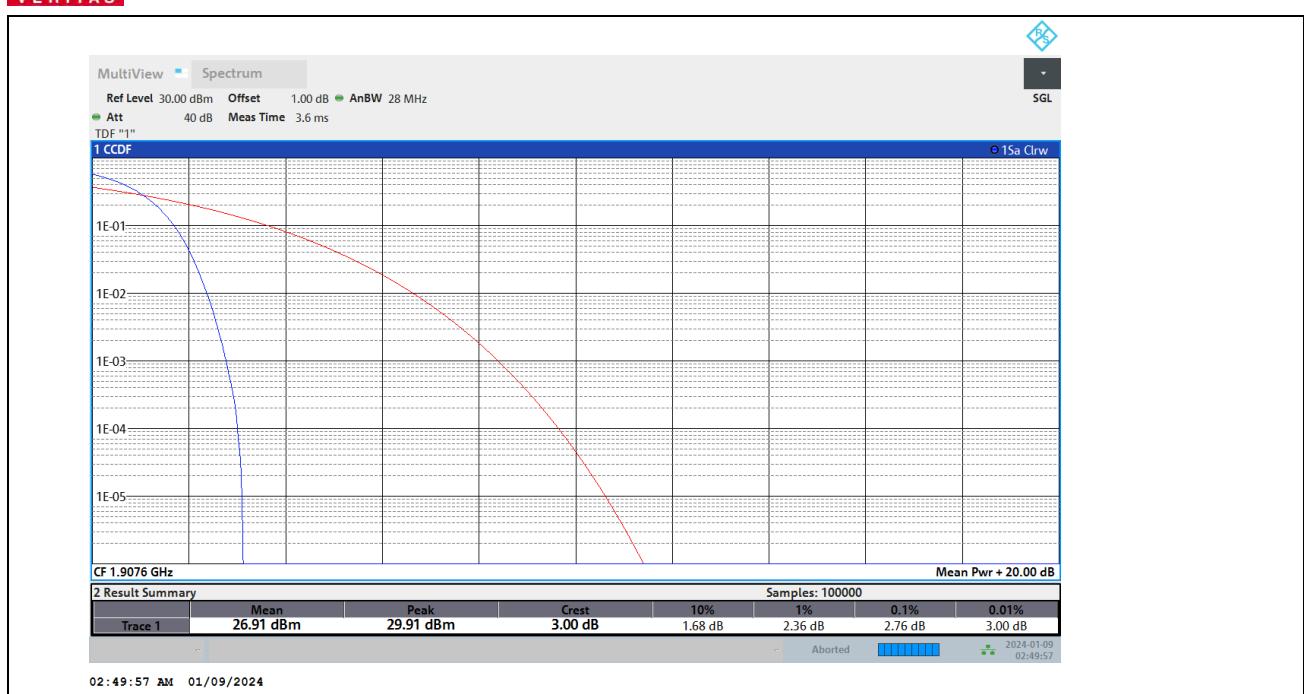



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## 26DB BANDWIDTH AND OCCUPIED BANDWIDTH

### Test Result

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(kHz)	Verdict
Band2	9262	4.143	4.70	---	PASS
Band2	9400	4.142	4.70	---	PASS
Band2	9538	4.146	4.71	---	PASS




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## Test Graphs

### Occupied Bandwidth

#### Band2-9262

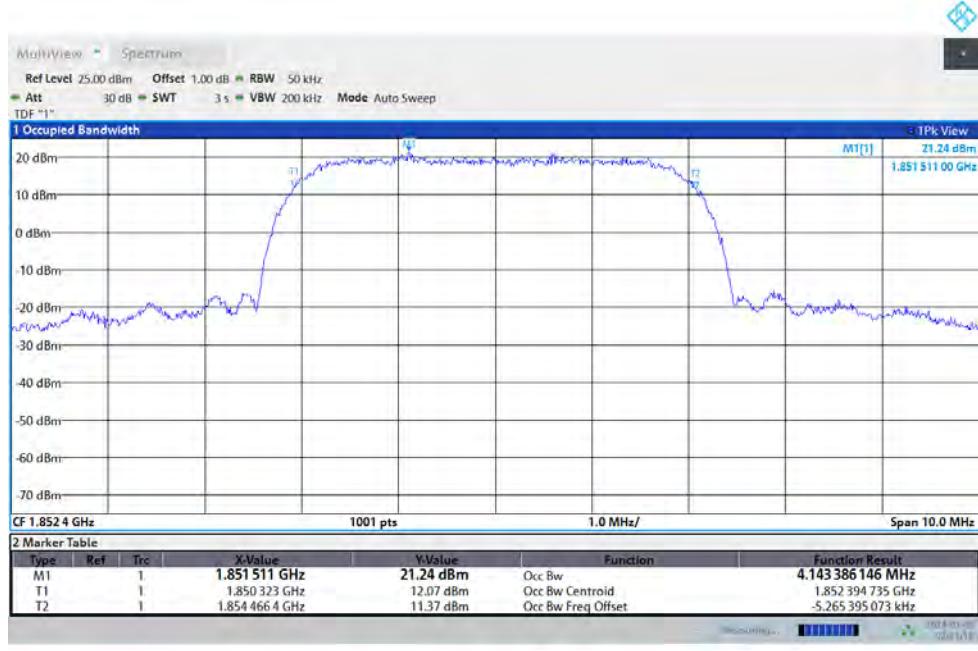

#### Band2-9400




#### Band2-9538




BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02

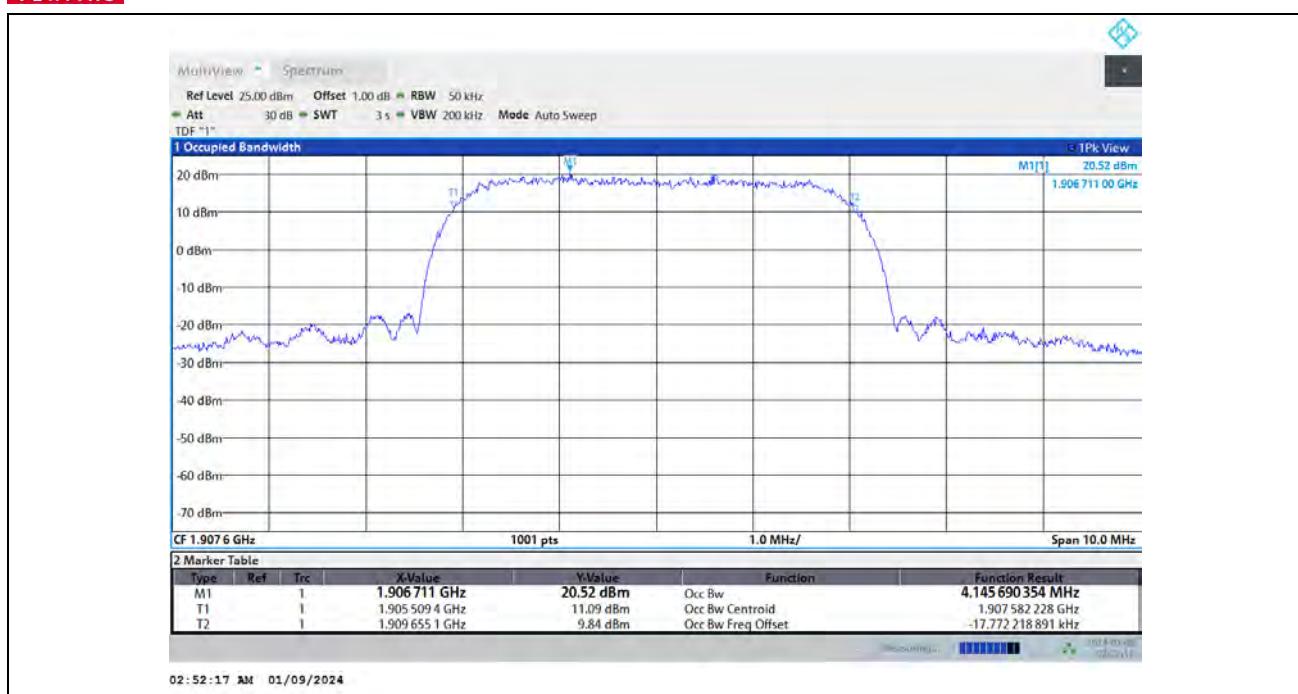


26dB Bandwidth

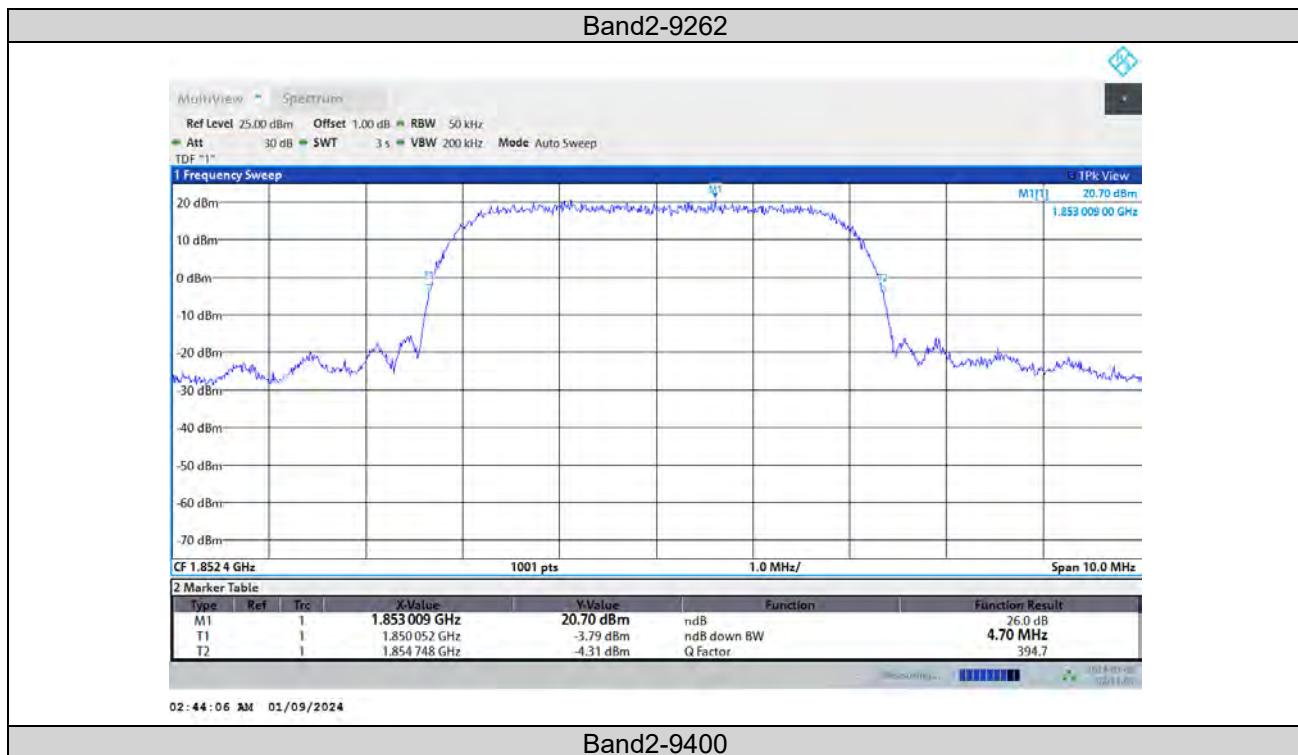




BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02

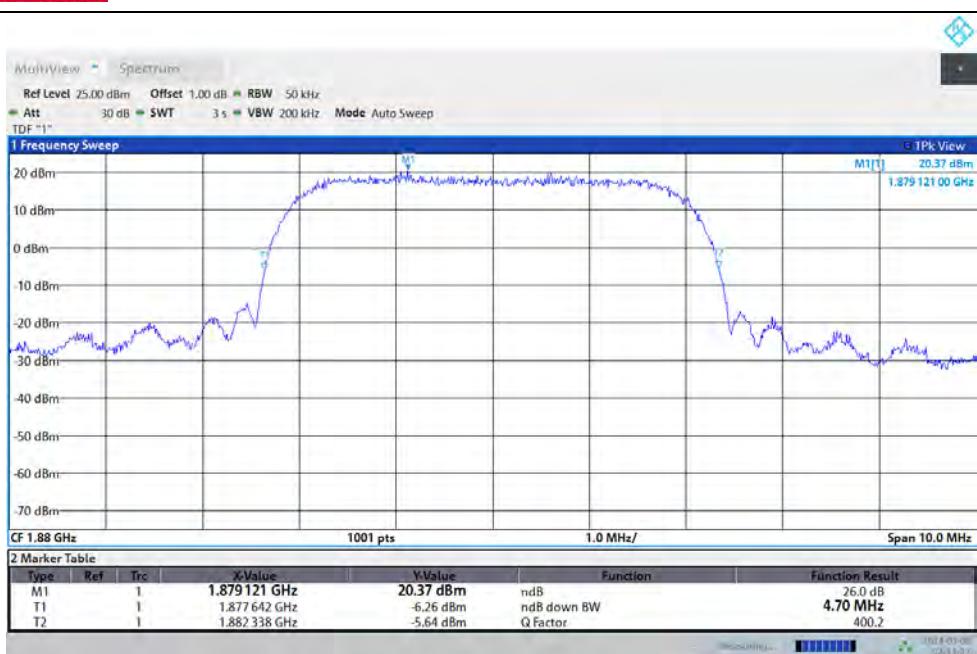

### Band2-9538

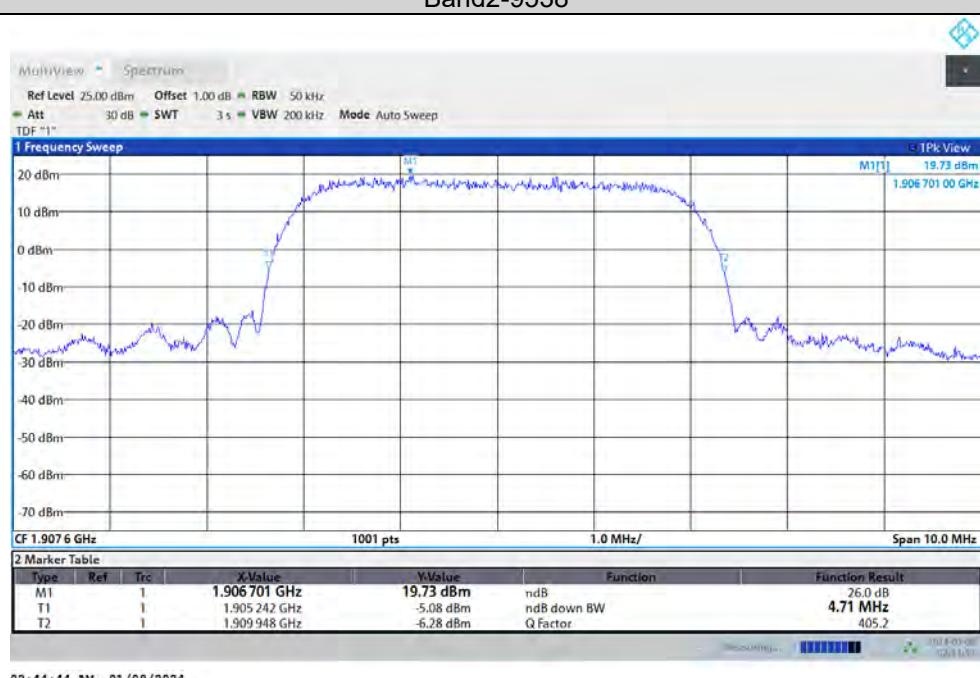



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## BAND EDGE

### Test Result

Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1848.99	-22.02	-13	PASS
Band2	9538	1911.03	-23.65	-13	PASS



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## Test Graphs





BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## CONDUCTED SPURIOUS EMISSION

### Test Result


Band	Channel	Frequency Range (Mhz)	Frequency (MHz)	Result (dBm)	Limit (dBm)	Verdict
Band2	9262	30~20000MHz	See Graph	See Graph	-13	PASS
Band2	9400	30~20000MHz	See Graph	See Graph	-13	PASS
Band2	9538	30~20000MHz	See Graph	See Graph	-13	PASS



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02


## Test Graphs

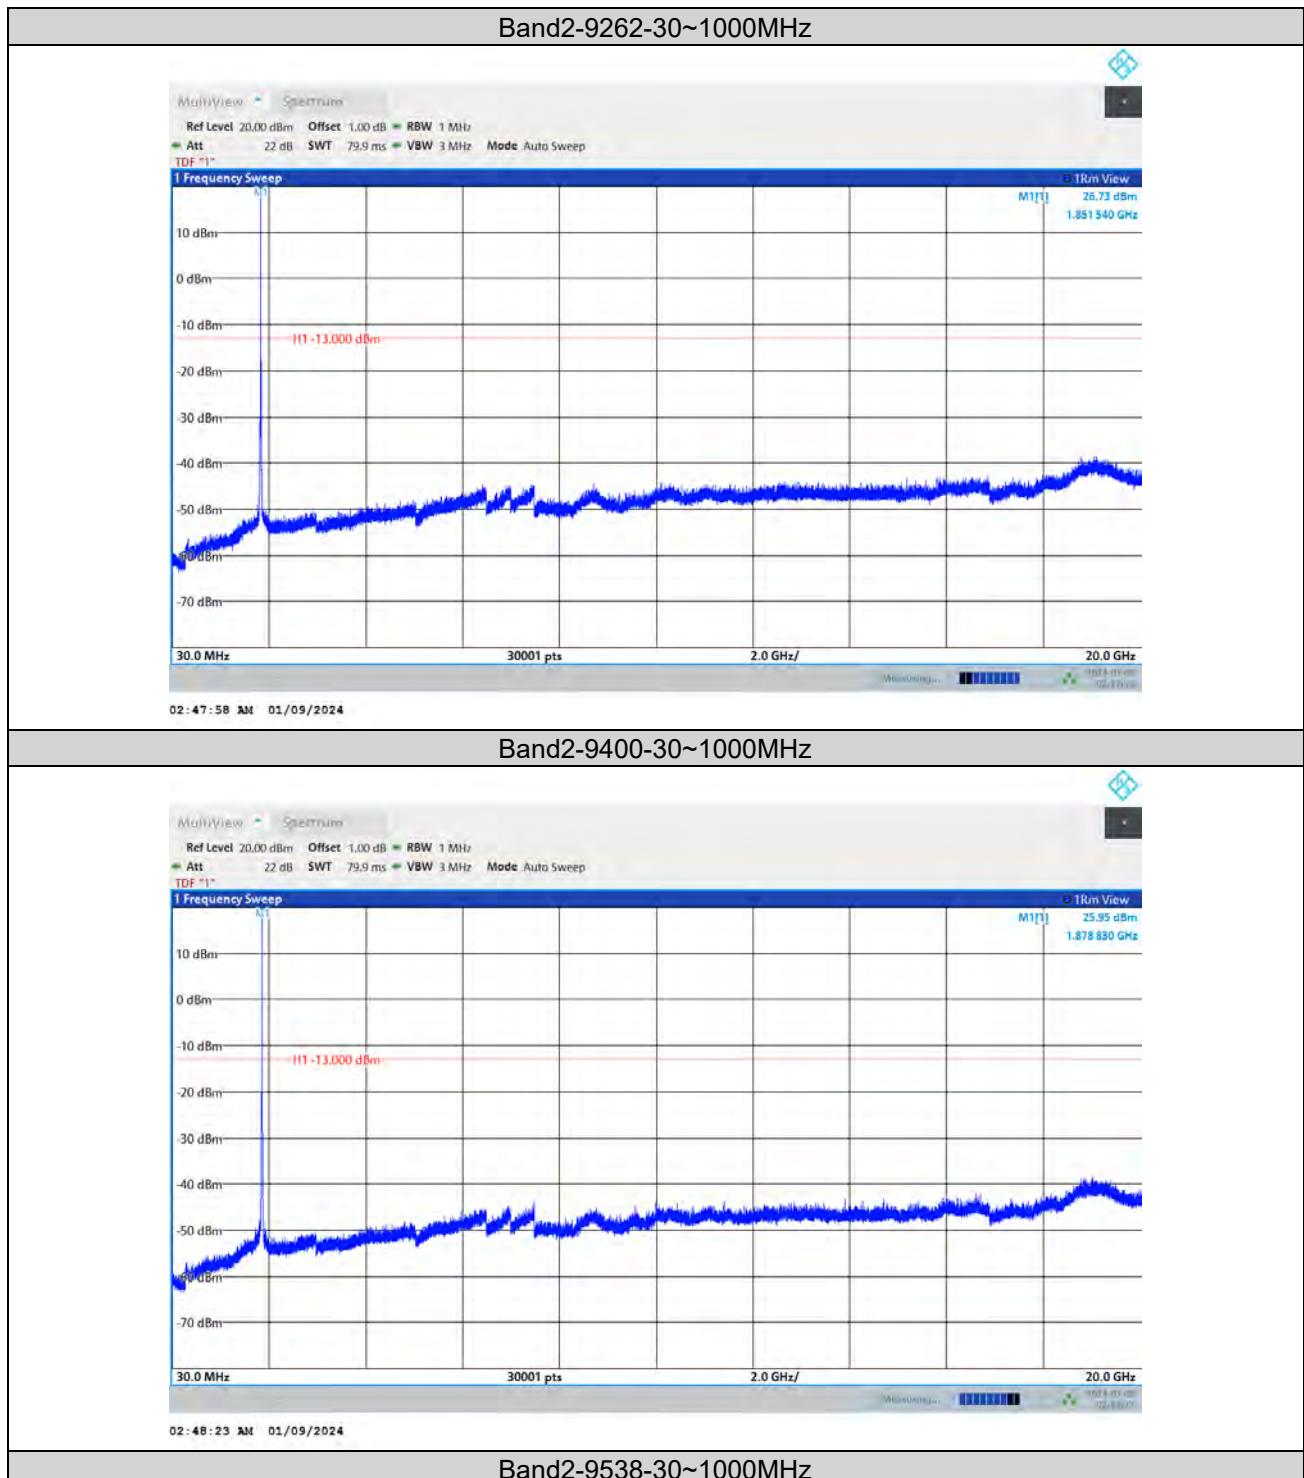



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

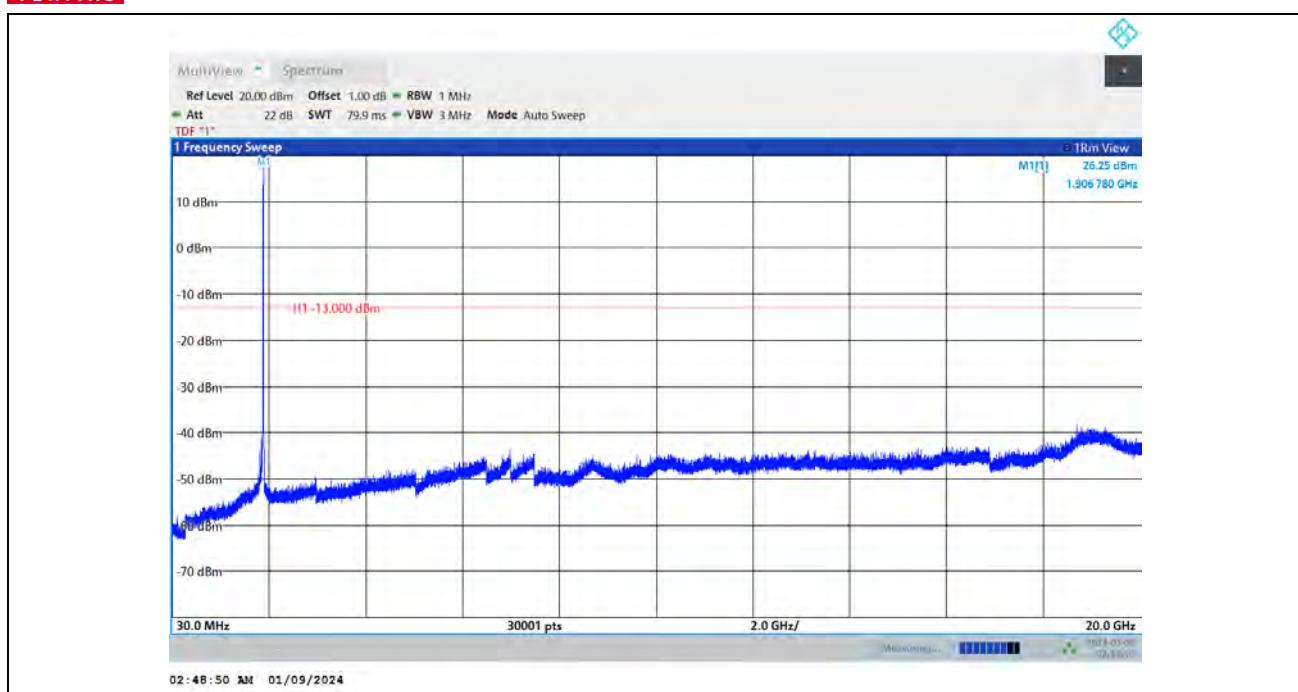

BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## FREQUENCY STABILITY

### Test Result

Voltage							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band2	9262	VL	NT	2.6	0.001404	±2.5	PASS
Band2	9262	VN	NT	-8.71	-0.004702	±2.5	PASS
Band2	9262	VH	NT	-0.86	-0.000464	±2.5	PASS
Band2	9400	VL	NT	5.62	0.002989	±2.5	PASS
Band2	9400	VN	NT	-2.95	-0.001569	±2.5	PASS
Band2	9400	VH	NT	-8.39	-0.004463	±2.5	PASS
Band2	9538	VL	NT	-6.17	-0.003120	±2.5	PASS
Band2	9538	VN	NT	5.92	0.002994	±2.5	PASS
Band2	9538	VH	NT	9.16	0.004632	±2.5	PASS

Temperature							
Band	Channel	Voltage (Vdc)	Temperatur e (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
Band2	9262	NV	-30	-1.56	-0.000842	±2.5	PASS
Band2	9262	NV	-20	3.96	0.002138	±2.5	PASS
Band2	9262	NV	-10	9.15	0.004940	±2.5	PASS
Band2	9262	NV	0	7.04	0.003800	±2.5	PASS
Band2	9262	NV	10	-4.66	-0.002516	±2.5	PASS
Band2	9262	NV	20	-3.38	-0.001825	±2.5	PASS
Band2	9262	NV	30	1.86	0.001004	±2.5	PASS
Band2	9262	NV	40	8.5	0.004589	±2.5	PASS
Band2	9262	NV	50	7.88	0.004254	±2.5	PASS
Band2	9400	NV	-30	-9.09	-0.004835	±2.5	PASS
Band2	9400	NV	-20	4.71	0.002505	±2.5	PASS
Band2	9400	NV	-10	1.48	0.000787	±2.5	PASS
Band2	9400	NV	0	-0.35	-0.000186	±2.5	PASS
Band2	9400	NV	10	-9.07	-0.004824	±2.5	PASS
Band2	9400	NV	20	-6.97	-0.003707	±2.5	PASS
Band2	9400	NV	30	0.8	0.000426	±2.5	PASS
Band2	9400	NV	40	-7.4	-0.003936	±2.5	PASS
Band2	9400	NV	50	1.29	0.000686	±2.5	PASS
Band2	9538	NV	-30	-9.06	-0.004581	±2.5	PASS
Band2	9538	NV	-20	3.55	0.001795	±2.5	PASS
Band2	9538	NV	-10	-5.54	-0.002801	±2.5	PASS
Band2	9538	NV	0	-5.84	-0.002953	±2.5	PASS
Band2	9538	NV	10	-0.83	-0.000420	±2.5	PASS
Band2	9538	NV	20	1.86	0.000941	±2.5	PASS
Band2	9538	NV	30	7.69	0.003889	±2.5	PASS
Band2	9538	NV	40	0.82	0.000415	±2.5	PASS
Band2	9538	NV	50	-5.71	-0.002887	±2.5	PASS



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## LTE BAND2

### PEAK-TO-AVERAGE RATIO(CCDF)

#### Test Result


Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band2	20MHz	QPSK	18700	1RB#0	5.34	13	PASS
Band2	20MHz	QPSK	18700	100RB#0	5.34	13	PASS
Band2	20MHz	QPSK	18900	1RB#0	4.80	13	PASS
Band2	20MHz	QPSK	18900	100RB#0	5.48	13	PASS
Band2	20MHz	QPSK	19100	1RB#0	5.60	13	PASS
Band2	20MHz	QPSK	19100	100RB#0	5.30	13	PASS
Band2	20MHz	16QAM	18700	1RB#0	5.74	13	PASS
Band2	20MHz	16QAM	18700	100RB#0	6.08	13	PASS
Band2	20MHz	16QAM	18900	1RB#0	5.70	13	PASS
Band2	20MHz	16QAM	18900	100RB#0	6.42	13	PASS
Band2	20MHz	16QAM	19100	1RB#0	6.80	13	PASS
Band2	20MHz	16QAM	19100	100RB#0	6.16	13	PASS
Band2	20MHz	64QAM	18700	1RB#0	6.42	13	PASS
Band2	20MHz	64QAM	18700	100RB#0	6.68	13	PASS
Band2	20MHz	64QAM	18900	1RB#0	6.20	13	PASS
Band2	20MHz	64QAM	18900	100RB#0	6.68	13	PASS
Band2	20MHz	64QAM	19100	1RB#0	6.62	13	PASS
Band2	20MHz	64QAM	19100	100RB#0	6.54	13	PASS



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02


## Test Graphs

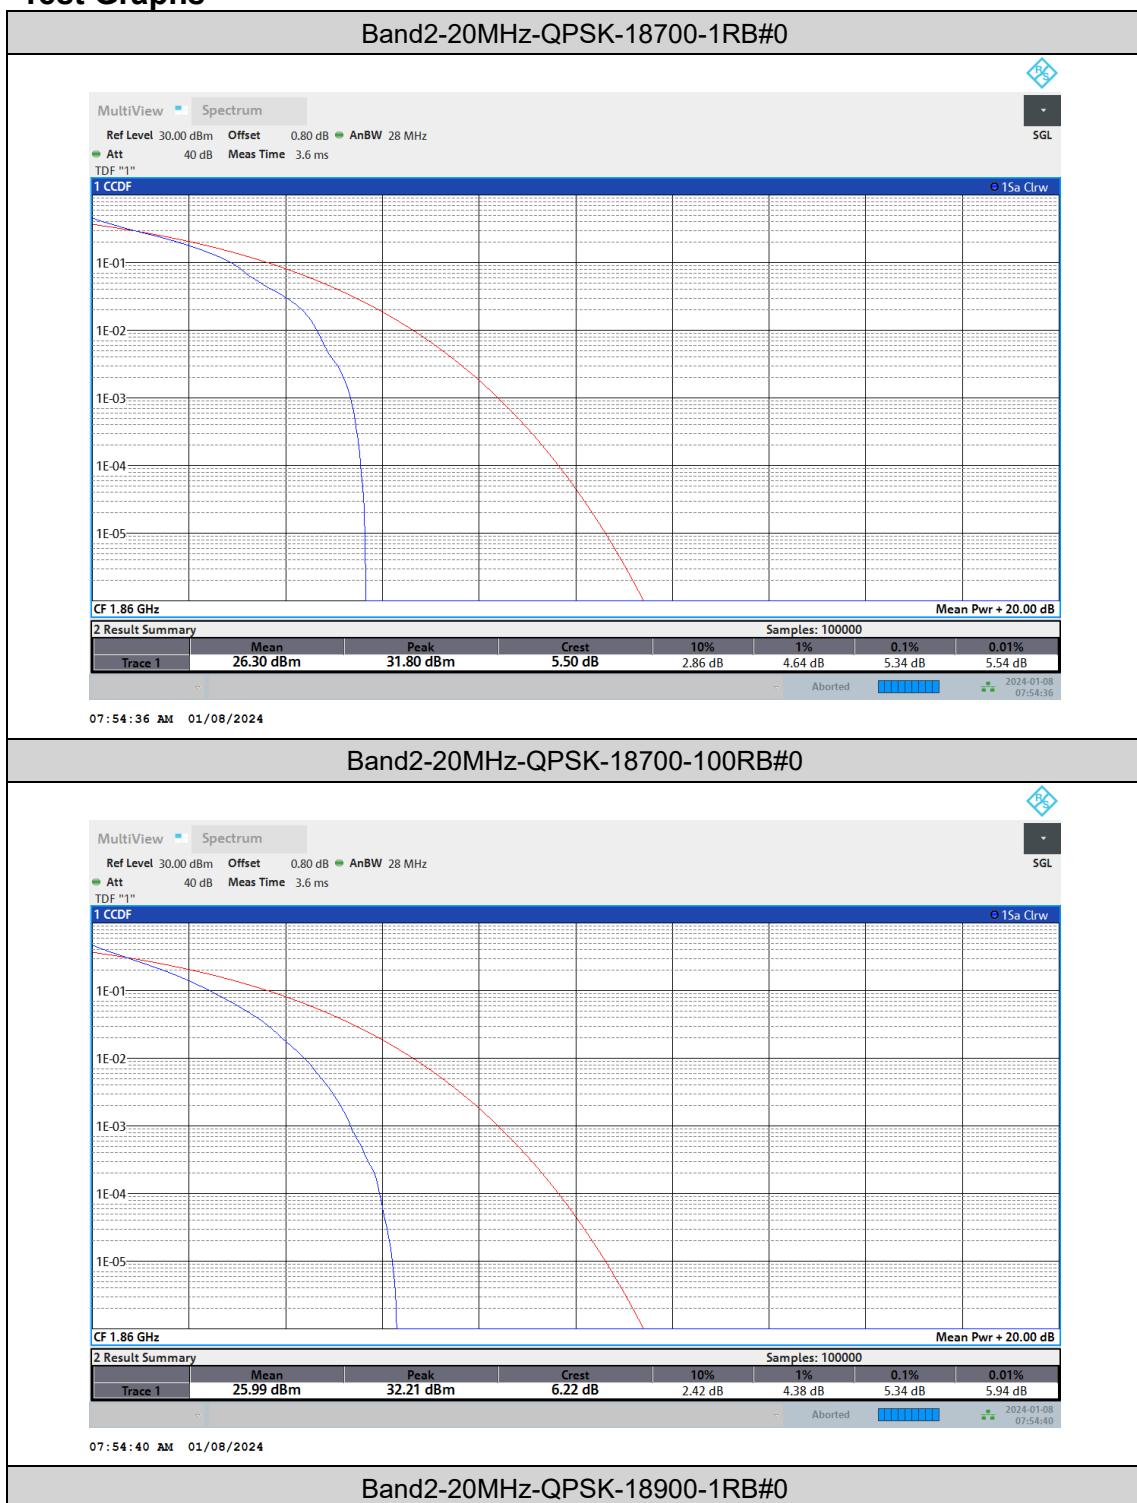



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

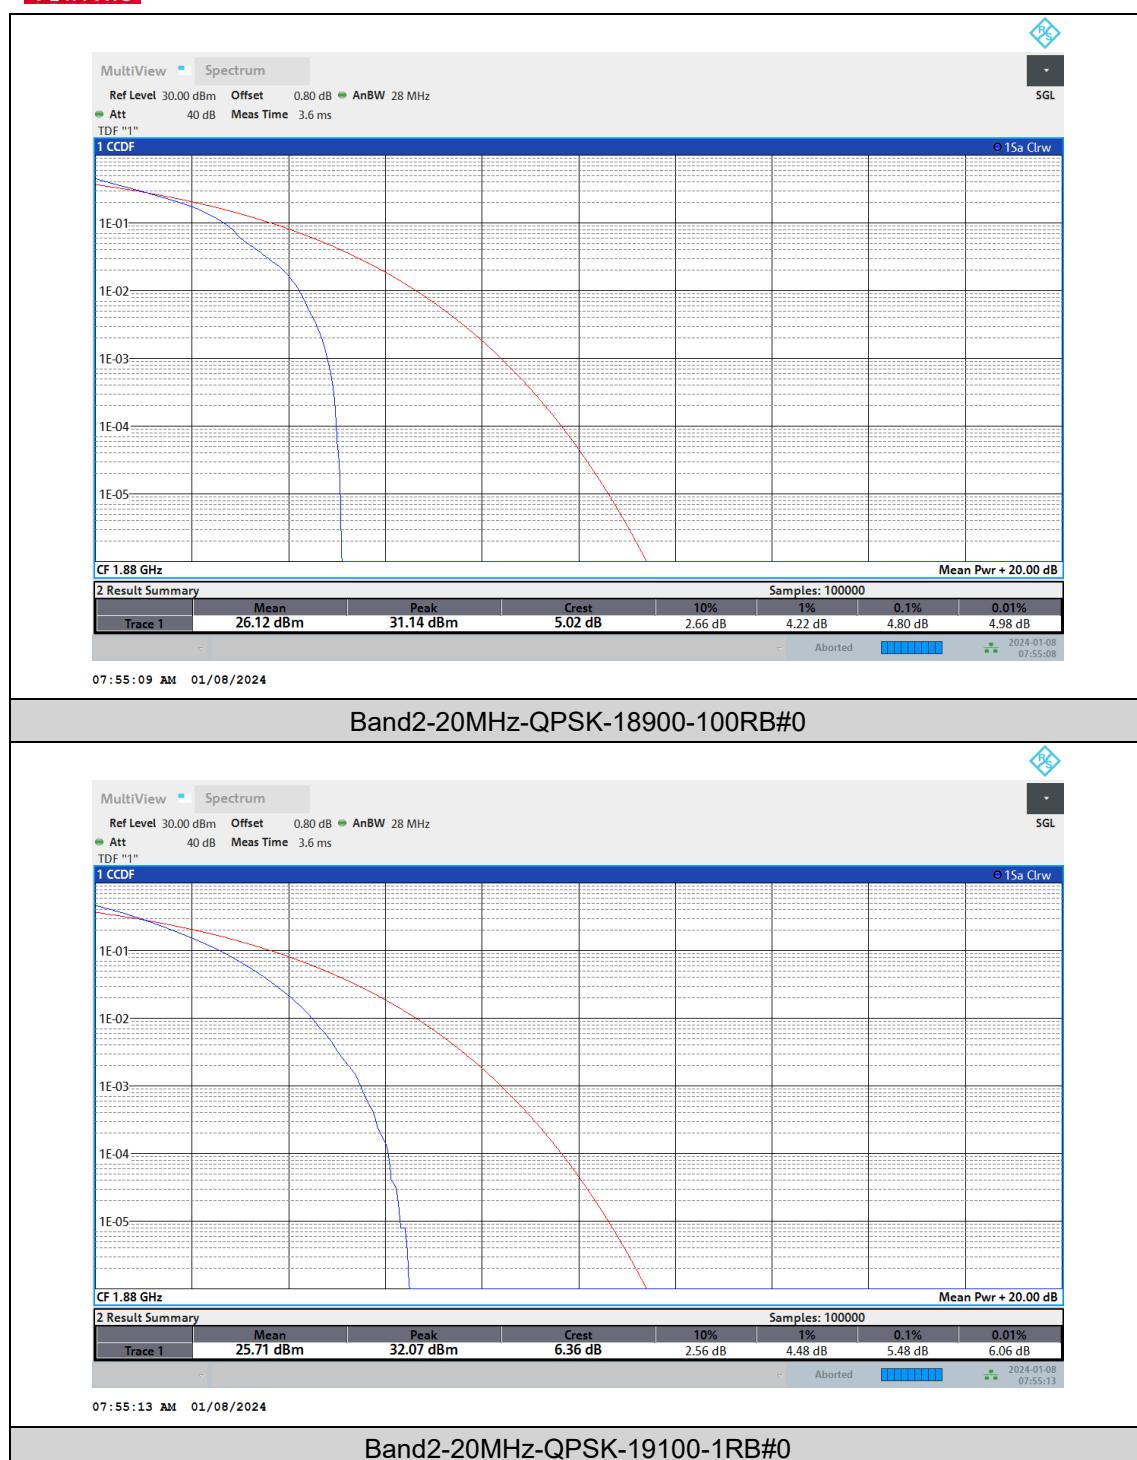



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

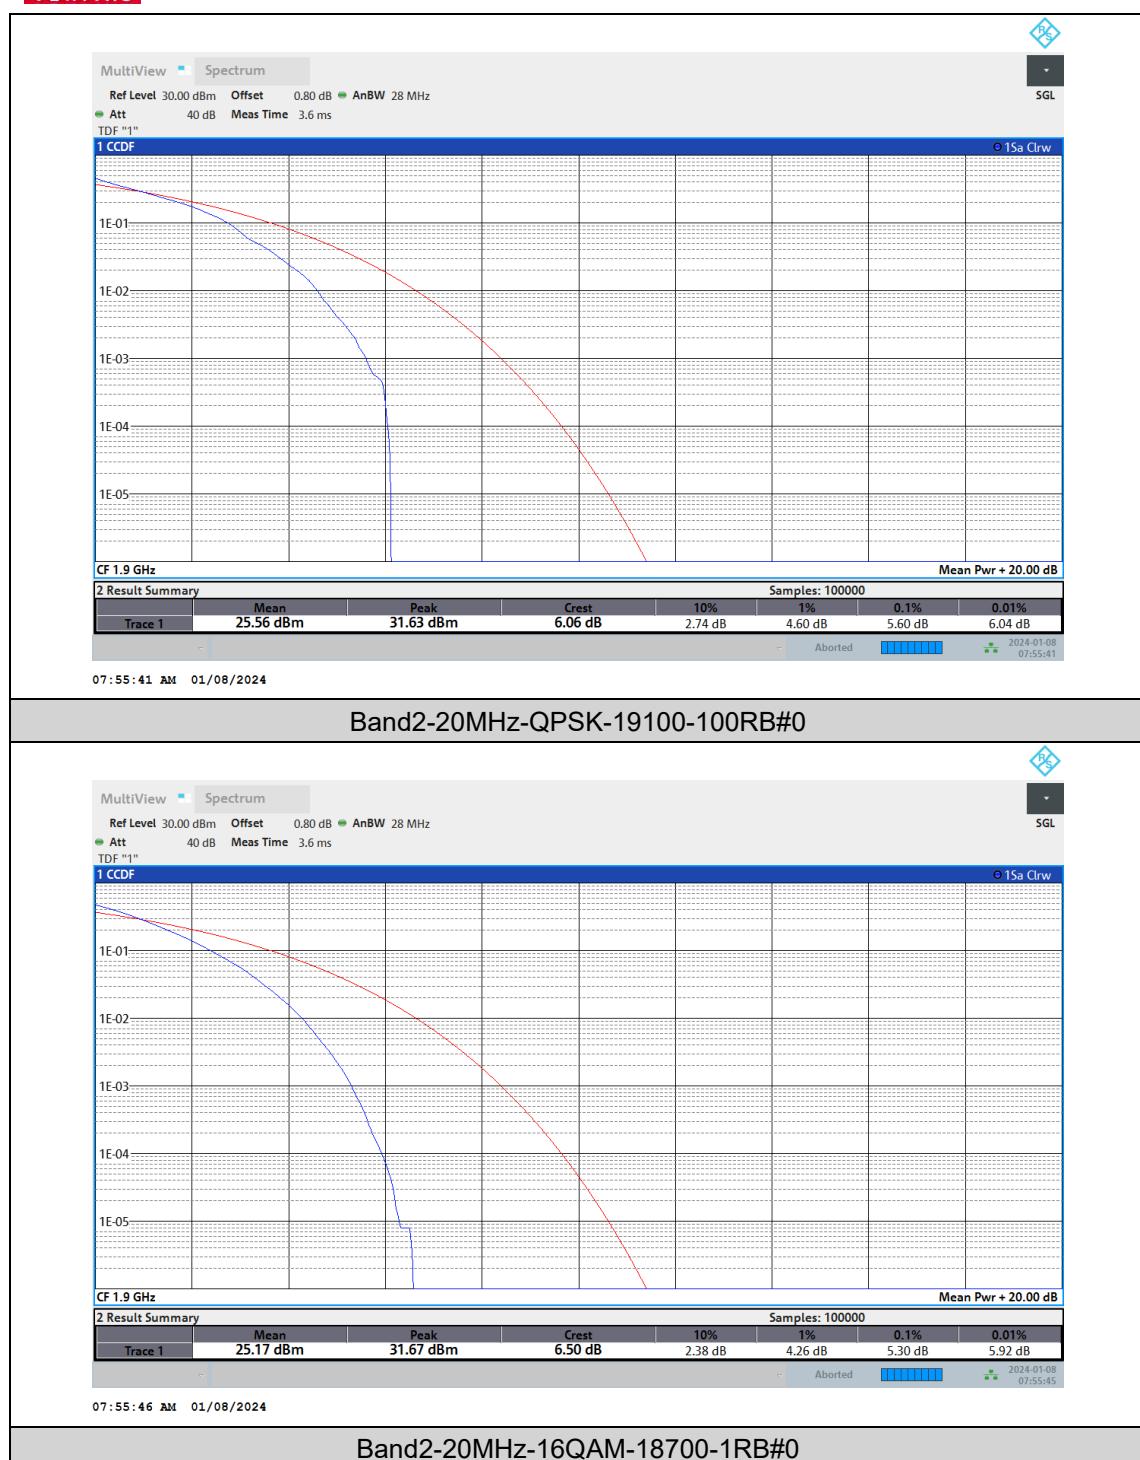



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

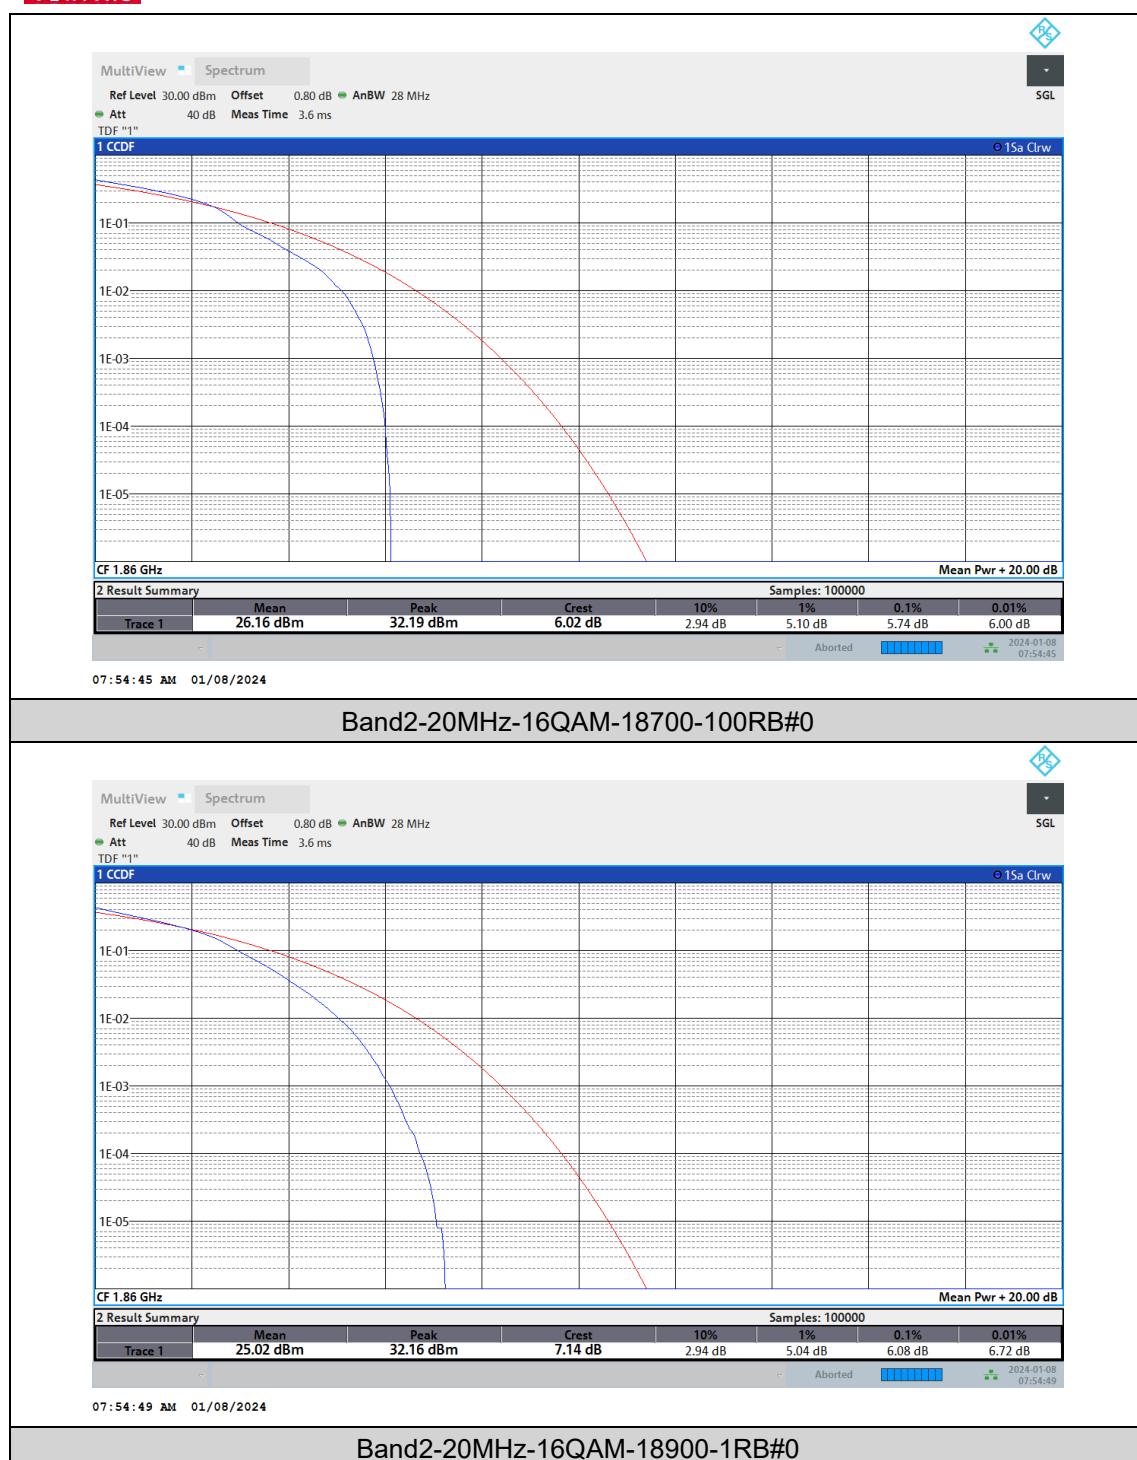



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

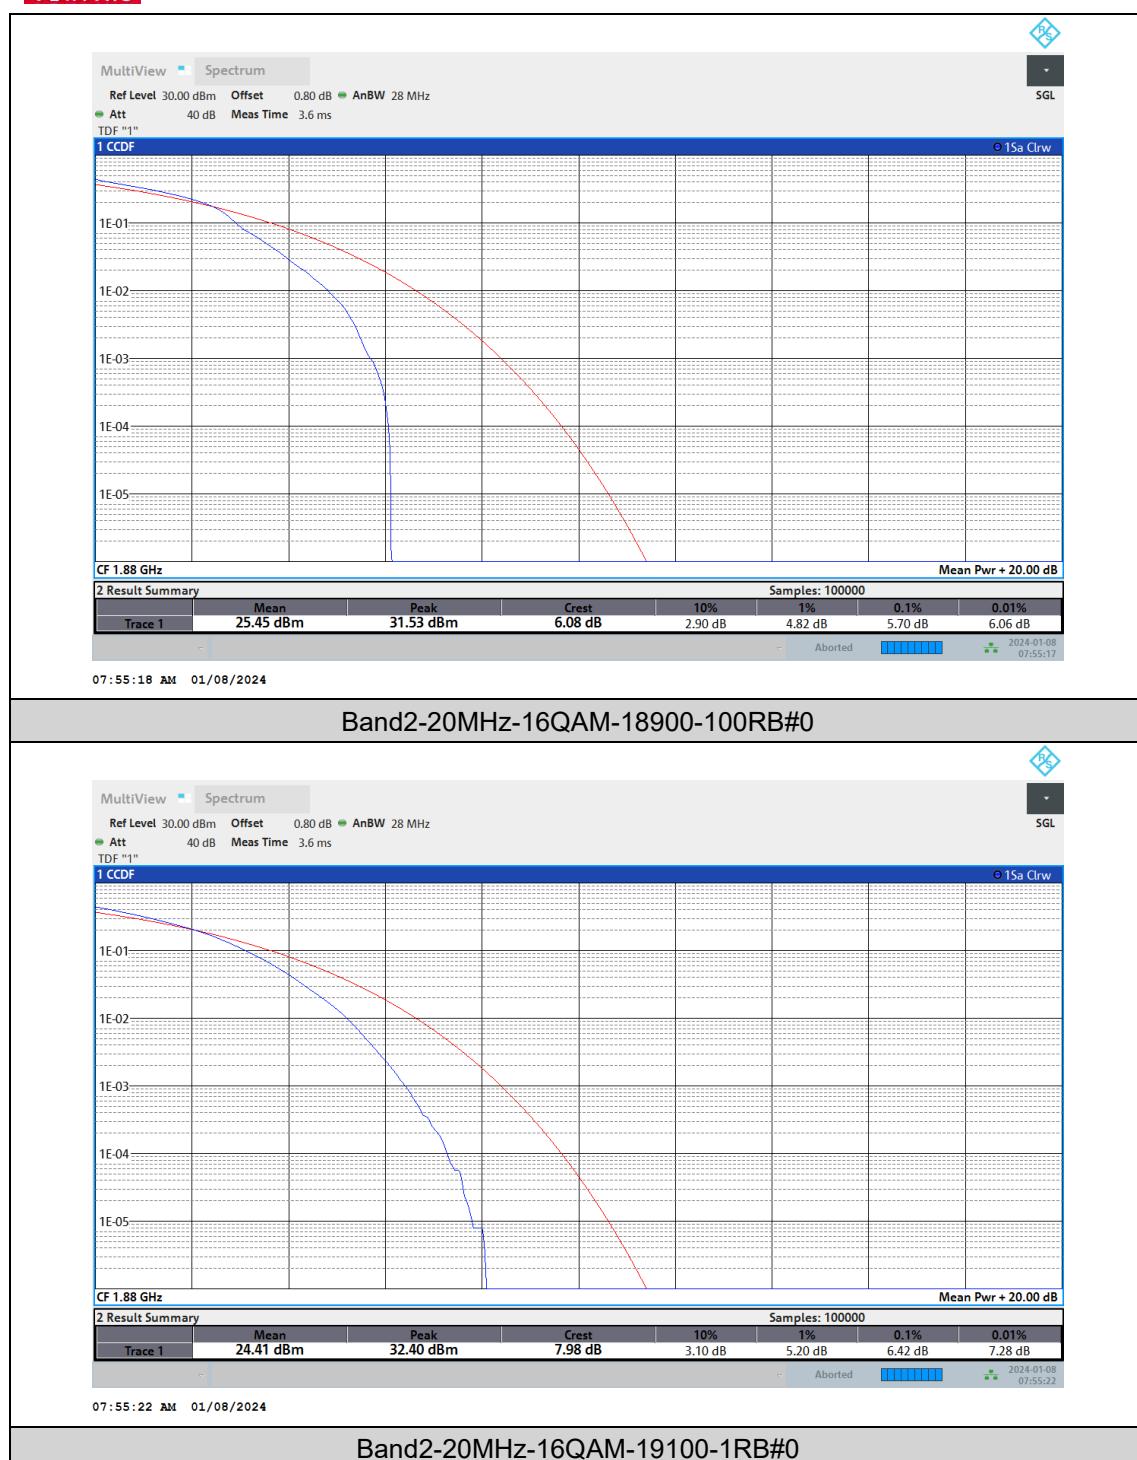



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

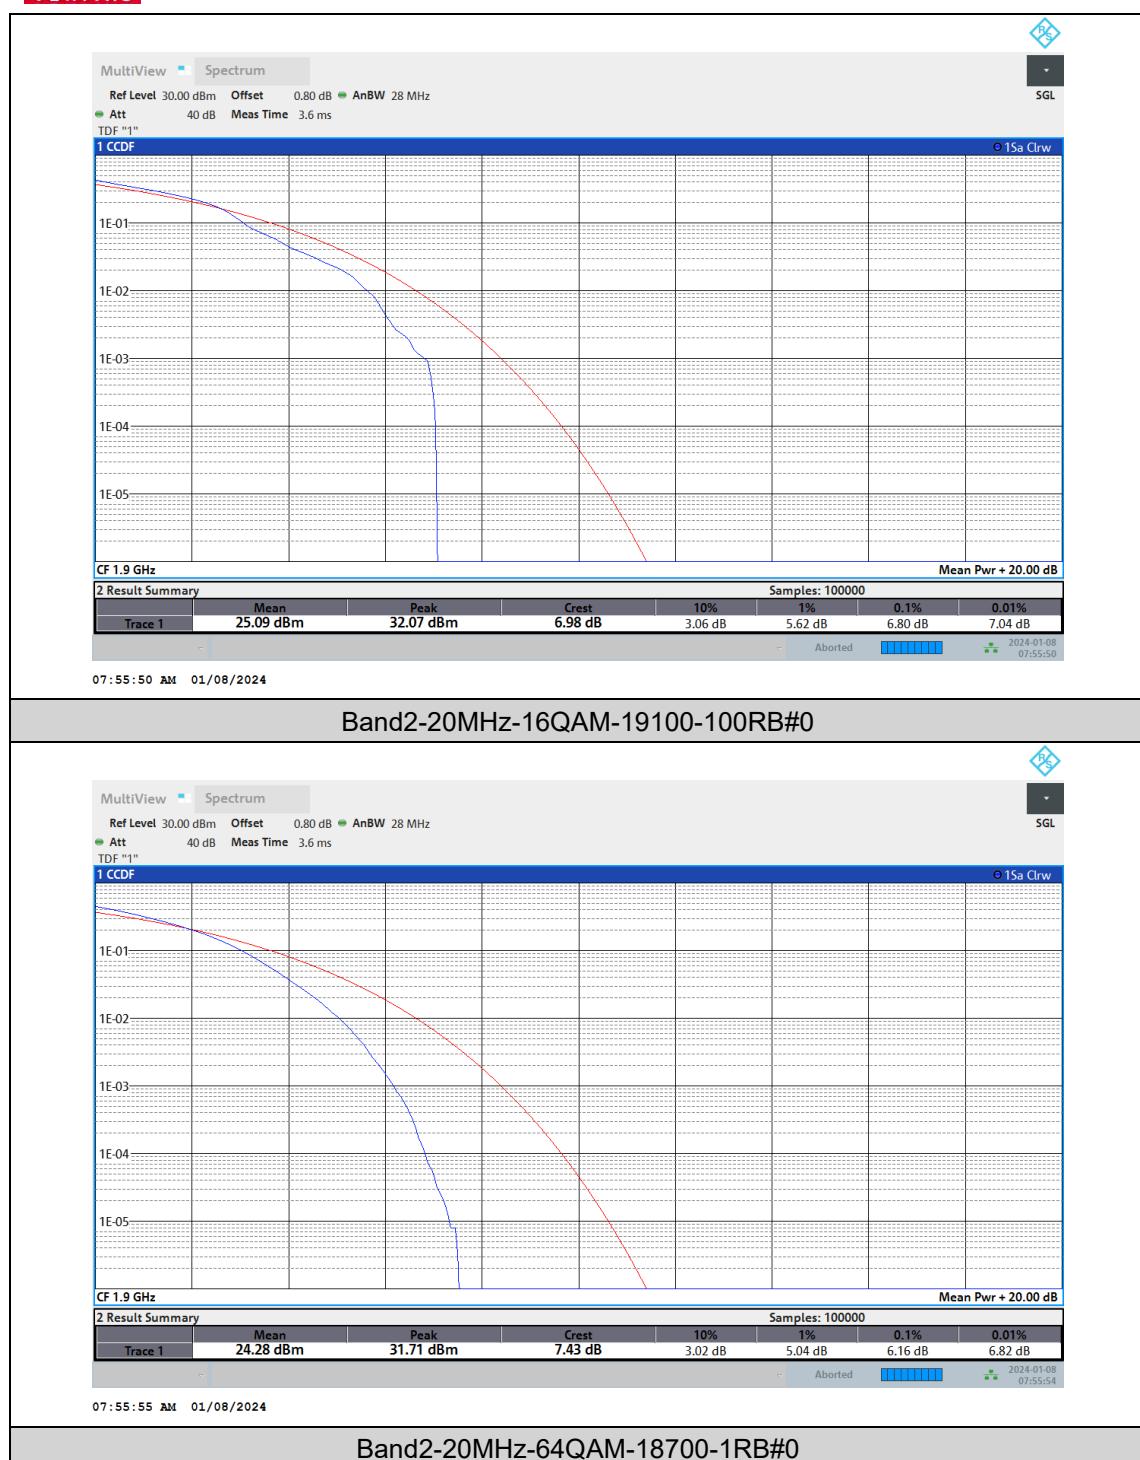



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

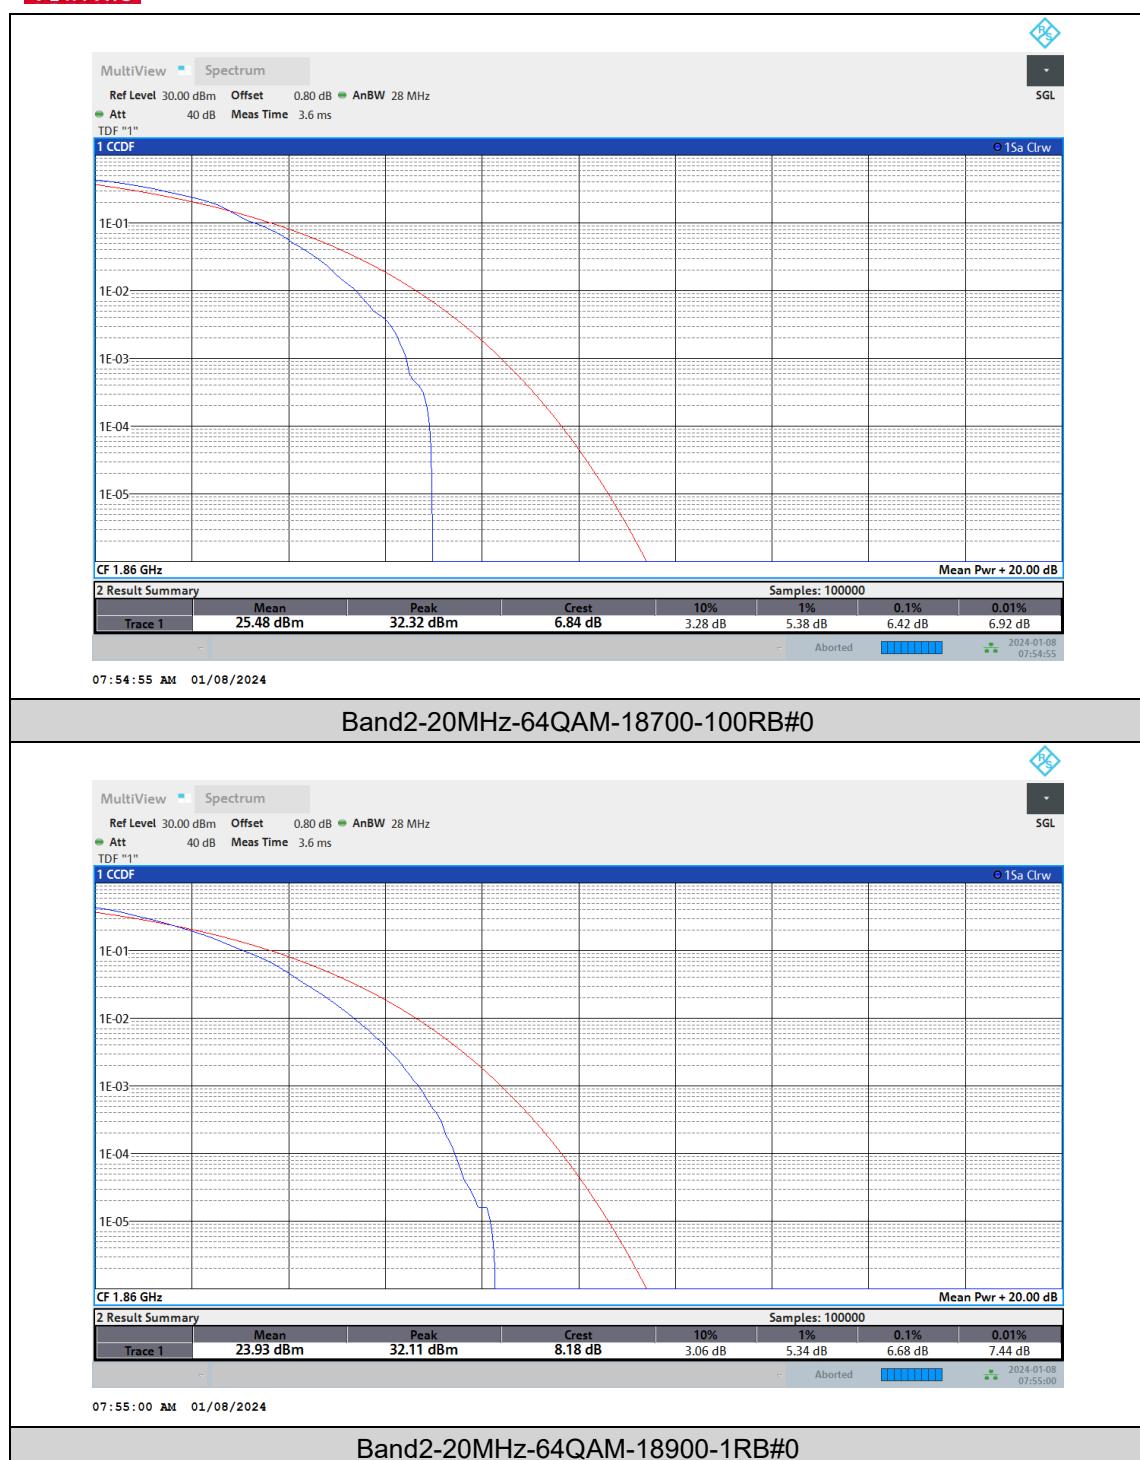



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

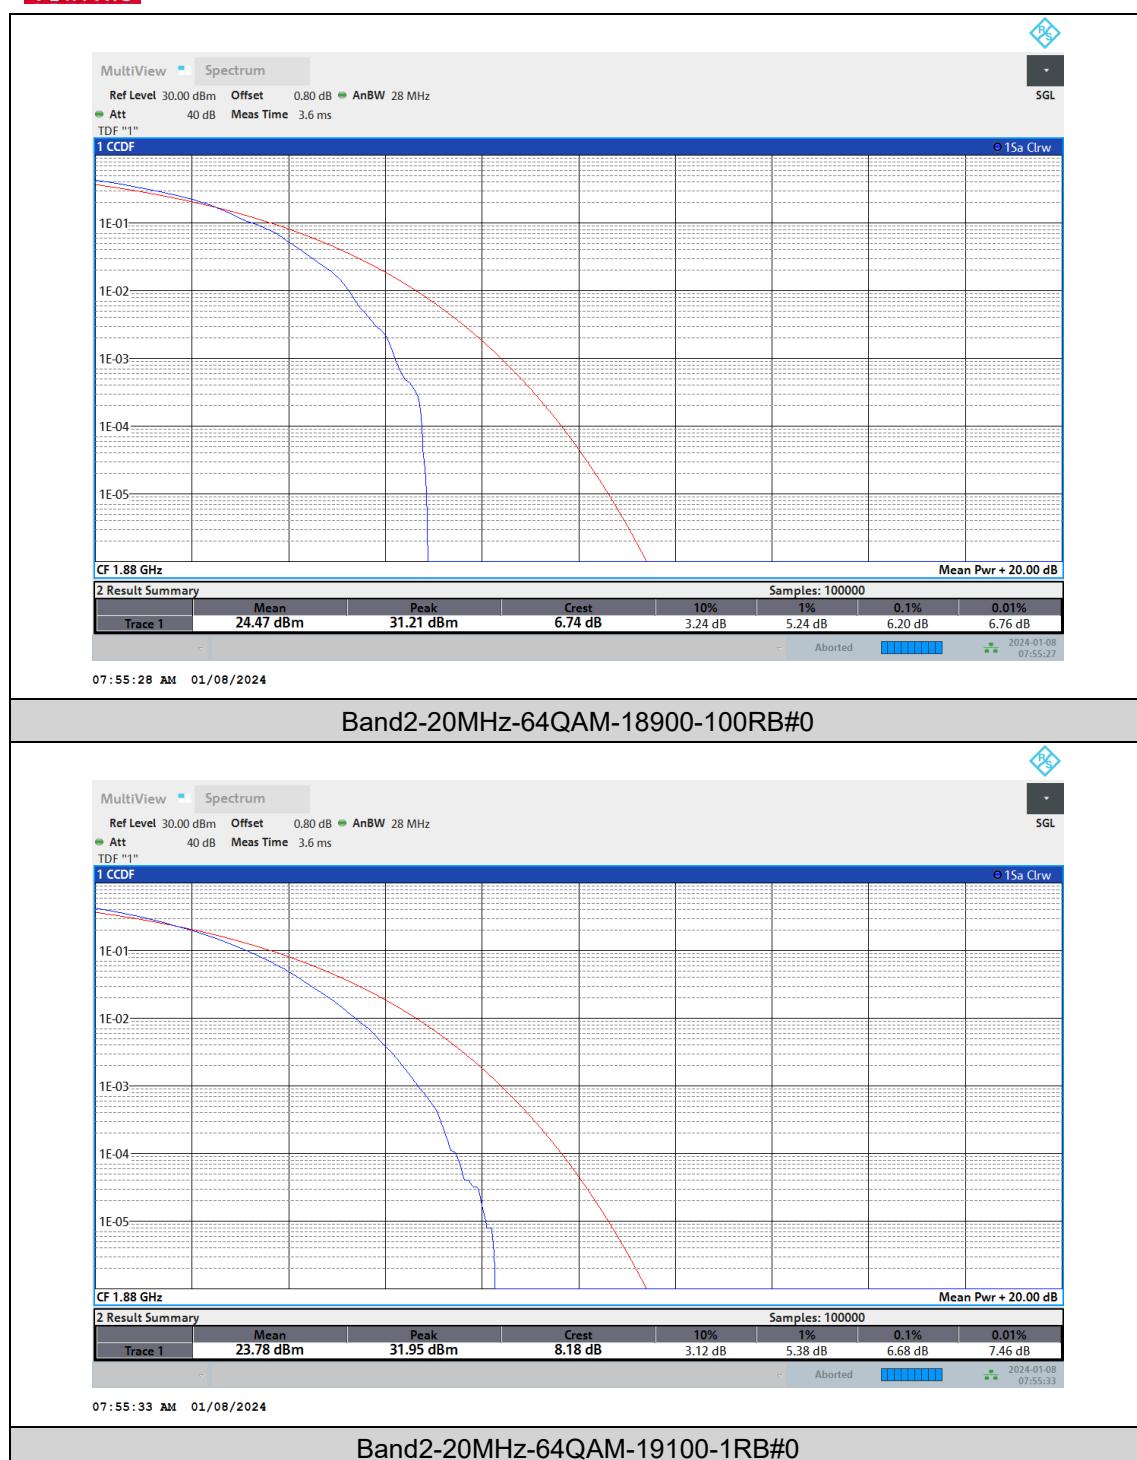



BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02

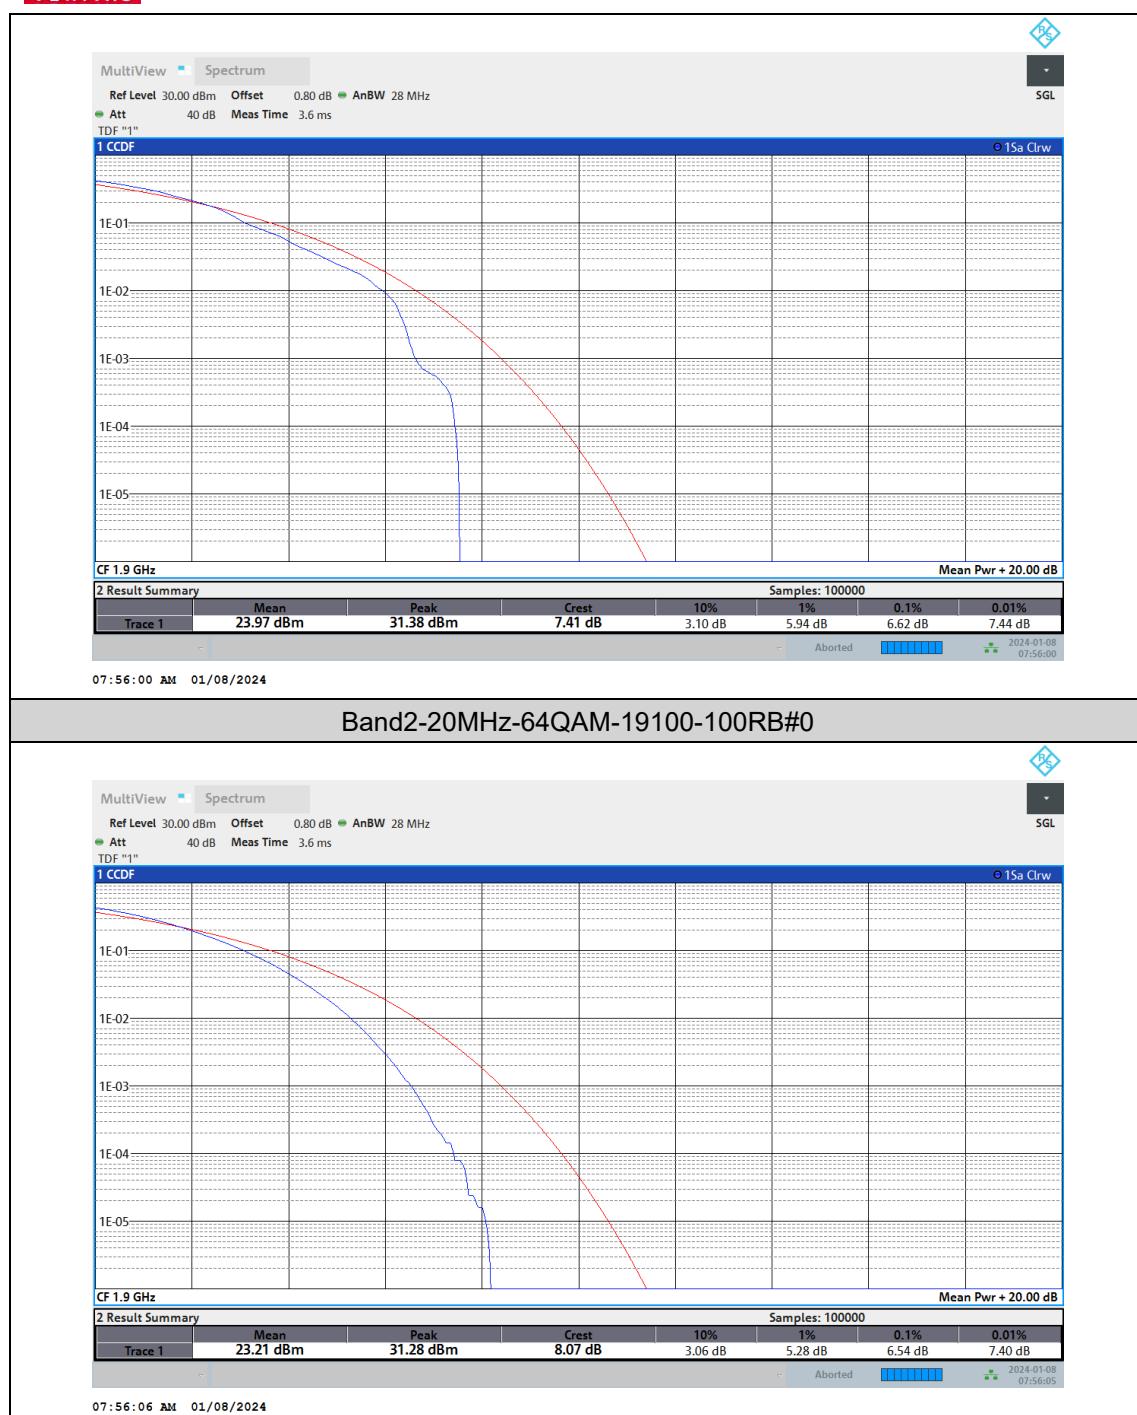

BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## 26DB BANDWIDTH AND OCCUPIED BANDWIDTH

### Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band2	1.4MHz	QPSK	18607	6RB#0	1.093	1.29	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	1.084	1.26	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	1.089	1.26	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	1.088	1.29	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	1.091	1.25	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	1.086	1.27	PASS
Band2	3MHz	QPSK	18615	15RB#0	2.692	2.93	PASS
Band2	3MHz	QPSK	18900	15RB#0	2.693	2.94	PASS
Band2	3MHz	QPSK	19185	15RB#0	2.689	2.95	PASS
Band2	3MHz	16QAM	18615	15RB#0	2.685	2.95	PASS
Band2	3MHz	16QAM	18900	15RB#0	2.686	2.95	PASS
Band2	3MHz	16QAM	19185	15RB#0	2.685	2.95	PASS
Band2	5MHz	QPSK	18625	25RB#0	4.493	4.95	PASS
Band2	5MHz	QPSK	18900	25RB#0	4.484	4.88	PASS
Band2	5MHz	QPSK	19175	25RB#0	4.476	4.90	PASS
Band2	5MHz	16QAM	18625	25RB#0	4.478	4.87	PASS
Band2	5MHz	16QAM	18900	25RB#0	4.490	4.92	PASS
Band2	5MHz	16QAM	19175	25RB#0	4.488	4.93	PASS
Band2	10MHz	QPSK	18650	50RB#0	8.961	9.74	PASS
Band2	10MHz	QPSK	18900	50RB#0	8.944	9.68	PASS
Band2	10MHz	QPSK	19150	50RB#0	8.927	9.71	PASS
Band2	10MHz	16QAM	18650	50RB#0	8.947	9.62	PASS
Band2	10MHz	16QAM	18900	50RB#0	8.945	9.68	PASS
Band2	10MHz	16QAM	19150	50RB#0	8.940	9.68	PASS
Band2	15MHz	QPSK	18675	75RB#0	13.469	14.74	PASS
Band2	15MHz	QPSK	18900	75RB#0	13.408	14.52	PASS
Band2	15MHz	QPSK	19125	75RB#0	13.393	14.56	PASS
Band2	15MHz	16QAM	18675	75RB#0	13.441	14.61	PASS
Band2	15MHz	16QAM	18900	75RB#0	13.437	14.52	PASS
Band2	15MHz	16QAM	19125	75RB#0	13.407	14.48	PASS
Band2	20MHz	QPSK	18700	100RB#0	17.873	19.12	PASS
Band2	20MHz	QPSK	18900	100RB#0	17.868	19.12	PASS
Band2	20MHz	QPSK	19100	100RB#0	17.841	19.24	PASS
Band2	20MHz	16QAM	18700	100RB#0	17.913	19.24	PASS
Band2	20MHz	16QAM	18900	100RB#0	17.890	19.18	PASS
Band2	20MHz	16QAM	19100	100RB#0	17.827	19.12	PASS
Band2	1.4MHz	64QAM	18607	6RB#0	1.085	1.27	PASS
Band2	1.4MHz	64QAM	18900	6RB#0	1.084	1.30	PASS
Band2	1.4MHz	64QAM	19193	6RB#0	1.084	1.27	PASS
Band2	3MHz	64QAM	18615	15RB#0	2.688	2.93	PASS
Band2	3MHz	64QAM	18900	15RB#0	2.685	2.91	PASS



BUREAU  
VERITAS

**Test Report No.: PSU-NQN2311090109RF02**

Band2	3MHz	64QAM	19185	15RB#0	2.690	2.94	PASS
Band2	5MHz	64QAM	18625	25RB#0	4.478	4.93	PASS
Band2	5MHz	64QAM	18900	25RB#0	4.485	4.93	PASS
Band2	5MHz	64QAM	19175	25RB#0	4.477	4.88	PASS
Band2	10MHz	64QAM	18650	50RB#0	8.946	9.65	PASS
Band2	10MHz	64QAM	18900	50RB#0	8.934	9.68	PASS
Band2	10MHz	64QAM	19150	50RB#0	8.935	9.71	PASS
Band2	15MHz	64QAM	18675	75RB#0	13.411	14.52	PASS
Band2	15MHz	64QAM	18900	75RB#0	13.449	14.56	PASS
Band2	15MHz	64QAM	19125	75RB#0	13.432	14.52	PASS
Band2	20MHz	64QAM	18700	100RB#0	17.872	19.18	PASS
Band2	20MHz	64QAM	18900	100RB#0	17.876	19.12	PASS
Band2	20MHz	64QAM	19100	100RB#0	17.826	19.06	PASS




BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

## Test Graphs


### Occupied Bandwidth

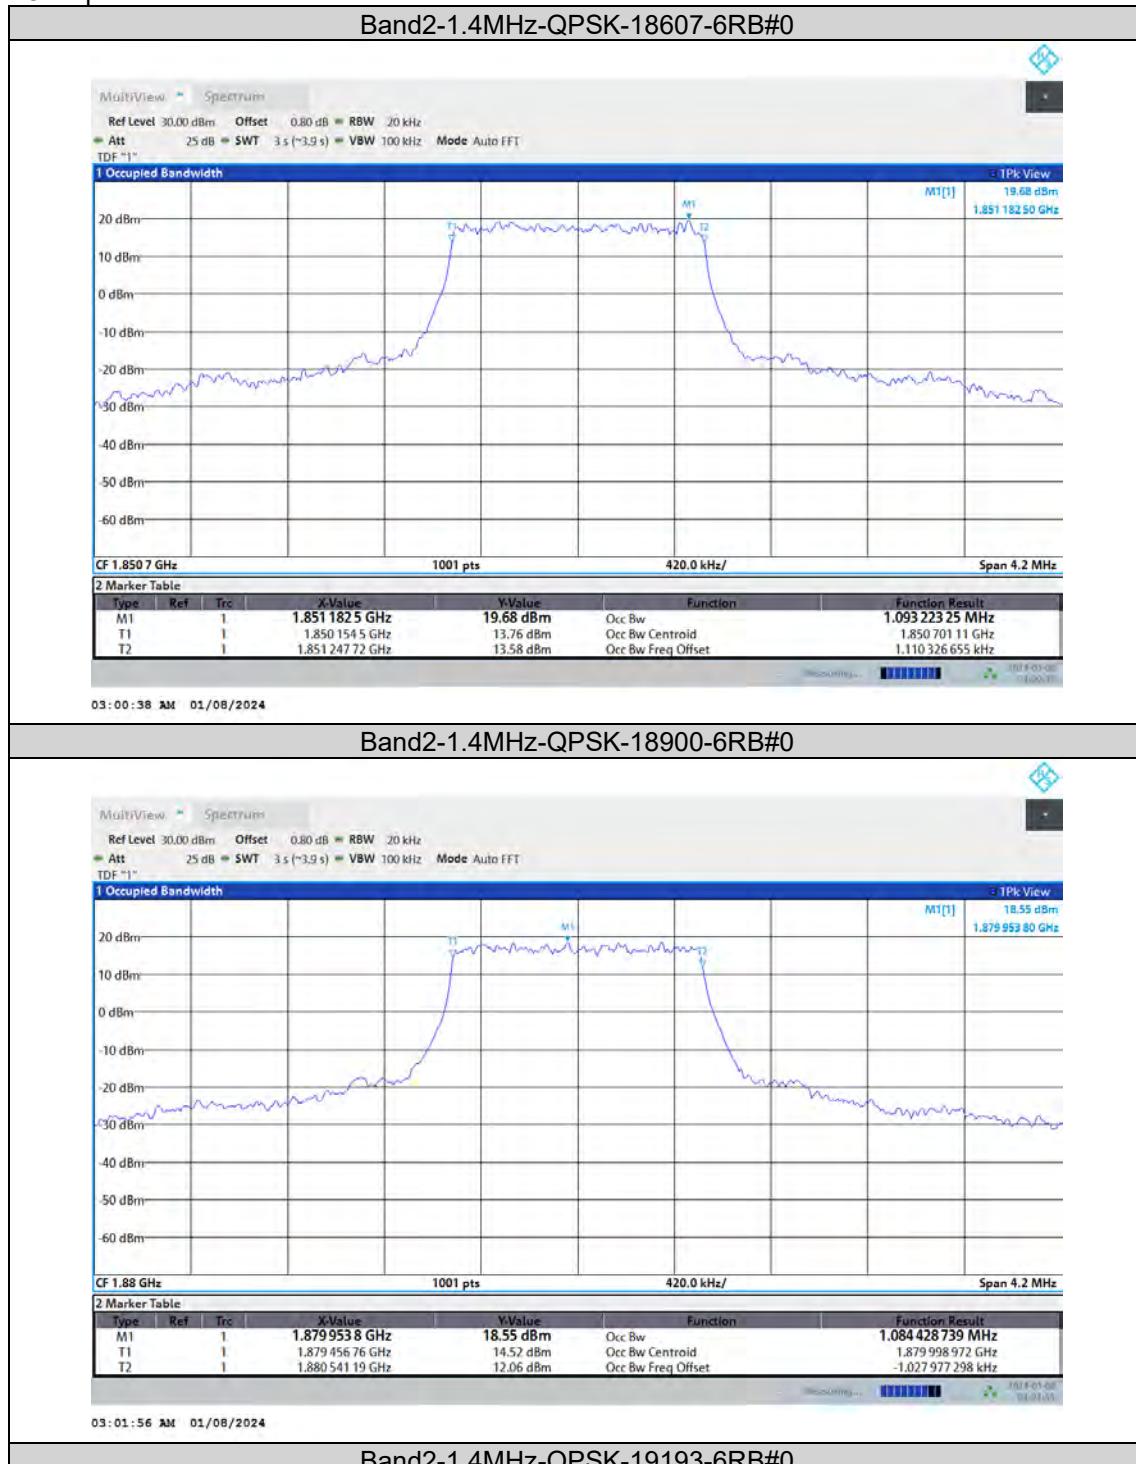



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

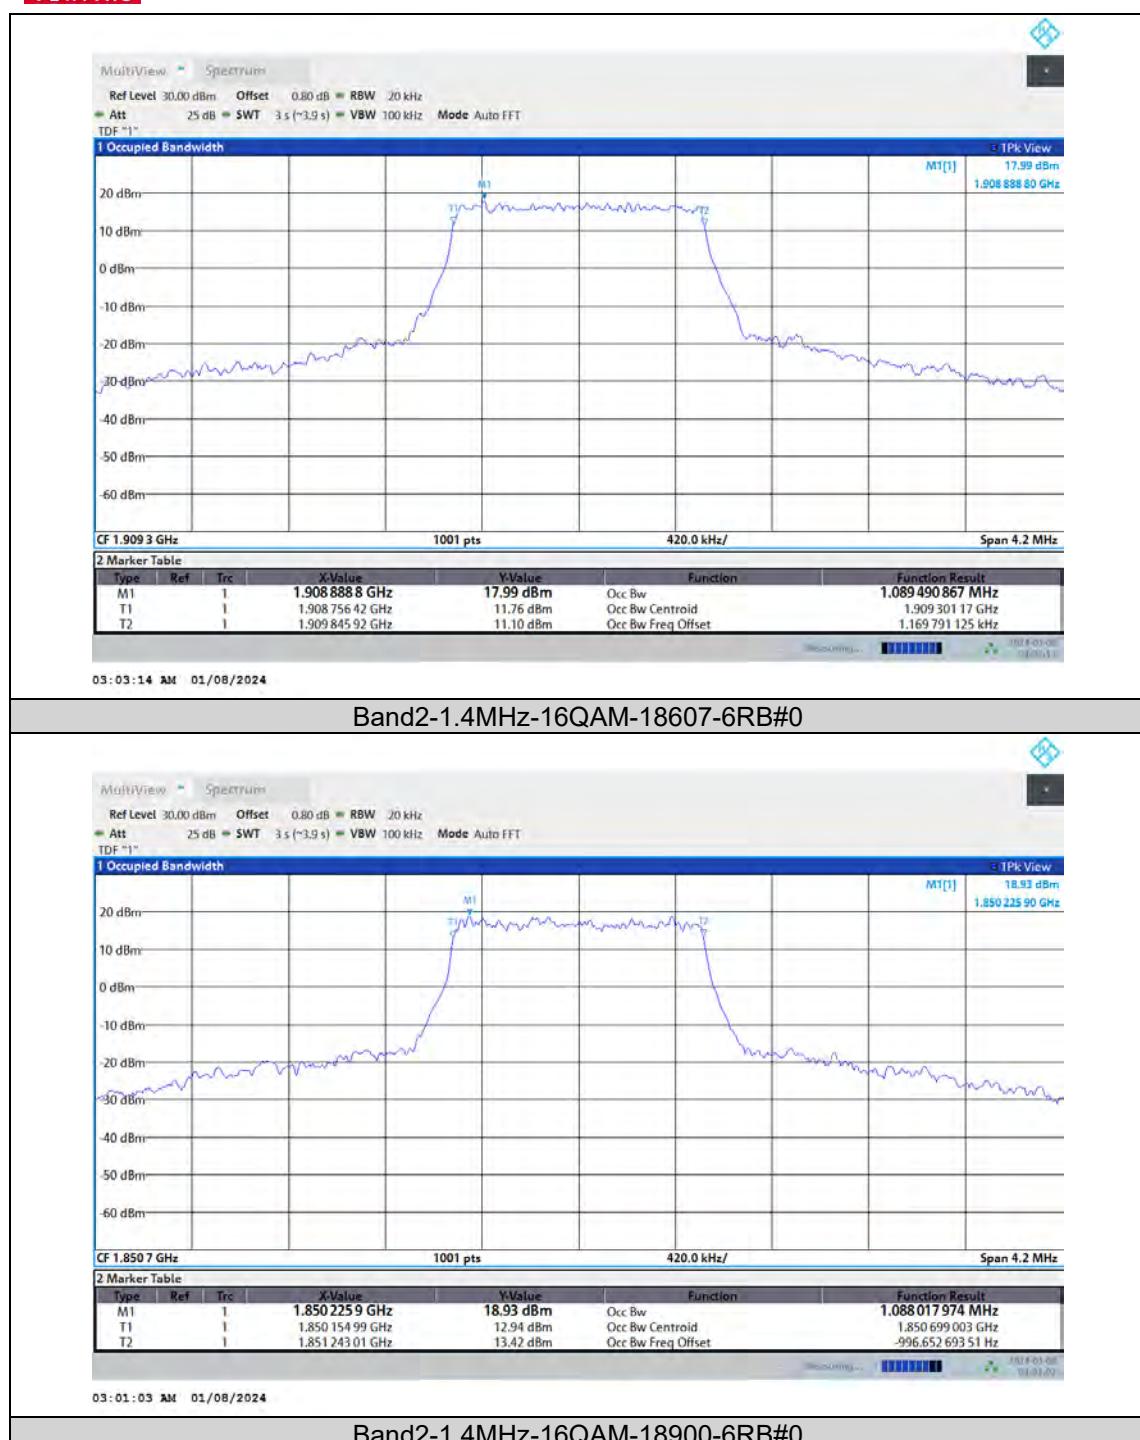



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

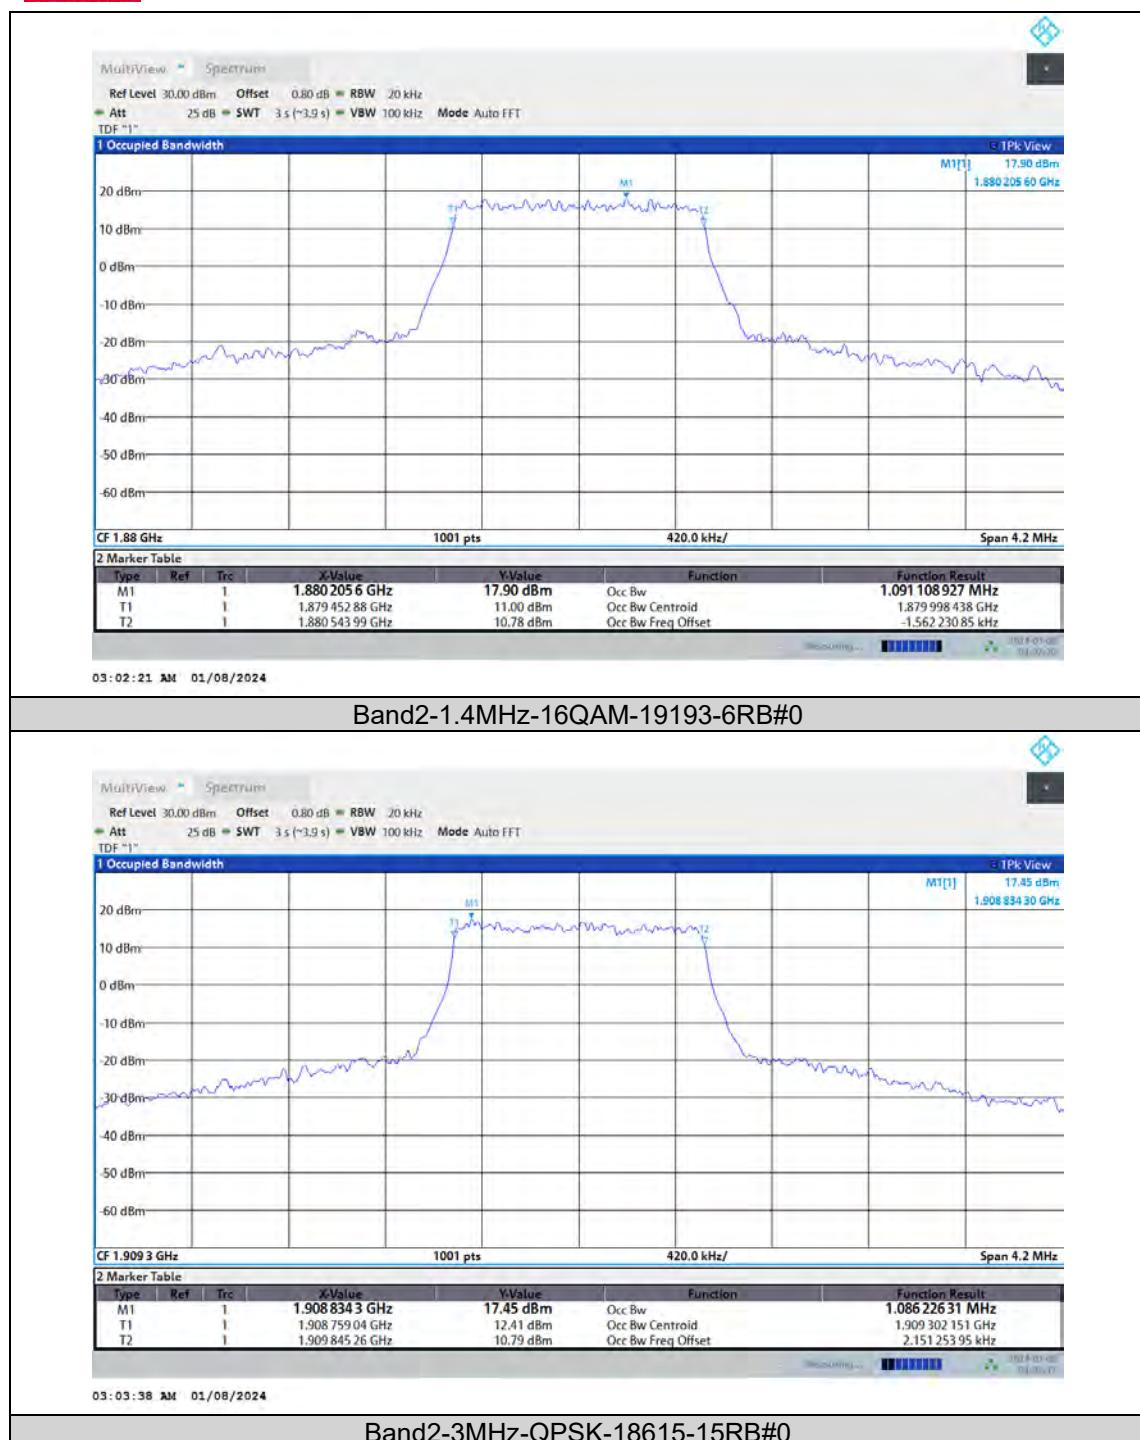



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

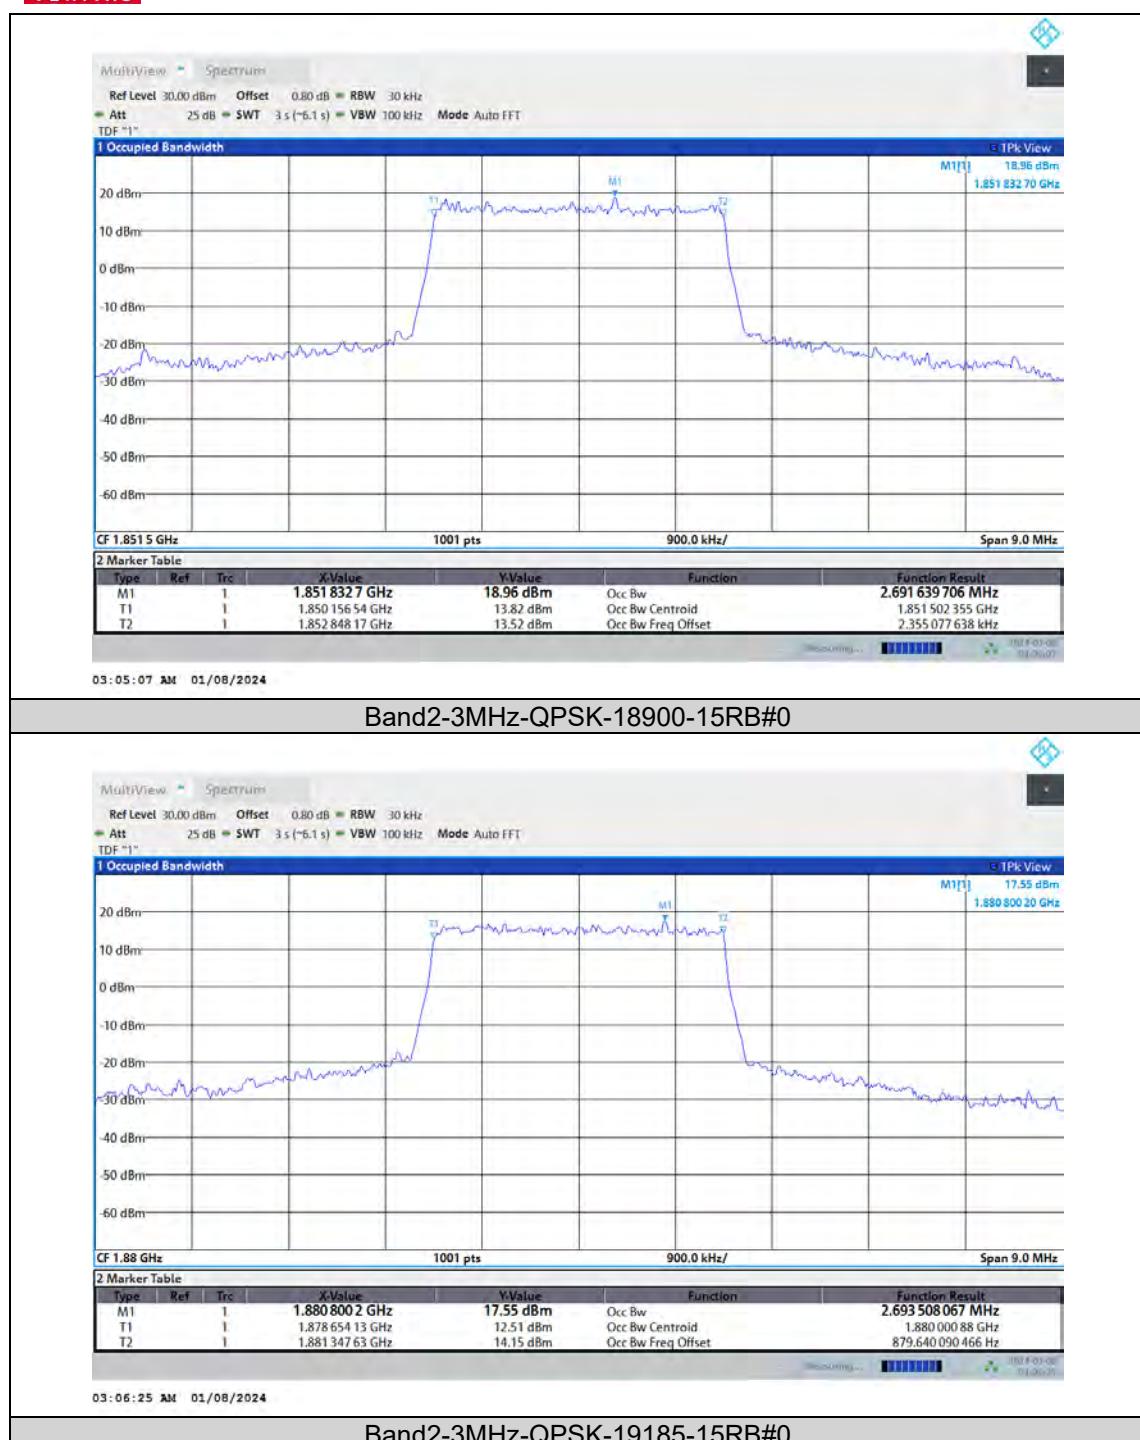



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

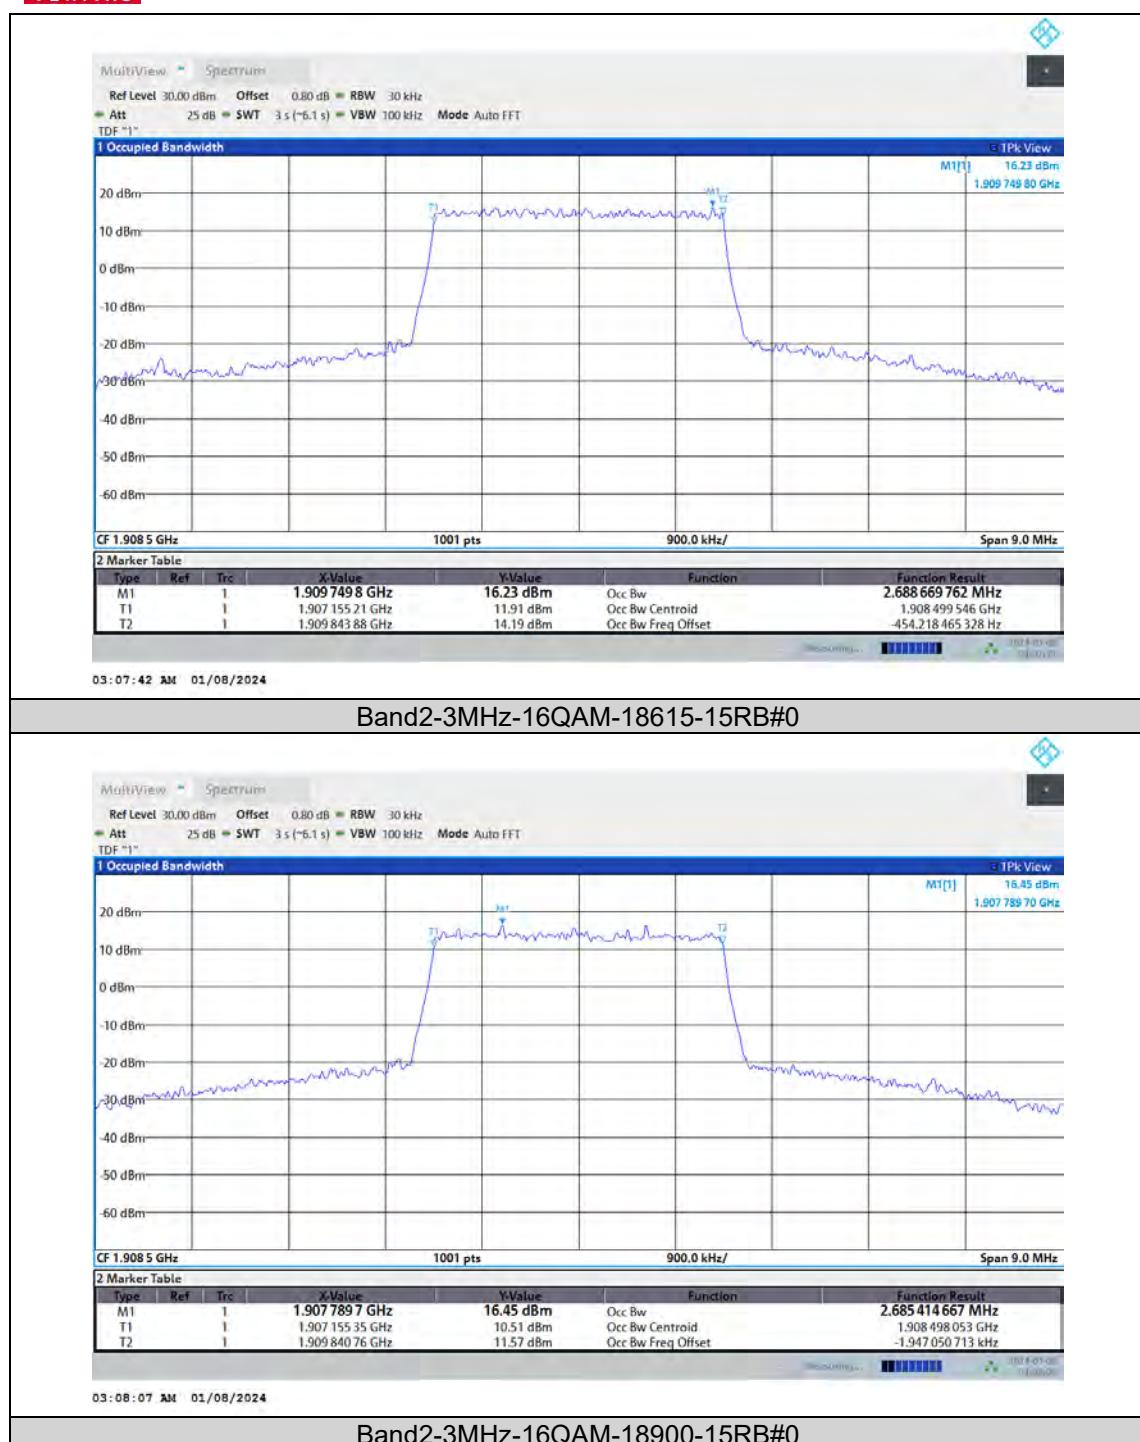



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

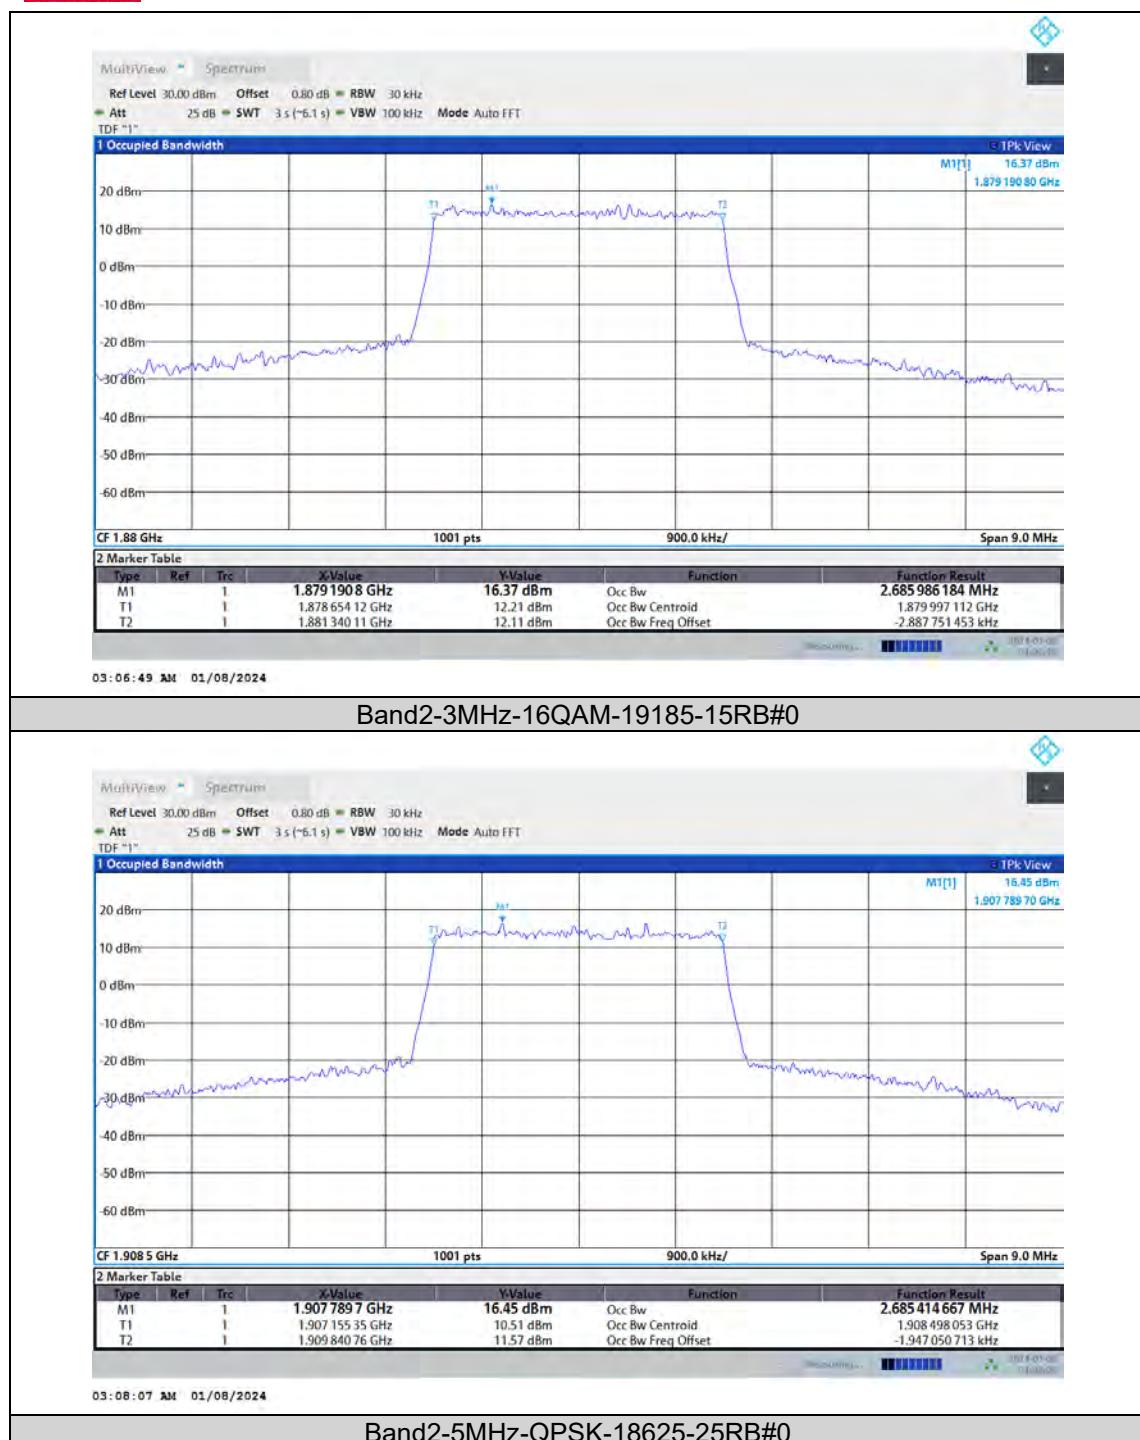



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

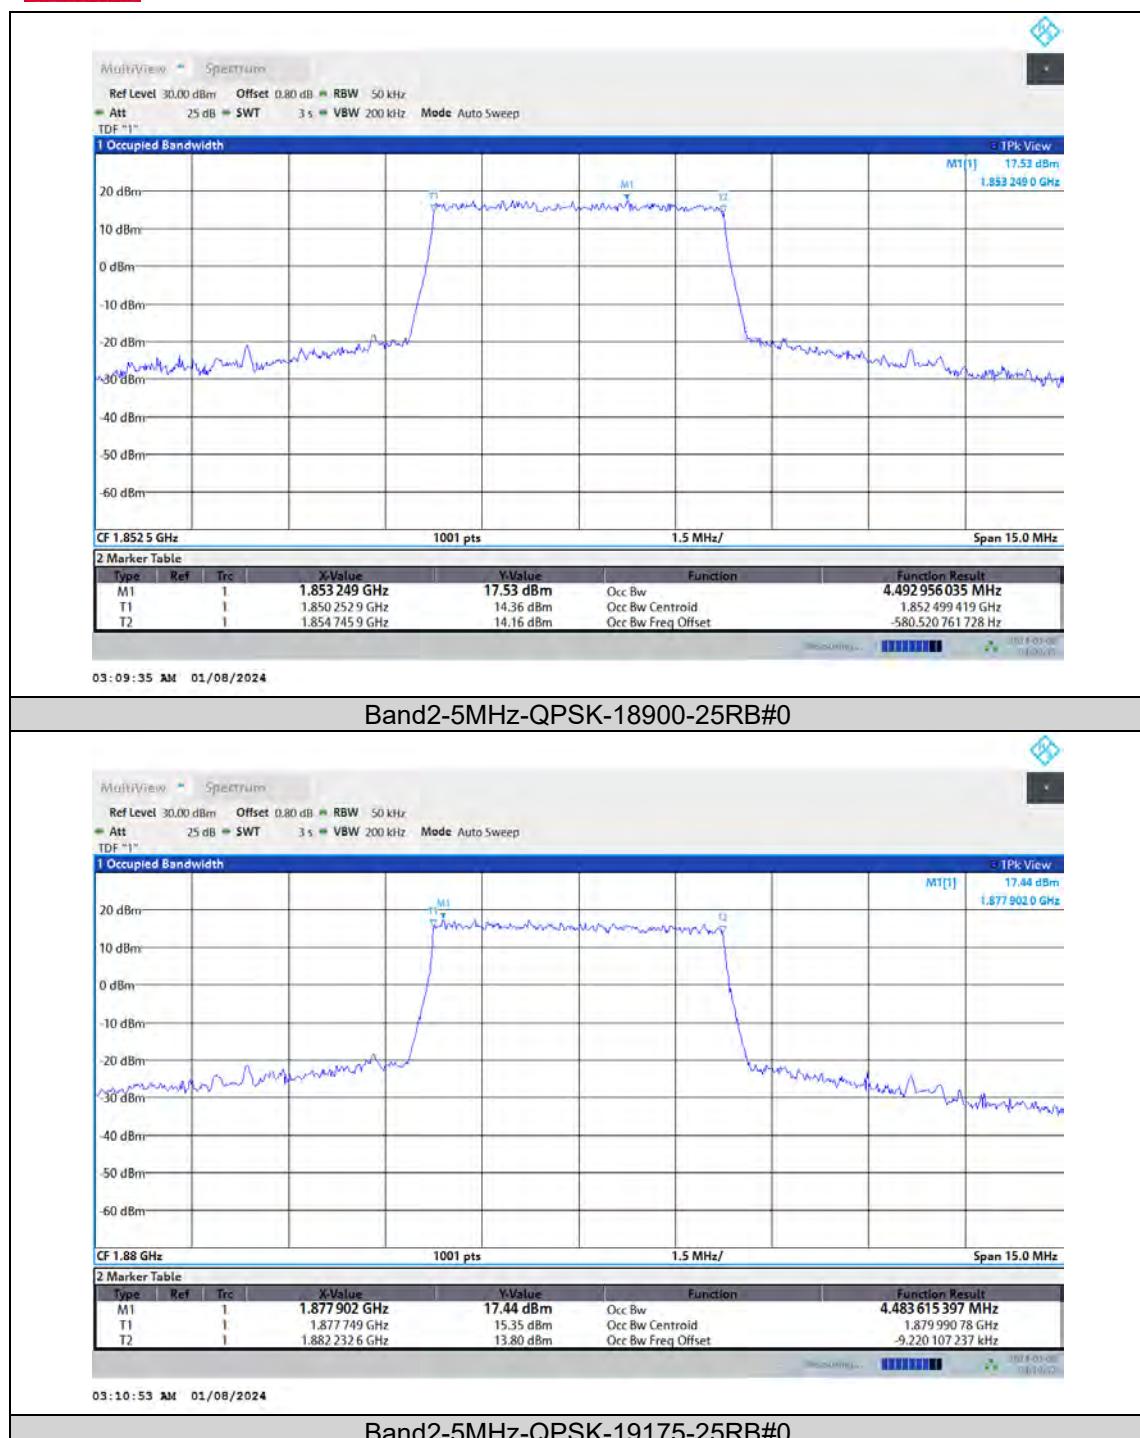



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

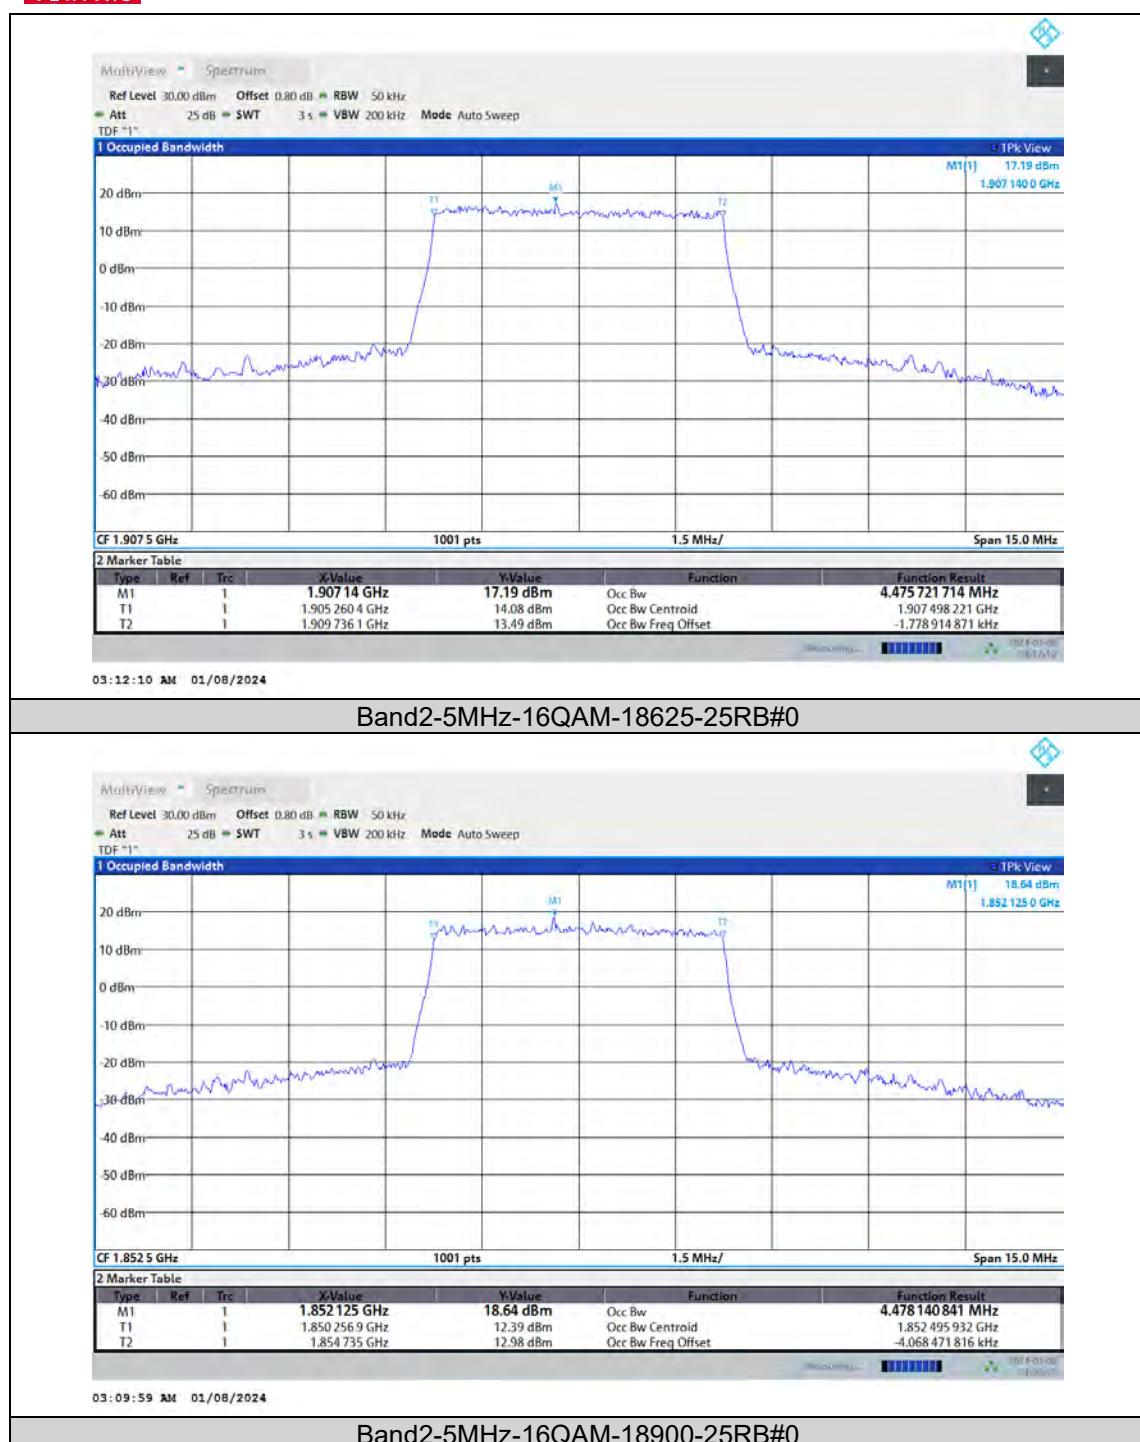



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

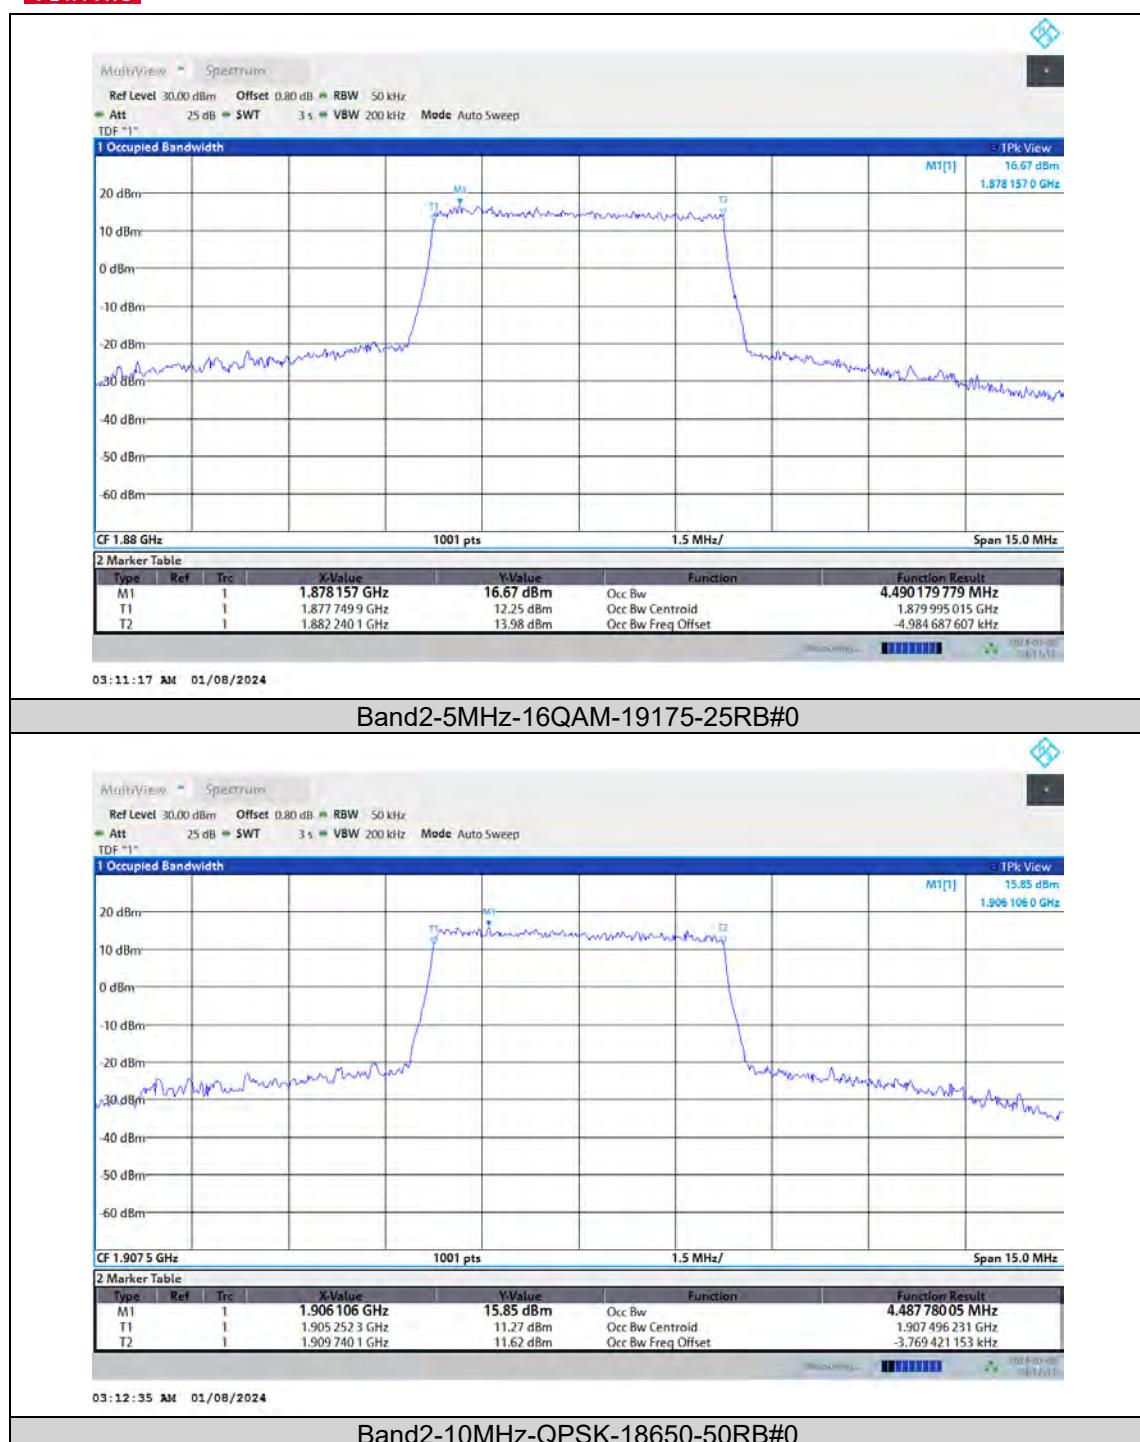



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

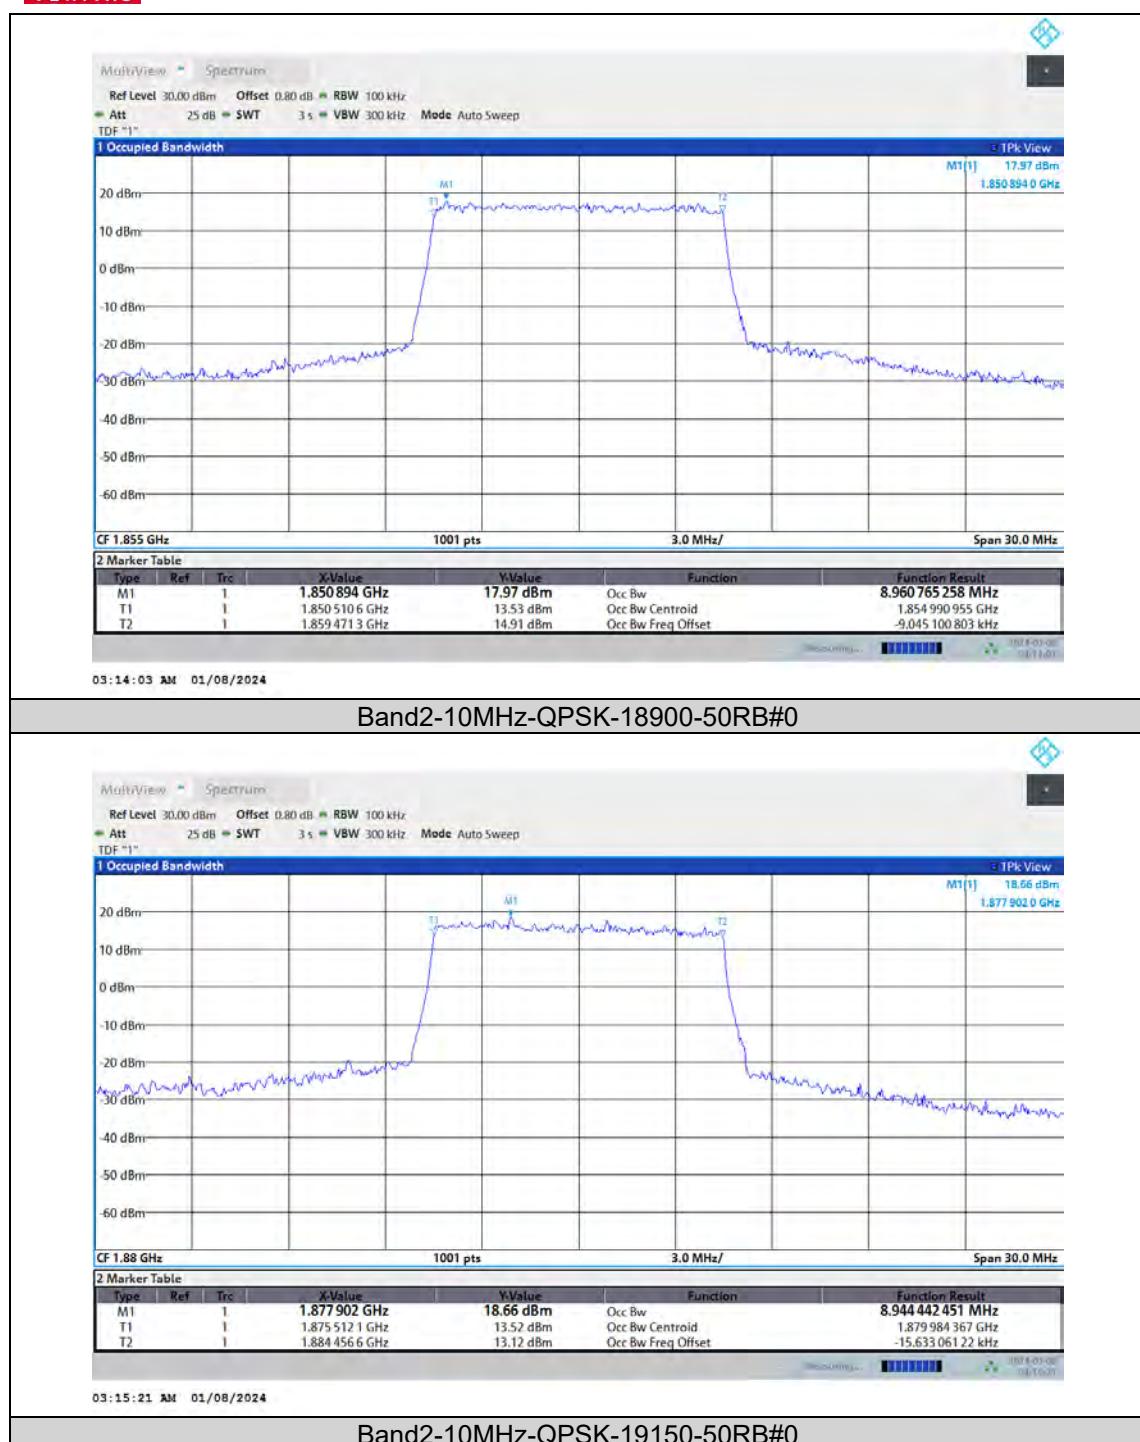



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

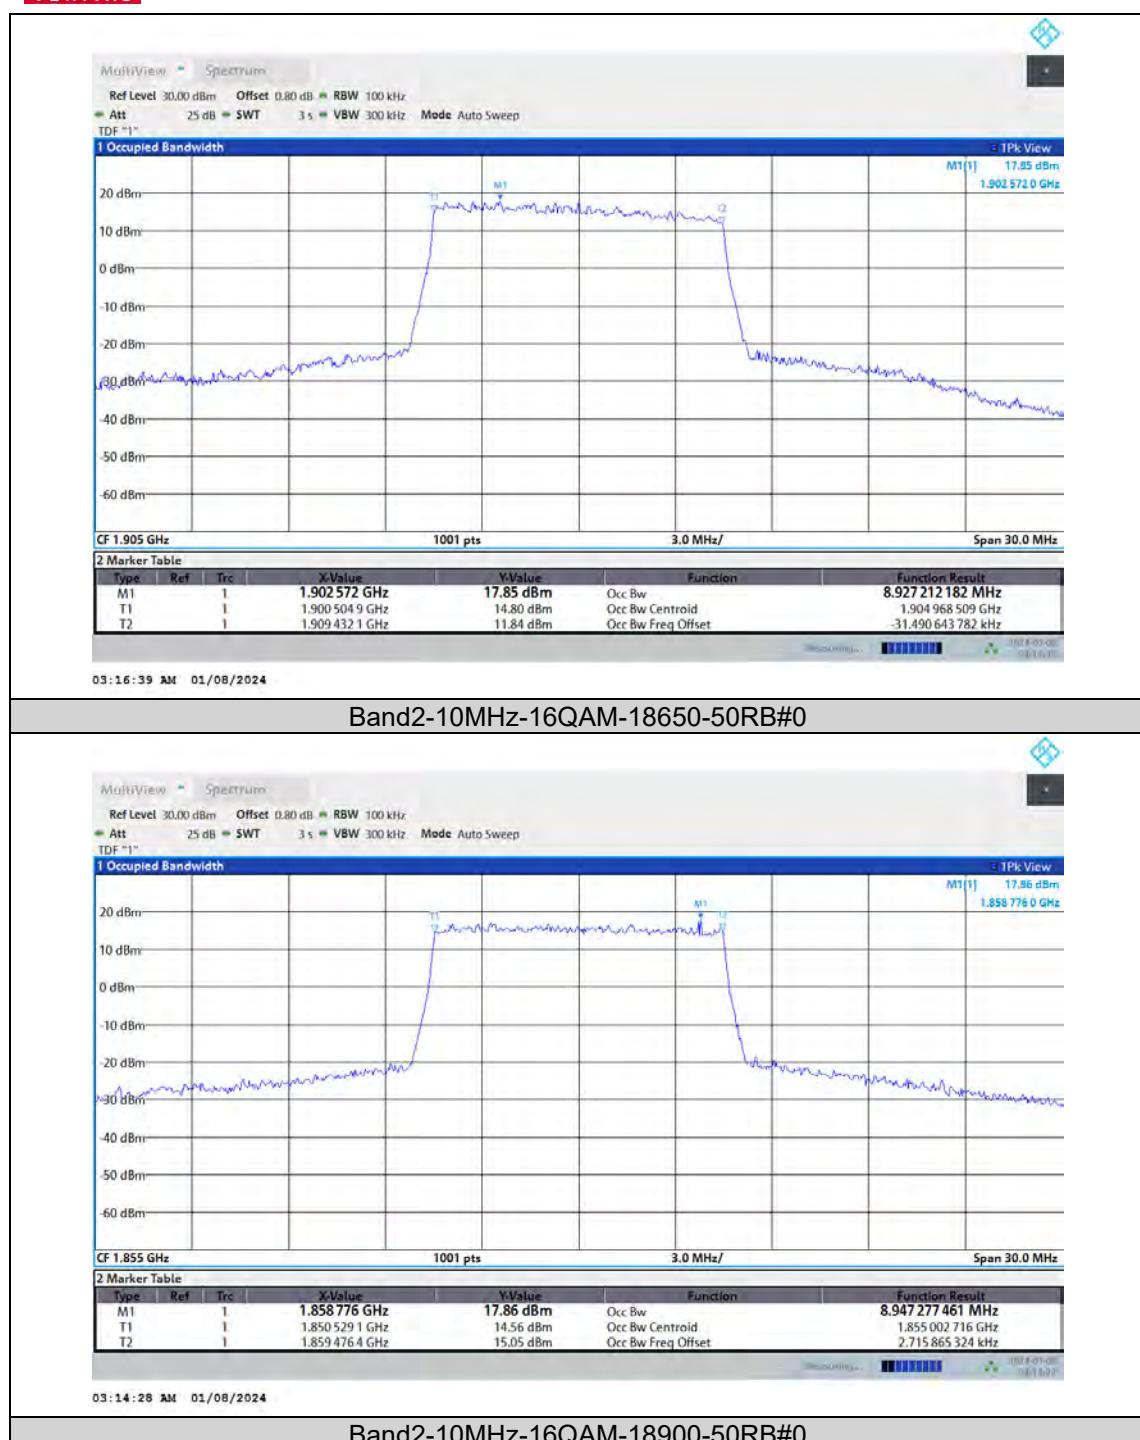



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

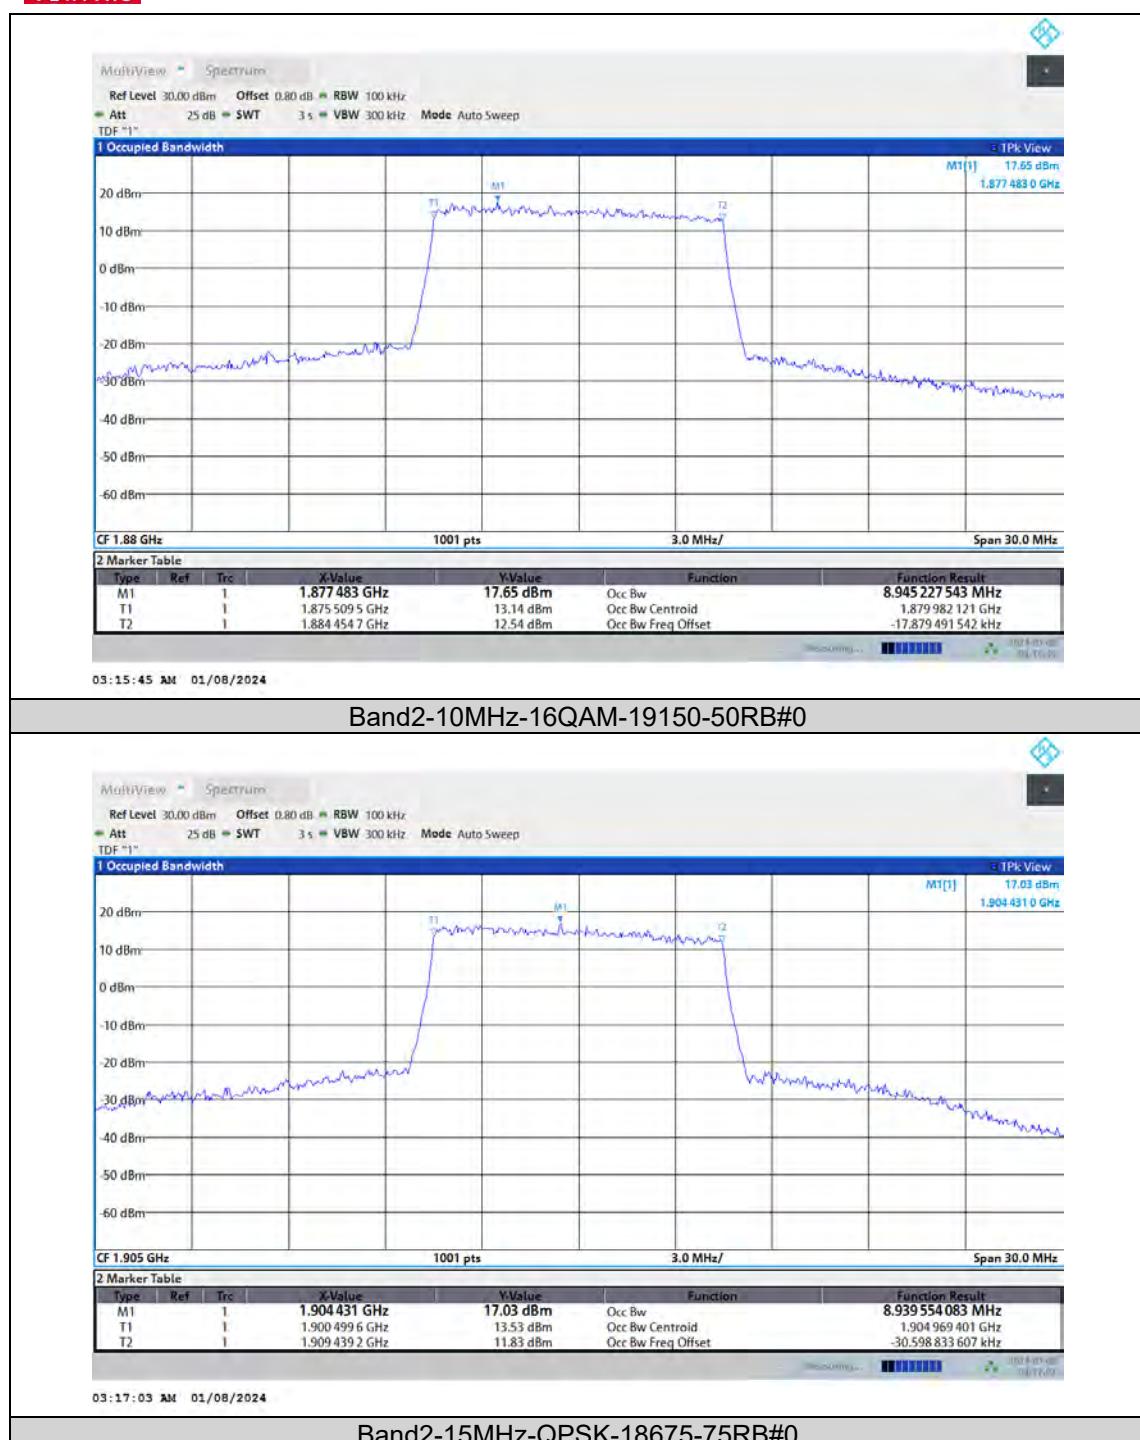



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

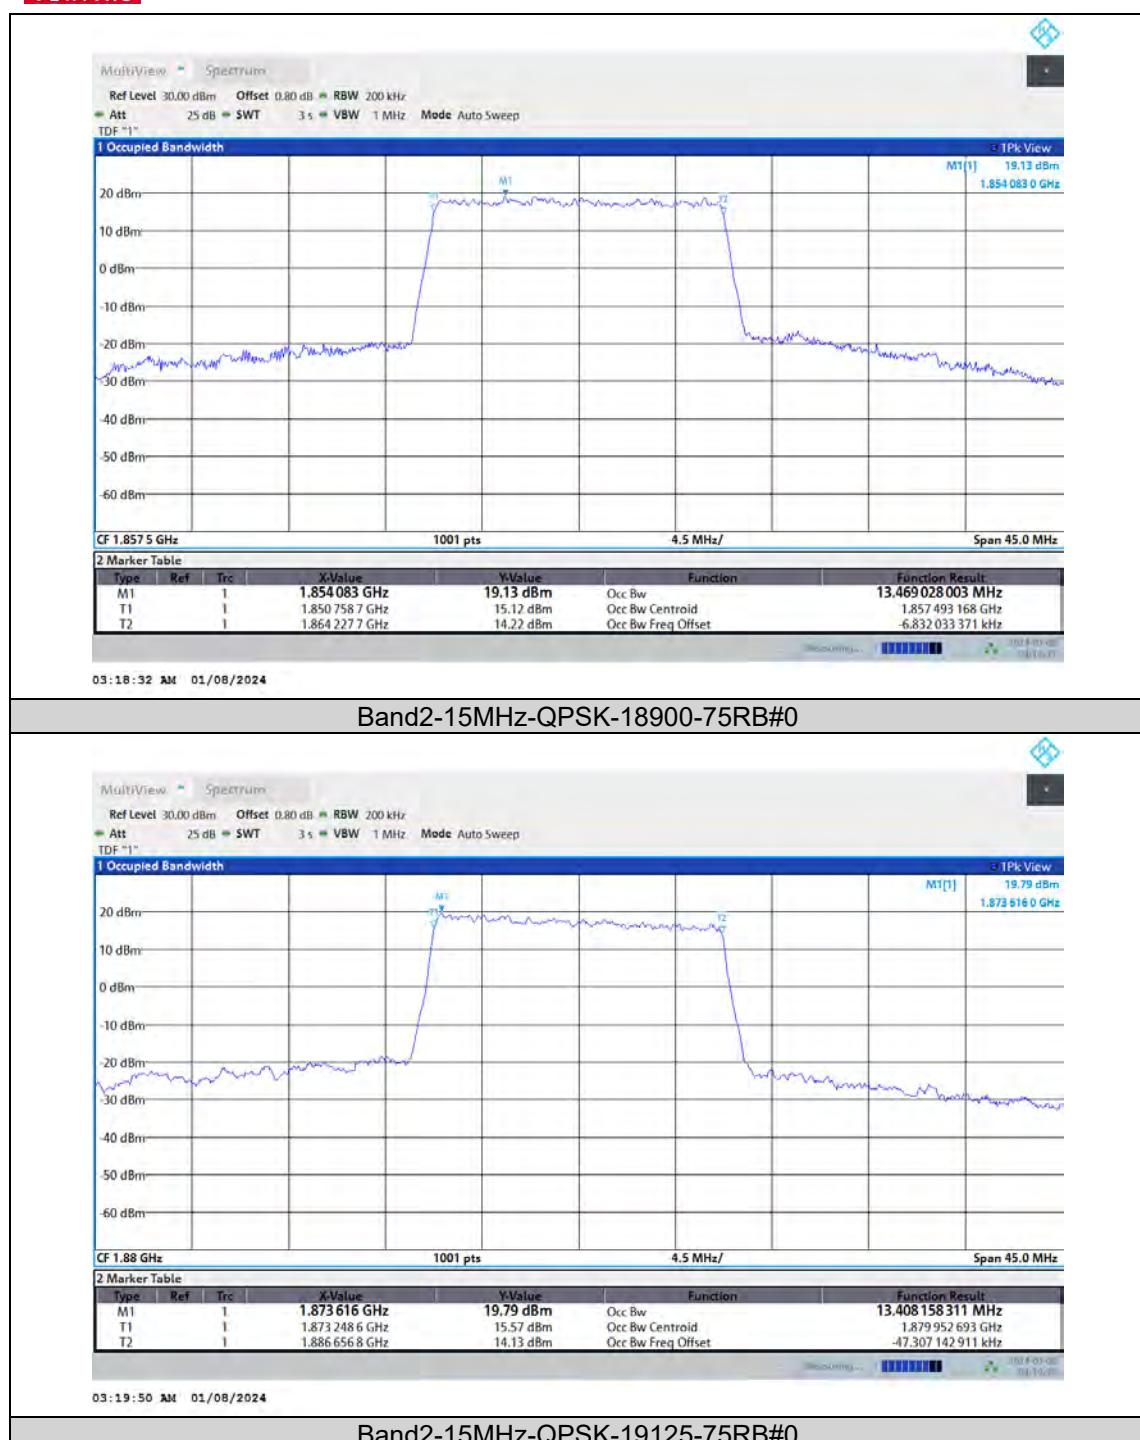



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

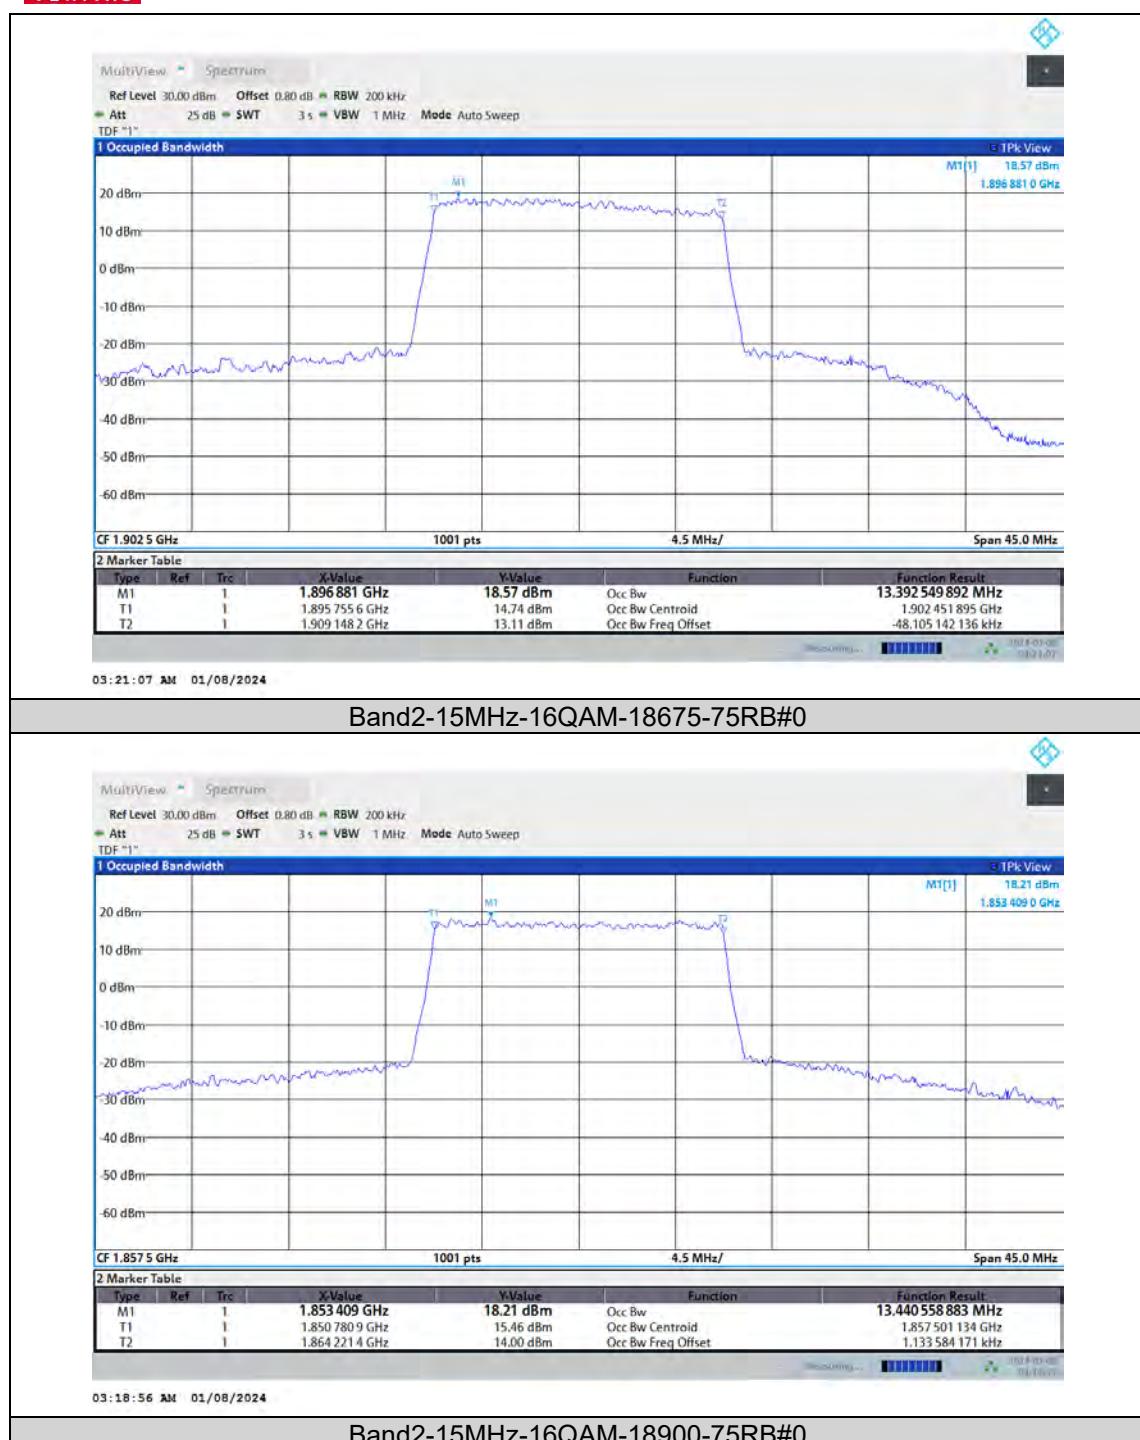



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

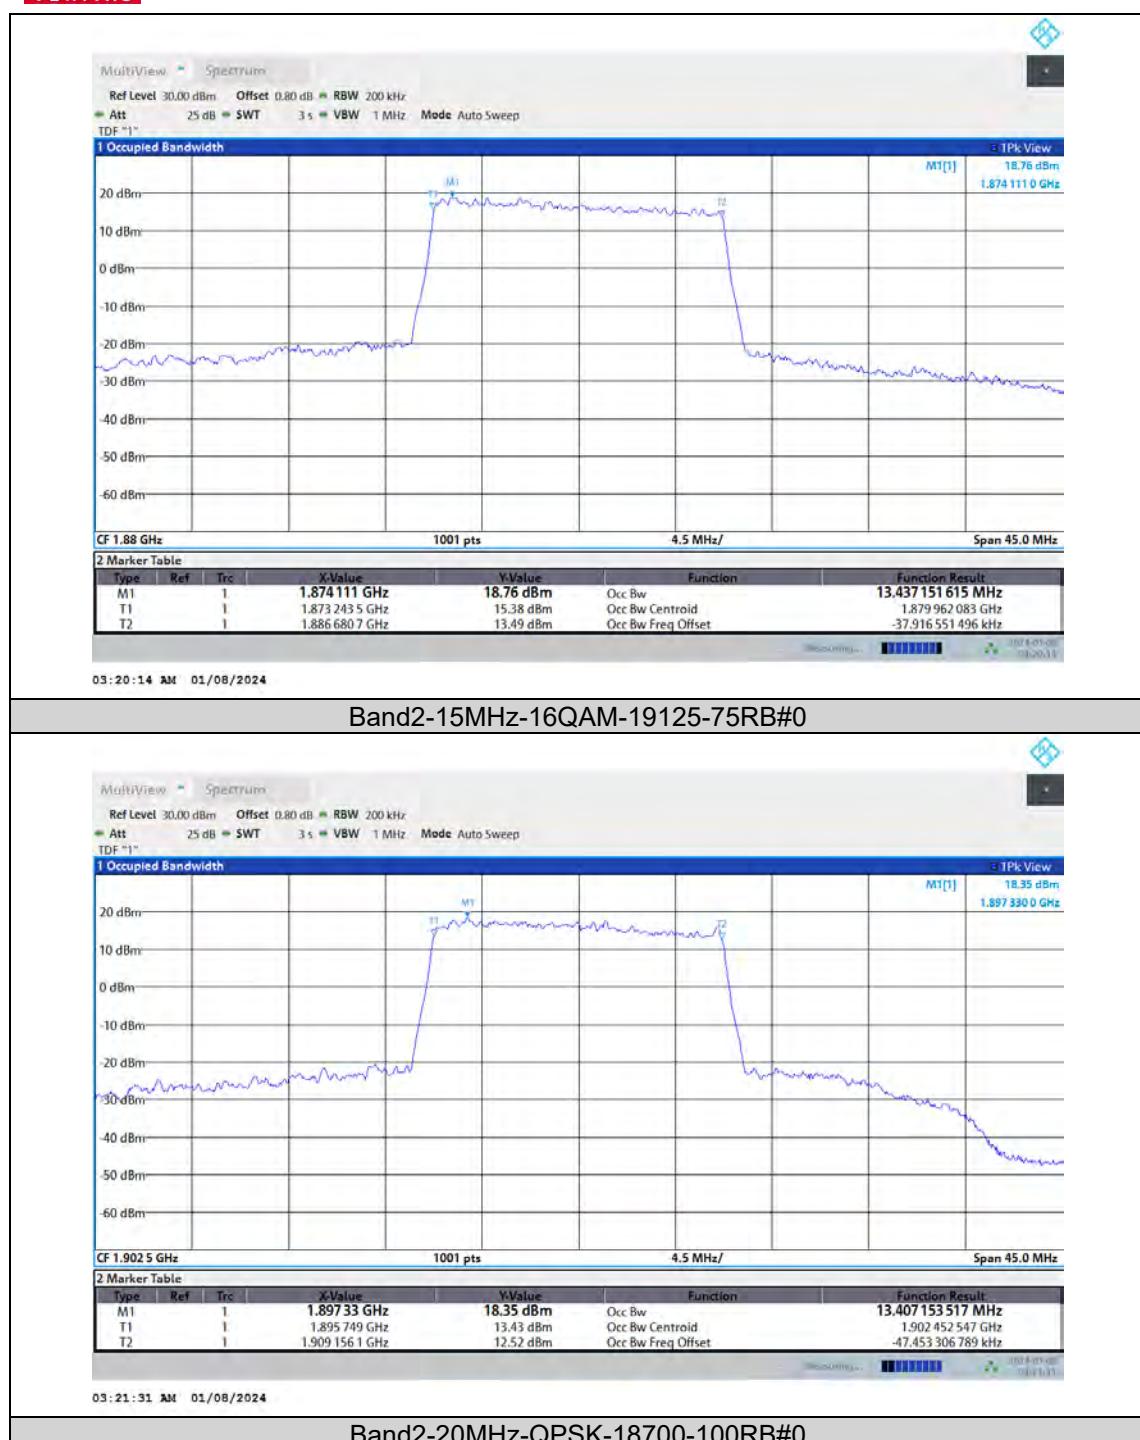



BUREAU  
VERITAS


## Test Report No.: PSU-NQN2311090109RF02

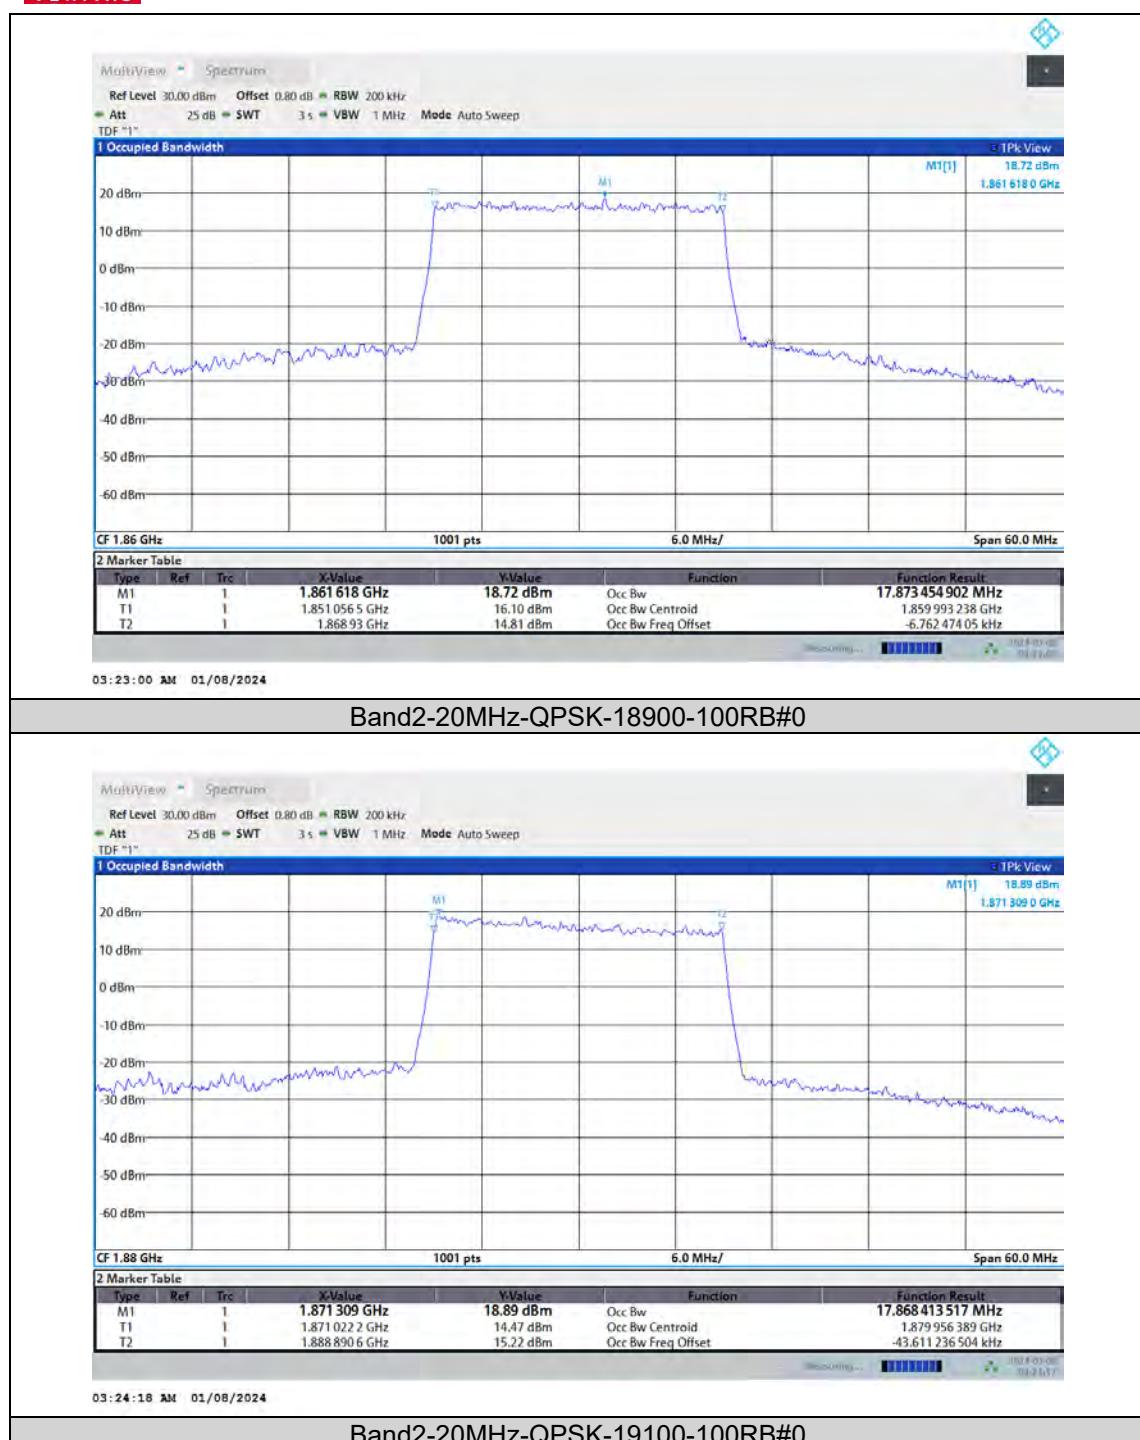



BUREAU  
VERITAS


Test Report No.: PSU-NQN2311090109RF02

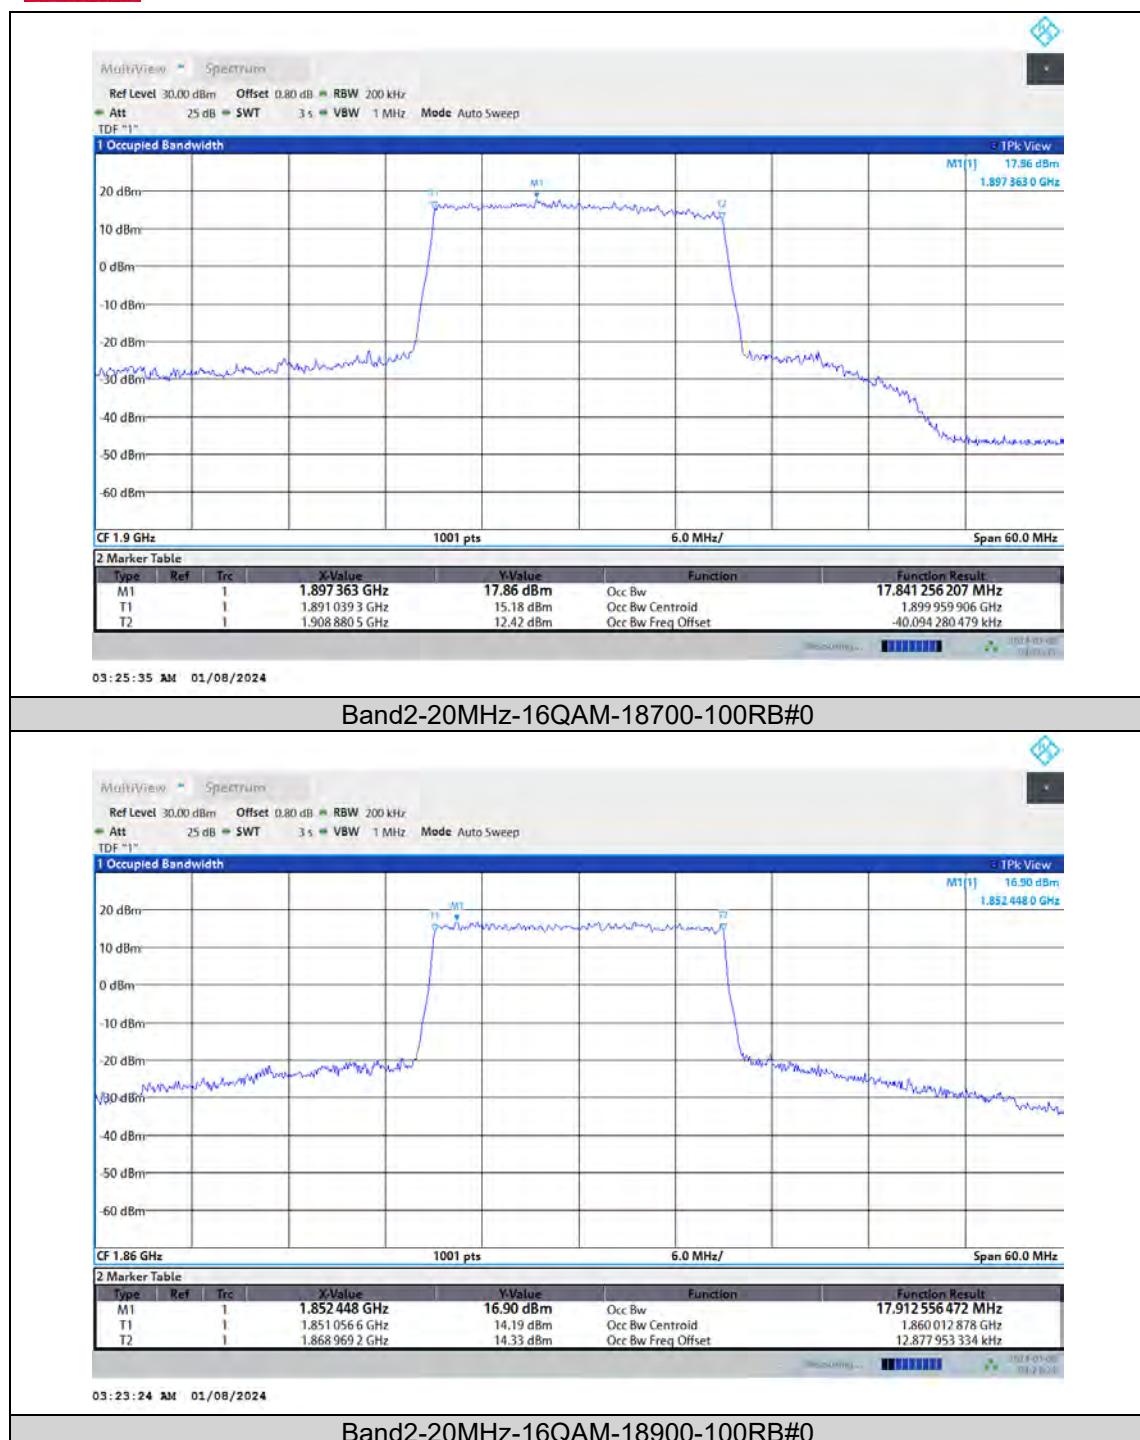



BUREAU  
VERITAS

## Test Report No.: PSU-NQN2311090109RF02

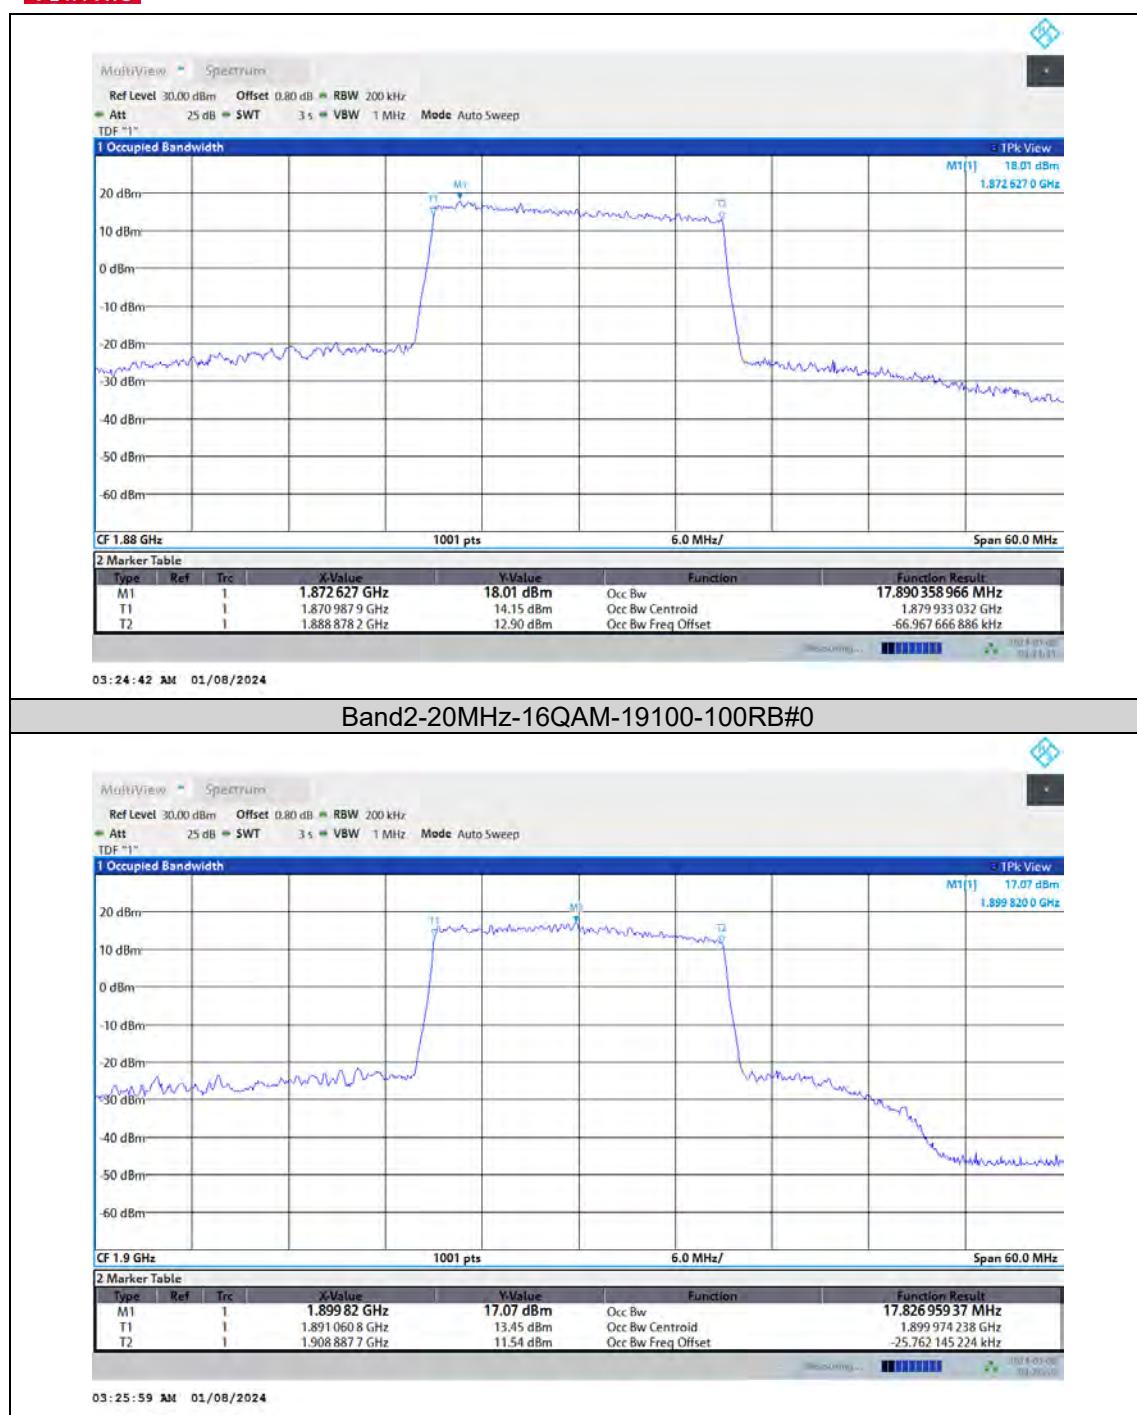

### Band2-1.4MHz-64QAM-18607-6RB#0



BUREAU  
VERITAS

Test Report No.: PSU-NQN2311090109RF02

