

## **Measurement Protocol**

Measurement Object	LTE Band 2 20QPSK 100RB 0 EVS NB 24.4kbps CH18900
Project	HMD_2322#N159V

Project	TIA-5050 (2018-01)
Report Generation Date	2024/2/6 10:21
Responsible Person	audio

**Status Overview**

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay NB	Done	Delay (Cross) [ms]	163.8	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.1a Receive Volume Control Performance 8N NB	Not Ok	Corrected Speech Level [dB[SPL]]	17.84	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.1b Receive Volume Control Performance 2N NB	Ok	Corrected Speech Level [dB[SPL]]	12.72	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.92	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.12	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 630 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.61	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	34.55	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	39.08	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.09	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	41.82	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	35.68	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	31.24	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	36.34	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 1250Hz)	29.09	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.21	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	31.54	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise	Ok	Distortion (Noise) [dB],	33.66	LTE Band


- 630 Hz NB		0.0 dB		2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	35.52	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.41	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	22.71	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	39.70	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	37.03	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	38.13	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	38.26	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 1250Hz)	22.71	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.3 Frequency Response 8N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 649.1 Hz	0.01	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.3 Frequency Response 8N DF HANB	Ok	Min. dist. to tolerance scheme [dB], 2057.5 Hz	0.01	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.3 Frequency Response 2N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 1285.9 Hz	0.18	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900
5.3 Frequency Response 2N DF HANB	Ok	Min. dist. to tolerance scheme [dB], 3882.4 Hz	1.03	LTE Band 2_20QPSK_100RB_0_EVS NB_24.4kbps_CH18900

---

Overall Receive Delay NB	5
5.1a Receive Volume Control Performance 8N NB	7
5.1b Receive Volume Control Performance 2N NB	9
5.2 RCV Distortion and Noise - 400 Hz NB	11
5.2 RCV Distortion and Noise - 500 Hz NB	13
5.2 RCV Distortion and Noise - 630 Hz NB	15
5.2 RCV Distortion and Noise - 800 Hz NB	17
5.2 RCV Distortion and Noise - 1000 Hz NB	19
5.2 RCV Distortion and Noise - 1250 Hz NB	22
5.2 RCV Distortion and Noise - 1600 Hz NB	24
5.2 RCV Distortion and Noise - 2000 Hz NB	26
5.2 RCV Distortion and Noise - 2500 Hz NB	28
5.2 RCV Distortion and Noise - 3150 Hz NB	30
Report - Receive Distortion and Noise (Conversational Gain)	32
5.2 RCV Distortion and Noise - 400 Hz NB	33
5.2 RCV Distortion and Noise - 500 Hz NB	35
5.2 RCV Distortion and Noise - 630 Hz NB	37
5.2 RCV Distortion and Noise - 800 Hz NB	39
5.2 RCV Distortion and Noise - 1000 Hz NB	41
5.2 RCV Distortion and Noise - 1250 Hz NB	44
5.2 RCV Distortion and Noise - 1600 Hz NB	46
5.2 RCV Distortion and Noise - 2000 Hz NB	48
5.2 RCV Distortion and Noise - 2500 Hz NB	50
5.2 RCV Distortion and Noise - 3150 Hz NB	52
Report - Receive Distortion and Noise (Conversational Gain)	54
5.3 Frequency Response 8N FF HANB	55
5.3 Frequency Response 8N DF HANB	57
5.3 Frequency Response 2N FF HANB	59
5.3 Frequency Response 2N DF HANB	62

## Overall Receive Delay NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ Preparation - Delay measurement

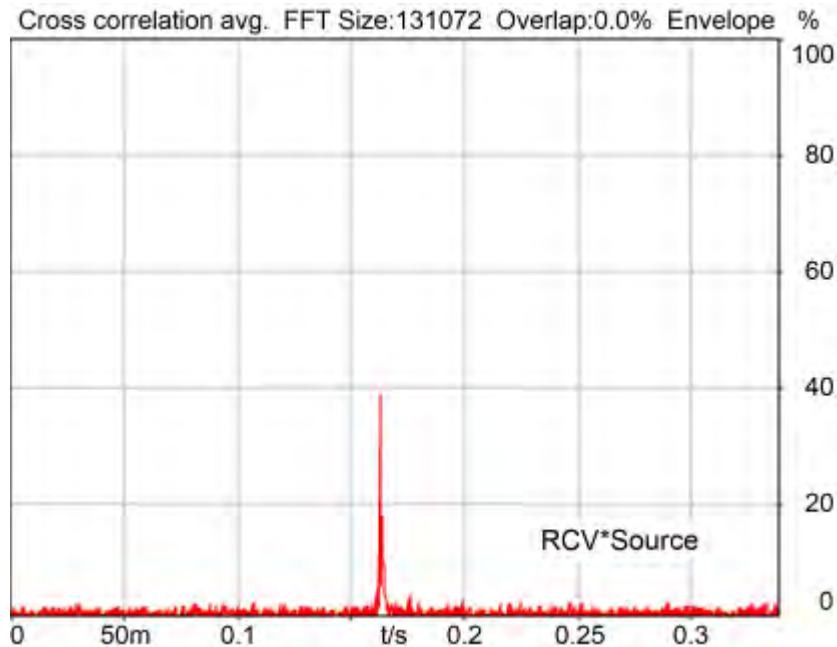

Delay (Cross): 163.8 ms

2024/1/16 9:06 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

### Source: cssnb1b\_r1s.dat

Level adj. Ch1 -90.0 dB

CSSnb1b\_R1s.dat - CS-signal with special 1s random noise

NARROWBAND Composite Source Signal RCV P.501 (1 burst) at Channel 2

Pause 0.5 s +

voiced signal + 4000 Hz band limited random noise 1.0 s +

Pause till end of file

Signal level (ch2): -14.7 dBm0 (corresponds to approx. -16.0 dBm0 for a 350 ms CSS considering 101 ms Pause) from 0.5s to 1.544s for 4-k FFT, Hanning window,

75 % overlap in frequency range of 100 to 4000 Hz

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.1: 0.00 dB

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
		Rotation Delta C	0.0 °

MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-3.9 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Range start	550.00 ms	Range length	1950.00 ms
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	131072	Overlap	0 %
Window function.	Hanning	Smooth	Off
Delayed channel	None		
Valid range start	-1228.79 ms	Valid range end	1228.81 ms

**Special Features**

Show source signal Source ch.2	Store to variable	D_RCV_NB
--------------------------------	-------------------	----------

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1 -40.00 dB  
 Gain in 1 0.00 dB  
 Mic 1 Power Supply Off

Gain out 2 0.00 dB  
 Gain in 2 0.00 dB  
 Mic 2 Power Supply Off

## 5.1a Receive Volume Control Performance 8N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

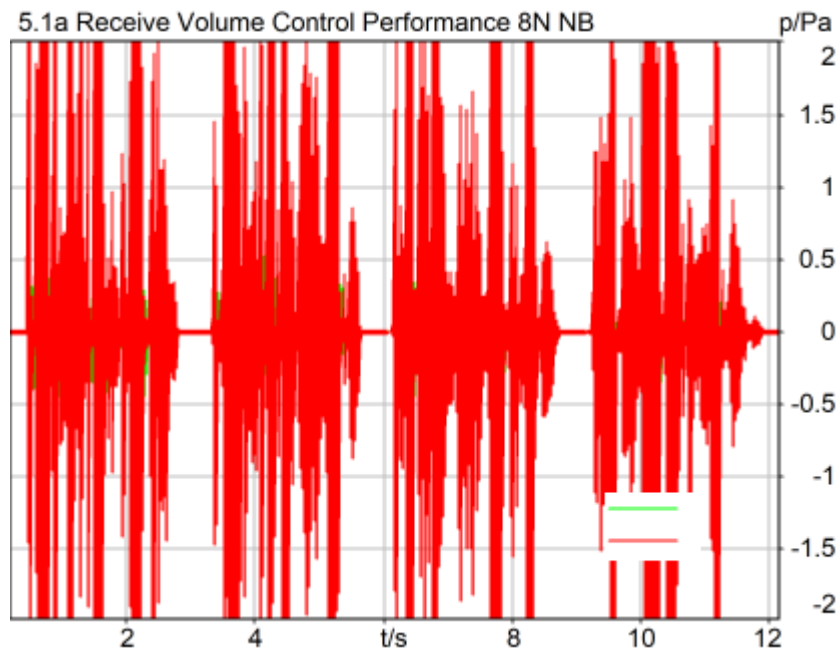

### Correction

X - 70

Speech Level RCV: 87.84 dB[SPL], Act.: 84.51%

Corrected Speech Level: 17.84 dB[SPL] Not Ok

### Not Ok

2024/1/16 15:55 ACQUA 5.1.200

### Limits

	lower
Run 1	18.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
 Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Narrow Band		
	15.90 dB		

**Special Features**

Show source signal Source ch.2  
 Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------




**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.1b Receive Volume Control Performance 2N NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband

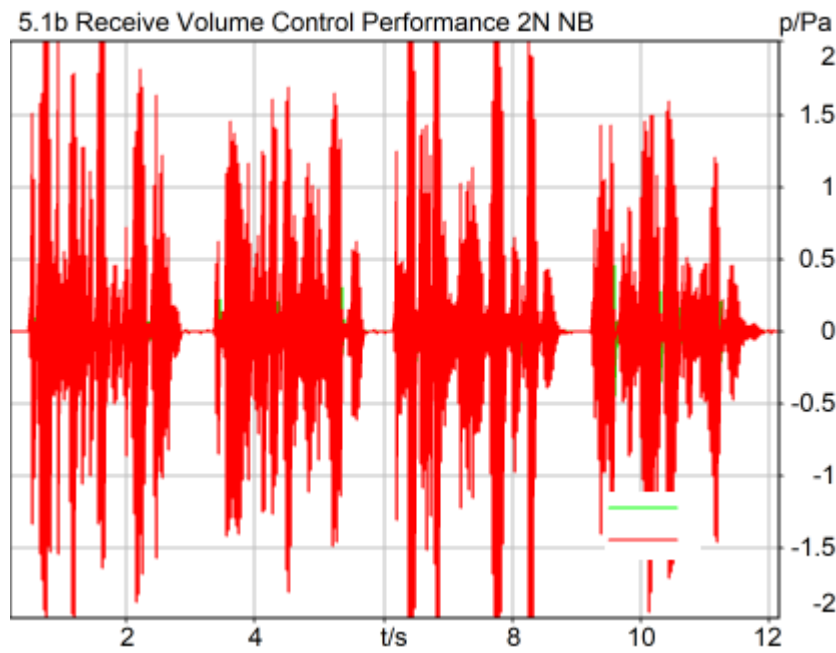

**Correction**

X - 70

Speech Level RCV: 82.72 dB[SPL], Act.: 84.04%

Corrected Speech Level: 12.72 dB[SPL] Ok

**Ok**

2024/1/16 16:03 ACQUA 5.1.200

**Limits**

	<b>lower</b>
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Narrow Band		
15.90 dB			

**Special Features**

Show source signal Source ch.2  
 Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 400 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

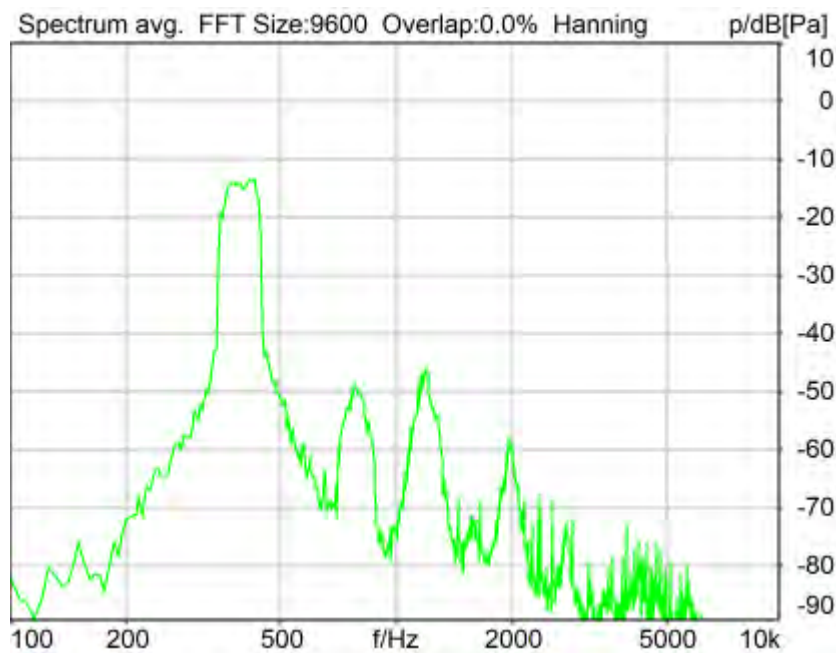

Distortion (Noise) RCV (packed): 29.92 dB (3.19%) Ok

**Ok**

2024/1/16 15:56 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	480.0 Hz
Stimulus min.	320.0 Hz	Analysis max.	315.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	485.0 Hz		

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))

Store to variable RCVNB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode      Bypass  
-----


Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.            12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 500 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

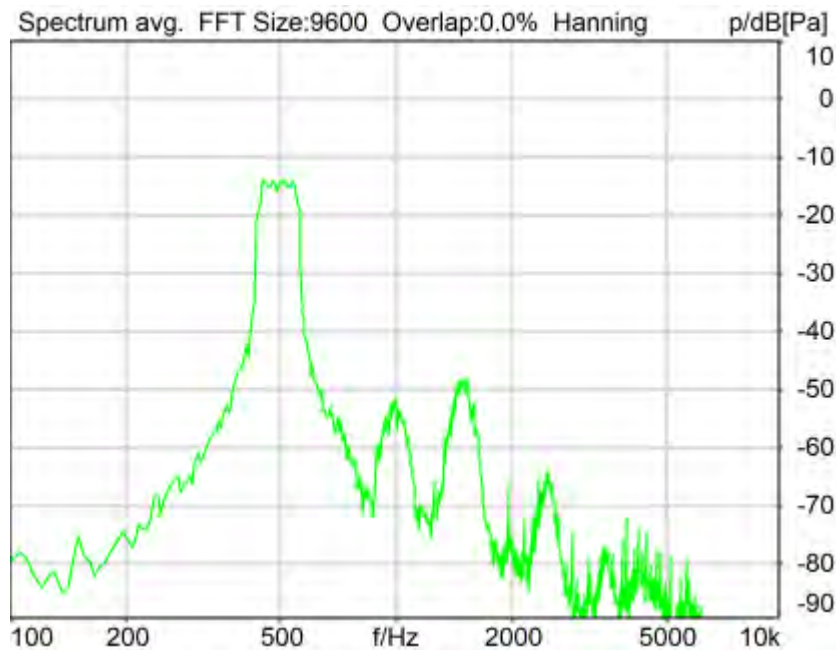

Distortion (Noise) RCV (packed): 30.12 dB (3.12%) Ok

**Ok**

2024/1/16 15:56 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
--	-------

Run 1	20.00 dB
-------	----------

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat  
 Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	595.0 Hz
Stimulus min.	410.0 Hz	Analysis max.	405.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	600.0 Hz		

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage 200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage 200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage 200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage 200V Supply Voltage ±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 630 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

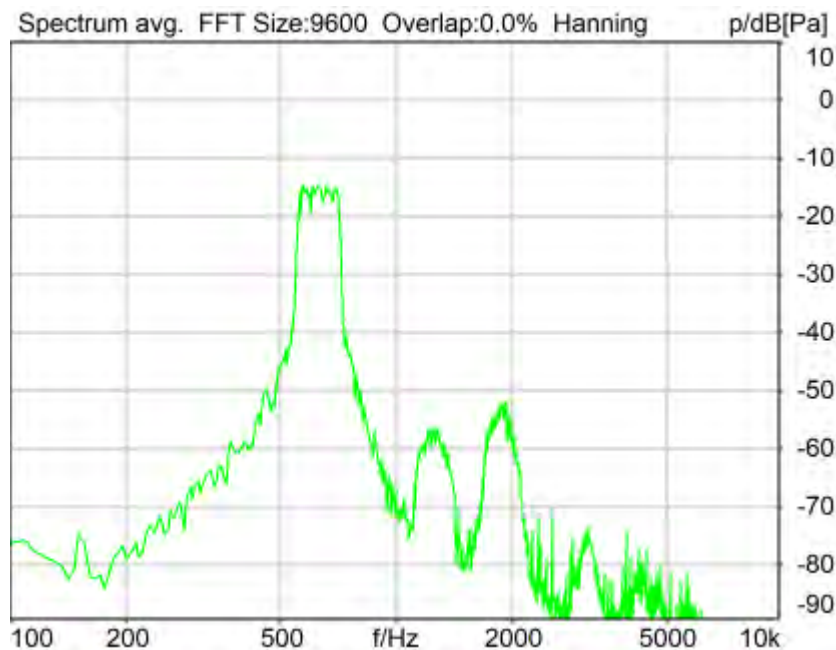

Distortion (Noise) RCV (packed): 30.61 dB (2.95%) Ok

**Ok**

2024/1/16 15:57 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat**  
 Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	525.0 Hz
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out



In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 800 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

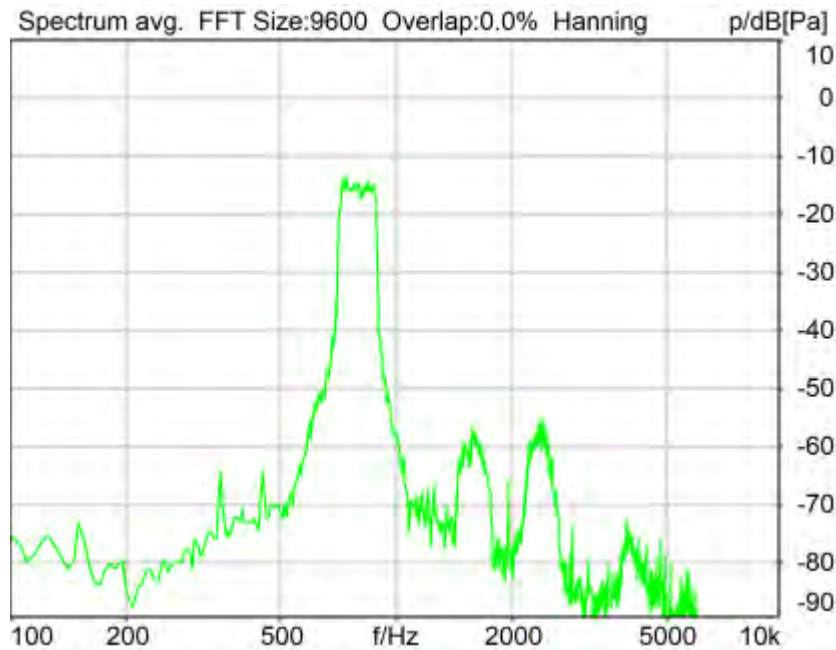

Distortion (Noise) RCV (packed): 34.55 dB (1.87%) Ok

**Ok**

2024/1/16 15:57 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage200V		Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage200V		Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage200V		Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage200V		Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power SupplyOff		Mic 2 Power SupplyOff	

## 5.2 RCV Distortion and Noise - 1000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

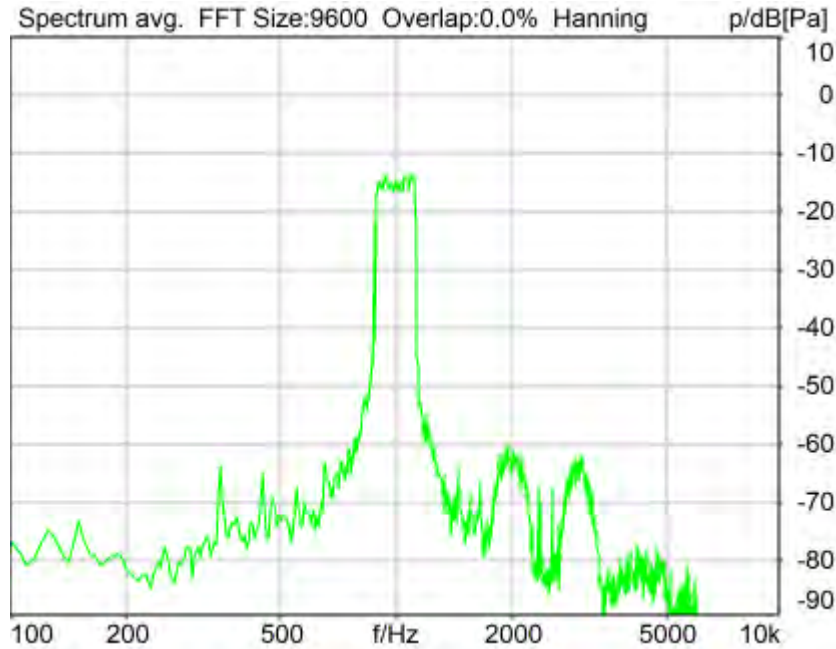

Distortion (Noise) RCV (packed): 39.08 dB (1.11%) Ok

**Ok**

2024/1/16 15:58 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
		Rotation Delta C	0.0 °

MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-3.6 mm	Ear Type	3.3 Coordinates

Mounting: Right Ear  
 Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	855.0 Hz
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 1250 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

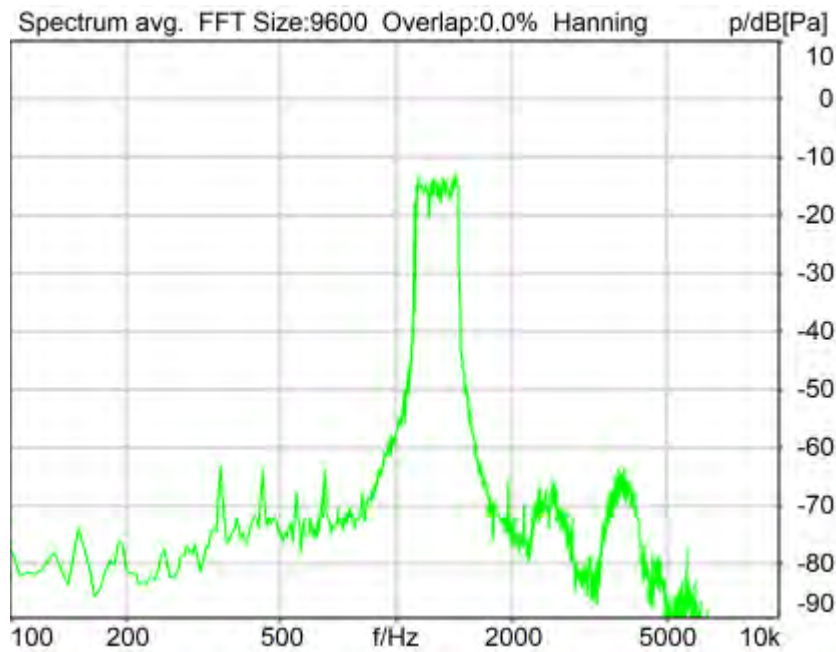

Distortion (Noise) RCV (packed): 29.09 dB (3.51%) Ok

**Ok**

2024/1/16 15:58 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat  
 Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

### Special Features

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1250Hz

### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

### Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

### Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

### Microphone Settings (Mic Amp. (Slot 6))

#### Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

#### Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

#### Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name 60020095 Serial 60020095  
 HIB Mode Mobile Measurement Impedance 32 Ohm  
 Gain out 1 -40.00 dB Gain out 2 0.00 dB  
 Gain in 1 0.00 dB Gain in 2 0.00 dB  
 Mic 1 Power Supply Off Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 1600 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

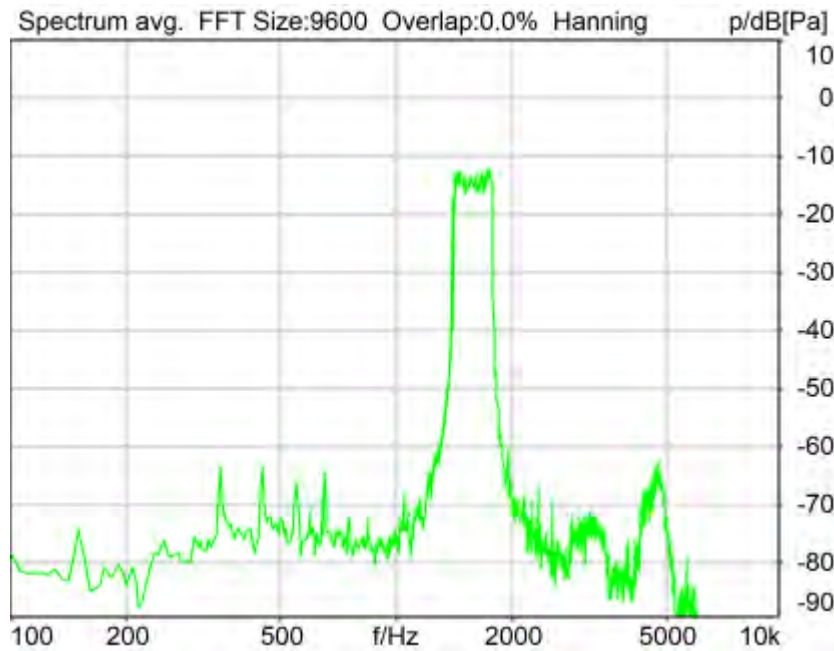

Distortion (Noise) RCV (packed): 41.82 dB (0.81%) Ok

**Ok**

2024/1/16 15:58 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB



Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat**  
 Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode Bypass


-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

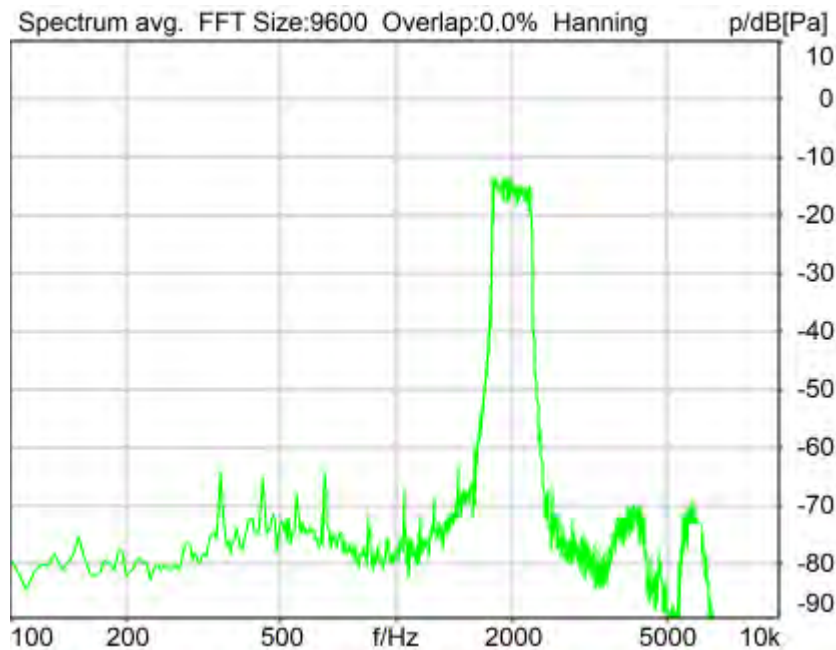

Distortion (Noise) RCV (packed): 35.68 dB (1.65%) Ok

**Ok**

2024/1/16 15:59 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	1745.0 Hz
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

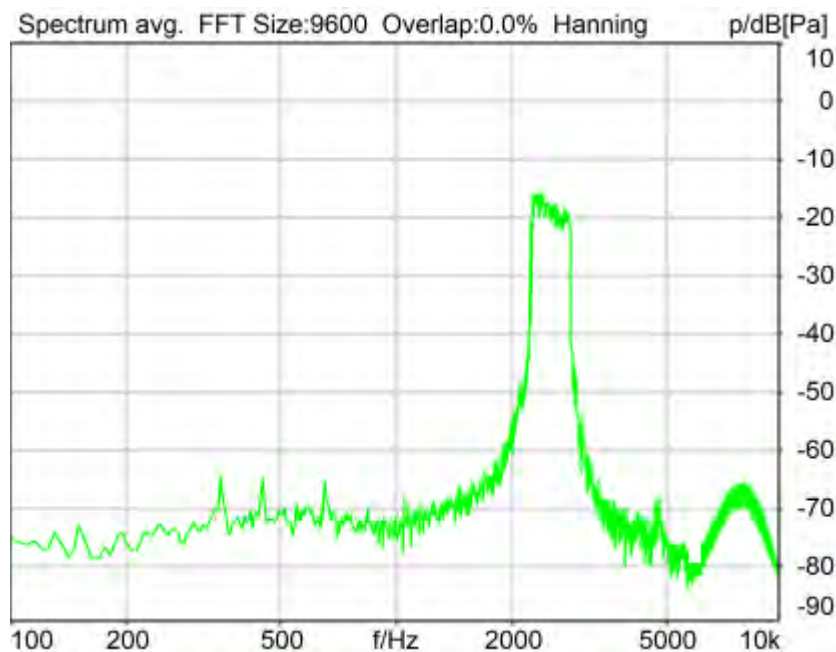

Distortion (Noise) RCV (packed): 31.24 dB (2.74%) Ok

**Ok**

2024/1/16 15:59 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**  
 Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
 Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	2855.0 Hz
Stimulus min.	2205.0 Hz	Analysis max.	2200.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	2860.0 Hz		

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 3150 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

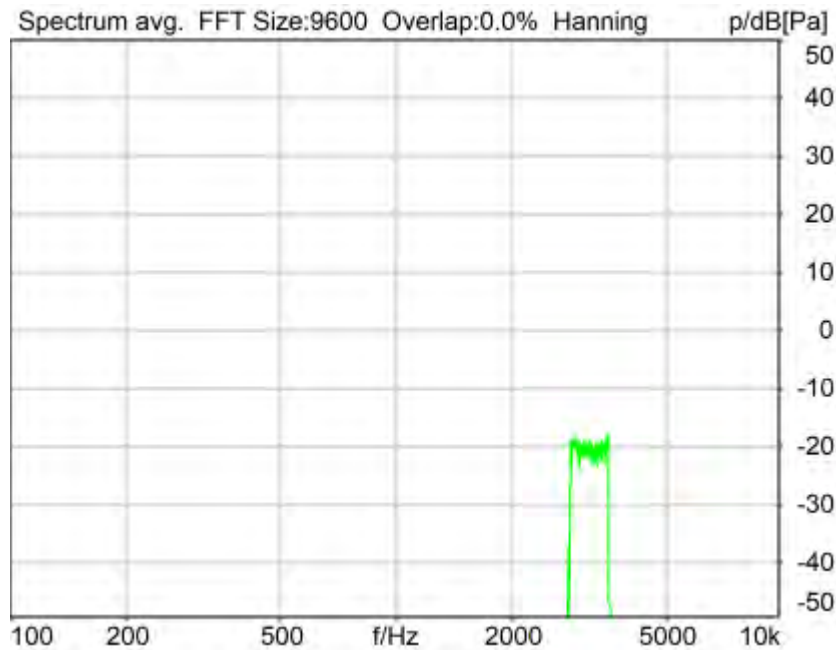

Distortion (Noise) RCV (packed): 36.34 dB (1.52%) Ok

**Ok**

2024/1/16 16:00 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.0 N

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

#### Analysis

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	3585.0 Hz
Stimulus min.	2785.0 Hz	Analysis max.	2780.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	3590.0 Hz		

#### Special Features

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_3150Hz

#### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

#### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

#### Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

#### Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

#### Microphone Settings (Mic Amp. (Slot 6))

##### Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

##### Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

##### Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

##### Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

#### BEQ Settings (BEQ Filter 1)

Block mode Bypass

#### Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

#### HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off



---

## **Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N


<b>Region</b>	<b>Frequency</b>	<b>SDNR</b>
1	400Hz	29.92 dB
2	500Hz	30.12 dB
3	630Hz	30.61 dB
4	800Hz	34.55 dB
5	1000Hz	39.08 dB
6	1250Hz	29.09 dB
7	1600Hz	41.82 dB
8	2000Hz	35.68 dB
9	2500Hz	31.24 dB
10	3150Hz	36.34 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 29.09dB at 1250Hz.

2024/1/16 16:00 ACQUA

### **5.2 RCV Distortion and Noise - 400 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

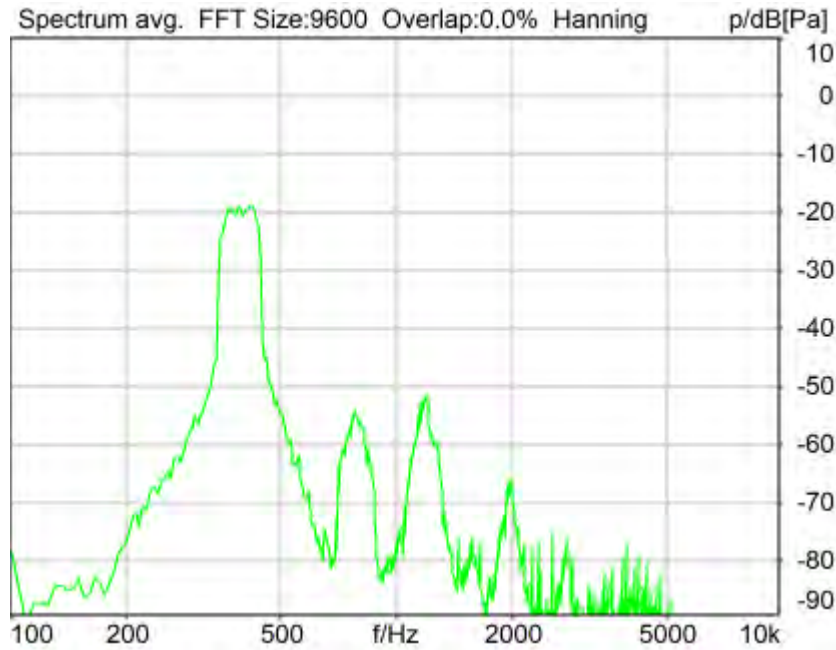

Distortion (Noise) RCV (packed): 30.21 dB (3.09%) Ok

**Ok**

2024/1/16 16:04 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	480.0 Hz
Stimulus min.	320.0 Hz	Analysis max.	315.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	485.0 Hz		

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

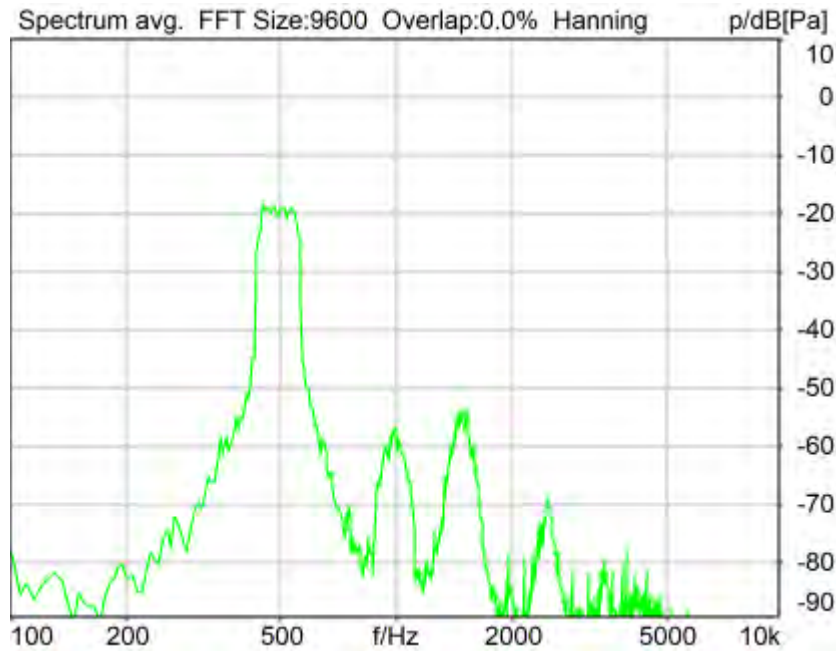

Distortion (Noise) RCV (packed): 31.54 dB (2.65%) Ok

Ok

2024/1/16 16:05 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
		Rotation Delta C	0.0 °

MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.3 mm	Ear Type	3.3 Coordinates

Mounting: Right Ear  
 Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	595.0 Hz
Stimulus min.	410.0 Hz	Analysis max.	405.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	600.0 Hz		

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 630 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

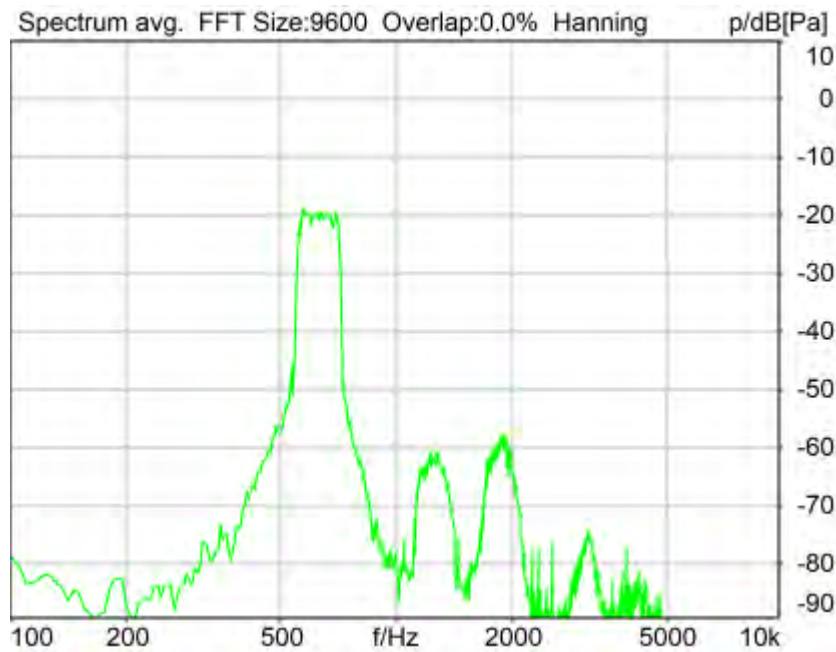

Distortion (Noise) RCV (packed): 33.66 dB (2.08%) Ok

**Ok**

2024/1/16 16:05 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat  
 Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.3 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieeee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage 200V Supply Voltage ±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name 60020095 Serial 60020095  
 HIB Mode Mobile Measurement Impedance 32 Ohm  
 Gain out 1 -40.00 dB Gain out 2 0.00 dB  
 Gain in 1 0.00 dB Gain in 2 0.00 dB  
 Mic 1 Power Supply Off Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 800 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

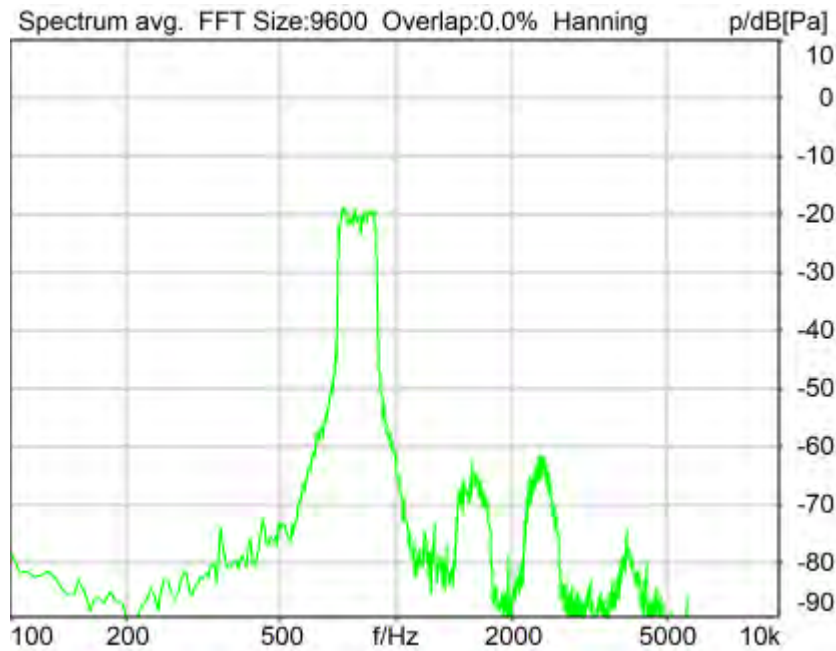

Distortion (Noise) RCV (packed): 35.52 dB (1.67%) Ok

**Ok**

2024/1/16 16:06 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Limits

	<b>lower</b>
Run 1	20.00 dB



Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat  
 Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 1000 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N



Distortion (Noise) RCV (packed): 30.41 dB (3.01%) Ok

**Ok**

2024/1/16 16:06 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	855.0 Hz
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1      0.00 dB                      Ch. 0 Float      On  
Range Ch. 2      0.00 dB                      Ch. 1 Float      On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1      0.00 dB                      Range Ch. 2      0.00 dB

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range              114 dB[SPL] @ 12.5 mV/Pa    Highpass          Off  
Polarisation Voltage200V                      Supply Voltage    ±60V

Channel In 2 Settings

Range              114 dB[SPL] @ 12.5 mV/Pa    Highpass          20Hz  
Polarisation Voltage200V                      Supply Voltage    ±60V

Channel In 3 Settings

Range              114 dB[SPL] @ 12.5 mV/Pa    Highpass          Off  
Polarisation Voltage200V                      Supply Voltage    ±60V

Channel In 4 Settings

Range              114 dB[SPL] @ 12.5 mV/Pa    Highpass          Off  
Polarisation Voltage200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode        Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.            12306613                      Pinna Type        Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1250 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N



Distortion (Noise) RCV (packed): 22.71 dB (7.32%) Ok

**Ok**

2024/1/16 16:07 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.3 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off		
Frequency base	Transformation	Overlap	0 %
FFT size	9600	Smooth	Off
Window function.	Hanning		
dB weighting	A Weighting	Stimulus max.	1450.0 Hz
Stimulus min.	1085.0 Hz	Analysis max.	1080.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	1455.0 Hz		

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))

Store to variable RCVNB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1600 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

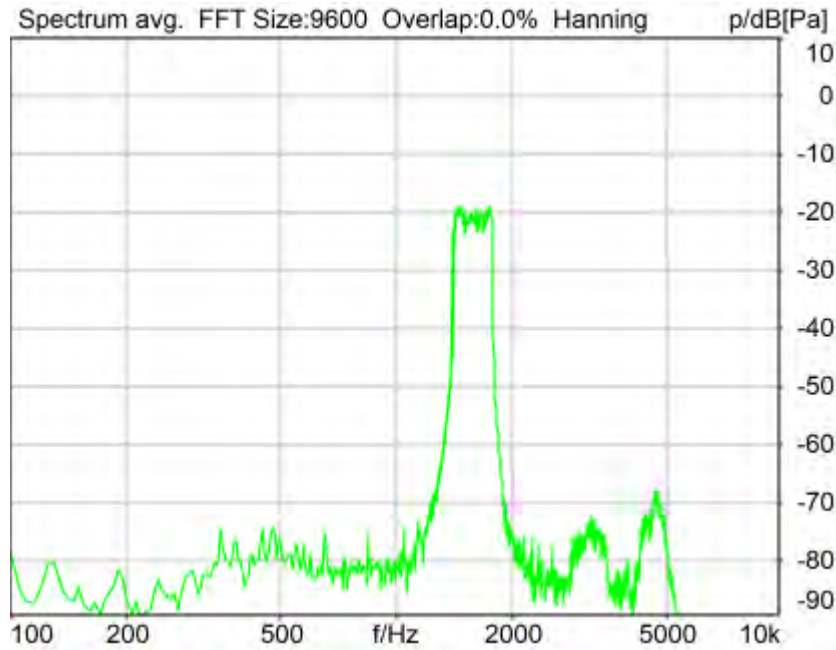

Distortion (Noise) RCV (packed): 39.70 dB (1.03%) Ok

**Ok**

2024/1/16 16:07 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	1815.0 Hz
Stimulus min.	1375.0 Hz	Analysis max.	1370.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	1820.0 Hz		

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off



## 5.2 RCV Distortion and Noise - 2000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N



Distortion (Noise) RCV (packed): 37.03 dB (1.41%) Ok

**Ok**

2024/1/16 16:07 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
		Rotation Delta C	0.0 °

MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.3 mm	Ear Type	3.3 Coordinates

Mounting: Right Ear  
 Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	1745.0 Hz
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 2500 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

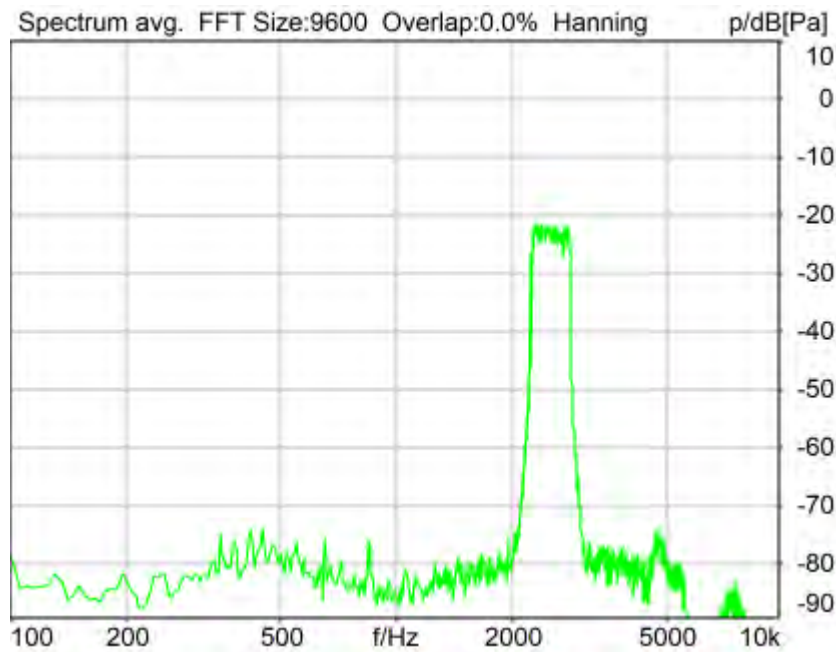

Distortion (Noise) RCV (packed): 38.13 dB (1.24%) Ok

**Ok**

2024/1/16 16:08 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat  
 Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.3 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage 200V Supply Voltage ±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name 60020095 Serial 60020095  
 HIB Mode Mobile Measurement Impedance 32 Ohm  
 Gain out 1 -40.00 dB Gain out 2 0.00 dB  
 Gain in 1 0.00 dB Gain in 2 0.00 dB  
 Mic 1 Power Supply Off Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 3150 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

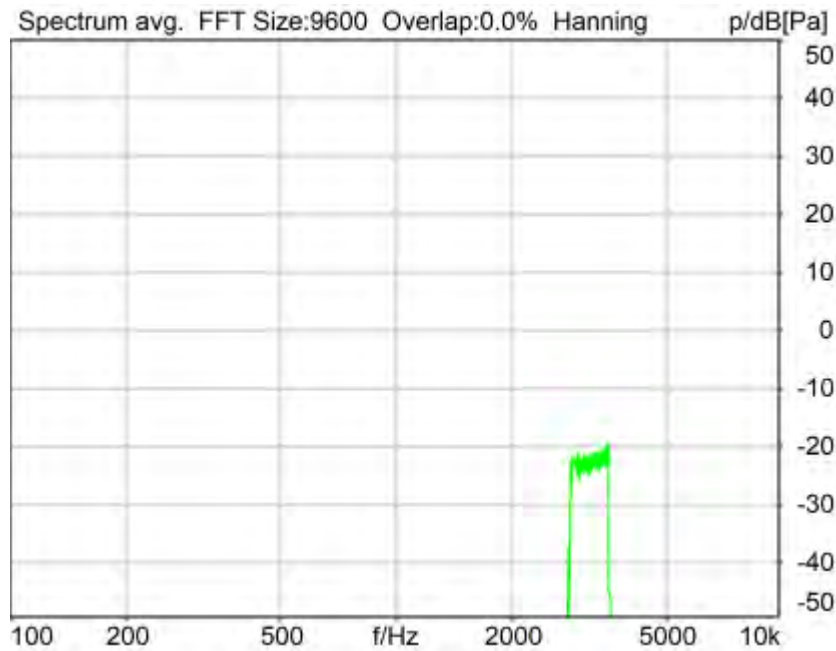

Distortion (Noise) RCV (packed): 38.26 dB (1.22%) Ok

**Ok**

2024/1/16 16:08 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**  
 Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))  
 Store to variable RCVNB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name 60020095 Serial 60020095  
 HIB Mode Mobile Measurement Impedance 32 Ohm  
 Gain out 1 -40.00 dB Gain out 2 0.00 dB  
 Gain in 1 0.00 dB Gain in 2 0.00 dB  
 Mic 1 Power Supply Off Mic 2 Power Supply Off

**Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N


Region	Frequency	SDNR
1	400Hz	30.21 dB
2	500Hz	31.54 dB
3	630Hz	33.66 dB
4	800Hz	35.52 dB
5	1000Hz	30.41 dB
6	1250Hz	22.71 dB
7	1600Hz	39.70 dB
8	2000Hz	37.03 dB
9	2500Hz	38.13 dB
10	3150Hz	38.26 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
 Smallest SDNR was 22.71dB at 1250Hz.

2024/1/16 16:08 ACQUA

**5.3 Frequency Response 8N FF HANB**

TIA-5050 (2018-01) \ Measurements \ Narrowband

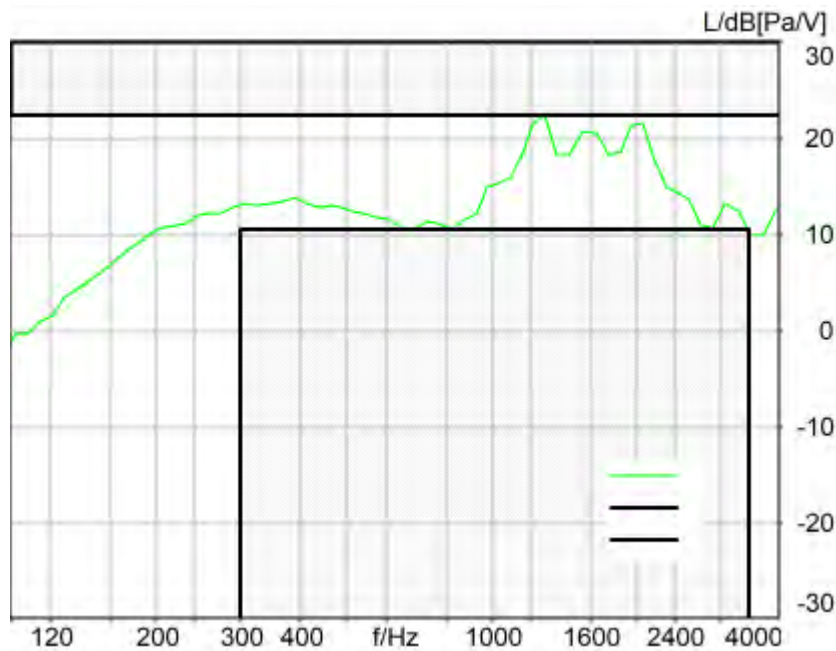

Absolute minimal distance  
 0.01 dB at 649.1 Hz Ok

**Ok**

2024/1/16 9:16 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 4.0 kHz low-pass filter

signal level changed



**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
 Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		

Impairment Mode Off                      Impairment Type Off

-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode Bypass


-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr. 12306613                      Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.3 Frequency Response 8N DF HANB**

TIA-5050 (2018-01) \ Measurements \ Narrowband

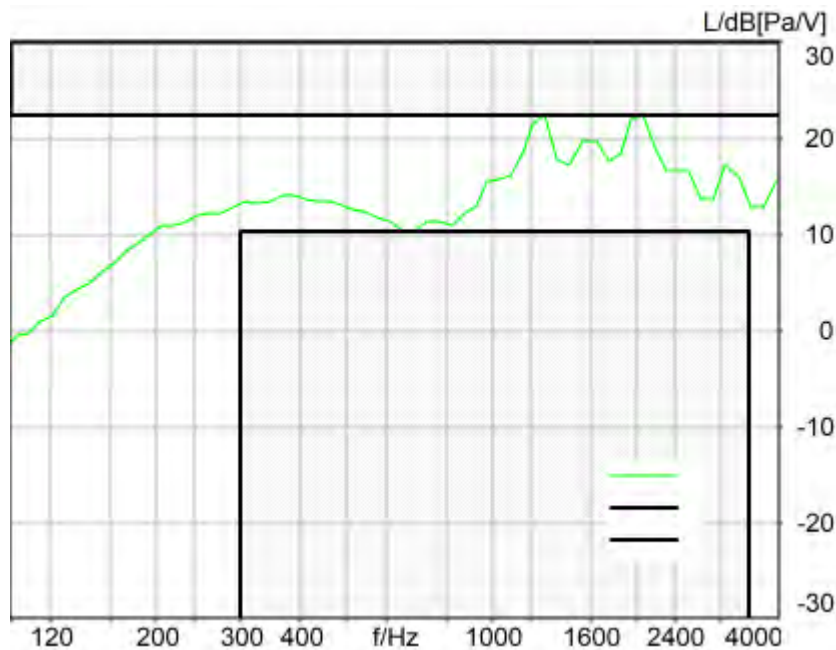

Absolute minimal distance  
 0.01 dB at 2057.5 Hz Ok

**Ok**

2024/1/16 9:17 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB  
 NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2  
 Pause 0.5 s +  
 Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +  
 Pause till end of file  
 Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the end of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

		Rotation Delta A	0.0 °
MECRP Delta Ye	0.0 mm	Rotation Delta C	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-3.9 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieeee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VolIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VolIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out

In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage 200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage 200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage 200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage 200V Supply Voltage ±60V

-----  
 VoIP Settings (VoIP)

RTP Connection Streaming SIP Connection Unavailable  
 SIP Reg. State Unregistered Jitterbuffer Length 140  
 Jitter Buffer Reset On Playback Enabled Codec EVS/16000/1  
 Packet Length 20 Encoder Parameter ;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0  
 FMTP Parameter ;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0  
 Impairment Mode Off Impairment Type Off

-----  
 BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name 60020095 Serial 60020095  
 HIB Mode Mobile Measurement Impedance 32 Ohm  
 Gain out 1 -40.00 dB Gain out 2 0.00 dB  
 Gain in 1 0.00 dB Gain in 2 0.00 dB  
 Mic 1 Power Supply Off Mic 2 Power Supply Off

## 5.3 Frequency Response 2N FF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

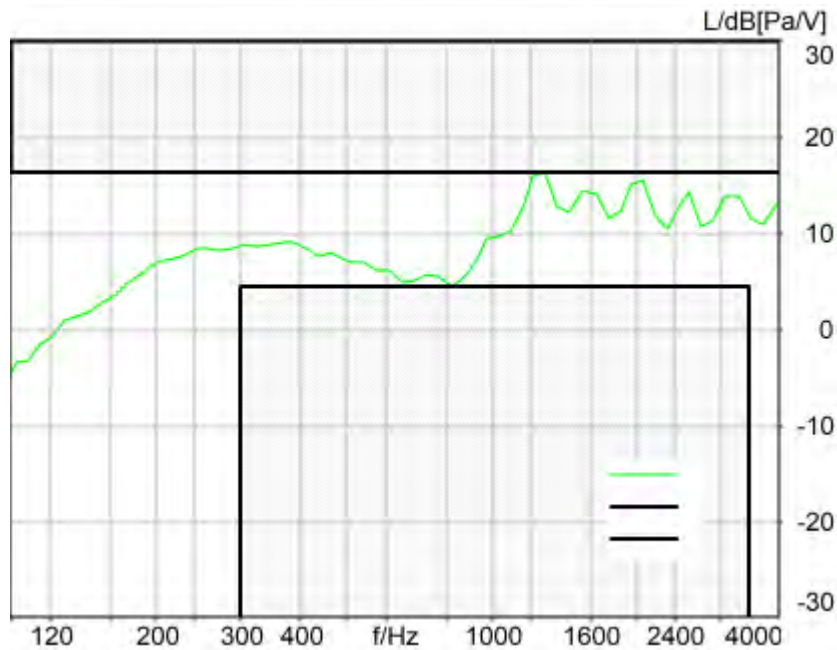

Absolute minimal distance  
 0.18 dB at 1285.9 Hz Ok

**Ok**

2024/1/16 16:10 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
 Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.3 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
 Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

### 5.3 Frequency Response 2N DF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

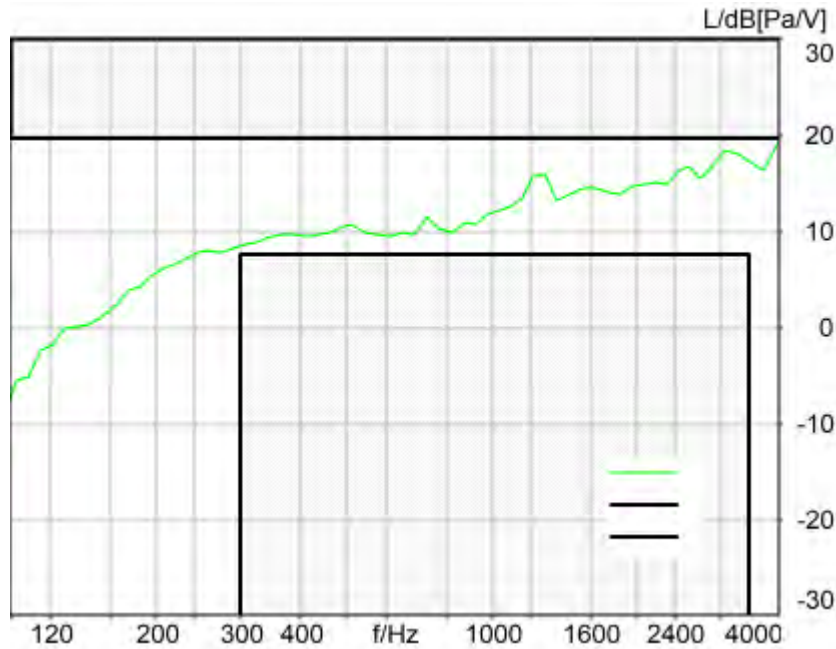

Absolute minimal distance  
 1.03 dB at 3882.4 Hz Ok

Ok

2024/1/16 16:09 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

Limits

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
 Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB  
 NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2  
 Pause 0.5 s +  
 Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +  
 Pause till end of file  
 Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the end of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.3 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2df_ieeee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 163.8000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right



Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **Measurement Protocol**

Measurement Object	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
Project	HMD_2322#N159V

Project	TIA-5050 (2018-01)
Report Generation Date	2024/2/6 10:22
Responsible Person	audio

**Status Overview**

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay WB	Done	Delay (Cross) [ms]	158.9	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.1a Receive Volume Control Performance 8N WB	Not Ok	Corrected Speech Level [dB[SPL]]	17.16	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.1b Receive Volume Control Performance 2N WB	Ok	Corrected Speech Level [dB[SPL]]	11.62	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	31.50	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 315 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.16	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 400 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.00	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	33.17	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 630 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	35.16	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 800 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	35.78	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 1000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	34.85	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 1250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	28.31	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 1600 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	39.60	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 2000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	38.11	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 2500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	38.92	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 3150 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	38.93	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 4000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.44	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise	Ok	Distortion (Noise) [dB],	30.97	LTE Band

- 5000 Hz WB		0.0 dB		2_20QPSK_100RB_0_EVS WB128kbps_CH18900
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 1250Hz)	28.31	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.21	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 315 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	33.05	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 400 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.61	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	33.21	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 630 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	37.68	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 800 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	39.99	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 1000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	41.82	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 1250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	31.79	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 1600 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	28.46	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 2000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	27.44	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 2500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	35.53	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 3150 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	44.10	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 4000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	27.56	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.2 RCV Distortion and Noise - 5000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	35.10	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 2000Hz)	27.44	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.3 Frequency Response 8N FF	Ok	Min. dist. to tolerance scheme [dB], 4870.0 Hz	0.59	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.3 Frequency Response 8N	Not Ok	Min. dist. to tolerance	-0.65	LTE Band


DF		scheme [dB], 205.7 Hz		2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.3 Frequency Response 2N FF	Ok	Min. dist. to tolerance scheme [dB], 4870.0 Hz	1.22	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900
5.3 Frequency Response 2N DF	Not Ok	Min. dist. to tolerance scheme [dB], 4119.5 Hz	-1.97	LTE Band 2_20QPSK_100RB_0_EVS WB128kbps_CH18900

---

Overall Receive Delay WB	6
5.1a Receive Volume Control Performance 8N WB	8
5.1b Receive Volume Control Performance 2N WB	10
5.2 RCV Distortion and Noise - 250 Hz WB	12
5.2 RCV Distortion and Noise - 315 Hz WB	14
5.2 RCV Distortion and Noise - 400 Hz WB	16
5.2 RCV Distortion and Noise - 500 Hz WB	18
5.2 RCV Distortion and Noise - 630 Hz WB	21
5.2 RCV Distortion and Noise - 800 Hz WB	23
5.2 RCV Distortion and Noise - 1000 Hz WB	25
5.2 RCV Distortion and Noise - 1250 Hz WB	27
5.2 RCV Distortion and Noise - 1600 Hz WB	30
5.2 RCV Distortion and Noise - 2000 Hz WB	32
5.2 RCV Distortion and Noise - 2500 Hz WB	34
5.2 RCV Distortion and Noise - 3150 Hz WB	36
5.2 RCV Distortion and Noise - 4000 Hz WB	39
5.2 RCV Distortion and Noise - 5000 Hz WB	41
Report - Receive Distortion and Noise (Conversational Gain)	43
5.2 RCV Distortion and Noise - 250 Hz WB	44
5.2 RCV Distortion and Noise - 315 Hz WB	46
5.2 RCV Distortion and Noise - 400 Hz WB	48
5.2 RCV Distortion and Noise - 500 Hz WB	50
5.2 RCV Distortion and Noise - 630 Hz WB	52
5.2 RCV Distortion and Noise - 800 Hz WB	54
5.2 RCV Distortion and Noise - 1000 Hz WB	57
5.2 RCV Distortion and Noise - 1250 Hz WB	59
5.2 RCV Distortion and Noise - 1600 Hz WB	61
5.2 RCV Distortion and Noise - 2000 Hz WB	63
5.2 RCV Distortion and Noise - 2500 Hz WB	65
5.2 RCV Distortion and Noise - 3150 Hz WB	67
5.2 RCV Distortion and Noise - 4000 Hz WB	70
5.2 RCV Distortion and Noise - 5000 Hz WB	72
Report - Receive Distortion and Noise (Conversational Gain)	74
5.3 Frequency Response 8N FF	74
5.3 Frequency Response 8N DF	77
5.3 Frequency Response 2N FF	79
5.3 Frequency Response 2N DF	81

## Overall Receive Delay WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ Preparation - Delay measurement

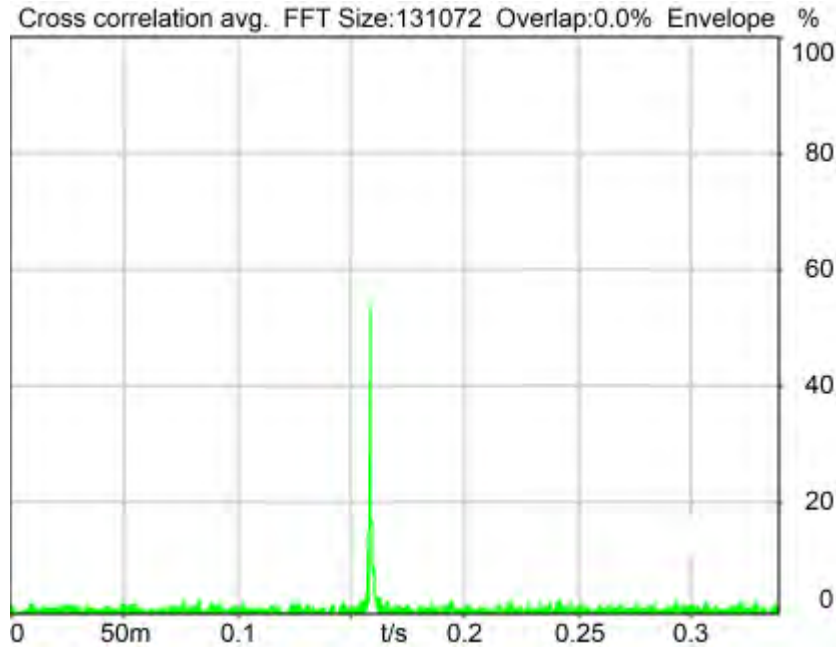

Delay (Cross): 158.9 ms

2024/1/21 17:22 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Source: csswb1b\_r1s.dat

WIDEBAND Composite Source Signal RCV P.501 (1 bursts) at Channel 2

Pause 0.5 s +

voiced signal + 8000 Hz band limited random noise 1.0 s +

Pause till end of file

Signal level (ch2): -14.7 dBm0 (corresponds to approx. -16.0 dBm0 for a 350 ms CSS considering 101 ms Pause) from 0.5s to 1.544s for 4-k FFT, Hanning window,

75 % overlap in frequency range of 100 to 8000 Hz

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.1: 0.00 dB

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

Rotation Delta A 0.0 °

MECRP Delta Ye	0.0 mm	Rotation Delta C	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-4.3 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Range start	550.00 ms	Range length	1950.00 ms
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	131072	Overlap	0 %
Window function.	Hanning	Smooth	Off
Delayed channel	None		
Valid range start	-1228.79 ms	Valid range end	1228.81 ms

**Special Features**

Show source signal Source ch.2 Store to variable D\_RCV\_WB

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------




**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.1a Receive Volume Control Performance 8N WB**

TIA-5050 (2018-01) \ Measurements \ Wideband

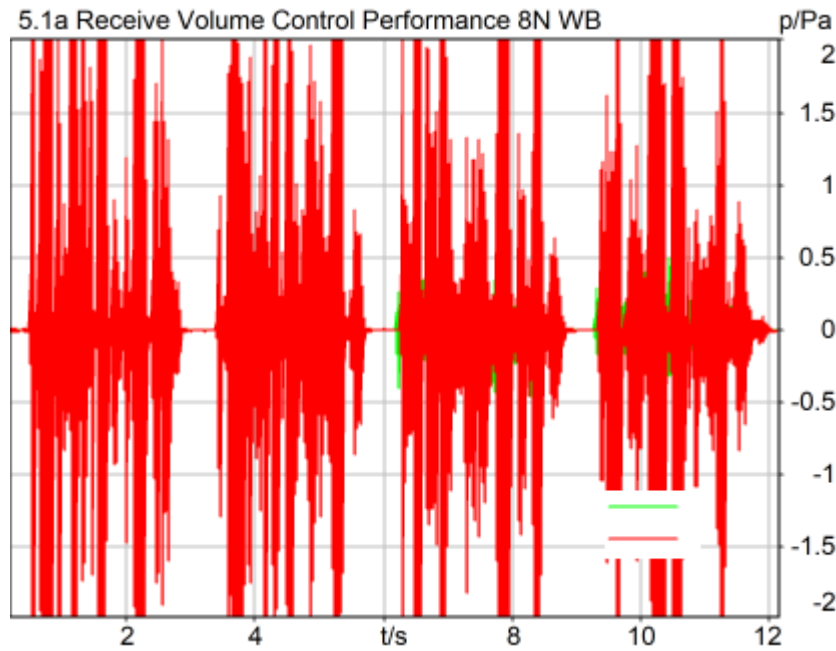

**Correction**

X - 70

Speech Level RCV: 87.16 dB[SPL], Act.: 84.61%  
Corrected Speech Level: 17.16 dB[SPL] Not Ok

**Not Ok**

2024/1/16 16:16 ACQUA 5.1.200

**Limits**

	<b>lower</b>
Run 1	18.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.0 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Super Wideband		
	15.90 dB		

**Special Features**

Show source signal Source ch.2  
Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.1b Receive Volume Control Performance 2N WB

TIA-5050 (2018-01) \ Measurements \ Wideband

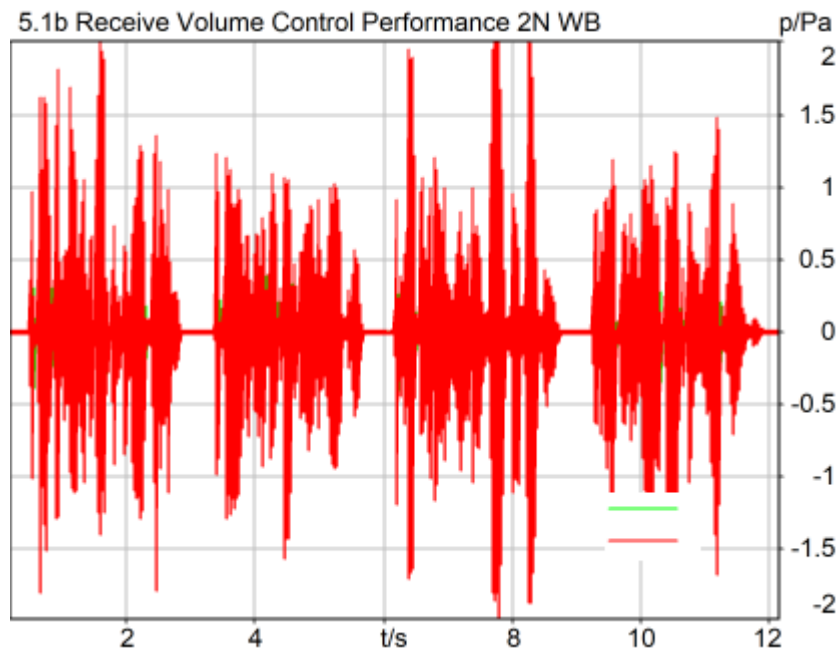

### Correction

X - 70

Speech Level RCV: 81.62 dB[SPL], Act.: 85.88%

Corrected Speech Level: 11.62 dB[SPL] Ok

### Ok

2024/1/22 19:35 ACQUA 5.1.200

### Limits

	<b>lower</b>
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	200.00 ms	Range length	12000.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
Bandpass filter	Super Wideband	Margin (15.9dB nom)	
15.90 dB			

**Special Features**

Show source signal Source ch.2  
Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
----------	----------	--------	----------

HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

## 5.2 RCV Distortion and Noise - 250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 31.50 dB (2.66%) Ok

Ok

2024/1/21 17:23 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_250hz\_sr20dbm0\_v02.dat.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	190.0 Hz
Stimulus min.	190.0 Hz	Stimulus max.	315.0 Hz
Analysis min.	20.0 Hz	Analysis max.	185.0 Hz
Analysis (2) min.	320.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_250Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 315 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 32.16 dB (2.47%) Ok

**Ok**

2024/1/21 17:24 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_315hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	245.0 Hz
Stimulus min.	245.0 Hz	Stimulus max.	390.0 Hz
Analysis min.	20.0 Hz	Analysis max.	240.0 Hz
Analysis (2) min.	395.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_315Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------



Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 400 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

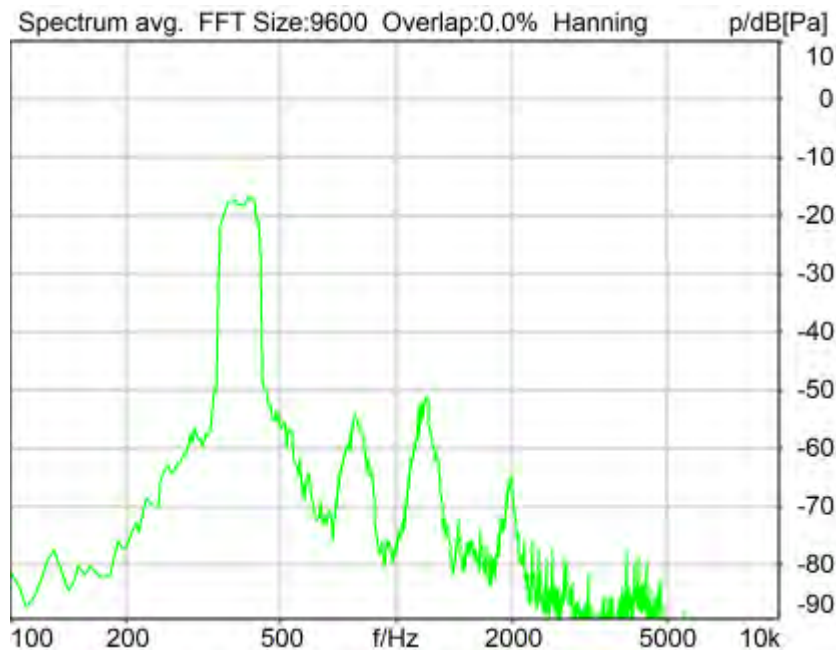

Distortion (Noise) RCV (packed): 32.00 dB (2.51%) Ok

Ok

2024/1/21 17:24 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**

Level adj. Ch1      -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1:      HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable      RCVWB10\_400Hz

**Hardware Config Settings**

Used Setting      HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
labCORE Routing  
Out Channel 1 ->      Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker

Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 500 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

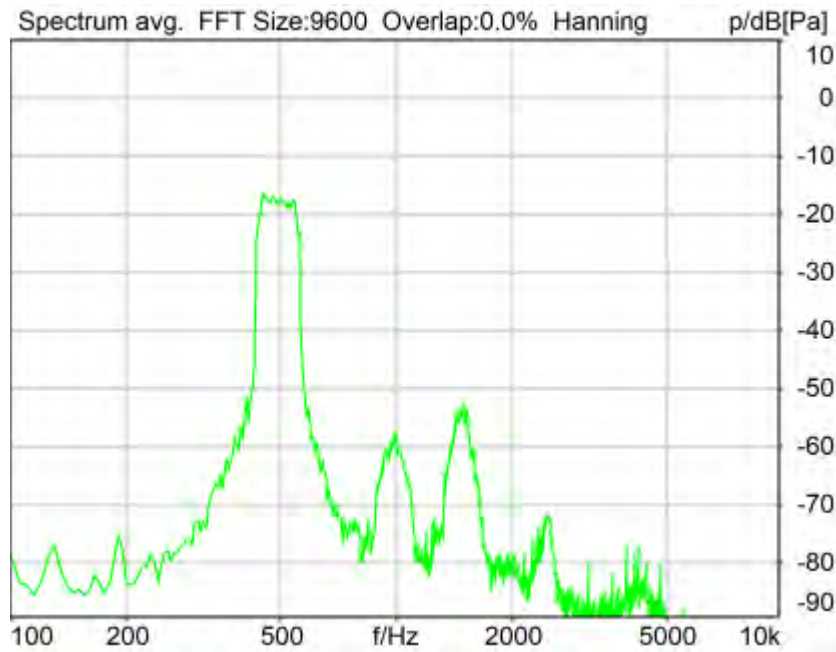

Distortion (Noise) RCV (packed): 33.17 dB (2.20%) Ok

**Ok**

2024/1/21 17:25 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	595.0 Hz
Stimulus min.	410.0 Hz	Analysis max.	405.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	600.0 Hz		

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_500Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1      -40.00 dB                      Gain out 2      0.00 dB  
 Gain in 1       0.00 dB                                  Gain in 2       0.00 dB  
 Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 630 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 35.16 dB (1.75%) Ok

**Ok**

2024/1/21 17:25 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat

Level adj. Ch1      -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	525.0 Hz
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis min.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_630Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

Polarisation Voltage 200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass  
-----


Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 800 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

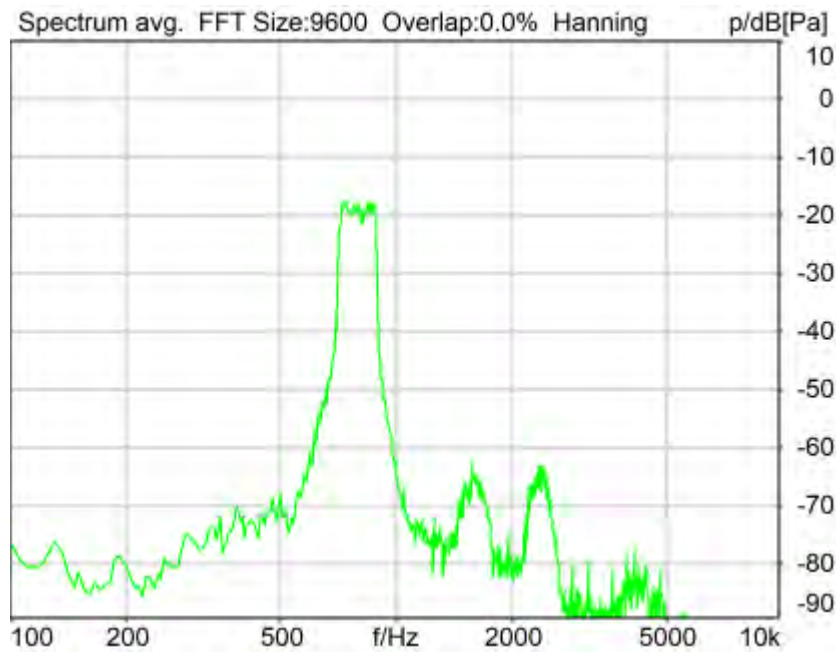

Distortion (Noise) RCV (packed): 35.78 dB (1.63%) Ok

**Ok**

2024/1/21 17:25 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting    off



Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_800Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

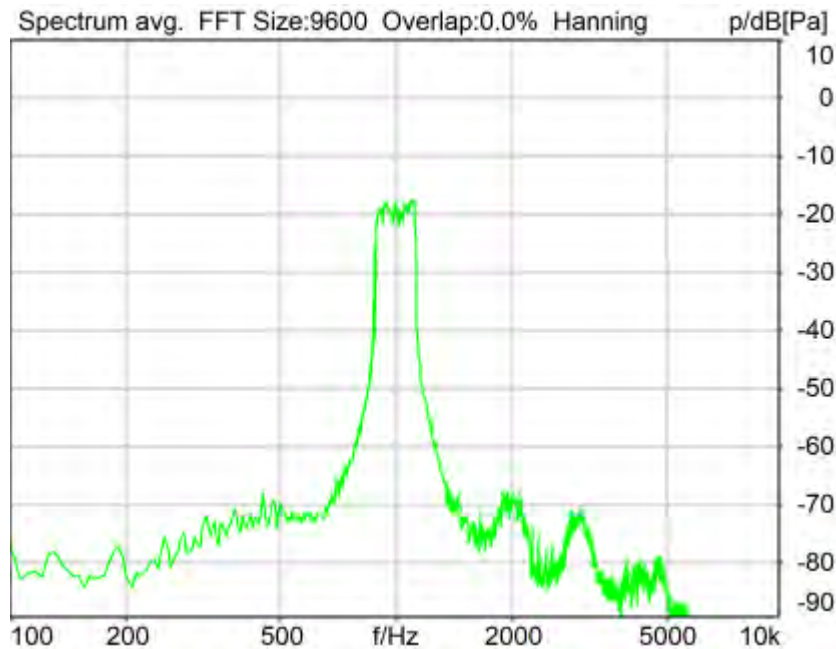

Distortion (Noise) RCV (packed): 34.85 dB (1.81%) Ok

**Ok**

2024/1/21 17:26 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
labCORE Routing  
Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker

Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 1250 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

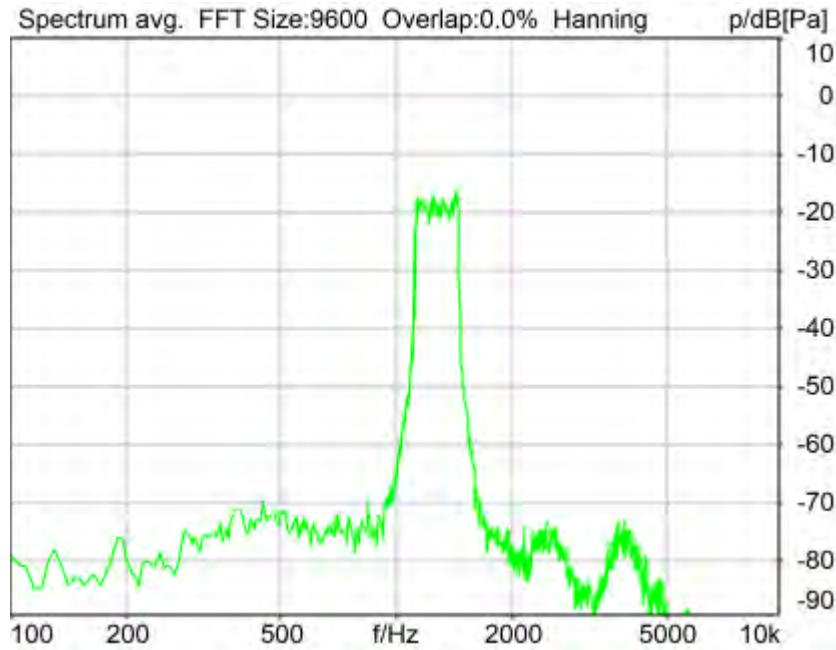

Distortion (Noise) RCV (packed): 28.31 dB (3.84%) Ok

**Ok**

2024/1/21 17:26 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off		
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1250Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1      -40.00 dB                      Gain out 2      0.00 dB  
 Gain in 1       0.00 dB                                  Gain in 2       0.00 dB  
 Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 1600 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

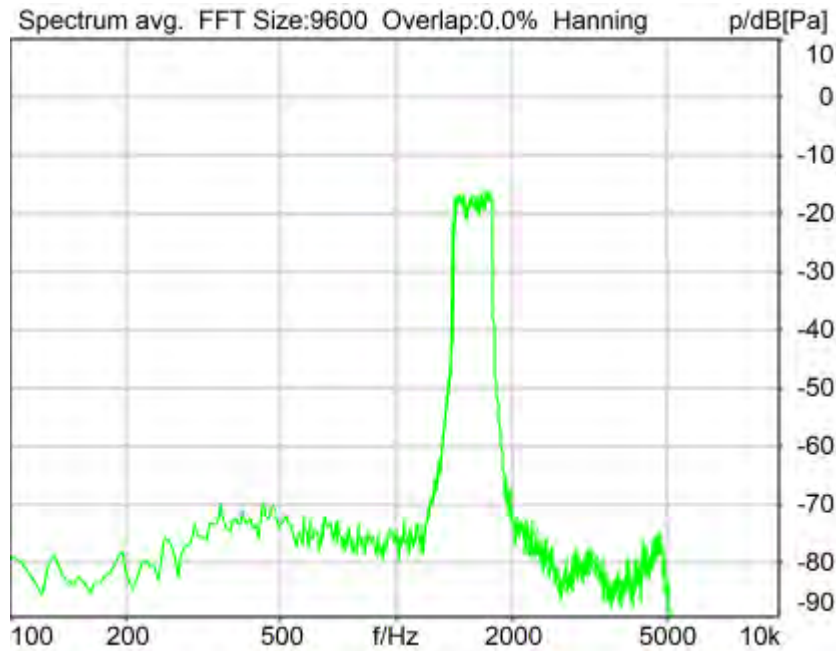

Distortion (Noise) RCV (packed): 39.60 dB (1.05%) Ok

**Ok**

2024/1/21 17:27 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat

Level adj. Ch1      -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.1 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	1375.0 Hz
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis min.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1600Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
-------	--------------------------	----------	-----



Polarisation Voltage 200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass  
-----


Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 2000 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

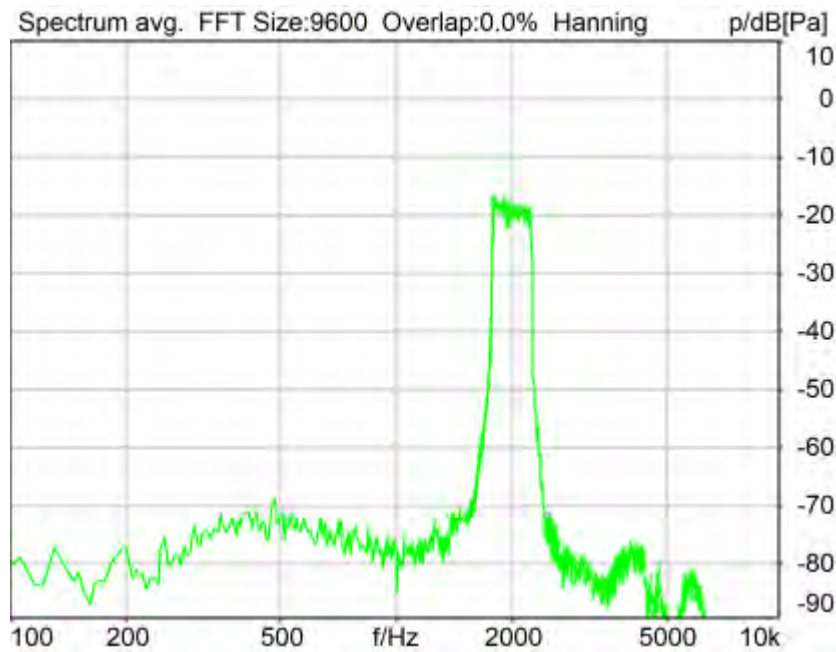

Distortion (Noise) RCV (packed): 38.11 dB (1.24%) Ok

**Ok**

2024/1/21 17:27 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting    off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.1 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

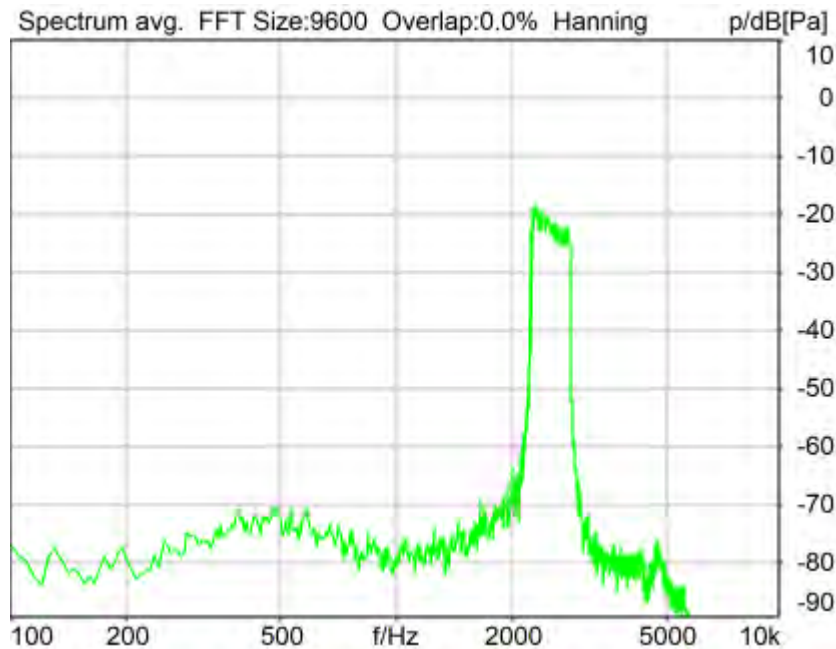

Distortion (Noise) RCV (packed): 38.92 dB (1.13%) Ok

**Ok**

2024/1/21 17:28 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.1 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2500Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
labCORE Routing  
Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker

Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 3150 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

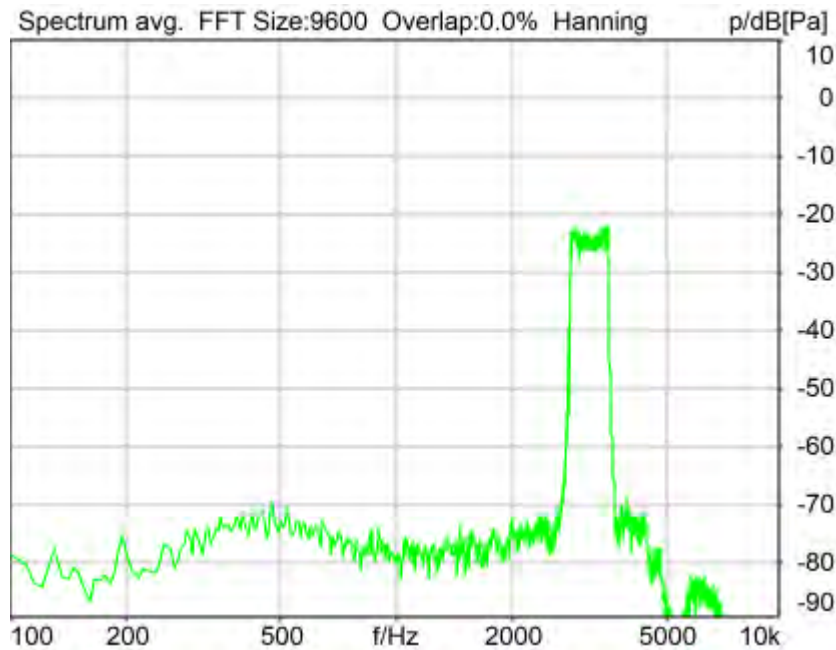

Distortion (Noise) RCV (packed): 38.93 dB (1.13%) Ok

**Ok**

2024/1/21 17:28 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	3585.0 Hz
Stimulus min.	2785.0 Hz	Analysis max.	2780.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	3590.0 Hz		

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_3150Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1      -40.00 dB                      Gain out 2      0.00 dB  
Gain in 1        0.00 dB                                      Gain in 2        0.00 dB  
Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 4000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

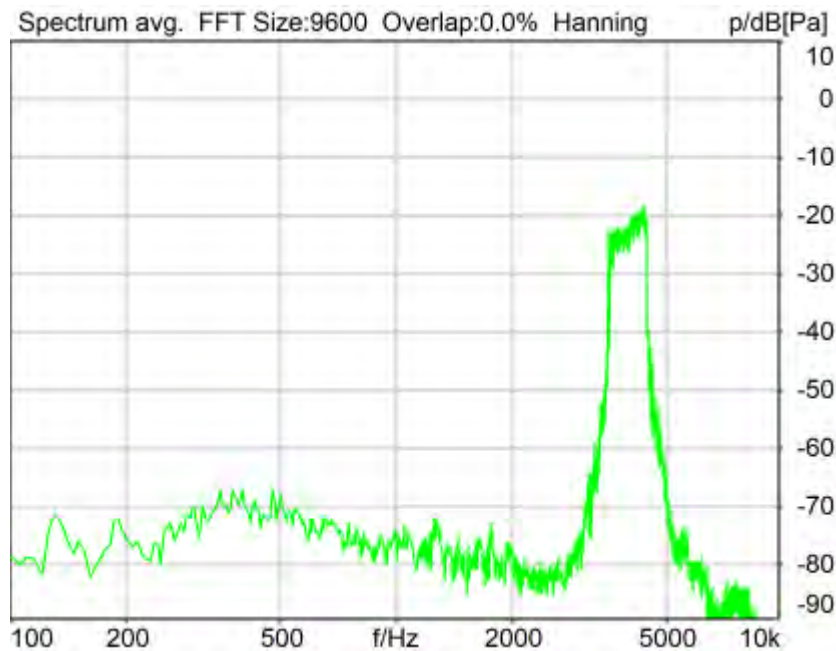

Distortion (Noise) RCV (packed): 29.44 dB (3.37%) Ok

**Ok**

2024/1/21 17:28 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_4000hz\_sr20dbm0\_v02.dat

Level adj. Ch1      -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))



**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.1 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	3515.0 Hz
Stimulus min.	3515.0 Hz	Stimulus max.	4500.0 Hz
Analysis min.	20.0 Hz	Analysis min.	3510.0 Hz
Analysis (2) min.	4505.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_4000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

Polarisation Voltage 200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass  
-----


Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 5000 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

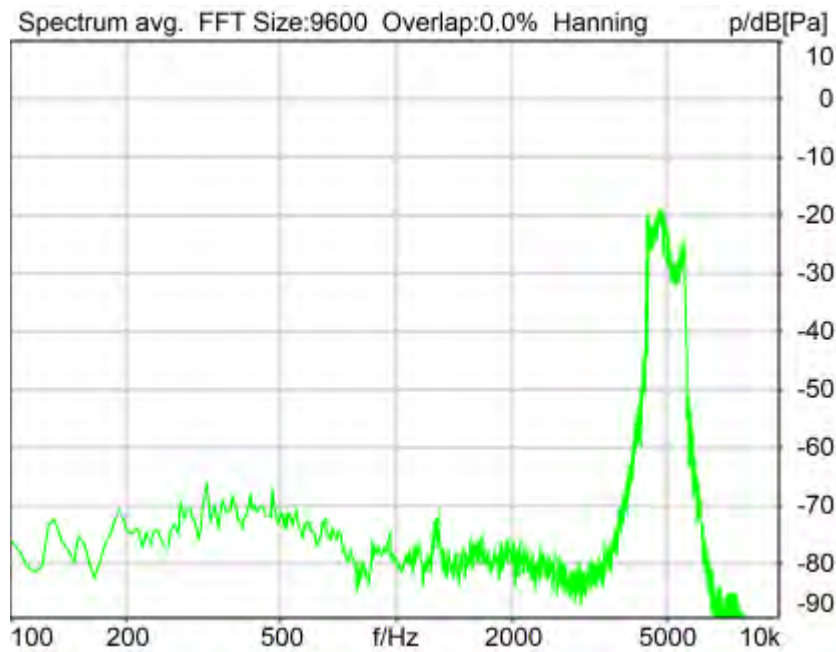

Distortion (Noise) RCV (packed): 30.97 dB (2.83%) Ok

**Ok**

2024/1/21 17:29 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting    off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_5000hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.3 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.1 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	4430.0 Hz	Stimulus max.	5660.0 Hz
Analysis min.	20.0 Hz	Analysis max.	4425.0 Hz
Analysis (2) min.	5665.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 158.9000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_5000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----

BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name 60020095 Serial 60020095  
HIB Mode Mobile Measurement Impedance 32 Ohm  
Gain out 1 -40.00 dB Gain out 2 0.00 dB  
Gain in 1 0.00 dB Gain in 2 0.00 dB  
Mic 1 Power Supply Off Mic 2 Power Supply Off

## Report - Receive Distortion and Noise (Conversational Gain)

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

Region	Frequency	SDNR
1	250Hz	31.50 dB
2	315Hz	32.16 dB
3	400Hz	32.00 dB
4	500Hz	33.17 dB
5	630Hz	35.16 dB
6	800Hz	35.78 dB
7	1000Hz	34.85 dB
8	1250Hz	28.31 dB
9	1600Hz	39.60 dB
10	2000Hz	38.11 dB
11	2500Hz	38.92 dB
12	3150Hz	38.93 dB
13	4000Hz	29.44 dB
14	5000Hz	30.97 dB


All SDNRs were greater than 20.0 dB, requirement was met.

Smallest SDNR was 28.31dB at 1250Hz.

2024/1/21 17:29 ACQUA

## 5.2 RCV Distortion and Noise - 250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

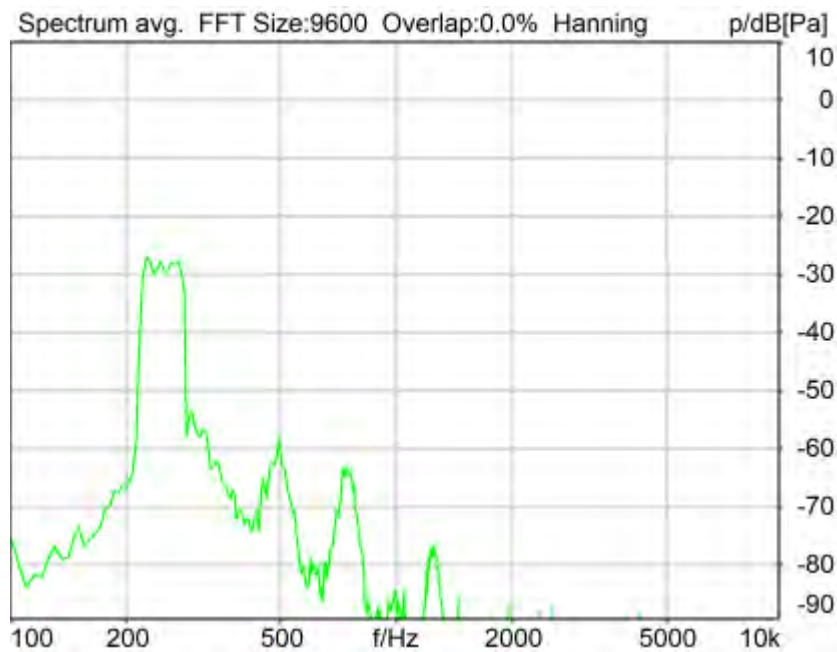

Distortion (Noise) RCV (packed): 32.21 dB (2.45%) Ok

**Ok**

2024/1/16 16:40 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_250hz\_sr20dbm0\_v02.dat.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

Rotation Delta A 0.0 °

MECRP Delta Ye	0.0 mm	Rotation Delta C	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.7 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	190.0 Hz	Stimulus max.	315.0 Hz
Analysis min.	20.0 Hz	Analysis max.	185.0 Hz
Analysis (2) min.	320.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analogue In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analogue Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 315 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

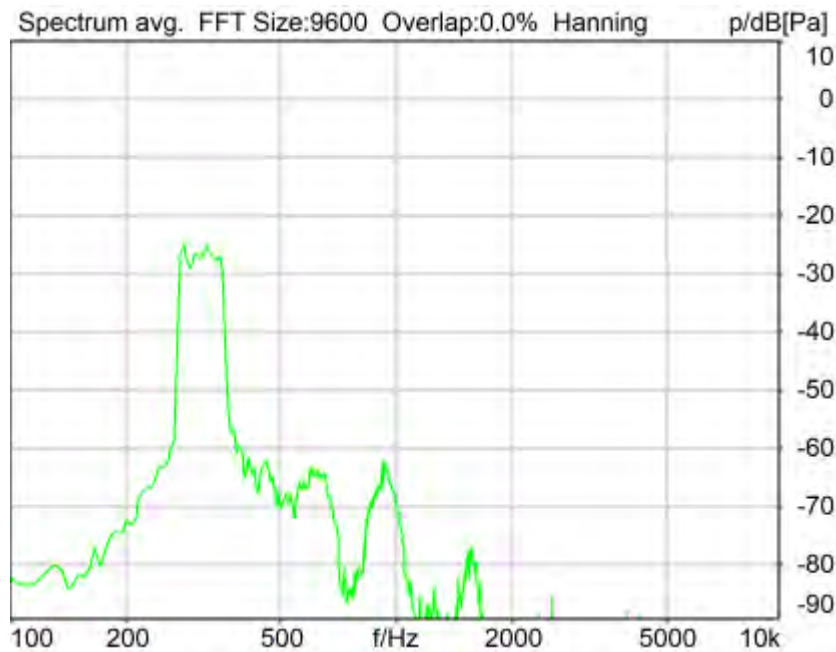

Distortion (Noise) RCV (packed): 33.05 dB (2.23%) Ok

**Ok**

2024/1/16 16:41 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_315hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.7 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieeee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	245.0 Hz	Stimulus max.	390.0 Hz
Analysis min.	20.0 Hz	Analysis max.	240.0 Hz
Analysis (2) min.	395.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_315Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V



Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name 60020095 Serial 60020095  
HIB Mode Mobile Measurement Impedance 32 Ohm  
Gain out 1 -40.00 dB Gain out 2 0.00 dB  
Gain in 1 0.00 dB Gain in 2 0.00 dB  
Mic 1 Power Supply Off Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 400 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

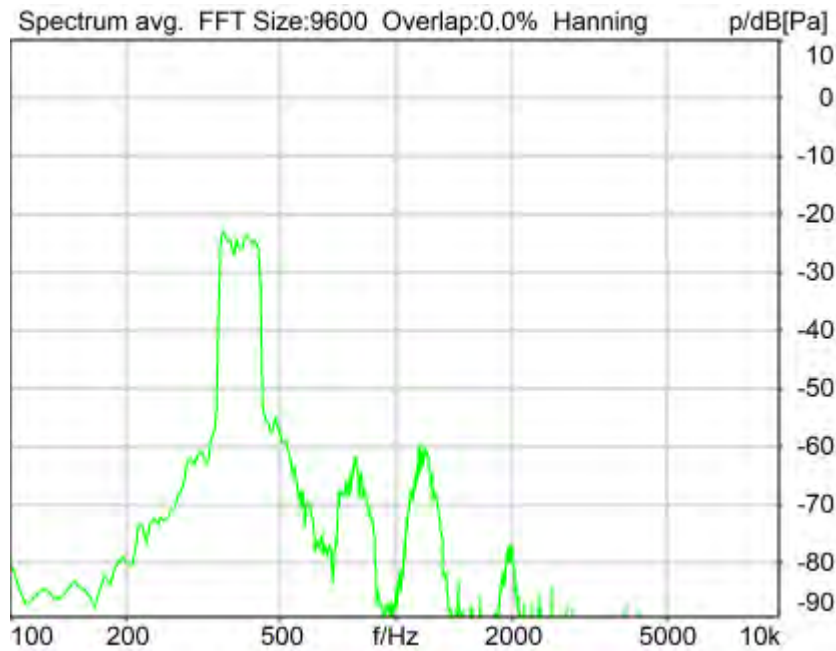

Distortion (Noise) RCV (packed): 32.61 dB (2.34%) Ok

Ok

2024/1/16 16:41 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.7 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode      Bypass


-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.          12306613                      Pinna Type          Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 500 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

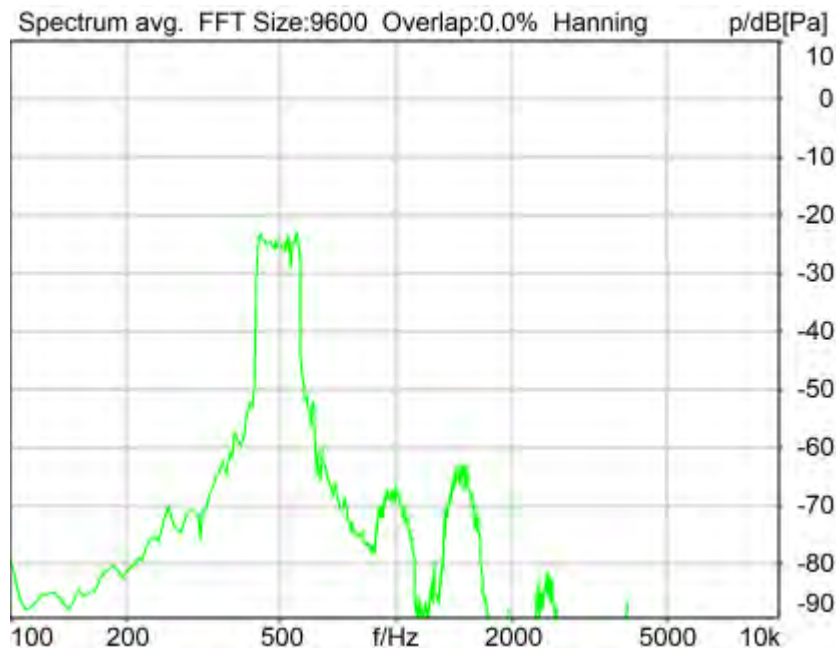

Distortion (Noise) RCV (packed): 33.21 dB (2.19%) Ok

**Ok**

2024/1/16 16:42 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.7 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	410.0 Hz
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 630 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

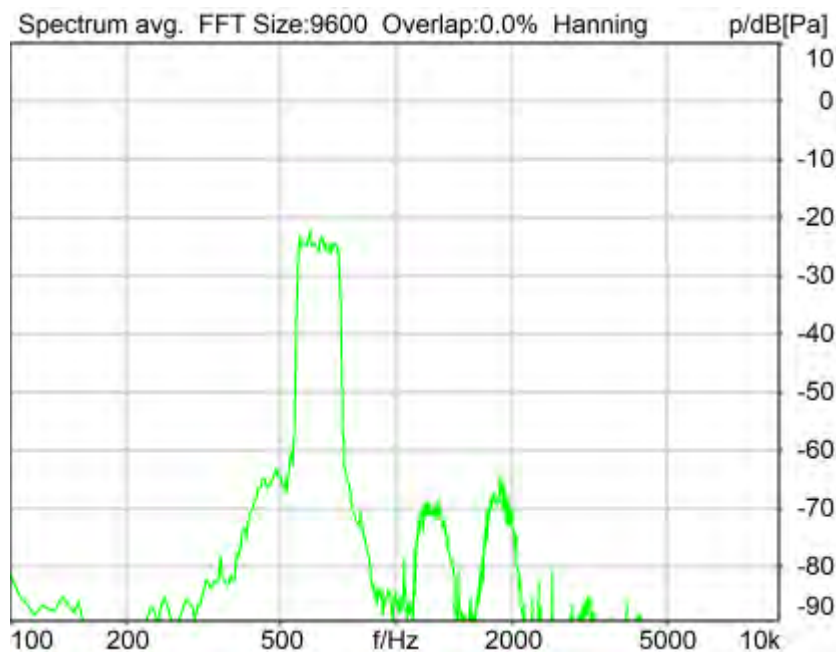

Distortion (Noise) RCV (packed): 37.68 dB (1.31%) Ok

**Ok**

2024/1/16 16:42 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.7 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	745.0 Hz
Stimulus min.	525.0 Hz	Analysis max.	520.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	750.0 Hz		

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))

Store to variable RCVWB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 800 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

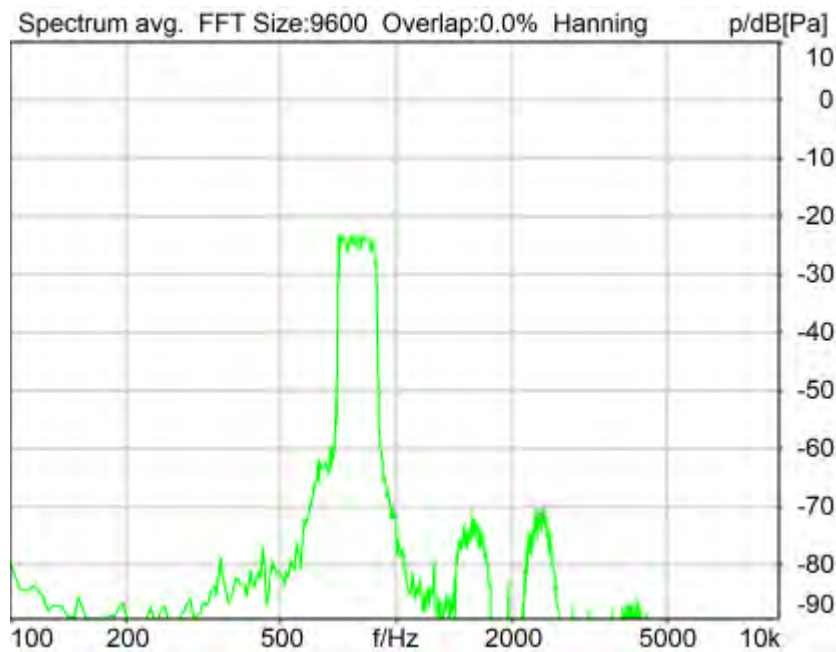

Distortion (Noise) RCV (packed): 39.99 dB (1.00%) Ok

**Ok**

2024/1/16 16:43 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.7 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 1.9 N



**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off		
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

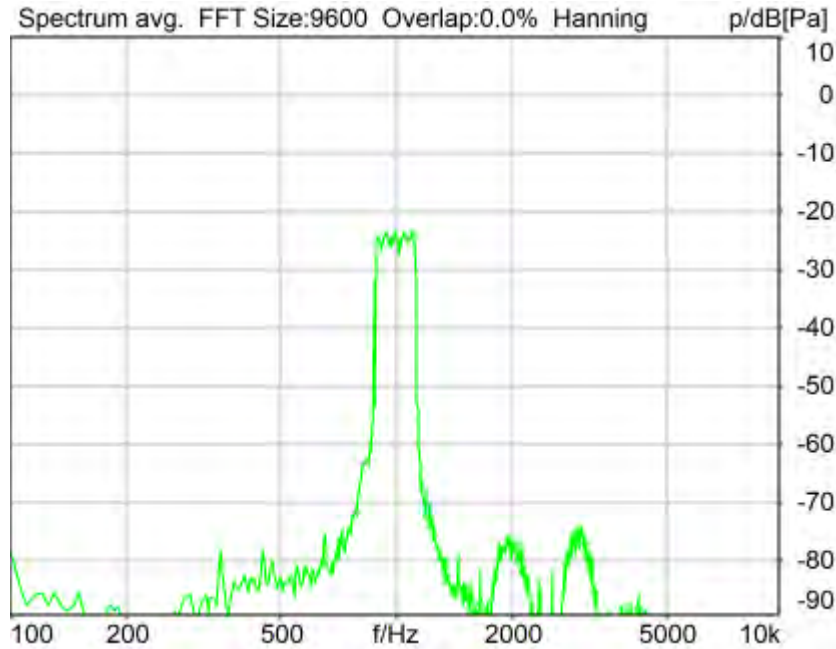

Distortion (Noise) RCV (packed): 41.82 dB (0.81%) Ok

Ok

2024/1/16 16:43 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
		Rotation Delta C	0.0 °

MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.7 mm	Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	855.0 Hz
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 1250 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

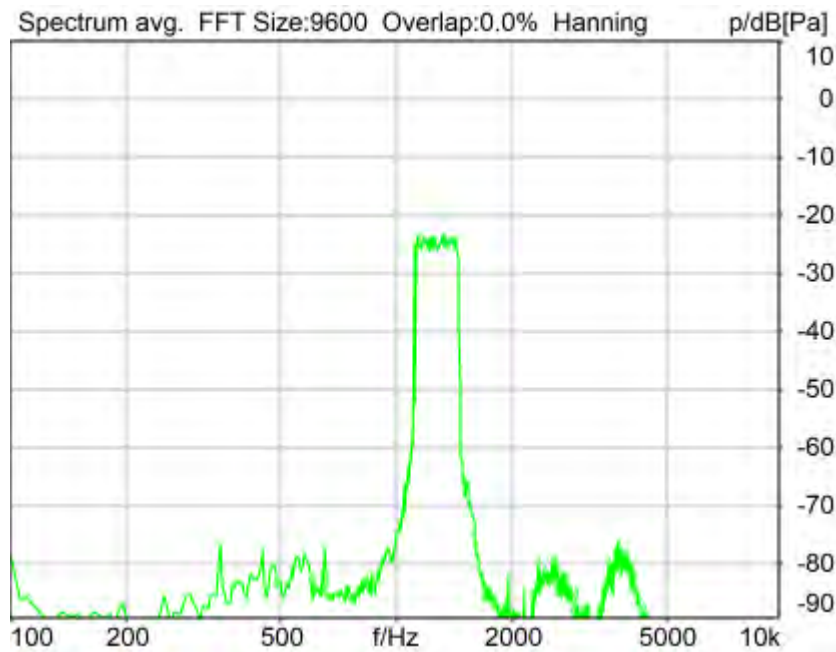

Distortion (Noise) RCV (packed): 31.79 dB (2.57%) Ok

**Ok**

2024/1/16 16:44 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.7 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name 60020095 Serial 60020095  
HIB Mode Mobile Measurement Impedance 32 Ohm  
Gain out 1 -40.00 dB Gain out 2 0.00 dB  
Gain in 1 0.00 dB Gain in 2 0.00 dB  
Mic 1 Power Supply Off Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 1600 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

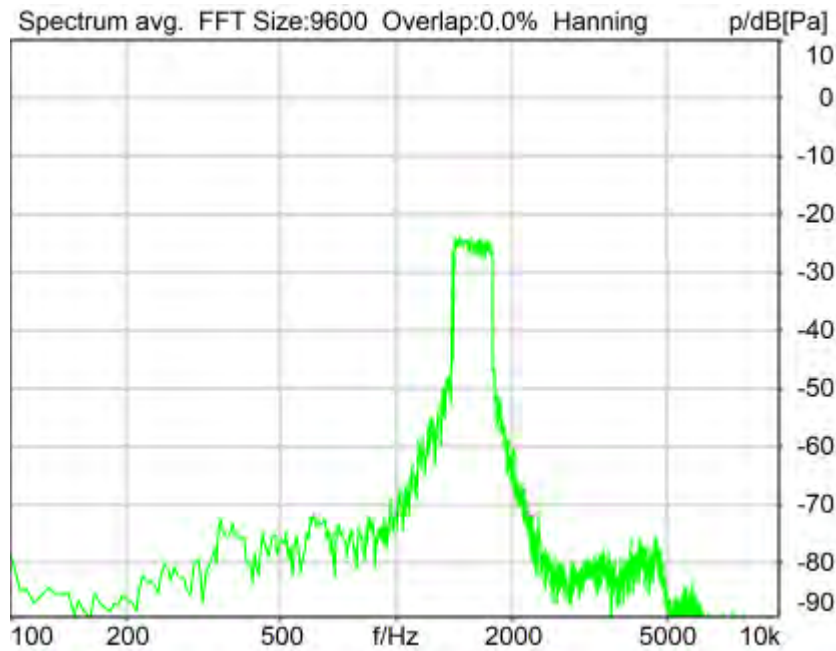

Distortion (Noise) RCV (packed): 28.46 dB (3.78%) Ok

Ok

2024/1/16 16:44 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.7 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode      Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.          12306613                      Pinna Type          Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 2000 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N



Distortion (Noise) RCV (packed): 27.44 dB (4.25%) Ok

**Ok**

2024/1/16 16:45 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor



**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.7 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	1745.0 Hz
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode      Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

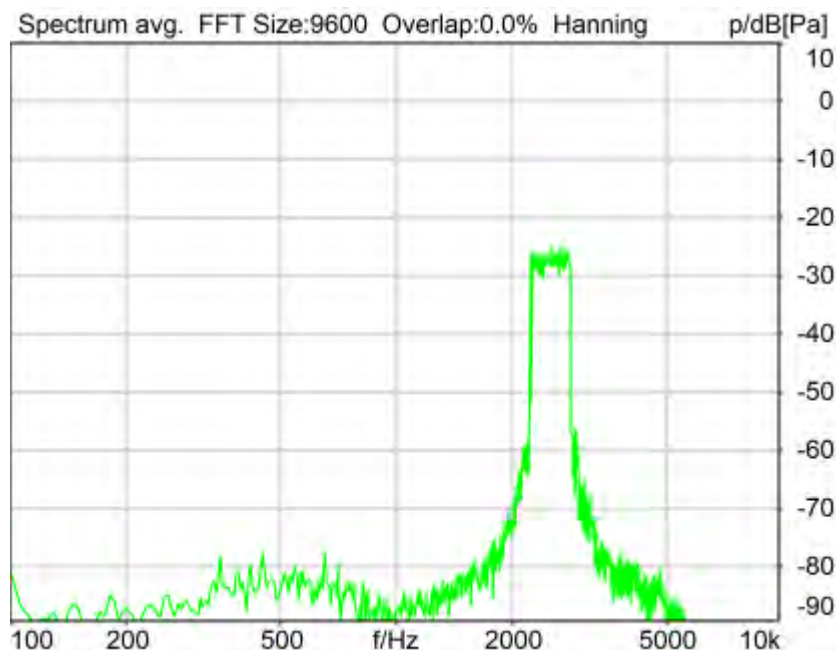

Distortion (Noise) RCV (packed): 35.53 dB (1.67%) Ok

**Ok**

2024/1/16 16:45 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.7 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	2855.0 Hz
Stimulus min.	2205.0 Hz	Analysis max.	2200.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	2860.0 Hz		

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))

Store to variable RCVWB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 3150 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

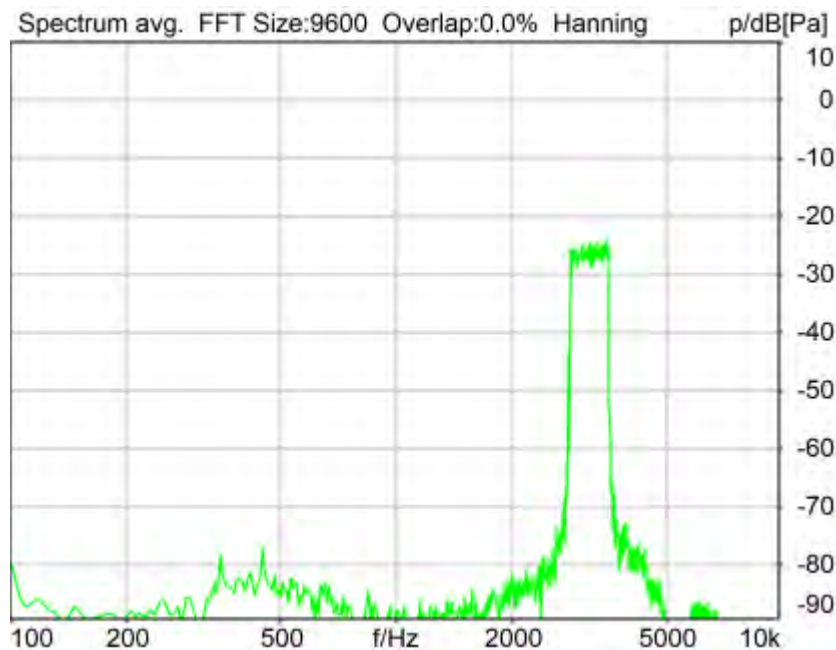

Distortion (Noise) RCV (packed): 44.10 dB (0.62%) Ok

**Ok**

2024/1/16 16:45 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.7 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off		
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 4000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

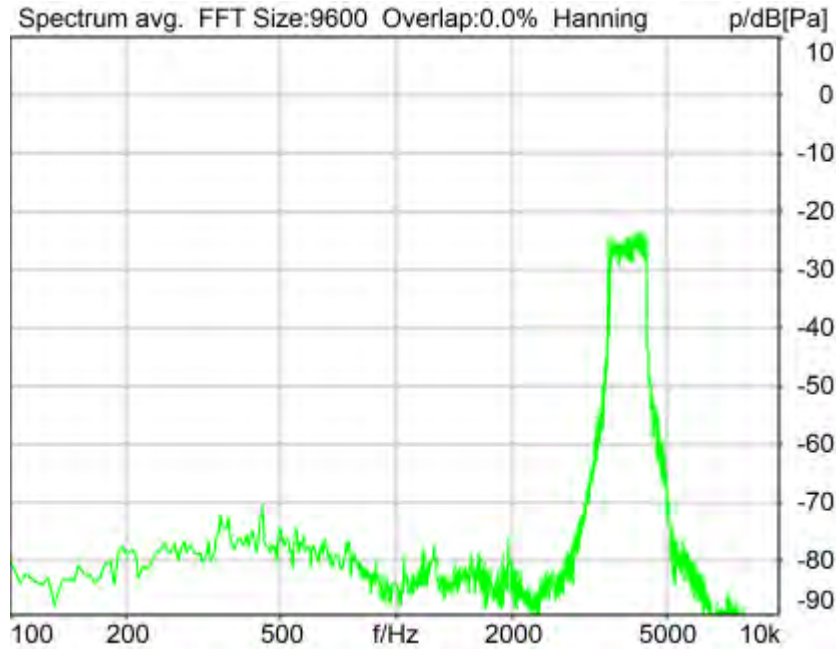

Distortion (Noise) RCV (packed): 27.56 dB (4.19%) Ok

Ok

2024/1/16 16:46 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_4000hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye 0.0 mm      Rotation Delta A 0.0 °  
Rotation Delta C 0.0 °

MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.7 mm	Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	3515.0 Hz
Stimulus min.	3515.0 Hz	Stimulus max.	4500.0 Hz
Analysis min.	20.0 Hz	Analysis max.	3510.0 Hz
Analysis (2) min.	4505.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_4000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**




Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 5000 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

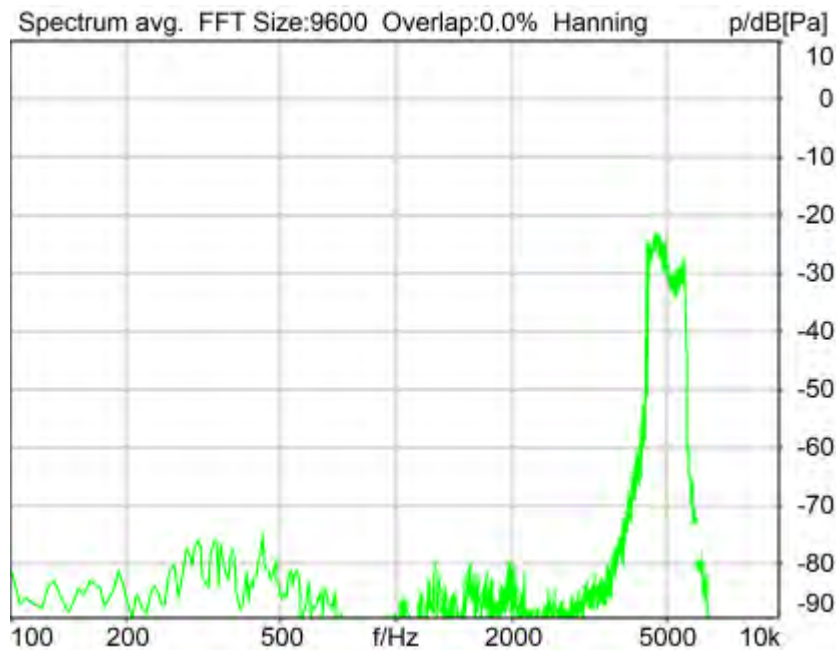

Distortion (Noise) RCV (packed): 35.10 dB (1.76%) Ok

**Ok**

2024/1/16 16:46 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_5000hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.7 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	4430.0 Hz	Stimulus max.	5660.0 Hz
Analysis min.	20.0 Hz	Analysis max.	4425.0 Hz
Analysis (2) min.	5665.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_5000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name 60020095 Serial 60020095  
HIB Mode Mobile Measurement Impedance 32 Ohm  
Gain out 1 -40.00 dB Gain out 2 0.00 dB  
Gain in 1 0.00 dB Gain in 2 0.00 dB  
Mic 1 Power Supply Off Mic 2 Power Supply Off

## Report - Receive Distortion and Noise (Conversational Gain)

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N


Region	Frequency	SDNR
1	250Hz	32.21 dB
2	315Hz	33.05 dB
3	400Hz	32.61 dB
4	500Hz	33.21 dB
5	630Hz	37.68 dB
6	800Hz	39.99 dB
7	1000Hz	41.82 dB
8	1250Hz	31.79 dB
9	1600Hz	28.46 dB
10	2000Hz	27.44 dB
11	2500Hz	35.53 dB
12	3150Hz	44.10 dB
13	4000Hz	27.56 dB
14	5000Hz	35.10 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 27.44dB at 2000Hz.

2024/1/16 16:46 ACQUA

### 5.3 Frequency Response 8N FF

TIA-5050 (2018-01) \ Measurements \ Wideband

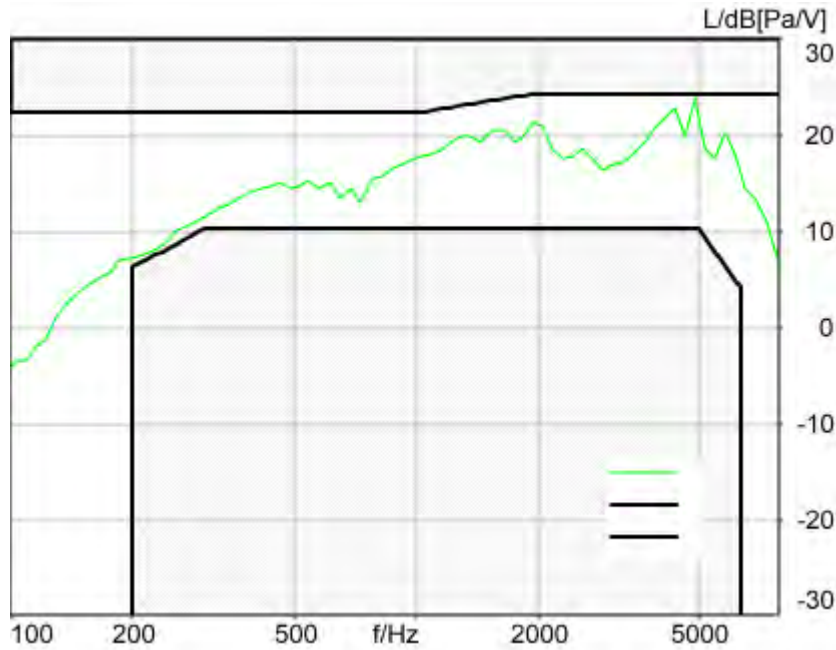

Absolute minimal distance  
0.59 dB at 4870.0 Hz Ok

**Ok**

2024/1/16 16:23 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.0 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

### 5.3 Frequency Response 8N DF

TIA-5050 (2018-01) \ Measurements \ Wideband

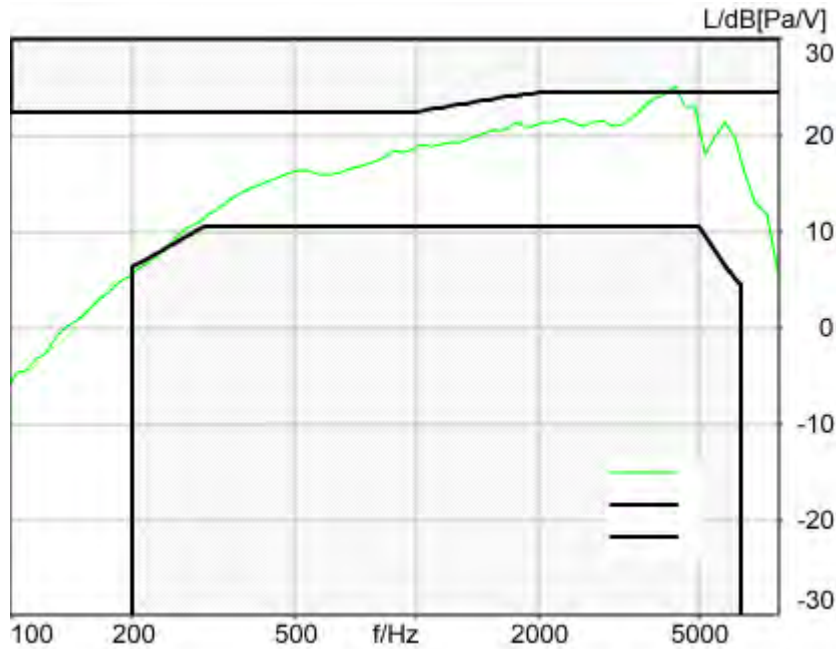

Absolute minimal distance  
-0.65 dB at 205.7 Hz Not Ok

**Not Ok**

2024/1/16 16:24 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the end of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

		Rotation Delta A	0.0 °
MECRP Delta Ye	0.0 mm	Rotation Delta C	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-4.0 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.3 Frequency Response 2N FF

TIA-5050 (2018-01) \ Measurements \ Wideband

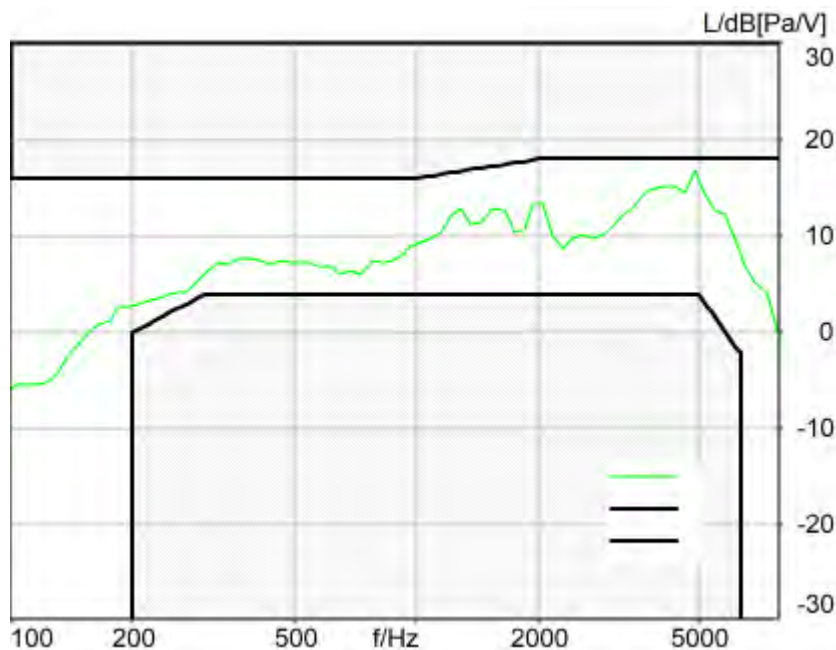



Absolute minimal distance

1.22 dB at 4870.0 Hz Ok

**Ok**

2024/1/16 16:47 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB

WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +

Pause till end of file

Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

		Rotation Delta A	0.0 °
MECRP Delta Ye	0.0 mm	Rotation Delta C	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.7 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave		
Method	FFT		

FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.3 Frequency Response 2N DF**

TIA-5050 (2018-01) \ Measurements \ Wideband

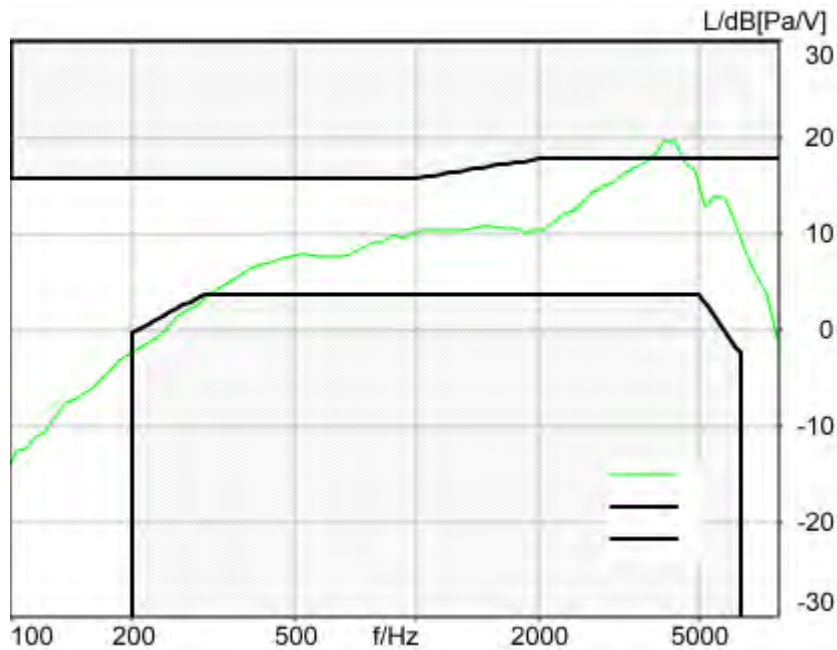

Absolute minimal distance  
-1.97 dB at 4119.5 Hz Not Ok

**Not Ok**

2024/1/16 16:48 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.7 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2df_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 106.5000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

BEQ Settings (BEQ Filter 1)

Block mode        Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## Measurement Protocol

Measurement Object	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
Project	HMD_2322#N159V

Project	TIA-5050 (2018-01)
Report Generation Date	2024/2/6 10:23
Responsible Person	audio

**Status Overview**

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay NB	Done	Delay (Cross) [ms]	104.1	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.1a Receive Volume Control Performance 8N NB	Ok	Corrected Speech Level [dB[SPL]]	18.01	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.1b Receive Volume Control Performance 2N NB	Ok	Corrected Speech Level [dB[SPL]]	12.97	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.31	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.74	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 630 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	25.68	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	33.36	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	40.06	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	31.98	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	45.97	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	44.54	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	38.50	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	37.43	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 630Hz)	25.68	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	30.34	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	31.29	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise -	Ok	Distortion (Noise) [dB],	32.23	LTE Band

630 Hz NB		0.0 dB		5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	36.82	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	39.28	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	32.08	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	43.81	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	42.34	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	44.94	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	44.62	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 400Hz)	30.34	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.3 Frequency Response 8N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 1647.8 Hz	0.45	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.3 Frequency Response 8N DF HANB	Ok	Min. dist. to tolerance scheme [dB], 1285.9 Hz	1.25	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525
5.3 Frequency Response 2N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 1285.9 Hz	0.28	LTE Band 5_10QPSK_50RB_0_EVS NB 24.4_CH20525




---

Overall Receive Delay NB	5
5.1a Receive Volume Control Performance 8N NB	7
5.1b Receive Volume Control Performance 2N NB	9
5.2 RCV Distortion and Noise - 400 Hz NB	11
5.2 RCV Distortion and Noise - 500 Hz NB	13
5.2 RCV Distortion and Noise - 630 Hz NB	15
5.2 RCV Distortion and Noise - 800 Hz NB	18
5.2 RCV Distortion and Noise - 1000 Hz NB	20
5.2 RCV Distortion and Noise - 1250 Hz NB	22
5.2 RCV Distortion and Noise - 1600 Hz NB	24
5.2 RCV Distortion and Noise - 2000 Hz NB	27
5.2 RCV Distortion and Noise - 2500 Hz NB	29
5.2 RCV Distortion and Noise - 3150 Hz NB	31
Report - Receive Distortion and Noise (Conversational Gain)	33
5.2 RCV Distortion and Noise - 400 Hz NB	34
5.2 RCV Distortion and Noise - 500 Hz NB	36
5.2 RCV Distortion and Noise - 630 Hz NB	38
5.2 RCV Distortion and Noise - 800 Hz NB	40
5.2 RCV Distortion and Noise - 1000 Hz NB	43
5.2 RCV Distortion and Noise - 1250 Hz NB	45
5.2 RCV Distortion and Noise - 1600 Hz NB	47
5.2 RCV Distortion and Noise - 2000 Hz NB	49
5.2 RCV Distortion and Noise - 2500 Hz NB	52
5.2 RCV Distortion and Noise - 3150 Hz NB	54
Report - Receive Distortion and Noise (Conversational Gain)	56
5.3 Frequency Response 8N FF HANB	57
5.3 Frequency Response 8N DF HANB	59
5.3 Frequency Response 2N FF HANB	61

## Overall Receive Delay NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ Preparation - Delay measurement

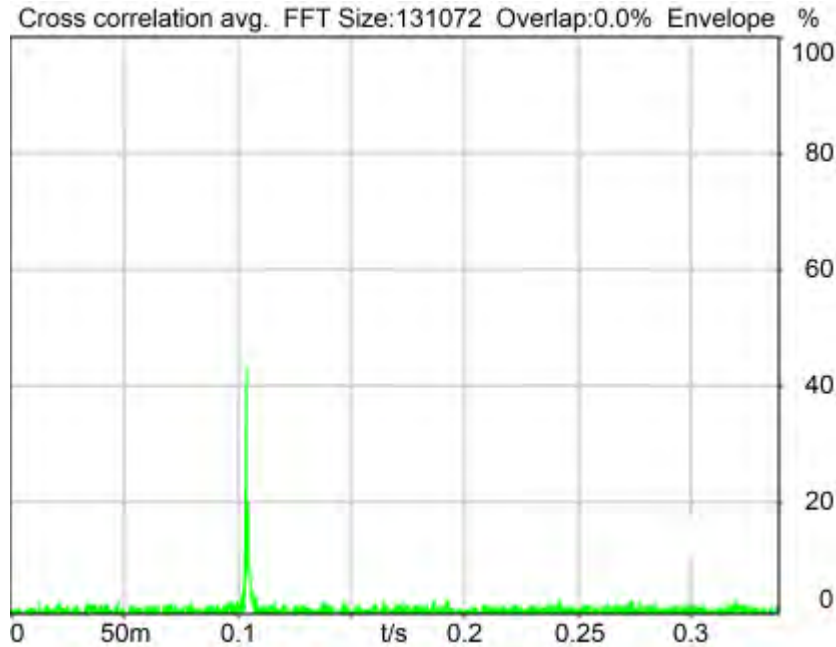

Delay (Cross): 104.1 ms

2024/1/16 14:14 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Source: cssnb1b\_r1s.dat

Level adj. Ch1 -90.0 dB

CSSnb1b\_R1s.dat - CS-signal with special 1s random noise

NARROWBAND Composite Source Signal RCV P.501 (1 burst) at Channel 2

Pause 0.5 s +

voiced signal + 4000 Hz band limited random noise 1.0 s +

Pause till end of file

Signal level (ch2): -14.7 dBm0 (corresponds to approx. -16.0 dBm0 for a 350 ms CSS considering 101 ms Pause) from 0.5s to 1.544s for 4-k FFT, Hanning window,

75 % overlap in frequency range of 100 to 4000 Hz

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.1: 0.00 dB

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Range start	550.00 ms	Range length	1950.00 ms
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation	Overlap	0 %
FFT size	131072	Smooth	Off
Window function.	Hanning		
Delayed channel	None		
Valid range start	-1228.79 ms	Valid range end	1228.81 ms

**Special Features**

Show source signal Source ch.2 Store to variable D\_RCV\_NB

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.1a Receive Volume Control Performance 8N NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband

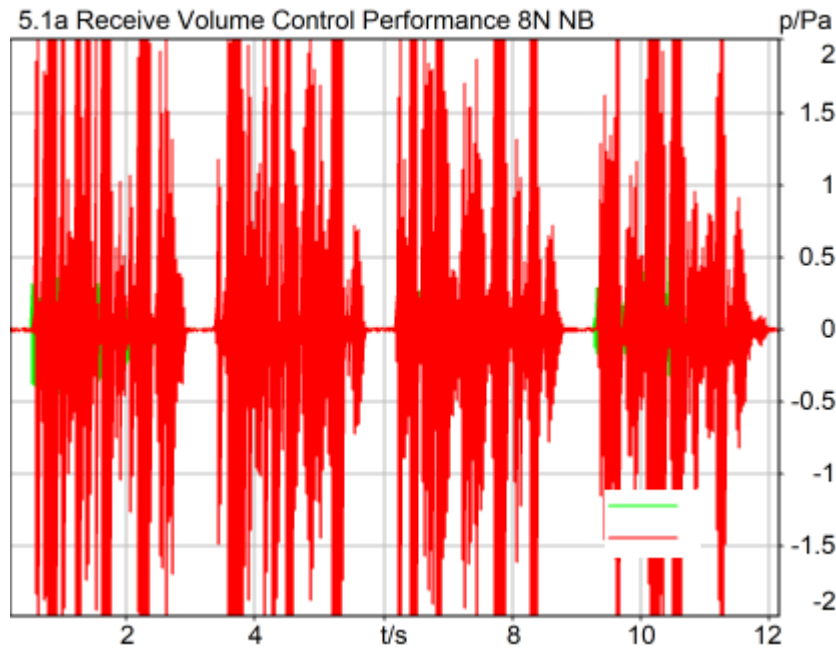

**Correction**

X - 70

Speech Level RCV: 88.01 dB[SPL], Act.: 84.57%

Corrected Speech Level: 18.01 dB[SPL] Ok

**Ok**

2024/1/16 14:17 ACQUA 5.1.200

**Limits**

	<b>lower</b>
Run 1	18.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Narrow Band		
15.90 dB			

**Special Features**

Show source signal Source ch.2  
Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name 60020095 Serial 60020095  
HIB Mode Mobile Measurement Impedance 32 Ohm  
Gain out 1 -40.00 dB Gain out 2 0.00 dB  
Gain in 1 0.00 dB Gain in 2 0.00 dB  
Mic 1 Power Supply Off Mic 2 Power Supply Off

## 5.1b Receive Volume Control Performance 2N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

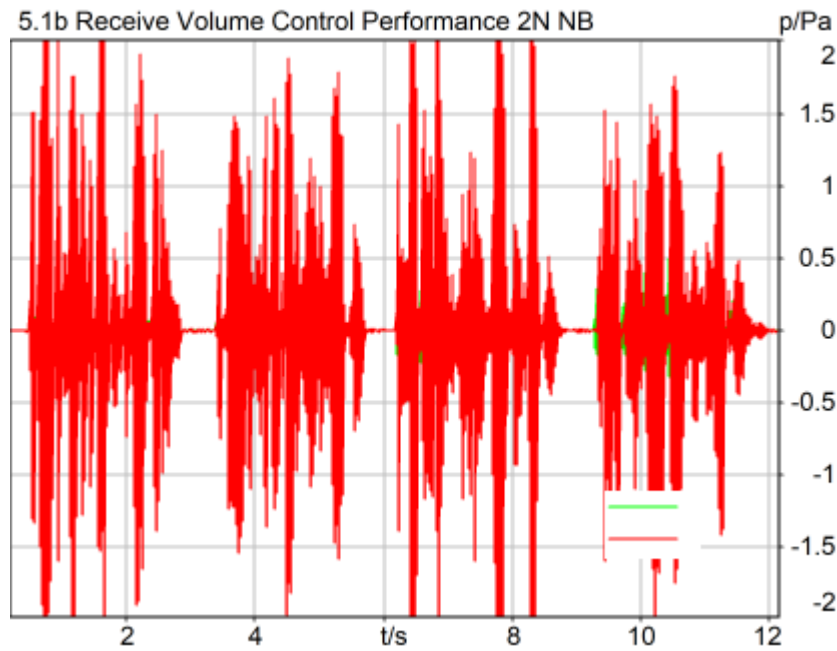

### Correction

X - 70

Speech Level RCV: 82.97 dB[SPL], Act.: 84.38%

Corrected Speech Level: 12.97 dB[SPL] Ok

Ok

2024/1/16 14:23 ACQUA 5.1.200

**Limits**

	<b>lower</b>
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Narrow Band		
	15.90 dB		

**Special Features**

Show source signal Source ch.2  
Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode      Bypass  
-----

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 400 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 30.31 dB (3.05%) Ok

**Ok**

2024/1/16 14:18 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor



**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	320.0 Hz
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_400Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out

In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 500 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

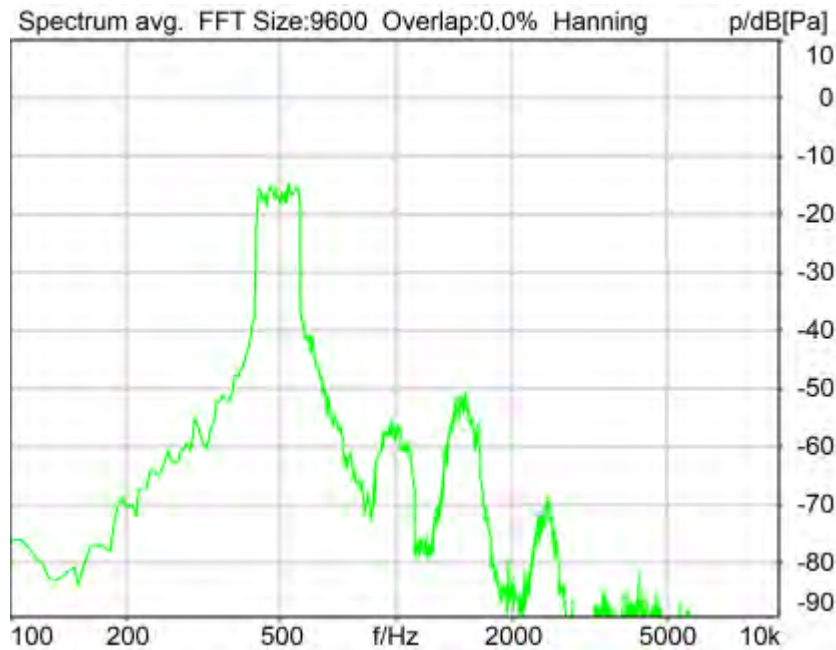

Distortion (Noise) RCV (packed): 29.74 dB (3.26%) Ok

**Ok**

2024/1/16 14:18 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off		
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_500Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1      -40.00 dB                      Gain out 2      0.00 dB  
 Gain in 1       0.00 dB                                  Gain in 2       0.00 dB  
 Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 630 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 25.68 dB (5.20%) Ok

**Ok**

2024/1/16 14:18 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat

Level adj. Ch1      -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	525.0 Hz
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis min.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_630Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

Polarisation Voltage 200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 800 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 33.36 dB (2.15%) Ok

**Ok**

2024/1/16 14:19 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting        off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_800Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**



Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 1000 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

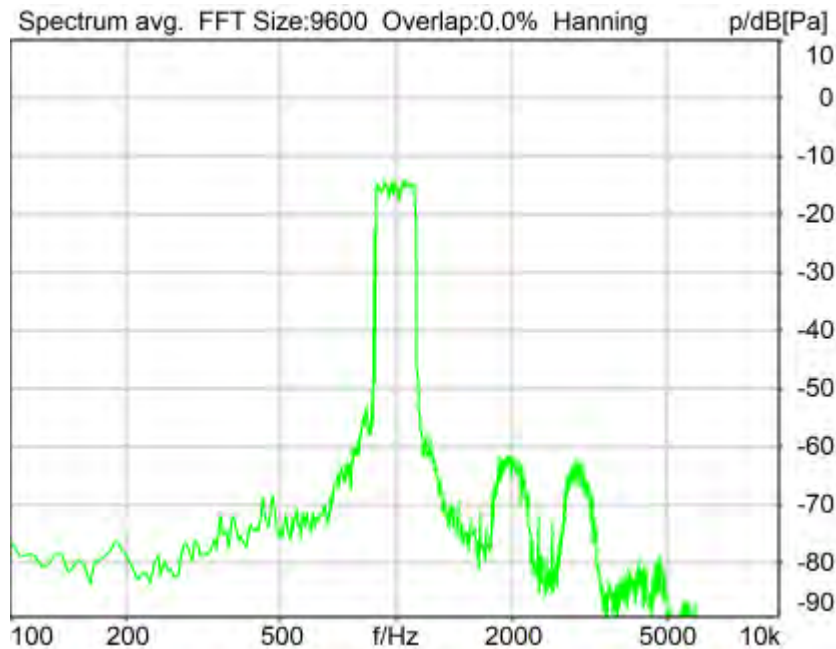

Distortion (Noise) RCV (packed): 40.06 dB (0.99%) Ok

**Ok**

2024/1/16 14:19 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Overlap	0 %
Frequency base	Transformation	Smooth	Off
FFT size	9600	Stimulus min.	855.0 Hz
Window function.	Hanning	Stimulus max.	1155.0 Hz
dB weighting	A Weighting	Analysis min.	20.0 Hz
Stimulus min.	855.0 Hz	Analysis max.	850.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	1160.0 Hz		

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
labCORE Routing  
Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker

Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode      Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 1250 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 31.98 dB (2.52%) Ok

**Ok**

2024/1/16 14:20 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off		
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1250Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1      -40.00 dB                      Gain out 2      0.00 dB  
 Gain in 1      0.00 dB                              Gain in 2      0.00 dB  
 Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## **5.2 RCV Distortion and Noise - 1600 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

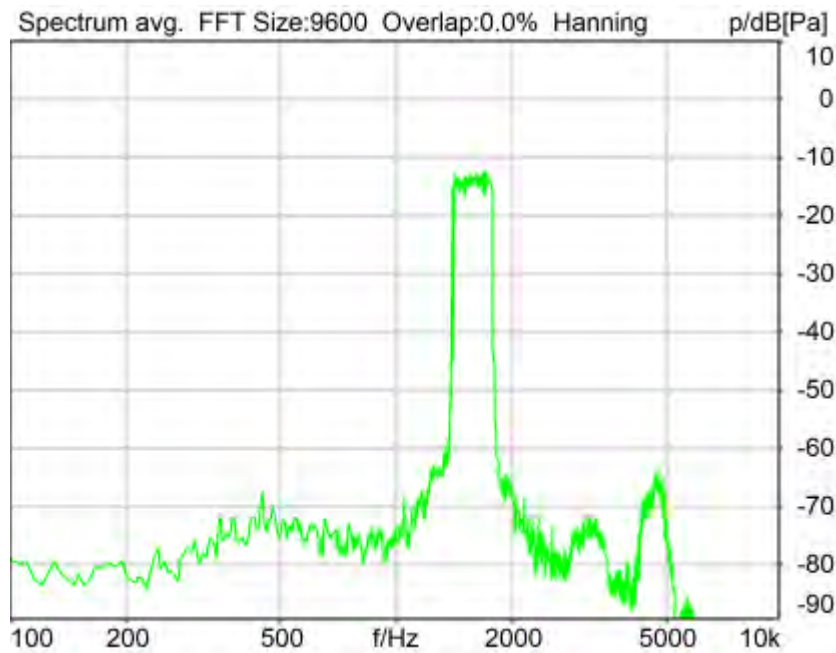

Distortion (Noise) RCV (packed): 45.97 dB (0.50%) Ok

**Ok**

2024/1/16 14:20 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat

Level adj. Ch1      -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	1375.0 Hz
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis min.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1600Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

Polarisation Voltage 200V                      Supply Voltage     ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass


-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 2000 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

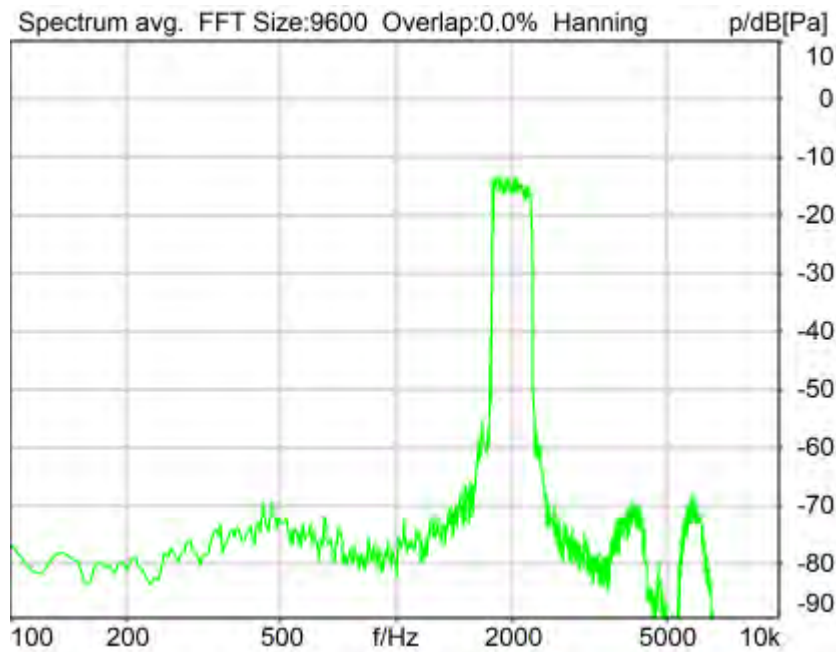

Distortion (Noise) RCV (packed): 44.54 dB (0.59%) Ok

**Ok**

2024/1/16 14:21 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting        off



Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 2500 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

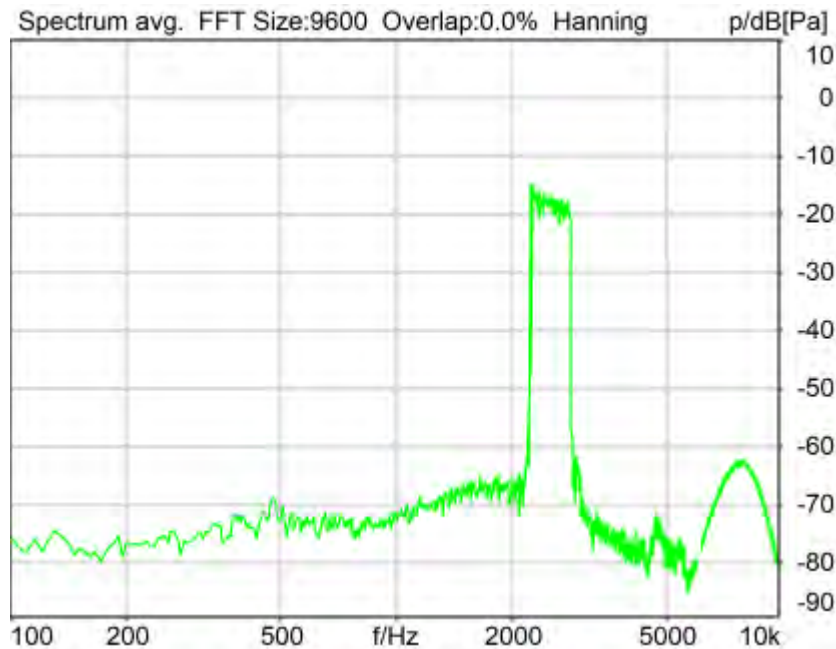

Distortion (Noise) RCV (packed): 38.50 dB (1.19%) Ok

**Ok**

2024/1/16 14:21 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Overlap	0 %
Frequency base	Transformation	Smooth	Off
FFT size	9600	Stimulus max.	2855.0 Hz
Window function.	Hanning	Analysis min.	20.0 Hz
dB weighting	A Weighting	Analysis max.	2200.0 Hz
Stimulus min.	2205.0 Hz	Analysis (2) min.	2860.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	2860.0 Hz		

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2500Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
labCORE Routing  
Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker

Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode      Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 3150 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

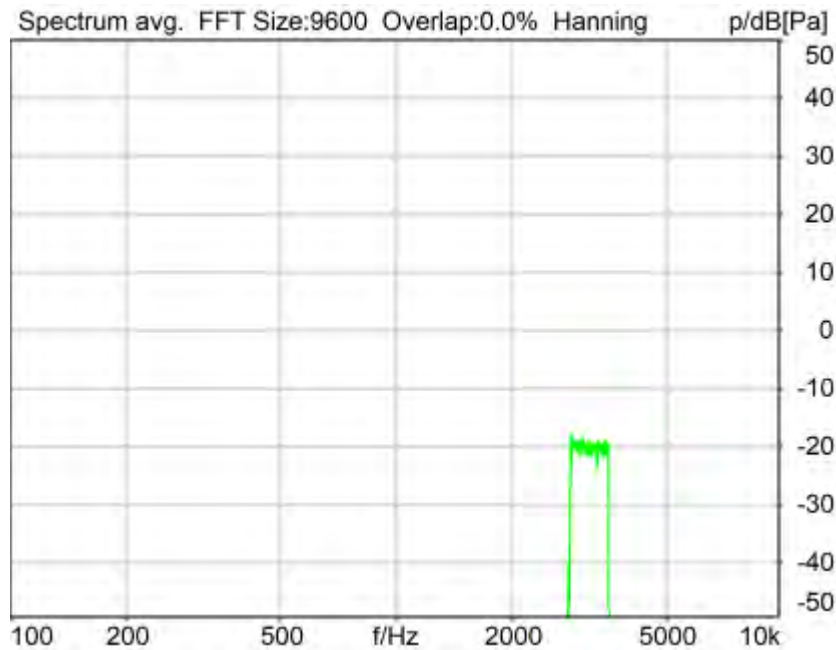

Distortion (Noise) RCV (packed): 37.43 dB (1.34%) Ok

**Ok**

2024/1/16 14:21 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off		
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_3150Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1 -40.00 dB  
Gain in 1 0.00 dB  
Mic 1 Power Supply Off

Gain out 2 0.00 dB  
Gain in 2 0.00 dB  
Mic 2 Power Supply Off

## **Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

Region	Frequency	SDNR
1	400Hz	30.31 dB
2	500Hz	29.74 dB
3	630Hz	25.68 dB
4	800Hz	33.36 dB
5	1000Hz	40.06 dB
6	1250Hz	31.98 dB
7	1600Hz	45.97 dB
8	2000Hz	44.54 dB
9	2500Hz	38.50 dB
10	3150Hz	37.43 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 25.68dB at 630Hz.

2024/1/16 14:22 ACQUA

## **5.2 RCV Distortion and Noise - 400 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N



Distortion (Noise) RCV (packed): 30.34 dB (3.04%) Ok

**Ok**

2024/1/16 14:24 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N



**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off		
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_400Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1      -40.00 dB                      Gain out 2      0.00 dB  
 Gain in 1       0.00 dB                                  Gain in 2       0.00 dB  
 Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

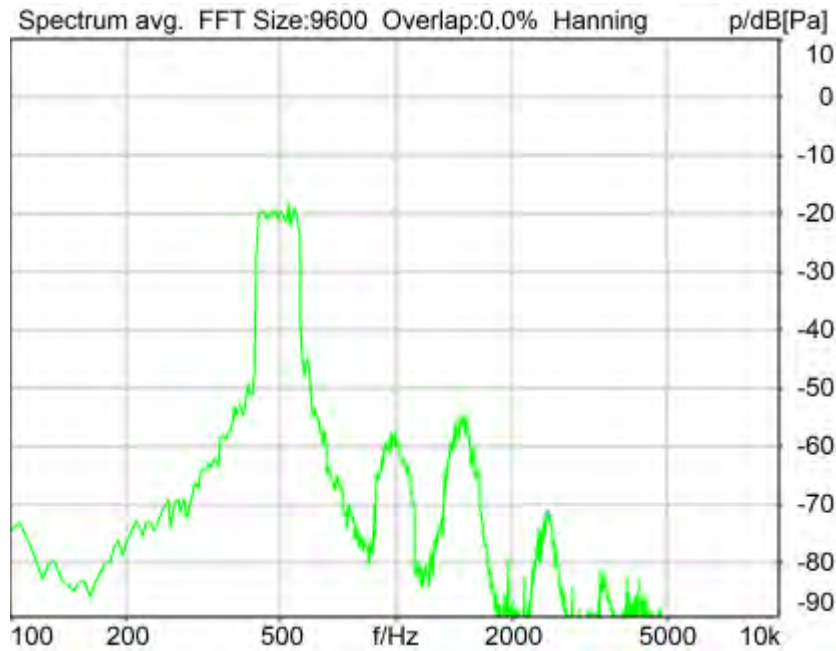

Distortion (Noise) RCV (packed): 31.29 dB (2.73%) Ok

**Ok**

2024/1/16 14:24 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat

Level adj. Ch1      -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	410.0 Hz
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_500Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

Polarisation Voltage 200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass


-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 630 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

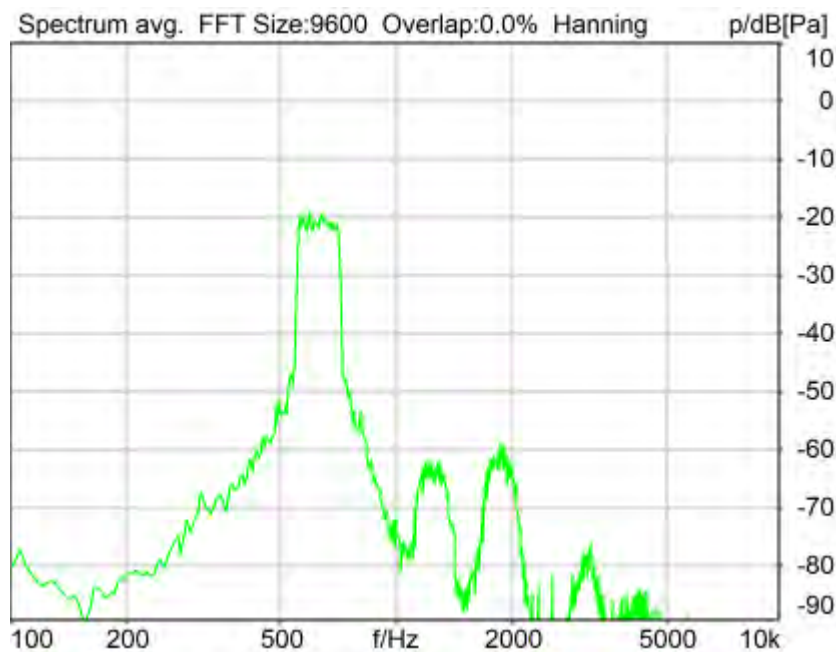

Distortion (Noise) RCV (packed): 32.23 dB (2.45%) Ok

**Ok**

2024/1/16 14:25 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting    off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_630Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 800 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

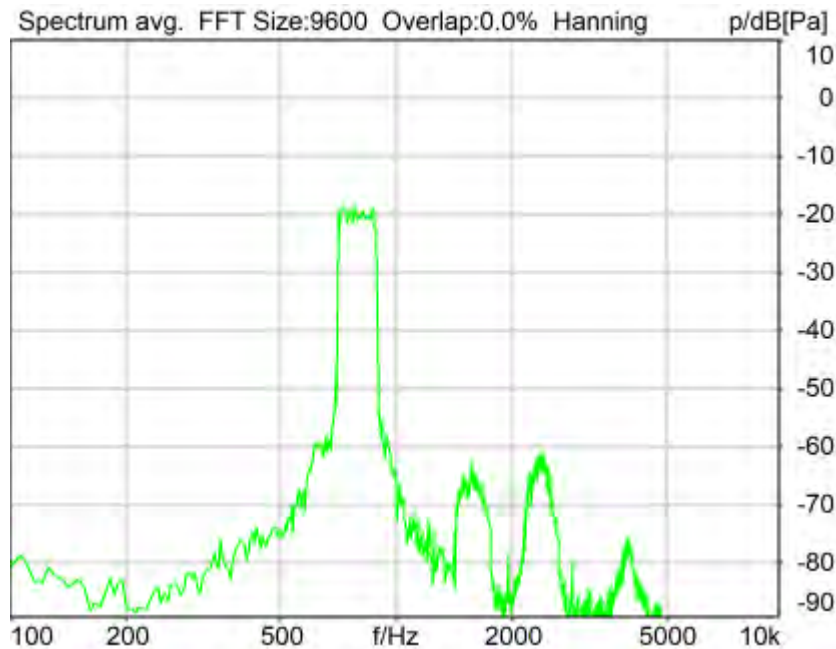

Distortion (Noise) RCV (packed): 36.82 dB (1.44%) Ok

**Ok**

2024/1/16 14:25 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Overlap	0 %
Frequency base	Transformation	Smooth	Off
FFT size	9600	Stimulus min.	675.0 Hz
Window function.	Hanning	Stimulus max.	925.0 Hz
dB weighting	A Weighting	Analysis min.	20.0 Hz
Stimulus min.	675.0 Hz	Analysis max.	670.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	930.0 Hz		

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_800Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
labCORE Routing  
Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker

Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode      Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 1000 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N



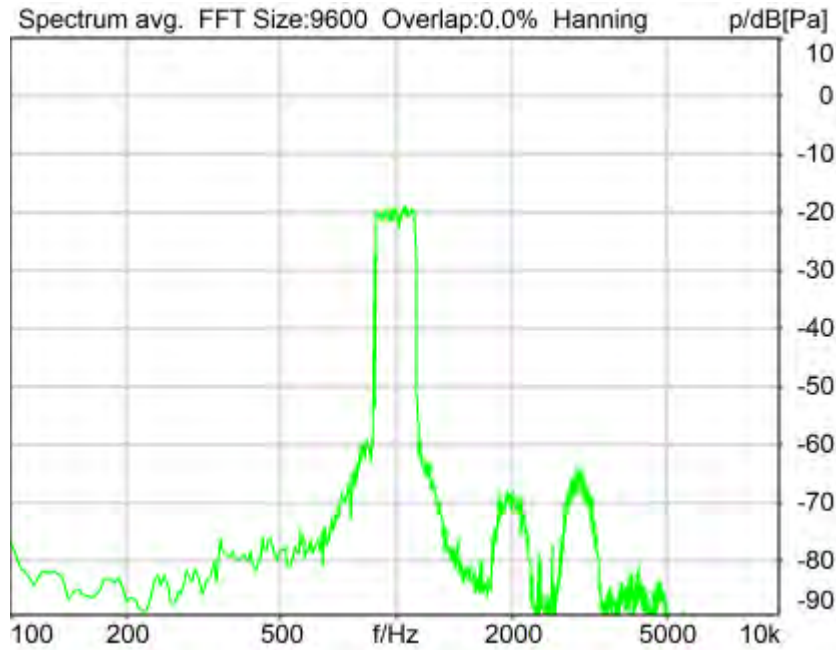

Distortion (Noise) RCV (packed): 39.28 dB (1.09%) Ok

**Ok**

2024/1/16 14:26 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off		
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1      -40.00 dB                      Gain out 2      0.00 dB  
Gain in 1        0.00 dB                                      Gain in 2        0.00 dB  
Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 1250 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

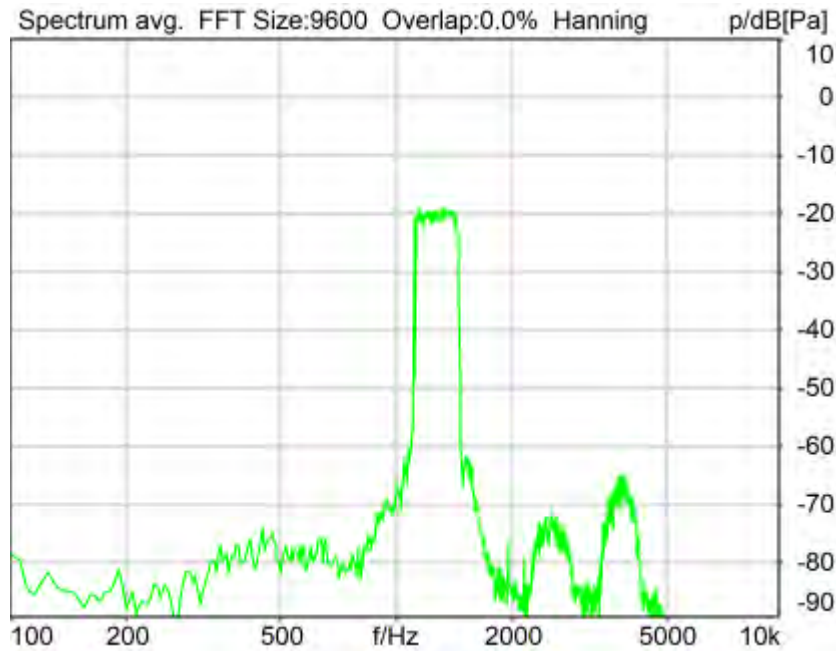

Distortion (Noise) RCV (packed): 32.08 dB (2.49%) Ok

**Ok**

2024/1/16 14:26 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat

Level adj. Ch1      -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	1085.0 Hz
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1250Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

Polarisation Voltage 200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass


-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 1600 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

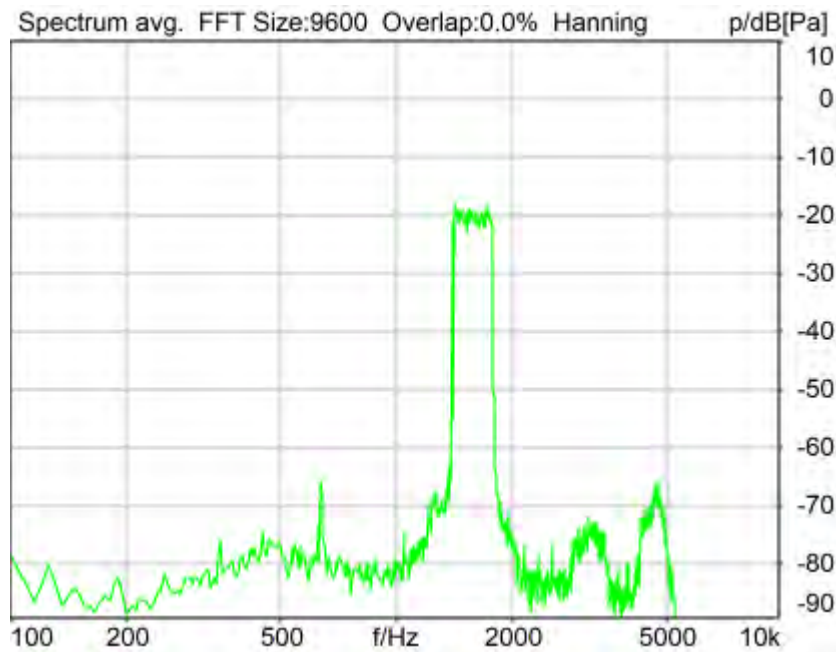

Distortion (Noise) RCV (packed): 43.81 dB (0.64%) Ok

**Ok**

2024/1/16 14:26 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting        off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1600Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 2000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

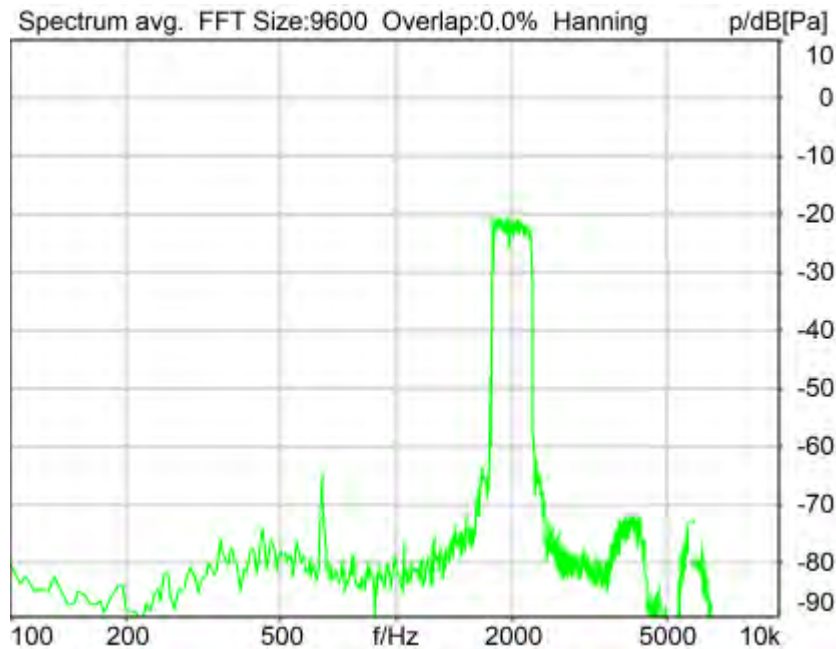

Distortion (Noise) RCV (packed): 42.34 dB (0.76%) Ok

**Ok**

2024/1/16 14:27 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
labCORE Routing  
Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker



Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode      Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 2500 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

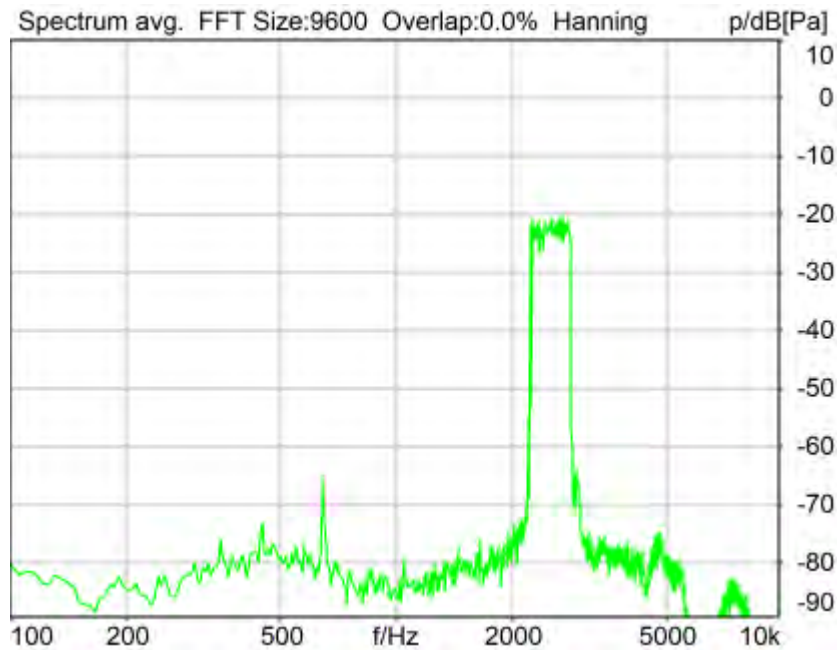

Distortion (Noise) RCV (packed): 44.94 dB (0.57%) Ok

**Ok**

2024/1/16 14:27 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	2855.0 Hz
Stimulus min.	2205.0 Hz	Analysis max.	2200.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	2860.0 Hz		

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2500Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1      -40.00 dB                      Gain out 2      0.00 dB  
 Gain in 1       0.00 dB                                  Gain in 2       0.00 dB  
 Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## **5.2 RCV Distortion and Noise - 3150 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

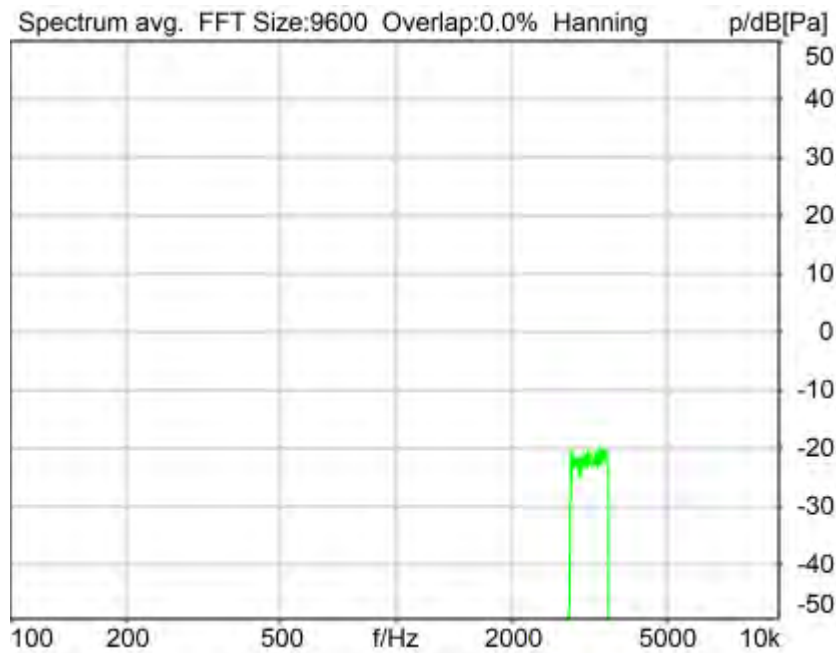

Distortion (Noise) RCV (packed): 44.62 dB (0.59%) Ok

**Ok**

2024/1/16 14:28 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat

Level adj. Ch1      -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	2785.0 Hz
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis min.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_3150Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

Polarisation Voltage 200V                      Supply Voltage     ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613

Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N


Region	Frequency	SDNR
1	400Hz	30.34 dB
2	500Hz	31.29 dB
3	630Hz	32.23 dB
4	800Hz	36.82 dB
5	1000Hz	39.28 dB
6	1250Hz	32.08 dB
7	1600Hz	43.81 dB
8	2000Hz	42.34 dB
9	2500Hz	44.94 dB
10	3150Hz	44.62 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 30.34dB at 400Hz.

2024/1/16 14:28 ACQUA

**5.3 Frequency Response 8N FF HANB**

TIA-5050 (2018-01) \ Measurements \ Narrowband

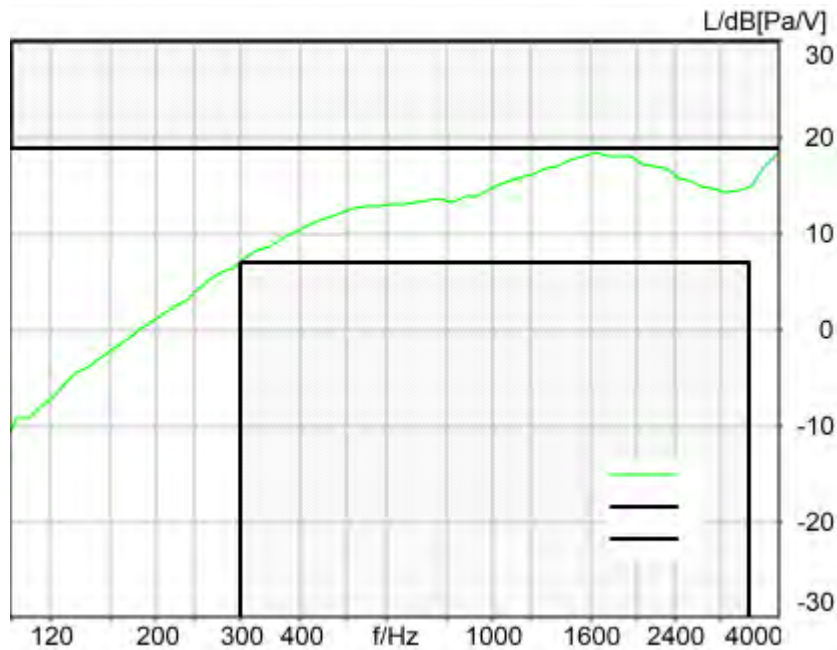

Absolute minimal distance  
0.45 dB at 1647.8 Hz Ok

**Ok**

2024/1/16 14:14 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**



Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode Bypass  
-----


Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.3 Frequency Response 8N DF HANB**

TIA-5050 (2018-01) \ Measurements \ Narrowband

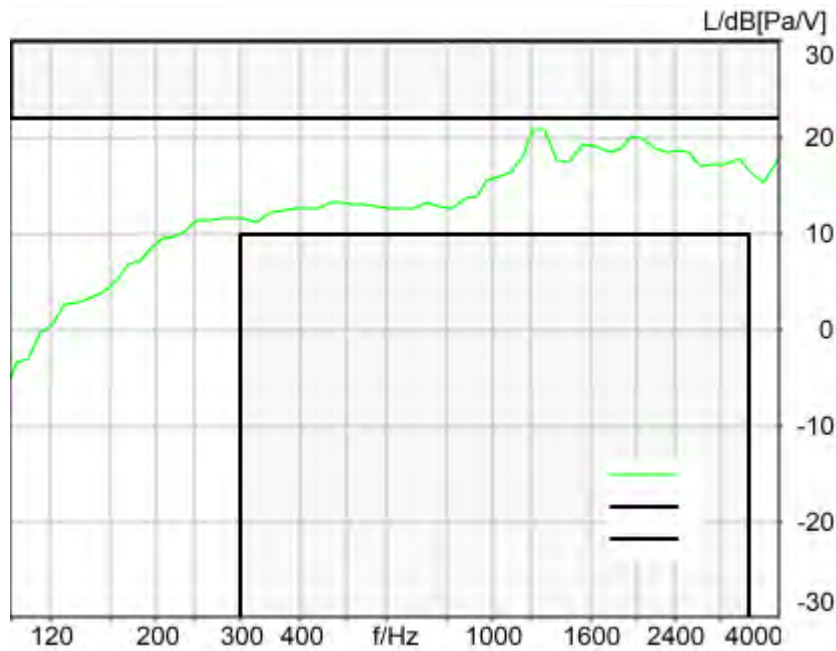

Absolute minimal distance  
1.25 dB at 1285.9 Hz Ok

**Ok**

2024/1/16 14:15 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
--	-------

Run 1	Fit into tolerance
-------	--------------------

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the end of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.5 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieeee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

## labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

## Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

## Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

## Microphone Settings (Mic Amp. (Slot 6))

## Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

## Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

## Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

## Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

## BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

## Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.3 Frequency Response 2N FF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

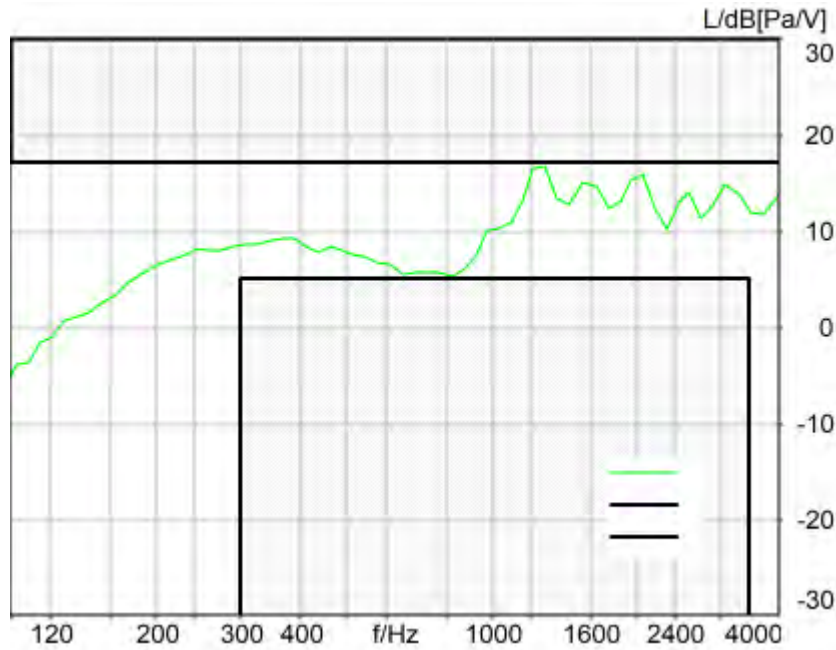

Absolute minimal distance  
0.28 dB at 1285.9 Hz Ok

**Ok**

2024/1/16 14:30 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 104.1000 ms (D\_RCV\_NB, Delay (Cross))

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr. 12306613

Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **Measurement Protocol**

Measurement Object	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
Project	HMD_2322#N159V

Project	TIA-5050 (2018-01)
Report Generation Date	2024/2/6 10:24
Responsible Person	audio

**Status Overview**

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay WB	Done	Delay (Cross) [ms]	158.6	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.1a Receive Volume Control Performance 8N WB	Not Ok	Corrected Speech Level [dB[SPL]]	17.42	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.1b Receive Volume Control Performance 2N WB	Ok	Corrected Speech Level [dB[SPL]]	12.90	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.34	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 315 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.41	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 400 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	31.97	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.37	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 630 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	33.80	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 800 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.67	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 1000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	31.77	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 1250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	22.72	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 1600 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	24.68	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 2000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	22.63	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 2500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	27.49	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 3150 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.50	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 4000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	31.54	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise	Ok	Distortion (Noise) [dB],	35.58	LTE Band



- 5000 Hz WB		0.0 dB		5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 2000Hz)	22.63	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.09	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 315 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	27.86	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 400 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.72	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	30.32	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 630 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.01	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 800 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.19	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 1000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	33.75	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 1250 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	23.44	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 1600 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	22.74	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 2000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	32.61	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 2500 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	38.56	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 3150 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	38.40	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 4000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	28.16	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.2 RCV Distortion and Noise - 5000 Hz WB	Ok	Distortion (Noise) [dB], 0.0 dB	29.00	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 1600Hz)	22.74	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.3 Frequency Response 8N FF	Ok	Min. dist. to tolerance scheme [dB], 4369.4 Hz	0.16	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.3 Frequency Response 8N	Not Ok	Min. dist. to tolerance	-1.25	LTE Band


DF		scheme [dB], 4369.4 Hz		5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.3 Frequency Response 2N FF	Ok	Min. dist. to tolerance scheme [dB], 4369.4 Hz	0.04	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525
5.3 Frequency Response 2N DF	Not Ok	Min. dist. to tolerance scheme [dB], 4369.4 Hz	-1.00	LTE Band 5_10QPSK_50RB_0_EVS WB 128kbps_CH20525

---

Overall Receive Delay WB	6
5.1a Receive Volume Control Performance 8N WB	7
5.1b Receive Volume Control Performance 2N WB	10
5.2 RCV Distortion and Noise - 250 Hz WB	12
5.2 RCV Distortion and Noise - 315 Hz WB	14
5.2 RCV Distortion and Noise - 400 Hz WB	16
5.2 RCV Distortion and Noise - 500 Hz WB	18
5.2 RCV Distortion and Noise - 630 Hz WB	20
5.2 RCV Distortion and Noise - 800 Hz WB	23
5.2 RCV Distortion and Noise - 1000 Hz WB	25
5.2 RCV Distortion and Noise - 1250 Hz WB	27
5.2 RCV Distortion and Noise - 1600 Hz WB	29
5.2 RCV Distortion and Noise - 2000 Hz WB	31
5.2 RCV Distortion and Noise - 2500 Hz WB	34
5.2 RCV Distortion and Noise - 3150 Hz WB	36
5.2 RCV Distortion and Noise - 4000 Hz WB	38
5.2 RCV Distortion and Noise - 5000 Hz WB	40
Report - Receive Distortion and Noise (Conversational Gain)	42
5.2 RCV Distortion and Noise - 250 Hz WB	43
5.2 RCV Distortion and Noise - 315 Hz WB	45
5.2 RCV Distortion and Noise - 400 Hz WB	47
5.2 RCV Distortion and Noise - 500 Hz WB	50
5.2 RCV Distortion and Noise - 630 Hz WB	52
5.2 RCV Distortion and Noise - 800 Hz WB	54
5.2 RCV Distortion and Noise - 1000 Hz WB	56
5.2 RCV Distortion and Noise - 1250 Hz WB	59
5.2 RCV Distortion and Noise - 1600 Hz WB	61
5.2 RCV Distortion and Noise - 2000 Hz WB	63
5.2 RCV Distortion and Noise - 2500 Hz WB	65
5.2 RCV Distortion and Noise - 3150 Hz WB	68
5.2 RCV Distortion and Noise - 4000 Hz WB	70
5.2 RCV Distortion and Noise - 5000 Hz WB	72
Report - Receive Distortion and Noise (Conversational Gain)	74
5.3 Frequency Response 8N FF	75
5.3 Frequency Response 8N DF	77
5.3 Frequency Response 2N FF	80
5.3 Frequency Response 2N DF	82

## Overall Receive Delay WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ Preparation - Delay measurement

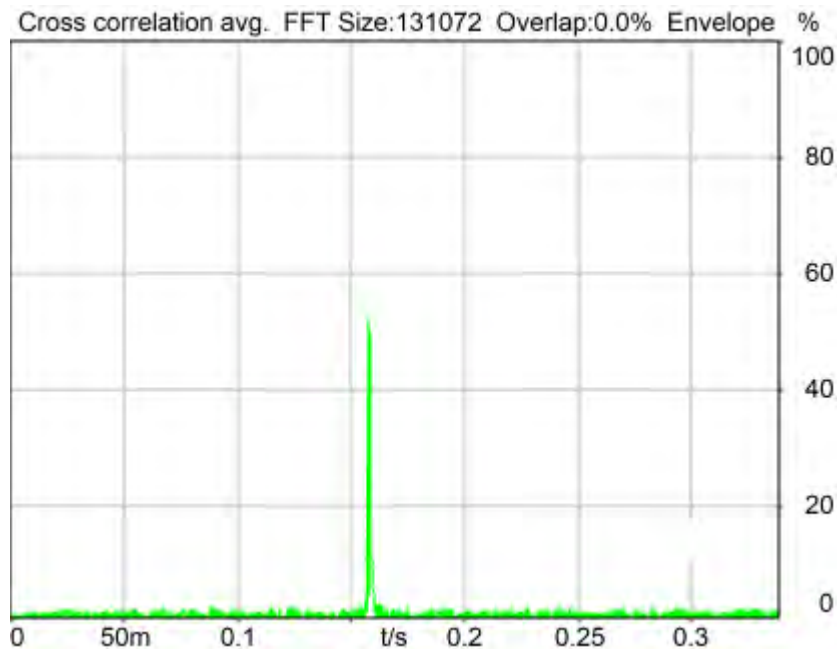

Delay (Cross): 158.6 ms

2024/1/18 14:55 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Source: csswb1b\_r1s.dat

WIDEBAND Composite Source Signal RCV P.501 (1 bursts) at Channel 2

Pause 0.5 s +

voiced signal + 8000 Hz band limited random noise 1.0 s +

Pause till end of file

Signal level (ch2): -14.7 dBm0 (corresponds to approx. -16.0 dBm0 for a 350 ms CSS considering 101 ms Pause) from 0.5s to 1.544s for 4-k FFT, Hanning window,

75 % overlap in frequency range of 100 to 8000 Hz

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.1: 0.00 dB

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Range start	550.00 ms	Range length	1950.00 ms
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	131072	Overlap	0 %
Window function.	Hanning	Smooth	Off
Delayed channel	None		
Valid range start	-1228.79 ms	Valid range end	1228.81 ms

**Special Features**

Show source signal	Source ch.2	Store to variable	D_RCV_WB
--------------------	-------------	-------------------	----------

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.1a Receive Volume Control Performance 8N WB

TIA-5050 (2018-01) \ Measurements \ Wideband

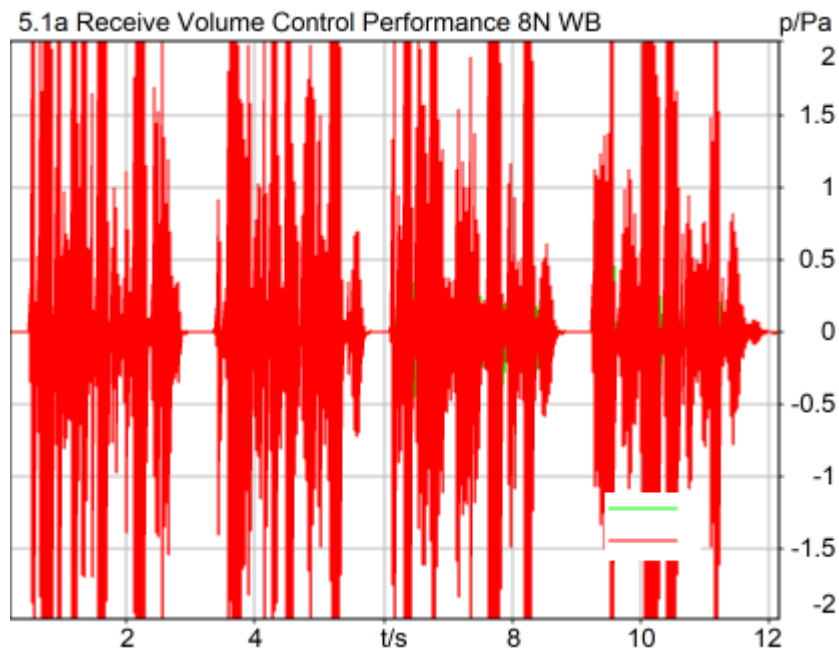

### Correction

X - 70

Speech Level RCV: 87.42 dB[SPL], Act.: 84.22%

Corrected Speech Level: 17.42 dB[SPL] Not Ok

### Not Ok

2024/1/16 14:48 ACQUA 5.1.200

### Limits

	lower
Run 1	18.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
		Rotation Delta C	0.0 °

MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-4.0 mm	Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Super Wideband		
15.90 dB			

**Special Features**

Show source signal Source ch.2  
Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
----------	----------	--------	----------

HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

## 5.1b Receive Volume Control Performance 2N WB

TIA-5050 (2018-01) \ Measurements \ Wideband

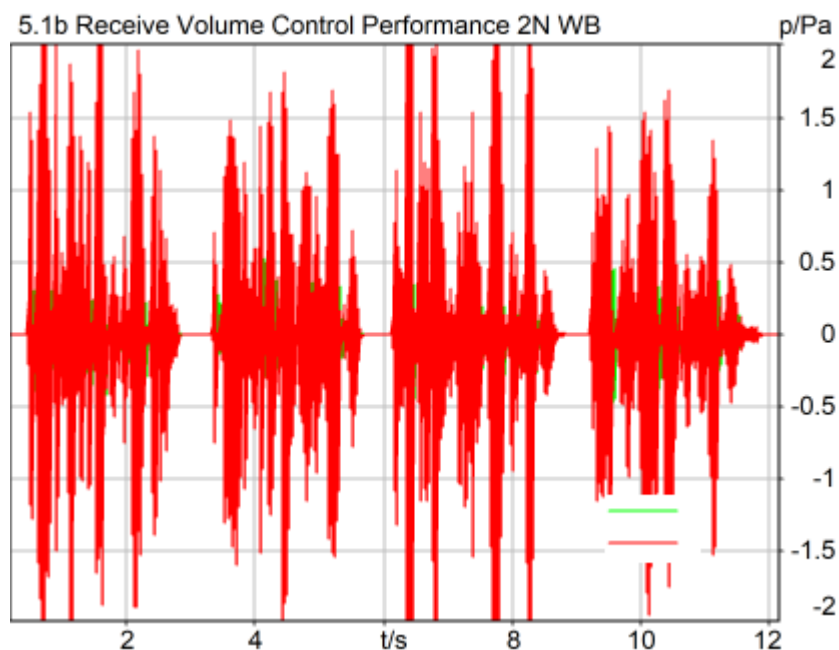

### Correction

X - 70

Speech Level RCV: 82.90 dB[SPL], Act.: 84.47%

Corrected Speech Level: 12.90 dB[SPL] Ok

### Ok

2024/1/16 14:34 ACQUA 5.1.200

### Limits

	lower
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03



**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Super Wideband		
15.90 dB			

**Special Features**

Show source signal Source ch.2  
Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode      Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.            12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 250 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

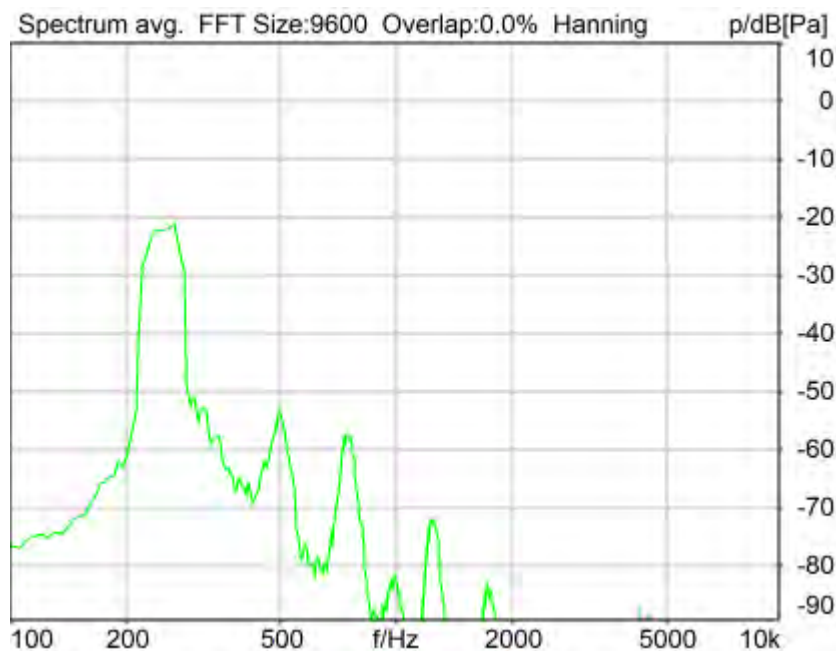

Distortion (Noise) RCV (packed): 32.34 dB (2.42%) Ok

**Ok**

2024/1/16 11:21 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_250hz\_sr20dbm0\_v02.dat.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 7.9 N

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	315.0 Hz
Stimulus min.	190.0 Hz	Analysis max.	185.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	320.0 Hz		

### Special Features

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))

Store to variable RCVWB10\_250Hz

### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

### Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

### VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMT Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

-----  
BEQ Settings (BEQ Filter 1)  
Block mode      Bypass  
-----

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 315 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 32.41 dB (2.40%) Ok

**Ok**

2024/1/16 11:21 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
--	-------

Run 1	20.00 dB
-------	----------

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_315hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	390.0 Hz
Stimulus min.	245.0 Hz	Analysis max.	240.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	395.0 Hz		

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_315Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right


**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz

Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
-----			
VoIP Settings (VoIP)			
RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off
-----			
BEQ Settings (BEQ Filter 1)			
Block mode	Bypass		
-----			
Artificial Head Settings (HATS 1 (HMS II.3))			
Ser. Nr.	12306613	Pinna Type	Type 3.3
<b>HIB Settings</b>			
HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 400 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

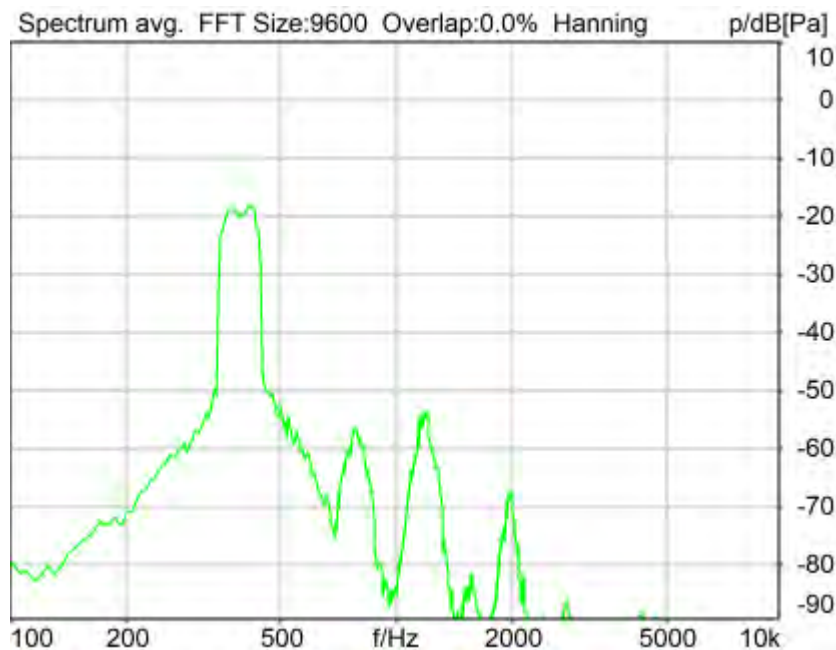

Distortion (Noise) RCV (packed): 31.97 dB (2.52%) Ok

**Ok**

2024/1/16 11:22 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	320.0 Hz
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))

Store to variable RCVWB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
VoIP Settings (VoIP)

RTP Connection Streaming SIP Connection Unavailable  
SIP Reg. State Unregistered Jitterbuffer Length 140  
Jitter Buffer Reset On Playback Enabled Codec EVS/16000/1  
Packet Length 20 Encoder Parameter ;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0  
FMTP Parameter ;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0  
Impairment Mode Off Impairment Type Off

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr. 12306613 Pinna Type Type 3.3


**HIB Settings**

HIB Name 60020095 Serial 60020095  
HIB Mode Mobile Measurement Impedance 32 Ohm  
Gain out 1 -40.00 dB Gain out 2 0.00 dB  
Gain in 1 0.00 dB Gain in 2 0.00 dB  
Mic 1 Power Supply Off Mic 2 Power Supply Off

## **5.2 RCV Distortion and Noise - 500 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N



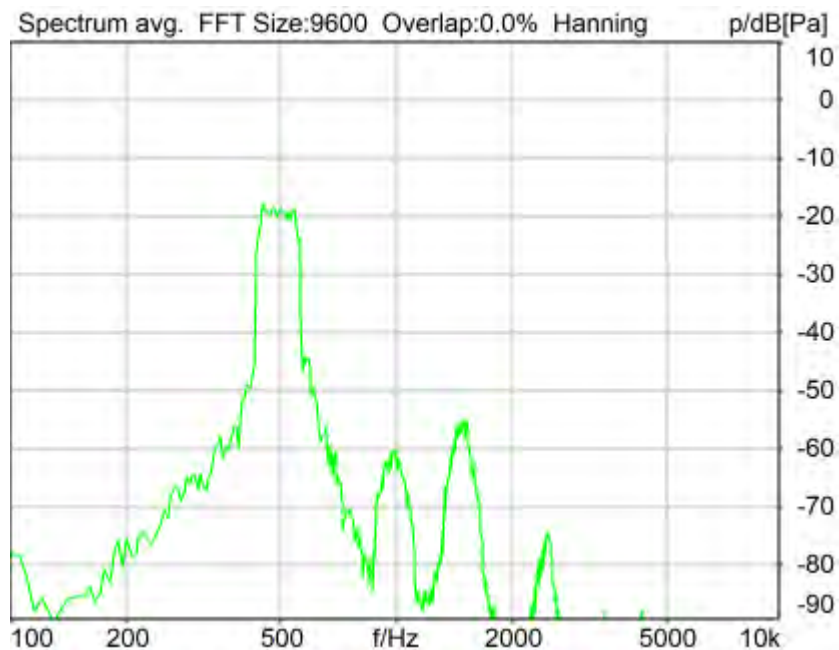

Distortion (Noise) RCV (packed): 32.37 dB (2.41%) Ok

**Ok**

2024/1/16 11:22 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 7.9 N

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

#### Analysis

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	595.0 Hz
Stimulus min.	410.0 Hz	Analysis max.	405.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	600.0 Hz		

#### Special Features

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_500Hz

#### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

#### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

#### Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

#### VoIP Settings (VoIP)

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

#### BEQ Settings (BEQ Filter 1)

Block mode Bypass

#### Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

#### HIB Settings


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB

Mic 1 Power Supply Off

Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 630 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

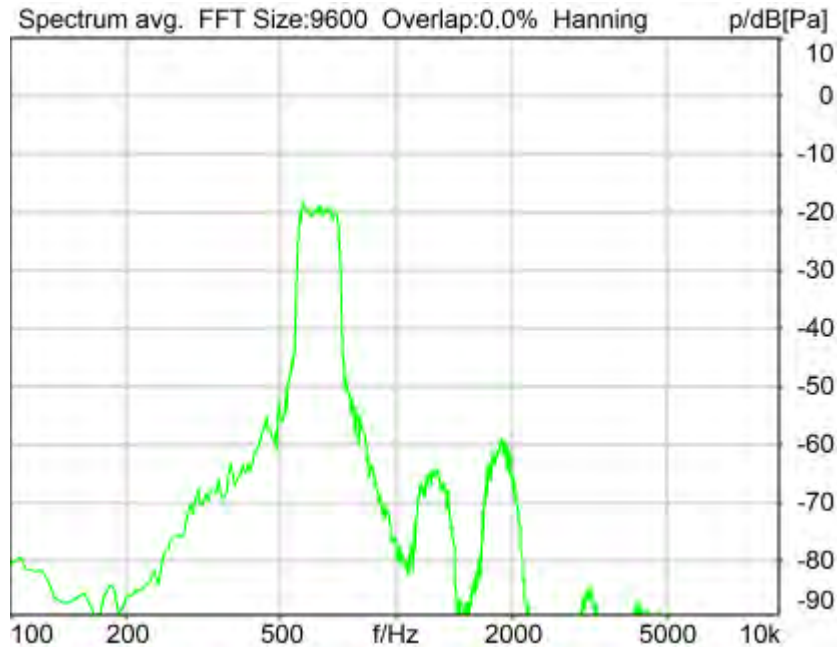

Distortion (Noise) RCV (packed): 33.80 dB (2.04%) Ok

Ok

2024/1/16 11:22 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

Rotation Delta A 0.0 °

MECRP Delta Ye	0.0 mm	Rotation Delta C	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-2.9 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTF Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 800 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

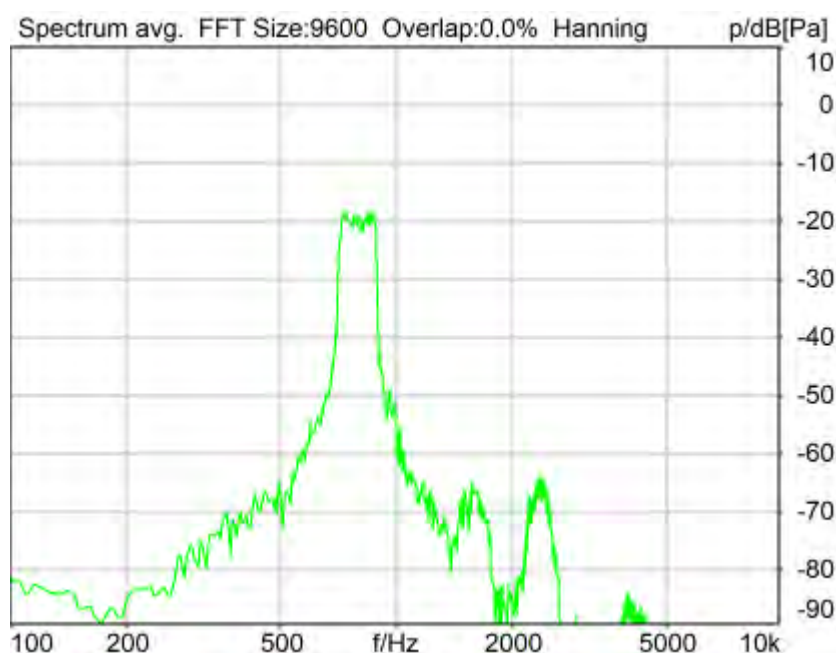

Distortion (Noise) RCV (packed): 32.67 dB (2.33%) Ok

**Ok**

2024/1/16 11:23 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	925.0 Hz
Stimulus min.	675.0 Hz	Analysis max.	670.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	930.0 Hz		

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
----------------	-----------	----------------	-------------

SIP Reg. State      Unregistered                      Jitterbuffer Length    140  
 Jitter Buffer Reset    On Playback                      Enabled Codec        EVS/16000/1  
 Packet Length        20                                      Encoder Parameter ;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0  
 FMTP Parameter     ;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0  
 Impairment Mode    Off                                      Impairment Type     Off


-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode            Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**  
 HIB Name                60020095                      Serial                    60020095  
 HIB Mode                Mobile Measurement            Impedance              32 Ohm  
 Gain out 1               -40.00 dB                      Gain out 2              0.00 dB  
 Gain in 1                0.00 dB                        Gain in 2                0.00 dB  
 Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 1000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

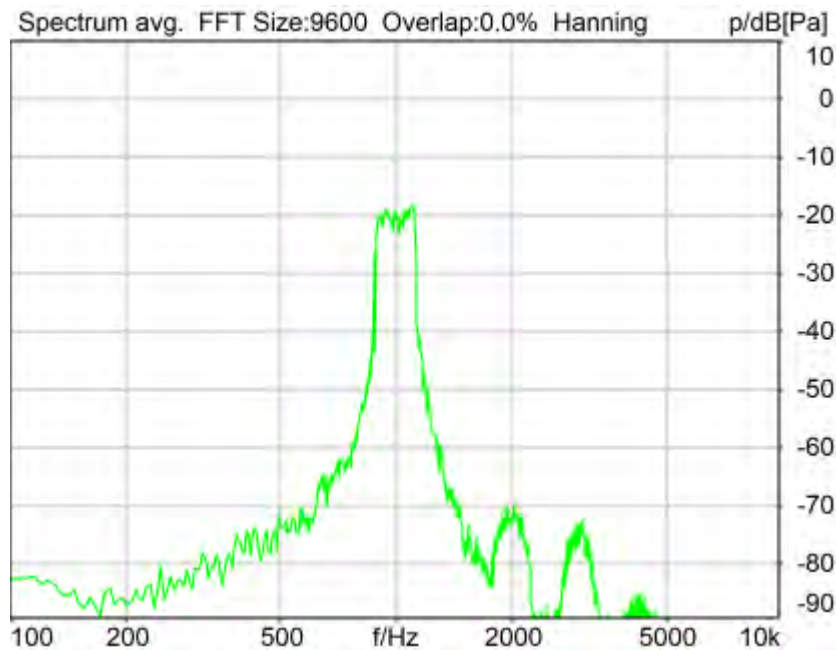

Distortion (Noise) RCV (packed): 31.77 dB (2.58%) Ok

**Ok**

2024/1/16 11:23 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
--	-------

Run 1	20.00 dB
-------	----------

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	1155.0 Hz
Stimulus min.	855.0 Hz	Analysis max.	850.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	1160.0 Hz		

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**


Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz



Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
-----			
VoIP Settings (VoIP)			
RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTSP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off
-----			
BEQ Settings (BEQ Filter 1)			
Block mode	Bypass		
-----			
Artificial Head Settings (HATS 1 (HMS II.3))			
Ser. Nr.	12306613	Pinna Type	Type 3.3
<b>HIB Settings</b>			
HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

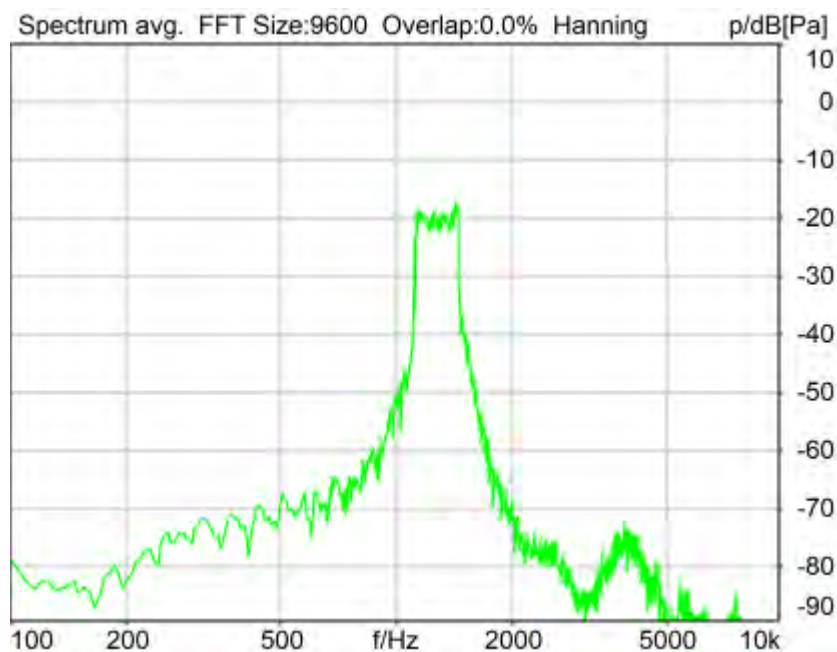

Distortion (Noise) RCV (packed): 22.72 dB (7.31%) Ok

**Ok**

2024/1/16 11:24 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1085.0 Hz	Stimulus max.	1450.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1080.0 Hz
Analysis (2) min.	1455.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))

Store to variable RCVWB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V

**Channel In 2 Settings**

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V

**Channel In 3 Settings**

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

**Channel In 4 Settings**

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1600 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

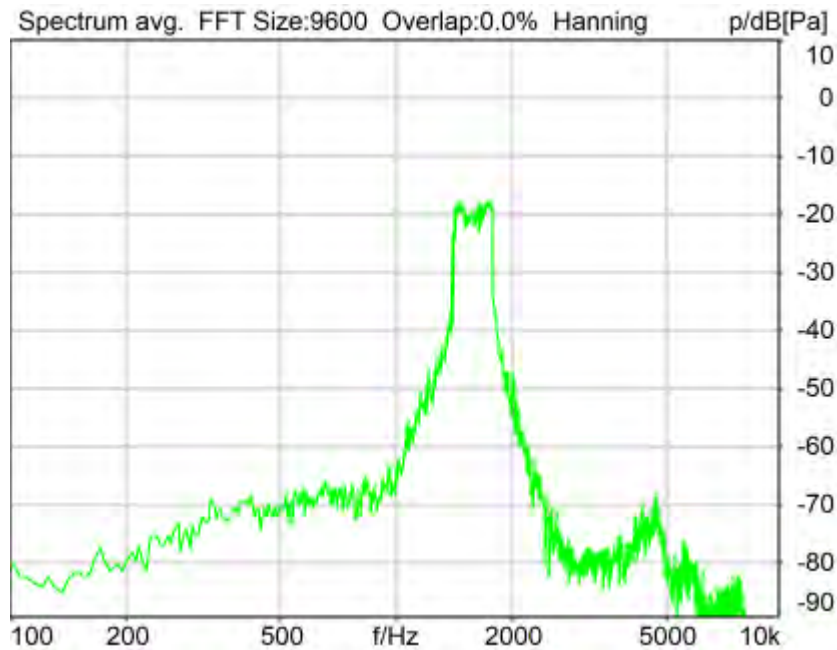

Distortion (Noise) RCV (packed): 24.68 dB (5.84%) Ok

**Ok**

2024/1/16 11:24 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1600Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB

Mic 1 Power Supply Off

Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 2000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 22.63 dB (7.39%) Ok

Ok

2024/1/16 11:25 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

Rotation Delta A 0.0 °

MECRP Delta Ye	0.0 mm	Rotation Delta C	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-2.9 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0		
Impairment Mode	Off	Impairment Type	Off

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 2500 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

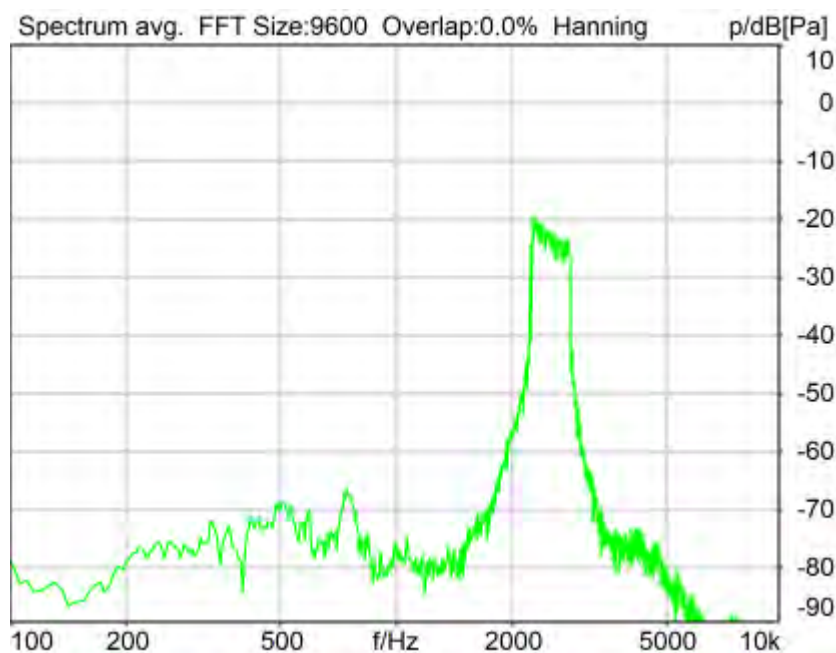

Distortion (Noise) RCV (packed): 27.49 dB (4.22%) Ok

**Ok**

2024/1/16 11:25 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat



Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	2855.0 Hz
Stimulus min.	2205.0 Hz	Analysis max.	2200.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	2860.0 Hz		

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 2 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 3 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V  
Channel In 4 Settings  
Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
----------------	-----------	----------------	-------------

SIP Reg. State     Unregistered                     Jitterbuffer Length   140  
 Jitter Buffer Reset   On Playback                     Enabled Codec        EVS/16000/1  
 Packet Length        20                                 Encoder Parameter ;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0  
 FMTP Parameter     ;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0  
 Impairment Mode    Off                                 Impairment Type     Off

-----  
 BEQ Settings (BEQ Filter 1)  
 Block mode         Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))  
 Ser. Nr.            12306613


Pinna Type         Type 3.3

**HIB Settings**

HIB Name            60020095                     Serial                60020095  
 HIB Mode            Mobile Measurement         Impedance            32 Ohm  
 Gain out 1          -40.00 dB                    Gain out 2            0.00 dB  
 Gain in 1            0.00 dB                     Gain in 2            0.00 dB  
 Mic 1 Power Supply Off     Mic 2 Power Supply Off

**5.2 RCV Distortion and Noise - 3150 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

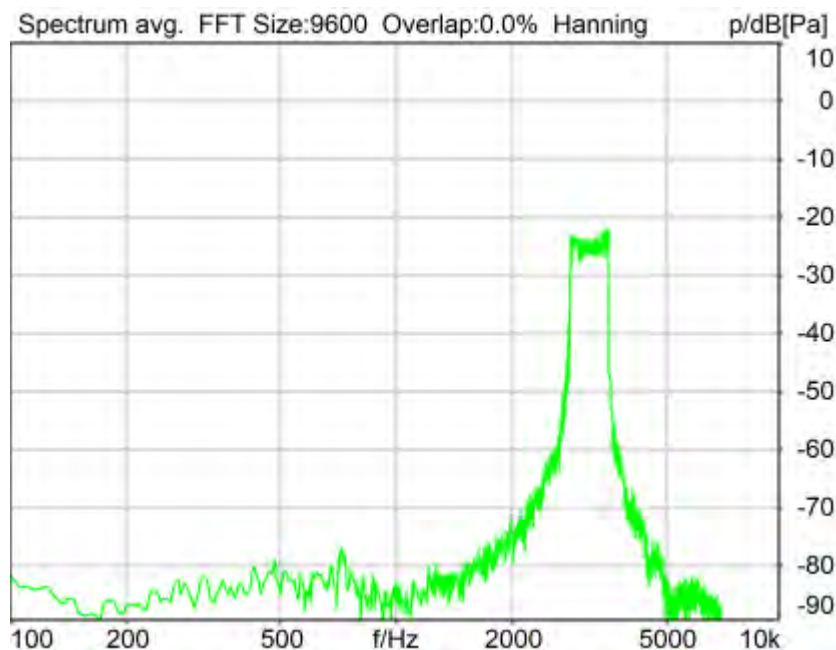

Distortion (Noise) RCV (packed): 30.50 dB (2.98%) Ok

**Ok**

2024/1/16 11:25 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
--	-------

Run 1	20.00 dB
-------	----------

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	3585.0 Hz
Stimulus min.	2785.0 Hz	Analysis max.	2780.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	3590.0 Hz		

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right


**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz

Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
-----			
VoIP Settings (VoIP)			
RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTSP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Mode	Off
Impairment Mode	Off	Impairment Type	Off
-----			
BEQ Settings (BEQ Filter 1)			
Block mode	Bypass		
-----			
Artificial Head Settings (HATS 1 (HMS II.3))			
Ser. Nr.	12306613	Pinna Type	Type 3.3
<b>HIB Settings</b>			
HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 4000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

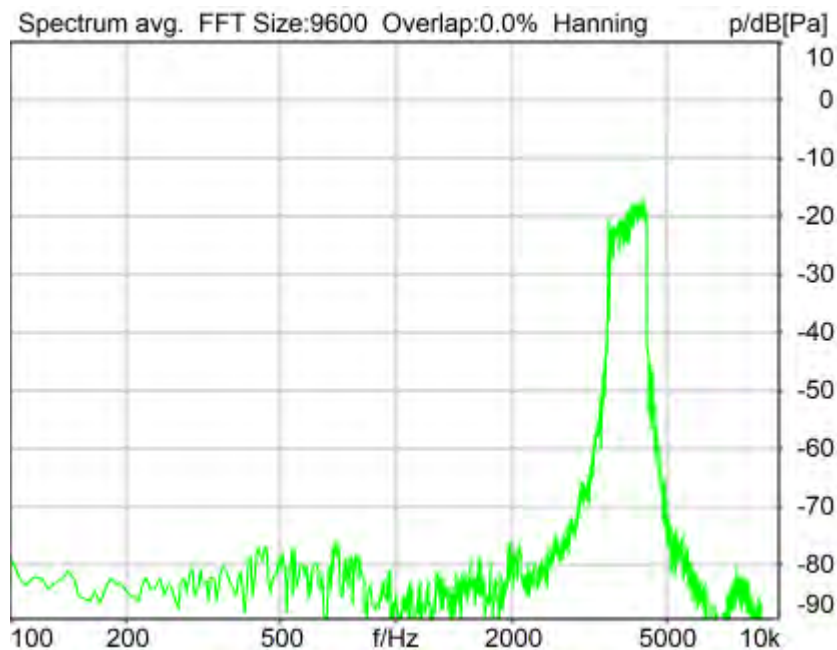

Distortion (Noise) RCV (packed): 31.54 dB (2.65%) Ok

**Ok**

2024/1/16 11:26 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_4000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	3515.0 Hz	Stimulus max.	4500.0 Hz
Analysis min.	20.0 Hz	Analysis max.	3510.0 Hz
Analysis (2) min.	4505.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))

Store to variable RCVWB10\_4000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
 In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V

**Channel In 2 Settings**

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V

**Channel In 3 Settings**

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

**Channel In 4 Settings**

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

-----  
**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTMP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Type	Off

-----  
**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

-----  
**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 5000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

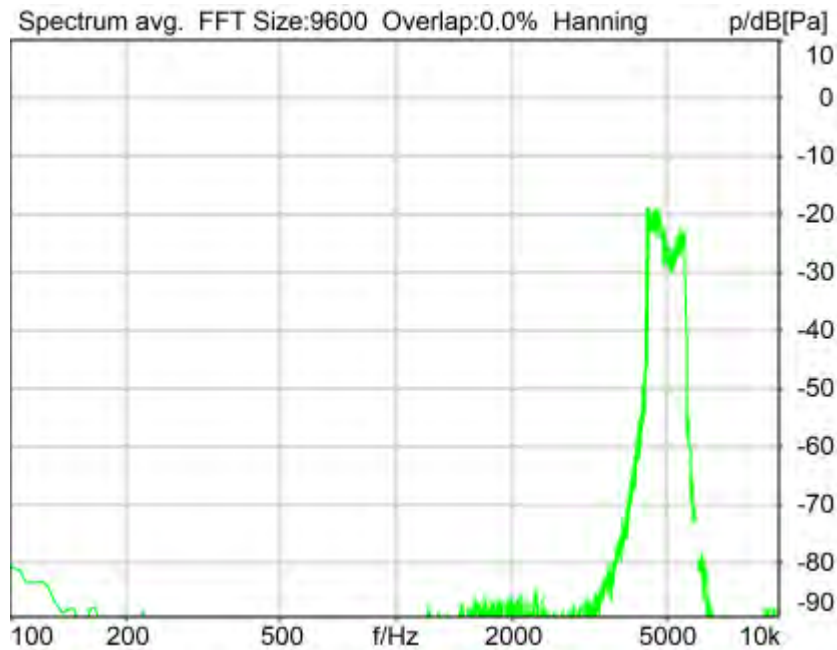

Distortion (Noise) RCV (packed): 35.58 dB (1.66%) Ok

**Ok**

2024/1/16 11:26 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_5000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-2.9 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	4430.0 Hz	Stimulus max.	5660.0 Hz
Analysis min.	20.0 Hz	Analysis max.	4425.0 Hz
Analysis (2) min.	5665.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_5000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> VoIP 1 -> Radio Tester 1 (CMW500) RF In/Out  
In Channel 1 <- VoIP In/Out 1 <- Radio Tester 1 (CMW500) RF In/Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**VoIP Settings (VoIP)**

RTP Connection	Streaming	SIP Connection	Unavailable
SIP Reg. State	Unregistered	Jitterbuffer Length	140
Jitter Buffer Reset	On Playback	Enabled Codec	EVS/16000/1
Packet Length	20	Encoder Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0
FMTTP Parameter	;br=5.9-24.4;bw=nb-swb;ch-aw-recv=2;max-red=0	Impairment Type	Off
Impairment Mode	Off		

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB



Mic 1 Power Supply Off

Mic 2 Power Supply Off

## **Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 8N

<b>Region</b>	<b>Frequency</b>	<b>SDNR</b>
1	250Hz	32.34 dB
2	315Hz	32.41 dB
3	400Hz	31.97 dB
4	500Hz	32.37 dB
5	630Hz	33.80 dB
6	800Hz	32.67 dB
7	1000Hz	31.77 dB
8	1250Hz	22.72 dB
9	1600Hz	24.68 dB
10	2000Hz	22.63 dB
11	2500Hz	27.49 dB
12	3150Hz	30.50 dB
13	4000Hz	31.54 dB
14	5000Hz	35.58 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 22.63dB at 2000Hz.

2024/1/16 11:26 ACQUA

## **5.2 RCV Distortion and Noise - 250 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N



Distortion (Noise) RCV (packed): 29.09 dB (3.51%) Ok

**Ok**

2024/1/16 14:35 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_250hz\_sr20dbm0\_v02.dat.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

#### Analysis

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	315.0 Hz
Stimulus min.	190.0 Hz	Analysis max.	185.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	320.0 Hz		

#### Special Features

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_250Hz

#### Hardware Config Settings

Used Setting HEAD 2G3G labCORE NetSim

#### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

#### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

#### Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

#### Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

#### Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

#### BEQ Settings (BEQ Filter 1)

Block mode Bypass

#### Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


#### HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1      -40.00 dB                      Gain out 2      0.00 dB  
Gain in 1        0.00 dB                                      Gain in 2        0.00 dB  
Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 315 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

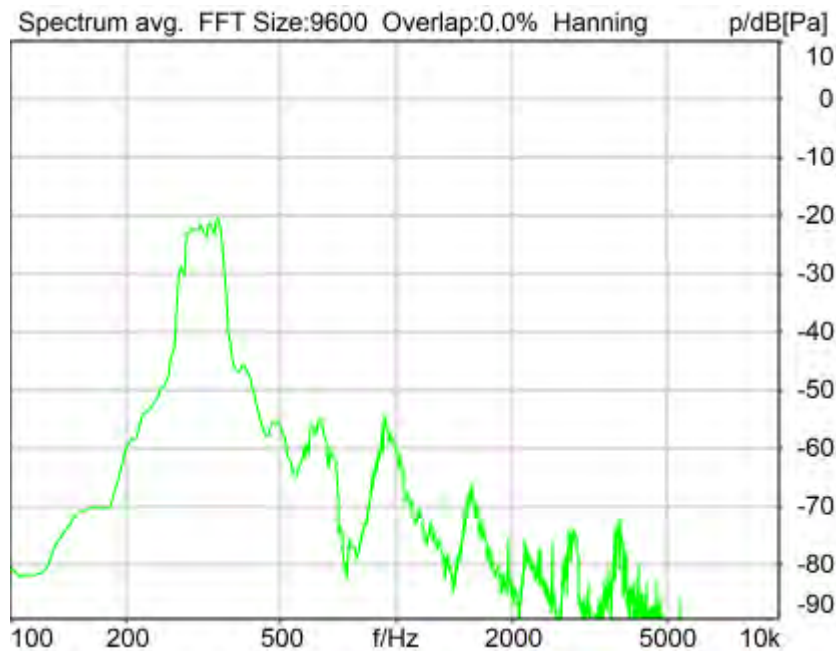

Distortion (Noise) RCV (packed): 27.86 dB (4.05%) Ok

**Ok**

2024/1/16 14:36 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_315hz\_sr20dbm0\_v02.dat

Level adj. Ch1      -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	245.0 Hz
Stimulus min.	245.0 Hz	Stimulus max.	390.0 Hz
Analysis min.	20.0 Hz	Analysis min.	20.0 Hz
Analysis (2) min.	395.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_315Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
-------	--------------------------	----------	-----

Polarisation Voltage 200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass  
-----


Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 400 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

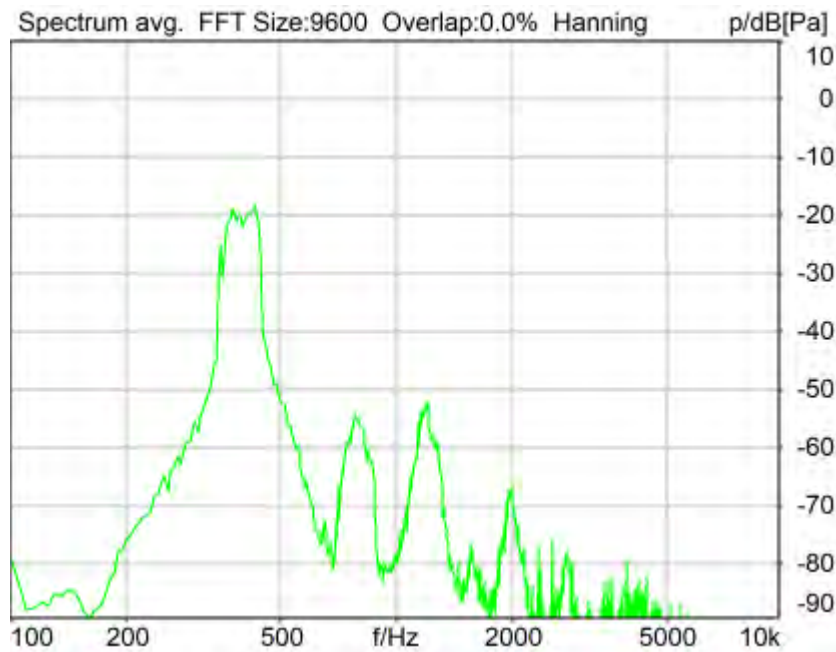

Distortion (Noise) RCV (packed): 29.72 dB (3.27%) Ok

**Ok**

2024/1/16 14:36 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting    off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

#### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

#### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

#### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

#### Analysis

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

#### Special Features

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_400Hz

#### Hardware Config Settings

Used Setting HEAD 2G3G labCORE NetSim

#### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

#### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

#### Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

#### Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 500 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

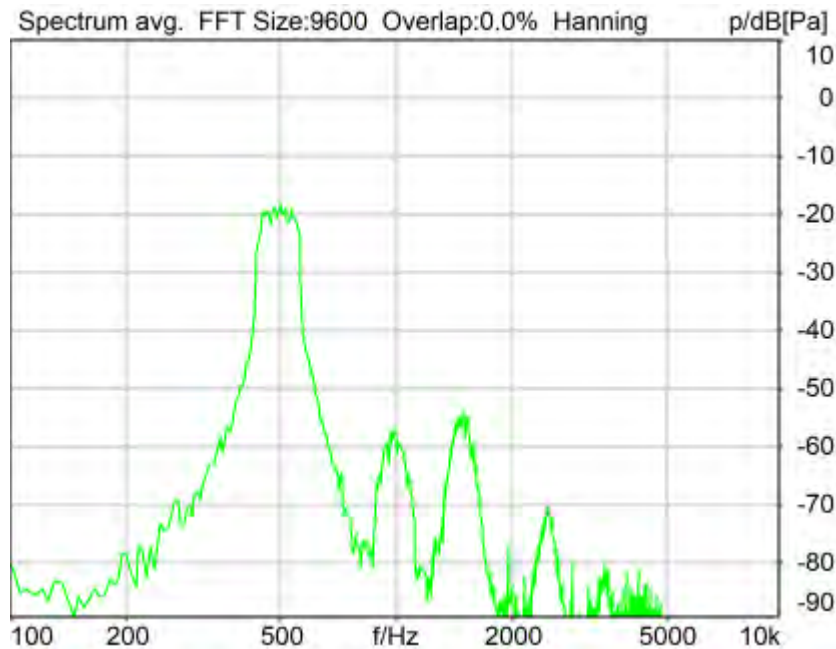

Distortion (Noise) RCV (packed): 30.32 dB (3.05%) Ok

**Ok**

2024/1/16 14:36 ACQUA 5.1.200



Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Overlap	0 %
Frequency base	Transformation	Smooth	Off
FFT size	9600	Stimulus max.	595.0 Hz
Window function.	Hanning	Analysis max.	405.0 Hz
dB weighting	A Weighting	Analysis (2) max.	20000.0 Hz
Stimulus min.	410.0 Hz		
Analysis min.	20.0 Hz		
Analysis (2) min.	600.0 Hz		

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_500Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
labCORE Routing  
Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker

Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode      Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 630 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

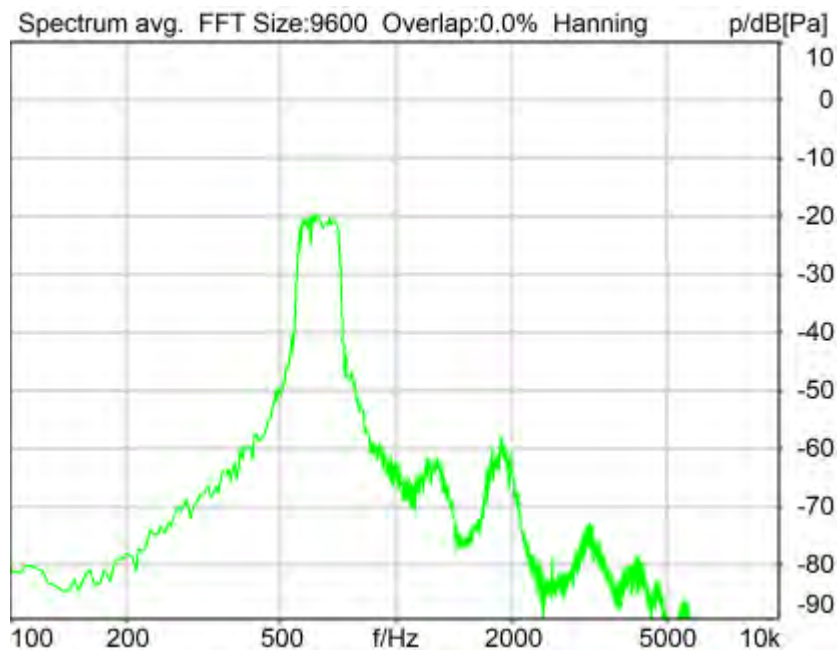

Distortion (Noise) RCV (packed): 29.01 dB (3.54%) Ok

**Ok**

2024/1/16 14:37 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	525.0 Hz	Stimulus max.	745.0 Hz
Analysis min.	20.0 Hz	Analysis max.	520.0 Hz
Analysis (2) min.	750.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_630Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))****Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1      -40.00 dB                      Gain out 2      0.00 dB  
Gain in 1        0.00 dB                                      Gain in 2        0.00 dB  
Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 800 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

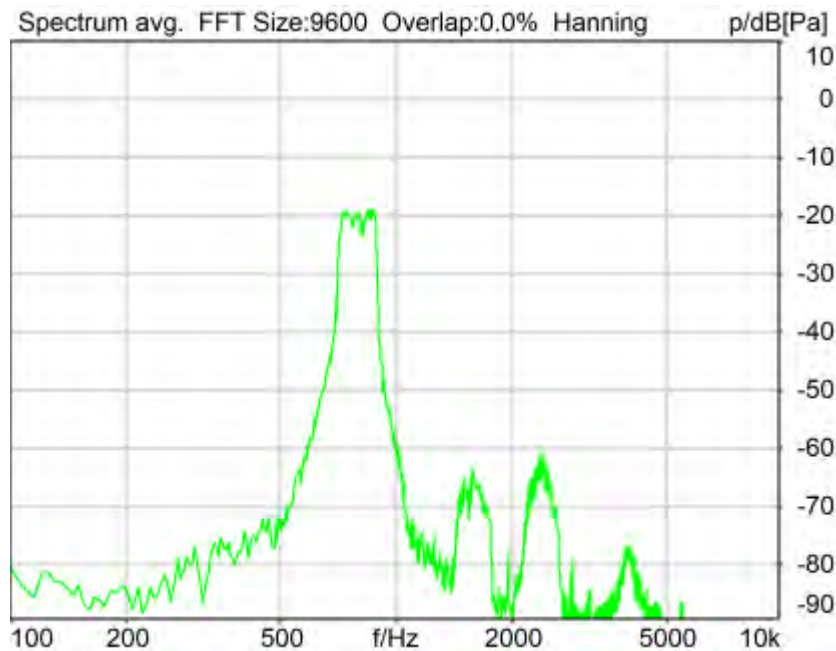

Distortion (Noise) RCV (packed): 32.19 dB (2.46%) Ok

**Ok**

2024/1/16 14:37 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat

Level adj. Ch1      -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	675.0 Hz
Stimulus min.	675.0 Hz	Stimulus max.	925.0 Hz
Analysis min.	20.0 Hz	Analysis max.	670.0 Hz
Analysis (2) min.	930.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_800Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
-------	--------------------------	----------	-----

Polarisation Voltage 200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass


-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 1000 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

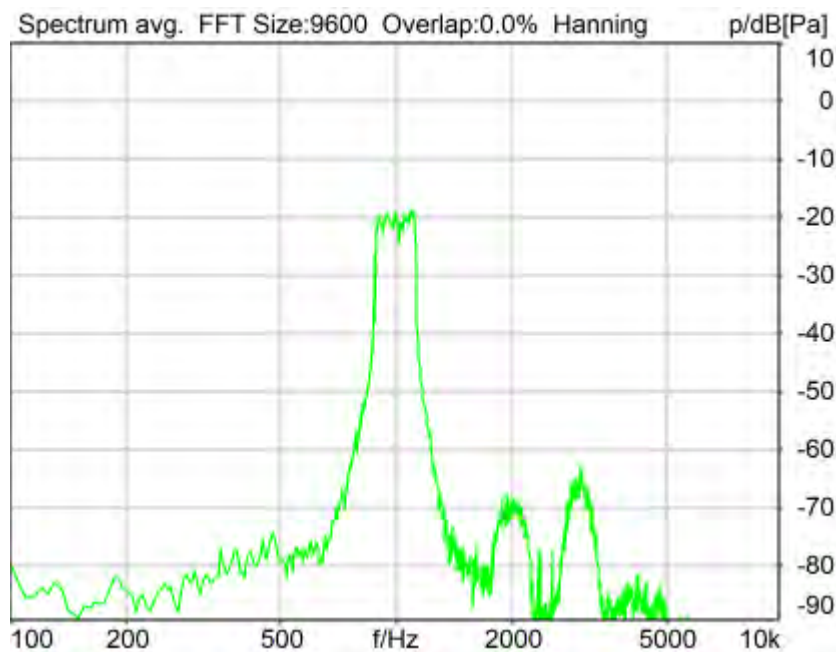

Distortion (Noise) RCV (packed): 33.75 dB (2.05%) Ok

**Ok**

2024/1/16 14:38 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting    off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**



Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1250 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

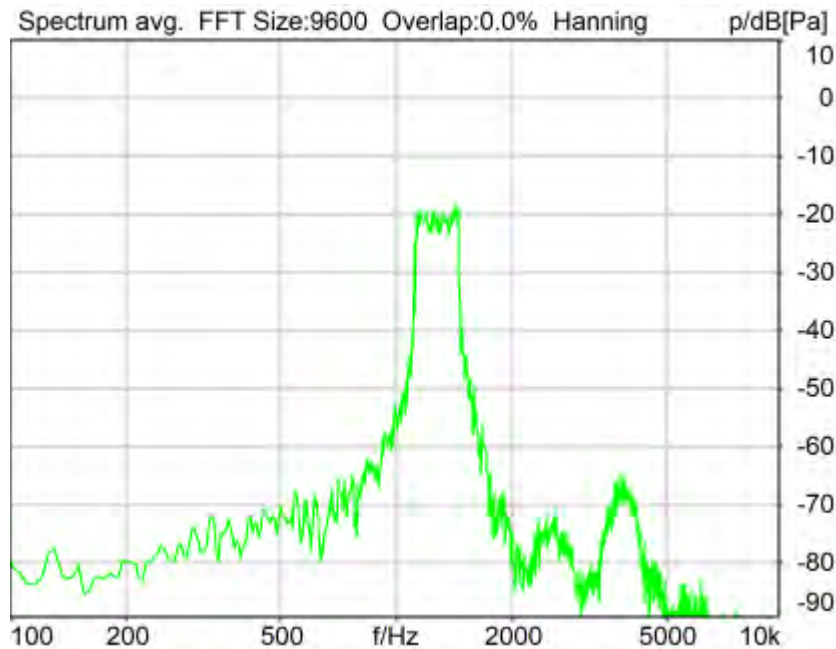

Distortion (Noise) RCV (packed): 23.44 dB (6.73%) Ok

**Ok**

2024/1/16 14:38 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Overlap	0 %
Frequency base	Transformation	Smooth	Off
FFT size	9600	Stimulus min.	1085.0 Hz
Window function.	Hanning	Analysis min.	20.0 Hz
dB weighting	A Weighting	Stimulus max.	1450.0 Hz
Stimulus min.	1085.0 Hz	Analysis max.	1080.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	1455.0 Hz		

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1250Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
labCORE Routing  
Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker

Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode      Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 1600 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

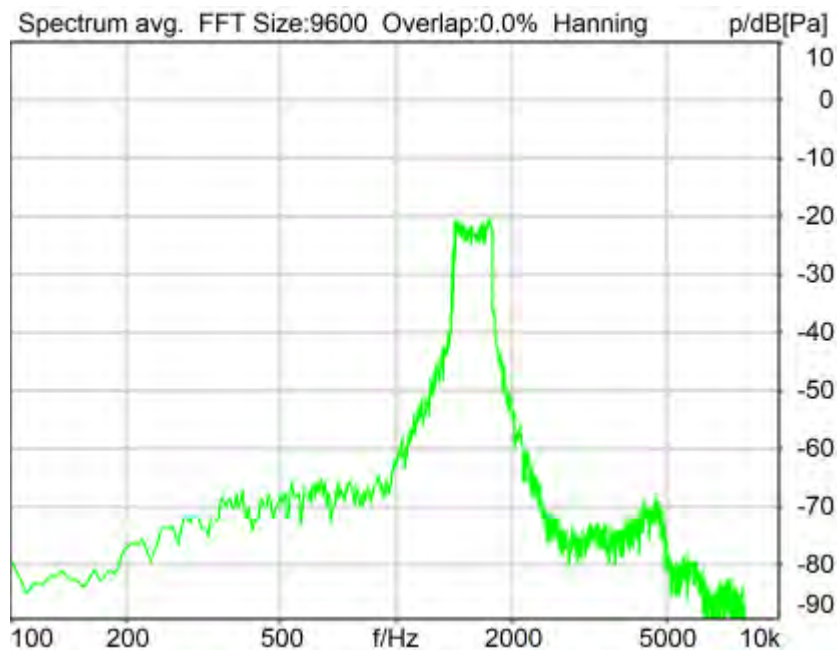

Distortion (Noise) RCV (packed): 22.74 dB (7.29%) Ok

**Ok**

2024/1/16 14:39 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

#### Analysis

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	1815.0 Hz
Stimulus min.	1375.0 Hz	Analysis max.	1370.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	1820.0 Hz		

#### Special Features

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_1600Hz

#### Hardware Config Settings

Used Setting HEAD 2G3G labCORE NetSim

#### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

#### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

#### Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

#### Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

#### Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

#### BEQ Settings (BEQ Filter 1)

Block mode Bypass

#### Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


#### HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1      -40.00 dB                      Gain out 2      0.00 dB  
 Gain in 1      0.00 dB                              Gain in 2      0.00 dB  
 Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 2000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

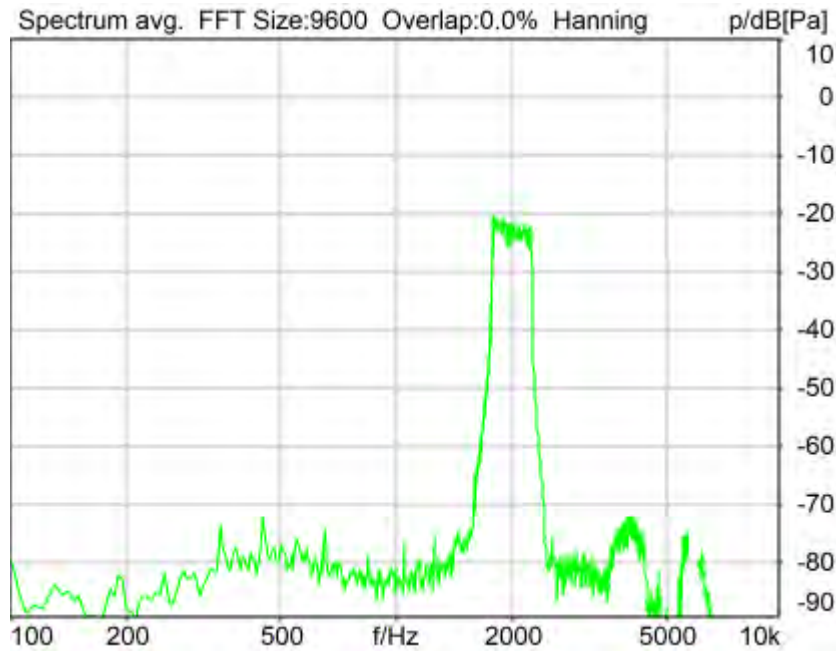

Distortion (Noise) RCV (packed): 32.61 dB (2.34%) Ok

**Ok**

2024/1/16 14:39 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat

Level adj. Ch1      -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	1745.0 Hz
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis min.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

Polarisation Voltage 200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass


-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 2500 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

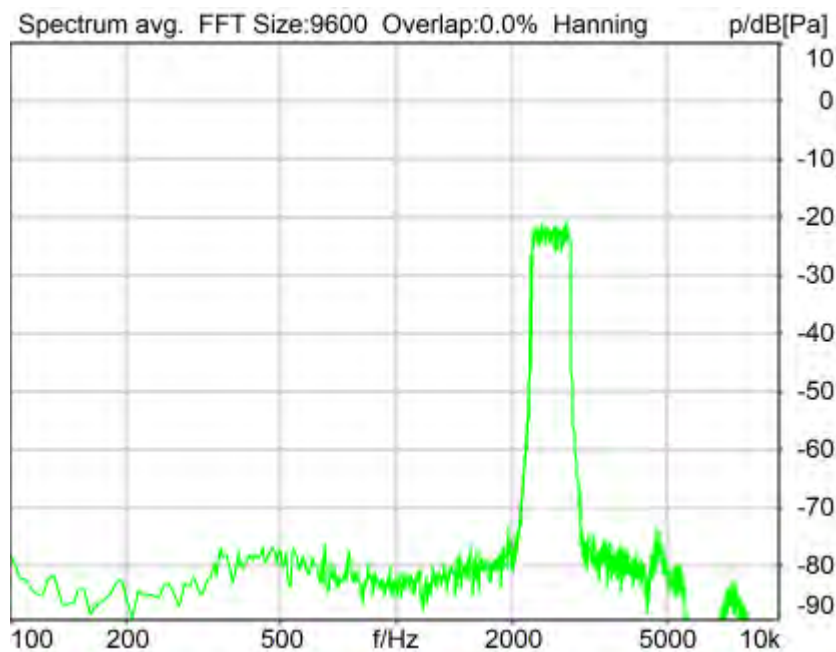

Distortion (Noise) RCV (packed): 38.56 dB (1.18%) Ok

**Ok**

2024/1/16 14:39 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting    off



Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_2500Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 3150 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

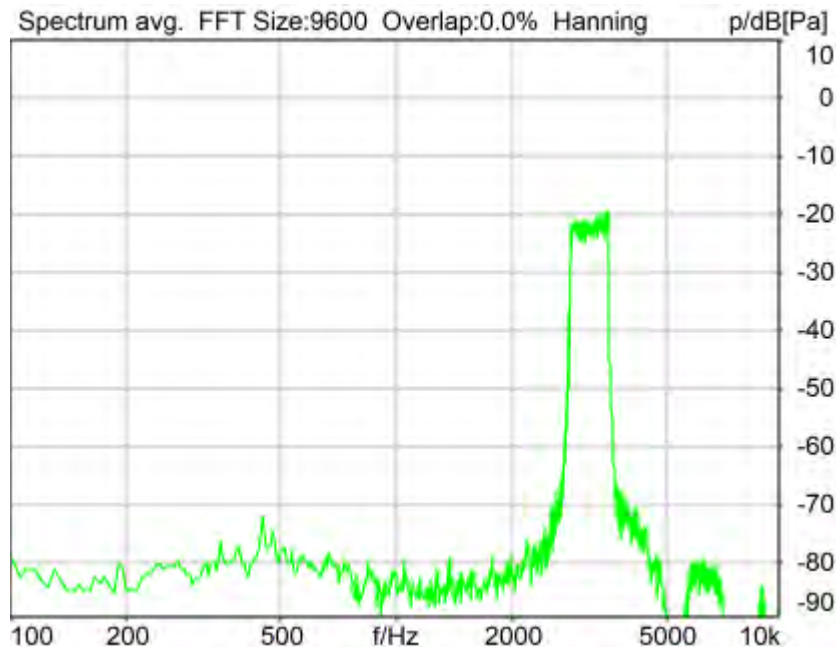

Distortion (Noise) RCV (packed): 38.40 dB (1.20%) Ok

**Ok**

2024/1/16 14:40 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat  
Level adj. Ch1      -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1:      HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Overlap	0 %
Frequency base	Transformation	Smooth	Off
FFT size	9600	Stimulus min.	2785.0 Hz
Window function.	Hanning	Stimulus max.	3585.0 Hz
dB weighting	A Weighting	Analysis min.	20.0 Hz
Stimulus min.	2785.0 Hz	Analysis max.	2780.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	3590.0 Hz		

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable      RCVWB10\_3150Hz

**Hardware Config Settings**

Used Setting      HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
labCORE Routing  
Out Channel 1 ->      Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker

Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode      Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 4000 Hz WB**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

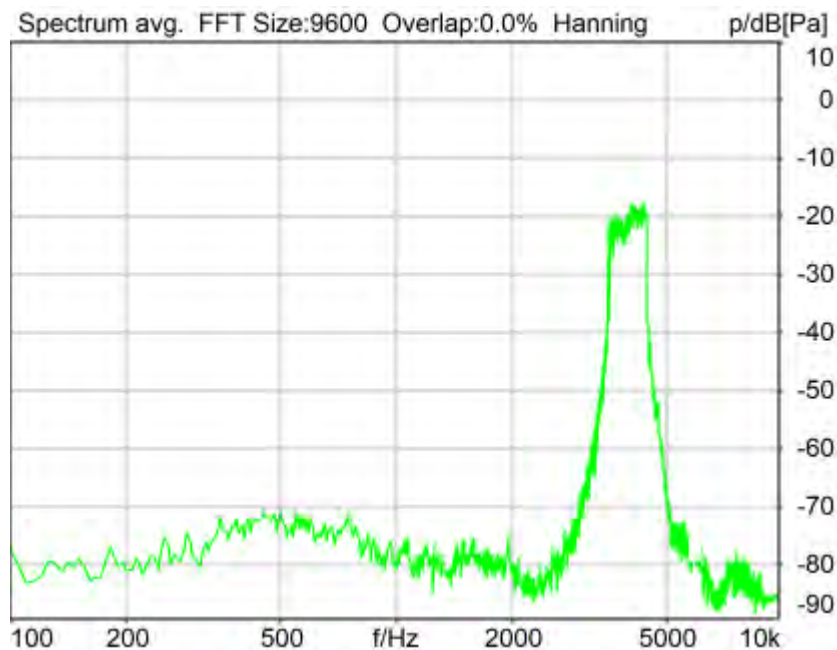

Distortion (Noise) RCV (packed): 28.16 dB (3.91%) Ok

**Ok**

2024/1/16 14:40 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_4000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	4500.0 Hz
Stimulus min.	3515.0 Hz	Analysis max.	3510.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	4505.0 Hz		

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_4000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm

Gain out 1 -40.00 dB  
Gain in 1 0.00 dB  
Mic 1 Power Supply Off

Gain out 2 0.00 dB  
Gain in 2 0.00 dB  
Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 5000 Hz WB

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N

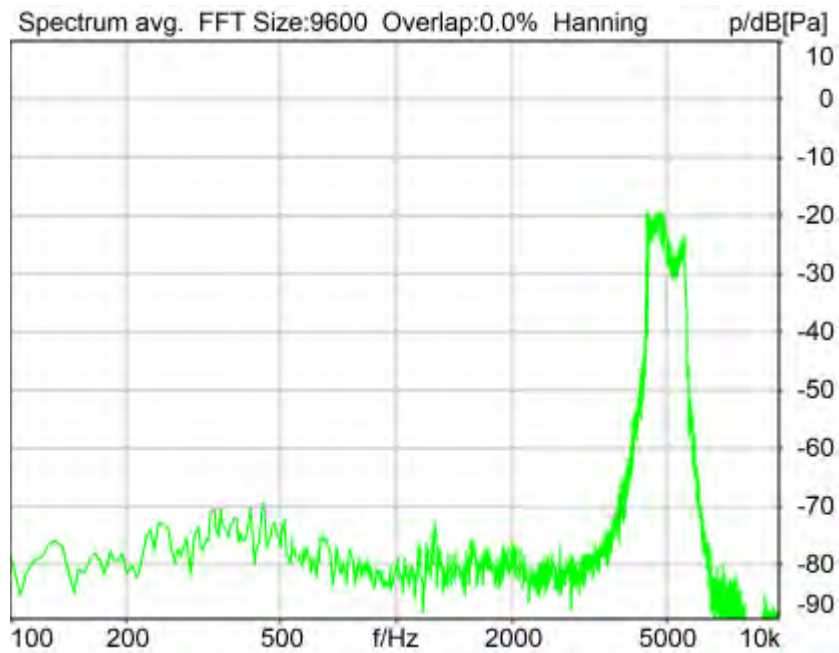

Distortion (Noise) RCV (packed): 29.00 dB (3.55%) Ok

**Ok**

2024/1/16 14:41 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_5000hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.4 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	4430.0 Hz
Stimulus min.	4430.0 Hz	Stimulus max.	5660.0 Hz
Analysis min.	20.0 Hz	Analysis min.	20.0 Hz
Analysis (2) min.	5665.0 Hz	Analysis max.	4425.0 Hz
		Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))  
Store to variable RCVWB10\_5000Hz

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off



Polarisation Voltage 200V                      Supply Voltage     ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass  
-----

Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**Report - Receive Distortion and Noise (Conversational Gain)**

TIA-5050 (2018-01) \ Measurements \ Wideband \ 5.2 Receive Distortion and Noise 2N


Region	Frequency	SDNR
1	250Hz	29.09 dB
2	315Hz	27.86 dB
3	400Hz	29.72 dB
4	500Hz	30.32 dB
5	630Hz	29.01 dB
6	800Hz	32.19 dB
7	1000Hz	33.75 dB
8	1250Hz	23.44 dB
9	1600Hz	22.74 dB
10	2000Hz	32.61 dB
11	2500Hz	38.56 dB
12	3150Hz	38.40 dB
13	4000Hz	28.16 dB
14	5000Hz	29.00 dB

All SDNRs were greater than 20.0 dB, requirement was met.  
Smallest SDNR was 22.74dB at 1600Hz.

2024/1/16 14:41 ACQUA

**5.3 Frequency Response 8N FF**

TIA-5050 (2018-01) \ Measurements \ Wideband

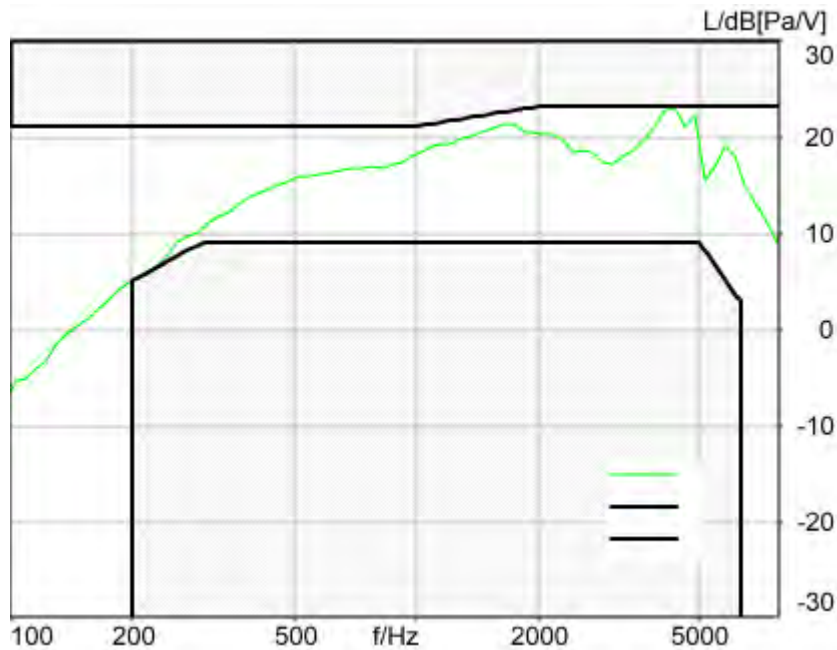

Absolute minimal distance  
0.16 dB at 4369.4 Hz Ok

**Ok**

2024/1/16 14:49 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-4.0 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 167.6000 ms (D\_RCV\_WB, Delay (Cross))

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr. 12306613


Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.3 Frequency Response 8N DF**

TIA-5050 (2018-01) \ Measurements \ Wideband

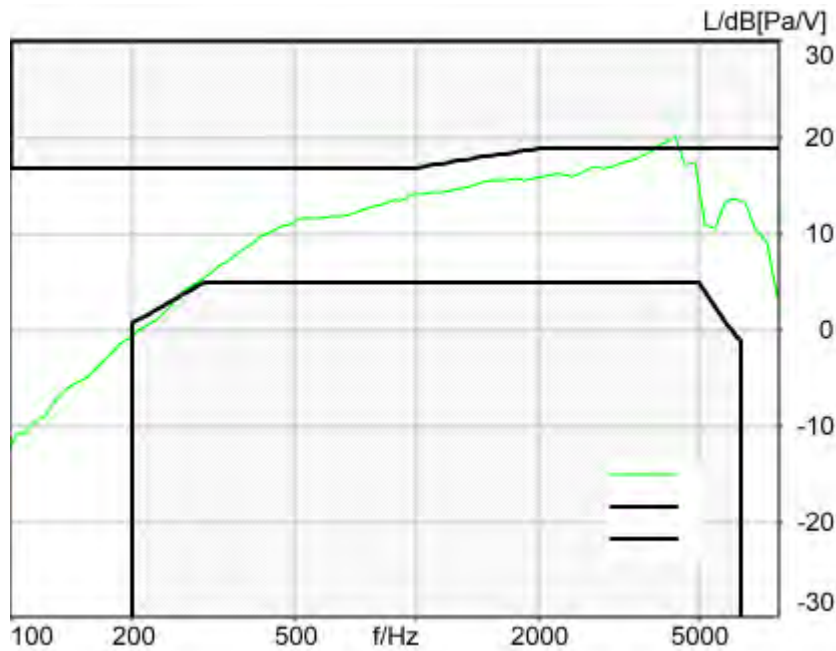

Absolute minimal distance  
-1.25 dB at 4369.4 Hz Not Ok

**Not Ok**

2024/1/18 14:55 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
--	-------

Run 1	Fit into tolerance
-------	--------------------

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"  
Alteration:  
0.2 s Pause added at the beginning of the file.  
0.8 s Pause added at the end of the file.  
filtered with 8.0 kHz low-pass filter  
signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2df_ieeee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 158.6000 ms (D\_RCV\_WB, Delay (Cross))

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1 0.00 dB Range Ch. 2 0.00 dB

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage 200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

### 5.3 Frequency Response 2N FF

TIA-5050 (2018-01) \ Measurements \ Wideband



Absolute minimal distance  
0.04 dB at 4369.4 Hz Ok

**Ok**

2024/1/19 14:57 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieee269\_wb\_r20\_v01.dat**

Level adj. Ch1      -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the end of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	0.6 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1:      HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz

Auto adjust      Centrate      Max. freq. for tol.      8000.0 Hz

**Special Features**

Compensate delay 158.6000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

BEQ Settings (BEQ Filter 1)

Block mode      Bypass

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.3 Frequency Response 2N DF**

TIA-5050 (2018-01) \ Measurements \ Wideband



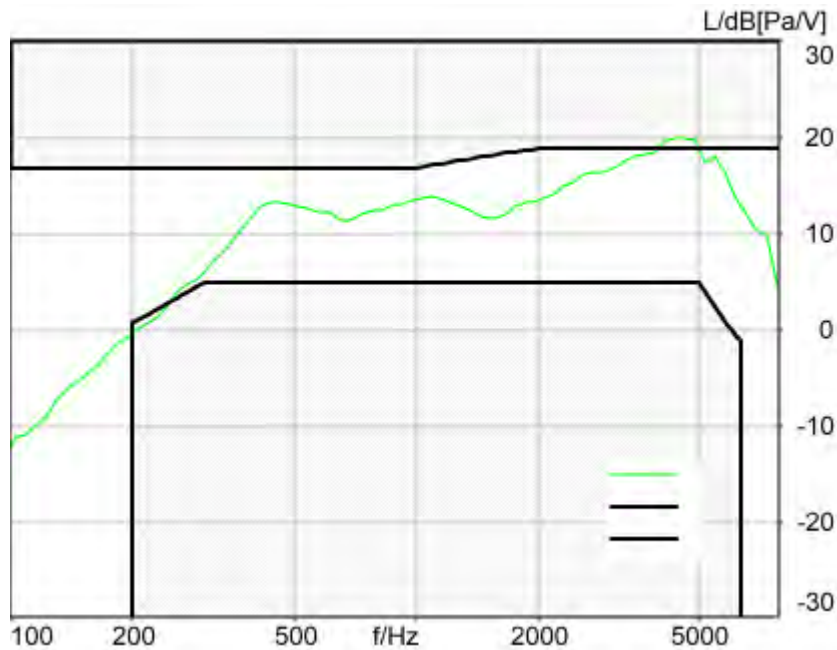

Absolute minimal distance  
-1.00 dB at 4369.4 Hz Not Ok

**Not Ok**

2024/1/19 14:57 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_wb\_r20\_v01.dat**

Level adj. Ch1 -90.0 dB  
WIDEBAND IEEE-269-2010 Real Speech Signal at Channel 2  
Pause 0.5 s +  
Real Speech (english, male speaker) 11.5 s, Active Speech Level: -22,2 dBV, margin 15.9 dB +  
Pause till end of file  
Signal level (ch2): -22,2 dBV Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 8.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	0.6 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 1.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2df_ieeee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hawb.fft		
Tol. scheme file	521_rcv_frq_man_hawb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	8000.0 Hz

**Special Features**

Compensate delay 158.6000 ms (D\_RCV\_WB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 2 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 3 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V  
 Channel In 4 Settings  
 Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
 Polarisation Voltage200V Supply Voltage ±60V

BEQ Settings (BEQ Filter 1)

Block mode        Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **Measurement Protocol**

Measurement Object	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
Project	HMD_2322#N159V

Project	TIA-5050 (2018-01)
Report Generation Date	2024/2/6 10:25
Responsible Person	audio

**Status Overview**

SMD	Status	Single Value Description	Single Value	Object
Overall Receive Delay NB	Done	Delay (Cross) [ms]	157.8	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.1a Receive Volume Control Performance 8N NB	Not Ok	Corrected Speech Level [dB[SPL]]	17.27	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.1b Receive Volume Control Performance 2N NB	Ok	Corrected Speech Level [dB[SPL]]	11.51	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	33.35	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	34.05	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 630 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	36.22	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	35.82	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	42.22	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	33.05	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.97	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	46.49	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	36.65	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	34.21	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 1600Hz)	29.97	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 400 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	31.26	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	31.98	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise	Ok	Distortion (Noise) [dB],	35.76	LTE Band


- 630 Hz NB		0.0 dB		12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 800 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	38.61	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 1000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.00	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 1250 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	21.74	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 1600 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	29.89	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 2000 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	22.52	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 2500 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	40.10	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.2 RCV Distortion and Noise - 3150 Hz NB	Ok	Distortion (Noise) [dB], 0.0 dB	39.50	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
Report - Receive Distortion and Noise (Conversational Gain)	Ok	Minimum SDNR [dB], (occured at 1250Hz)	21.74	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.3 Frequency Response 8N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 1647.8 Hz	1.27	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.3 Frequency Response 8N DF HANB	Not Ok	Min. dist. to tolerance scheme [dB], 2057.5 Hz	-0.36	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.3 Frequency Response 2N FF HANB	Ok	Min. dist. to tolerance scheme [dB], 823.9 Hz	0.29	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095
5.3 Frequency Response 2N DF HANB	Ok	Min. dist. to tolerance scheme [dB], 1285.9 Hz	0.37	LTE Band 12_10QPSK_50RB_0_EVS NB 24.4kbps_CH23095

---

Overall Receive Delay NB	5
5.1a Receive Volume Control Performance 8N NB	7
5.1b Receive Volume Control Performance 2N NB	9
5.2 RCV Distortion and Noise - 400 Hz NB	10
5.2 RCV Distortion and Noise - 500 Hz NB	13
5.2 RCV Distortion and Noise - 630 Hz NB	15
5.2 RCV Distortion and Noise - 800 Hz NB	17
5.2 RCV Distortion and Noise - 1000 Hz NB	19
5.2 RCV Distortion and Noise - 1250 Hz NB	21
5.2 RCV Distortion and Noise - 1600 Hz NB	23
5.2 RCV Distortion and Noise - 2000 Hz NB	26
5.2 RCV Distortion and Noise - 2500 Hz NB	28
5.2 RCV Distortion and Noise - 3150 Hz NB	30
Report - Receive Distortion and Noise (Conversational Gain)	32
5.2 RCV Distortion and Noise - 400 Hz NB	32
5.2 RCV Distortion and Noise - 500 Hz NB	35
5.2 RCV Distortion and Noise - 630 Hz NB	37
5.2 RCV Distortion and Noise - 800 Hz NB	39
5.2 RCV Distortion and Noise - 1000 Hz NB	41
5.2 RCV Distortion and Noise - 1250 Hz NB	43
5.2 RCV Distortion and Noise - 1600 Hz NB	45
5.2 RCV Distortion and Noise - 2000 Hz NB	48
5.2 RCV Distortion and Noise - 2500 Hz NB	50
5.2 RCV Distortion and Noise - 3150 Hz NB	52
Report - Receive Distortion and Noise (Conversational Gain)	54
5.3 Frequency Response 8N FF HANB	54
5.3 Frequency Response 8N DF HANB	57
5.3 Frequency Response 2N FF HANB	59
5.3 Frequency Response 2N DF HANB	61

## Overall Receive Delay NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ Preparation - Delay measurement

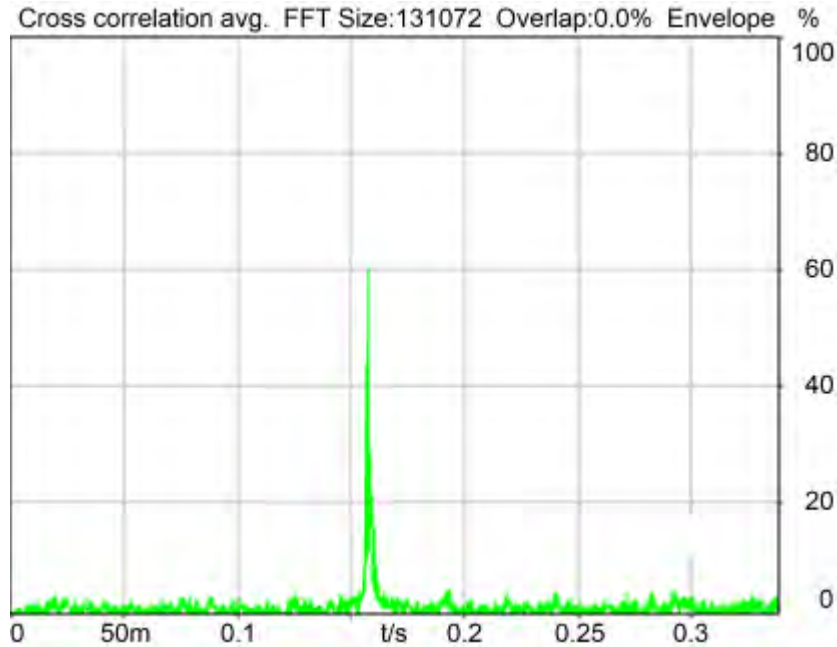

Delay (Cross): 157.8 ms

2024/1/19 9:19 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Source: cssnb1b\_r1s.dat

Level adj. Ch1 -90.0 dB

CSSnb1b\_R1s.dat - CS-signal with special 1s random noise

NARROWBAND Composite Source Signal RCV P.501 (1 burst) at Channel 2

Pause 0.5 s +

voiced signal + 4000 Hz band limited random noise 1.0 s +

Pause till end of file

Signal level (ch2): -14.7 dBm0 (corresponds to approx. -16.0 dBm0 for a 350 ms CSS considering 101 ms Pause) from 0.5s to 1.544s for 4-k FFT, Hanning window,

75 % overlap in frequency range of 100 to 4000 Hz

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.1: 0.00 dB

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))



**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.1 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Range start	550.00 ms	Range length	1950.00 ms
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	131072	Overlap	0 %
Window function.	Hanning	Smooth	Off
Delayed channel	None		
Valid range start	-1228.79 ms	Valid range end	1228.81 ms

**Special Features**

Show source signal Source ch.2 Store to variable D\_RCV\_NB

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.1a Receive Volume Control Performance 8N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

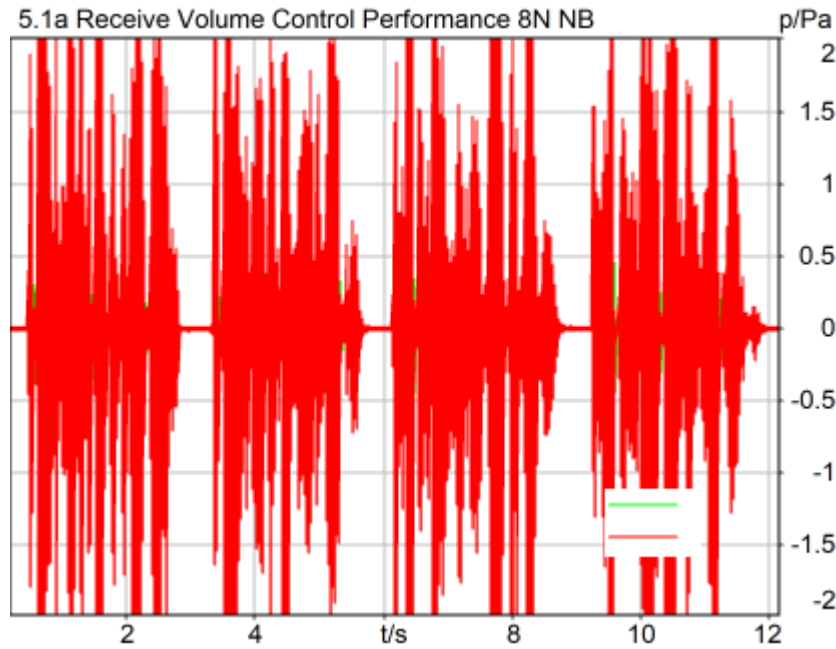

### Correction

X - 70

Speech Level RCV: 87.27 dB[SPL], Act.: 86.17%

Corrected Speech Level: 17.27 dB[SPL] Not Ok

### Not Ok

2024/1/22 20:36 ACQUA 5.1.200

### Limits

	lower
Run 1	18.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2		
Range start	200.00 ms	Range length	12000.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
Bandpass filter	Narrow Band	Margin (15.9dB nom)	
15.90 dB			

### Special Features

Show source signal Source ch.2  
Compensate delay 157.8000 ms (D\_RCV\_NB, Delay (Cross))

### Hardware Config Settings

Used Setting HEAD 2G3G labCORE NetSim

### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

### Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

### Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

### Microphone Settings (Mic Amp. (Slot 6))

#### Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

#### Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

#### Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

#### Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

### BEQ Settings (BEQ Filter 1)

Block mode Bypass

### Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

### HIB Settings


HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB

Mic 1 Power Supply Off

Mic 2 Power Supply Off

## 5.1b Receive Volume Control Performance 2N NB

TIA-5050 (2018-01) \ Measurements \ Narrowband

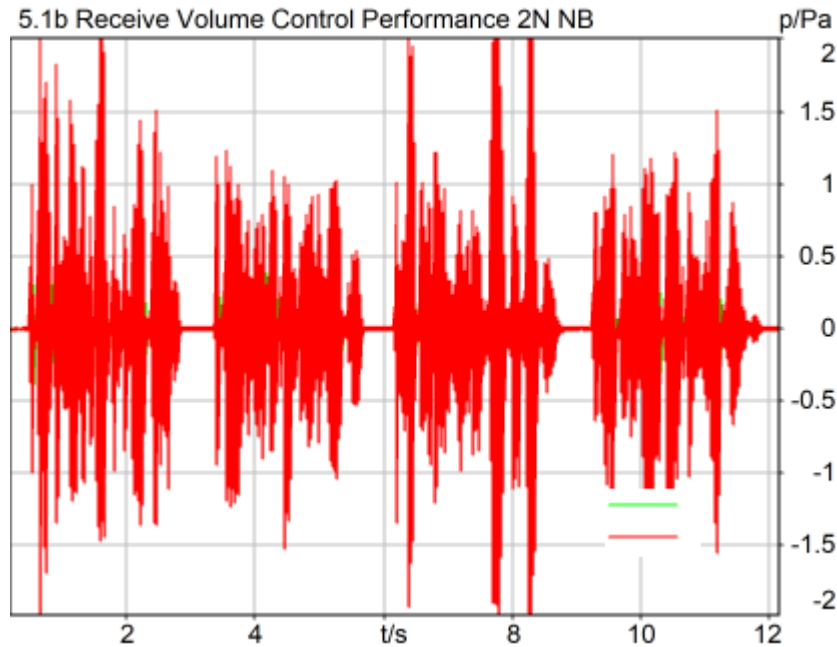

### Correction

X - 70

Speech Level RCV: 81.51 dB[SPL], Act.: 85.98%

Corrected Speech Level: 11.51 dB[SPL] Ok

### Ok

2024/1/22 20:33 ACQUA 5.1.200

### Limits

	lower
Run 1	6.00 dB20uPa

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	12000.00 ms
Range start	200.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	Margin (15.9dB nom)	
Bandpass filter	Narrow Band		
15.90 dB			

**Special Features**

Show source signal Source ch.2  
Compensate delay 157.8000 ms (D\_RCV\_NB, Delay (Cross))

**Hardware Config Settings**

Used Setting HEAD 2G3G labCORE NetSim

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

## 5.2 RCV Distortion and Noise - 400 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 33.35 dB (2.15%) Ok

Ok

2024/1/19 9:13 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
		Delta C	0.0 °

Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-3.6 mm	Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	480.0 Hz
Stimulus min.	320.0 Hz	Analysis max.	315.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	485.0 Hz		

**Special Features**

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

**Channel In 1 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 2 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 3 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**Channel In 4 Settings**

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

## 5.2 RCV Distortion and Noise - 500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

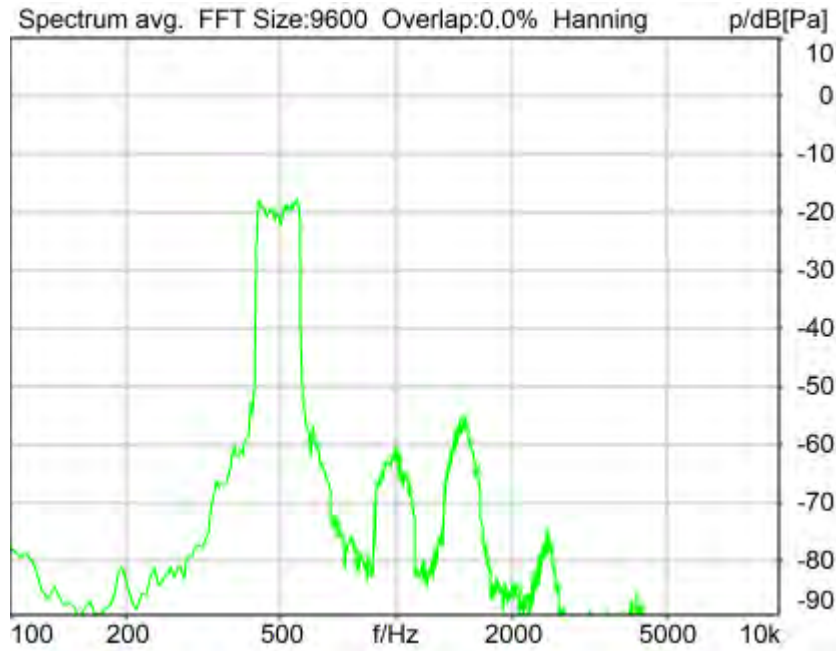

Distortion (Noise) RCV (packed): 34.05 dB (1.98%) Ok

**Ok**

2024/1/19 9:13 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))



**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 7.9 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	410.0 Hz
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

## 5.2 RCV Distortion and Noise - 630 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

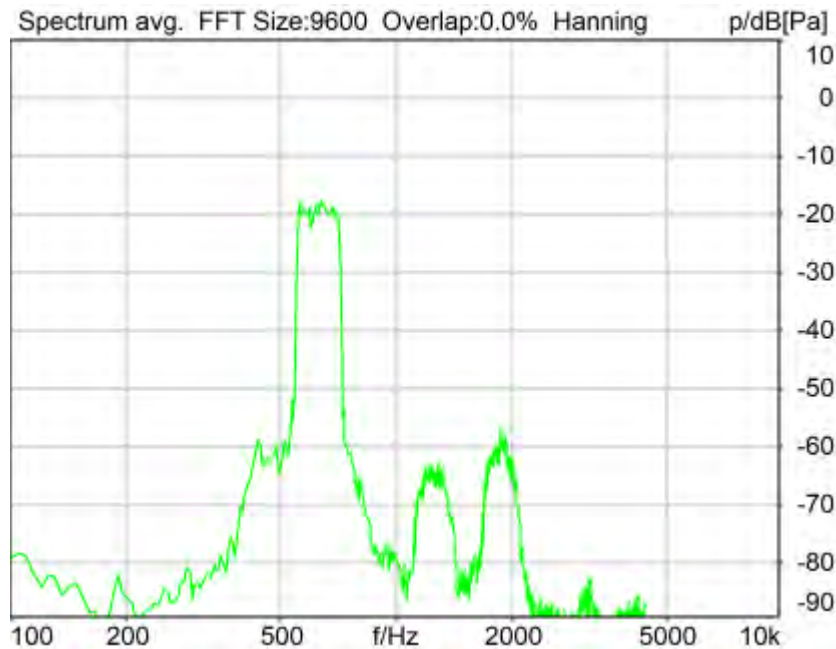

Distortion (Noise) RCV (packed): 36.22 dB (1.54%) Ok

Ok

2024/1/19 9:13 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.1 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	745.0 Hz
Stimulus min.	525.0 Hz	Analysis max.	520.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	750.0 Hz		

**Special Features**

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))

Store to variable RCVNB10\_630Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz

Polarisation Voltage200V	Supply Voltage	±60V
Channel In 3 Settings		
Range 114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage200V	Supply Voltage	±60V
Channel In 4 Settings		
Range 114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode Bypass  
-----

Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr. 12306613	Pinna Type	Type 3.3
-------------------	------------	----------

**HIB Settings**

HIB Name 60020095	Serial	60020095
HIB Mode Mobile Measurement	Impedance	32 Ohm
Gain out 1 -40.00 dB	Gain out 2	0.00 dB
Gain in 1 0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off	Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 800 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 35.82 dB (1.62%) Ok

**Ok**

2024/1/19 9:14 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °

Ear Type 3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.1 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	925.0 Hz
Stimulus min.	675.0 Hz	Analysis max.	670.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	930.0 Hz		

**Special Features**

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1 0.00 dB Range Ch. 2 0.00 dB

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage 200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

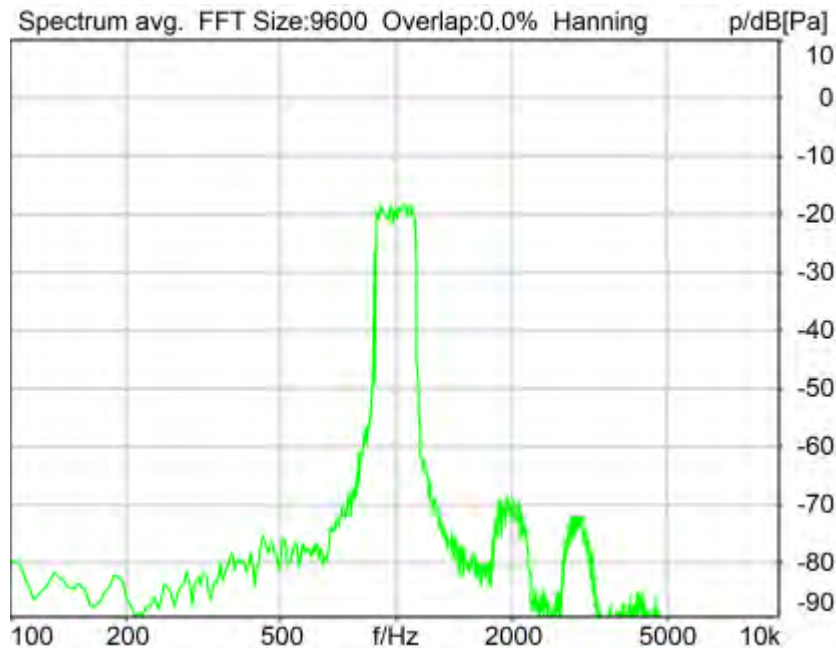

Distortion (Noise) RCV (packed): 42.22 dB (0.77%) Ok

**Ok**

2024/1/19 9:14 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	855.0 Hz
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))

Store to variable RCVNB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1250 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



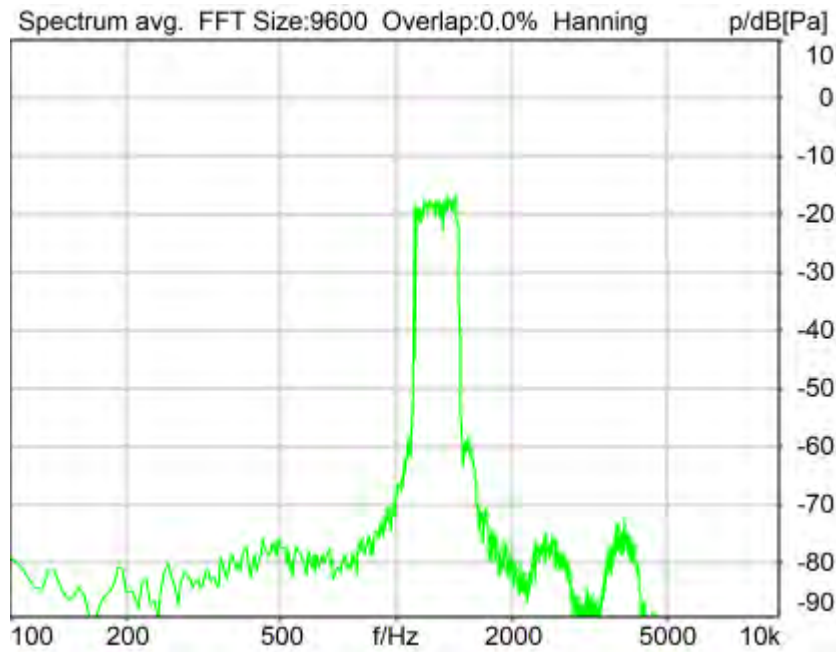

Distortion (Noise) RCV (packed): 33.05 dB (2.22%) Ok

**Ok**

2024/1/19 9:15 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.1 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	1450.0 Hz
Stimulus min.	1085.0 Hz	Analysis max.	1080.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	1455.0 Hz		

**Special Features**

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1600 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

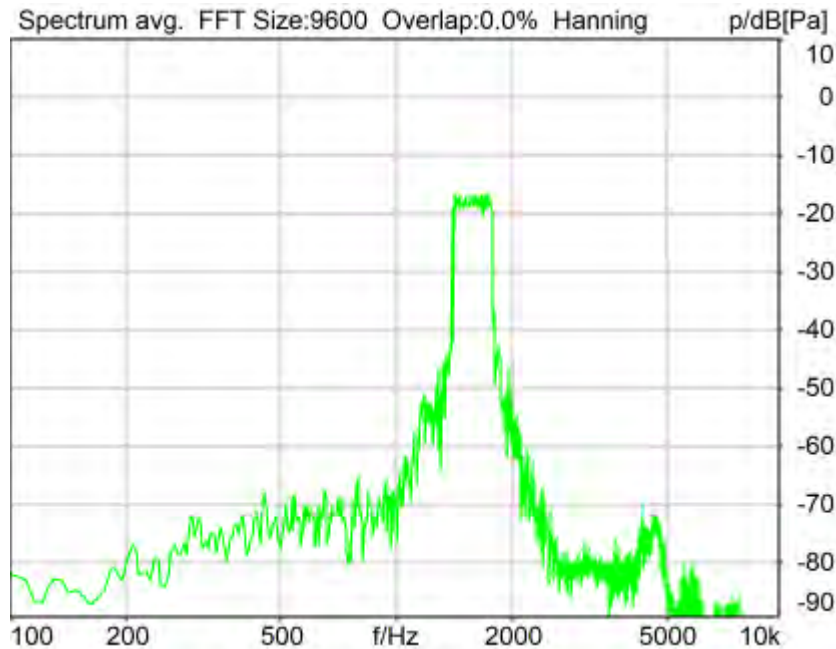

Distortion (Noise) RCV (packed): 29.97 dB (3.17%) Ok

**Ok**

2024/1/19 9:15 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source:** act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
		Rotation Delta C	0.0 °

MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-3.6 mm	Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	1375.0 Hz
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

### Special Features

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_1600Hz

### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

### Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

### Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

### Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

### BEQ Settings (BEQ Filter 1)

Block mode Bypass

### Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 2000 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N



Distortion (Noise) RCV (packed): 46.49 dB (0.47%) Ok

**Ok**

2024/1/19 9:16 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	1745.0 Hz	Stimulus max.	2275.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1740.0 Hz
Analysis (2) min.	2280.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage 200V Supply Voltage ±60V

BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name 60020095 Serial 60020095  
HIB Mode Mobile Measurement Impedance 32 Ohm  
Gain out 1 -40.00 dB Gain out 2 0.00 dB  
Gain in 1 0.00 dB Gain in 2 0.00 dB  
Mic 1 Power Supply Off Mic 2 Power Supply Off

## 5.2 RCV Distortion and Noise - 2500 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

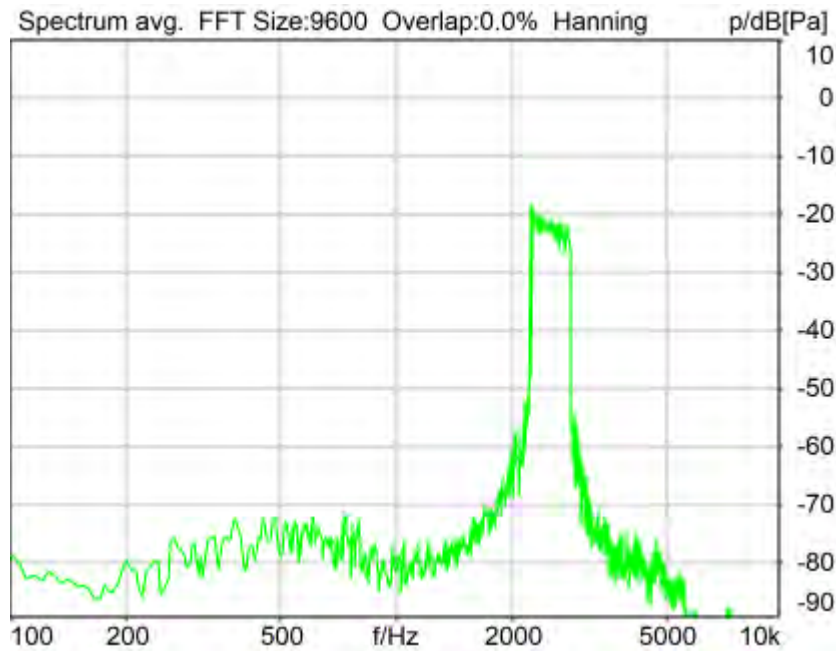

Distortion (Noise) RCV (packed): 36.65 dB (1.47%) Ok

**Ok**

2024/1/19 9:16 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

Limits

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings



Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode      Bypass  
-----


Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.            12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 3150 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

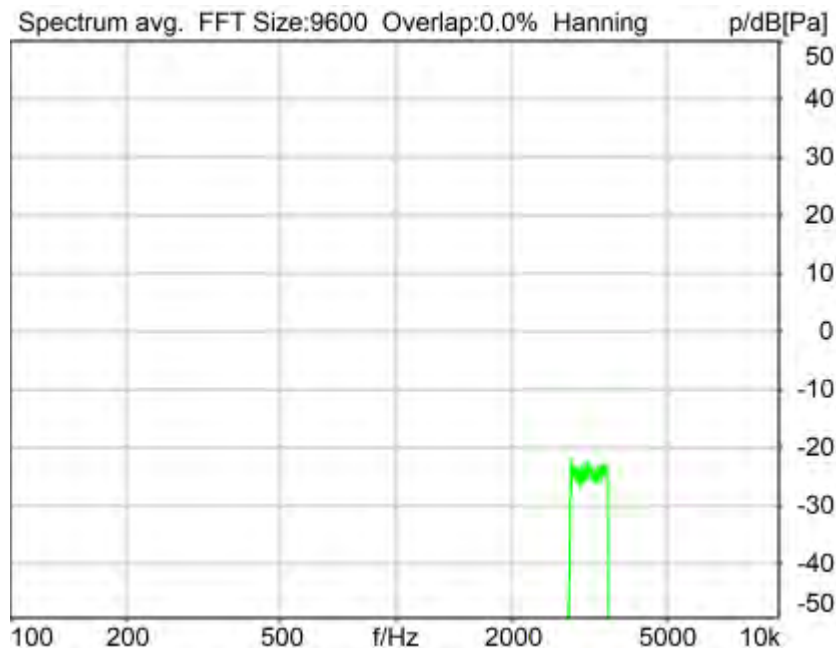

Distortion (Noise) RCV (packed): 34.21 dB (1.95%) Ok

**Ok**

2024/1/19 9:16 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	2785.0 Hz
Stimulus min.	2785.0 Hz	Stimulus max.	3585.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2780.0 Hz
Analysis (2) min.	3590.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))  
Store to variable RCVNB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1      0.00 dB                      Ch. 0 Float      On  
Range Ch. 2      0.00 dB                      Ch. 1 Float      On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1      0.00 dB                      Range Ch. 2      0.00 dB

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range              114 dB[SPL] @ 12.5 mV/Pa    Highpass          Off  
Polarisation Voltage200V                      Supply Voltage    ±60V

Channel In 2 Settings

Range              114 dB[SPL] @ 12.5 mV/Pa    Highpass          20Hz  
Polarisation Voltage200V                      Supply Voltage    ±60V

Channel In 3 Settings

Range              114 dB[SPL] @ 12.5 mV/Pa    Highpass          Off  
Polarisation Voltage200V                      Supply Voltage    ±60V

Channel In 4 Settings

Range              114 dB[SPL] @ 12.5 mV/Pa    Highpass          Off  
Polarisation Voltage200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode        Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.            12306613                      Pinna Type        Type 3.3

**HIB Settings**

HIB Name          60020095                      Serial              60020095  
HIB Mode          Mobile Measurement                      Impedance        32 Ohm  
Gain out 1        -40.00 dB                      Gain out 2        0.00 dB  
Gain in 1          0.00 dB                        Gain in 2        0.00 dB  
Mic 1 Power Supply Off                      Mic 2 Power Supply Off

## Report - Receive Distortion and Noise (Conversational Gain)

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 8N

Region	Frequency	SDNR
1	400Hz	33.35 dB
2	500Hz	34.05 dB
3	630Hz	36.22 dB
4	800Hz	35.82 dB
5	1000Hz	42.22 dB
6	1250Hz	33.05 dB
7	1600Hz	29.97 dB
8	2000Hz	46.49 dB
9	2500Hz	36.65 dB
10	3150Hz	34.21 dB


All SDNRs were greater than 20.0 dB, requirement was met.

Smallest SDNR was 29.97dB at 1600Hz.

2024/1/19 9:17 ACQUA

## 5.2 RCV Distortion and Noise - 400 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

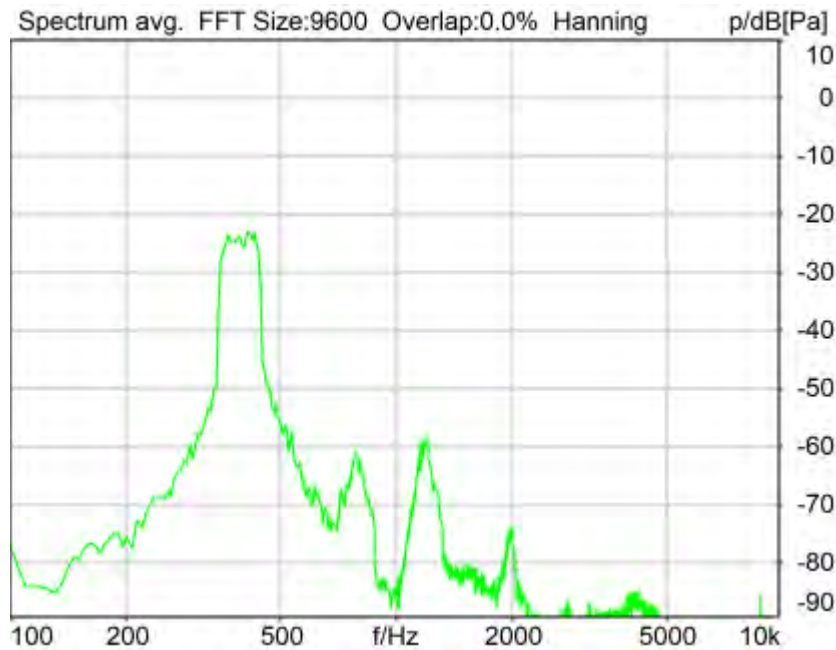

Distortion (Noise) RCV (packed): 31.26 dB (2.74%) Ok

**Ok**

2024/1/19 8:58 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_400hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

Rotation Delta A 0.0 °

MECRP Delta Ye	0.0 mm	Rotation Delta C	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.2 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	320.0 Hz	Stimulus max.	480.0 Hz
Analysis min.	20.0 Hz	Analysis max.	315.0 Hz
Analysis (2) min.	485.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 157.0000 ms (D\_RCV\_NB) Store to variable RCVNB10\_400Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

**BEQ Settings (BEQ Filter 1)**

Block mode Bypass

**Artificial Head Settings (HATS 1 (HMS II.3))**


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

**5.2 RCV Distortion and Noise - 500 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

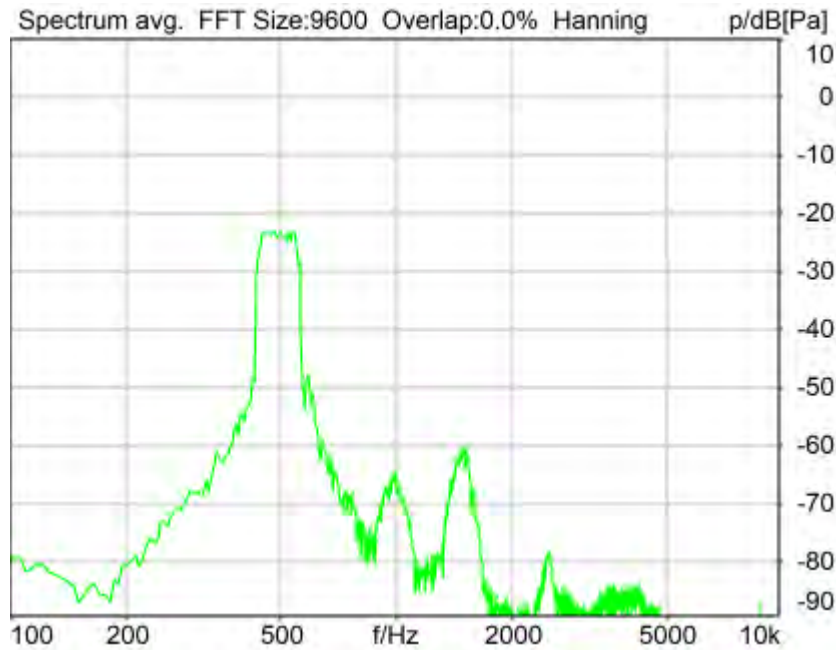

Distortion (Noise) RCV (packed): 31.98 dB (2.52%) Ok

**Ok**

2024/1/19 8:59 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_500hz\_sr20dbm0\_v02.dat  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.2 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	410.0 Hz	Stimulus max.	595.0 Hz
Analysis min.	20.0 Hz	Analysis max.	405.0 Hz
Analysis (2) min.	600.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 157.0000 ms (D\_RCV\_NB) Store to variable RCVNB10\_500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode Bypass  
-----


Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name 60020095 Serial 60020095  
HIB Mode Mobile Measurement Impedance 32 Ohm  
Gain out 1 -40.00 dB Gain out 2 0.00 dB  
Gain in 1 0.00 dB Gain in 2 0.00 dB  
Mic 1 Power Supply Off Mic 2 Power Supply Off

**5.2 RCV Distortion and Noise - 630 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

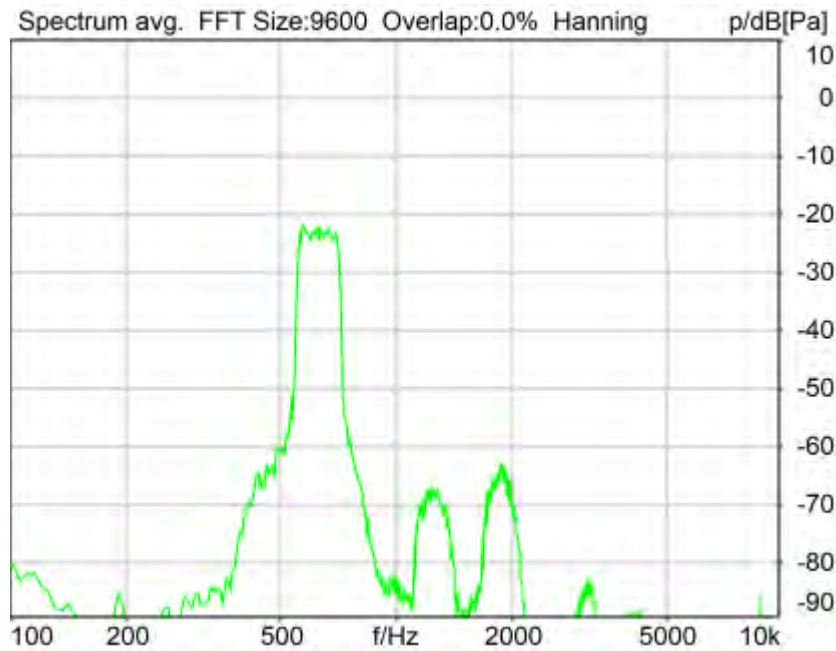

Distortion (Noise) RCV (packed): 35.76 dB (1.63%) Ok

**Ok**

2024/1/19 8:59 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off



Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_630hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

#### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

#### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.2 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

#### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

#### Analysis

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off		
Frequency base	Transformation	Overlap	0 %
FFT size	9600	Smooth	Off
Window function.	Hanning	Stimulus max.	745.0 Hz
dB weighting	A Weighting	Analysis max.	520.0 Hz
Stimulus min.	525.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis min.	20.0 Hz		
Analysis (2) min.	750.0 Hz		

#### Special Features

Compensate delay 157.0000 ms (D\_RCV\_NB) Store to variable RCVNB10\_630Hz

#### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

#### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

#### Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

#### Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

#### Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass 20Hz  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 3 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

Channel In 4 Settings

Range 114 dB[SPL] @ 12.5 mV/Pa Highpass Off  
Polarisation Voltage200V Supply Voltage ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 800 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

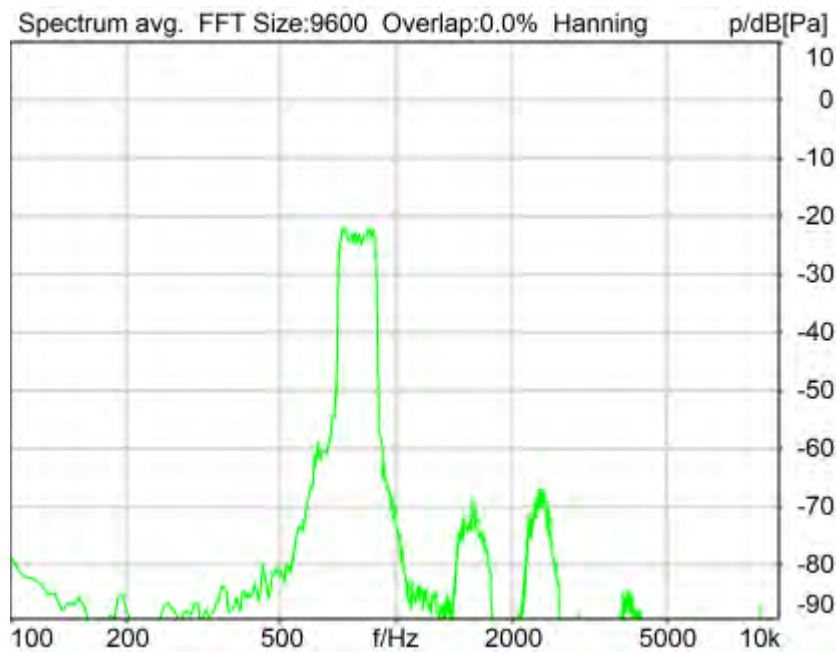

Distortion (Noise) RCV (packed): 38.61 dB (1.17%) Ok

**Ok**

2024/1/19 9:00 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_800hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.2 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	925.0 Hz
Stimulus min.	675.0 Hz	Analysis max.	670.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	930.0 Hz		

**Special Features**

Compensate delay 157.0000 ms (D\_RCV\_NB) Store to variable RCVNB10\_800Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1      0.00 dB                      Range Ch. 2      0.00 dB

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range                      114 dB[SPL] @ 12.5 mV/Pa      Highpass                      Off  
Polarisation Voltage 200V                      Supply Voltage                      ±60V

Channel In 2 Settings

Range                      114 dB[SPL] @ 12.5 mV/Pa      Highpass                      20Hz  
Polarisation Voltage 200V                      Supply Voltage                      ±60V

Channel In 3 Settings

Range                      114 dB[SPL] @ 12.5 mV/Pa      Highpass                      Off  
Polarisation Voltage 200V                      Supply Voltage                      ±60V

Channel In 4 Settings

Range                      114 dB[SPL] @ 12.5 mV/Pa      Highpass                      Off  
Polarisation Voltage 200V                      Supply Voltage                      ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode                      Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.                      12306613                      Pinna Type                      Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.2 RCV Distortion and Noise - 1000 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

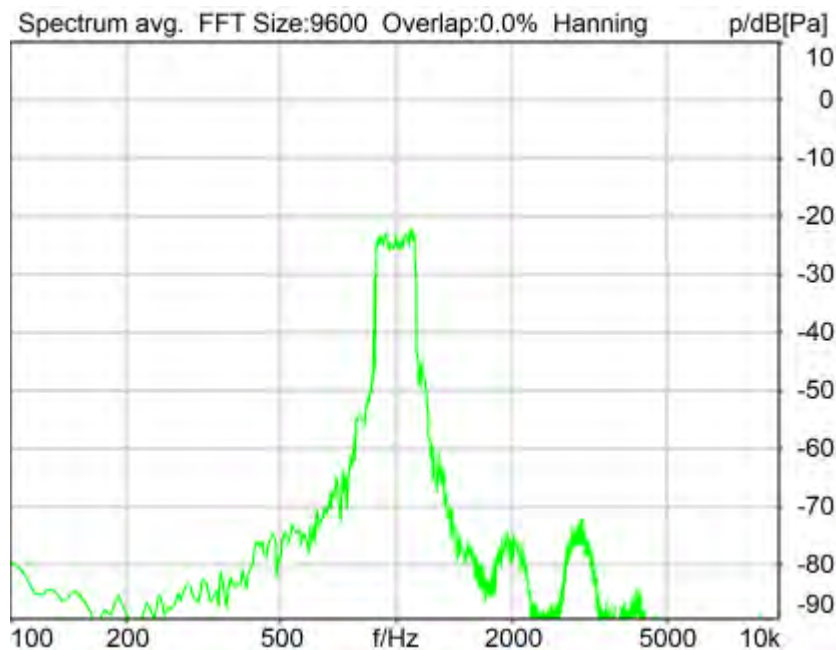

Distortion (Noise) RCV (packed): 29.00 dB (3.55%) Ok

**Ok**

2024/1/19 9:00 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting      off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1000hz\_sr20dbm0\_v02.dat**

Level adj. Ch1      -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.2 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1:      HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
Frequency base	Transformation	FFT size	9600
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	855.0 Hz
Stimulus min.	855.0 Hz	Stimulus max.	1155.0 Hz
Analysis min.	20.0 Hz	Analysis max.	850.0 Hz
Analysis (2) min.	1160.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 157.0000 ms (D\_RCV\_NB)      Store to variable      RCVNB10\_1000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 ->      Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker

Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## **5.2 RCV Distortion and Noise - 1250 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

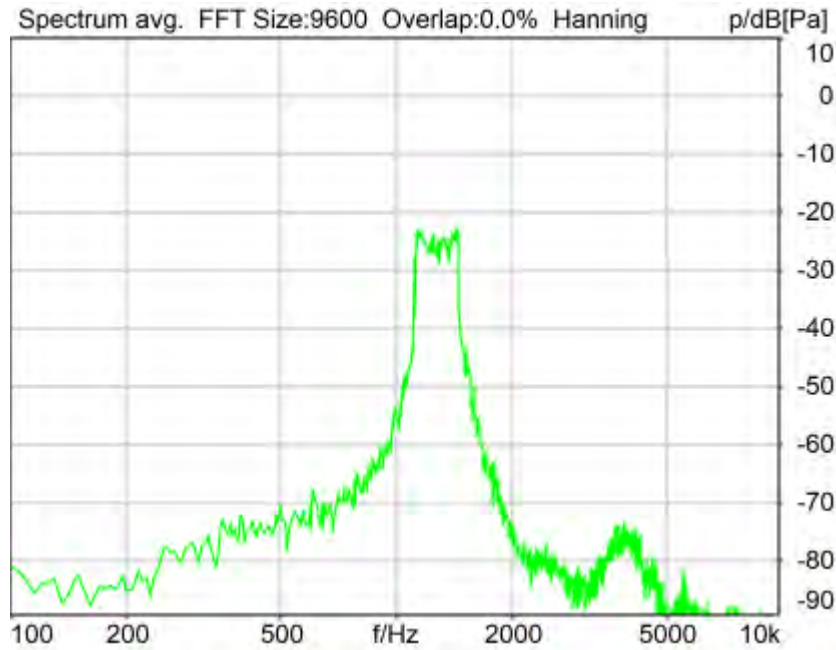

Distortion (Noise) RCV (packed): 21.74 dB (8.18%) Ok

**Ok**

2024/1/19 9:01 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_1250hz\_sr20dbm0\_v02.dat**

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.2 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	1450.0 Hz
Stimulus min.	1085.0 Hz	Analysis max.	1080.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	1455.0 Hz		

**Special Features**

Compensate delay 157.0000 ms (D\_RCV\_NB) Store to variable RCVNB10\_1250Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode Bypass

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------


**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off



## 5.2 RCV Distortion and Noise - 1600 Hz NB

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

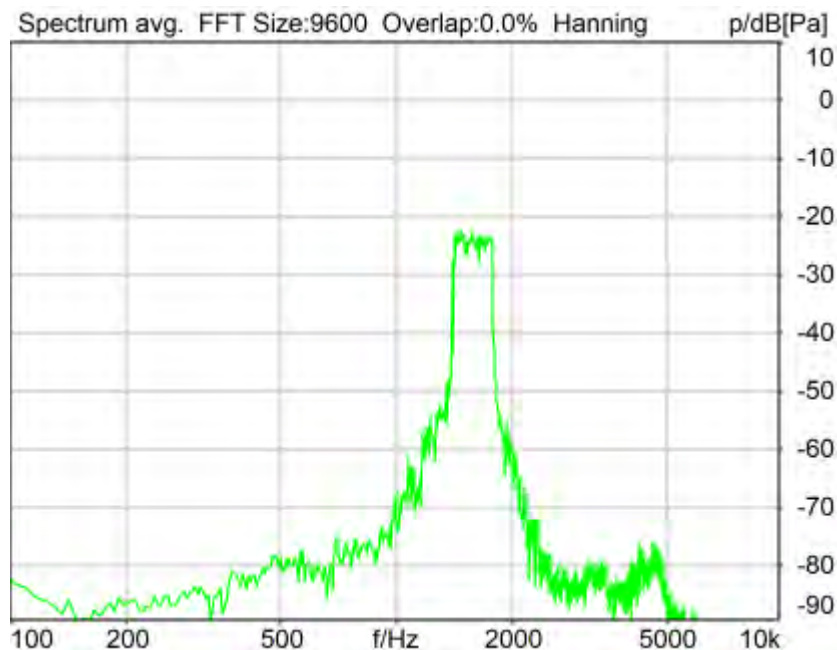

Distortion (Noise) RCV (packed): 29.89 dB (3.20%) Ok

Ok

2024/1/19 9:01 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

### Limits

	lower
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_1600hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

### Calibration

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

### HHP IV Settings (Setting: STD:(0,0,0) rel AHP)

MECRP Delta Ye 0.0 mm      Rotation Delta A 0.0 °  
Rotation Delta C 0.0 °

MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.2 mm	Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

### Output Equalization/Filter

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

### Analysis

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus min.	1375.0 Hz
Stimulus min.	1375.0 Hz	Stimulus max.	1815.0 Hz
Analysis min.	20.0 Hz	Analysis max.	1370.0 Hz
Analysis (2) min.	1820.0 Hz	Analysis (2) max.	20000.0 Hz

### Special Features

Compensate delay 157.0000 ms (D\_RCV\_NB) Store to variable RCVNB10\_1600Hz

### labCORE Settings

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

### labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

### Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

### Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

### Microphone Settings (Mic Amp. (Slot 6))

#### Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

#### Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

#### Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

#### Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

### BEQ Settings (BEQ Filter 1)

Block mode Bypass

### Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 2000 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N



Distortion (Noise) RCV (packed): 22.52 dB (7.49%) Ok

**Ok**

2024/1/19 9:01 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)

Database Version: 40\_HAC\_Suite\_Rev03

Source: act\_rpn\_b250ms\_2000hz\_sr20dbm0\_v02.dat

Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.2 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off		
Frequency base	Transformation	Overlap	0 %
FFT size	9600	Smooth	Off
Window function.	Hanning	Stimulus max.	2275.0 Hz
dB weighting	A Weighting	Analysis max.	1740.0 Hz
Stimulus min.	1745.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis min.	20.0 Hz		
Analysis (2) min.	2280.0 Hz		

**Special Features**

Compensate delay 157.0000 ms (D\_RCV\_NB) Store to variable RCVNB10\_2000Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

Polarisation Voltage 200V                      Supply Voltage    ±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode            Bypass


-----  
Artificial Head Settings (HATS 1 (HMS II.3))  
Ser. Nr.                12306613                      Pinna Type            Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 2500 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

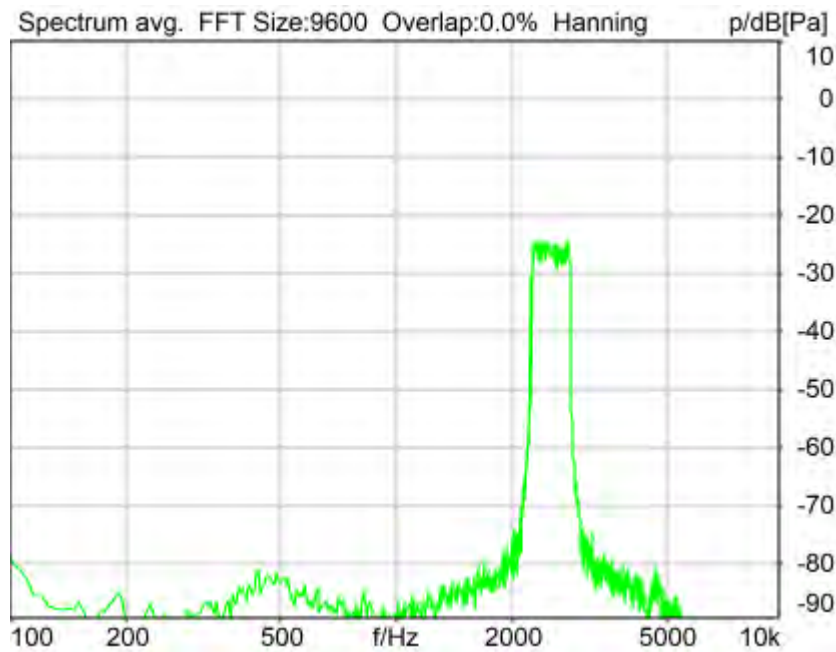

Distortion (Noise) RCV (packed): 40.10 dB (0.99%) Ok

**Ok**

2024/1/19 9:02 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting    off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_2500hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.2 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	13550.00 ms	Range length	200.00 ms
Number of seq.	10	Sequence length	400.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	Transformation		
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting		
Stimulus min.	2205.0 Hz	Stimulus max.	2855.0 Hz
Analysis min.	20.0 Hz	Analysis max.	2200.0 Hz
Analysis (2) min.	2860.0 Hz	Analysis (2) max.	20000.0 Hz

**Special Features**

Compensate delay 157.0000 ms (D\_RCV\_NB) Store to variable RCVNB10\_2500Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)  
Block mode Bypass  
-----

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

**5.2 RCV Distortion and Noise - 3150 Hz NB**

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

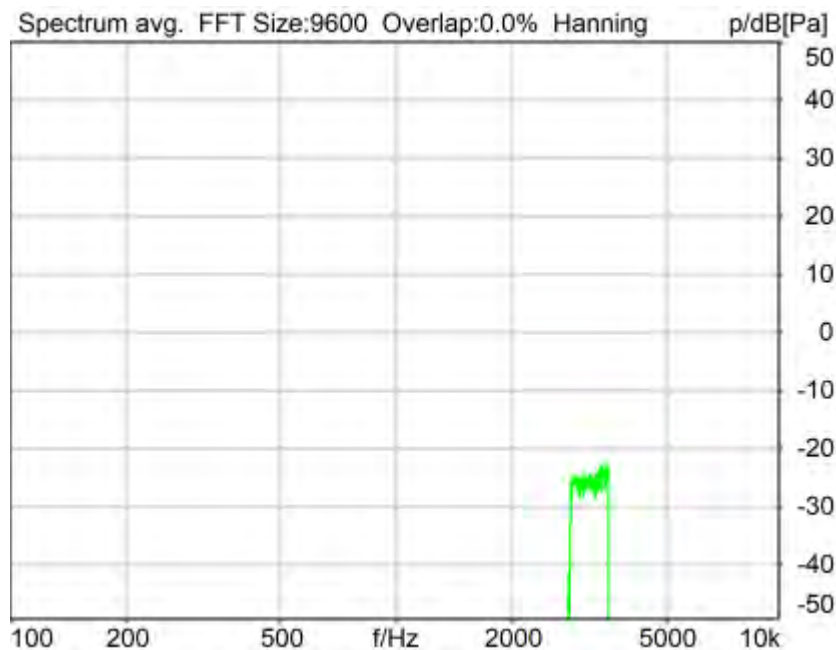

Distortion (Noise) RCV (packed): 39.50 dB (1.06%) Ok

**Ok**

2024/1/19 9:02 ACQUA 5.1.200

Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	20.00 dB

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: act\_rpn\_b250ms\_3150hz\_sr20dbm0\_v02.dat**  
Level adj. Ch1 -90.0 dB

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.2 mm	Delta B	0.0 °
		Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	200.00 ms
Range start	13550.00 ms	Sequence length	400.00 ms
Number of seq.	10	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	Frequency base	Transformation
FFT size	9600	Overlap	0 %
Window function.	Hanning	Smooth	Off
dB weighting	A Weighting	Stimulus max.	3585.0 Hz
Stimulus min.	2785.0 Hz	Analysis max.	2780.0 Hz
Analysis min.	20.0 Hz	Analysis (2) max.	20000.0 Hz
Analysis (2) min.	3590.0 Hz		

**Special Features**

Compensate delay 157.0000 ms (D\_RCV\_NB) Store to variable RCVNB10\_3150Hz

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**



Range Ch. 1      0.00 dB                      Range Ch. 2      0.00 dB

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range                      114 dB[SPL] @ 12.5 mV/Pa      Highpass                      Off  
Polarisation Voltage 200V                      Supply Voltage                      ±60V

Channel In 2 Settings

Range                      114 dB[SPL] @ 12.5 mV/Pa      Highpass                      20Hz  
Polarisation Voltage 200V                      Supply Voltage                      ±60V

Channel In 3 Settings

Range                      114 dB[SPL] @ 12.5 mV/Pa      Highpass                      Off  
Polarisation Voltage 200V                      Supply Voltage                      ±60V

Channel In 4 Settings

Range                      114 dB[SPL] @ 12.5 mV/Pa      Highpass                      Off  
Polarisation Voltage 200V                      Supply Voltage                      ±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode                      Bypass

-----  
Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.                      12306613                      Pinna Type                      Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## Report - Receive Distortion and Noise (Conversational Gain)

TIA-5050 (2018-01) \ Measurements \ Narrowband \ 5.2 Receive Distortion and Noise 2N

Region	Frequency	SDNR
1	400Hz	31.26 dB
2	500Hz	31.98 dB
3	630Hz	35.76 dB
4	800Hz	38.61 dB
5	1000Hz	29.00 dB
6	1250Hz	21.74 dB
7	1600Hz	29.89 dB
8	2000Hz	22.52 dB
9	2500Hz	40.10 dB
10	3150Hz	39.50 dB


All SDNRs were greater than 20.0 dB, requirement was met.

Smallest SDNR was 21.74dB at 1250Hz.

2024/1/19 9:03 ACQUA

### 5.3 Frequency Response 8N FF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

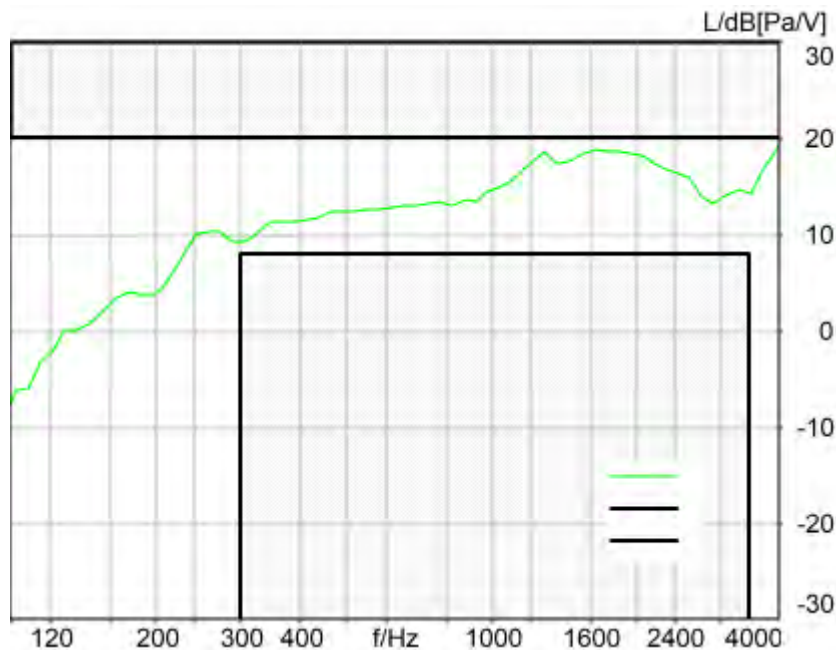

Absolute minimal distance  
1.27 dB at 1647.8 Hz Ok

Ok

2024/1/19 9:17 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.  
filtered with 4.0 kHz low-pass filter  
signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

		Rotation Delta A	0.0 °
MECRP Delta Ye	0.0 mm	Rotation Delta C	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta B	5.0 °
Delta Xe	0.0 mm	Delta A	0.0 °
Delta Ye	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-3.6 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear  
Force to apply: 8.0 N, Force reached: 8.1 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2		
Range start	500.00 ms	Range length	11500.00 ms
Use FIR Filter	Ch2	FIR filter	drp2ff_ieee1652
DRP/ERP Ch.1:	Off	DRP/ERP Ch.2:	Off
Frequency base	12th octave	DIN Row	Row A
Method	FFT		
FFT size	4096	Overlap	75 %
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 2 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 3 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off

Polarisation Voltage	200V	Supply Voltage	±60V
Channel In 4 Settings			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
**BEQ Settings (BEQ Filter 1)**  
 Block mode      Bypass  
 -----


<b>Artificial Head Settings (HATS 1 (HMS II.3))</b>			
Ser. Nr.	12306613	Pinna Type	Type 3.3

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

### 5.3 Frequency Response 8N DF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

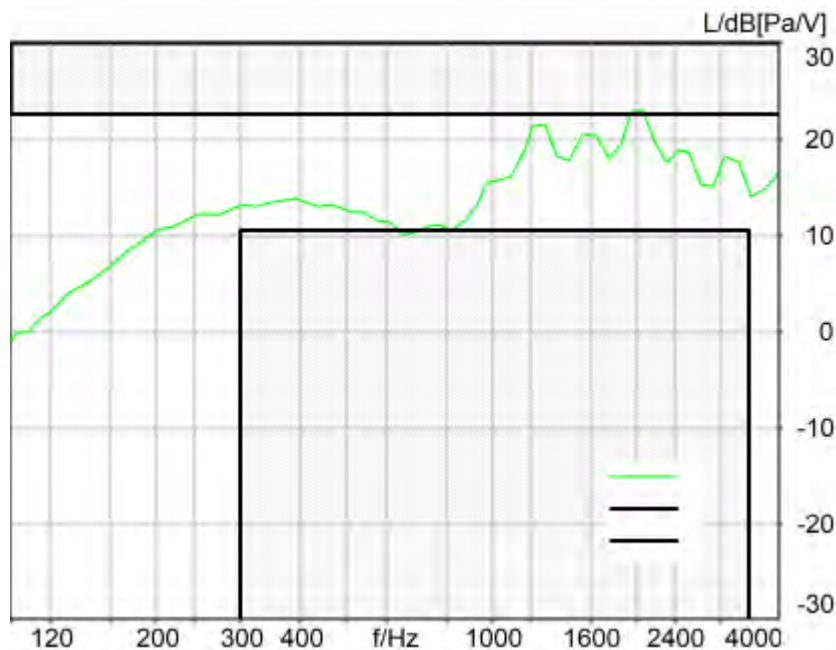

Absolute minimal distance  
 -0.36 dB at 2057.5 Hz Not Ok

**Not Ok**

2024/1/19 9:17 ACQUA 5.1.200  
 Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	<b>lower</b>
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the end of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-3.6 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear

Force to apply: 8.0 N, Force reached: 8.1 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2df_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 99.7000 ms (D\_RCV\_NB, Delay (Cross))

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

-----  
labCORE Routing

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

-----  
 Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
 Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
 Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
 BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
 Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off

## 5.3 Frequency Response 2N FF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

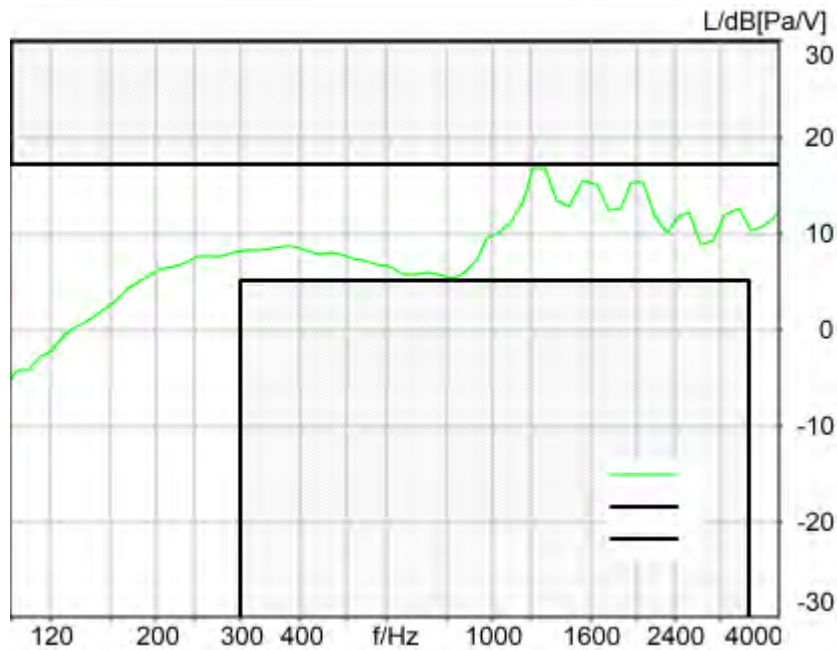

Absolute minimal distance  
0.29 dB at 823.9 Hz Ok

**Ok**

2024/1/19 9:03 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

**Limits**

	lower
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +  
Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the and of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))  
Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Ym	-0.2 mm	Delta B	0.0 °
		Ear Type	3.3 Coordinates

Mounting: Right Ear  
Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2ff_ieee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT		
FFT size	4096		
Window function.	Hanning		
Reference file	r521_rcv_frq_spee269_hanb.fft		
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 157.0000 ms (D\_RCV\_NB)

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
 Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
 In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
 In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

**Analog In Mainboard Settings (Analog In 1/2)**

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

**Analog Out Mainboard Settings (Analog Out 1/2)**

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

**Microphone Settings (Mic Amp. (Slot 6))**

<b>Channel In 1 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 2 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 3 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V
<b>Channel In 4 Settings</b>			
Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V



BEQ Settings (BEQ Filter 1)

Block mode Bypass

Artificial Head Settings (HATS 1 (HMS II.3))


Ser. Nr. 12306613 Pinna Type Type 3.3

HIB Settings

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply Off		Mic 2 Power Supply Off	

### 5.3 Frequency Response 2N DF HANB

TIA-5050 (2018-01) \ Measurements \ Narrowband

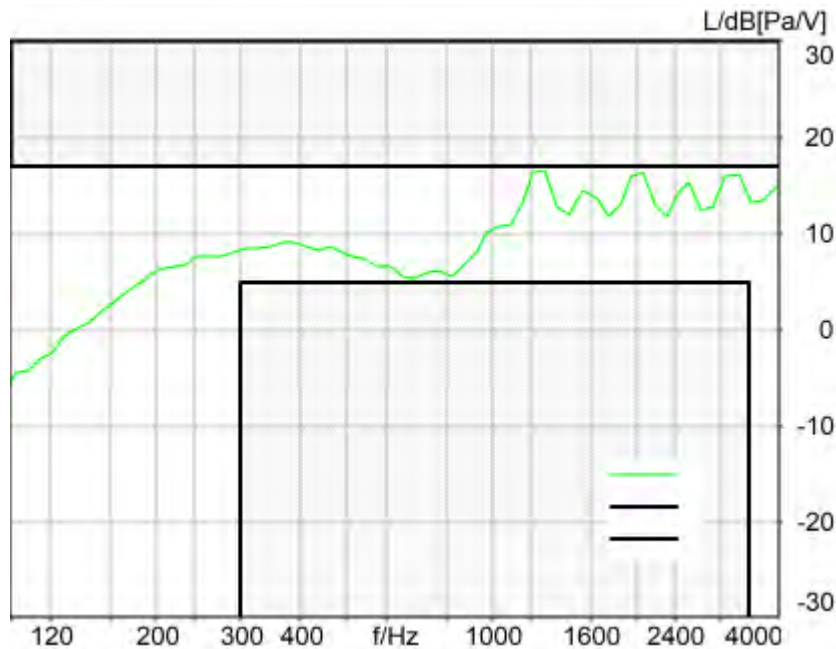

Absolute minimal distance  
0.37 dB at 1285.9 Hz Ok

Ok

2024/1/19 9:04 ACQUA 5.1.200  
Unmodified HEAD acoustics Measurement Descriptor

Limits

	lower
Run 1	Fit into tolerance

Meas. Setting off

Underlying Standard: TIA-5050 (2018-01)  
Database Version: 40\_HAC\_Suite\_Rev03

**Source: respmaleieeee269\_nb\_r16.dat**

Level adj. Ch1 -90.0 dB Level adj. Ch2 -4.0 dB

NARROWBAND IEEE-269-2010 Real Speech Signal at Channel 2

Pause 0.5 s +

Real Speech (english, male speaker) 11.5 s, Active Speech Level: -16 dBm0, margin 15.9 dB +

Pause till end of file

Signal level (ch1): -16 dBm0 Active Speech Level, margin 15.9 dB

Signal taken from "IEEE\_269-2010\_Male\_mono\_48\_kHz.wav"

Alteration:

0.2 s Pause added at the beginning of the file.

0.8 s Pause added at the end of the file.

filtered with 4.0 kHz low-pass filter

signal level changed

**Calibration**

Input ch.2: 0.49 dB 2023/11/1 (HATS 1 (HMS II.3))

Output ch.2: 0.00 dB 2023/6/27 (Radio Tester 1 (CMW500))

**HHP IV Settings (Setting: STD:(0,0,0) rel AHP)**

MECRP Delta Ye	0.0 mm	Rotation Delta A	0.0 °
MECRP Delta Ze	0.0 mm	Rotation Delta C	0.0 °
Delta Xe	0.0 mm	Rotation Delta B	5.0 °
Delta Ye	0.0 mm	Delta A	0.0 °
Delta Ze	0.0 mm	Delta C	0.0 °
Delta Ze	0.0 mm	Delta B	0.0 °
Ym	-0.2 mm	Ear Type 3.3 Coordinates	

Mounting: Right Ear

Force to apply: 2.0 N, Force reached: 2.0 N

**Output Equalization/Filter**

Mouth Eq. Ch.1: HATS 1 (HMS II.3)

**Analysis**

Direction	Out 2 -> In 2	Range length	11500.00 ms
Range start	500.00 ms	FIR filter	drp2df_ieeee1652
Use FIR Filter	Ch2	DRP/ERP Ch.2:	Off
DRP/ERP Ch.1:	Off	DIN Row	Row A
Frequency base	12th octave	Overlap	75 %
Method	FFT	Window function.	Hanning
FFT size	4096	Reference file	r521_rcv_frq_spee269_hanb.fft
Window function.	Hanning	Tol. scheme file	521_rcv_frq_man_hanb.tol
Reference file	r521_rcv_frq_spee269_hanb.fft	Auto adjust	Centrate
Tol. scheme file	521_rcv_frq_man_hanb.tol	Min. freq. for tol.	100.0 Hz
Auto adjust	Centrate	Max. freq. for tol.	4000.0 Hz

**Special Features**

Compensate delay 157.0000 ms (D\_RCV\_NB)

**labCORE Settings**

labCORE Serial	77000207	Nickname	
Firmware	3.4.17	Sync Source	Internal
Clock Pitch	0.00 ppm		

**labCORE Routing**

Out Channel 1 -> Power Amp. (Slot 10) 1 -> HATS 1 (HMS II.3) Speaker  
Out Channel 2 -> Analog Out 1/2 2 -> Radio Tester 1 (CMW500) In  
In Channel 1 <- Analog In 1/2 In 1 <- Radio Tester 1 (CMW500) Out  
In Channel 2 <- BEQ Filter 1 R <- Mic Amp. (Slot 6) In 2 <- HATS 1 (HMS II.3) Mic. Right

Analog In Mainboard Settings (Analog In 1/2)

Range Ch. 1	0.00 dB	Ch. 0 Float	On
Range Ch. 2	0.00 dB	Ch. 1 Float	On

-----  
Analog Out Mainboard Settings (Analog Out 1/2)

Range Ch. 1	0.00 dB	Range Ch. 2	0.00 dB
-------------	---------	-------------	---------

-----  
Microphone Settings (Mic Amp. (Slot 6))

Channel In 1 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 2 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	20Hz
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 3 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

Channel In 4 Settings

Range	114 dB[SPL] @ 12.5 mV/Pa	Highpass	Off
Polarisation Voltage	200V	Supply Voltage	±60V

-----  
BEQ Settings (BEQ Filter 1)

Block mode	Bypass
------------	--------

-----  
Artificial Head Settings (HATS 1 (HMS II.3))

Ser. Nr.	12306613	Pinna Type	Type 3.3
----------	----------	------------	----------

**HIB Settings**

HIB Name	60020095	Serial	60020095
HIB Mode	Mobile Measurement	Impedance	32 Ohm
Gain out 1	-40.00 dB	Gain out 2	0.00 dB
Gain in 1	0.00 dB	Gain in 2	0.00 dB
Mic 1 Power Supply	Off	Mic 2 Power Supply	Off