



BUREAU
VERITAS

Test Report No.: PSU-NQN2405090215EM01



Certificate #6613.01

EMC TEST REPORT



Applicant:	HMD Global Oy
Address:	Bertel Jungin aukio 9 Espoo 02600 Finland

Manufacturer or Supplier:	HMD Global Oy
Address:	Bertel Jungin aukio 9 Espoo 02600 Finland
Product:	Mobile Phone
Brand Name:	HMD
Model Name:	TA-1606
FCC ID:	2AJOTTA-1606
Date of tests:	May. 14, 2024 ~ Jun. 13, 2024

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

- FCC Part 15, Subpart B, Class A
- FCC Part 15, Subpart B, Class B
- ANSI C63.4:2014

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Jun. 13, 2024	 Date: Jun. 13, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

TABLE OF CONTENTS	2
RELEASE CONTROL RECORD	3
1 GENERAL INFORMATION	4
1.1 GENERAL DESCRIPTION OF EUT	4
1.2 SUMMARY OF TEST RESULTS	8
1.3 MEASUREMENT UNCERTAINTY	9
1.4 DESCRIPTION OF TEST MODES	10
1.5 DESCRIPTION OF SUPPORT UNITS	12
2 EMISSION TEST	13
2.1 CONDUCTED EMISSION MEASUREMENT	13
2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
2.1.2 TEST INSTRUMENTS	13
2.1.3 TEST PROCEDURES	14
2.1.4 DEVIATION FROM TEST STANDARD	14
2.1.5 TEST SETUP	15
2.1.6 EUT OPERATING CONDITIONS	15
2.1.7 TEST RESULTS	16
2.2 RADIATED EMISSION MEASUREMENT	18
2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	18
2.2.2 TEST INSTRUMENTS	19
2.2.3 TEST PROCEDURE	20
2.2.4 DEVIATION FROM TEST STANDARD	21
2.2.5 TEST SETUP	22
2.2.6 EUT OPERATING CONDITIONS	23
2.2.7 TEST RESULTS	24
3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	28



BUREAU
VERITAS

Test Report No.: PSU-NQN2405090215EM01

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
PSU-NQN2405090215EM01	Original release	Jun. 13, 2024



1 GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Mobile Phone	
BRAND NAME*	HMD	
MODEL NAME*	TA-1606	
NOMINAL VOLTAGE*	5.0 or 9.0 or 12.0 Vdc (adapter) 3.87Vdc (battery)	
MODULATION TYPE*	BT_LE	GFSK
	Bluetooth	GFSK, $\pi/4$ -DQPSK, 8DPSK
	FM	FM
	NFC	ASK
	WLAN	DSSS, OFDM
	GPS/GALILEO/G LONASS	BPSK
	GSM/GPRS/EDGE	GMSK /8PSK
	WCDMA	BPSK/QPSK
	LTE	QPSK /16QAM /64QAM
OPERATING FREQUENCY*	Bluetooth/BT_LE	2402MHz ~ 2480MHz
	FM	87.5MHz ~ 108MHz
	NFC	13.56 MHz
	WLAN	2412 ~ 2462MHz for 11b/g/n(HT20/40) 5180 ~ 5240MHz, 5260 ~ 5320 MHz, 5500 ~ 5720MHz, 5745 ~ 5825 MHz for 11a/ n(HT20)/ n(HT40) / ac(VHT20)/ ac(VHT40) / ac(VHT80)
	GPS/GALILEO/G LONASS	1559MHz ~ 1610MHz
	GSM	824.2MHz ~ 848.8MHz (FOR GSM 850) 1850.2MHz ~ 1909.8MHz (FOR GSM 1900)
	WCDMA	1852.4MHz ~ 1907.6MHz (FOR WCDMA Band 2) 1712.4MHz ~ 1752.6MHz (FOR WCDMA Band 4) 826.4MHz ~ 846.6MHz (FOR WCDMA Band 5)
	LTE	1850.7MHz ~ 1909.3MHz (FOR LTE Band2) 1710.7MHz ~ 1754.3MHz (FOR LTE Band4) 824.7MHz ~ 848.3MHz (FOR LTE Band5) 2502.5MHz ~ 2567.5MHz (FOR LTE Band7) 699.7MHz ~ 715.3MHz (FOR LTE Band12)



		779.5MHz ~ 784.5MHz (FOR LTE Band13) 706.5MHz ~ 713.5MHz (FOR LTE Band17) 1710.7MHz ~ 1779.3MHz (FOR LTE Band66)
HIGHEST FREQUENCY*	5825MHz	
HW VERSION*	V00	
SW VERSION*	V0.019_A01	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	USB cable1: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable2: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable3: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable4: non-shielded cable, with w/o ferrite core, 1.0 meter	
ACCESSORY DEVICES*	Refer to note as below	

NOTE:

1. *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in the test report.



4. For the product of TA-1606 (FCC ID: 2AJOTTA-1606), the following components are different between the first and second supply, other parameters are the same.

Key Component List						
No.	Component	Description	First supply		Second supply	
			SUPPLIER	Spec	SUPPLIER	Spec
1	NMOS	PCBA	PRISEMI	PNM3FD20V2	JSCJ	CJBA3134K
2	E-compass		MEMSIC	MMCS603NJ	QST	QMC6308-TR
3	Memory-256GB		FORESEE	FEUDNN256G-C2G07	BIWIN	BWU2ASV46A256G
4	Memory-64GB		FORESEE	FLXC4008G-30	BIWIN	BWMZCX32H2A-64G-X
5	nano-SIM		LCN	CAF99-06033-0305	HRD	S186-1B01F13F
6	T-card		LCN	CAF11-08136-031901	HRD	S186-1B02F13F
7	iron covering		LCN	CAF00-21134-032307	HRD	S186-2B21F13F-1
8	Type C connector		LETCON	15-16815-110	LCN	UAF05-16323-3007
9	headphone socket		LETCON	11-058126A	HRD	PH157-0B12F36M
10	G sensor		slan	2*2 12bit	sensortek	2*2 12bit
11	Proximity light sensor		Liteon	LTR-569ALS-02	sensortek	STK3335-X
12	Backlight driver		AWINIC	dfn2*2-6L	broadchip	dfn2*2-6L
13	Flash driver		AWINIC	2A DCDC	OCS	2A DCDC
14	CKDID baschip		AWINIC	±5V	OCS	±5V
15	overvoltage protection chip		broadchip	6.8V FCQFN12	AWINIC	6.8V FCQFN12
16	CKD BDS/GPS/GAL LNA		SILICONWAVE	LNA 1.5*1.0 6pin	AWINIC	LNA 1.5*1.0 6pin
17	MIC		GETTOP	2.75*1.85*0.9mm	YUTAI	2.75*1.85*0.9mm
18	LCM	LCD	HUAXIAN	incell5.56HD+	DZX	incell5.56HD+
19	Macro cam	camera	CXT	2M CSP	lianhe	2M CSP
20	Finger print	module	SYX	side fingerprint	SHENAO	side fingerprint
21	Battery		GAOYUAN	Rated: 4900mAh Typical: 5000mAh	FENGHUA	Rated: 4900mAh Typical: 5000mAh
22	Receiver		SENNOR	'0809	TUNESS	'0809
23	Vibrator		JX	0830 3.35mm	JD	0830 3.35mm
24	Charger US		BJD	5V 2A	JUWEI	5V 2A
25	Data cable		JUWEI	A-C	FKY	A-C
			JUWEI	C-C	FKY	C-C

List of Accessory:

ACCESSORIES	BRAND	MANUFACTURE R	MODEL	SPECIFICATION
Battery 1	HMD	Gaoyuan	HBA5020AA	Power Rating: 3.87 Vdc;18.963 Wh;4900 mAh
Battery 2	HMD	Fenghua	HBA5020AA	Power Rating: 3.87 Vdc;18.963 Wh;4900 mAh
AC Adapter 1	HMD	Shenzhen Baijunda Electronics Co.,Ltd	HAD-020U(US-P D 20W)	I/P: 100-240 V,50~60Hz,0.6A O/P: USB-C Output:5.0V 3.0A or 9.0V 2.22A or 12.0V 1.67A 20.0W Max
AC Adapter 2	HMD	Shenzhen Baijunda	HAD-010U(US)	I/P: 100-240 V,50~60Hz,0.35A



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215EM01

		Electronics Co.,Ltd		O/P: 5V 2A,10W
AC Adapter 3	HMD	Huizhou Juwei Electronics Co., Ltd.	HAD-010U(US)	I/P: 100-240 V,50~60Hz,0.35A O/P: 5V 2A,10W
Earphone	HMD	N/A	JWEP1266-H24H	N/A
USB Cable 1	HMD	JUWEI	JWUB1684-M01H	A to C
USB Cable 2	HMD	JUWEI	JWUB1688-M01H	C to C
USB Cable 3	HMD	FUKANGYUAN	FKY-23-368	A to C
USB Cable 4	HMD	FUKANGYUAN	FKY-23-369	C to C



1.2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart B			
Standard Section	Test Item	Result	Test lab*
FCC Part 15, Subpart B, Class B ANSI C63.4:2014	Conducted Test	Compliance	A
	Radiated Emission Test (30MHz ~ 1GHz)	Compliance	A
	Radiated Emission Test (Above 1GHz)	Compliance	A

*Test Lab Information Reference

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

Accredited Test Lab Cert 6613.01


The FCC Site Registration No. is 434559; The Designation No. is CN1325.

1.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz ~ 30MHz	$\pm 2.70\text{dB}$
Radiated emissions	30MHz~1GHz	$\pm 4.98\text{dB}$
	1GHz ~6GHz	$\pm 4.70\text{dB}$
	6GHz ~18GHz	$\pm 4.60\text{dB}$
	18GHz ~40GHz	$\pm 4.12\text{dB}$

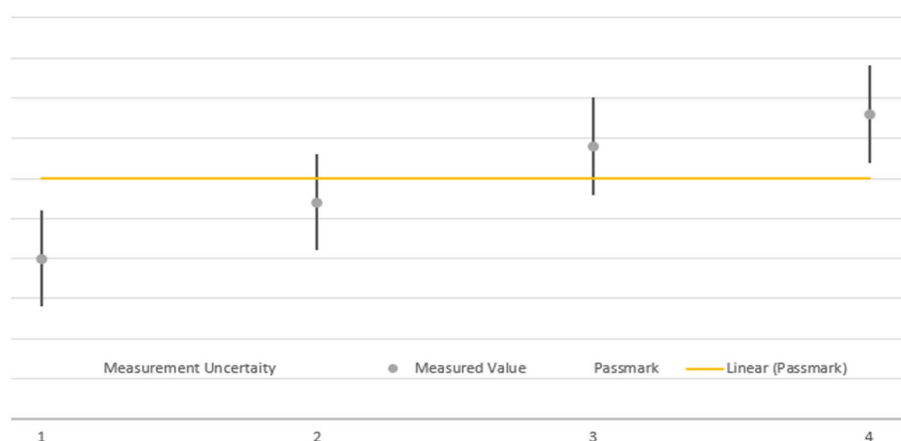

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



1.4 DESCRIPTION OF TEST MODES

Test Mode	Test Condition
Radiated emission test	
1	GSM850 Idle+ Adapter 1+ USB cable 2+ Earphone+ SD+ BT Idle+ WIFI Idle (2.4G)+ Front Camera On+ SIM1+ GPS RX+ Sample 1
2	WCDMA B5 Idle+ Adapter 2+ USB cable 1+ Earphone+ SD+BT Idle+ WIFI Idle (5G)+ Back Camera On+ SIM2+ GLONASS RX+ Sample 1
3	LTE B5 Idle+ Adapter 3+ USB cable 3+ Earphone+ SD+ BT Idle+ WIFI Idle (2.4G) + MPG4+ SIM1+ GALILEO RX+ Sample 1
4	LTE B12Idle+ Adapter 1+ USB cable 4+ Earphone+ SD+ BT Idle+ WIFI Idle (5G)+ NFC+ SIM2+ GPS RX+ Sample 1
5	LTE B13 Idle+ Adapter 2+ USB cable 1+ Earphone+ SD+ BT Idle+ WIFI Idle (2.4G)+ FM RX+ SIM1+ GLONASS RX+ Sample 1
6	LTE B17 Idle+ Adapter 3+ USB cable 3+ Earphone+ SD+ BT Idle+ WIFI Idle (5G)+ flashlight on+ SIM2+ GALILEO RX+ Sample 1
7	LTE B66 Idle+ Adapter 1+ USB cable 2+ Earphone+ SD+ BT Idle+ WIFI Idle (2.4G)+ SIM2+ GPS RX+ Sample 1
8	GSM850 Idle+ USB Link+ Data Transmission+ USB cable 1+ SD+ BT Idle+ WIFI Idle (5G)+ Notebook to EUT+ Earphone+ SIM2+ GLONASS RX+ Sample 1
9	WCDMA B5 Idle+ USB Link+ Data Transmission+ USB cable 3+ SD+ BT Idle+ WIFI Idle (2.4G)+ EUT to Notebook+ Earphone+ SIM1+ GALILEO RX+ Sample 1
10	Powered by battery+ Earphone+ SD+ BT Idle+ WIFI Idle (5G)+ MPG4+ SIM1+ Sample 1
11	Worst of 1-10+Sample 2

Test Mode	Test Condition
Conducted emission test	
1	GSM850 Idle+ Adapter 1+ USB cable 2+ Earphone+ SD+ BT Idle+ WIFI Idle (2.4G)+ Front Camera On+ SIM1+ GPS RX+ Sample 1
2	WCDMA B5 Idle+ Adapter 2+ USB cable 1+ Earphone+ SD+ BT Idle+ WIFI Idle (5G)+ Back Camera On+ SIM2+ GLONASS RX+ Sample 1
3	LTE B5 Idle+ Adapter 3+ USB cable 3+ Earphone+ SD+ BT Idle+ WIFI Idle (2.4G)+ MPG4+ SIM1+ GALILEO RX+ Sample 1
4	LTE B12Idle+ Adapter 1+ USB cable 4+ Earphone+ SD+ BT Idle+ WIFI Idle (5G)+ NFC+ SIM2+ GPS RX+ Sample 1
5	LTE B13 Idle+ Adapter 2+ USB cable 1+ Earphone+ SD+ BT Idle+ WIFI Idle (2.4G)+ FM RX+ SIM1+ GLONASS RX+ Sample 1
6	LTE B17 Idle+ Adapter 3+ USB cable 3+ Earphone+ SD+ BT Idle+ WIFI Idle (5G)+ flashlight on+ SIM2+ GALILEO RX+ Sample 1
7	LTE B66 Idle+ Adapter 1+ USB cable 2+ Earphone+ SD+ BT Idle+ WIFI Idle (2.4G)+ SIM2+ GPS RX+ Sample 1
8	GSM850 Idle+ USB Link+ Data Transmission+ USB cable 1+ SD+ BT Idle+ WIFI Idle (5G)+ Notebook to EUT+ Earphone+ SIM2+ GLONASS RX+ Sample 1
9	WCDMA B5 Idle+ USB Link+ Data Transmission+ USB cable 3+ SD+ BT Idle+ WIFI Idle



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215EM01

	(2.4G)+ EUT to Notebook+ Earphone+ SIM1+ GALILEO RX+ Sample 1
10	Worst of 1-9+ Sample 2

NOTE:

1. For radiated emission test, test mode 10 was the verification case and only this mode was presented in this report.
2. For conducted emission test, test mode 10 was the verification case and only this mode was presented in this report.



1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

FOR ALL TESTS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	Thinkpad E14	SL10W47313	N/A
2	Micro SD	SAM SUNG	N/A	N/A	N/A
3	Bluetooth	Rohde&Schwarz	SMBV100B	102176	N/A
4	FM signal generator	Rohde&Schwarz	SMB 100A	182185	N/A
5	WIFI Router	HUAWEI	N/A	N/A	N/A
6	Earphone	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Line: Shielded, Detachable,1.0m;
2	Earphone Line: Unshielded, Detachable,1.0m;

2 EMISSION TEST

2.1 CONDUCTED EMISSION MEASUREMENT

2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107 a CLASS B)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107 b CLASS A)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

2.1.2 TEST INSTRUMENTS

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.27,22	Jun.26,24
EMI Test Receiver	Rohde&Schwarz	ESR3	102749	Feb.25,24	Feb.24,26
ELEKTRA test software	Rohde&Schwarz	ELEKTRA	NA	N/A	N/A
LISN network	Rohde&Schwarz	ENV216	102640	Feb.17,24	Feb.16,26
CABLE	Rohde&Schwarz	W61.01	N/A	Apr.26,24	Apr.25,25
CABLE	Rohde&Schwarz	W601	N/A	Apr.26,24	Apr.25,25

NOTE: 1. The test was performed in CE shielded room.

2.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

2.1.4 DEVIATION FROM TEST STANDARD

No deviation.

2.1.5 TEST SETUP

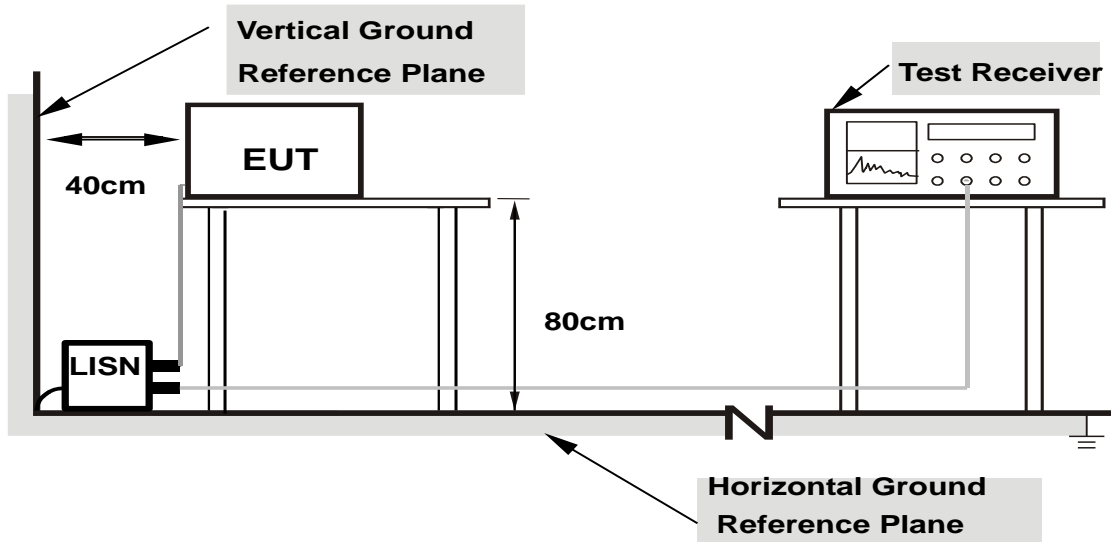

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

2.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the use type described in the manufacturer's specifications or the user's manual.




2.1.7 TEST RESULTS

Worst case data:

TEST VOLTAGE	Input 120 Vac, 60 Hz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
ENVIRONMENTAL CONDITIONS	26deg. C, 51%RH	TESTED BY	Hanwen Xu

Re	Frequency [MHz]	QPK Level [dBuV]	QPK Limit [dBuV]	QPK Margin [dB]	CAV Level [dBuV]	CAV: AVG Limit [dBuV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.546	43.55	56.00	12.45	35.34	46.00	10.66	11.75	L1	9.000
1	0.996	36.10	56.00	19.90	25.71	46.00	20.29	11.74	L1	9.000
1	3.111	33.11	56.00	22.89	21.24	46.00	24.76	11.77	L1	9.000
1	4.803	35.01	56.00	20.99	22.30	46.00	23.70	11.79	L1	9.000
1	10.514	30.96	60.00	29.04	19.00	50.00	31.00	11.83	L1	9.000
1	25.710	26.78	60.00	33.22	14.11	50.00	35.89	11.90	L1	9.000

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Limit value- Emission level
 4. Correction factor = Insertion loss + Cable loss + Attenuate
 5. Emission Level = Correction Factor + Reading Value.

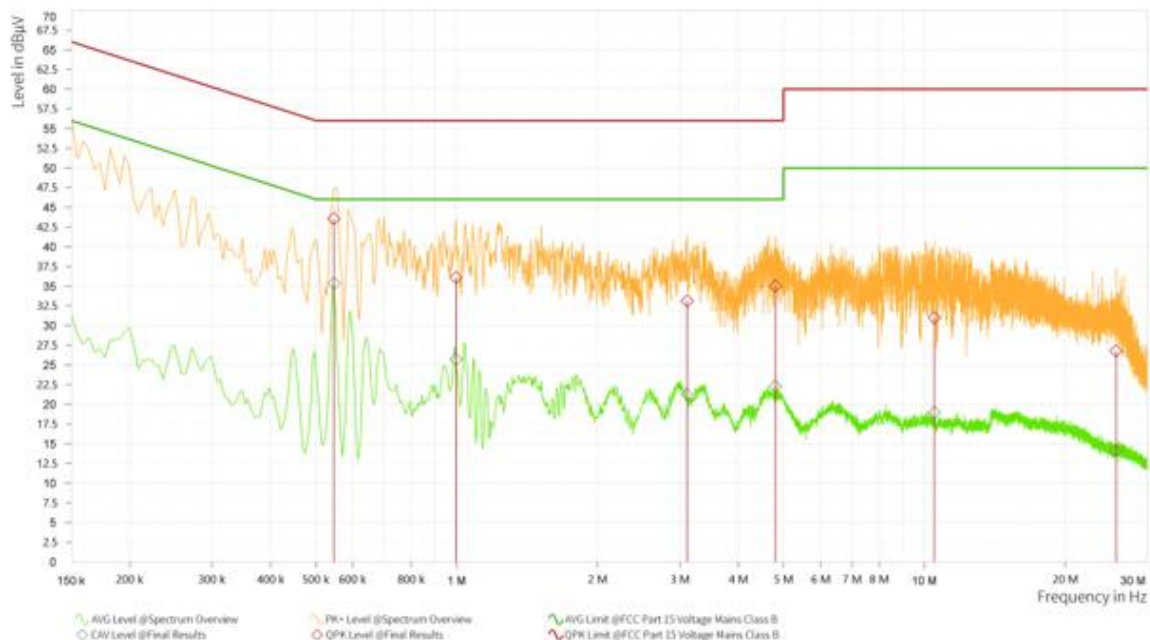




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215EM01

TEST VOLTAGE	Input 120 Vac, 60 Hz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
ENVIRONMENTAL CONDITIONS	26deg. C, 51%RH	TESTED BY	Hanwen Xu

Rg	Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.546	50.00	56.00	6.00	42.12	46.00	3.88	12.77	N	9.000
1	1.041	44.67	56.00	11.33	35.95	46.00	10.05	12.73	N	9.000
1	1.712	44.10	56.00	11.90	33.85	46.00	12.15	12.74	N	9.000
1	3.390	42.40	56.00	13.60	34.07	46.00	11.93	12.75	N	9.000
1	17.628	34.52	60.00	25.48	22.78	50.00	27.22	12.84	N	9.000
1	26.520	32.10	60.00	27.90	18.46	50.00	31.54	12.88	N	9.000

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Limit value- Emission level
 4. Correction factor = Insertion loss + Cable loss + Attenuate
 5. Emission Level = Correction Factor + Reading Value.

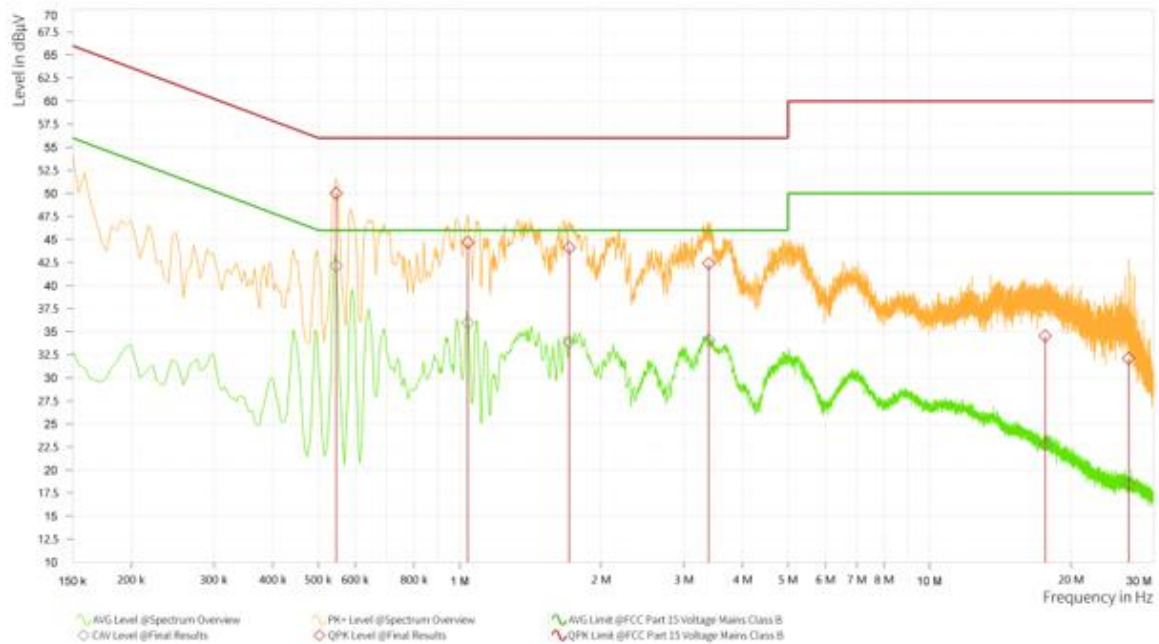



2.2 RADIATED EMISSION MEASUREMENT

2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.109)

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 3 meters (dBµV/m)		
Frequencies (MHz)	FCC 15B Class A	FCC 15B Class B
30-88	49	40
88-216	53.5	43.5
216-960	56	46
960-1000	59.5	54
Above 1000	Avg: 59.5 Peak: 79.5	Avg: 54 Peak: 74

Frequency Range (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 4. QP detector shall be applied if not specified.

2.2.2 TEST INSTRUMENTS

Frequency range below 1GHz

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.27,22	Jun.26,24
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Nov.24,22	Nov.23,25
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,24	Feb.27,26
EMI Test Receiver	R&S	ESW44	101973	Feb.25,24	Feb.24,26
Measurement Software	R&S	ELEKTRA	N/A	N/A	N/A
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
CABLE	R&S	W13.01	N/A	Apr.26,24	Apr.25,25
CABLE	R&S	W13.02	N/A	Apr.26,24	Apr.25,25
CABLE	R&S	W12.14	N/A	Apr.26,24	Apr.25,25

Frequency range above 1GHz

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.27,22	Jun.26,24
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.24,22	Nov.23,25
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
EMI Test Receiver	R&S	ESW44	101973	Feb.25,24	Feb.24,26
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Measurement Software	R&S	ELEKTRA	N/A	N/A	N/A
CABLE	R&S	W13.01	N/A	Apr.26,24	Apr.25,25
CABLE	R&S	W13.02	N/A	Apr.26,24	Apr.25,25
CABLE	R&S	W12.14	N/A	Apr.26,24	Apr.25,25

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.



2.2.3 TEST PROCEDURE

<Frequency Range below 1GHz>

The basic test procedure was in accordance with ANSI C63.4:2014 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier);
4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier).
5. Margin value = Limit value -Emission level.

<Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz

NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth of test receiver/spectrum analyzer is 1Hz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
4. $\text{Emission level(dBuV/m)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
5. $\text{Correction Factor(dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)}$ (if the raw value not contains the amplifier);
6. $\text{Correction Factor(dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)} - \text{Amplifier Gain(dB)}$ (if the raw value contains the amplifier)
7. $\text{Margin value} = \text{Limit value} - \text{Emission level}$.


2.2.4 DEVIATION FROM TEST STANDARD

No deviation.




2.2.5 TEST SETUP

<Frequency Range below 1GHz>

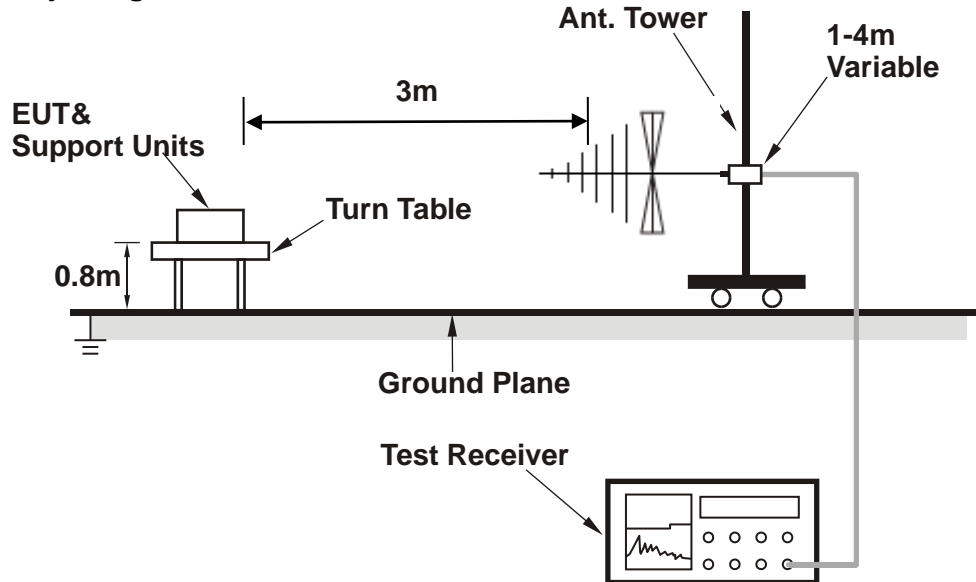

<Frequency Range above 1GHz>

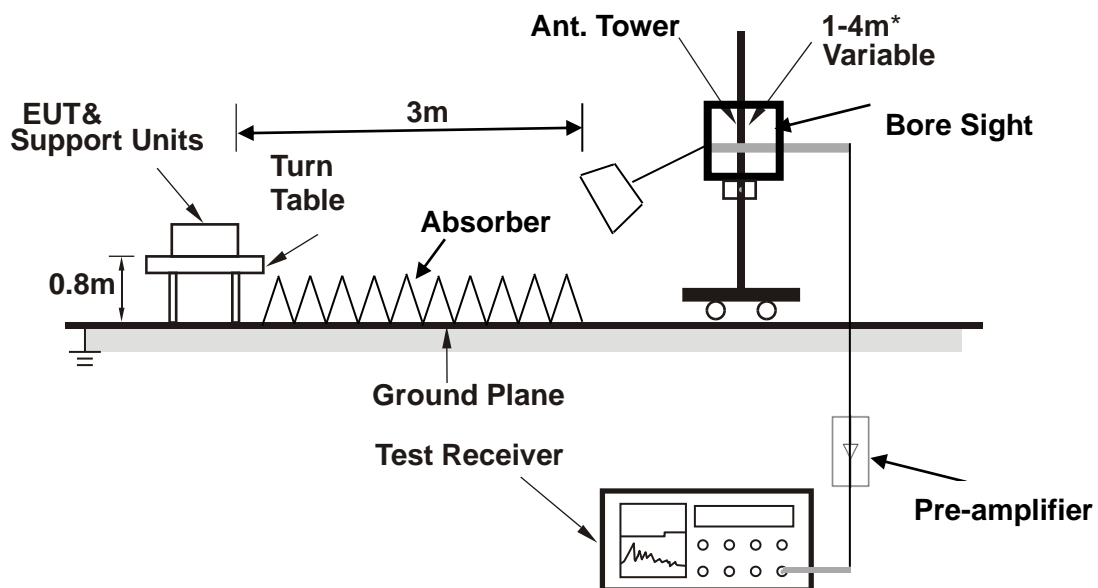

Note: Above 1G is a directional antenna

depends on the EUT height and the antenna 3dB bandwidth both, refer to section 7.3 of CISPR 16-2-3.



Test Report No.: PSU-NQN2405090215EM01

2.2.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the use type described in the manufacturer's specifications or the user's manual.



2.2.7 TEST RESULTS


Worst case:

TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120 kHz
TESTED BY	Hanwen Xu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	37.437	29.23	40.00	10.77	-5.55	H	234.8	1.00	120.000
1	47.568	30.08	40.00	9.92	-3.58	H	78.2	1.00	120.000
1	103.289	27.22	43.50	16.28	-5.85	H	28.4	2.00	120.000
1	201.690	35.77	43.50	7.73	-5.11	H	158.3	1.00	120.000
1	420.317	25.51	46.00	20.49	3.18	H	205.4	2.00	120.000
1	682.648	28.66	46.00	17.34	3.62	H	158.3	1.00	120.000

- REMARKS:**
1. Peak detector quick scan is shown on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 30MHz to 1000MHz.
 4. Only emissions significantly above the equipment noise floor are reported.

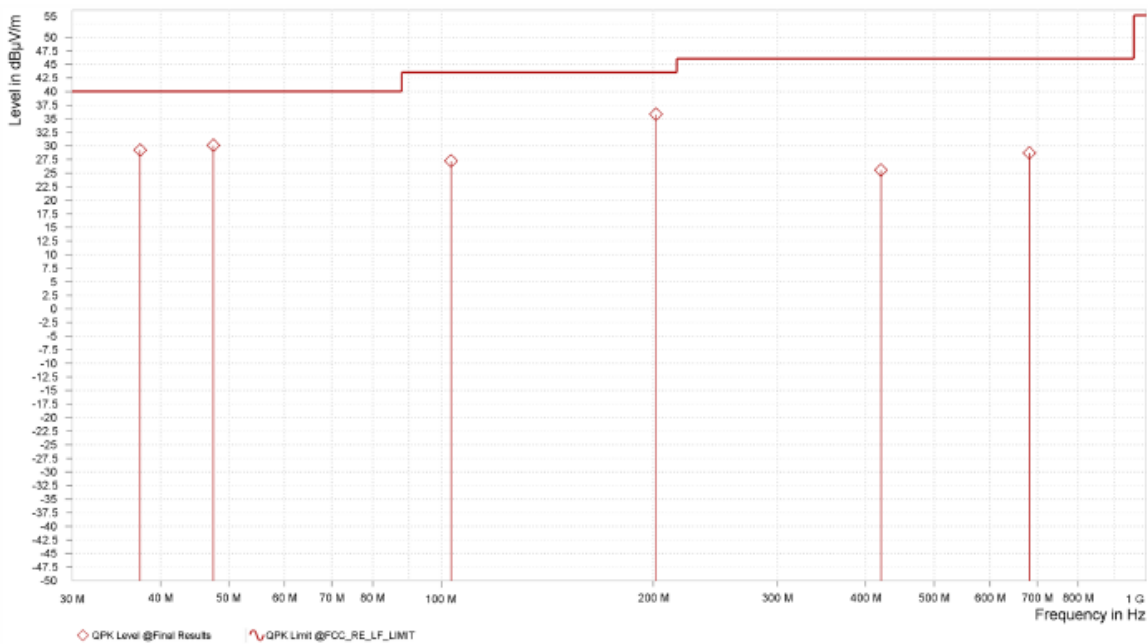




TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120 kHz
TESTED BY	Hanwen Xu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	34.149	31.04	40.00	8.96	-8.37	V	1	1.00	120.000
1	52.310	28.97	40.00	11.03	-4.98	V	1	1.00	120.000
1	98.978	34.07	43.50	9.43	-6.30	V	74.6	1.00	120.000
1	200.019	28.18	43.50	15.32	-5.70	V	74.6	1.00	120.000
1	440.094	25.20	46.00	20.80	2.94	V	74.6	1.00	120.000
1	732.549	29.45	46.00	16.55	4.28	V	359	1.00	120.000

- REMARKS:**
1. Peak detector quick scan is shown on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 30MHz to 1000MHz.
 4. Only emissions significantly above the equipment noise floor are reported.

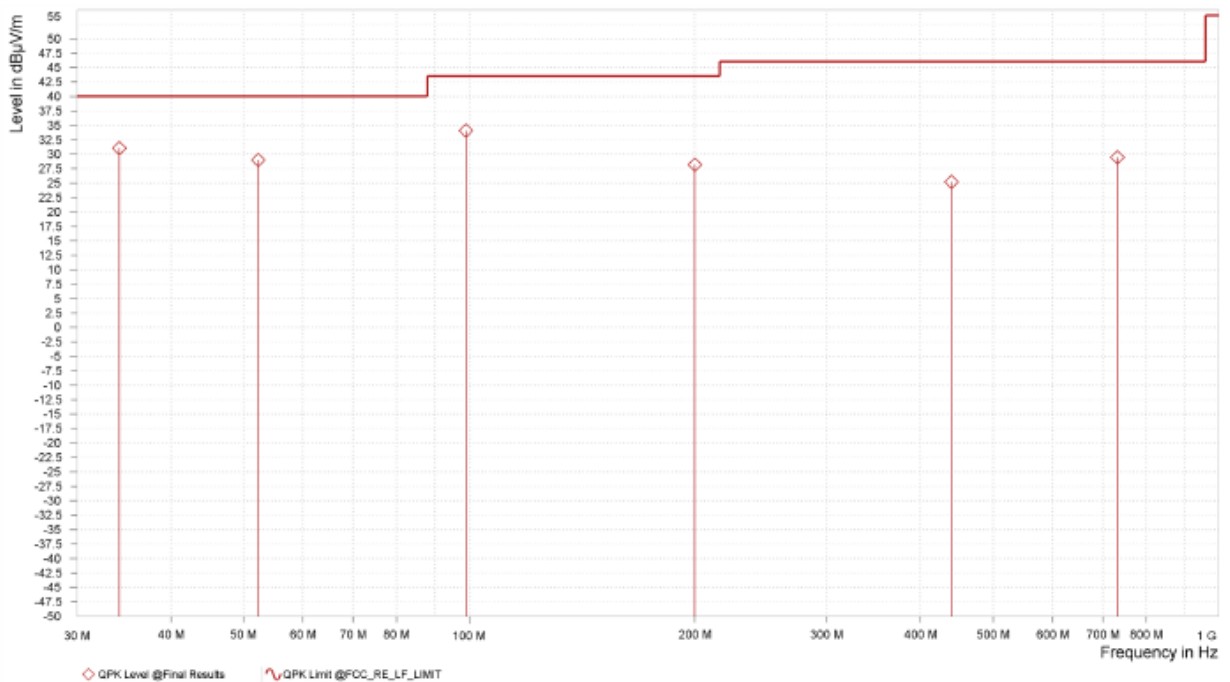




TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Hanwen Xu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,729.000	42.46	74.00	31.54	31.00	54.00	23.00	6.67	H	0.9	2.00
1	4,406.000	45.63	74.00	28.37	33.58	54.00	20.42	9.59	H	359	1.00

- REMARKS:**
1. Peak detector quick scan is shown on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
 4. Only emissions significantly above the equipment noise floor are reported.

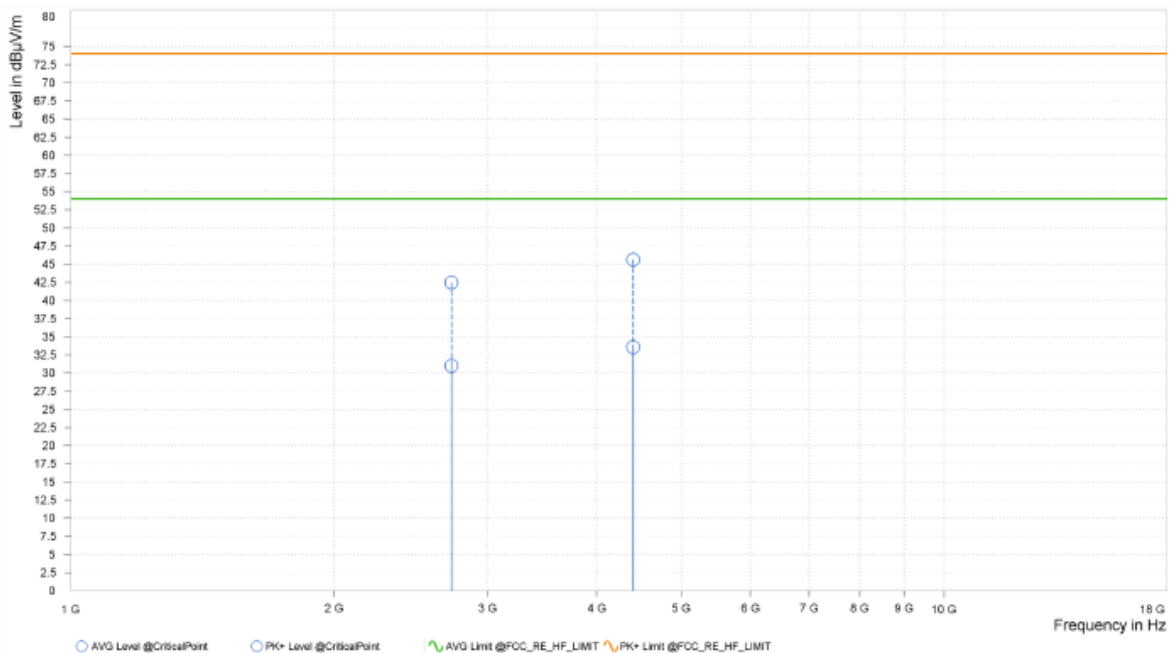



**BUREAU
VERITAS**


Test Report No.: PSU-NQN2405090215EM01

TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Hanwen Xu		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,692.000	42.21	74.00	31.79	31.04	54.00	22.96	6.32	V	202.5	1.00
1	4,482.500	45.41	74.00	28.59	33.52	54.00	20.48	10.20	V	1	2.00

- REMARKS:**
1. Peak detector quick scan is shown on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
 4. Only emissions significantly above the equipment noise floor are reported.

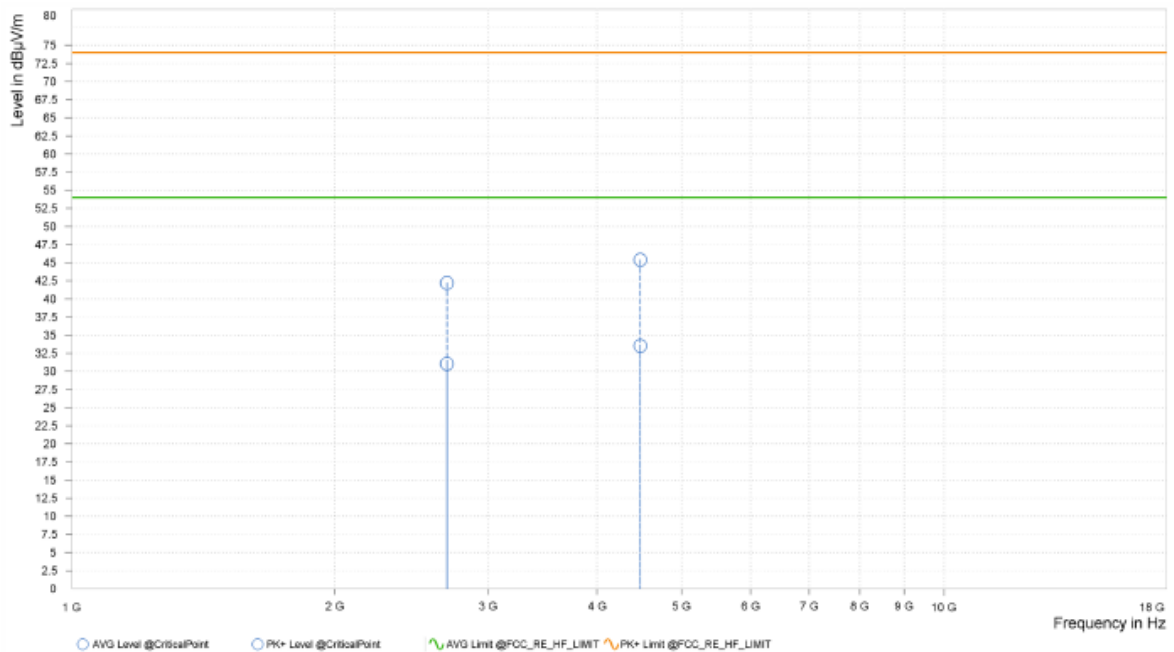



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2405090215EM01

3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---