

TEST REPORT

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-SRF0101
Page (1) of (18)

KCTL

1. Client

- Name : S-winnus Co.,Ltd
- Address : NO. 701, 702, Centum Sky Biz A, 97, Centum jungang-ro, Haeundae-gu, Busan, 48059, South Korea
- Date of Receipt : 2018-06-15

2. Use of Report : -

3. Name of Product and Model : Electronic Seal(iLock) / iLock-S100

4. Manufacturer and Country of Origin : S-winnus Co.,Ltd / Korea

5. FCC ID : 2AJ0X-iLock-S100

6. Date of Test : 2018-06-29 to 2018-07-02

7. Test Standards : FCC Part 15 Subpart C 15.225

8. Test Results : Refer to the test result in the test report

Affirmation	Tested by Name : Seonjun Yun 	Technical Manager Name : Seungyong Kim 
-------------	--	--

2018-08-09

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-SRF0101
Page (2) of (18)

KCTL**REPORT REVISION HISTORY**

Date	Revision	Page No
2018-08-09	Originally issued	-

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.

KCTL

[Contents]

1. Client information	4
2. Laboratory information	5
3. Description of E.U.T.....	6
3.1 Basic description	6
3.2 General description	6
3.3 Test frequency	6
4. Summary of test results.....	7
4.1 Standards & results	7
4.2 Measurement Uncertainty	7
5. Test results	8
5.1 Antenna Requirement	8
5.2 In-band Fundamental Emission	9
5.3 In-band Spurious Emission	11
5.4 Out-of-band Spurious Emission	12
5.5 Frequency tolerance	15
5.6 Conducted Emission	16
6. Test equipment used for test.....	18

1. Client information

Applicant: S-winnus Co.,Ltd
Address: NO. 701, 702, Centum Sky Biz A, 97, Centum jungang-ro,
Haeundae-gu, Busan, 48059, South Korea
Telephone number: +82 51 747 8935
Facsimile number: +82 51 711 7433
Contact person: Joong Jo Shin / spjeong@swinnus.com

Manufacturer: S-winnus Co.,Ltd
Address: NO. 701, 702, Centum Sky Biz A, 97, Centum jungang-ro,
Haeundae-gu, Busan, 48059, South Korea

2. Laboratory information

Address

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

Telephone Number: 82 31 285 0894

Facsimile Number: 82 505 299 8311

FCC Site Designation No: KR0040, FCC Site Registration No: 687132

VCCI Registration No. : R-3327, G-198, C-3706, T-1849

Industry Canada Registration No. : 8035A

KOLAS NO.: KT231

SITE MAP



3. Description of E.U.T.

3.1 Basic description

Applicant	S-winnus Co.,Ltd
Address of Applicant	NO. 701, 702, Centum Sky Biz A, 97, Centum jungang-ro, Haeundae-gu, Busan, 48059, South Korea
Manufacturer	S-winnus Co.,Ltd
Address of Manufacturer	NO. 701, 702, Centum Sky Biz A, 97, Centum jungang-ro, Haeundae-gu, Busan, 48059, South Korea
Type of equipment	Electronic Seal(iLock)
Basic Model	iLock-S100
Serial number	N/A

3.2 General description

Frequency Range	NFC : 13.56 MHz GSM 850 : 824.2 MHz ~ 848.8 MHz GSM 1900 : 1 850.2 MHz ~ 1 909.8 MHz WCDMA Band 5 : 826.4 MHz ~ 846.6 MHz WCDMA Band 2 : 1 852.4 MHz ~ 1 907.6 MHz
Type of Modulation	NFC : ASK GSM 850, 1900 : GMSK, 8DSK WCDMA Band 5, 2 : QPSK
Type of Antenna	FPCB Antenna (GSM, WCDMA), PCB Pattern Antenna (NFC)
Antenna Gain	GSM 850, 1900: 0.2 dBi GSM 1900: 1.7 dBi WCDMA Band 5 : 0.2 dBi WCDMA Band 2 : 1.7 dBi
Power supply	DC 3.7 V
Product SW/HW version	V. 3.0.7 / S-Tracking-g-v6
Radio SW/HW version	V. 3.0.7 / S-Tracking-g-v6
Test SW Version	V. 3.0.7
RF power setting in TEST SW	default

Note : The above EUT information was declared by the manufacturer.

3.3 Test frequency

Frequency	13.56 MHz
-----------	-----------

4. Summary of test results

4.1 Standards & results

Rule Reference	Parameter	Status
15.203	Antenna Requirement	C
15.225 (a)	In-band Fundamental Emission	C
15.225 (b)	In-band Spurious Emission	C
15.225 (c)	In-band Spurious Emission	C
15.225 (d) 15.209	Out-of-band Spurious Emission	C
15.225 (e)	Frequency Stability Tolerance	C
15.207	Conducted Emissions	C

Note₁): C = Complies, NC = Not Complies, NT = Not Tested, NA = Not Applicable

4.2 Measurement Uncertainty

Measurement Item	Expanded Uncertainty $U = kU_c (k = 2)$	
Radiated Spurious Emissions	30 MHz ~ 300 MHz:	+4.94 dB, -5.06 dB
		+4.93 dB, -5.05 dB
	300 MHz ~ 1 000 MHz:	+4.97 dB, -5.08 dB
		+4.84 dB, -4.96 dB
Conducted Emissions	9 kHz ~ 150 kHz:	3.75 dB
	150 kHz ~ 30 MHz:	3.36 dB

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-SRF0101
Page (8) of (18)

KCTL

5. Test results

5.1 Antenna Requirement

5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.1.2 Result

-Complied

The PCB antenna is permanantly attached on board.

KCTL

5.2 In-band Fundamental Emission

5.2.1 Regulation

15.225 (a) The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

5.2.2 Measurement Procedure

Test Procedure The Radiated Electric Field Strength intensity has been measured on semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9 kHz to 30 MHz at distance 3m The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

Frequency : From 30 MHz to 1 GHz at distance 3m The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with a QP, PK, and AV detector. The radiated emission measurements were made with the following detector function of the test receiver (below 1 GHz).

Frequency	9 - 90 kHz	90 - 110 kHz	110 - 490 kHz	490 kHz - 30 MHz	30 MHz -1 GHz
Detector type	PK/AV	QP	PK/AV	QP	QP
IF bandwidth	200 Hz	200 Hz	9 kHz	9 kHz	120 kHz

- Part 15 Section 15.31 (f)(2) (9 kHz - 30 MHz)
 [Limit at 3m]=[Limit at 300m]-40 x log(3[m]/300[m])
 [Limit at 3m]=[Limit at 30m]-40 x log (3[m]/30[m])

Note : Axis among X, Y and Z plans (Please refer to the "Test setup photos" to check X, Y, Z configuration).


5.2.3 Test Result

- Complied

Voltage [V]	Frequency [MHz]	Reading [dB _u V]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB _u N/m at 3 m]	Limit [dB _u N/m at 3 m]	Margin [dB]
QP DATA.									
3.7	13.56	57.00	0.51	-32.67	19.56	-12.60	44.40	124.00	79.60

[Result = Reading + Amp Gain + AF + CL]

1. H = Horizontal, V = Vertical Polarization
2. AF/CL = Antenna Factor and Cable Loss
3. Factor = CL+AF+AG
4. Limit (dB_uV/m at 3m) = $20 \log (15\ 848) + 40 \log (30 / 3) = 124.00$ (dB_uV/m at 3m)

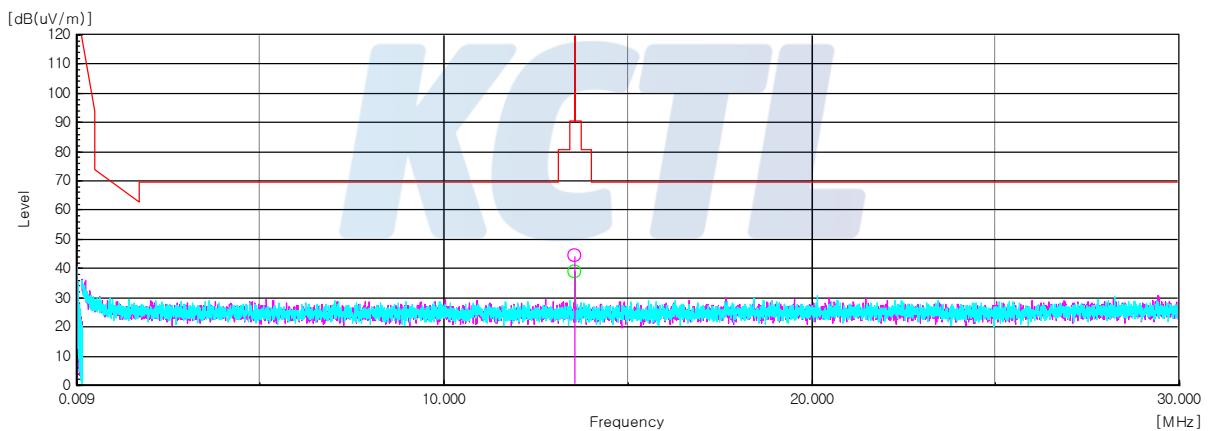

5.3 In-band Spurious Emission

5.3.1 Regulation

15.225 (b) With in the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

15.225 (c) With in the bands 13.110-13.410 MHz and 13.710-14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

5.3.2 Test Result

- Complied


Measurement Distance: 3 m

Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(μV)]	Pol. [V/H]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
PEAK DATA.										
13.51	9	35.90	H	0.51	-32.67	19.56	-12.60	23.30	90.50	67.20
13.24	9	35.70	H	0.50	-32.67	19.57	-12.60	23.10	80.50	57.40
13.81	9	35.40	V	0.52	-32.67	19.55	-12.60	22.80	80.50	57.70
13.63	9	36.00	V	0.52	-32.67	19.55	-12.60	23.40	90.50	67.10

Note : This test was performed by using peak

[Result = Reading + Amp Gain + AF + CL]

1. H = Horizontal, V = Vertical Polarization
2. AF/CL = Antenna Factor and Cable Loss
3. Factor = CL+AF+AG
4. Limit (dBuV/m at 3m)
 - $20 \log (334) + 40 \log (30 / 3) = 90.50$ (dBuV/m at 3m)
 - $20 \log (106) + 40 \log (30 / 3) = 80.50$ (dBuV/m at 3m)

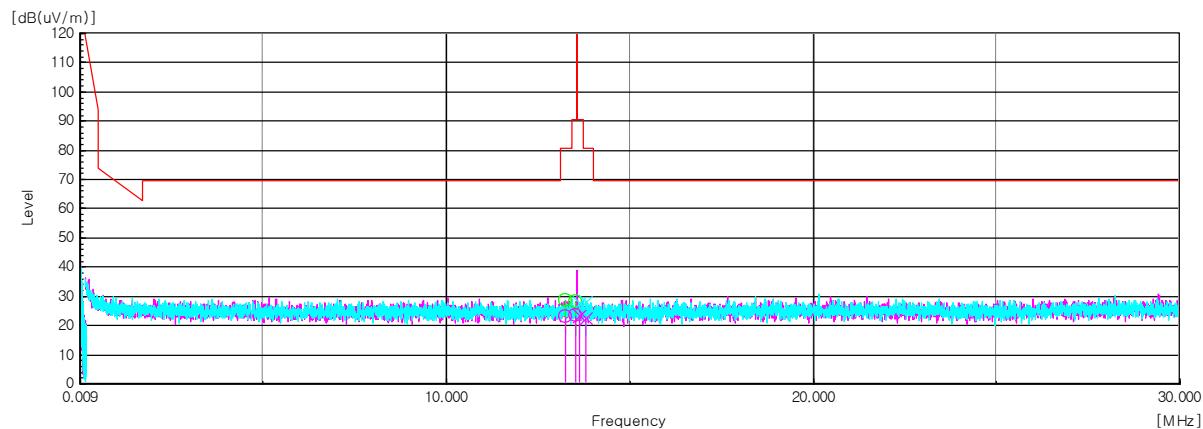

5.4 Out-of-band Spurious Emission

5.4.1 Regulation

15.225 (d) The Field Strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in 15.209

Frequency (MHz)	Field Strength (μ V/m)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30(29.54 dB μ V/m)	30
30.0-88.0	100(40 dB μ V/m)	3
88-216	150(43.5 dB μ V/m)	3
216-960	200 (46 dB μ V/m)	3
Above 960	500 (53.98 dB μ V/m)	3

5.4.2 Measurement Procedure

The spurious emissions from the EUT will be measured on an 10 m Anechoic chamber in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna.

The antenna was positioned 3, 10 or 30 meters horizontally from the EUT.

Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

In the case where larger measuring distances are required the results will be extrapolated based on the values measuring on the closer distances according to Section 15.31 (f) (2) [2].

The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the EMI receiver (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit. The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.

The EUT was placed on the top of the 0.8 meter height, 1 x 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.

The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 30 to 1 000 MHz using the BILOG antenna. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 10 m chamber. The EUT was tested at a distance 3 meters.

Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR18-SRF0101
Page (13) of (18)



5.4.3 Test Result

- Complied

Measurement Distance: 3 m

-Below 30 MHz

Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(µV)]	Pol. [V/H]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
PEAK DATA.										
5.17	9	35.50	H	0.79	-32.69	19.70	-12.20	23.30	69.50	46.20
20.48	9	36.10	H	0.79	-32.68	19.29	-12.60	23.50	69.50	46.00

-Above 30 MHz


Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(µV)]	Pol. [V/H]	Cable Loss [dB]	Amp Gain [dB]	Antenna Factor [dB]	Factor [dB]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
QUASI PEAK DATA.										
67.22	120	24.40	H	1.71	-32.55	12.44	-18.40	6.00	40.00	34.00
271.17	120	42.30	H	3.67	-37.59	18.62	-15.30	27.00	46.00	19.00
277.96	120	30.60	V	3.72	-37.48	18.76	-15.00	15.60	46.00	30.40
542.40	120	39.30	H	5.38	-35.73	23.85	-6.50	32.80	46.00	13.20
786.48	120	32.70	V	6.54	-33.65	25.61	-1.50	31.20	46.00	14.80
840.80	120	19.70	H	6.77	-33.00	26.03	-0.20	19.50	46.00	26.50

Note : This test was performed by using peak detector mode. If peak result meets the limit, QP measurement is skipped.


[Result = Reading + Amp Gain + AF + CL]

1. H = Horizontal, V = Vertical Polarization
2. AF/CL = Antenna Factor and Cable Loss
3. Factor = CL+AF+AG

-Below 30 MHz

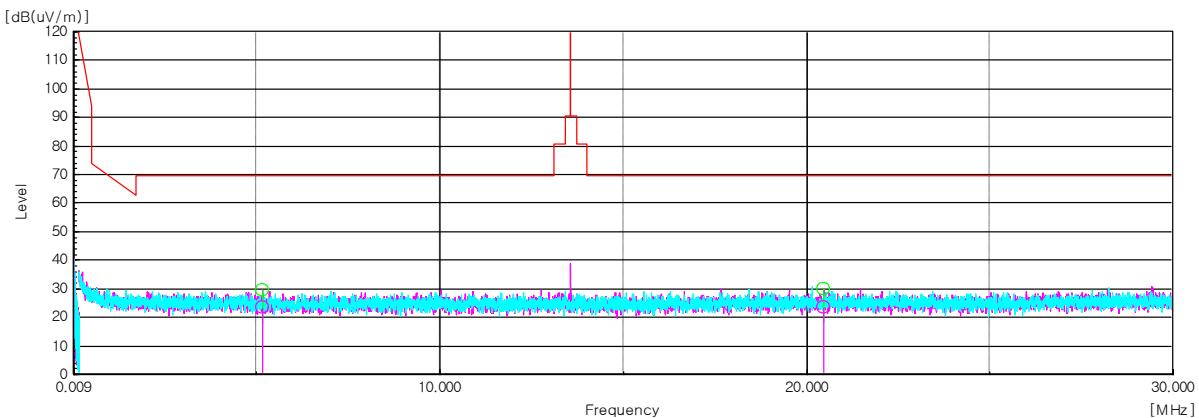

-Below 1 GHz

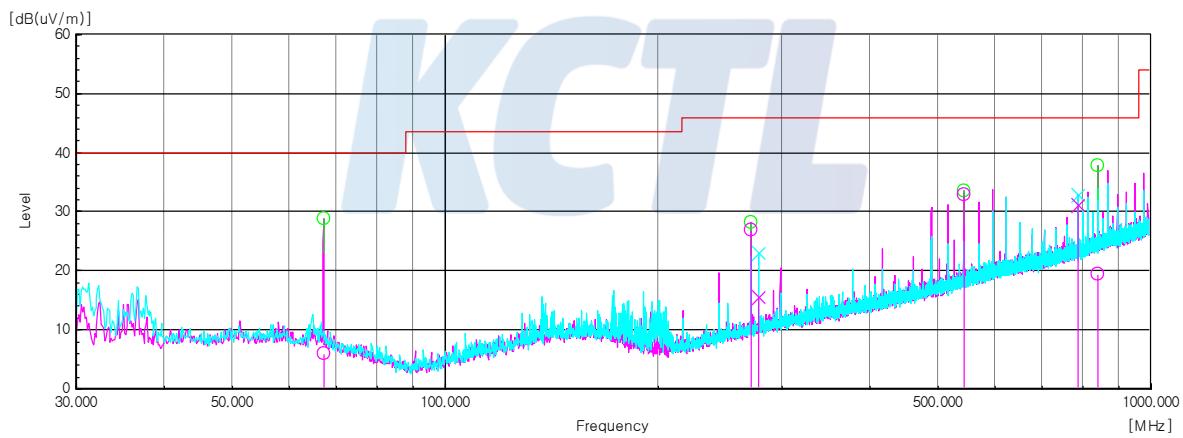

5.5 Frequency tolerance

5.5.1 Regulation

15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

5.5.2 Test Result

- Complied

VOLTAGE [%]	POWER [V]	TEMP [°C]	FREQ [Hz]	FREQ.DEV [Hz]	Deviation [%]
100	3.70	-20	13 559 600	-400	-0.002 95
		-10	13 559 750	-250	-0.001 84
		0	13 559 600	-400	-0.002 95
		10	13 559 950	-50	-0.000 37
		20	13 559 630	-370	-0.002 73
		25	13 559 630	-370	-0.002 73
		30	13 559 600	-400	-0.002 95
		40	13 559 600	-400	-0.002 95
		50	13 559 600	-400	-0.002 95
85	3.15	20	13 559 600	-400	-0.002 95
115	4.23	20	13 559 600	-400	-0.002 95

5.6 Conducted Emission

5.6.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.


5.6.2 Measurement Procedure

- 1) The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
- 2) Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
- 3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
- 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
- 5) The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

5.6.3 Test Result

- Complied

Figure4. The plot of Conducted Emission

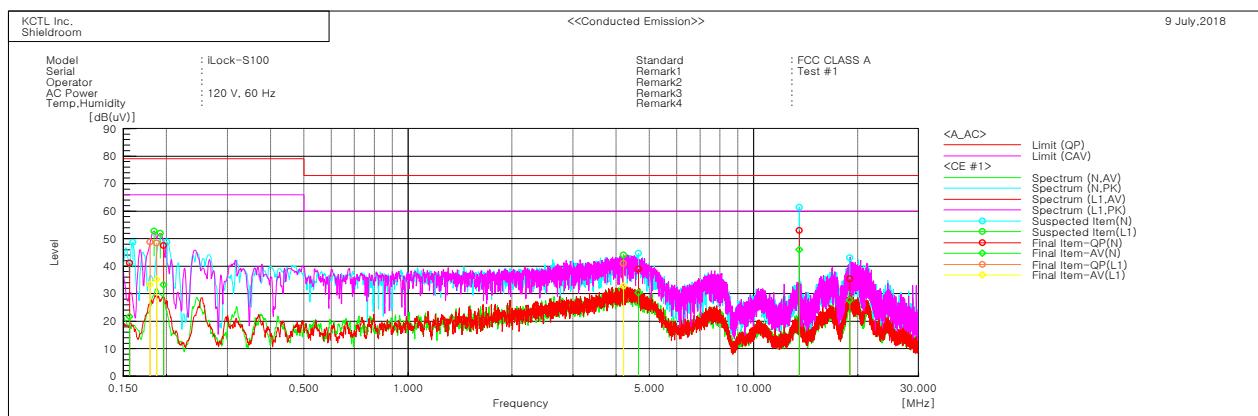

Final Result

--- N Phase ---											
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f.	Result QP [dB]	Result CAV [dB]	Limit QP [dB]	Limit AV [dB]	Margin QP [dB]	Margin CAV [dB]	
1	0.15647	31.3	11.8	9.8	41.1	21.6	79.0	66.0	37.9	44.4	
2	0.19593	37.7	23.4	9.8	47.5	33.2	79.0	66.0	31.5	32.8	
3	4.63765	29.2	20.6	9.7	38.9	30.3	73.0	60.0	34.1	29.7	
4	13.55959	42.9	36.0	10.0	52.9	46.0	73.0	60.0	20.1	14.0	
5	18.97637	25.3	17.5	10.1	35.4	27.6	73.0	60.0	37.6	32.4	

--- L1 Phase ---											
No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f.	Result QP [dB]	Result CAV [dB]	Limit QP [dB]	Limit AV [dB]	Margin QP [dB]	Margin CAV [dB]	
1	0.17909	38.9	23.3	9.9	48.8	33.2	79.0	66.0	30.2	32.8	
2	0.18712	38.5	25.2	9.9	48.4	35.1	79.0	66.0	30.6	30.9	
3	4.19996	31.2	23.1	9.7	40.9	32.8	73.0	60.0	32.1	27.2	

6. Test equipment used for test

	Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
■	Spectrum Analyzer	R&S	FSV30	100810	2018-08-01
■	Temp & Humid Chamber	ESPEC CORP.	SH-661	92004048	2019-01-05
■	DC Power Supply	Agilent	E3632A	MY40027567	2019-05-14
■	VECTOR SIGNAL GENERATOR	R & S	SMBV100A	257566	2019-01-05
■	SIGNAL GENERATOR	R & S	SMB100A	176206	2019-01-31
■	Loop Antenna	R&S	HFH2-Z2	892665/035	2019-01-25
■	EMI TEST RECEIVER	R&S	ESCI7	100732	2018-08-24
■	Bilog Antenna	TESEQ	CBL 6112D	37876	2018-08-05
■	AMPLIFIER	SONOMA	310N	186280	2019-04-05
■	ATTENUATOR	AGILENT	8491B	MY39270292	2018-08-05
■	Antenna Mast	Innco Systems	MA4000-EP	303	-
■	Turn Table	Innco Systems	DT2000	79	-