

TEST REPORT

Applicant: EBSCO Industries Inc., DBA PRADCO Outdoor Brands
Address: 5724 Highway 280 East, Birmingham Alabama, 35242, United States
Equipment Type: EDGE 2 PRO
Model Name: EDGE 2 PRO
Brand Name: MOULTRIE MOBILE
FCC ID: 2AJQ6MMC-14125
Test Standard: 47 CFR Part 15 Subpart B
ANSI C63.4-2014
Sample Arrival Date: Apr. 09, 2024
Test Date: Apr. 17, 2024 - Apr. 18, 2024
Date of Issue: May 22, 2024

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Li JunFeng

Checked by: Zhenxiang Liu

Approved by: Liao Jianming
(Technical Director)



Revision History		
Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>May 22, 2024</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1 GENERAL INFORMATION.....	3
1.1 Test Laboratory	3
1.2 Test Location.....	3
2 PRODUCT INFORMATION	4
2.1 Applicant Information.....	4
2.2 Manufacturer Information	4
2.3 General Description for Equipment under Test (EUT)	4
2.4 Ancillary Equipment.....	4
2.5 Technical Information	4
3 SUMMARY OF TEST RESULTS.....	5
3.1 Test Standards	5
3.2 Verdict	5
3.3 Test Uncertainty	5
4 GENERAL TEST CONFIGURATIONS	6
4.1 Test Enclosure List.....	6
4.2 Test Configurations	6
4.3 Test Setups	8
5 TEST ITEMS.....	10
5.1 Emission Tests	10
ANNEX A TEST RESULTS	15
A.1 Radiated Emission	15
A.2 Conducted Emission, AC Ports.....	22
ANNEX B TEST SETUP PHOTOS.....	25
ANNEX C EUT EXTERNAL PHOTOS.....	25

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	EBSCO Industries Inc., DBA PRADCO Outdoor Brands
Address	5724 Highway 280 East, Birmingham Alabama, 35242, United States

2.2 Manufacturer Information

Manufacturer	EBSCO Industries Inc., DBA PRADCO Outdoor Brands
Address	5724 Highway 280 East, Birmingham Alabama, 35242, United States

2.3 General Description for Equipment under Test (EUT)

EUT Name	EDGE 2 PRO
Model Name Under Test	EDGE 2 PRO
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	2.0
Software Version	1.2.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	Charging Cable	
	Length (Approx.)	1m

2.5 Technical Information

Network and Wireless connectivity	4G Network FDD LTE Band 2/4/5/12/13/66 Bluetooth BLE
Classification of equipment	Class B
The highest internal frequency of EUT	2.4 GHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Remark
1	Radiated Emission	15.109	Pass	--
2	Conducted Emission, AC Ports	15.107	Pass	--

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.2 dB
Radiated emissions (30 MHz-1 GHz)-966#2	4.4 dB
Radiated emissions (1 GHz-18 GHz)-966#2	5.0 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Wireless Communications Test Set	R&S	CMW500	127801	N/A	Cal. Due 2024.12.04	<input checked="" type="checkbox"/>
Laptop	Lenovo	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
AC Adapter	SKYWORTH	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
USB Cable	N/A	N/A	N/A	1m	N/A	<input checked="" type="checkbox"/>
Network Cable	N/A	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Serial port board	N/A	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Dry battery	N/A	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>

4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The Dry battery Test Mode</u> EUT + Dry battery + Camera + Laptop + USB Cable + Serial port board
Mode 2	<u>The AC Adapter Test Mode</u> EUT + AC Adapter + Camera + Laptop + USB Cable + Serial port board
Mode 3	<u>The FDD LTE Band 2 RX Test Mode</u> LTE Band 2 RX + EUT + Dry battery + Camera
Mode 4	<u>The FDD LTE Band 4 RX Test Mode</u> LTE Band 4 RX + EUT + Dry battery + Camera
Mode 5	<u>The FDD LTE Band 5 RX Test Mode</u> LTE Band 5 RX + EUT + Dry battery + Camera
Mode 6	<u>The FDD LTE Band 12 RX Test Mode</u> LTE Band 12 RX + EUT + Dry battery + Camera
Mode 7	<u>The FDD LTE Band 13 RX Test Mode</u> LTE Band 13 RX + EUT + Dry battery + Camera
Mode 8	<u>The FDD LTE Band 66 RX Test Mode</u> LTE Band 66 RX + EUT + Dry battery + Camera

Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1~Mode 8	1
Conducted Emission, AC Ports	Mode 2	2


Test Case	Test Mode Configuration	Worst Mode
Note: All operation modes were tested, but only test data of the worst mode was presented in this report.		

4.3 Test Setups

Test Setup 1

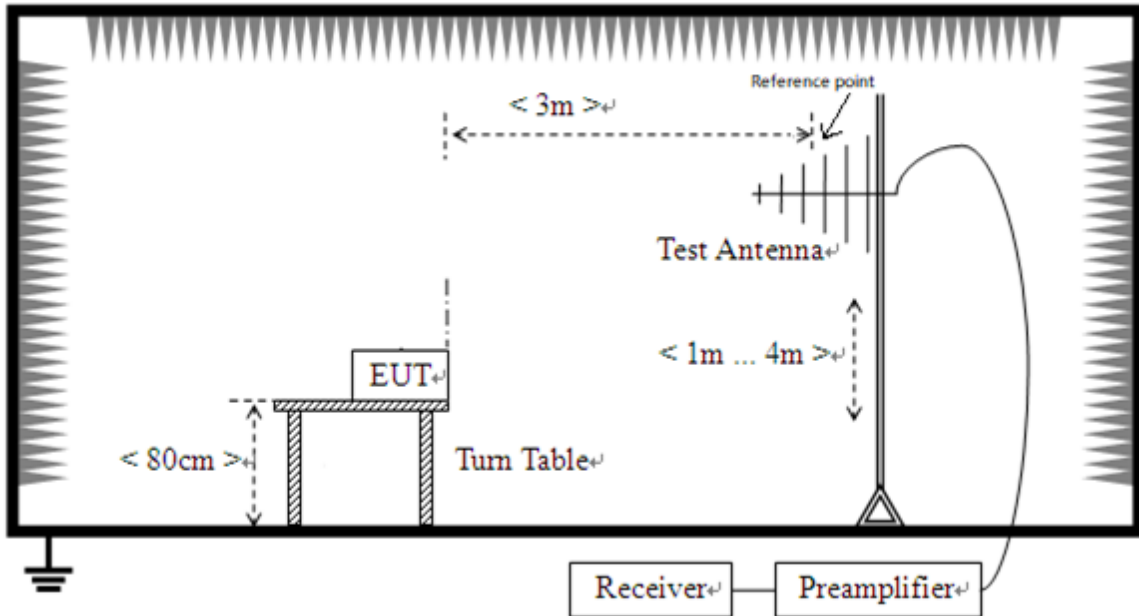


Radiated Emission (30 MHz-1 GHz)

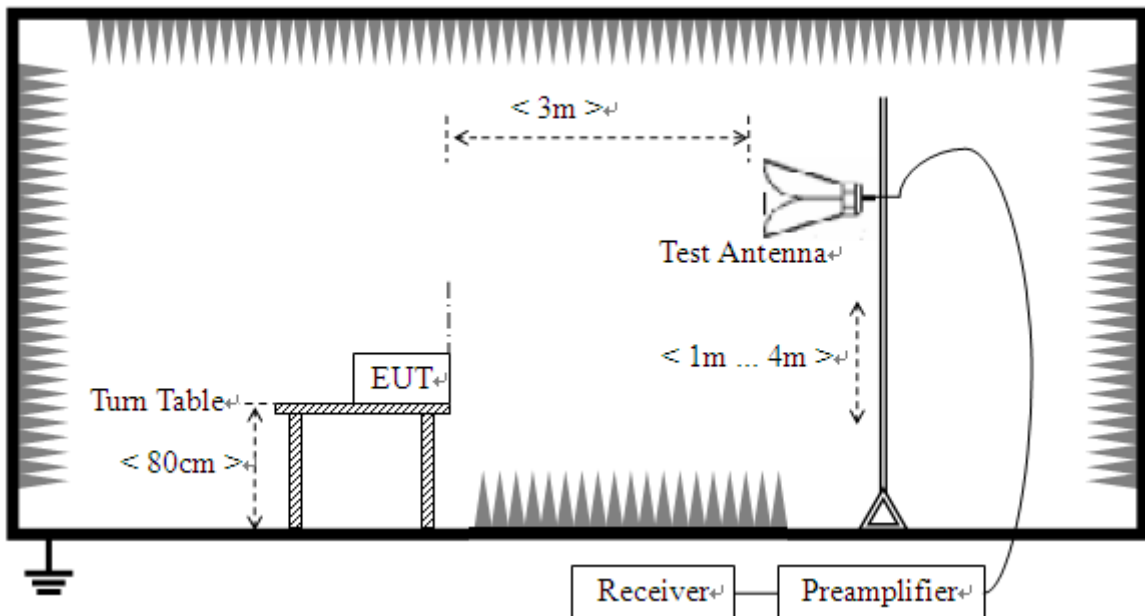

Radiated Emission (above 1 GHz)

Test Setup 2

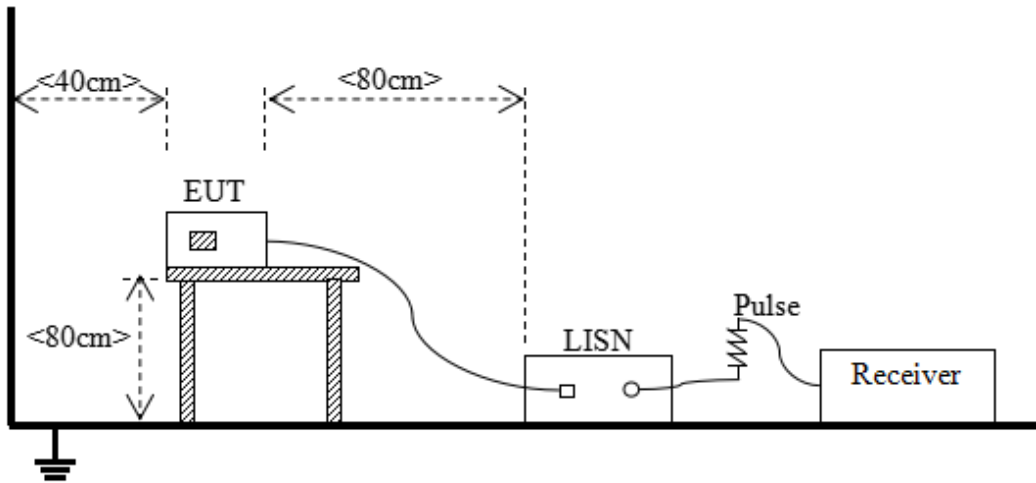

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = 20*log [Field Strength ($\mu\text{V/m}$)].
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F _M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M, in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$

Where:

L_{3m} is Average Class A limit at 3m;

L_{10m} is Average Class A limit at 10m;

d_{10m} is Measurement distance in 10m;

d_{3m} is Measurement distance in 3m.

For this case: L_{3m} = 49.5 + 20*log(10/3)=60 (dB $\mu\text{V/m}$).

Highest internal frequency (F_x)	Highest measurement frequency (F_M)
$F_x \leq 108$ MHz	1 GHz
108 MHz $\leq F_x \leq 500$ MHz	2 GHz
500 MHz $\leq F_x \leq 1$ GHz	5 GHz
$F_x \geq 1$ GHz	$5 * F_x$ or 40 GHz, whichever is lower.
Note: F_x is Highest frequency generated or used in the device or on which the device operates or tunes.	

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak for $f < 1$ GHz, peak & RMS Average for $f \geq 1$ GHz

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit - Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW \geq RBW

Sweep = 10ms

Detector function = peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit - Results

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Sample No.	S04	Temperature	23.2°C
Humidity	61%RH	Pressure	101kPa
Test Engineer	He Shichang	Test Date	2024.04.17


Test Mode 1

1) Test Antenna Vertical, 30 MHz – 1 GHz

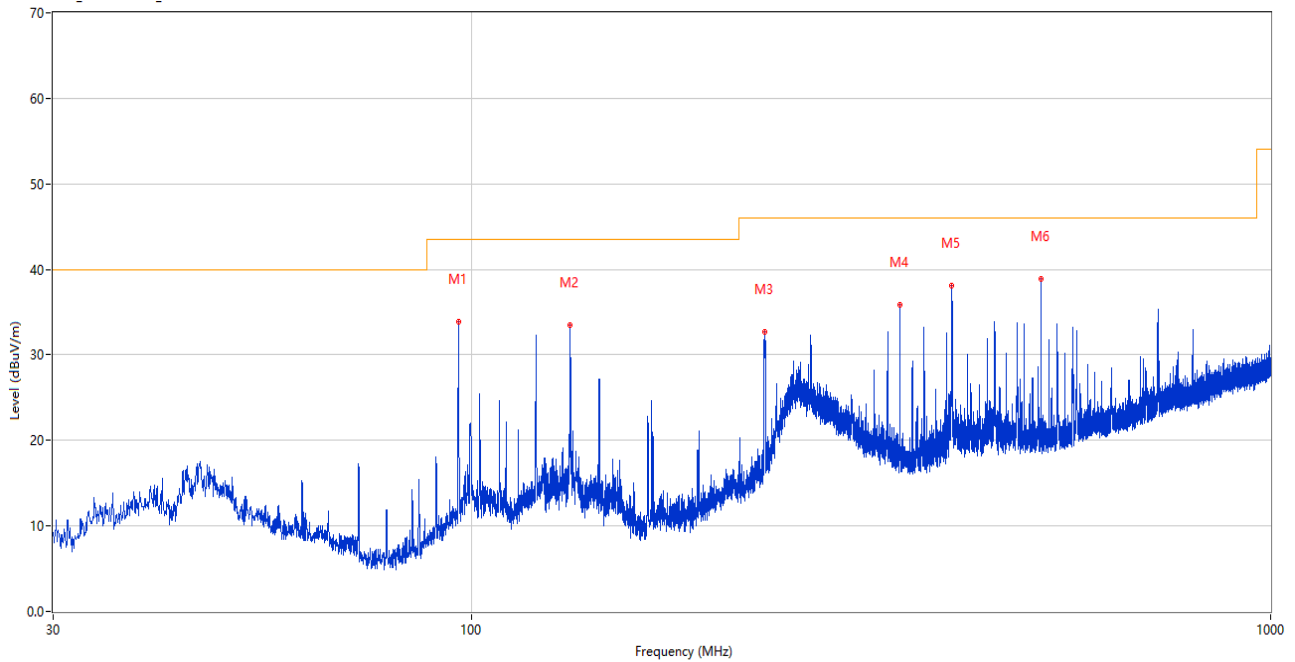

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	96.445	33.84	-27.30	43.5	9.66	Peak	28.00	100	Vertical	Pass
2	132.917	33.50	-29.94	43.5	10.00	Peak	80.00	100	Vertical	Pass
3	233.264	32.74	-25.44	46.0	13.26	Peak	117.00	200	Vertical	Pass
4	344.086	35.88	-22.15	46.0	10.12	Peak	125.00	200	Vertical	Pass
5	399.037	38.13	-20.98	46.0	7.87	Peak	106.00	100	Vertical	Pass
6	516.115	38.94	-18.27	46.0	7.06	Peak	38.00	100	Vertical	Pass


2) Test Antenna Horizontal, 30 MHz – 1 GHz

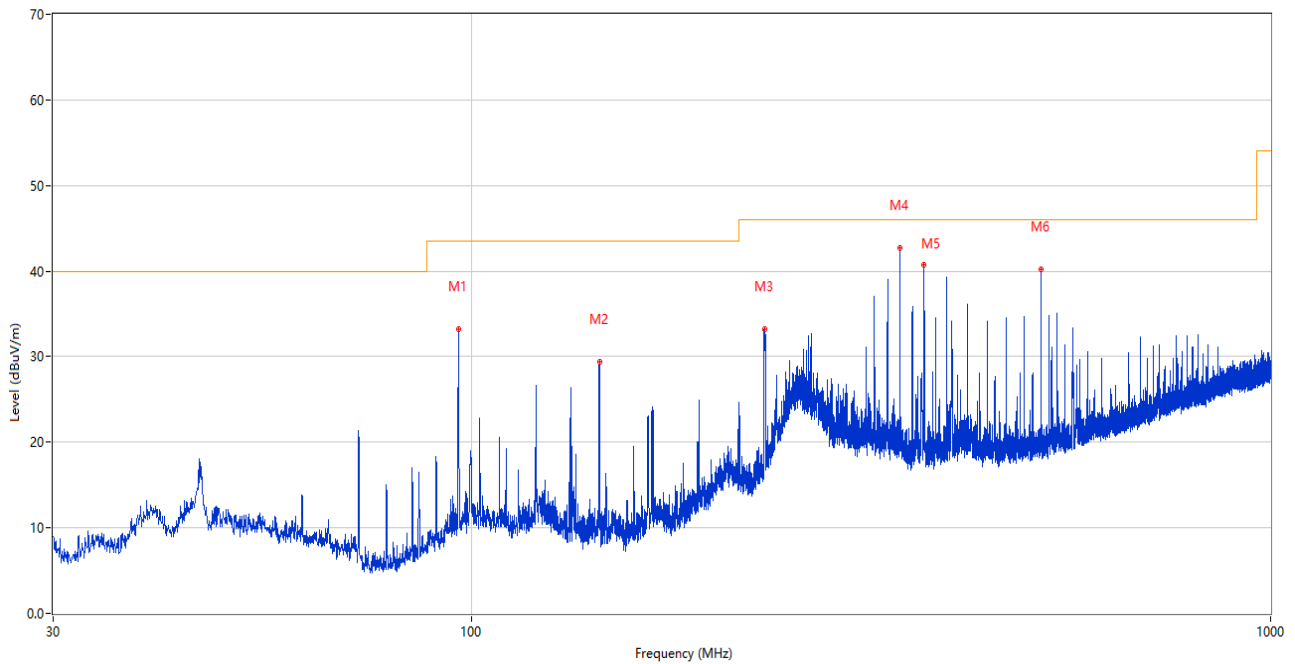

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	96.445	33.23	-27.30	43.5	10.27	Peak	158.00	200	Horizontal	Pass
2	144.654	29.46	-30.21	43.5	14.04	Peak	145.00	200	Horizontal	Pass
3	233.264	33.20	-25.44	46.0	12.80	Peak	56.00	100	Horizontal	Pass
4	344.086	42.68	-22.15	46.0	3.32	Peak	194.00	100	Horizontal	Pass
5	368.627	40.72	-21.90	46.0	5.28	Peak	303.00	100	Horizontal	Pass
6	516.115	40.19	-18.27	46.0	5.81	Peak	235.00	200	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2023.09.05	2024.09.04	<input checked="" type="checkbox"/>
Amplifier (30MHz-1GHz)	COM-MV	ZT30-1000M	B2017119081	2023.12.05	2024.12.04	<input checked="" type="checkbox"/>
Test Antenna- Bi-Log	SCHWARZB ECK	VULB 9168	9168-00867	2022.04.12	2025.04.11	<input checked="" type="checkbox"/>
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2021.08.19	2024.08.18	<input checked="" type="checkbox"/>
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		<input checked="" type="checkbox"/>

3) Test Antenna Vertical, 1 GHz – 12.75 GHz

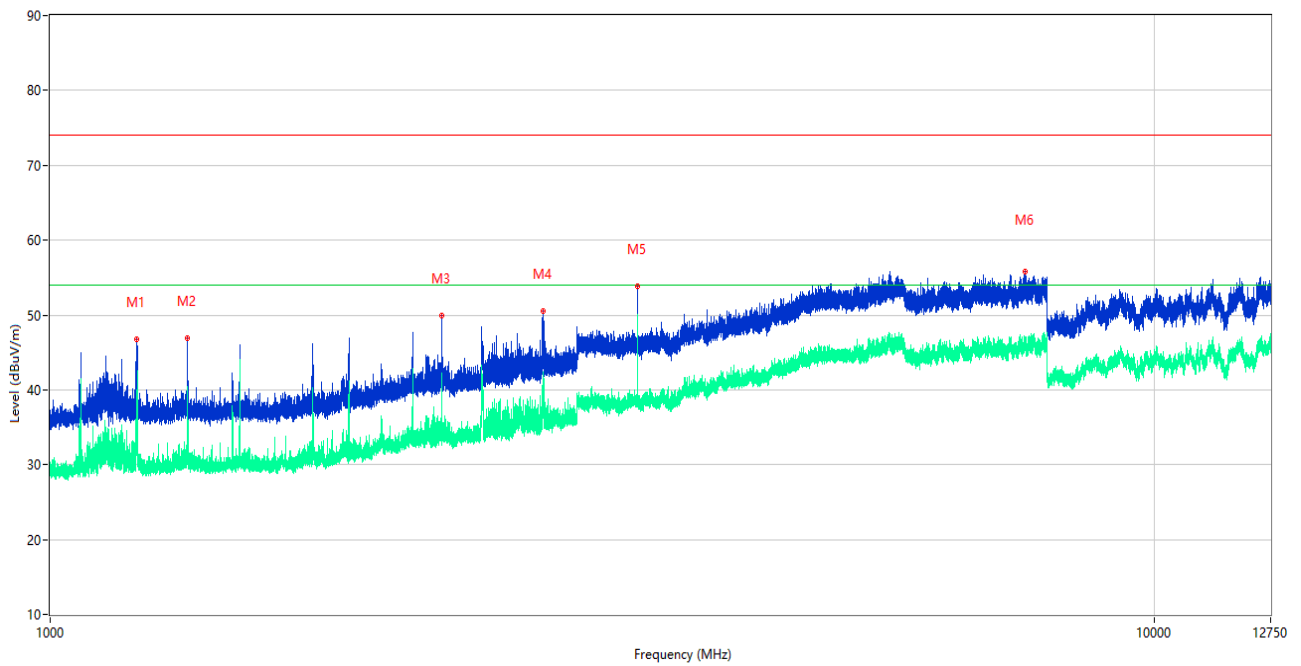

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.200	46.77	-16.22	74.0	27.23	Peak	211.00	100	Vertical	Pass
1**	1198.200	39.58	-16.22	54.0	14.42	AV	211.00	100	Vertical	Pass
2	1330.400	46.86	-16.10	74.0	27.14	Peak	43.00	100	Vertical	Pass
2**	1330.400	39.65	-16.10	54.0	14.35	AV	43.00	100	Vertical	Pass
3	2263.300	49.91	-12.50	74.0	24.09	Peak	163.00	100	Vertical	Pass
3**	2263.300	41.22	-12.50	54.0	12.78	AV	163.00	100	Vertical	Pass
4	2796.300	50.56	-8.32	74.0	23.44	Peak	155.00	100	Vertical	Pass
4**	2796.300	36.53	-8.32	54.0	17.47	AV	155.00	100	Vertical	Pass
5	3406.250	53.85	-4.63	74.0	20.15	Peak	140.00	100	Vertical	Pass
5**	3406.250	48.02	-4.63	54.0	5.98	AV	140.00	100	Vertical	Pass
6	7638.500	55.74	2.46	74.0	18.26	Peak	221.00	100	Vertical	Pass
6**	7638.500	45.98	2.46	54.0	8.02	AV	221.00	100	Vertical	Pass

4) Test Antenna Horizontal, 1 GHz – 12.75 GHz

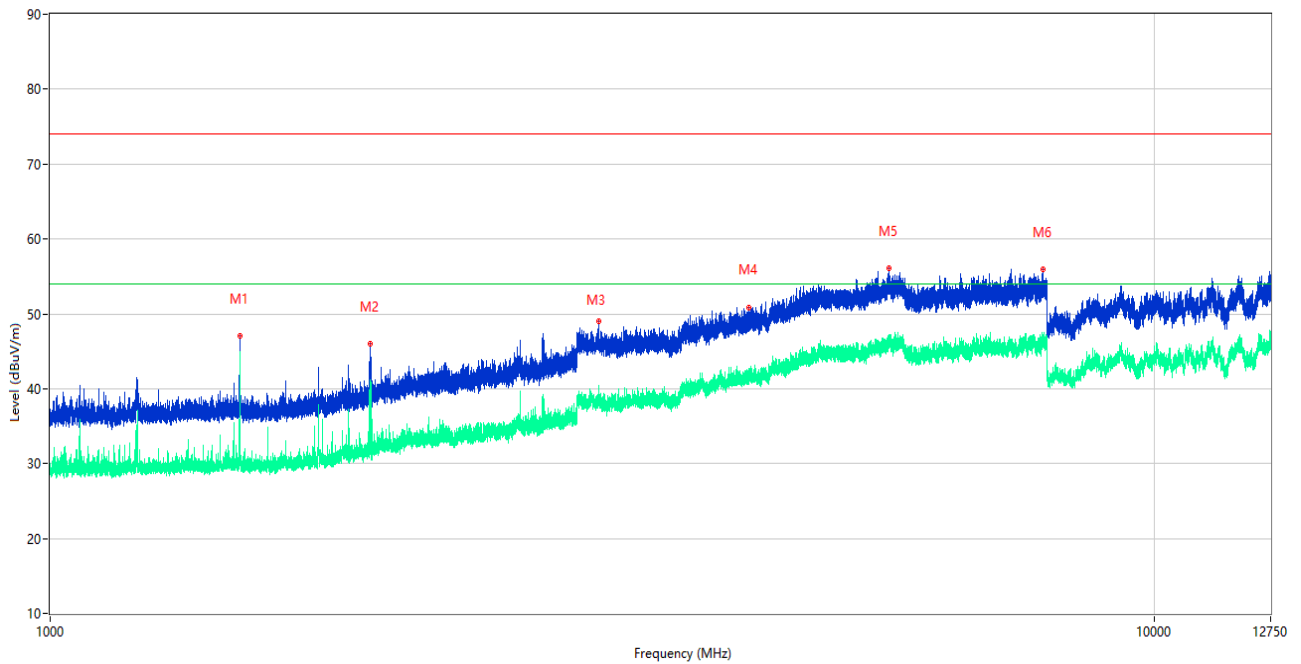

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1485.000	47.04	-15.94	74.0	26.96	Peak	72.00	100	Horizontal	Pass
1**	1485.000	44.34	-15.94	54.0	9.66	AV	72.00	100	Horizontal	Pass
2	1950.800	46.04	-14.10	74.0	27.96	Peak	207.00	100	Horizontal	Pass
2**	1950.800	38.07	-14.10	54.0	15.93	AV	207.00	100	Horizontal	Pass
3	3141.250	49.06	-4.78	74.0	24.94	Peak	221.00	100	Horizontal	Pass
3**	3141.250	38.83	-4.78	54.0	15.17	AV	221.00	100	Horizontal	Pass
4	4297.750	50.89	-0.34	74.0	23.11	Peak	88.00	100	Horizontal	Pass
4**	4297.750	42.77	-0.34	54.0	11.23	AV	88.00	100	Horizontal	Pass
5	5753.750	56.11	3.44	74.0	17.89	Peak	212.00	100	Horizontal	Pass
5**	5753.750	46.91	3.44	54.0	7.09	AV	212.00	100	Horizontal	Pass
6	7928.000	55.93	3.06	74.0	18.07	Peak	79.00	100	Horizontal	Pass
6**	7928.000	46.52	3.06	54.0	7.48	AV	79.00	100	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2023.09.05	2024.09.04	<input checked="" type="checkbox"/>
Amplifier (1-12GHz)	Advanced Microwave	WLA652A	1740103	2023.12.05	2024.12.04	<input checked="" type="checkbox"/>
Amplifier (0.8-21GHz)	Mini-Circuits	ZVA-213-S+	225321316	2023.12.05	2024.12.04	<input checked="" type="checkbox"/>
Test Antenna- Horn	SCHWARZB ECK	BBHA 9120D	01917	2022.06.09	2025.06.08	<input checked="" type="checkbox"/>
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2021.08.19	2024.08.18	<input checked="" type="checkbox"/>
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		<input checked="" type="checkbox"/>


A.2 Conducted Emission, AC Ports

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Sample No.	S04	Temperature	23.2°C
Humidity	61%RH	Pressure	101kPa
Test Engineer	Yang yang	Test Date	2024.04.17


Test Mode 2

1) AC Ports - L Phase

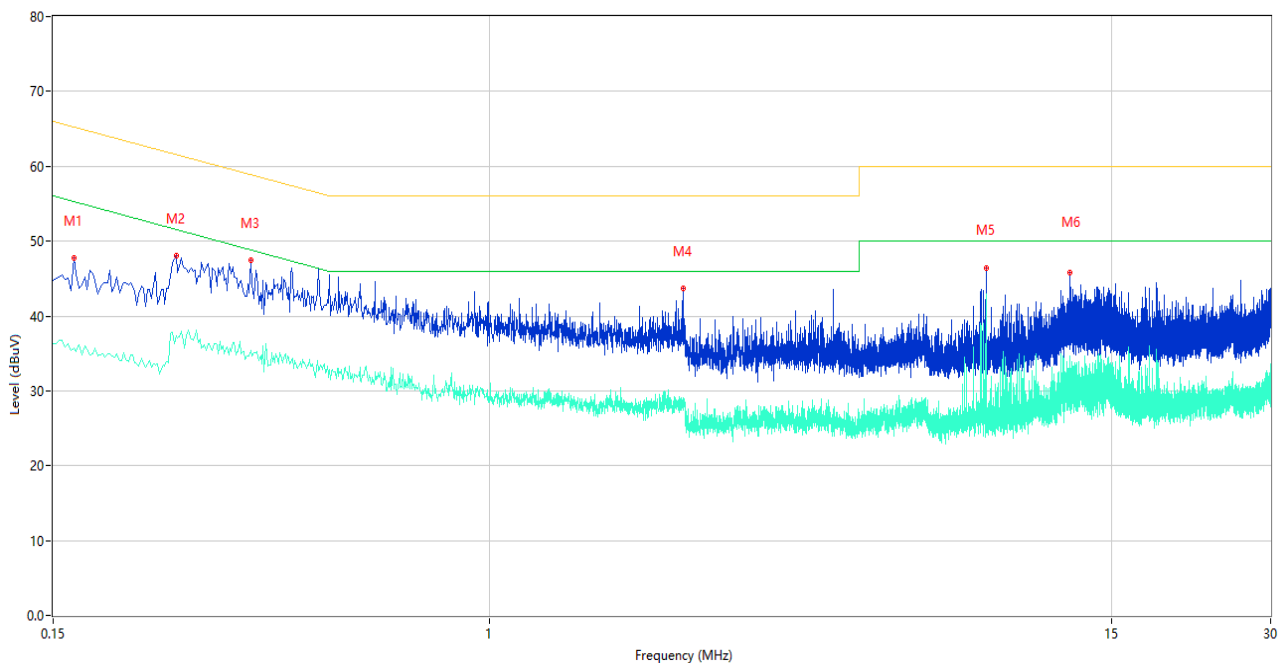

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.164	47.76	19.48	65.26	17.50	Peak	L	Pass
1**	0.164	35.68	19.48	55.26	19.58	AV	L	Pass
2	0.256	48.01	19.45	61.56	13.55	Peak	L	Pass
2**	0.256	37.33	19.45	51.56	14.23	AV	L	Pass
3	0.354	47.46	19.43	58.87	11.41	Peak	L	Pass
3**	0.354	35.42	19.43	48.87	13.45	AV	L	Pass
4	2.326	43.70	19.96	56.00	12.30	Peak	L	Pass
4**	2.326	27.36	19.96	46.00	18.64	AV	L	Pass
5	8.714	46.46	20.04	60.00	13.54	Peak	L	Pass
5**	8.714	42.92	20.04	50.00	7.08	AV	L	Pass
6	12.504	45.79	20.40	60.00	14.21	Peak	L	Pass
6**	12.504	34.72	20.40	50.00	15.28	AV	L	Pass

2) AC Ports - N Phase

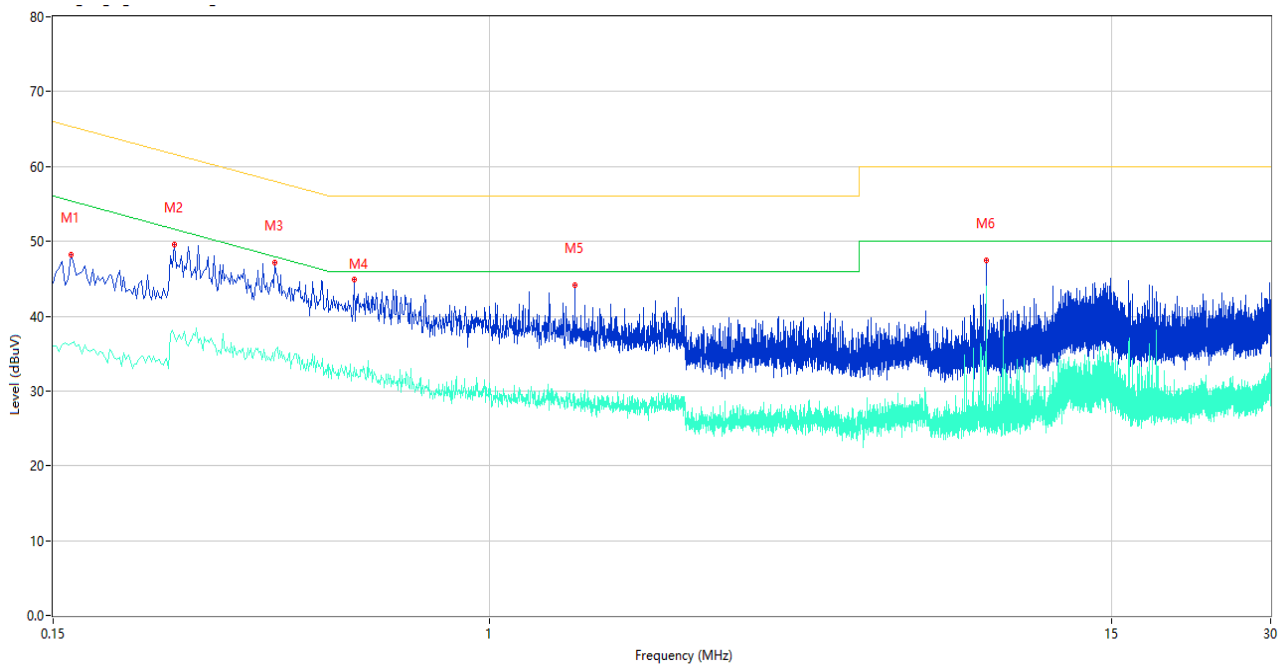

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.162	48.16	19.49	65.36	17.20	Peak	N	Pass
1**	0.162	36.36	19.49	55.36	19.00	AV	N	Pass
2	0.254	49.53	19.45	61.63	12.10	Peak	N	Pass
2**	0.254	37.42	19.45	51.63	14.21	AV	N	Pass
3	0.394	47.11	19.97	57.98	10.87	Peak	N	Pass
3**	0.394	35.06	19.97	47.98	12.92	AV	N	Pass
4	0.556	44.93	19.90	56.00	11.07	Peak	N	Pass
4**	0.556	33.16	19.90	46.00	12.84	AV	N	Pass
5	1.454	44.18	19.90	56.00	11.82	Peak	N	Pass
5**	1.454	28.97	19.90	46.00	17.03	AV	N	Pass
6	8.714	47.50	20.04	60.00	12.50	Peak	N	Pass
6**	8.714	39.28	20.04	50.00	10.72	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2023.09.05	2024.09.04	<input checked="" type="checkbox"/>
LISN	SCHWARZBECK	NSLK 8127	8127-687	2023.05.16	2024.05.15	<input checked="" type="checkbox"/>
ISN	TESEQ	ISN T800	34449	2023.11.10	2024.11.09	<input type="checkbox"/>
ISN	TESEQ	ISN T8-Cat6	53561	2023.04.23	2024.04.22	<input type="checkbox"/>
Shielded Room	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2022.02.19	2025.02.18	<input checked="" type="checkbox"/>
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		<input checked="" type="checkbox"/>

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2440277-AE-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2440277-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2440277-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--