

# FCC TEST REPORT

Client Name : QUEST USA CORP  
Address : 495 FLATBUSH AVE BROOKLYN NY 11225 USA  
Product Name : PRIDE CLICK-WIRELESS COMPUTER  
Date : Mar. 28, 2022



**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	6
1.6. Description of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Measurement Uncertainty.....	9
1.9. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiated Emission and Band Edge.....	12
4.1. Test Standard and Limit.....	12
4.2. Test Setup.....	13
4.3. Test Procedure.....	14
4.4. Test Data.....	14
5. 20dB Bandwidth Test.....	21
5.1. Test Standard and Limit.....	21
5.2. Test Setup.....	21
5.3. Test Procedure.....	21
5.4. Test Data.....	21
6. Antenna Requirement.....	24
6.1. Test Standard and Requirement.....	24
6.2. Antenna Connected Construction.....	24
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	25
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	26
APPENDIX III -- INTERNAL PHOTOGRAPH.....	29



# TEST REPORT

Applicant : QUEST USA CORP  
Manufacturer : QUEST USA CORP  
Product Name : PRIDE CLICK-WIRELESS COMPUTER  
Model No. : IJWM210292, IJWM210292-XX, IJWM210292-XXX(XX or XXX represents different customers, can be any number and letter, and the product is the same)  
Trade Mark : N.A.  
Rating(s) : Input: DC 1.5V with "AAA" battery

**Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249**

**Test Method(s) : ANSI C63.10: 2020**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Feb. 23, 2022

Date of Test

Feb. 23~Mar. 26, 2022

Prepared by

*Nian xiu Chen*

(Nianxiu Chen)

Approved & Authorized Signer

*Kingkong Jin*

(Kingkong Jin)

## 1. General Information

### 1.1. Client Information

Applicant	:	QUEST USA CORP
Address	:	495 FLATBUSH AVE BROOKLYN NY 11225 USA
Manufacturer	:	QUEST USA CORP
Address	:	601-602 Bld 1, Cloud Park, 233 Bulong Road, Longgang, Shenzhen, China
Factory	:	QUEST USA CORP
Address	:	601-602 Bld 1, Cloud Park, 233 Bulong Road, Longgang, Shenzhen, China

### 1.2. Description of Device (EUT)

Product Name	:	PRIDE CLICK-WIRELESS COMPUTER	
Model No.	:	IJWM210292, IJWM210292-XX, IJWM210292-XXX(XX or XXX represents different customers, can be any number and letter, and the product is the same) (Note: All samples are the same except the model number and appearance color, so we prepare "IJWM210292" for test only.)	
Trade Mark	:	N.A.	
Test Power Supply	:	DC 1.5V battery	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	2411~2471MHZ
	:	Number of Channel:	31 Channels
	:	Modulation Type:	GFSK
	:	Antenna Type:	PCB Antenna
	:	Antenna Gain(Peak):	2.34 dBi(Provided by customer)
	:	Adapter:	N/A
<b>Remark:</b> 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for SRD module.			

**1.3. Auxiliary Equipment Used During Test**

N/A
-----

**1.4. Description of Test Modes**

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH16
Mode 3	CH31

For Conducted Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH16
Mode 3	CH31

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH16
Mode 3	CH31


**Note:**

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

**1.5. List of Channels**

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2411	09	2427	17	2443	25	2459
02	2413	10	2429	18	2445	26	2461
03	2415	11	2431	19	2447	27	2463
04	2417	12	2433	20	2449	28	2465
05	2419	13	2435	21	2451	29	2467
06	2421	14	2437	22	2453	30	2469
07	2423	15	2439	23	2455	31	2471
08	2425	16	2441	24	2457	/	/

## 1.6. Description of Test Setup

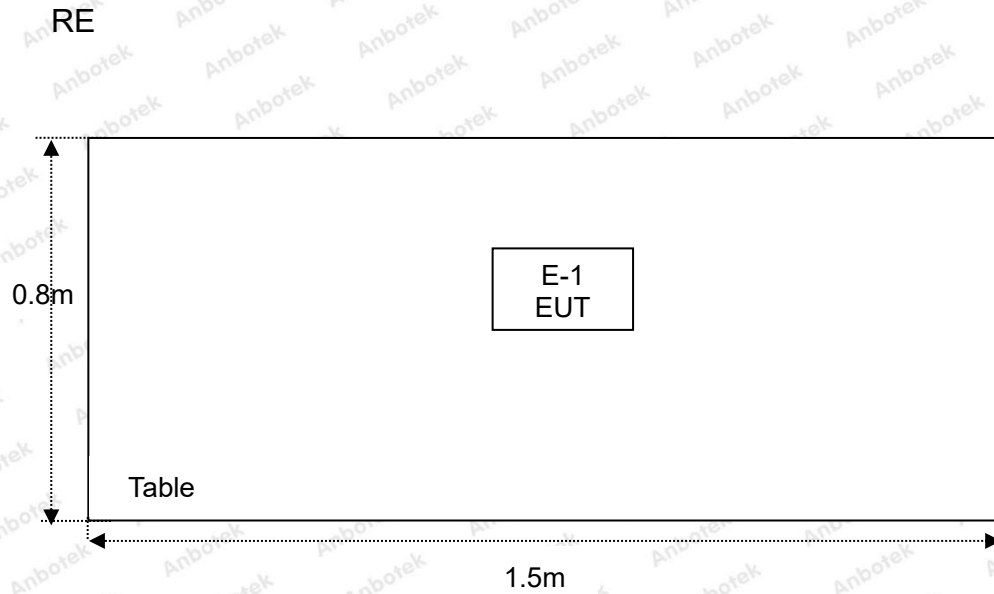

## 1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 22, 2021	1 Year



## 1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
	:	Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

## 1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	N/A
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS

**Remark:** "N/A" is an abbreviation for Not Applicable.




## 3. Conducted Emission Test

### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
 (2) The lower limit shall apply at the transition frequency.

### 3.2. Test Setup

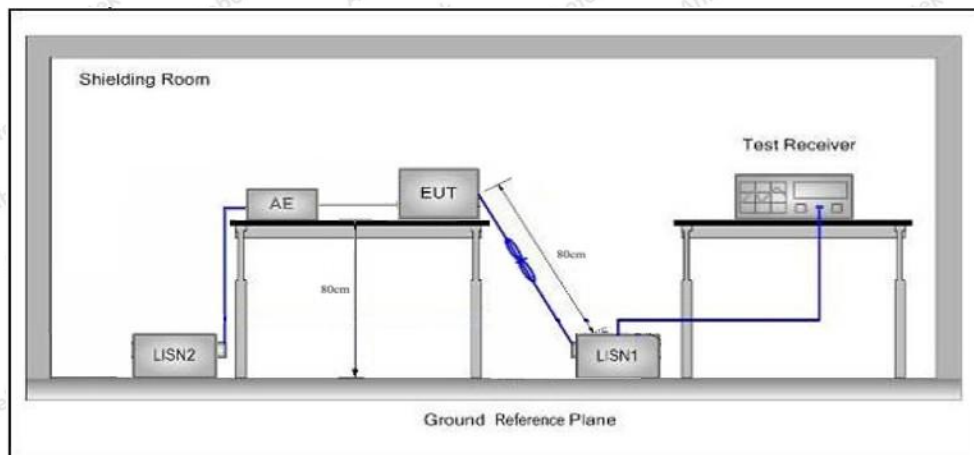

### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.4. Test Data

Not applicable for equipment operated with DC power supply.

## 4. Radiated Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

**Remark:**

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

## 4.2. Test Setup

Figure 1. Below 30MHz

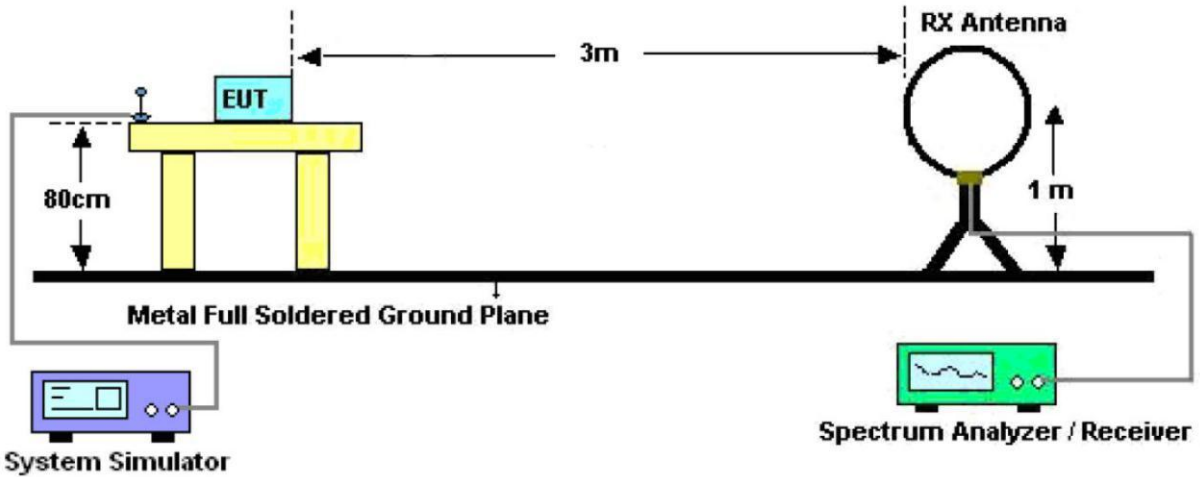


Figure 2. 30MHz to 1GHz


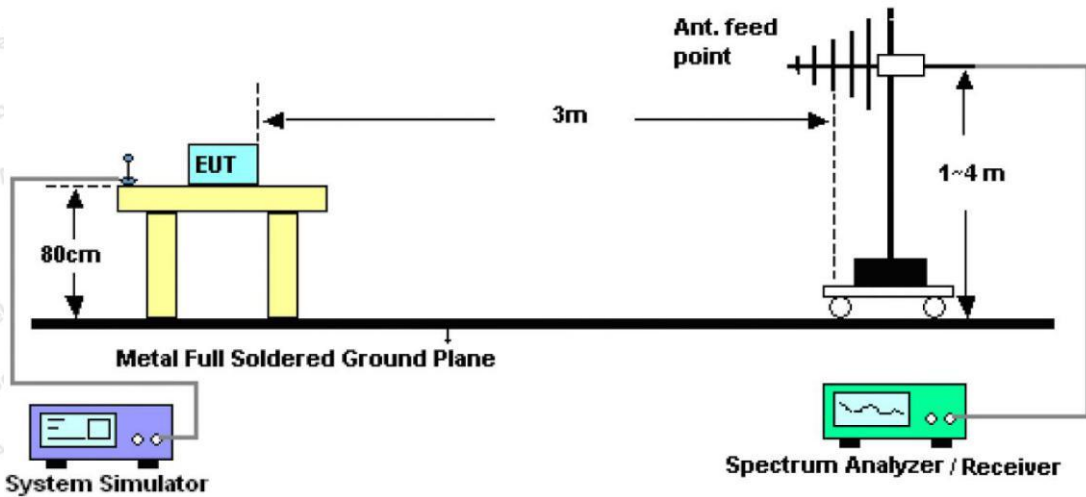


Figure 3. Above 1 GHz

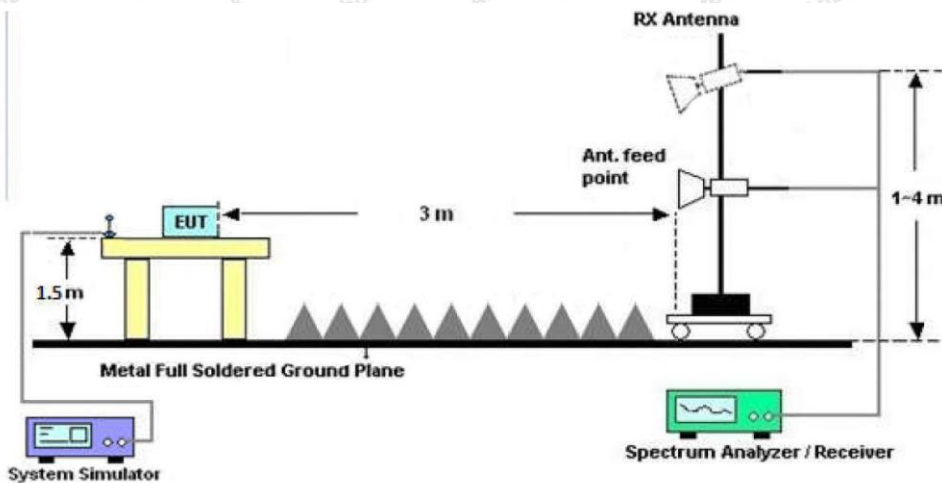

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

### 4.4. Test Data

#### PASS


During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, only the worst case is recorded in the report.

### Test Results (30~1000MHz)


Test Mode: CH01  
 Power Source: DC 1.5V battery  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 21.3°C/50%RH

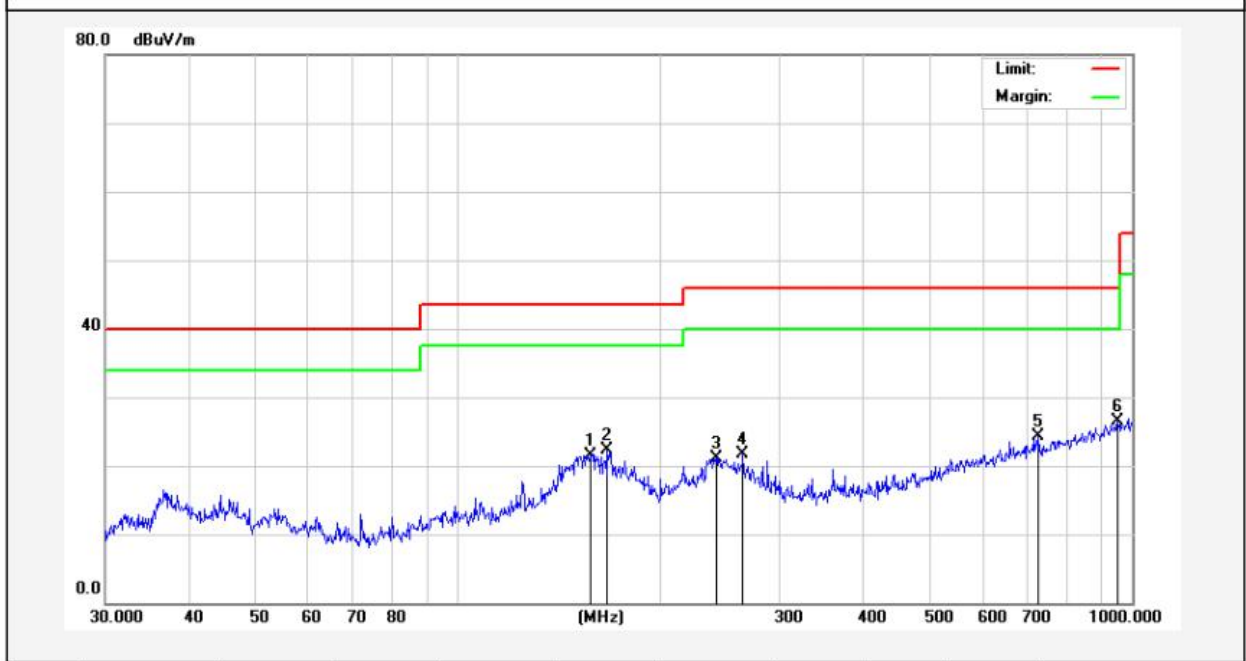

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	157.0074	45.26	-23.67	21.59	43.50	-21.91	QP			
2	166.6514	46.10	-23.74	22.36	43.50	-21.14	QP			
3	241.6763	42.81	-21.64	21.17	46.00	-24.83	QP			
4	264.7457	42.00	-20.21	21.79	46.00	-24.21	QP			
5	726.8052	33.80	-9.56	24.24	46.00	-21.76	QP			
6	952.0937	32.06	-5.61	26.45	46.00	-19.55	QP			

### Test Results (30~1000MHz)

Test Mode: CH01  
 Power Source: DC 1.5V battery  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 21.3°C/50%RH

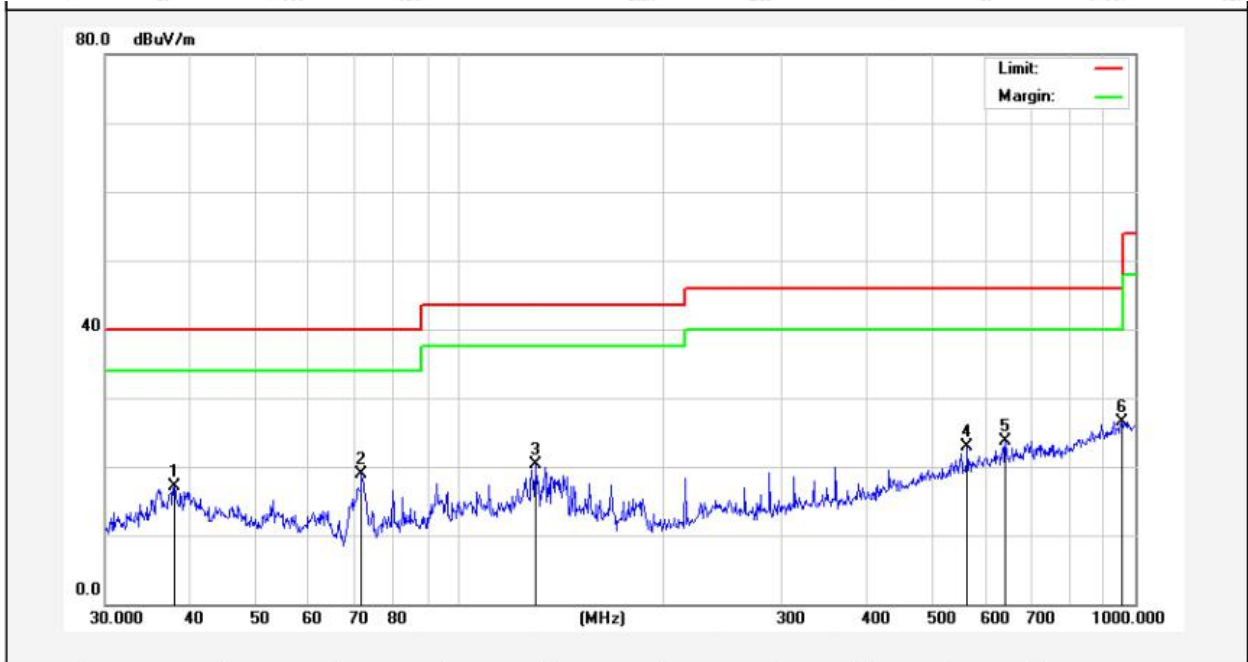

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.9450	32.73	-15.63	17.10	40.00	-22.90	QP			
2	71.8320	38.90	-19.94	18.96	40.00	-21.04	QP			
3	129.9226	41.84	-21.46	20.38	43.50	-23.12	QP			
4	564.6389	34.39	-11.41	22.98	46.00	-23.02	QP			
5	642.8613	34.35	-10.64	23.71	46.00	-22.29	QP			
6	955.4381	32.03	-5.55	26.48	46.00	-19.52	QP			



**Test Results (1GHz-25GHz)**

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2411.0000	96.87	31.21	2.17	35.30	94.95	114.00	-19.05	V	Peak
2411.0000	85.59	31.21	2.17	35.30	83.67	94.00	-10.33	V	AVG
4822.0000	49.89	34.01	2.56	34.71	51.75	74.00	-22.25	V	Peak
4822.0000	40.71	34.01	2.56	34.71	42.57	54.00	-11.43	V	AVG
7233.0000	45.39	36.16	2.98	35.15	49.38	74.00	-24.62	V	Peak
7233.0000	35.83	36.16	2.98	35.15	39.82	54.00	-14.18	V	AVG
9644.0000	*								
12055.0000	*								
14466.0000	*								
16877.0000	*								
2411.0000	95.99	31.21	2.17	35.30	94.07	114.00	-19.93	H	Peak
2411.0000	85.64	31.21	2.17	35.30	83.72	94.00	-10.28	H	AVG
4822.0000	48.05	34.01	2.56	34.71	49.91	74.00	-24.09	H	Peak
4822.0000	39.99	34.01	2.56	34.71	41.85	54.00	-12.15	H	AVG
7233.0000	48.81	36.16	2.98	35.15	52.80	74.00	-21.20	H	Peak
7233.0000	37.32	36.16	2.98	35.15	41.31	54.00	-12.69	H	AVG
9644.0000	*								
12055.0000	*								
14466.0000	*								
16877.0000	*								

**Note:**

1. Level =Read level + Antenna Factor + Cable Loss – Preamp Factor
2. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH16 (Middle channel)									
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Pol.	Detector
2441.0000	93.53	31.12	2.20	34.51	92.34	114.00	-21.66	V	Peak
2441.0000	85.14	31.22	2.20	34.51	84.05	94.00	-9.95	V	AVG
4882.0000	49.09	34.98	2.49	34.14	52.42	74.00	-21.58	V	Peak
4882.0000	38.15	34.98	2.49	34.14	41.48	54.00	-12.52	V	AVG
7323.0000	48.22	36.01	3.01	34.56	52.68	74.00	-21.32	V	Peak
7323.0000	38.65	36.01	3.01	34.56	43.11	54.00	-10.89	V	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								
2441.0000	93.10	31.12	2.20	34.51	91.91	114.00	-22.09	H	Peak
2441.0000	83.42	31.12	2.20	34.51	82.23	94.00	-11.77	H	AVG
4882.0000	48.59	34.98	2.49	34.14	51.92	74.00	-22.08	H	Peak
4882.0000	38.94	34.98	2.49	34.14	42.27	54.00	-11.73	H	AVG
7323.0000	45.08	36.01	3.01	34.56	49.54	74.00	-24.46	H	Peak
7323.0000	38.86	36.01	3.01	34.56	43.32	54.00	-10.68	H	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								

**Note:**

1. Level =Read level + Antenna Factor + Cable Loss – Preamp Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH31(High channel)									
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Pol.	Detector
2471.0000	93.94	31.64	2.18	35.89	91.87	114.00	-22.13	V	Peak
2471.0000	84.63	31.64	2.18	35.89	82.56	94.00	-11.44	V	AVG
4942.0000	50.57	35.10	2.52	34.87	53.32	74.00	-20.68	V	Peak
4942.0000	40.93	35.10	2.52	34.87	43.68	54.00	-10.32	V	AVG
7413.0000	46.49	36.18	3.18	34.96	50.89	74.00	-23.11	V	Peak
7413.0000	37.96	36.18	3.18	34.96	42.36	54.00	-11.64	V	AVG
9884.0000	*								
12355.0000	*								
14826.0000	*								
17297.0000	*								
2470.0000	94.40	31.64	2.18	35.89	92.33	114.00	-21.67	H	Peak
2470.0000	83.10	31.64	2.18	35.89	81.03	94.00	-12.97	H	AVG
4940.0000	47.70	35.10	2.52	34.87	50.45	74.00	-23.55	H	Peak
4940.0000	38.02	35.10	2.52	34.87	40.77	54.00	-13.23	H	AVG
7410.0000	47.25	36.18	3.18	34.96	51.65	74.00	-22.35	H	Peak
7410.0000	35.29	36.18	3.18	34.96	39.69	54.00	-14.31	H	AVG
9880.0000	*								
12350.0000	*								
14820.0000	*								
17290.0000	*								

**Note:**

1. Level = Read level + Antenna Factor + Cable Loss – Preamp Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Radiated Band Edge:**

Test channel: Lowest								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.74	29.15	3.41	34.01	49.29	74.00	-24.71	V
2400.00	61.12	29.16	3.43	34.01	59.70	74.00	-14.30	V
2390.00	53.77	29.15	3.41	34.01	52.32	74.00	-21.68	H
2400.00	62.74	29.16	3.43	34.01	61.32	74.00	-12.68	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	39.34	29.15	3.41	34.01	37.89	54.00	-16.11	V
2400.00	45.54	29.16	3.43	34.01	44.12	54.00	-9.88	V
2390.00	41.37	29.15	3.41	34.01	39.92	54.00	-14.08	H
2400.00	44.72	29.16	3.43	34.01	43.30	54.00	-10.70	H

Test channel: Highest								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.45	29.28	3.53	34.03	50.23	74.00	-23.77	V
2500.00	48.74	29.30	3.56	34.03	47.57	74.00	-26.43	V
2483.50	55.63	29.28	3.53	34.03	54.41	74.00	-19.59	H
2500.00	51.24	29.30	3.56	34.03	50.07	74.00	-23.93	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	39.75	29.28	3.53	34.03	38.53	54.00	-15.47	V
2500.00	36.64	29.30	3.56	34.03	35.47	54.00	-18.53	V
2483.50	41.57	29.28	3.53	34.03	40.35	54.00	-13.65	H
2500.00	37.50	29.30	3.56	34.03	36.33	54.00	-17.67	H

**Note:**


1. Level =Read level + Antenna Factor + Cable Loss – Preamp Factor

## 5. 20dB Bandwidth Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

### 5.2. Test Setup



### 5.3. Test Procedure


1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
 RBW = 30kHz, VBW $\geq$ 3\*RBW =100kHz,  
 Detector= Average  
 Trace mode= Max hold.  
 Sweep- auto couple.
4. Mark the peak frequency and  $-20$ dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

### 5.4. Test Data


Test Item : 20dB Bandwidth  
 Test Voltage : DC 1.5V battery  
 Test Result : PASS

Test Mode : Mode 1~3  
 Temperature : 21.2°C  
 Humidity : 50%RH


Test Channel	Bandwidth (kHz)	Result
Low CH	1365	PASS
Mid CH	1360	PASS
High CH	1361	PASS

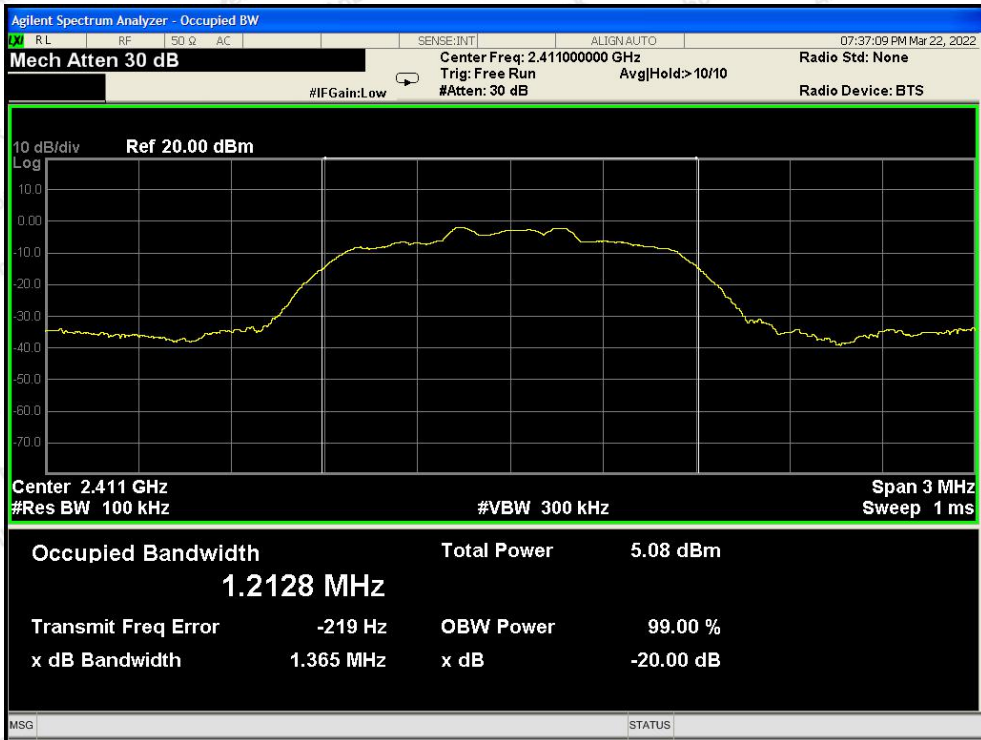

Test Mode: Low

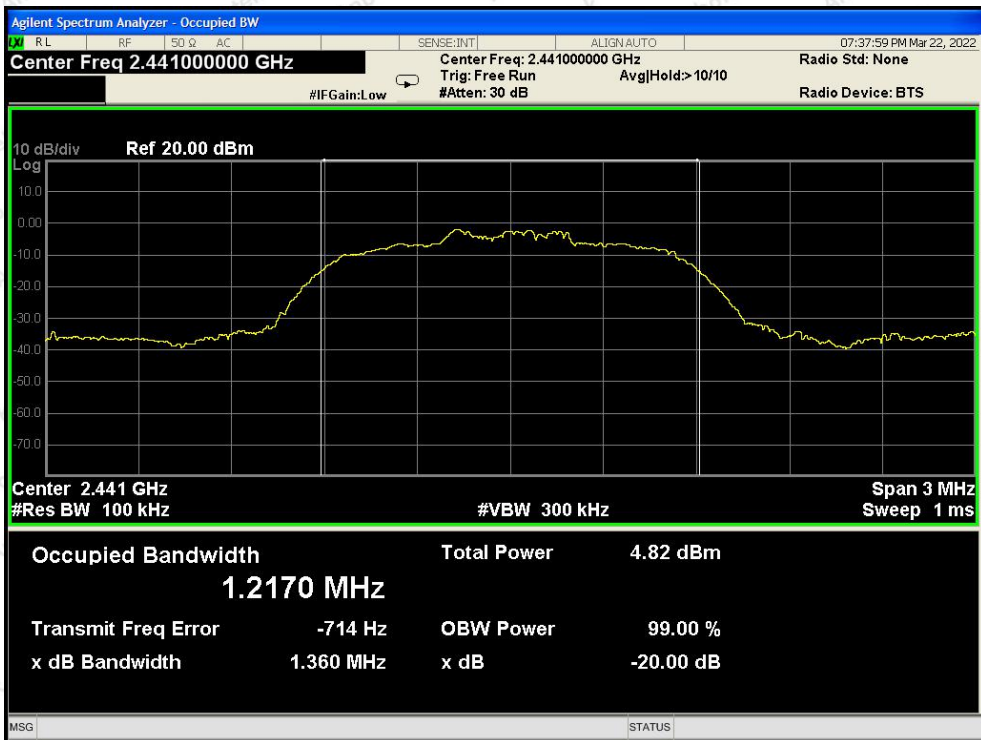

Test Mode: Middle

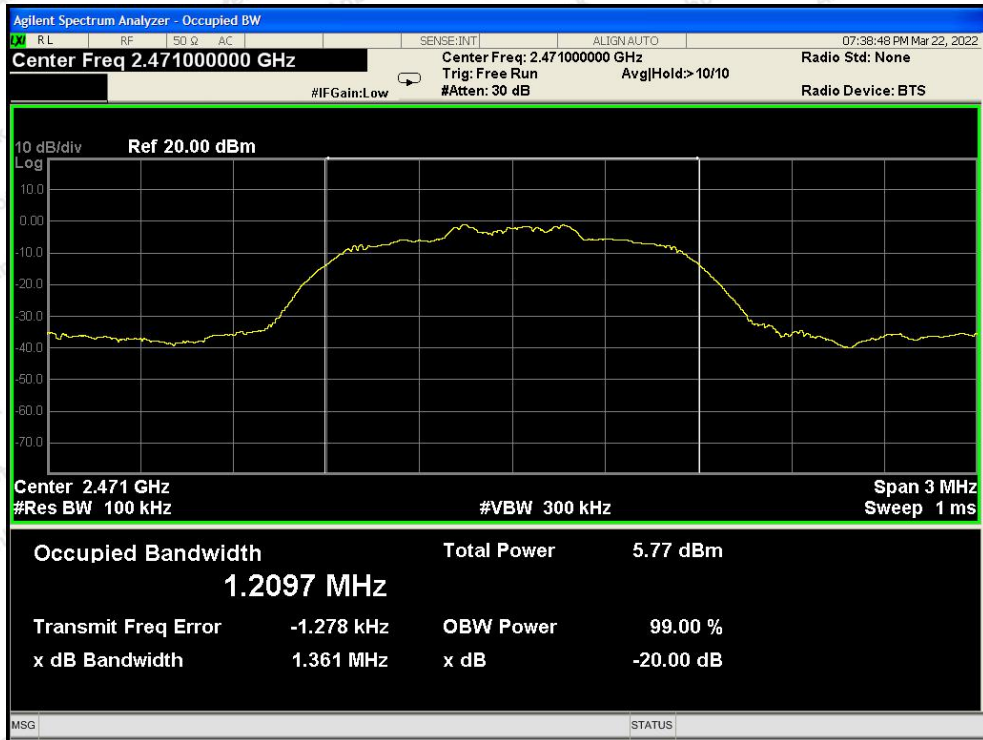

Test Mode: High

## 6. Antenna Requirement

### 6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 6.2. Antenna Connected Construction

The antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 2.34 dBi. It complies with the standard requirement.





## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiation Emission Test



## APPENDIX II -- EXTERNAL PHOTOGRAPH











## APPENDIX III -- INTERNAL PHOTOGRAPH



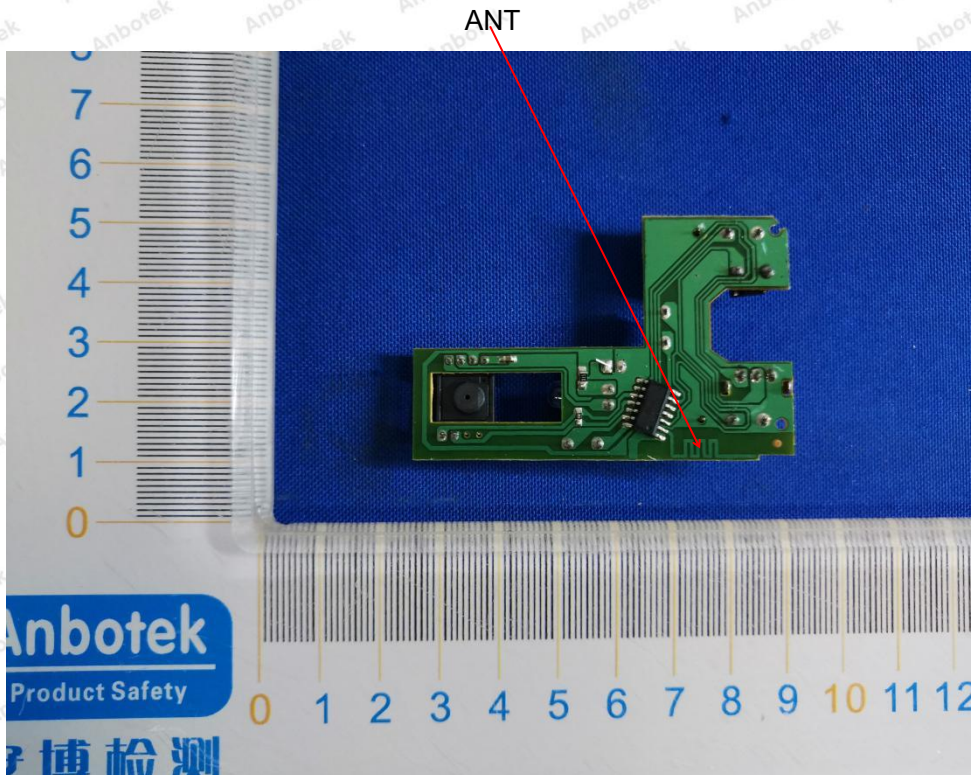

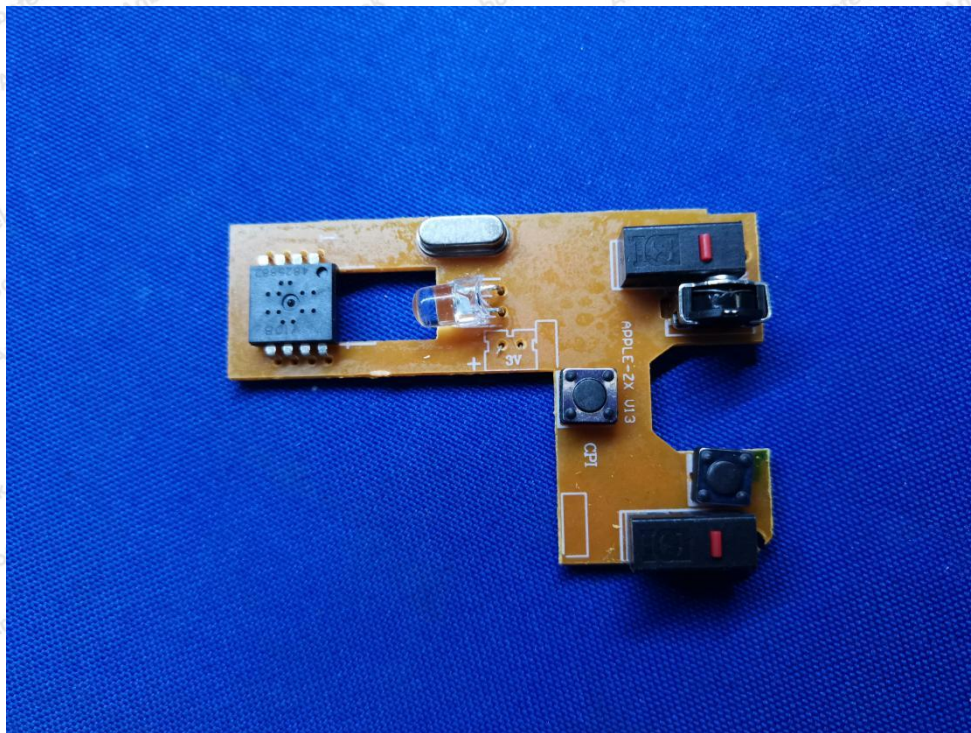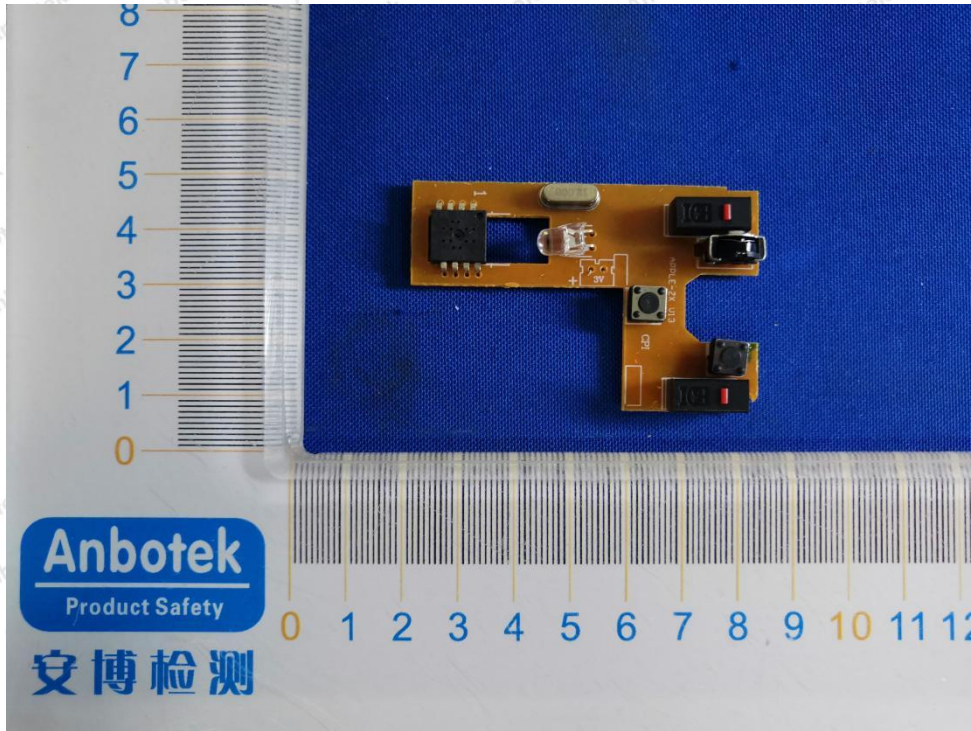

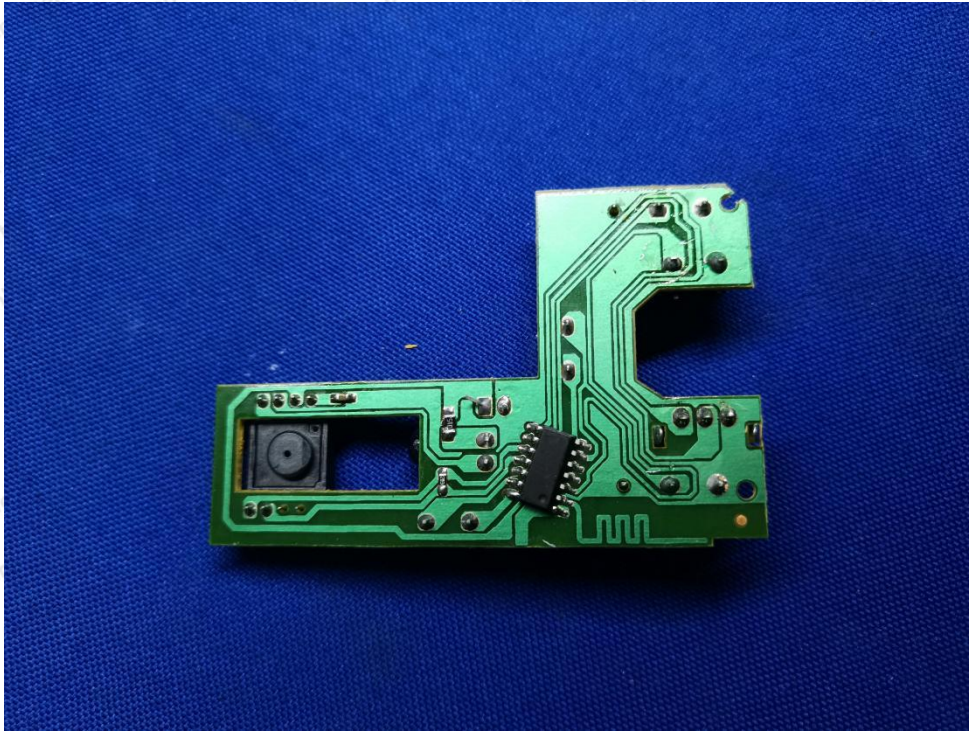

----- End of Report -----