

# TEST REPORT

Reference No..... : WTS16S0961012-2E V2  
FCC ID ..... : 2AJVK-SP5014  
Applicant..... : Foto Electric Supply Co., INC.  
Address..... : 1 Rewe St. Brooklyn, New York, 11211, USA  
Manufacturer ..... : Foto Electric Supply Co., INC.  
Address..... : 1 Rewe St. Brooklyn, New York, 11211, USA  
Product Name..... : Smart Phone  
Model No..... : SP5014, CBP4105  
Brand..... : SLIDE, COBY  
Standards..... : FCC CFR47 Part 15.247:2015  
Date of Receipt sample .... : Sep. 19, 2016  
Date of Test ..... : Sep. 20 – Nov. 17, 2016  
Date of Issue..... : Dec. 05, 2016  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

## 2 Laboratories Introduction

**Waltek Services Test Group Ltd** is a professional third-party testing and certification organization with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by CNAS (China National Accreditation Service for Conformity Assessment) AQSIIQ, CMA and IECEE for CBTL. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CPSC(Consumer Product Safety Commission), CEC(California energy efficiency), IC(Industry Canada) and ELI(Efficient Lighting Initiative). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as UL, Intertek(ETL-SEMKO), CSA, TÜV Rheinland, TÜV SÜD, etc.



**Waltek Services Test Group Ltd.** is one of the largest and the most comprehensive third party testing organizations in China, our headquarter located in Shenzhen and have branches in Foshan, Dongguan, Zhongshan, Suzhou, Ningbo and Hong Kong, Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), reliability and energy performance, Chemical test. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 LABORATORIES INTRODUCTION.....</b>	<b>2</b>
<b>3 CONTENTS.....</b>	<b>3</b>
<b>4 REVISION HISTORY.....</b>	<b>5</b>
<b>5 GENERAL INFORMATION.....</b>	<b>6</b>
5.1 GENERAL DESCRIPTION OF E.U.T. ....	6
5.2 DETAILS OF E.U.T. ....	6
5.3 CHANNEL LIST.....	8
5.4 TEST MODE.....	9
5.5 TEST FACILITY.....	10
<b>6 TEST SUMMARY.....</b>	<b>11</b>
<b>7 EQUIPMENT USED DURING TEST.....</b>	<b>12</b>
7.1 EQUIPMENTS LIST.....	12
7.2 DESCRIPTION OF SUPPORT UNITS.....	13
7.3 MEASUREMENT UNCERTAINTY.....	13
7.4 TEST EQUIPMENT CALIBRATION.....	13
<b>8 CONDUCTED EMISSION.....</b>	<b>14</b>
8.1 E.U.T. OPERATION.....	14
8.2 EUT SETUP.....	14
8.3 MEASUREMENT DESCRIPTION.....	14
8.4 CONDUCTED EMISSION TEST RESULT.....	15
<b>9 RADIATED EMISSIONS.....</b>	<b>19</b>
9.1 EUT OPERATION.....	19
9.2 TEST SETUP.....	20
9.3 SPECTRUM ANALYZER SETUP.....	21
9.4 TEST PROCEDURE.....	22
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	22
9.6 SUMMARY OF TEST RESULTS.....	23
<b>10 CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>39</b>
10.1 TEST PROCEDURE.....	39
10.2 TEST RESULT.....	40
<b>11 BAND EDGE MEASUREMENT.....</b>	<b>56</b>
11.1 TEST PROCEDURE.....	56
11.2 TEST RESULT.....	57
<b>12 6 DB BANDWIDTH MEASUREMENT.....</b>	<b>62</b>
12.1 TEST PROCEDURE.....	62
12.2 TEST RESULT.....	62
<b>13 MAXIMUM PEAK OUTPUT POWER.....</b>	<b>71</b>
13.1 TEST PROCEDURE.....	71
13.2 TEST RESULT.....	72
<b>14 POWER SPECTRAL DENSITY.....</b>	<b>81</b>
14.1 TEST PROCEDURE.....	81
14.2 TEST RESULT.....	81

<b>15</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>90</b>
<b>16</b>	<b>RF EXPOSURE.....</b>	<b>91</b>
<b>17</b>	<b>PHOTOGRAPHS OF TEST SETUP AND EUT.....</b>	<b>92</b>

## 4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS16S0961012-2E	Sep. 19, 2016	Sep.20 –Nov. 17, 2016	Nov. 18, 2016	original	-	Replaced
WTS16S0961012-2E V1	Sep. 19, 2016	Sep.20 –Nov. 17, 2016	Nov. 29, 2016	Revised	Updated	Replaced
WTS16S0961012-2E V2	Sep. 19, 2016	Sep.20 –Nov. 17, 2016	Dec. 05, 2016	Revised	Updated	Valid

## 5 General Information

### 5.1 General Description of E.U.T.

Product Name:	Smart Phone
Model No.:	SP5014, CBP4105
Model Description:	Only the model names and brand names are different.
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band II/V
LTE Band(s):	FDD Band 2/4/5/7/17
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	AL_X5S_MB_V11
Software Version:	1471835842
Highest frequency (Exclude Radio):	26MHz
Storage Location:	Internal Storage

### 5.2 Details of E.U.T.

Operation Frequency:	GSM/GPRS/ EGPRS 850: 824~849MHz PCS/GPRS/ EGPRS 1900: 1850~1910MHz WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz LTE Band 2: 1850~1910MHz LTE Band 4: 1710~1755MHz LTE Band 5: 824~849MHz LTE Band 7: 2500-2570MHz LTE Band 17: 704-716MHz WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz Bluetooth: 2402~2480MHz
Max. RF output power:	GSM 850: 32.82dBm PCS1900: 29.86dBm WCDMA Band II: 22.47dBm WCDMA Band V: 22.18dBm LTE Band 2: 23.24dBm LTE Band 4: 22.28dBm

	LTE Band 5: 23.08dBm
	LTE Band 7: 22.50dBm
	LTE Band 17: 23.16dBm
	WiFi(2.4G): 9.44dBm
	Bluetooth: 6.38dBm
Type of Modulation:	GSM,GPRS: GMSK EDGE: GMSK, 8PSK WCDMA: BPSK LTE: QPSK, 16QAM WiFi: CCK, OFDM Bluetooth: GFSK, Pi/4 DQPSK, 8DPSK
Antenna installation:	GSM/WCDMA/LTE: internal permanent antenna WiFi/Bluetooth: internal permanent antenna
Antenna Gain:	GSM 850: 0.5dBi PCS1900: 1.0dBi WCDMA Band II: 1.0dBi WCDMA Band V: 0.5dBi LTE Band 2: 1.0dBi LTE Band 4: 0.8dBi LTE Band 5: 0.5dBi LTE Band 7: 1.0dBi LTE Band 17: 0.6dBi WiFi(2.4G): 1.0dBi Bluetooth: 1.0dBi
Technical Data:	Battery DC 3.7V, 2000mAh DC 5V, 1.0A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.2A)
Adapter:	Manufacture: XINYU EAGLETRON ELECTRONIC CO.LTD. Model No.: SWN006S050100U1

### 5.3 Channel List

#### WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

#### BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480



## 5.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

## 5.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

## 6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

## 7 Equipment Used during Test

### 7.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.12,2016	Sep.11,2017
2.	LISN	R&S	ENV216	101215	Sep.12,2016	Sep.11,2017
3.	Cable	Top	TYPE16(3.5M)	-	Sep.12,2016	Sep.11,2017
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.12,2016	Sep.11,2017
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.12,2016	Sep.11,2017
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.12,2016	Sep.11,2017
4.	Cable	LARGE	RF300	-	Sep.12,2016	Sep.11,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	Apr.29, 2016	Apr.28, 2017
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Apr.09,2016	Apr.08,2017
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.09,2016	Apr.08,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.12,2016	Sep.11,2017
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.09,2016	Apr.08,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.09,2016	Apr.08,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.13,2016	Apr.12,2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.13,2016	Apr.12,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Apr.13,2016	Apr.12,2017
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Apr.09,2016	Apr.08,2017
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Apr.13,2016	Apr.12,2017
4	Cable	HUBER+SUHNER	CBL2	525178	Apr.13,2016	Apr.12,2017

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.12,2016	Sep.11,2017
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.12,2016	Sep.11,2017
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.12,2016	Sep.11,2017

## 7.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 7.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (Bilog antenna 30M~1000MHz)
	$\pm 5.47$ dB (Horn antenna 1000M~25000MHz)
Conducted Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)
Confidence interval: 95%. Confidence factor:k=2	

## 7.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 8 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	60
5 to 30	60	50

### 8.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in TX transmitting mode, the worst data were shown in the report.

### 8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

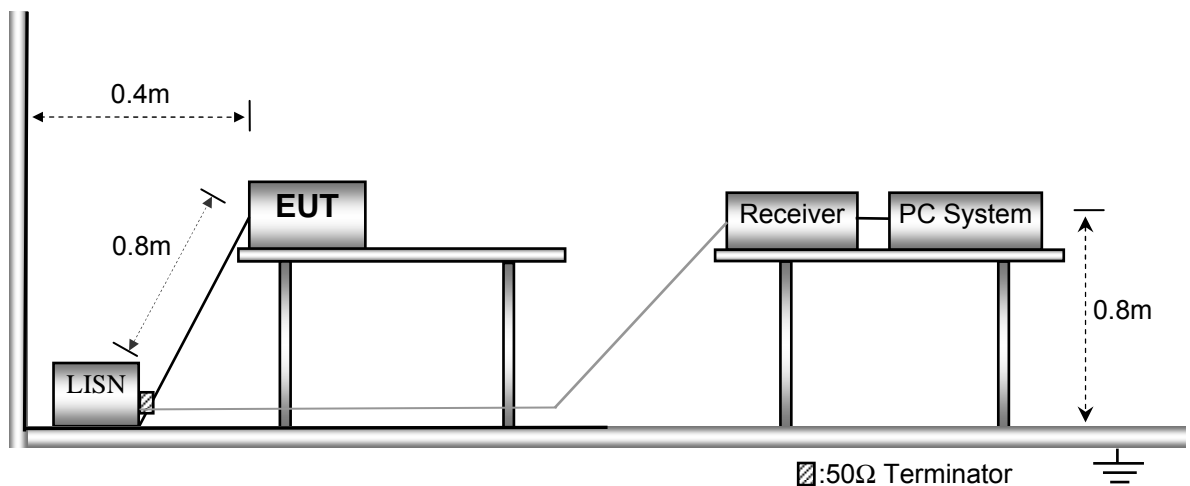

### 8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode ( b mode low channel )

Live line:

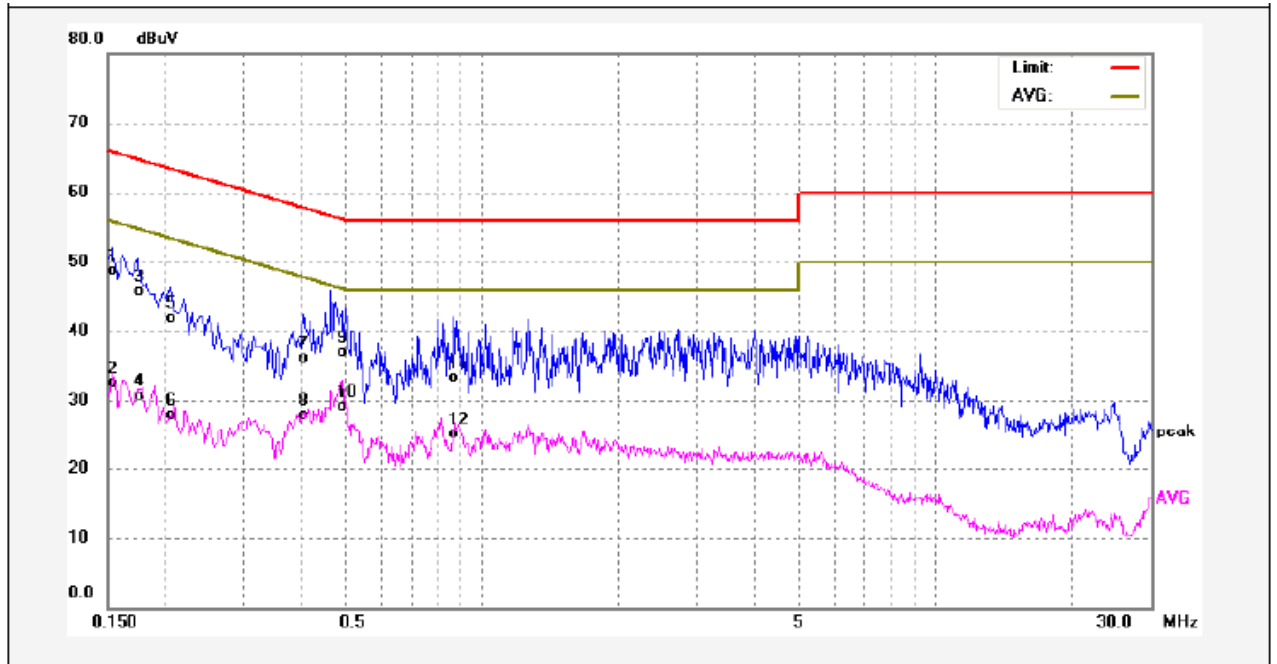

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	38.42	10.29	48.71	65.78	-17.07	QP	
2	0.1539	22.20	10.29	32.49	55.78	-23.29	AVG	
3	0.1740	35.40	10.28	45.68	64.76	-19.08	QP	
4	0.1740	20.46	10.28	30.74	54.76	-24.02	AVG	
5	0.2060	31.64	10.26	41.90	63.36	-21.46	QP	
6	0.2060	17.63	10.26	27.89	53.36	-25.47	AVG	
7	0.4060	25.82	10.27	36.09	57.73	-21.64	QP	
8	0.4060	17.65	10.27	27.92	47.73	-19.81	AVG	
9	0.5020	26.74	10.25	36.99	56.00	-19.01	QP	
10	0.5020	18.77	10.25	29.02	46.00	-16.98	AVG	
11	0.8700	23.01	10.37	33.38	56.00	-22.62	QP	
12	0.8700	14.68	10.37	25.05	46.00	-20.95	AVG	

Neutral line:

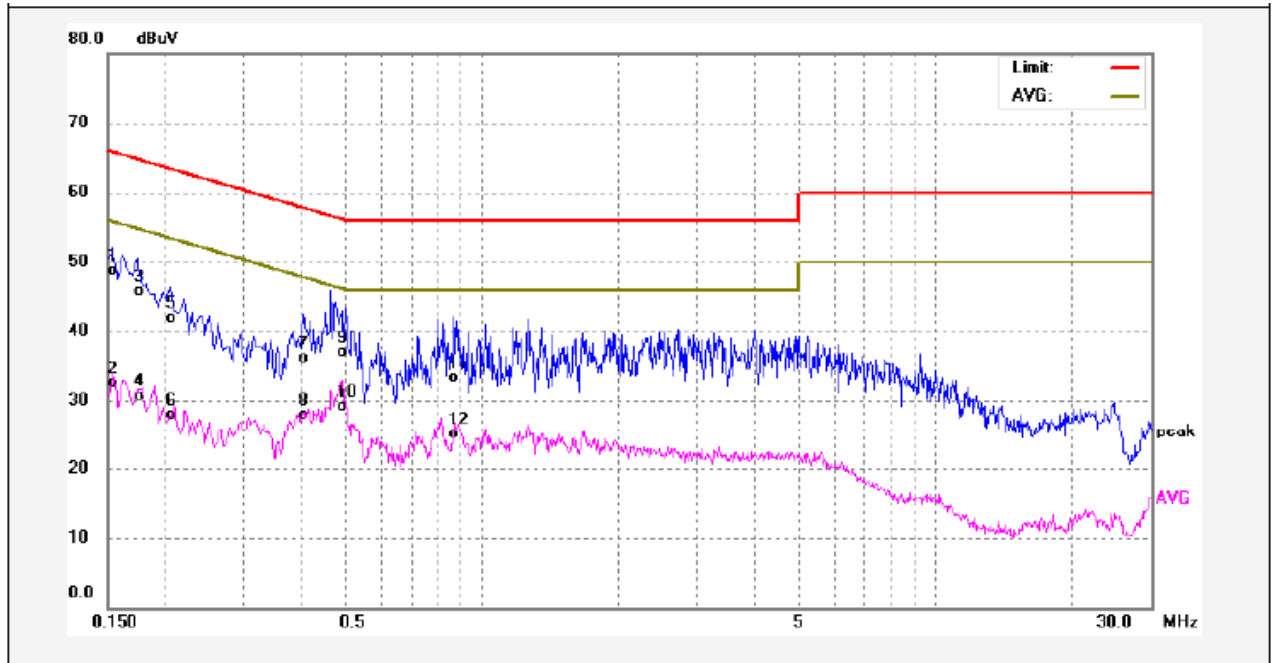


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	38.42	10.29	48.71	65.78	-17.07	QP	
2	0.1539	22.20	10.29	32.49	55.78	-23.29	AVG	
3	0.1740	35.40	10.28	45.68	64.76	-19.08	QP	
4	0.1740	20.46	10.28	30.74	54.76	-24.02	AVG	
5	0.2060	31.64	10.26	41.90	63.36	-21.46	QP	
6	0.2060	17.63	10.26	27.89	53.36	-25.47	AVG	
7	0.4060	25.82	10.27	36.09	57.73	-21.64	QP	
8	0.4060	17.65	10.27	27.92	47.73	-19.81	AVG	
9	0.5020	26.74	10.25	36.99	56.00	-19.01	QP	
10	0.5020	18.77	10.25	29.02	46.00	-16.98	AVG	
11	0.8700	23.01	10.37	33.38	56.00	-22.62	QP	
12	0.8700	14.68	10.37	25.05	46.00	-20.95	AVG	




Worst Mode: BLE mode (low channel)

Live line:

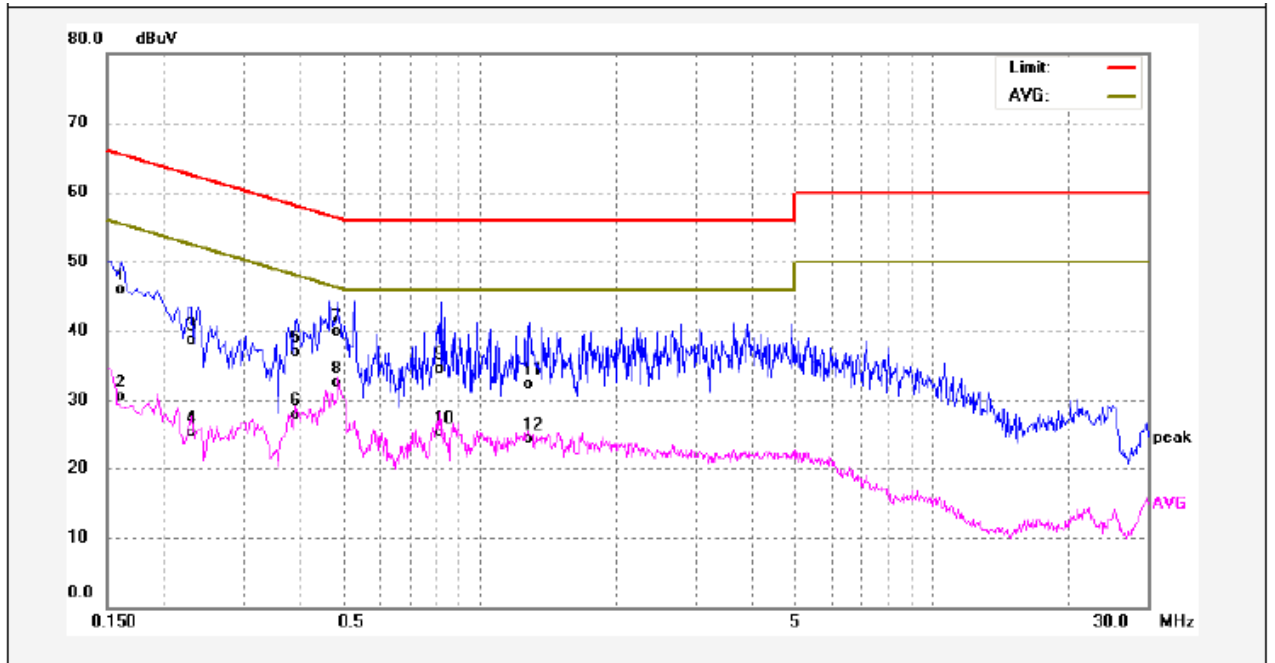

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1620	35.61	10.28	45.89	65.36	-19.47	QP	
2	0.1620	20.31	10.28	30.59	55.36	-24.77	AVG	
3	0.2300	28.37	10.26	38.63	62.45	-23.82	QP	
4	0.2300	15.07	10.26	25.33	52.45	-27.12	AVG	
5	0.3940	26.60	10.27	36.87	57.98	-21.11	QP	
6	0.3940	17.72	10.27	27.99	47.98	-19.99	AVG	
7	0.4860	29.73	10.25	39.98	56.24	-16.26	QP	
8	0.4860	22.19	10.25	32.44	46.24	-13.80	AVG	
9	0.8260	24.23	10.36	34.59	56.00	-21.41	QP	
10	0.8260	14.91	10.36	25.27	46.00	-20.73	AVG	
11	1.2940	21.98	10.42	32.40	56.00	-23.60	QP	
12	1.2940	13.91	10.42	24.33	46.00	-21.67	AVG	

Neutral line:

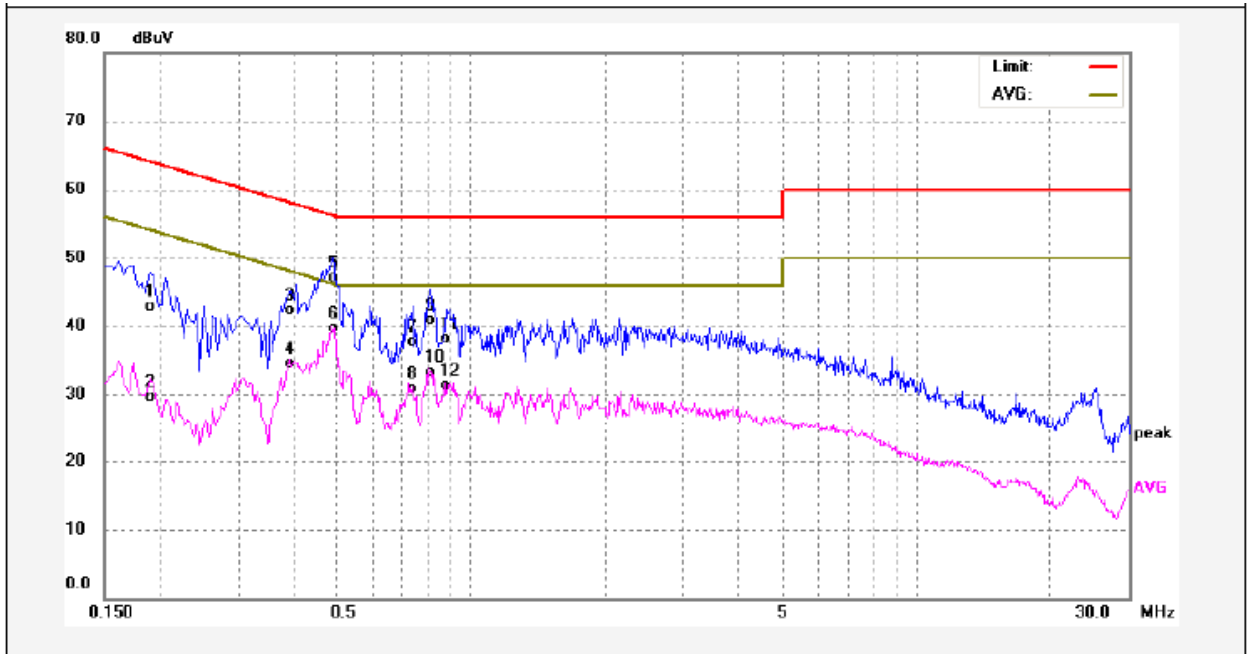

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1900	32.57	10.27	42.84	64.03	-21.19	QP	
2	0.1900	19.49	10.27	29.76	54.03	-24.27	AVG	
3	0.3940	32.03	10.27	42.30	57.98	-15.68	QP	
4	0.3940	24.28	10.27	34.55	47.98	-13.43	AVG	
5	0.4900	36.84	10.25	47.09	56.17	-9.08	QP	
6	0.4900	29.42	10.25	39.67	46.17	-6.50	AVG	
7	0.7380	27.35	10.36	37.71	56.00	-18.29	QP	
8	0.7380	20.61	10.36	30.97	46.00	-15.03	AVG	
9	0.8100	30.61	10.36	40.97	56.00	-15.03	QP	
10	0.8100	23.01	10.36	33.37	46.00	-12.63	AVG	
11	0.8820	27.81	10.38	38.19	56.00	-17.81	QP	
12	0.8820	20.88	10.38	31.26	46.00	-14.74	AVG	

## 9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX transmitting mode, the test data were shown in the report.


## 9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

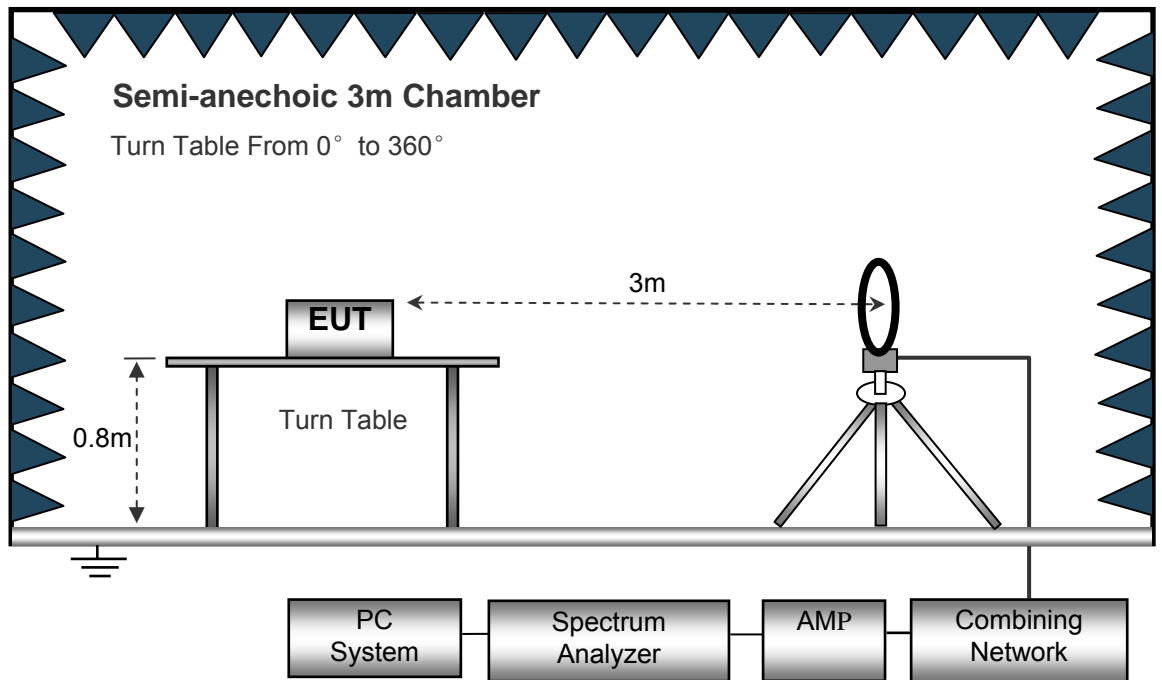

The test setup for emission measurement from 30 MHz to 1 GHz.

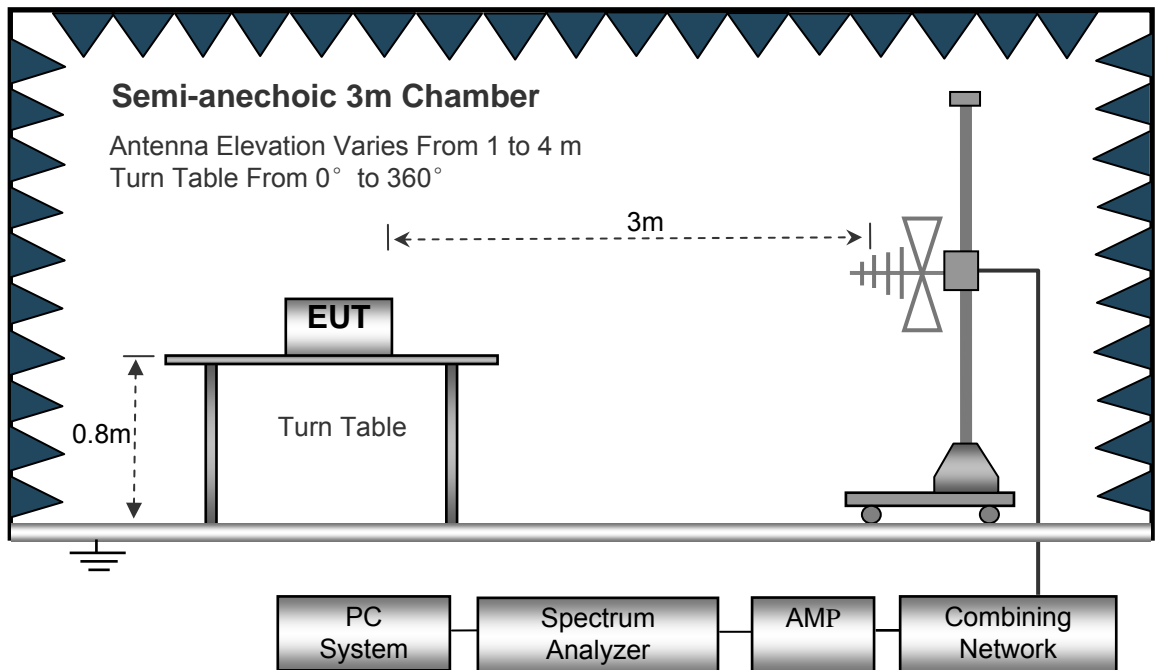

The test setup for emission measurement above 1 GHz.

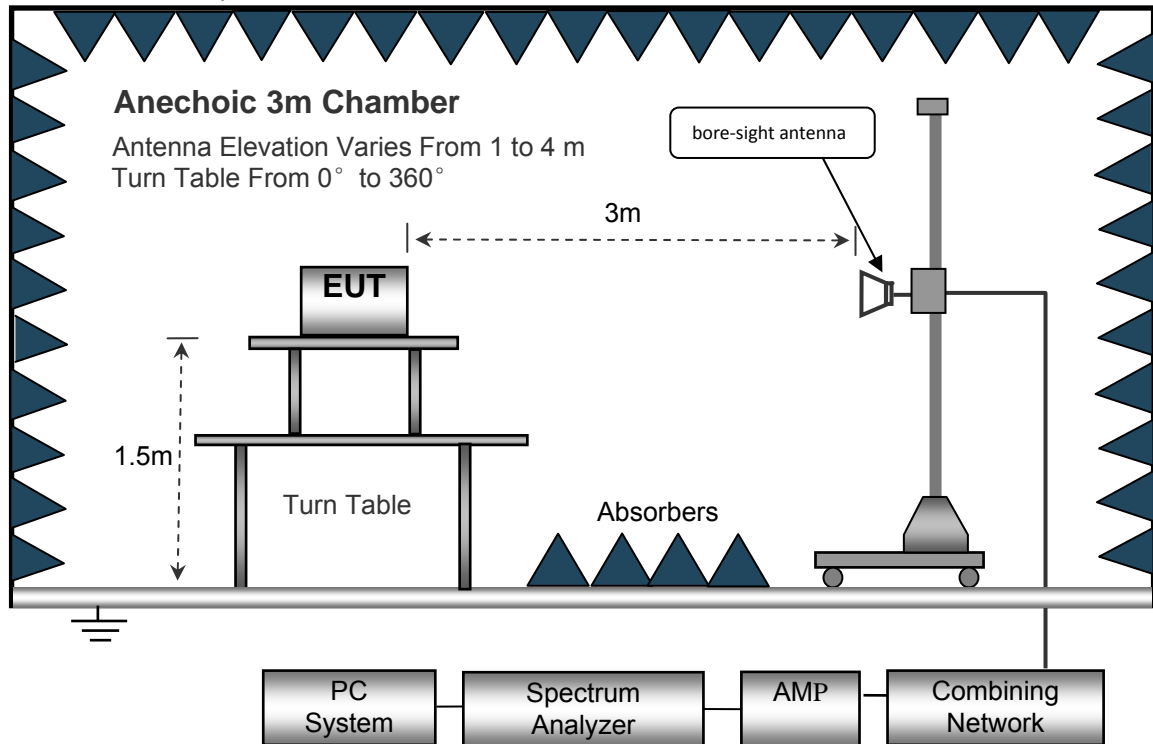

### 9.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed ..... Auto
- IF Bandwidth..... 10kHz
- Video Bandwidth..... 10kHz
- Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

- Sweep Speed ..... Auto
- Detector ..... PK
- Resolution Bandwidth..... 100kHz
- Video Bandwidth..... 300kHz

Above 1GHz

- Sweep Speed ..... Auto
- Detector ..... PK
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 3MHz
- Detector ..... Ave.
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 10Hz

## 9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

## 9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 9.6 Summary of Test Results

**Wifi:**

**Test Frequency: 9KHz~30MHz**

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.010	25.31	QP	21.84	40.00	7.15	29.54	-22.39
8.320	25.85	QP	21.02	40.00	6.87	29.54	-22.67
25.680	24.63	QP	20.55	40.00	5.18	29.54	-24.36
802.11g							
6.201	26.32	QP	21.84	40.00	8.16	29.54	-21.38
8.350	24.28	QP	21.02	40.00	5.30	29.54	-24.24
24.635	25.96	QP	20.55	40.00	6.51	29.54	-23.03
802.11n(HT20)							
6.032	25.17	QP	21.84	40.00	7.01	29.54	-22.53
8.051	25.03	QP	21.02	40.00	6.05	29.54	-23.49
26.215	24.42	QP	20.55	40.00	4.97	29.54	-24.57
802.11n(HT40)							
6.032	25.11	QP	21.84	40.00	6.95	29.54	-22.59
8.051	25.23	QP	21.02	40.00	6.25	29.54	-23.29
26.215	24.57	QP	20.55	40.00	5.12	29.54	-24.42

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Low Channel 2412MHz									
223.45	42.45	QP	268.86	1.11	H	11.62	30.83	46.00	-15.17
223.45	36.11	QP	172.17	1.29	V	11.62	24.49	46.00	-21.51
4824.00	51.61	PK	297.35	1.57	V	1.06	50.55	74.00	-23.45
4824.00	47.73	Ave	297.35	1.57	V	1.06	46.67	54.00	-7.33
7236.00	42.52	PK	61.87	1.04	H	1.33	43.85	74.00	-30.15
7236.00	43.39	Ave	61.87	1.04	H	1.33	44.72	54.00	-9.28
2318.97	46.45	PK	255.17	1.28	V	13.19	33.26	74.00	-40.74
2318.97	38.49	Ave	255.17	1.28	V	13.19	25.30	54.00	-28.70
2371.65	44.58	PK	215.89	1.20	H	13.14	31.44	74.00	-42.56
2371.65	38.14	Ave	215.89	1.20	H	13.14	25.00	54.00	-29.00
2493.86	42.10	PK	202.09	1.62	V	13.08	29.02	74.00	-44.98
2493.86	36.34	Ave	202.09	1.62	V	13.08	23.26	54.00	-30.74



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.45	43.39	QP	62.06	1.56	H	11.62	31.77	46.00	-14.23
223.45	36.52	QP	313.51	1.74	V	11.62	24.90	46.00	-21.10
4874.00	52.18	PK	63.25	1.58	V	0.62	51.56	74.00	-22.44
4874.00	47.45	Ave	63.25	1.58	V	0.62	46.83	54.00	-7.17
7311.00	43.84	PK	146.53	1.05	H	2.21	46.05	74.00	-27.95
7311.00	43.45	Ave	146.53	1.05	H	2.21	45.66	54.00	-8.34
2325.58	45.28	PK	225.20	1.88	V	13.19	32.09	74.00	-41.91
2325.58	39.83	Ave	225.20	1.88	V	13.19	26.64	54.00	-27.36
2379.75	42.48	PK	352.93	1.81	H	13.14	29.34	74.00	-44.66
2379.75	36.45	Ave	352.93	1.81	H	13.14	23.31	54.00	-30.69
2498.22	42.61	PK	332.97	1.60	V	13.08	29.53	74.00	-44.47
2498.22	36.57	Ave	332.97	1.60	V	13.08	23.49	54.00	-30.51

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: High Channel 2462MHz									
223.45	42.15	QP	190.39	1.31	H	11.62	30.53	46.00	-15.47
223.45	37.55	QP	74.08	1.43	V	11.62	25.93	46.00	-20.07
4924.00	51.84	PK	221.13	1.58	V	0.24	51.60	74.00	-22.40
4924.00	48.01	Ave	221.13	1.58	V	0.24	47.77	54.00	-6.23
7386.00	44.16	PK	353.74	1.54	H	2.84	47.00	74.00	-27.00
7386.00	43.72	Ave	353.74	1.54	H	2.84	46.56	54.00	-7.44
2338.16	46.75	PK	262.13	1.63	V	13.19	33.56	74.00	-40.44
2338.16	37.44	Ave	262.13	1.63	V	13.19	24.25	54.00	-29.75
2359.96	42.04	PK	242.47	1.87	H	13.14	28.90	74.00	-45.10
2359.96	37.57	Ave	242.47	1.87	H	13.14	24.43	54.00	-29.57
2492.10	44.11	PK	78.20	1.46	V	13.08	31.03	74.00	-42.97
2492.10	37.85	Ave	78.20	1.46	V	13.08	24.77	54.00	-29.23

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Low Channel 2412MHz									
223.45	42.42	QP	315.34	1.72	H	11.62	30.80	46.00	-15.20
223.45	36.31	QP	346.28	1.83	V	11.62	24.69	46.00	-21.31
4824.00	50.78	PK	289.22	1.21	V	1.06	49.72	74.00	-24.28
4824.00	46.62	Ave	289.22	1.21	V	1.06	45.56	54.00	-8.44
7236.00	43.12	PK	12.06	1.31	H	1.33	44.45	74.00	-29.55
7236.00	44.11	Ave	12.06	1.31	H	1.33	45.44	54.00	-8.56
2313.95	46.52	PK	206.25	1.93	V	13.19	33.33	74.00	-40.67
2313.95	38.89	Ave	206.25	1.93	V	13.19	25.70	54.00	-28.30
2359.89	42.35	PK	96.33	1.17	H	13.14	29.21	74.00	-44.79
2359.89	37.99	Ave	96.33	1.17	H	13.14	24.85	54.00	-29.15
2485.14	42.19	PK	340.14	1.46	V	13.08	29.11	74.00	-44.89
2485.14	38.01	Ave	340.14	1.46	V	13.08	24.93	54.00	-29.07

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.45	43.14	QP	58.78	1.51	H	11.62	31.52	46.00	-14.48
223.45	36.82	QP	353.58	1.33	V	11.62	25.20	46.00	-20.80
4874.00	49.81	PK	58.16	1.25	V	0.62	49.19	74.00	-24.81
4874.00	45.48	Ave	58.16	1.25	V	0.62	44.86	54.00	-9.14
7311.00	44.29	PK	216.37	1.58	H	2.21	46.50	74.00	-27.50
7311.00	43.53	Ave	216.37	1.58	H	2.21	45.74	54.00	-8.26
2341.25	45.55	PK	141.11	1.56	V	13.19	32.36	74.00	-41.64
2341.25	39.97	Ave	141.11	1.56	V	13.19	26.78	54.00	-27.22
2357.49	44.06	PK	148.30	1.87	H	13.14	30.92	74.00	-43.08
2357.49	37.70	Ave	148.30	1.87	H	13.14	24.56	54.00	-29.44
2492.57	43.28	PK	188.17	1.15	V	13.08	30.20	74.00	-43.80
2492.57	38.03	Ave	188.17	1.15	V	13.08	24.95	54.00	-29.05

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: High Channel 2462MHz									
223.45	42.96	QP	186.17	1.96	H	11.62	31.34	46.00	-14.66
223.45	37.01	QP	81.36	1.39	V	11.62	25.39	46.00	-20.61
4924.00	50.47	PK	348.04	1.43	V	0.24	50.23	74.00	-23.77
4924.00	46.87	Ave	348.04	1.43	V	0.24	46.63	54.00	-7.37
7386.00	45.51	PK	67.96	1.86	H	2.84	48.35	74.00	-25.65
7386.00	42.53	Ave	67.96	1.86	H	2.84	45.37	54.00	-8.63
2333.34	46.69	PK	292.22	1.56	V	13.19	33.50	74.00	-40.50
2333.34	39.82	Ave	292.22	1.56	V	13.19	26.63	54.00	-27.37
2387.00	43.96	PK	117.49	1.65	H	13.14	30.82	74.00	-43.18
2387.00	37.58	Ave	117.49	1.65	H	13.14	24.44	54.00	-29.56
2487.67	42.42	PK	136.60	1.09	V	13.08	29.34	74.00	-44.66
2487.67	37.87	Ave	136.60	1.09	V	13.08	24.79	54.00	-29.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n20: Low Channel 2412MHz									
223.45	42.38	QP	306.84	1.40	H	11.62	30.76	46.00	-15.24
223.45	35.79	QP	109.93	1.83	V	11.62	24.17	46.00	-21.83
4824.00	50.64	PK	309.75	1.18	V	1.06	49.58	74.00	-24.42
4824.00	48.32	Ave	309.75	1.18	V	1.06	47.26	54.00	-6.74
7236.00	45.95	PK	19.87	1.20	H	1.33	47.28	74.00	-26.72
7236.00	41.31	Ave	19.87	1.20	H	1.33	42.64	54.00	-11.36
2335.53	46.27	PK	190.46	1.64	V	13.19	33.08	74.00	-40.92
2335.53	39.38	Ave	190.46	1.64	V	13.19	26.19	54.00	-27.81
2380.08	42.53	PK	35.10	1.85	H	13.14	29.39	74.00	-44.61
2380.08	36.35	Ave	35.10	1.85	H	13.14	23.21	54.00	-30.79
2494.74	42.75	PK	108.02	1.42	V	13.08	29.67	74.00	-44.33
2494.74	36.54	Ave	108.02	1.42	V	13.08	23.46	54.00	-30.54

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: Middle Channel 2437MHz									
223.45	43.76	QP	275.67	1.95	H	11.62	32.14	46.00	-13.86
223.45	36.26	QP	352.14	1.01	V	11.62	24.64	46.00	-21.36
4874.00	49.54	PK	19.47	1.79	V	0.62	48.92	74.00	-25.08
4874.00	49.23	Ave	19.47	1.79	V	0.62	48.61	54.00	-5.39
7311.00	44.72	PK	43.73	1.02	H	2.21	46.93	74.00	-27.07
7311.00	40.74	Ave	43.73	1.02	H	2.21	42.95	54.00	-11.05
2329.97	45.48	PK	185.35	1.78	V	13.19	32.29	74.00	-41.71
2329.97	37.61	Ave	185.35	1.78	V	13.19	24.42	54.00	-29.58
2381.80	42.18	PK	46.46	1.69	H	13.14	29.04	74.00	-44.96
2381.80	38.95	Ave	46.46	1.69	H	13.14	25.81	54.00	-28.19
2489.37	43.86	PK	167.56	1.41	V	13.08	30.78	74.00	-43.22
2489.37	37.81	Ave	167.56	1.41	V	13.08	24.73	54.00	-29.27

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n20: High Channel 2462MHz									
223.45	44.16	QP	298.74	1.03	H	11.62	32.54	46.00	-13.46
223.45	35.71	QP	150.66	1.72	V	11.62	24.09	46.00	-21.91
4924.00	49.63	PK	257.16	1.89	V	0.24	49.39	74.00	-24.61
4924.00	48.20	Ave	257.16	1.89	V	0.24	47.96	54.00	-6.04
7386.00	44.15	PK	10.99	1.65	H	2.84	46.99	74.00	-27.01
7386.00	39.52	Ave	10.99	1.65	H	2.84	42.36	54.00	-11.64
2343.44	45.60	PK	29.20	1.70	V	13.19	32.41	74.00	-41.59
2343.44	39.97	Ave	29.20	1.70	V	13.19	26.78	54.00	-27.22
2375.36	43.04	PK	254.53	1.14	H	13.14	29.90	74.00	-44.10
2375.36	38.17	Ave	254.53	1.14	H	13.14	25.03	54.00	-28.97
2489.44	42.02	PK	184.44	1.29	V	13.08	28.94	74.00	-45.06
2489.44	36.37	Ave	184.44	1.29	V	13.08	23.29	54.00	-30.71



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Low Channel 2422MHz									
223.45	43.15	QP	271.86	1.34	H	11.62	31.53	46.00	-14.47
223.45	34.94	QP	120.12	1.23	V	11.62	23.32	46.00	-22.68
4844.00	47.42	PK	117.98	1.82	V	1.06	46.36	74.00	-27.64
4844.00	46.86	Ave	117.98	1.82	V	1.06	45.80	54.00	-8.20
7266.00	42.91	PK	125.95	1.68	H	1.33	44.24	74.00	-29.76
7266.00	37.11	Ave	125.95	1.68	H	1.33	38.44	54.00	-15.56
2333.53	46.66	PK	314.74	1.85	V	13.19	33.47	74.00	-40.53
2333.53	37.74	Ave	314.74	1.85	V	13.19	24.55	54.00	-29.45
2352.24	43.20	PK	234.92	1.84	H	13.14	30.06	74.00	-43.94
2352.24	36.56	Ave	234.92	1.84	H	13.14	23.42	54.00	-30.58
2493.21	43.92	PK	166.57	1.25	V	13.08	30.84	74.00	-43.16
2493.21	36.89	Ave	166.57	1.25	V	13.08	23.81	54.00	-30.19

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Middle Channel 2437MHz									
223.45	42.48	QP	323.19	1.63	H	11.62	30.86	46.00	-15.14
223.45	34.68	QP	253.39	1.13	V	11.62	23.06	46.00	-22.94
4874.00	47.07	PK	215.33	1.32	V	0.62	46.45	74.00	-27.55
4874.00	45.98	Ave	215.33	1.32	V	0.62	45.36	54.00	-8.64
7311.00	43.64	PK	225.28	1.81	H	2.21	45.85	74.00	-28.15
7311.00	36.93	Ave	225.28	1.81	H	2.21	39.14	54.00	-14.86
2314.96	46.40	PK	316.26	1.92	V	13.19	33.21	74.00	-40.79
2314.96	37.16	Ave	316.26	1.92	V	13.19	23.97	54.00	-30.03
2376.55	43.99	PK	9.94	1.10	H	13.14	30.85	74.00	-43.15
2376.55	38.91	Ave	9.94	1.10	H	13.14	25.77	54.00	-28.23
2498.40	43.95	PK	47.05	1.07	V	13.08	30.87	74.00	-43.13
2498.40	38.77	Ave	47.05	1.07	V	13.08	25.69	54.00	-28.31

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: High Channel 2452MHz									
223.45	42.90	QP	11.83	1.12	H	11.62	31.28	46.00	-14.72
223.45	34.78	QP	28.44	1.10	V	11.62	23.16	46.00	-22.84
4904.00	46.57	PK	114.01	1.00	V	0.24	46.33	74.00	-27.67
4904.00	46.70	Ave	114.01	1.00	V	0.24	46.46	54.00	-7.54
7356.00	44.56	PK	296.31	1.60	H	2.84	47.40	74.00	-26.60
7356.00	37.28	Ave	296.31	1.60	H	2.84	40.12	54.00	-13.88
2349.56	46.83	PK	240.07	1.52	V	13.19	33.64	74.00	-40.36
2349.56	38.40	Ave	240.07	1.52	V	13.19	25.21	54.00	-28.79
2366.05	44.93	PK	59.25	1.04	H	13.14	31.79	74.00	-42.21
2366.05	38.11	Ave	59.25	1.04	H	13.14	24.97	54.00	-29.03
2488.63	43.40	PK	241.78	1.91	V	13.08	30.32	74.00	-43.68
2488.63	38.24	Ave	241.78	1.91	V	13.08	25.16	54.00	-28.84

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

**BT BLE:****Test Frequency: 9KHz~26MHz**

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.520	26.33	QP	21.84	40.00	8.17	29.54	-21.38
8.541	25.64	QP	21.02	40.00	6.66	29.54	-22.88
25.680	26.31	QP	20.55	40.00	6.86	29.54	-22.68

**Test Frequency : 26MHz ~ 30MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Low Channel 2402MHz									
268.32	37.09	QP	160	1.3	H	-13.35	23.74	46.00	-22.26
268.32	40.87	QP	82	1.8	V	-13.35	27.52	46.00	-18.48
4804.00	46.95	PK	53	1.4	V	-1.06	45.89	74.00	-28.11
4804.00	42.78	Ave	53	1.4	V	-1.06	41.72	54.00	-12.28
7206.00	40.94	PK	61	1.3	H	1.33	42.27	74.00	-31.73
7206.00	35.64	Ave	61	1.3	H	1.33	36.97	54.00	-17.03
2310.28	45.65	PK	225	1.8	V	-13.19	32.46	74.00	-41.54
2310.28	38.32	Ave	225	1.8	V	-13.19	25.13	54.00	-28.87
2387.53	44.55	PK	235	1.9	H	-13.14	31.41	74.00	-42.59
2387.53	37.46	Ave	235	1.9	H	-13.14	24.32	54.00	-29.68
2494.18	43.69	PK	68	1.6	V	-13.08	30.61	74.00	-43.39
2494.18	36.24	Ave	68	1.6	V	-13.08	23.16	54.00	-30.84

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Middle Channel 2440MHz									
268.32	36.25	QP	298	1.7	H	-13.35	22.90	46.00	-23.10
268.32	41.96	QP	156	1.4	V	-13.35	28.61	46.00	-17.39
4880.00	46.93	PK	343	1.1	V	-0.62	46.31	74.00	-27.69
4880.00	41.58	Ave	343	1.1	V	-0.62	40.96	54.00	-13.04
7320.00	41.82	PK	272	1.3	H	2.21	44.03	74.00	-29.97
7320.00	35.78	Ave	272	1.3	H	2.21	37.99	54.00	-16.01
2332.98	46.09	PK	108	1.0	V	-13.19	32.90	74.00	-41.10
2332.98	38.73	Ave	108	1.0	V	-13.19	25.54	54.00	-28.46
2364.37	43.95	PK	210	1.1	H	-13.14	30.81	74.00	-43.19
2364.37	36.70	Ave	210	1.1	H	-13.14	23.56	54.00	-30.44
2487.41	44.65	PK	245	1.4	V	-13.08	31.57	74.00	-42.43
2487.41	37.25	Ave	245	1.4	V	-13.08	24.17	54.00	-29.83

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK High Channel 2480MHz									
268.32	37.53	QP	322	1.5	H	-13.35	24.18	46.00	-21.82
268.32	40.60	QP	205	1.7	V	-13.35	27.25	46.00	-18.75
4960.00	46.96	PK	230	1.6	V	-0.24	46.72	74.00	-27.28
4960.00	41.98	Ave	230	1.6	V	-0.24	41.74	54.00	-12.26
7440.00	41.62	PK	174	1.1	H	2.84	44.46	74.00	-29.54
7440.00	35.82	Ave	174	1.1	H	2.84	38.66	54.00	-15.34
2321.72	46.52	PK	65	1.2	V	-13.19	33.33	74.00	-40.67
2321.72	39.16	Ave	65	1.2	V	-13.19	25.97	54.00	-28.03
2352.71	44.61	PK	245	1.4	H	-13.14	31.47	74.00	-42.53
2352.71	37.47	Ave	245	1.4	H	-13.14	24.33	54.00	-29.67
2483.94	43.96	PK	37	1.8	V	-13.08	30.88	74.00	-43.12
2483.94	37.93	Ave	37	1.8	V	-13.08	24.85	54.00	-29.15

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247  
Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016  
Test Result: PASS  
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - Below 1GHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold
  - Above 1GHz:  
RBW = 1MHz, VBW = 3MHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 10.2 Test Result


9KHz – 30MHz

802.11b

Low Channel

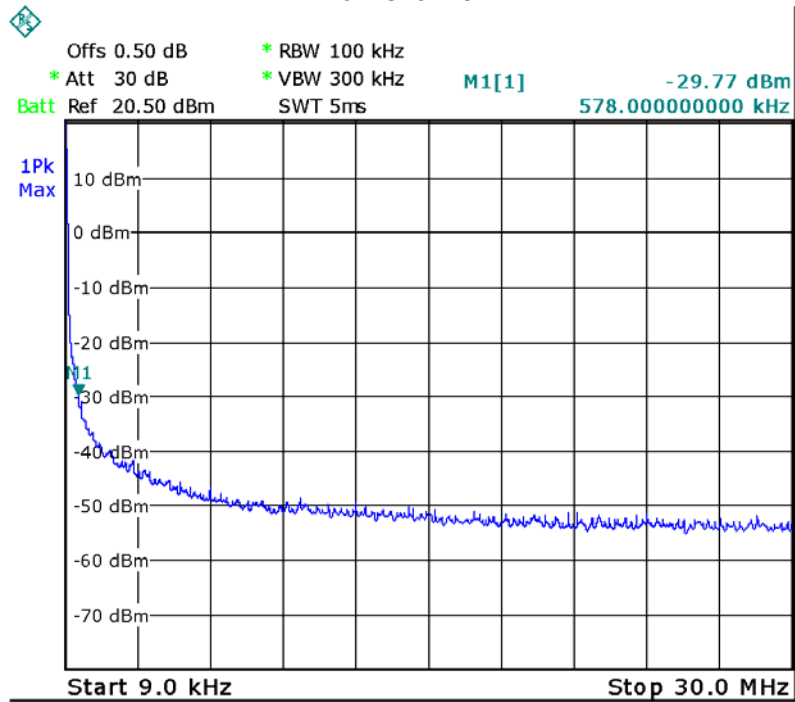


Middle Channel

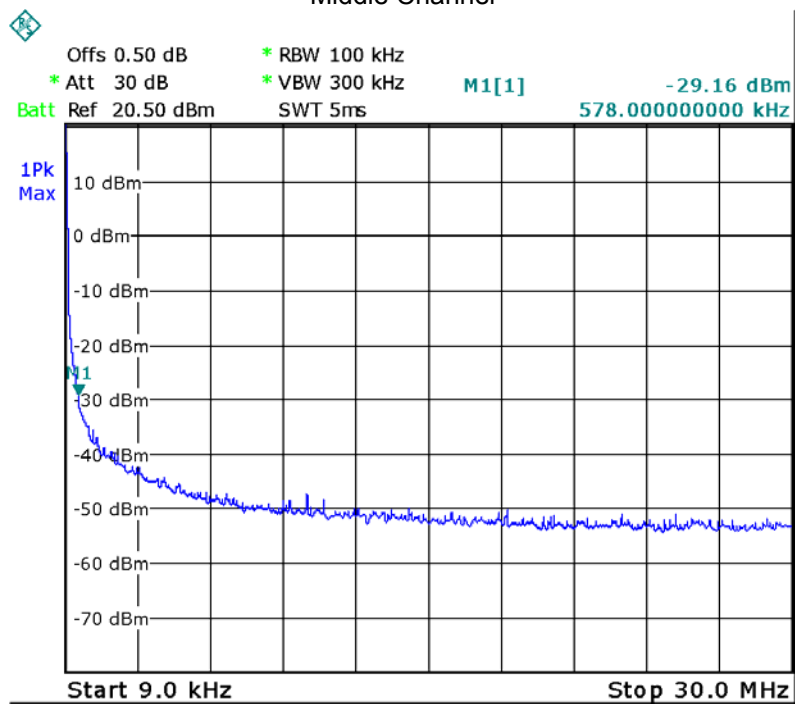




### High Channel

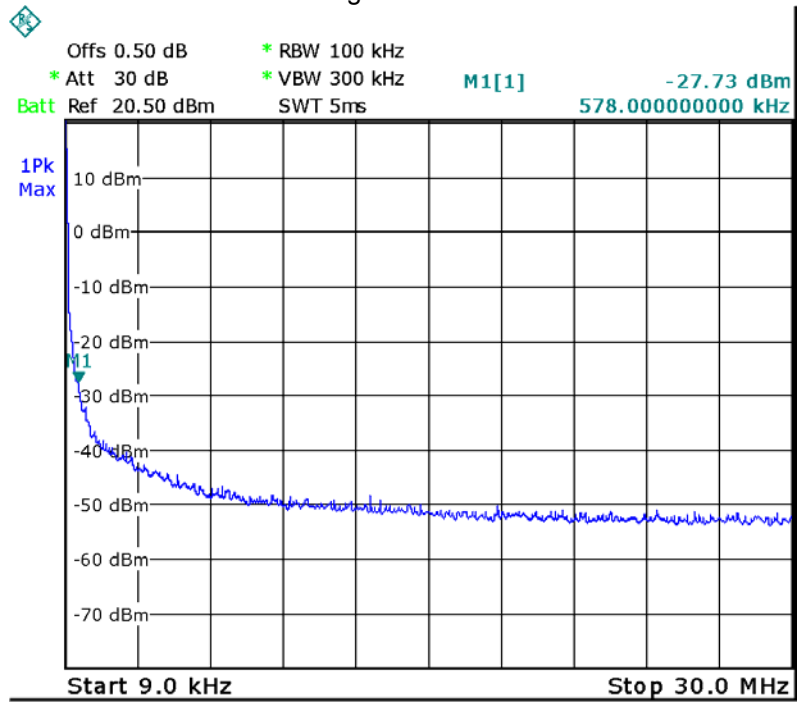


### 802.11g


### Low Channel

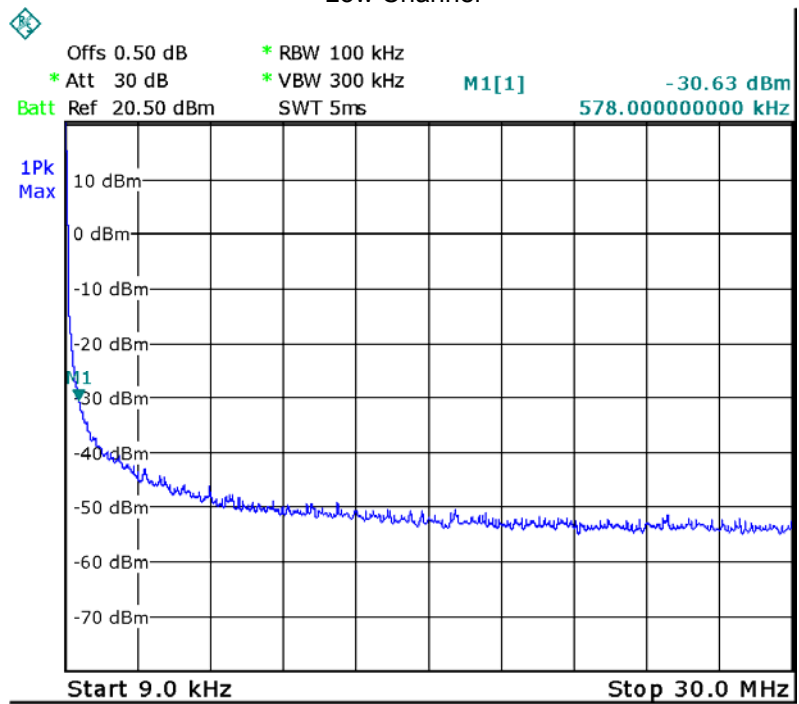

### Middle Channel

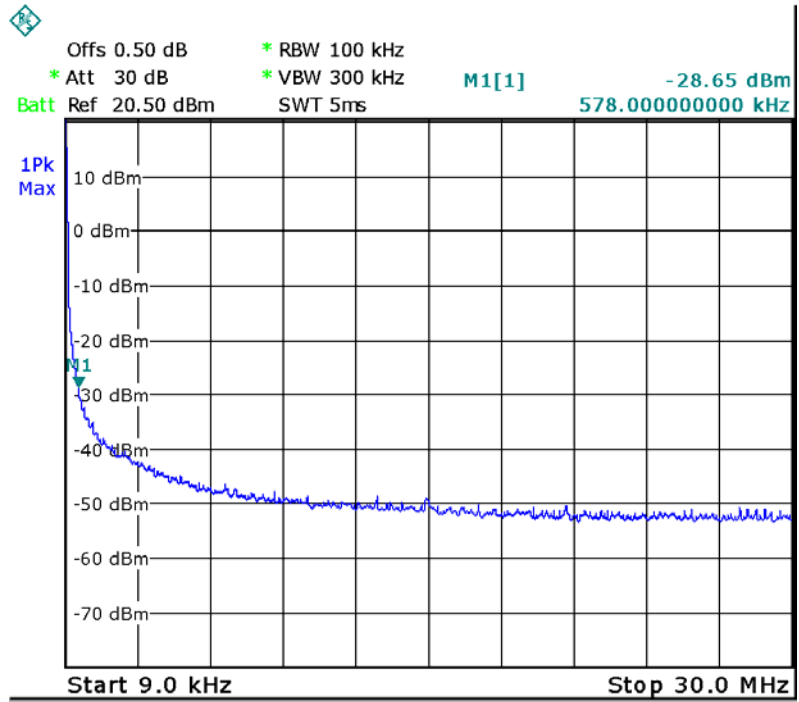


### High Channel

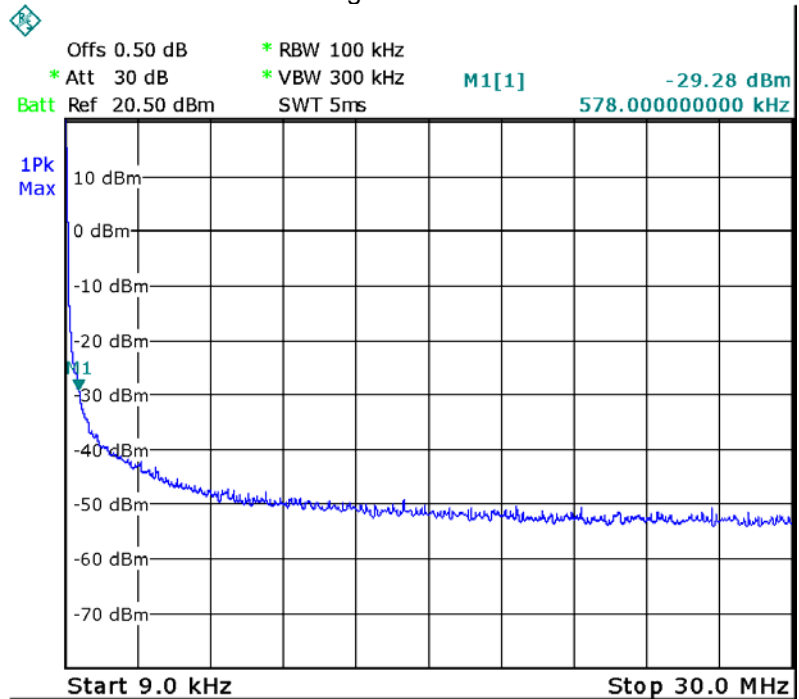


### 802.11n HT20


#### Low Channel

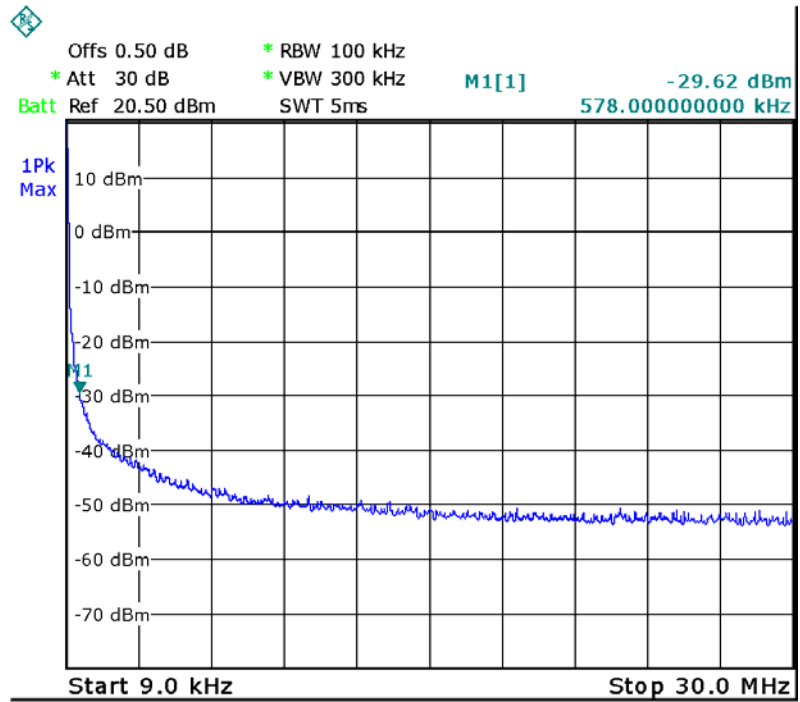

#### Middle Channel

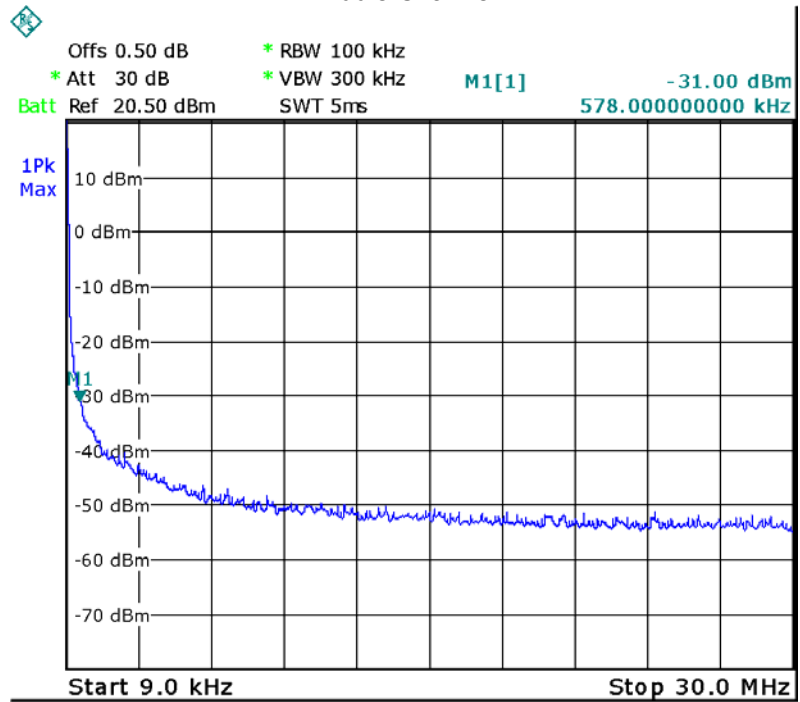




### High Channel

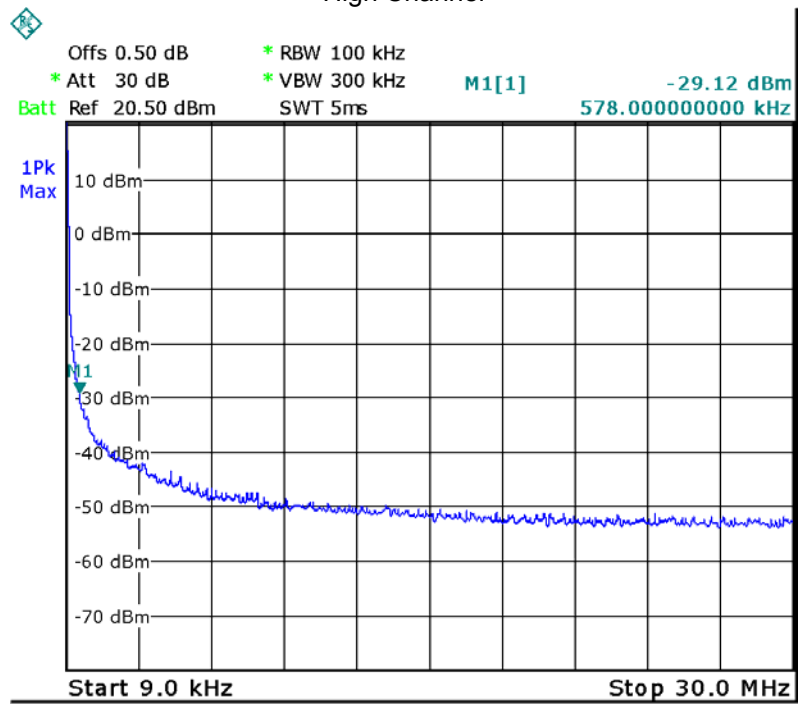


### 802.11n HT40

#### Low Channel

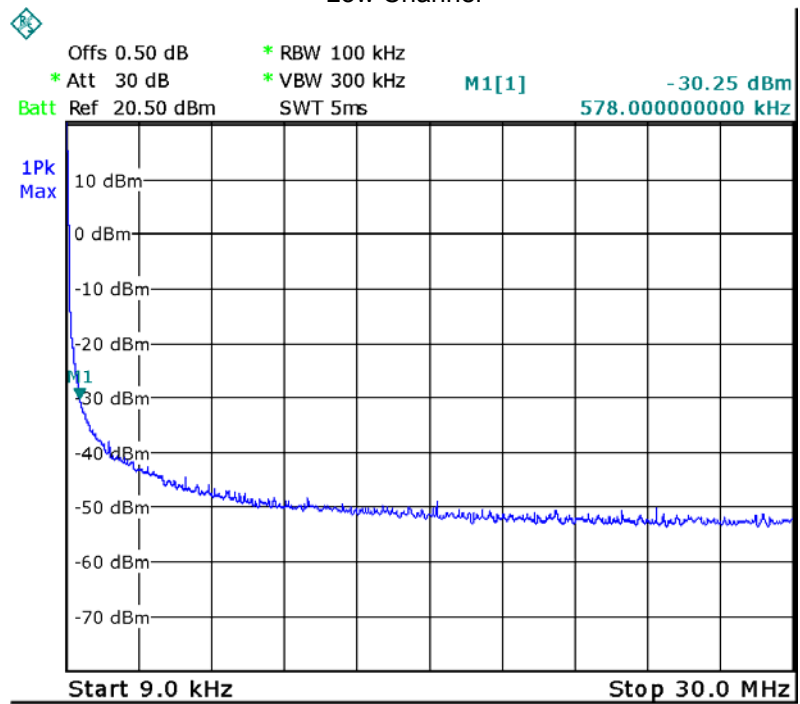


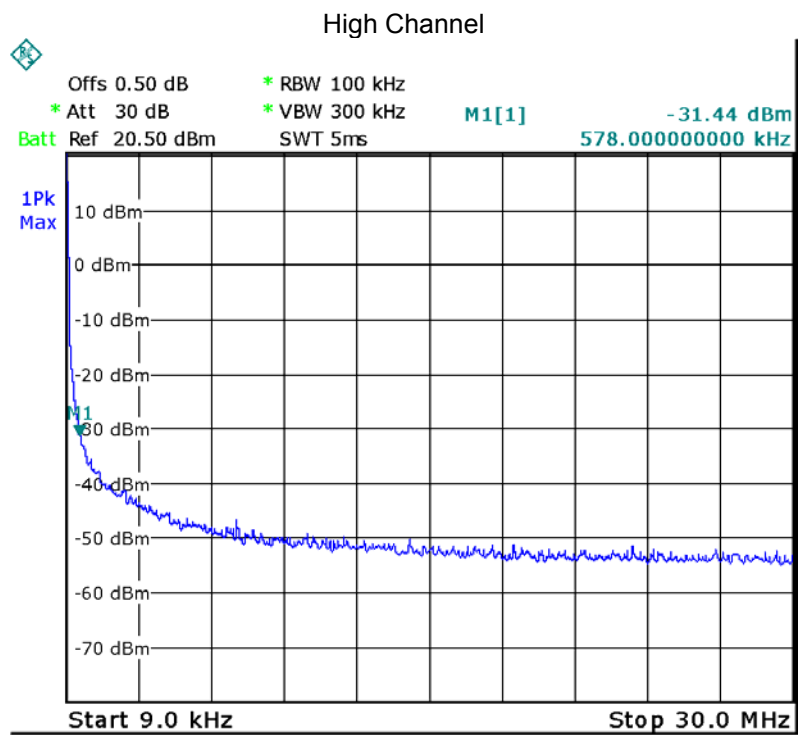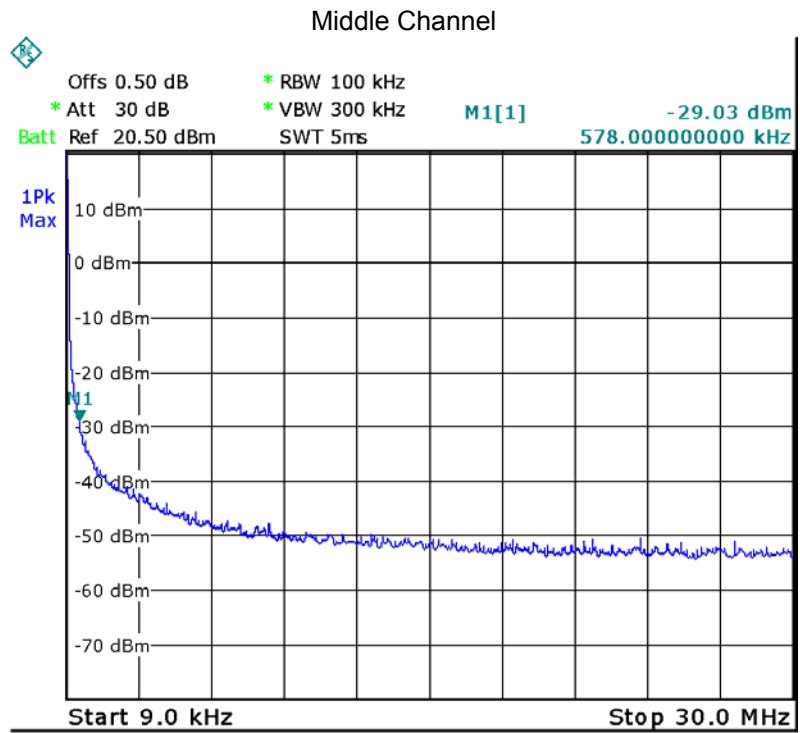


### BLE Low Channel

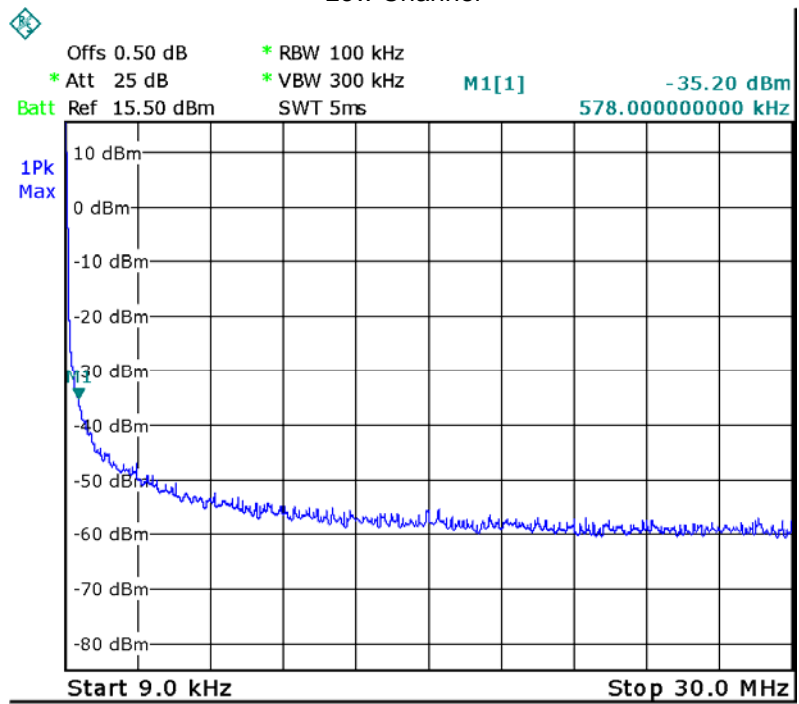

### Middle Channel

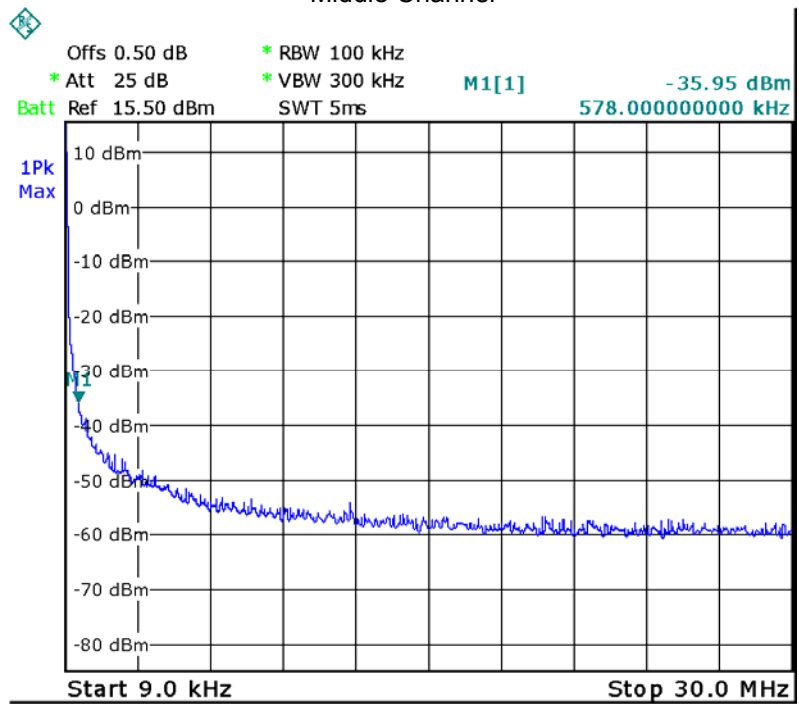

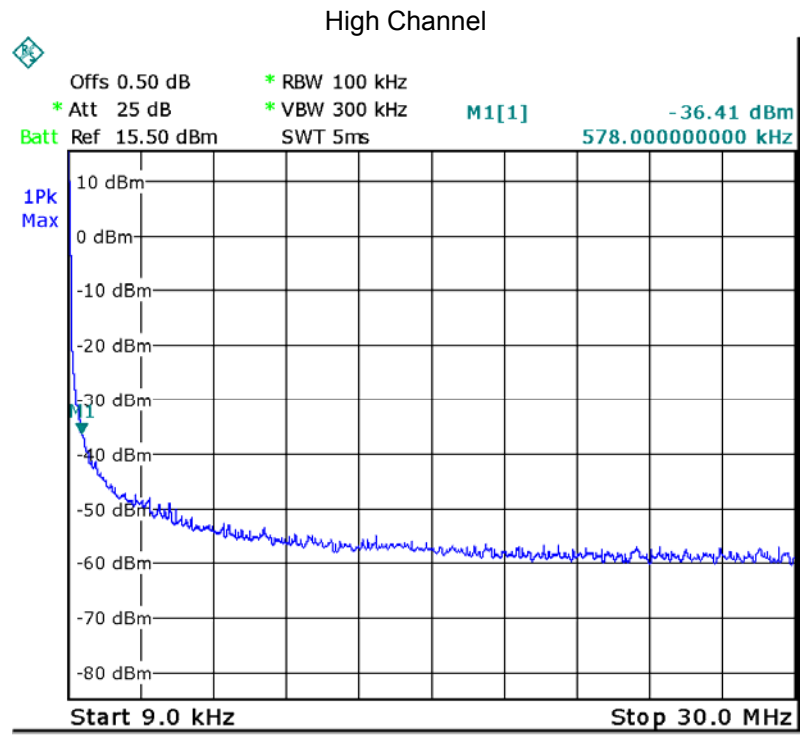


Above 30MHz

802.11b


Low Channel

Fundamental

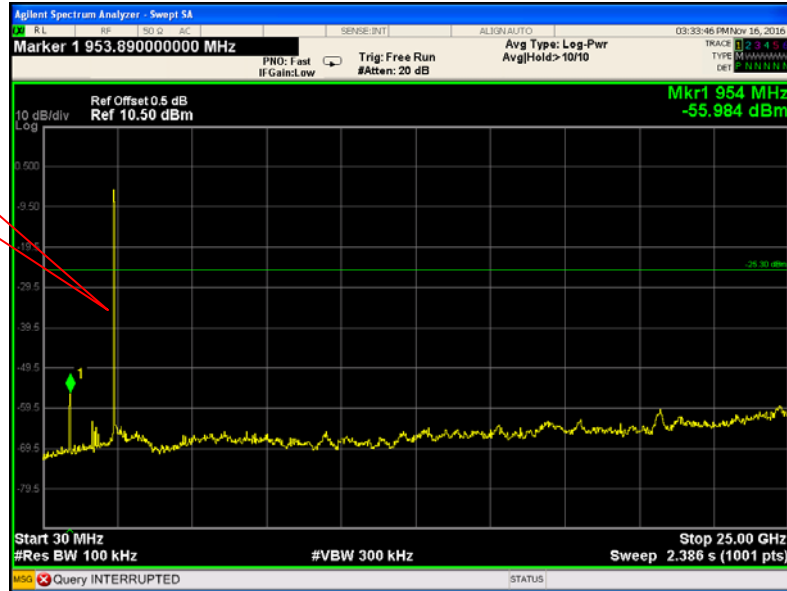

Middle Channel


Fundamental

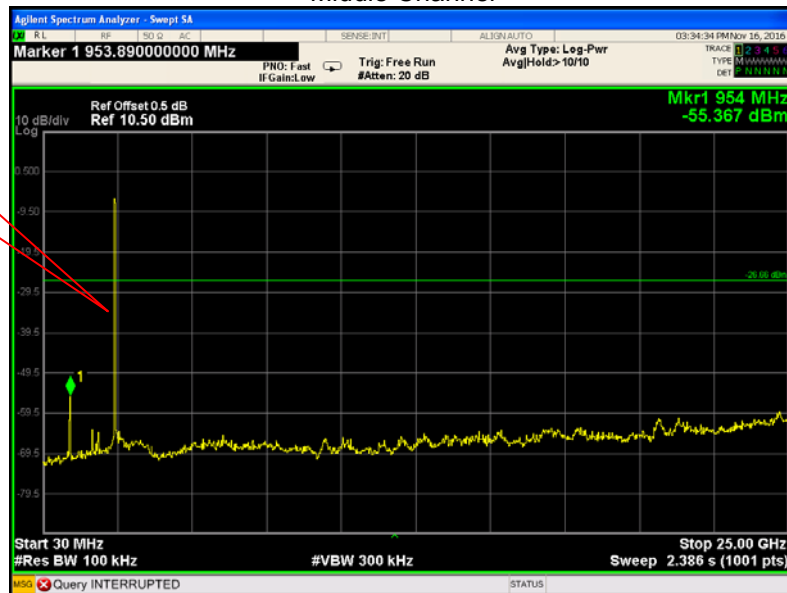



### High Channel


Fundamental

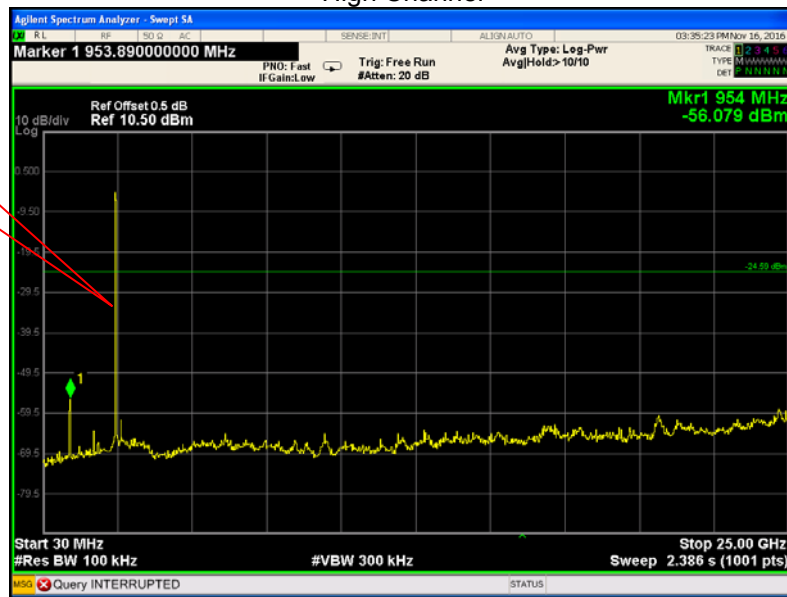

### 802.11g


### Low Channel

Fundamental

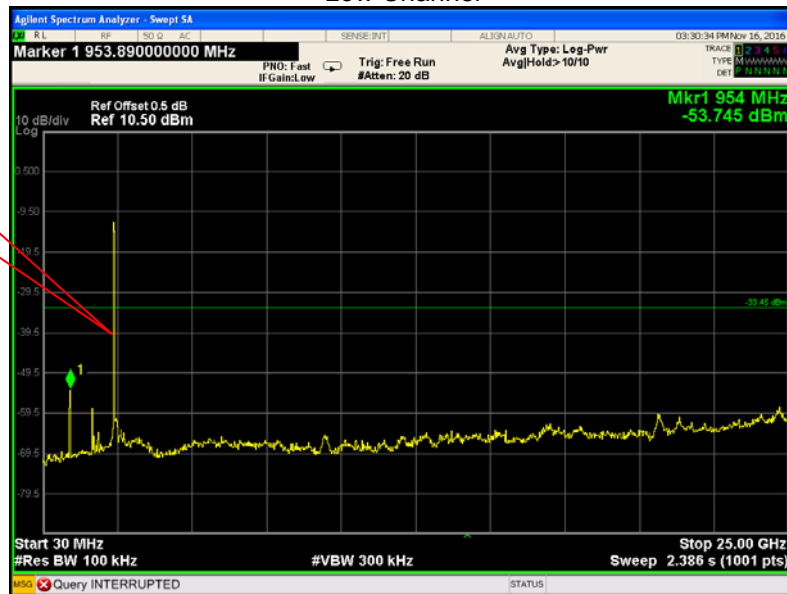


Middle Channel

Fundamental

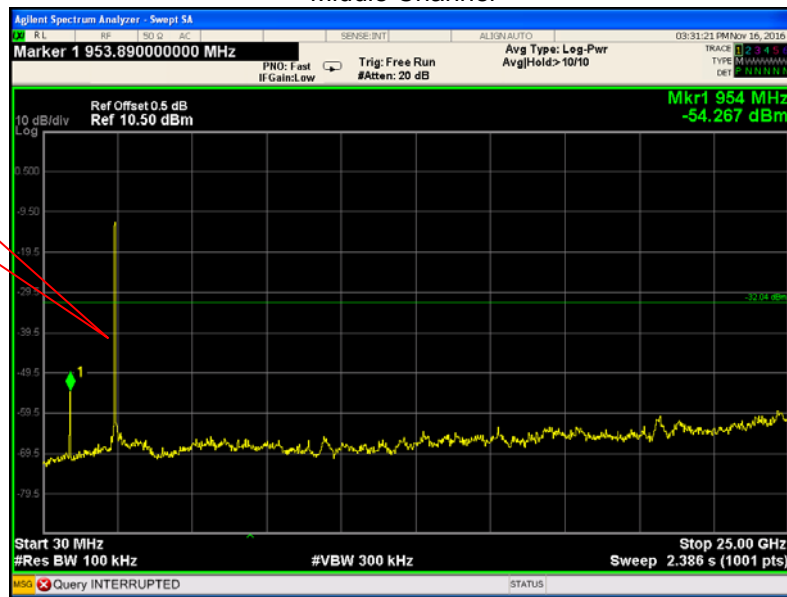

High Channel


Fundamental

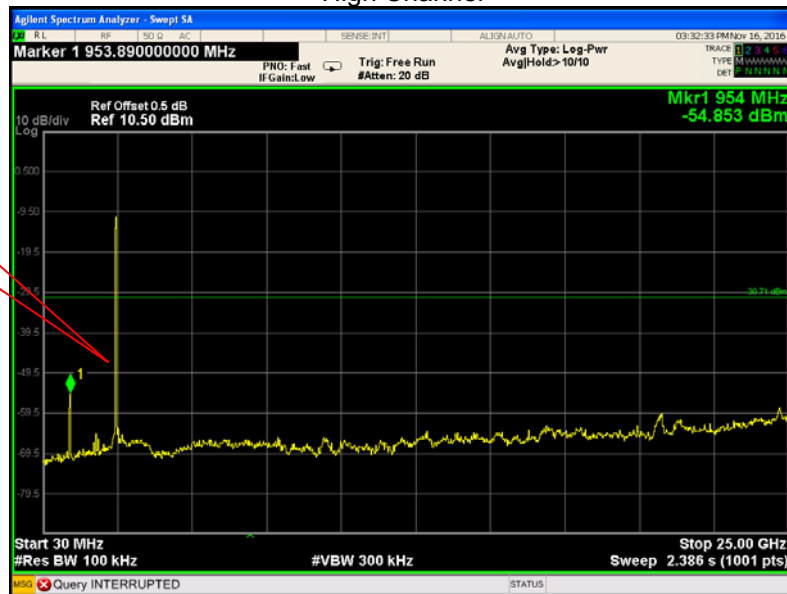

802.11n HT20


Low Channel

Fundamental

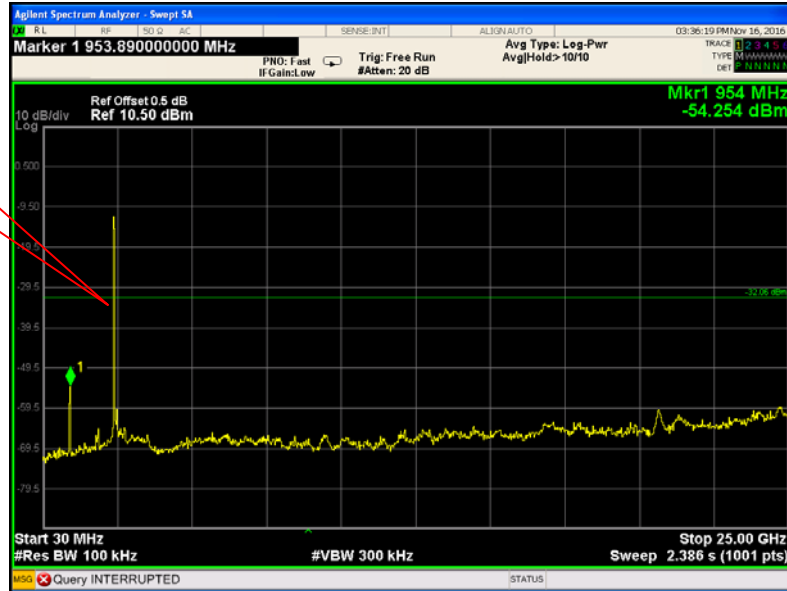

Middle Channel

Fundamental

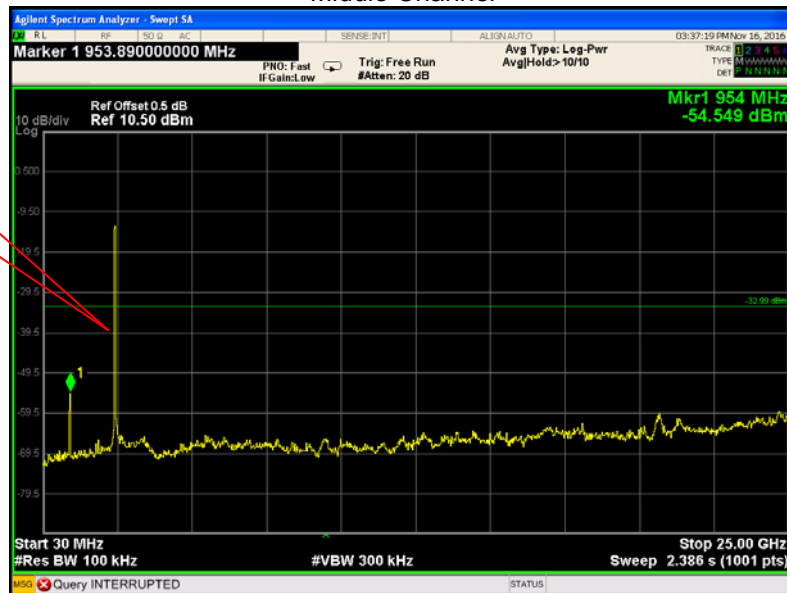

### High Channel


Fundamental



### 802.11n HT40


#### Low Channel

Fundamental

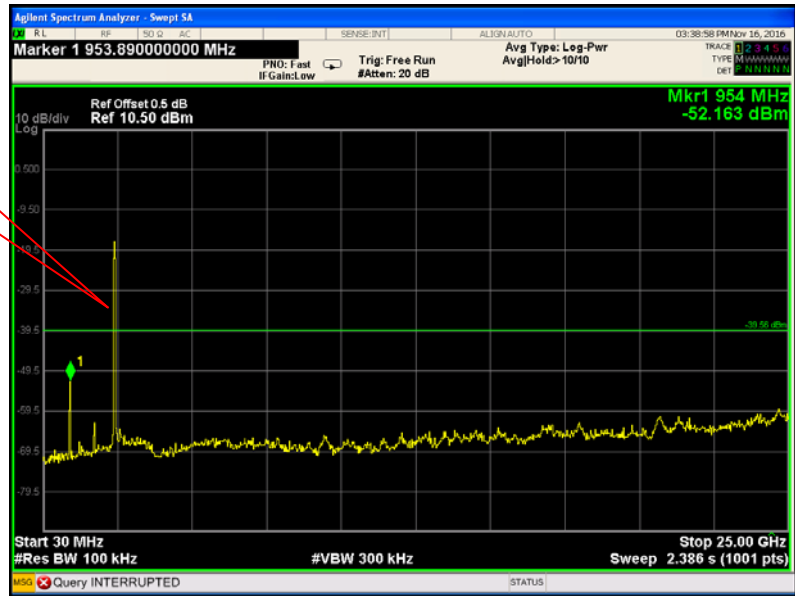


Middle Channel

Fundamental

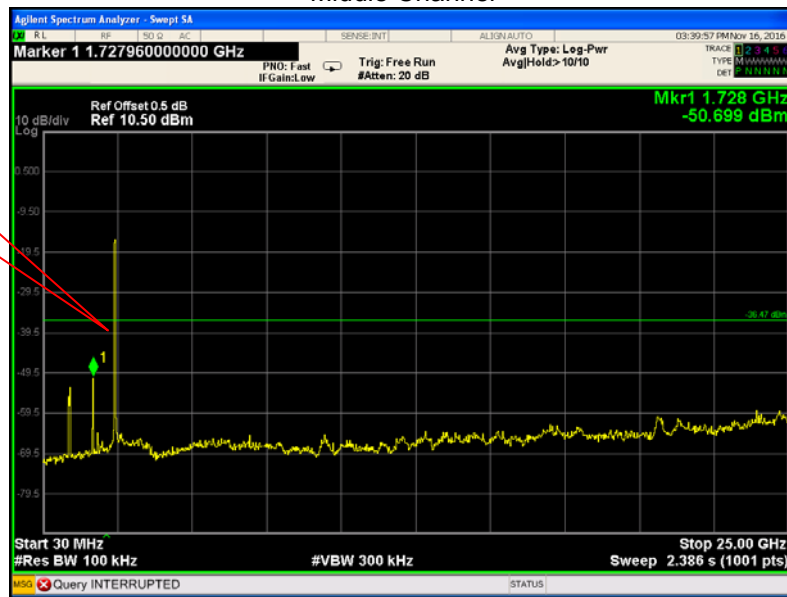


High Channel

Fundamental

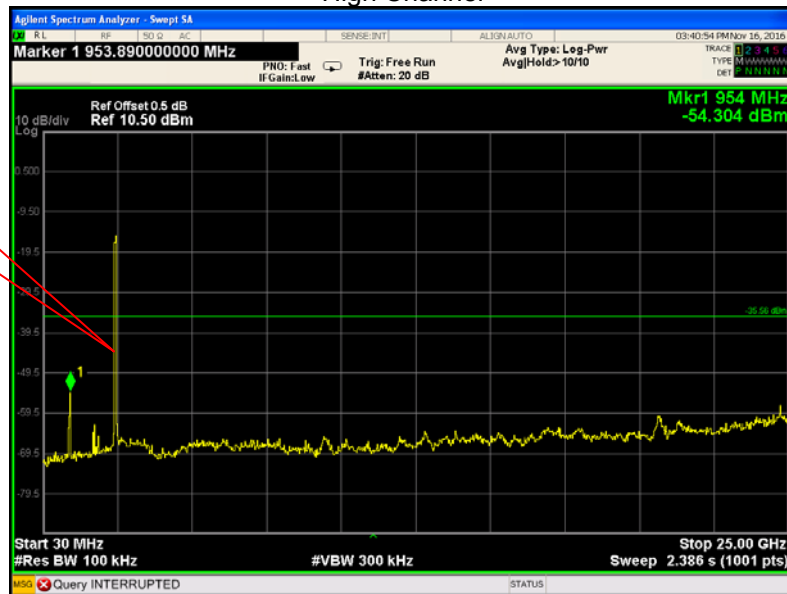


BLE  
Low Channel

Fundamental

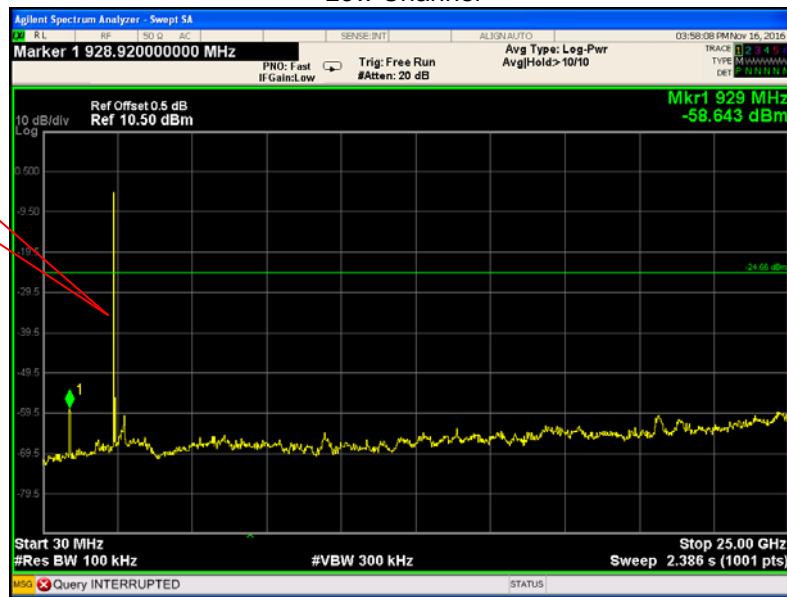


Middle Channel

Fundamental

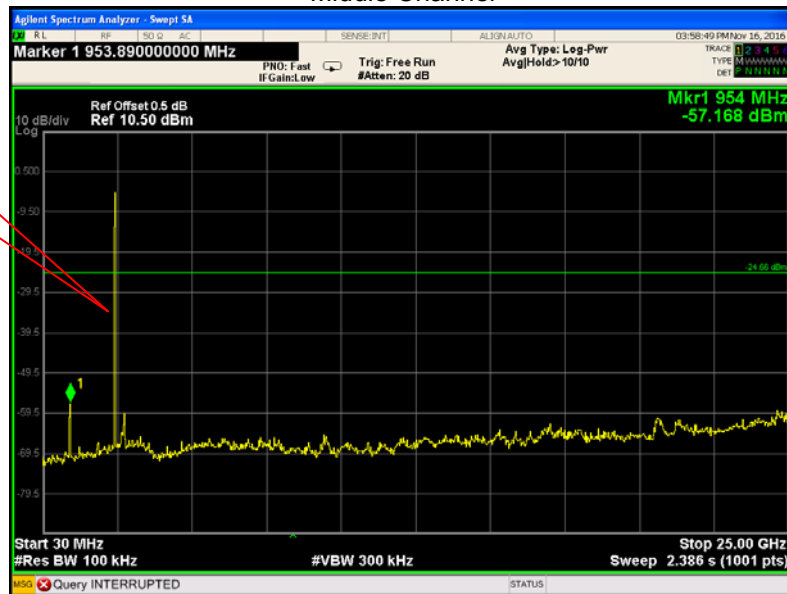

High Channel

Fundamental

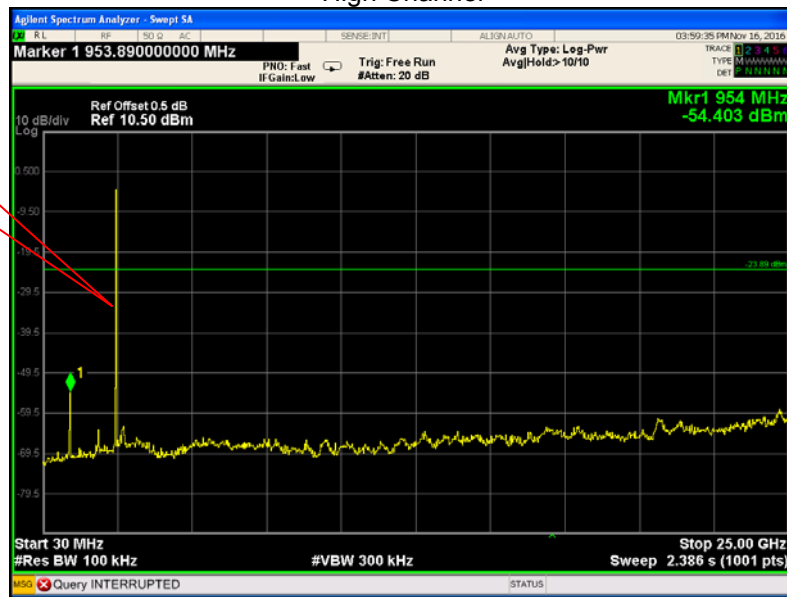

## 11 Band Edge Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting



### 11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.




### 11.2 Test Result


Test result plots shown as follows:

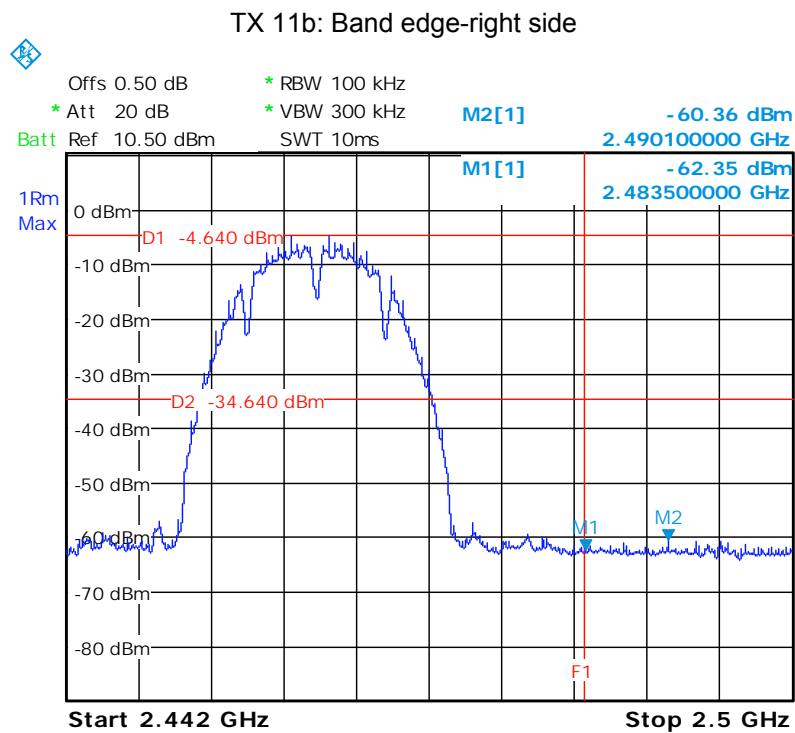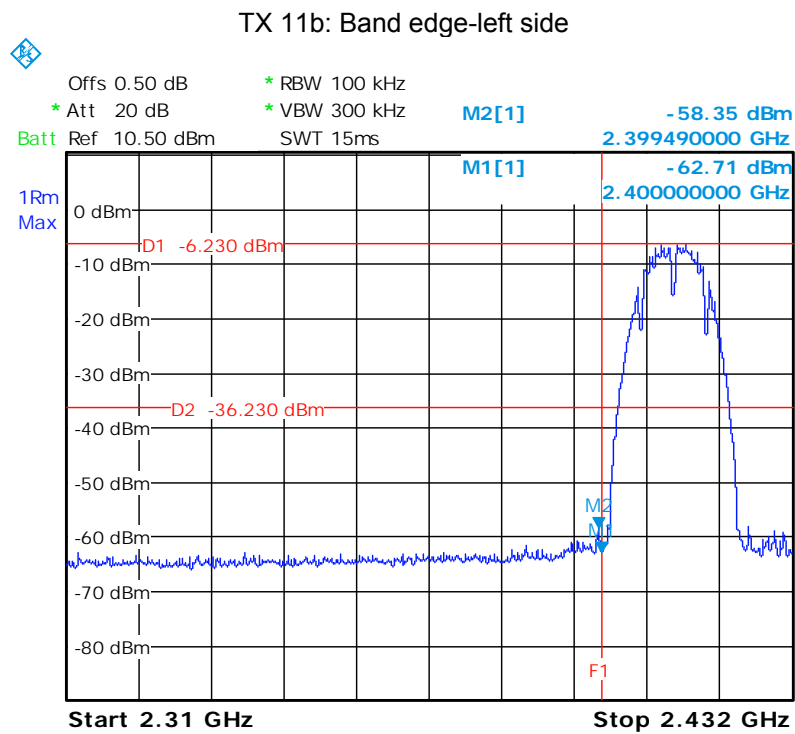


TX 11g: Band edge-left side

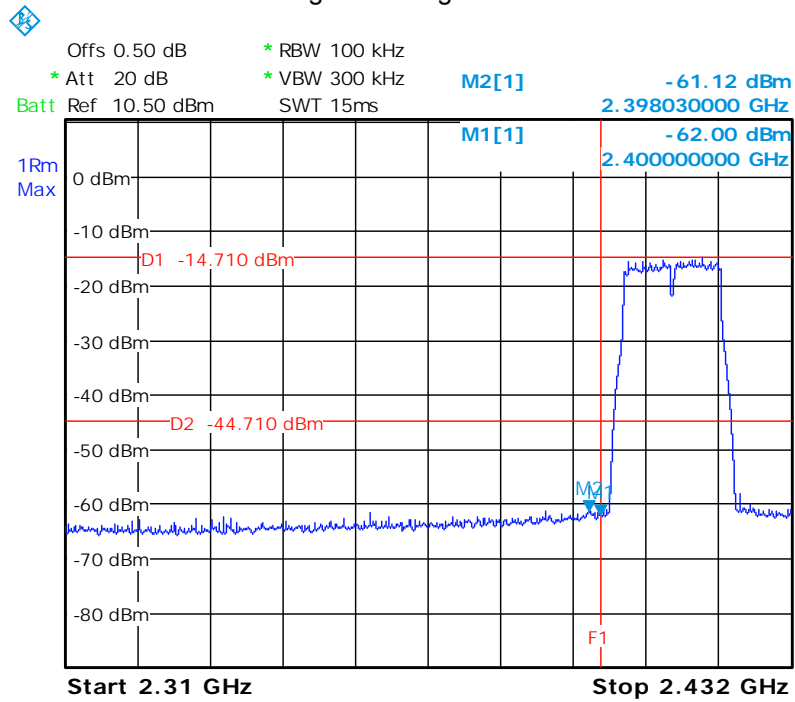


TX 11g: Band edge-right side

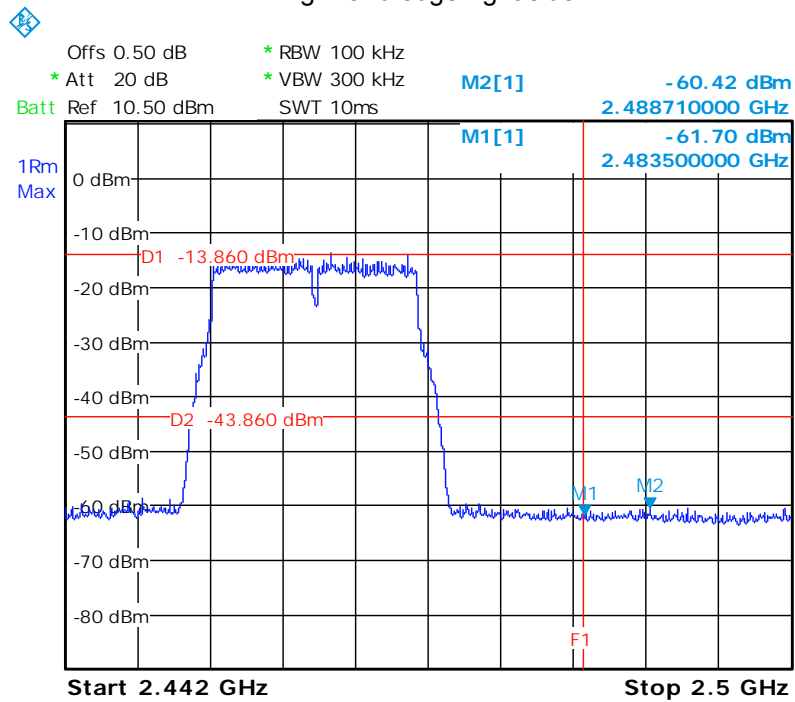


TX 11n HT20: Band edge-left side

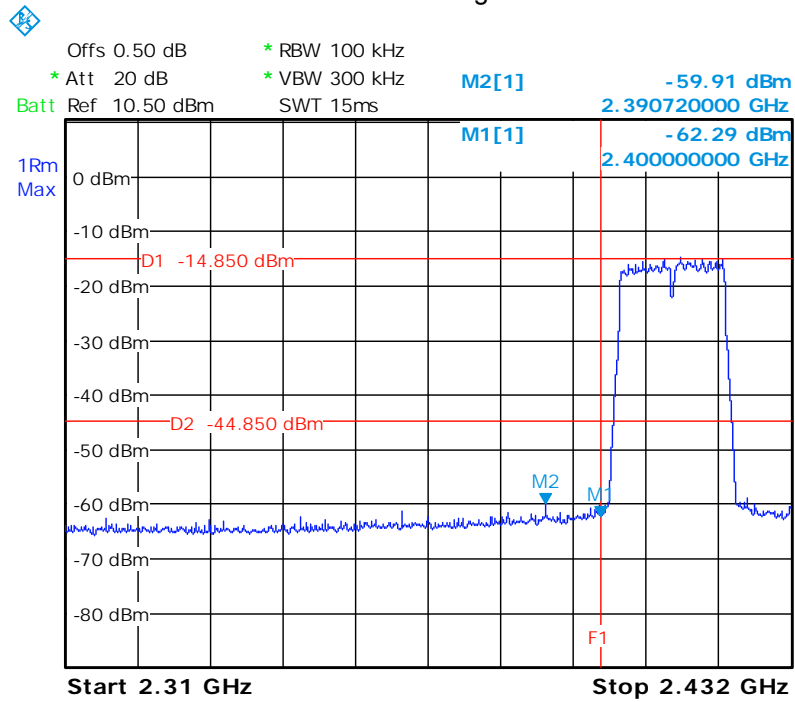


TX 11n HT20: Band edge-right side

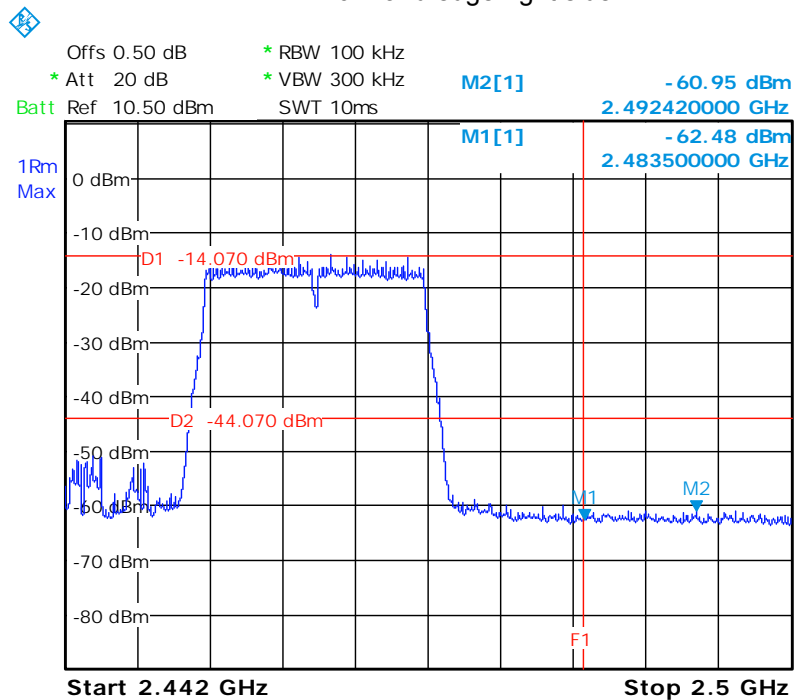


TX 11n HT40: Band edge-left side

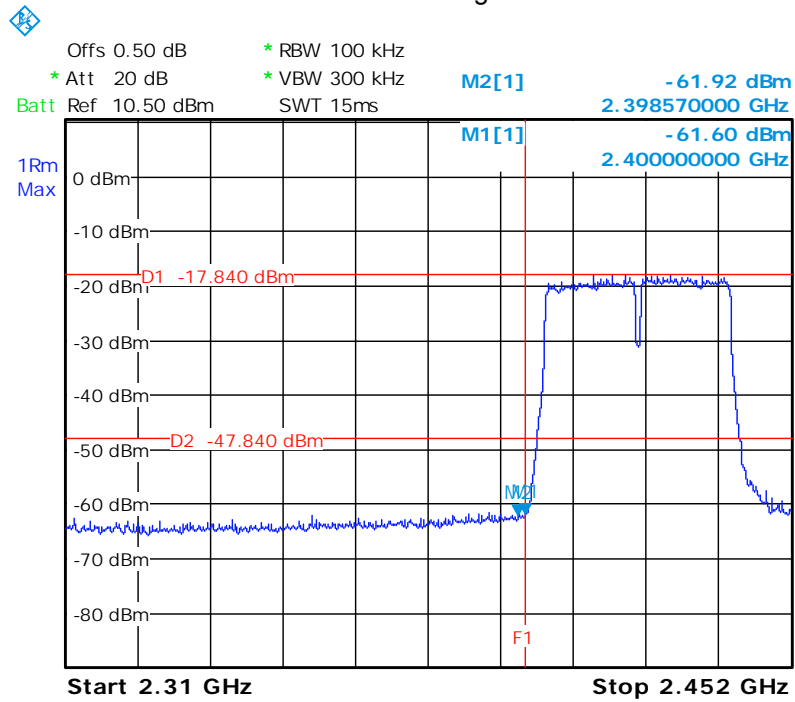


TX 11n HT40: Band edge-right side

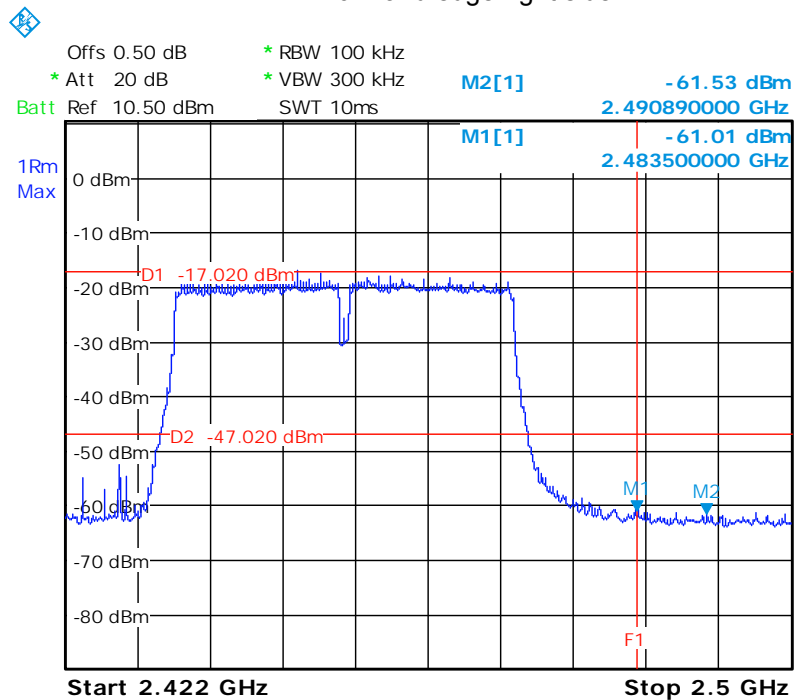

BLE: Band edge-left side

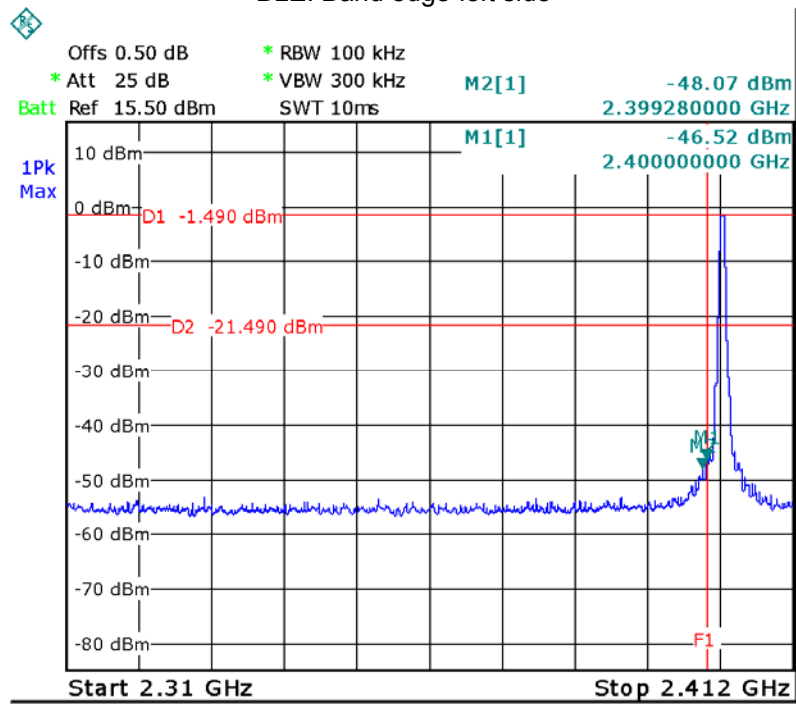

BLE: Band edge-right side

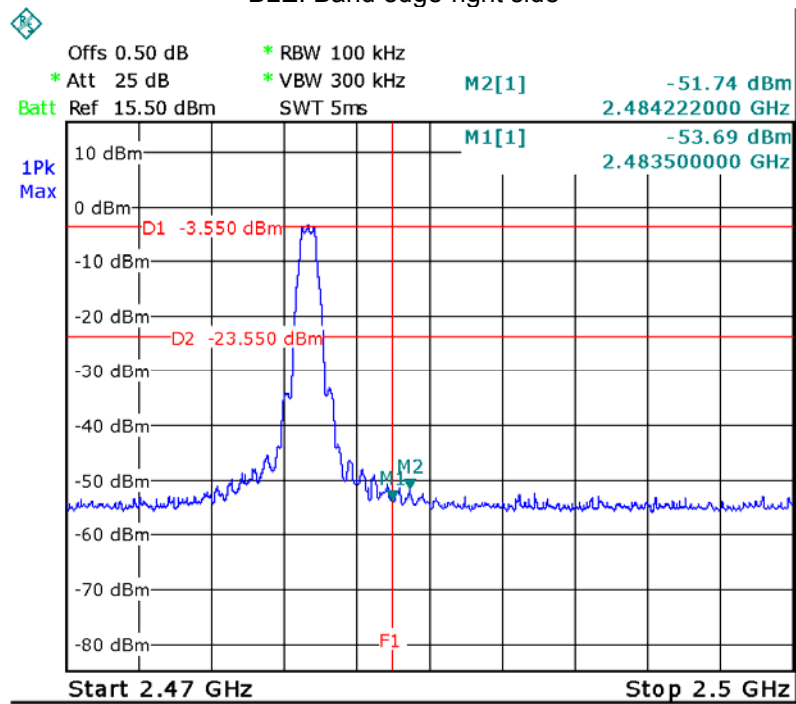

## 12 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016



### 12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


### 12.2 Test Result:

Operation mode	Test Channel	Bandwidth (MHz)	Limit(kHz)
TX 11b	Channel 1	10.092	>500
	Channel 6	10.092	>500
	Channel 11	10.092	>500
TX 11g	Channel 1	16.417	>500
	Channel 6	16.417	>500
	Channel 11	16.417	>500
TX 11n HT20	Channel 1	17.677	>500
	Channel 6	17.677	>500
	Channel 11	17.677	>500
TX 11n HT40	Channel 3	36.010	>500
	Channel 6	36.010	>500
	Channel 9	36.010	>500
BLE	Channel 0	0.695	>500
	Channel 19	0.695	>500
	Channel 39	0.695	>500


**Test result plot:**

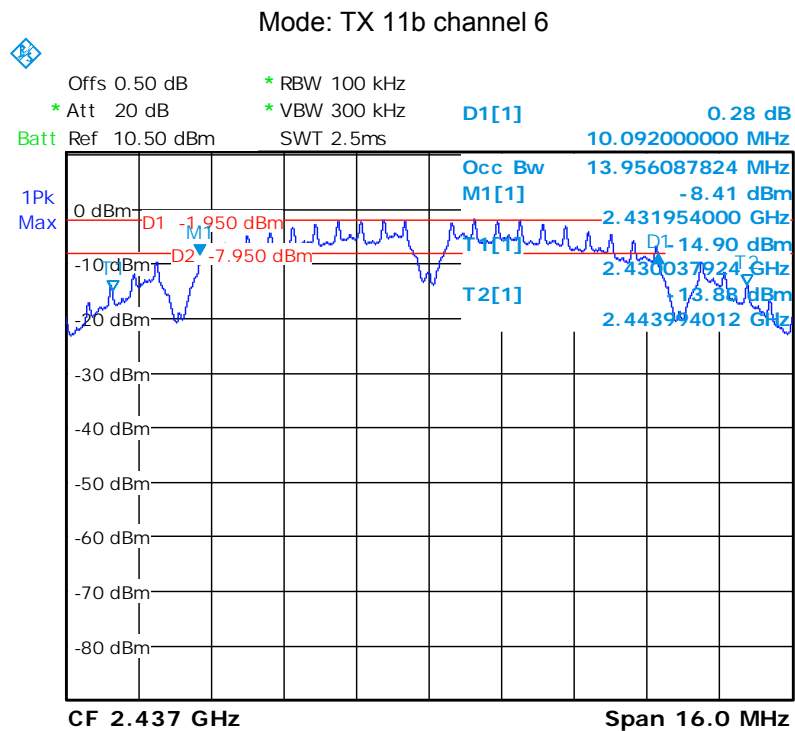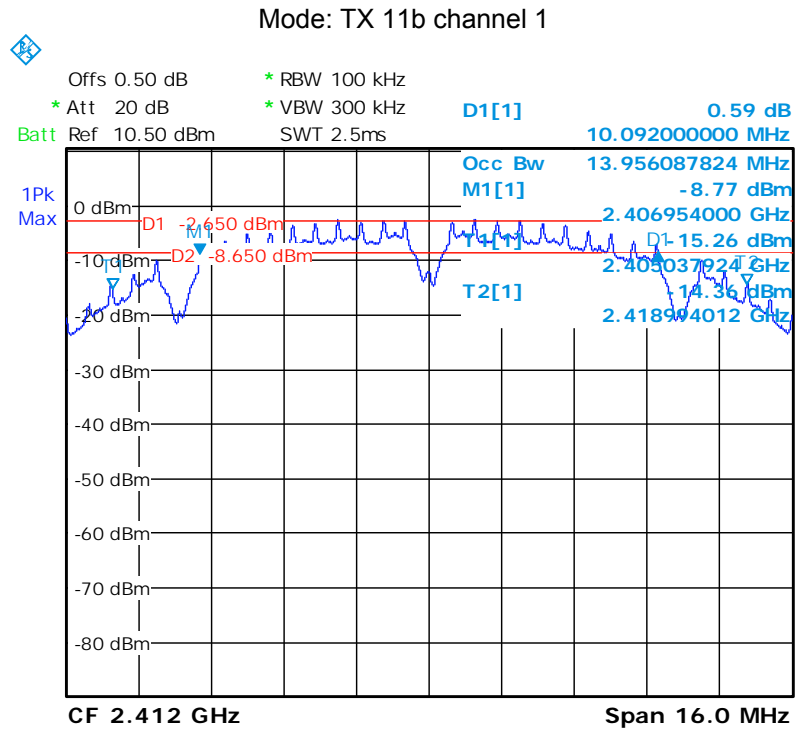

Mode: TX 11b channel 11

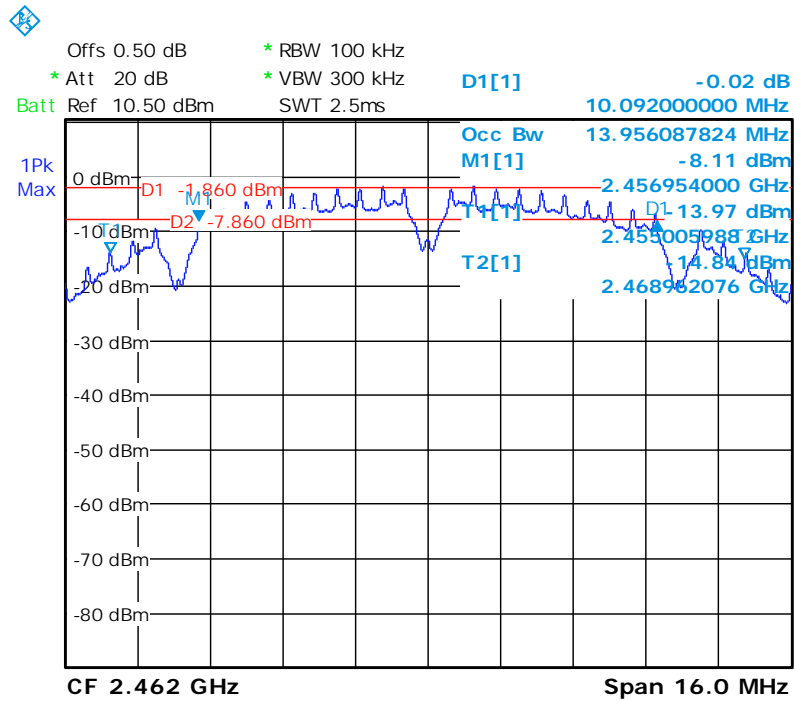


Mode: TX 11g channel 1

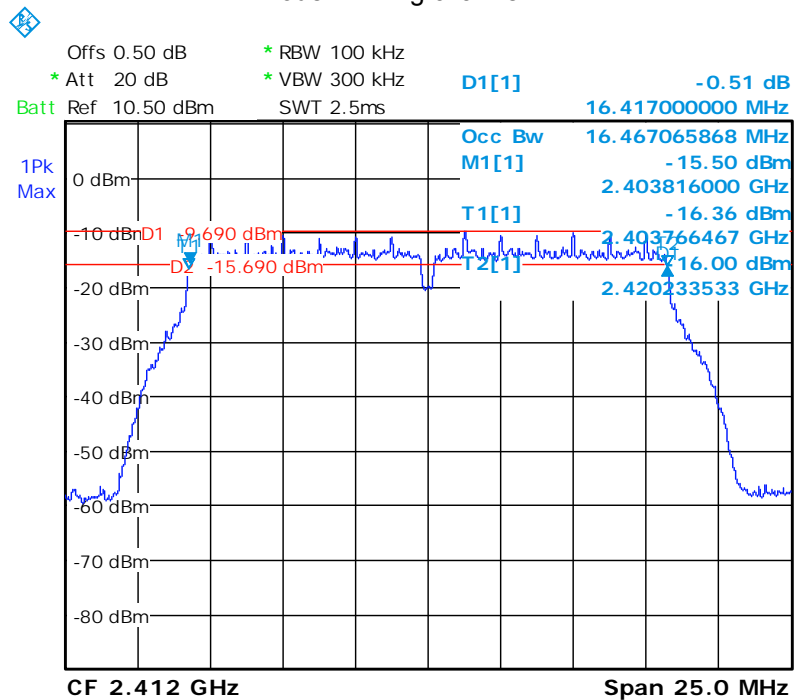







Mode: TX 11n HT20 channel 1

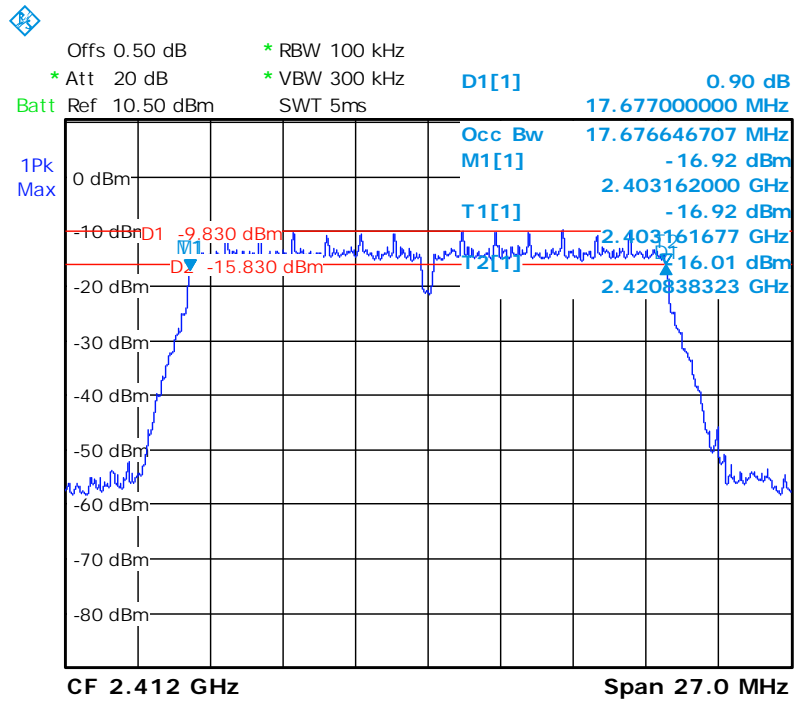


Mode: TX 11n HT20 channel 6

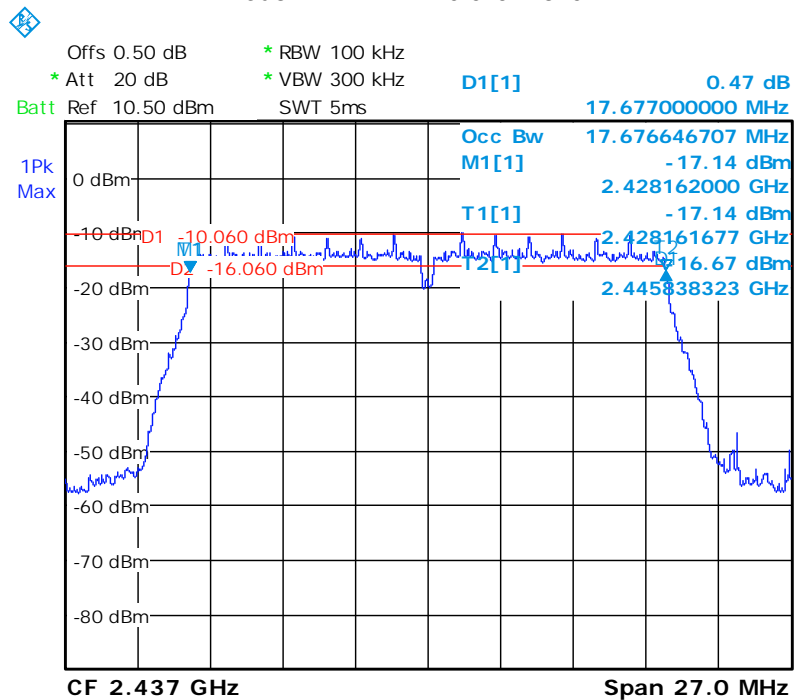


Mode: TX 11n HT20 channel 11

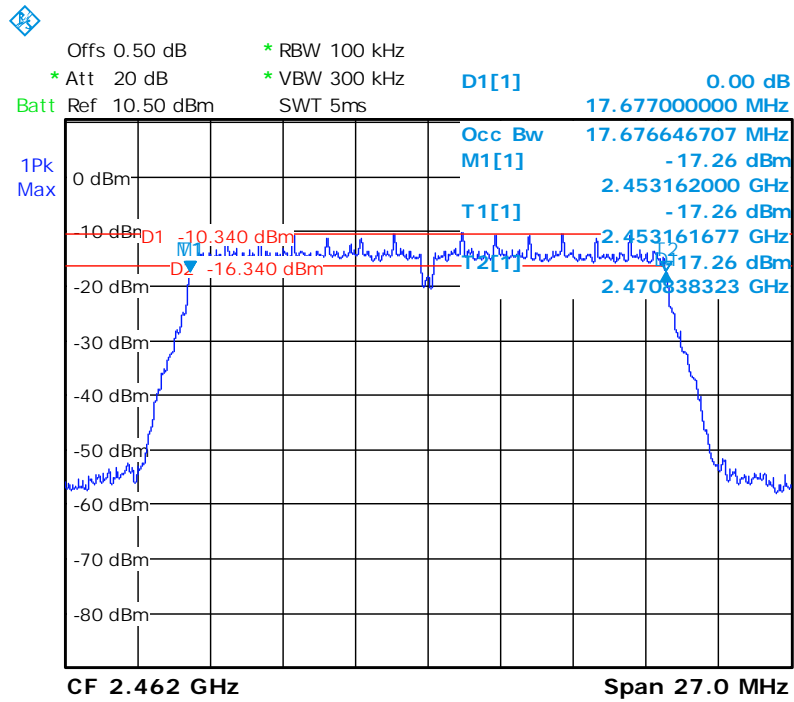


Mode: TX 11n HT40 channel 3

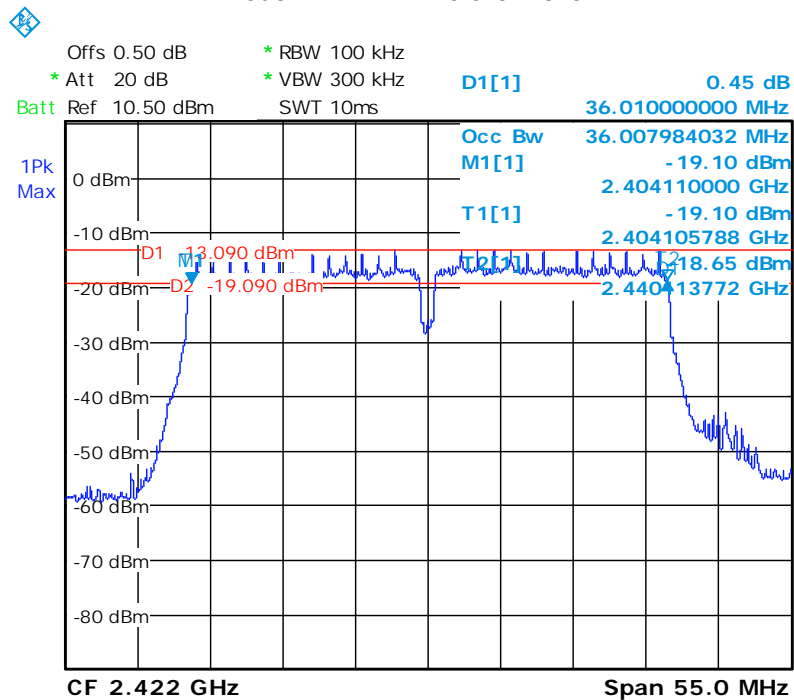


Mode: TX 11n HT40 channel 6

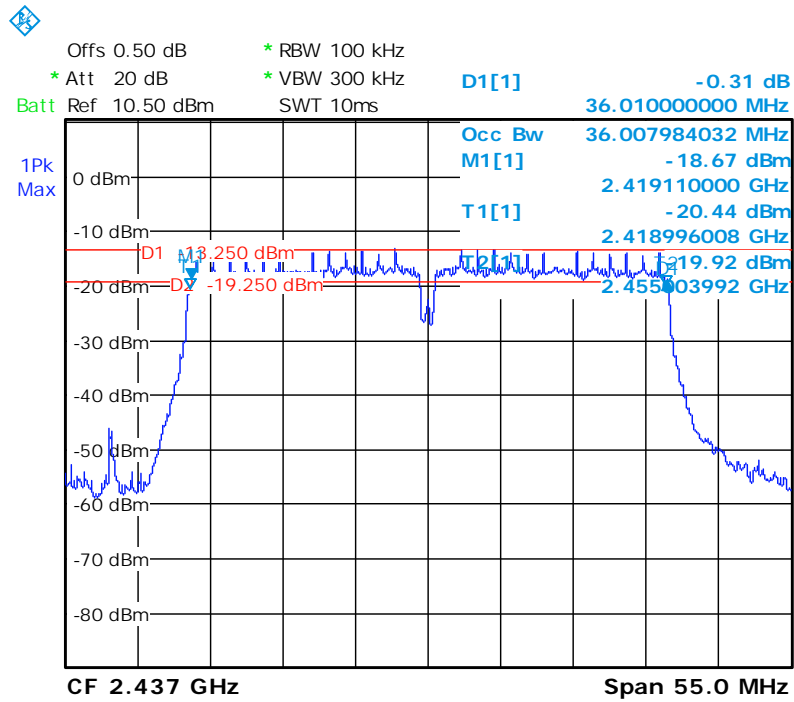


Mode: TX 11n HT40 channel 9

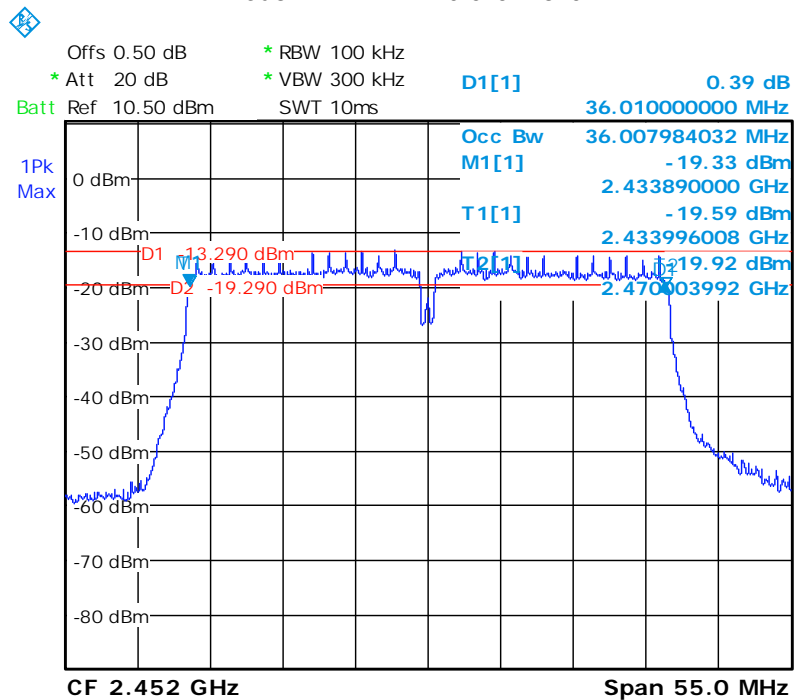


BLE: channel 0

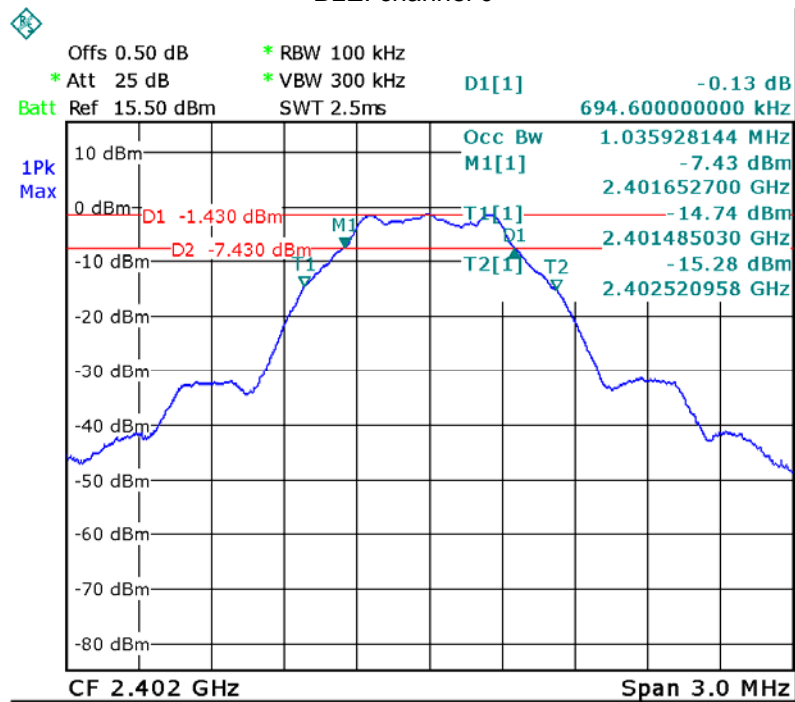

BLE: channel 19

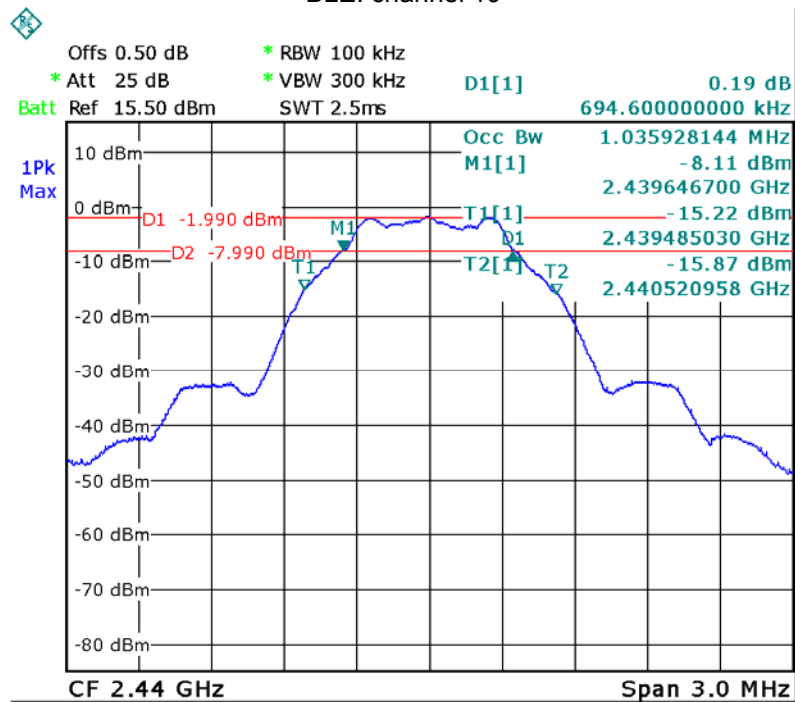

BLE: channel 39

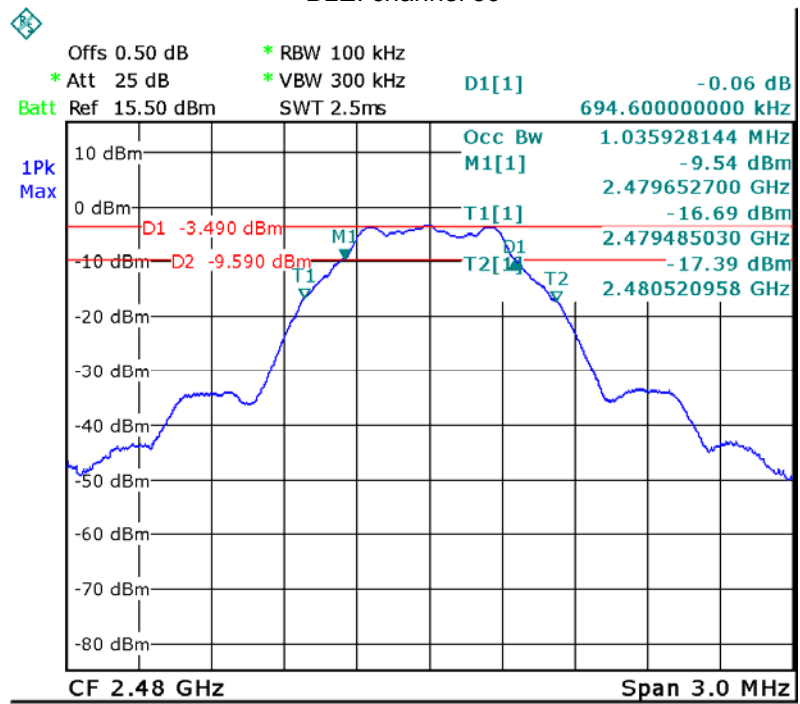

## 13 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

### 13.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the  $RBW \geq$  DTS bandwidth.
- b) Set  $VBW \geq 3 \times RBW$ .
- c) Set  $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the  $RBW = 1$  MHz.
- b) Set the  $VBW \geq 3 \times RBW$
- c) Set the  $span \geq 1.5 \times$  DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

**13.2 Test Result:**

<b>Operation mode</b>	<b>Channel Frequency (MHz)</b>	<b>Maximum Peak Output Power (dBm)</b>	<b>Limit</b>
TX 11b	Low-2412	9.06	1W/30dBm
	Middle-2437	9.44	1W/30dBm
	High-2462	9.43	1W/30dBm
TX 11g	Low-2412	9.28	1W/30dBm
	Middle-2437	9.22	1W/30dBm
	High-2462	9.16	1W/30dBm
TX 11n HT20	Low-2412	9.37	1W/30dBm
	Middle-2437	9.22	1W/30dBm
	High-2462	9.06	1W/30dBm
TX 11n HT40	Low-2422	9.43	1W/30dBm
	Middle-2437	9.13	1W/30dBm
	High-2452	9.15	1W/30dBm
BLE	Low-2402	-0.70	1W/30dBm
	Middle-2440	-1.14	1W/30dBm
	High-2480	-2.62	1W/30dBm




### Test Plot

Mode: TX 11b channel 1



Offs 0.50 dB      \* RBW 1 MHz  
 \* Att 20 dB      \* VBW 3 MHz  
 Batt Ref 10.50 dBm      SWT 2.5ms

1Pk  
Max

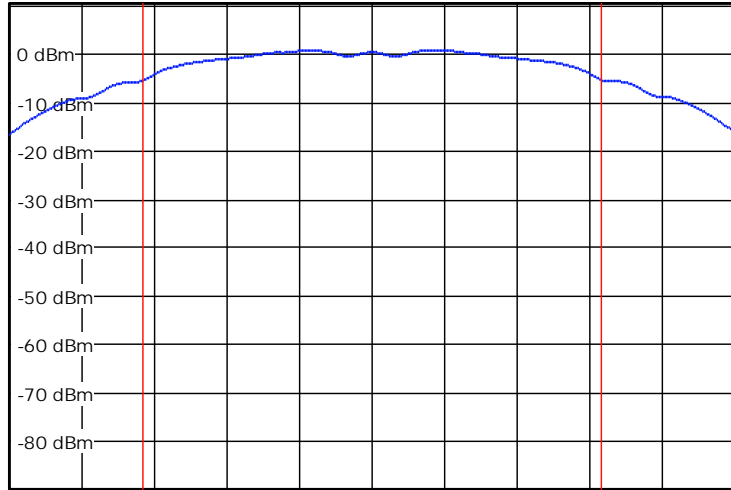


<b>CF 2.412 GHz</b>		<b>Span 16.0 MHz</b>	
<b>Tx Channel</b>	<b>Standard: NONE</b>		
<b>Bandwidth</b>	<b>10.092 MHz</b>	<b>Power</b>	<b>9.06 dBm</b>

Mode: TX 11b channel 6



Offs 0.50 dB      \* RBW 1 MHz  
 \* Att 20 dB      \* VBW 3 MHz  
 Batt Ref 10.50 dBm      SWT 2.5ms

1Pk  
Max

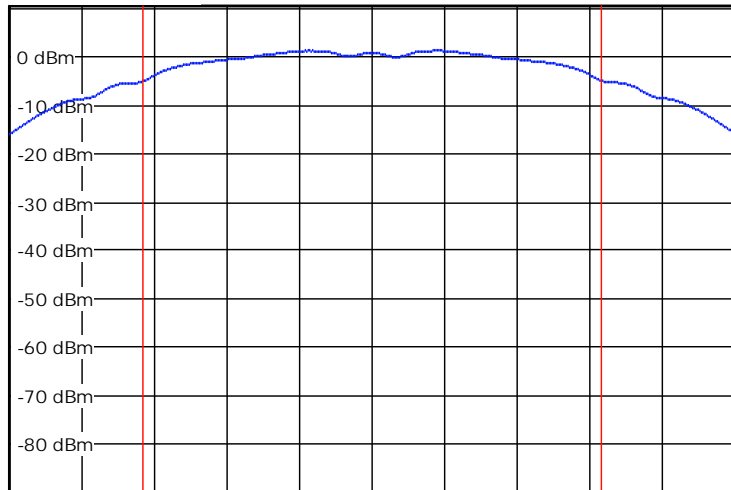


<b>CF 2.437 GHz</b>		<b>Span 16.0 MHz</b>	
<b>Tx Channel</b>	<b>Standard: NONE</b>		
<b>Bandwidth</b>	<b>10.092 MHz</b>	<b>Power</b>	<b>9.44 dBm</b>

Mode: TX 11b channel 11



Offs 0.50 dB \* RBW 1 MHz  
 \* Att 20 dB \* VBW 3 MHz  
 Batt Ref 10.50 dBm SWT 2.5ms

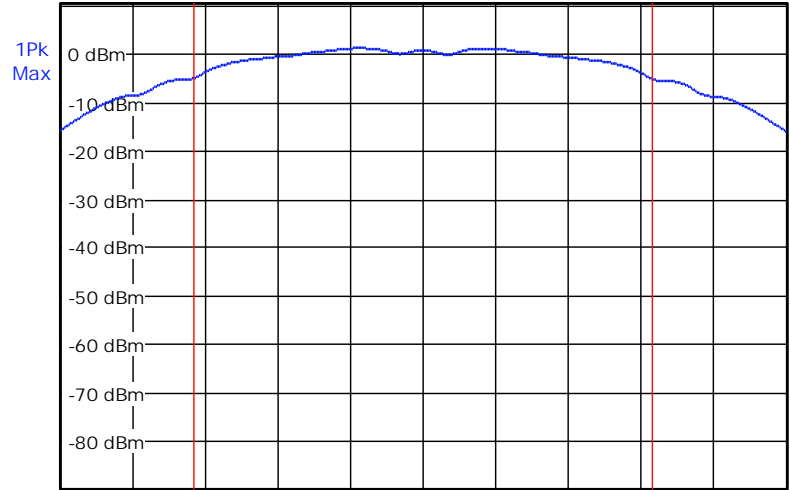


CF 2.462 GHz		Span 16.0 MHz	
Tx Channel		Standard: NONE	
Bandwidth	10.092 MHz	Power	9.43 dBm

Mode :TX 11g channel 1



Offs 0.50 dB \* RBW 1 MHz  
 \* Att 20 dB \* VBW 3 MHz  
 Batt Ref 10.50 dBm SWT 2.5ms

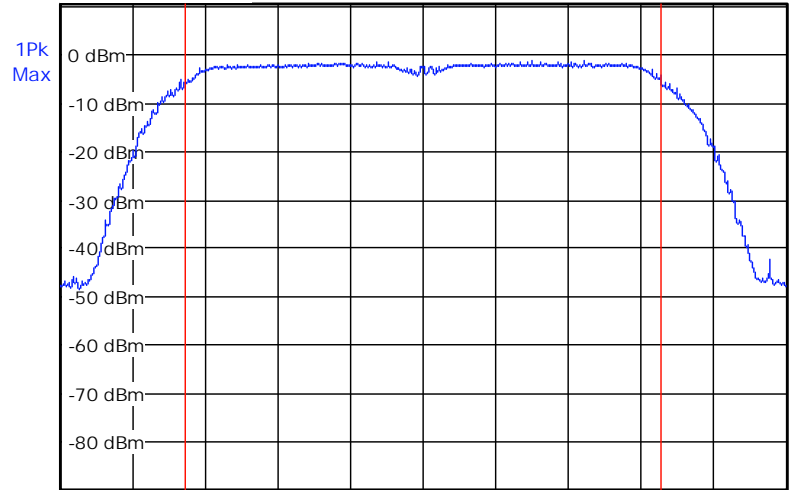


CF 2.412 GHz		Span 25.0 MHz	
Tx Channel		Standard: NONE	
Bandwidth	16.417 MHz	Power	9.28 dBm

Mode :TX 11g channel 6



Offs 0.50 dB      \* RBW 1 MHz  
 \* Att 20 dB      \* VBW 3 MHz  
 Batt Ref 10.50 dBm      SWT 2.5ms

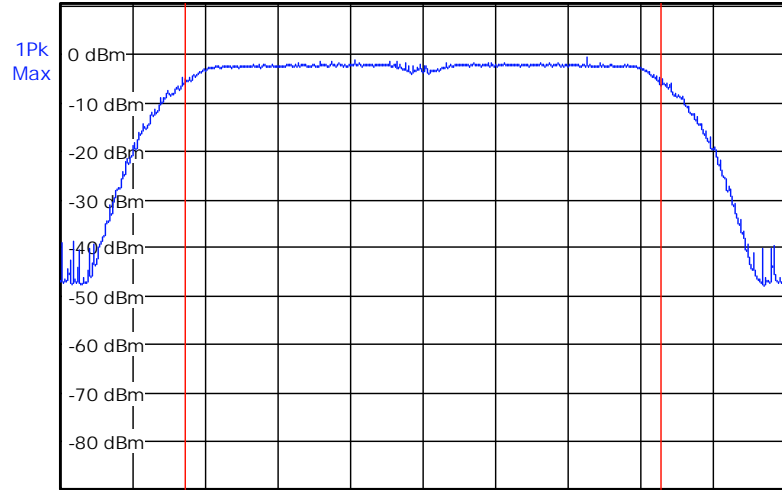


CF 2.437 GHz		Span 25.0 MHz	
Tx Channel		Standard: NONE	
Bandwidth	16.417 MHz	Power	9.22 dBm

Mode :TX 11g channel 11



Offs 0.50 dB      \* RBW 1 MHz  
 \* Att 20 dB      \* VBW 3 MHz  
 Batt Ref 10.50 dBm      SWT 2.5ms

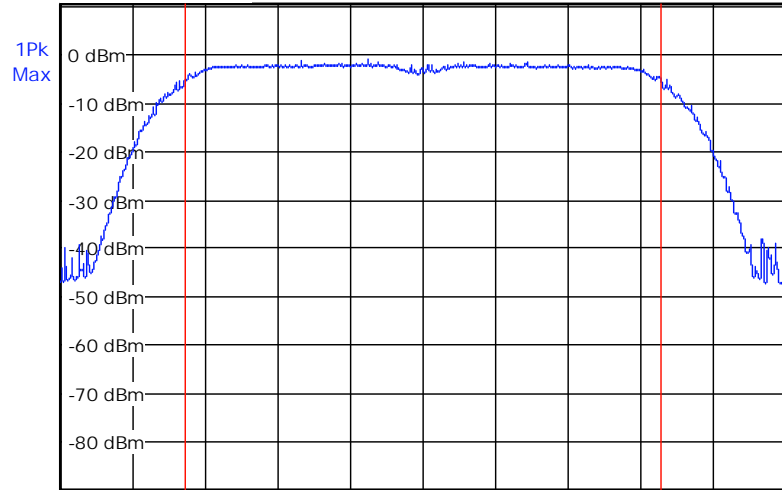


CF 2.462 GHz		Span 25.0 MHz	
Tx Channel		Standard: NONE	
Bandwidth	16.417 MHz	Power	9.16 dBm

Mode: TX 11n HT20 channel 1



Offs 0.50 dB      \* RBW 1 MHz  
 \* Att 20 dB      \* VBW 3 MHz  
 Batt Ref 10.50 dBm      SWT 2.5ms

1Pk  
Max

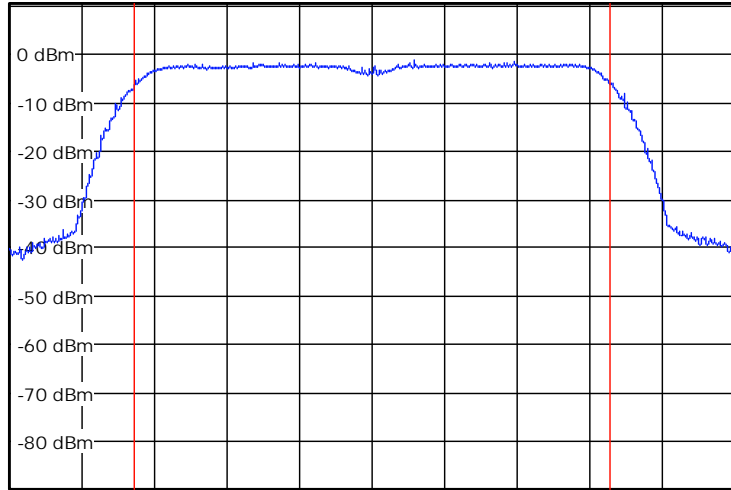


<b>CF 2.412 GHz</b>		<b>Span 27.0 MHz</b>	
<b>Tx Channel</b>	<b>Standard: NONE</b>		
<b>Bandwidth</b>	<b>17.677 MHz</b>	<b>Power</b>	<b>9.37 dBm</b>

Mode: TX 11n HT20 channel 6



Offs 0.50 dB      \* RBW 1 MHz  
 \* Att 20 dB      \* VBW 3 MHz  
 Batt Ref 10.50 dBm      SWT 2.5ms

1Pk  
Max

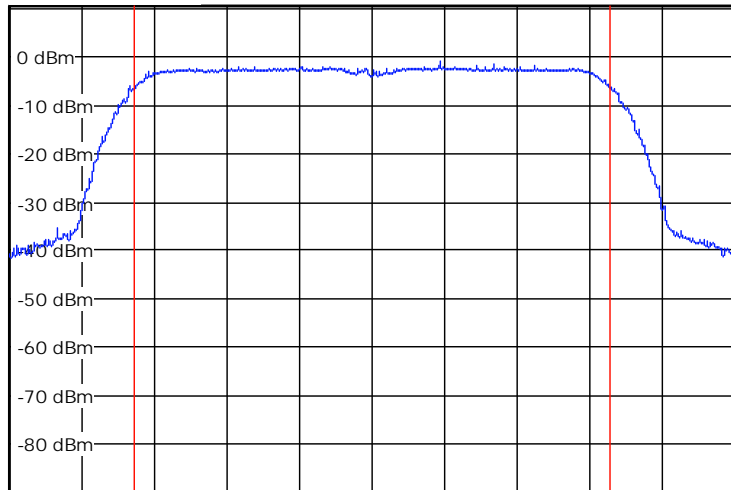


<b>CF 2.437 GHz</b>		<b>Span 27.0 MHz</b>	
<b>Tx Channel</b>	<b>Standard: NONE</b>		
<b>Bandwidth</b>	<b>17.677 MHz</b>	<b>Power</b>	<b>9.22 dBm</b>

Mode: TX 11n HT20 channel 11



Offs 0.50 dB      \* RBW 1 MHz  
 \* Att 20 dB      \* VBW 3 MHz  
 Batt Ref 10.50 dBm      SWT 2.5ms

1Pk  
Max

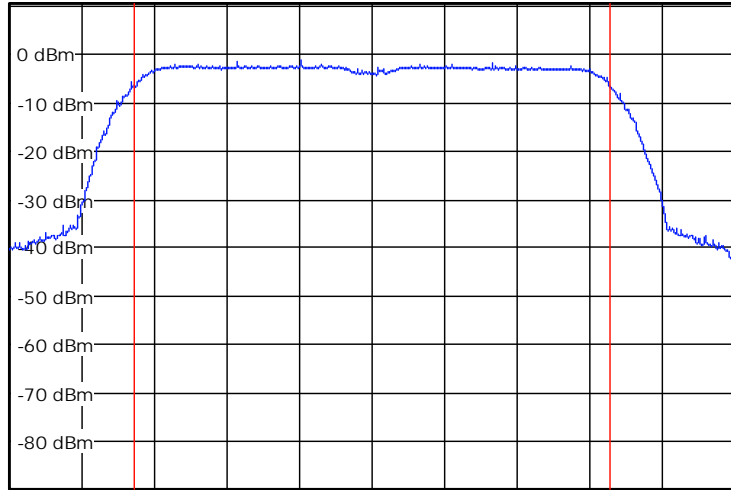


CF 2.462 GHz		Span 27.0 MHz	
Tx Channel		Standard: NONE	
Bandwidth	17.677 MHz	Power	9.06 dBm

Mode: TX 11n HT40 channel 1



Offs 0.50 dB      \* RBW 1 MHz  
 \* Att 20 dB      \* VBW 3 MHz  
 Batt Ref 10.50 dBm      SWT 2.5ms

1Pk  
Max

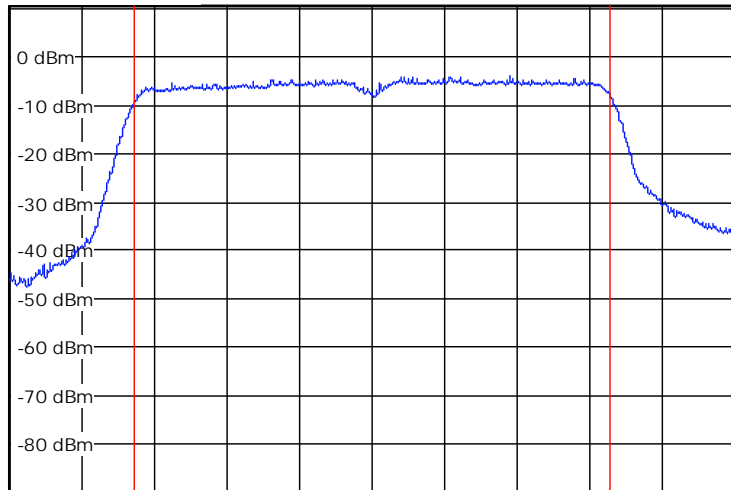


CF 2.422 GHz		Span 55.0 MHz	
Tx Channel		Standard: NONE	
Bandwidth	36.010 MHz	Power	9.43 dBm

Mode: TX 11n HT40 channel 6



Offs 0.50 dB      \* RBW 1 MHz  
 \* Att 20 dB      \* VBW 3 MHz  
 Batt Ref 10.50 dBm      SWT 2.5ms

1Pk  
Max

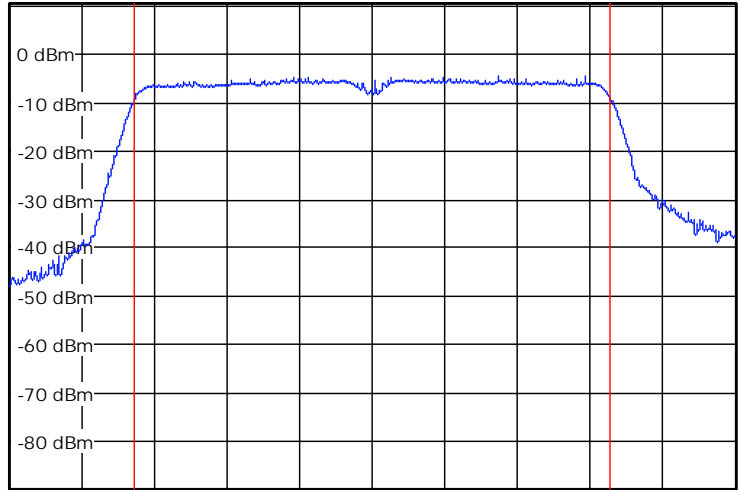


CF 2.437 GHz		Span 55.0 MHz	
Tx Channel		Standard: NONE	
Bandwidth	36.010 MHz	Power	9.13 dBm

Mode: TX 11n HT40 channel 11




Offs 0.50 dB      \* RBW 1 MHz  
 \* Att 20 dB      \* VBW 3 MHz  
 Batt Ref 10.50 dBm      SWT 2.5ms

1Pk  
Max

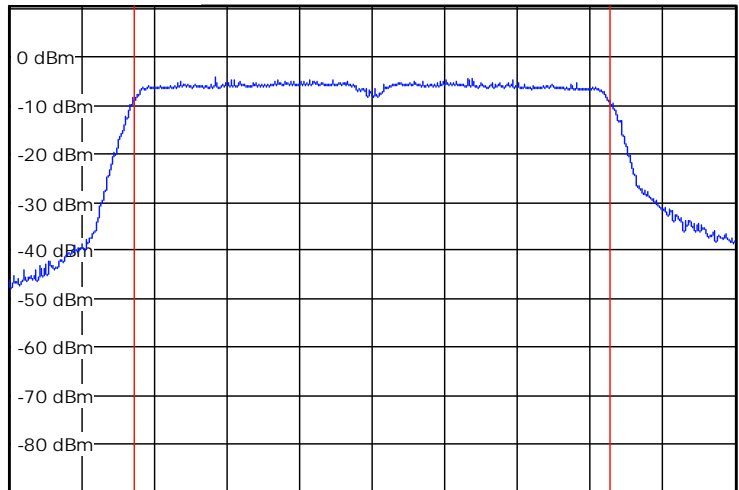


CF 2.452 GHz		Span 55.0 MHz	
Tx Channel		Standard: NONE	
Bandwidth	36.010 MHz	Power	9.15 dBm


BLE: channel 0

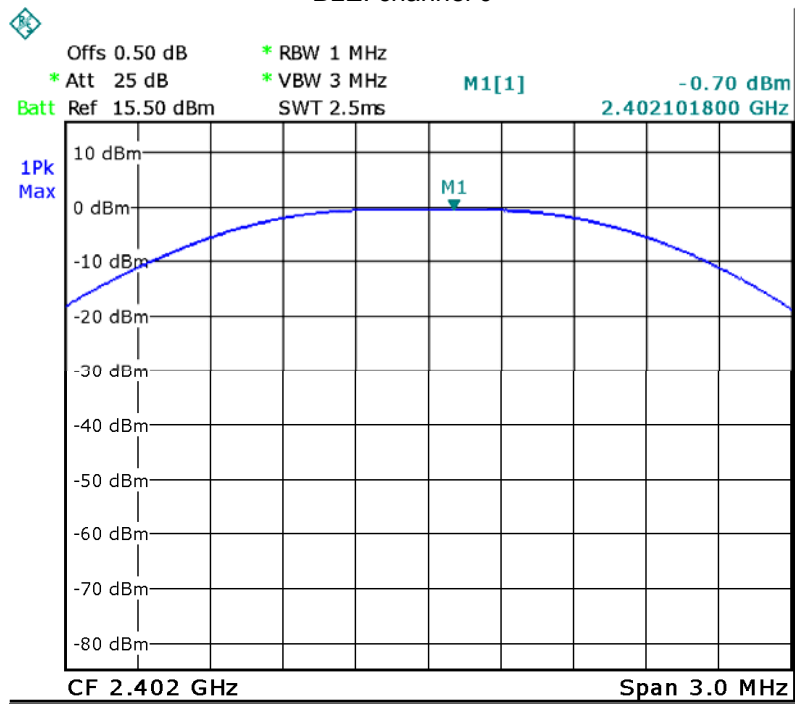

BLE: channel 19

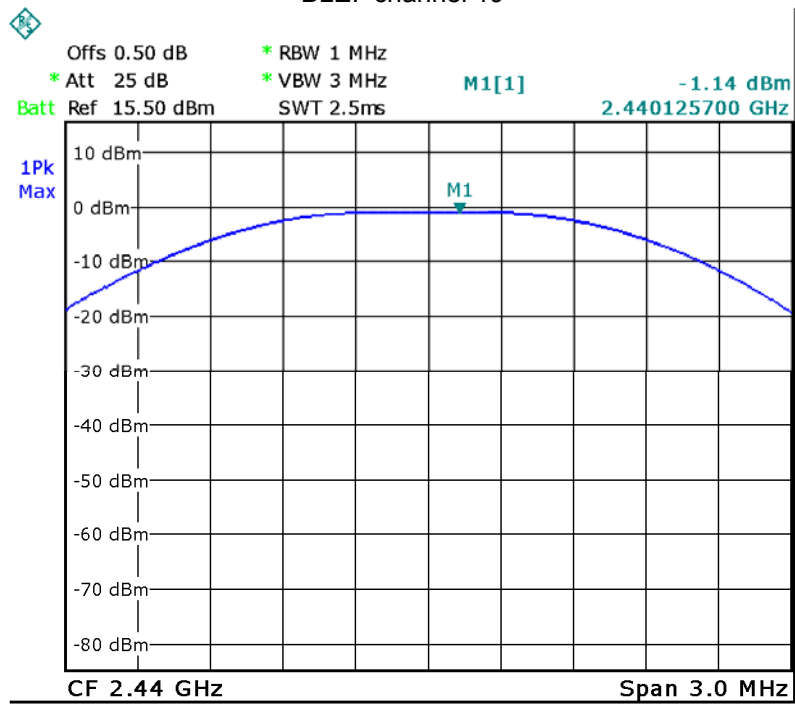

BLE: channel 39

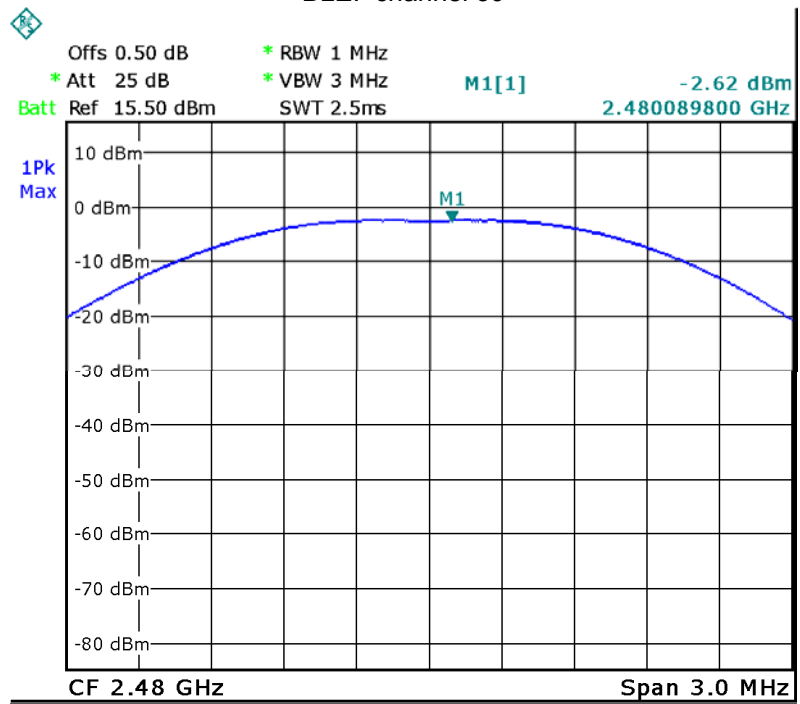



## 14 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

### 14.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016 section 10.2


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 14.2 Test Result:


Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-15.28	8dBm per 3kHz
	Middle-2437	-16.00	8dBm per 3kHz
	High-2462	-14.21	8dBm per 3kHz
TX 11g	Low-2412	-23.49	8dBm per 3kHz
	Middle-2437	-24.82	8dBm per 3kHz
	High-2462	-24.72	8dBm per 3kHz
TX 11n HT20	Low-2412	-24.02	8dBm per 3kHz
	Middle-2437	-25.15	8dBm per 3kHz
	High-2462	-25.03	8dBm per 3kHz
TX 11n HT40	Low-2422	-26.57	8dBm per 3kHz
	Middle-2437	-27.18	8dBm per 3kHz
	High-2452	-27.22	8dBm per 3kHz
BLE	Low-2402	-16.49	8dBm per 3kHz
	Middle-2440	-16.85	8dBm per 3kHz
	High-2480	-18.26	8dBm per 3kHz

### Test Plot


Mode: TX 11b channel 1

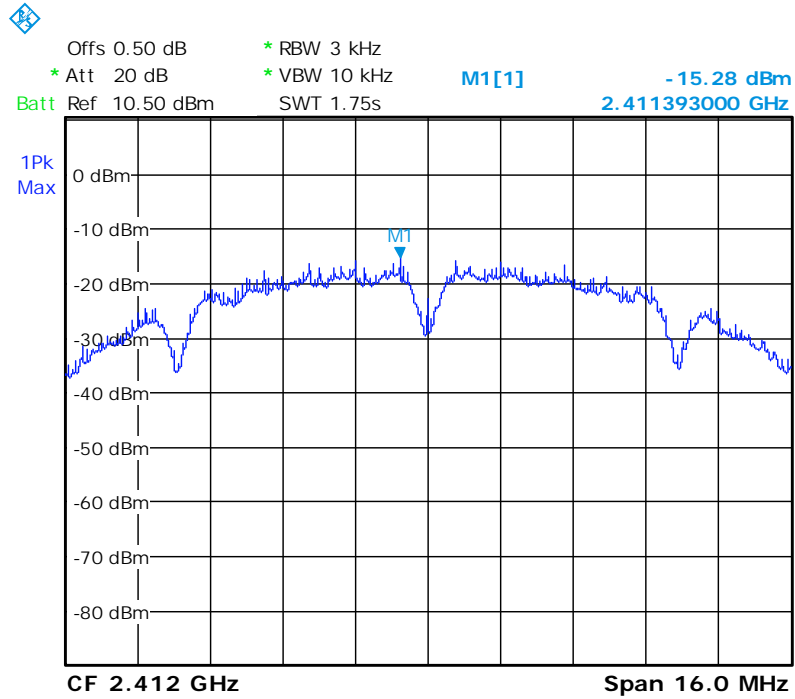


### Mode: TX 11b channel 6

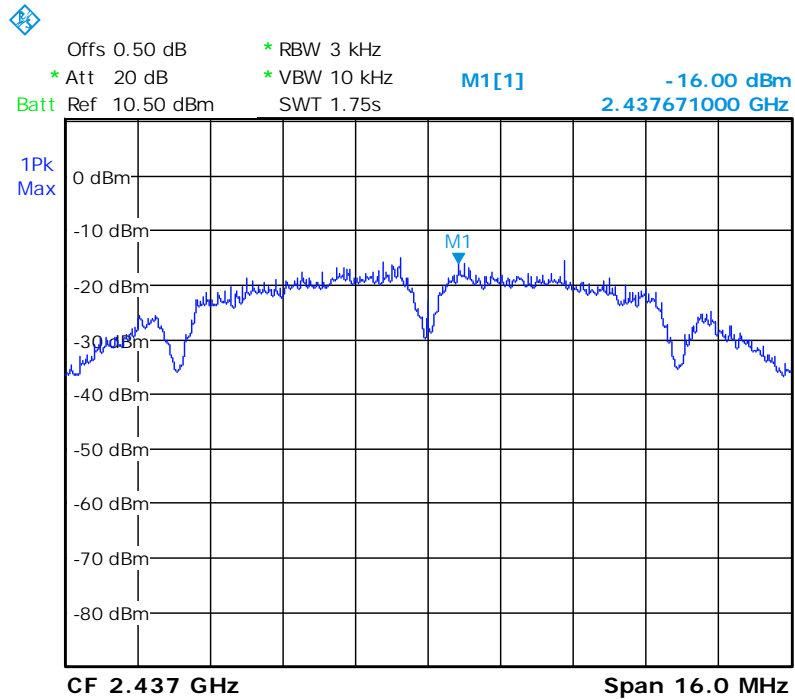


Mode: TX 11b channel 11

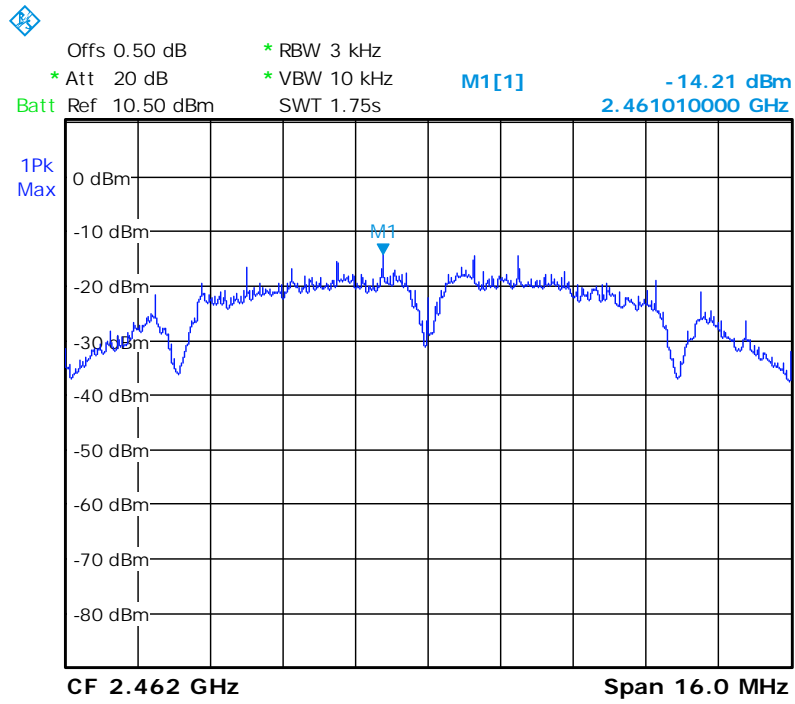


Mode :TX 11g channel 1

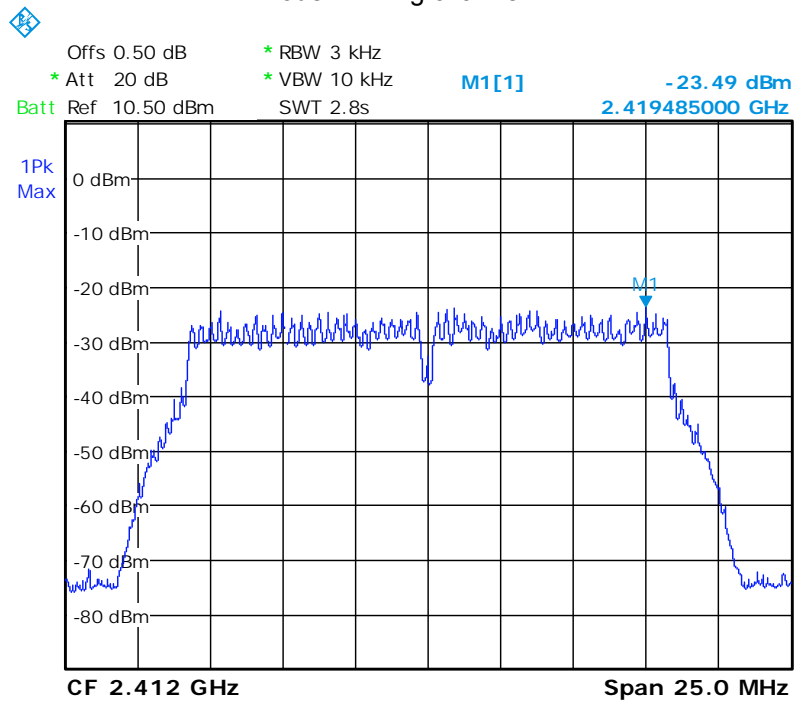


Mode :TX 11g channel 6

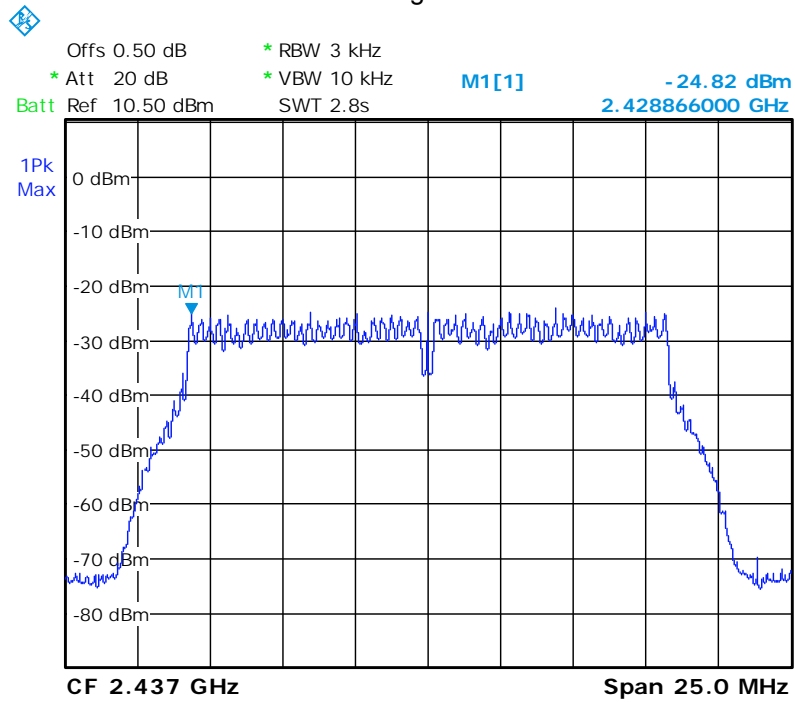


Mode :TX 11g channel 11

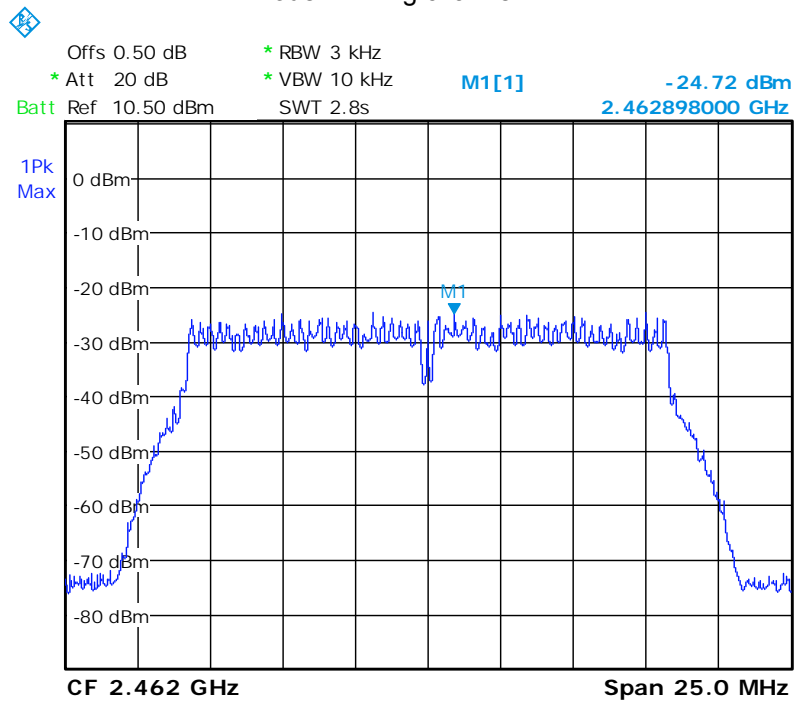


Mode: TX 11n HT20 channel 1

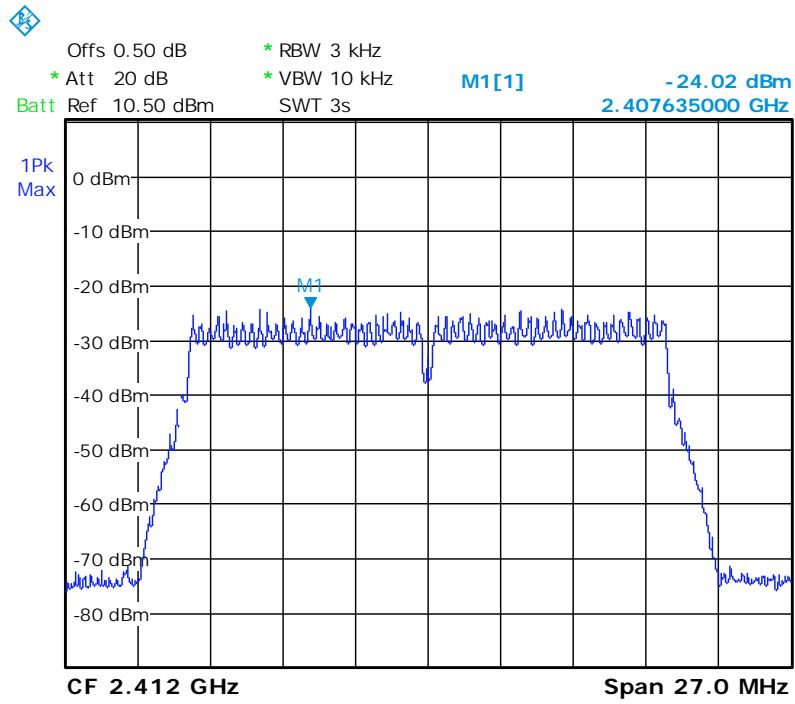


Mode: TX 11n HT20 channel 6

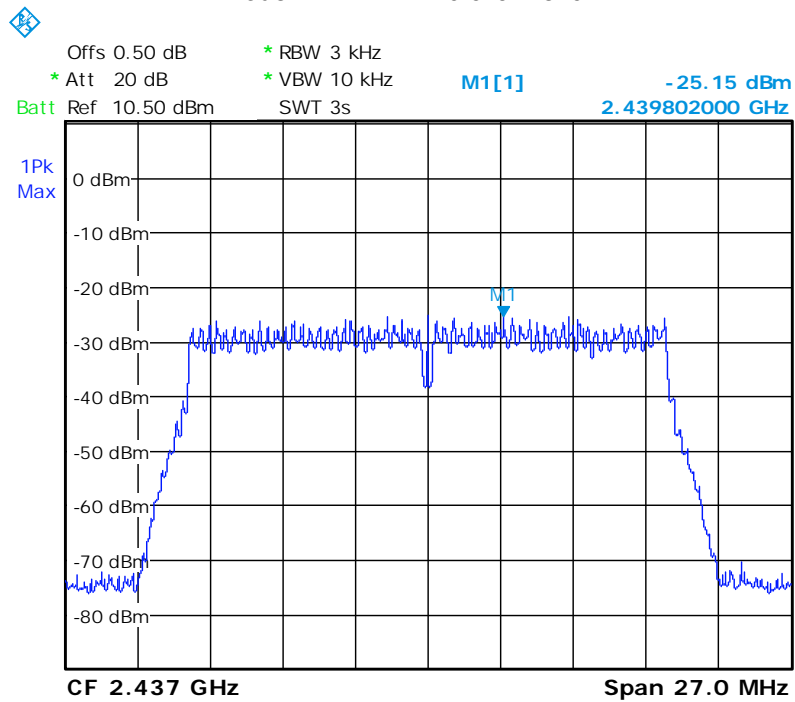


Mode: TX 11n HT20 channel 11

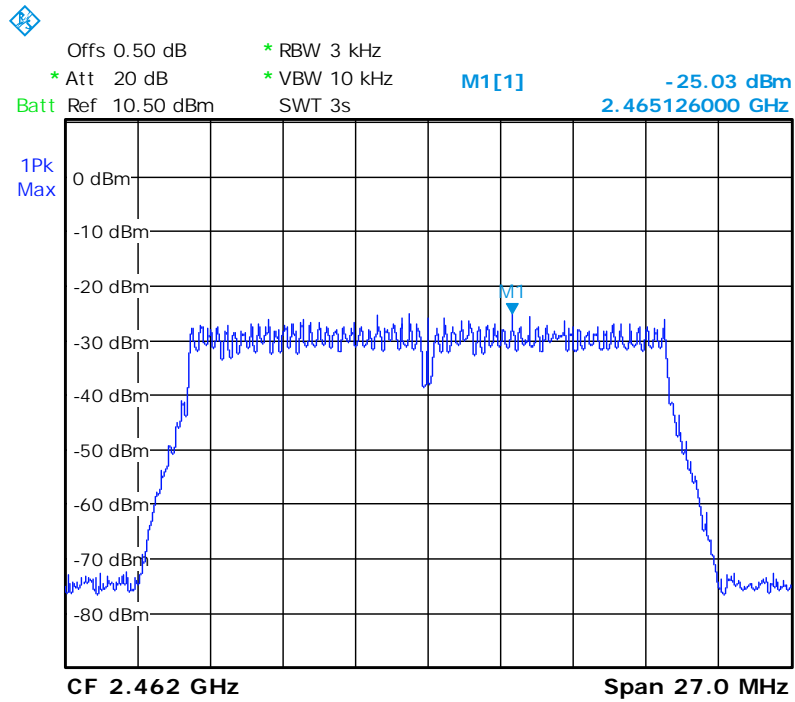


Mode: TX 11n HT40 channel 3

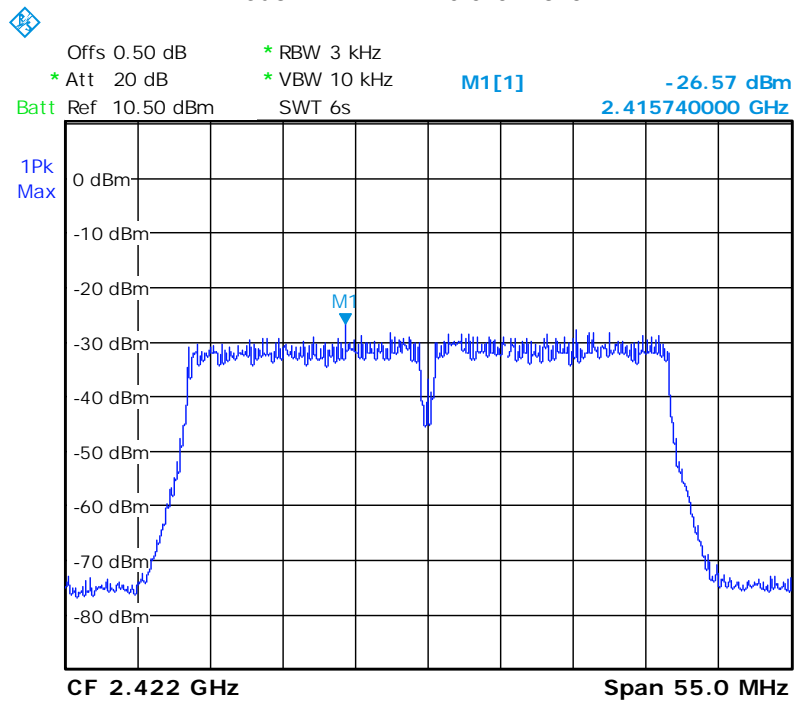


Mode: TX 11n HT40 channel 6

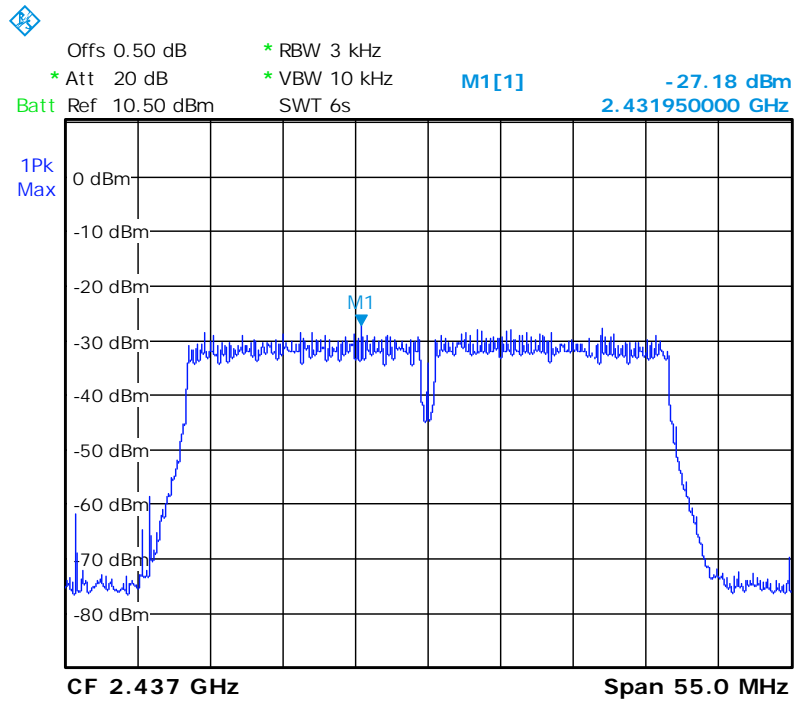


Mode: TX 11n HT40 channel 9

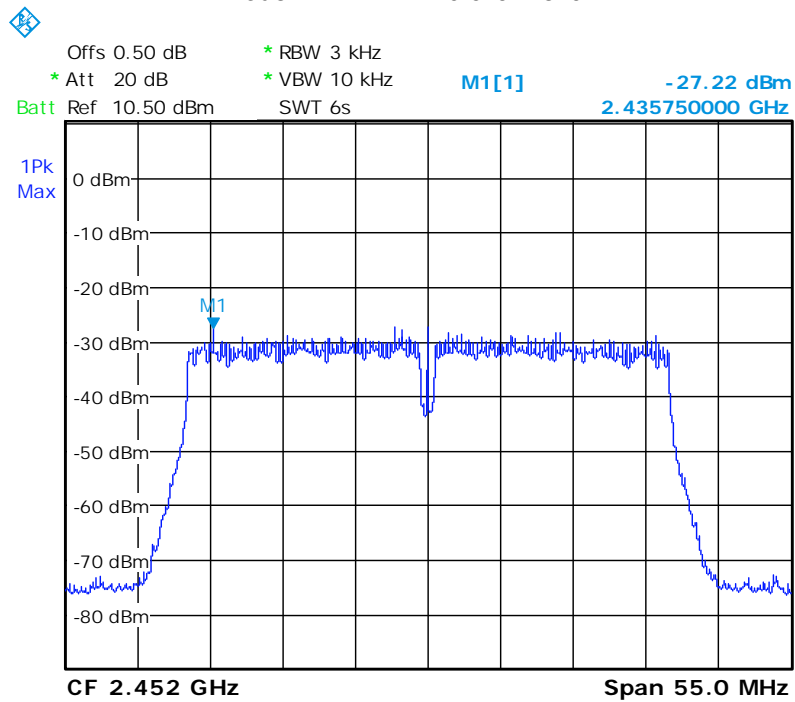


BLE: channel 0

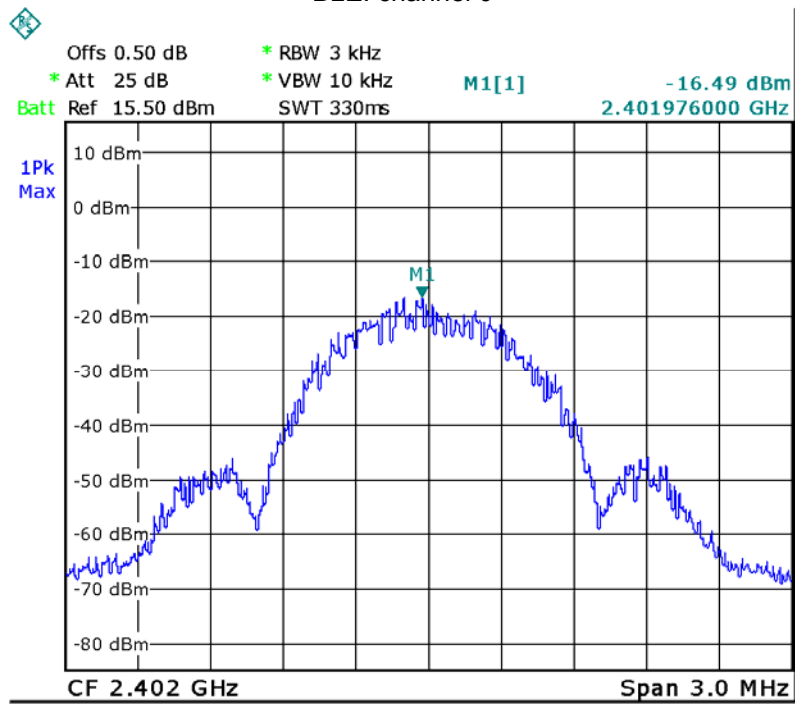

BLE: channel 19

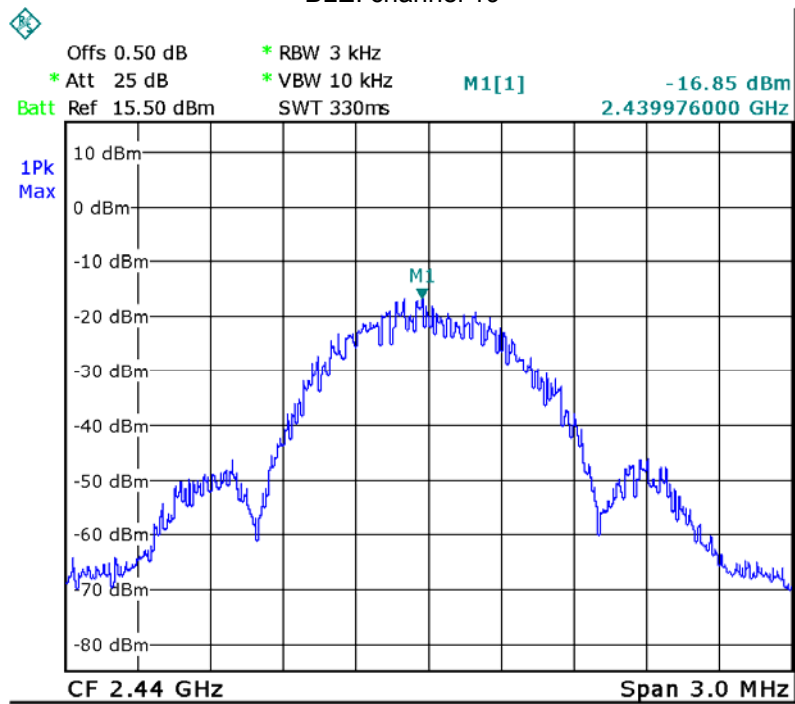



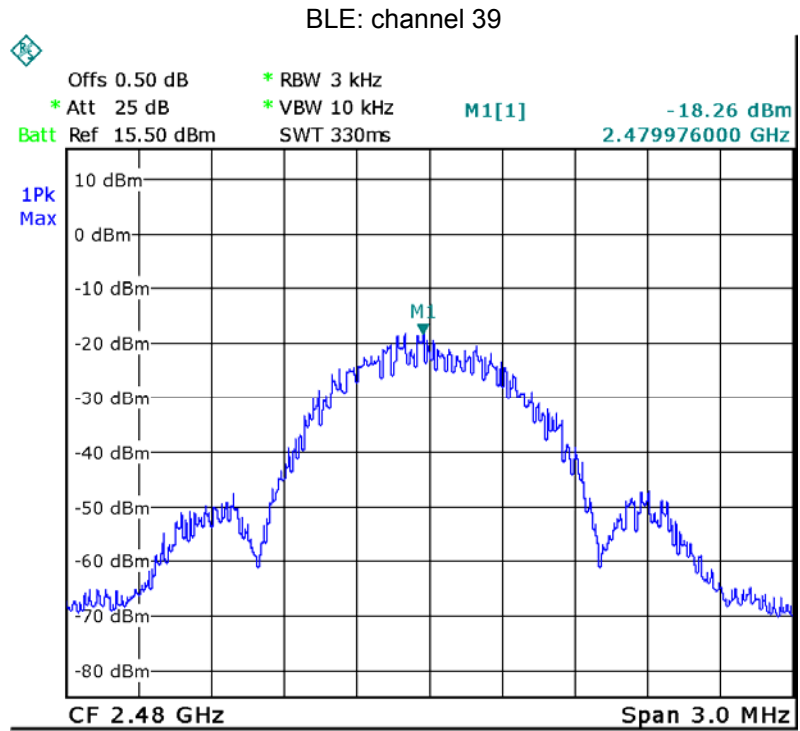

## **15 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

## **16 RF Exposure**

Remark: refer to SAR test report: WTS16S0961011E.

## **17 Photographs of test setup and EUT.**

Note: Please refer to appendix: WTS16S0961012E\_Photo.

=====**End of Report**=====