


Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

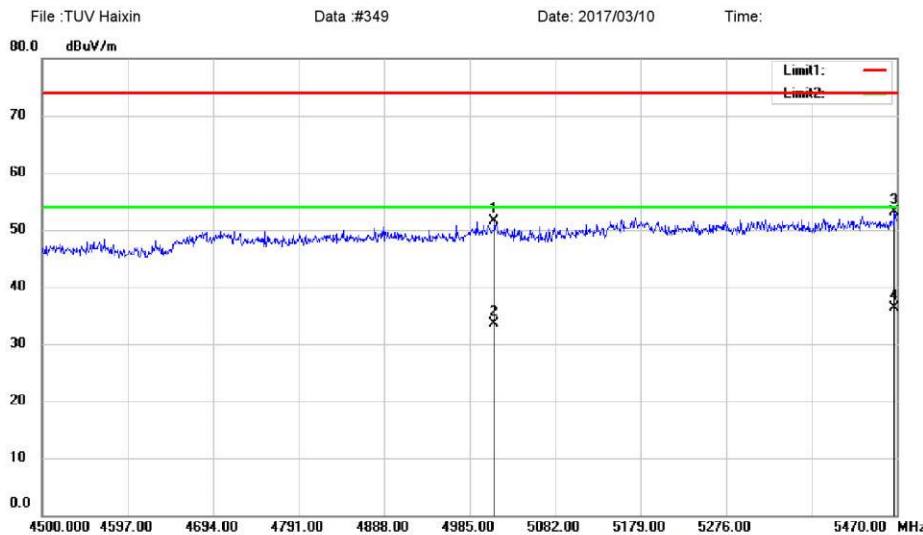

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5500(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5013.130	50.88	0.56	51.44	74.00	-22.56	peak		
2		5013.130	32.94	0.56	33.50	54.00	-20.50	AVG		
3		5467.090	51.59	1.43	53.02	74.00	-20.98	peak		
4	*	5467.090	34.97	1.43	36.40	54.00	-17.60	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

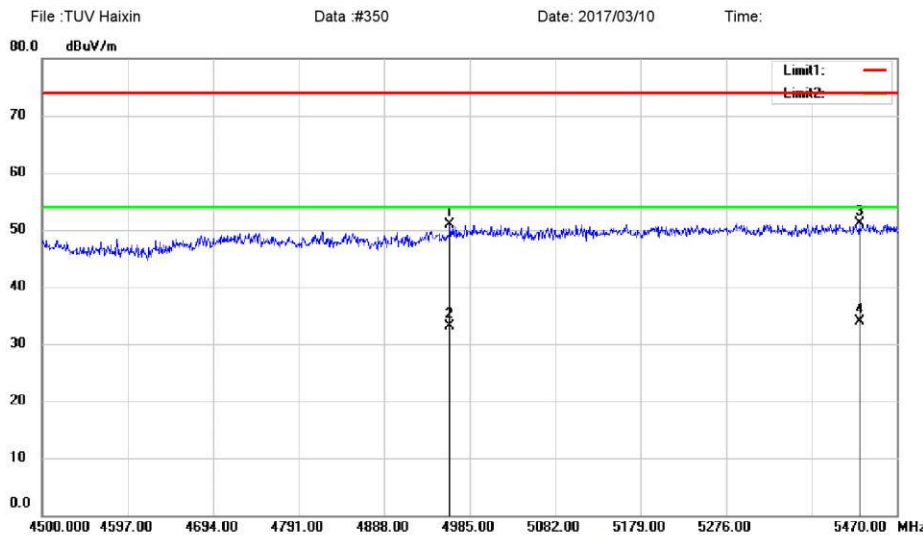

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5500(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		4962.690	50.41	0.43	50.84	74.00	-23.16	peak		
2		4962.690	32.67	0.43	33.10	54.00	-20.90	AVG		
3		5427.320	49.82	1.35	51.17	74.00	-22.83	peak		
4	*	5427.320	32.55	1.35	33.90	54.00	-20.10	AVG		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

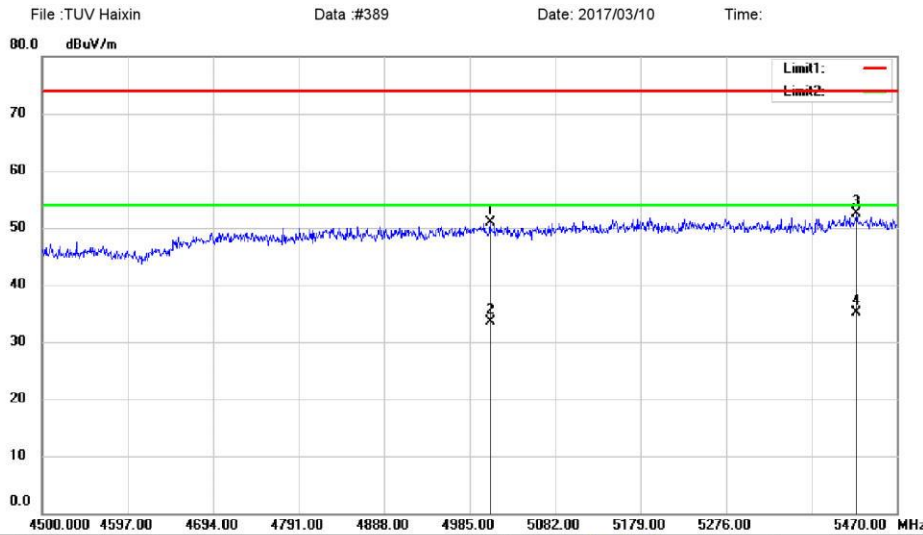

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac40 5510(ANT0+ANT1)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		5008.280	50.43	0.55	50.98	74.00	-23.02	peak			
2		5008.280	33.05	0.55	33.60	54.00	-20.40	AVG			
3		5424.410	51.20	1.35	52.55	74.00	-21.45	peak			
4	*	5424.410	33.75	1.35	35.10	54.00	-18.90	AVG			


*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

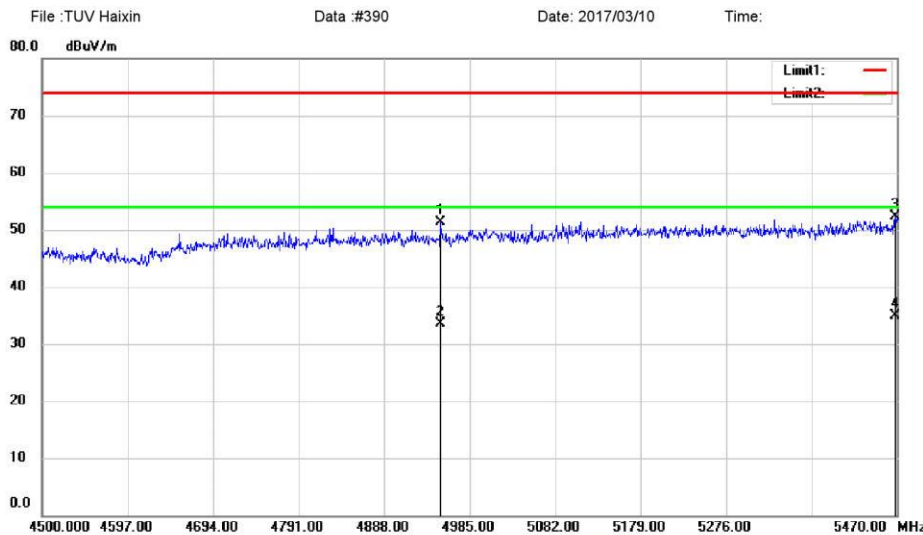

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac40 5510(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4952.020	50.84	0.40	51.24	74.00	-22.76			peak
2		4952.020	33.10	0.40	33.50	54.00	-20.50			AVG
3		5468.060	50.83	1.43	52.26	74.00	-21.74			peak
4	*	5468.060	33.47	1.43	34.90	54.00	-19.10			AVG


*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

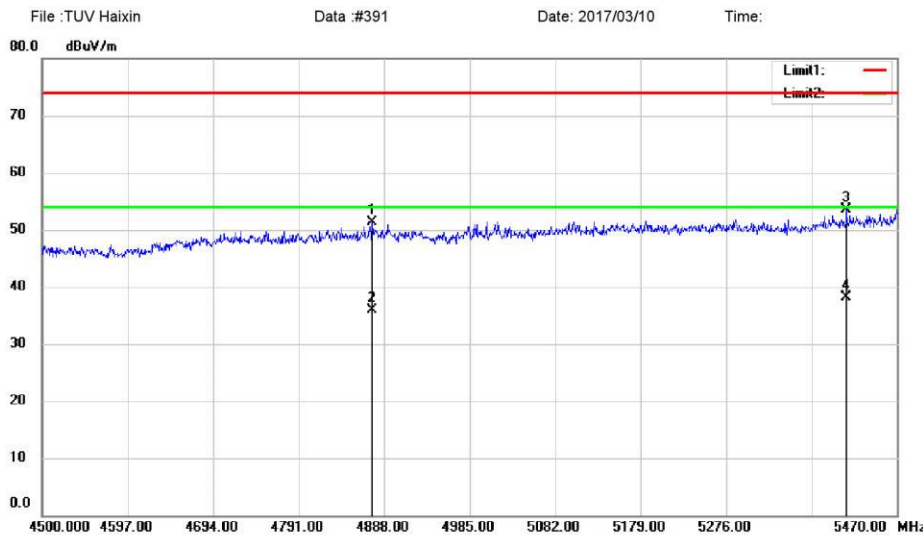

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac40 5510(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		4874.420	51.17	0.18	51.35	74.00	-22.65	peak		
2		4874.420	35.72	0.18	35.90	54.00	-18.10	AVG		
3		5412.770	52.26	1.33	53.59	74.00	-20.41	peak		
4	*	5412.770	36.87	1.33	38.20	54.00	-15.80	AVG		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

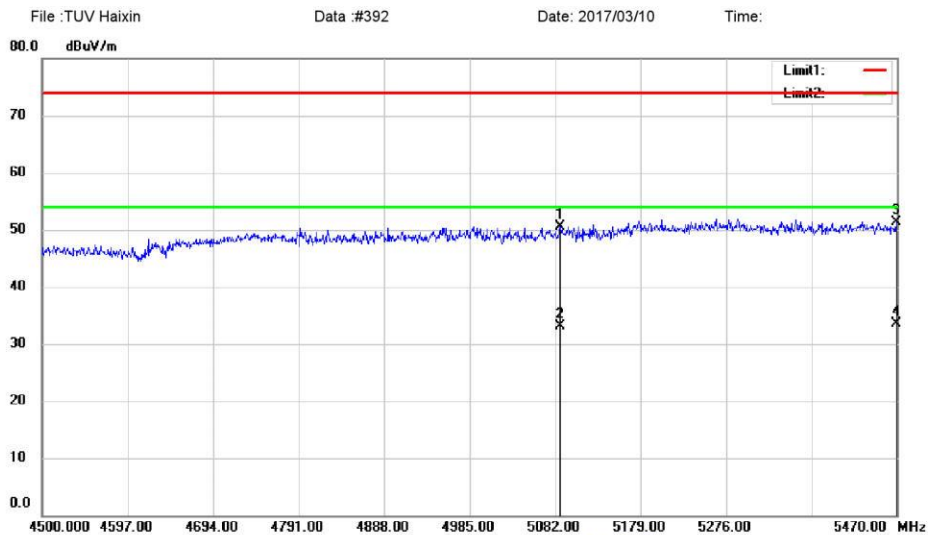

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac40 5510(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5087.820	49.88	0.71	50.59	74.00	-23.41	peak		
2		5087.820	32.39	0.71	33.10	54.00	-20.90	AVG		
3		5469.030	49.94	1.43	51.37	74.00	-22.63	peak		
4	*	5469.030	32.17	1.43	33.60	54.00	-20.40	AVG		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

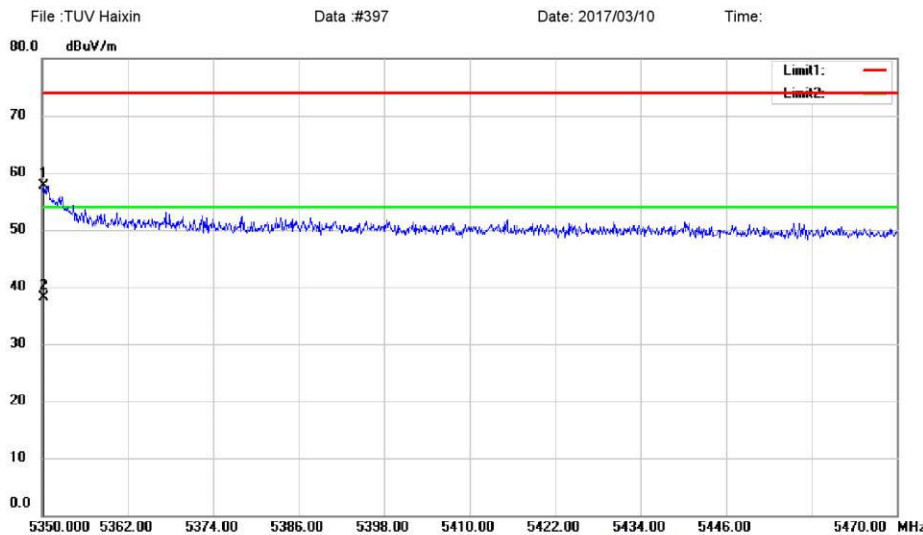

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac40 5310(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		5350.240	56.53	1.20	57.73	74.00	-16.27			peak	
2	*	5350.240	37.00	1.20	38.20	54.00	-15.80	AVG			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

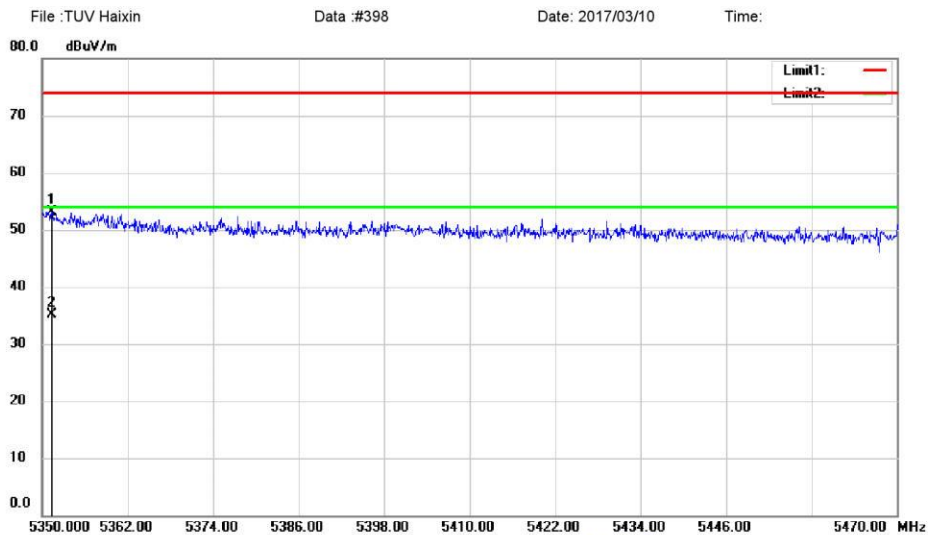

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac40 5310(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5351.320	51.97	1.20	53.17	74.00	-20.83	peak		
2	*	5351.320	33.90	1.20	35.10	54.00	-18.90	AVG		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

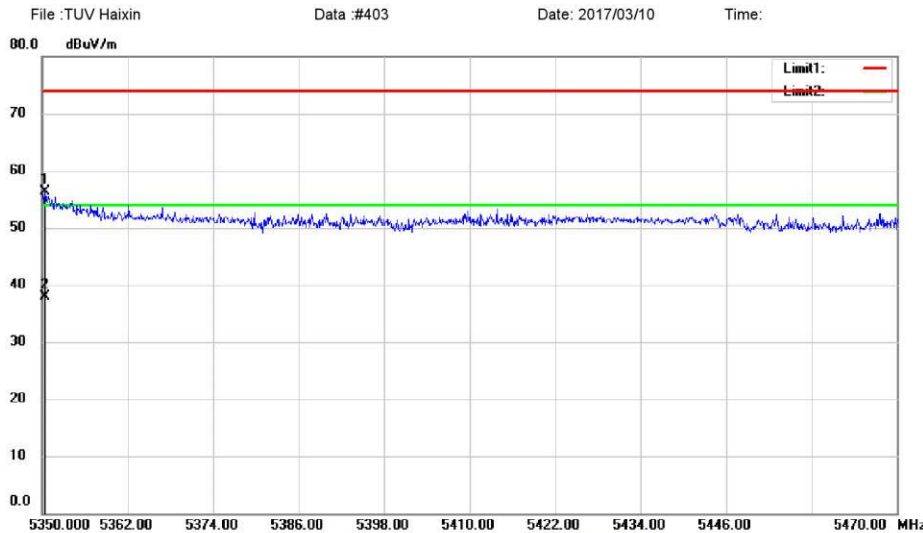

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac40 5310(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		5350.360	55.09	1.20	56.29	74.00	-17.71			peak	
2	*	5350.360	36.70	1.20	37.90	54.00	-16.10	AVG			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

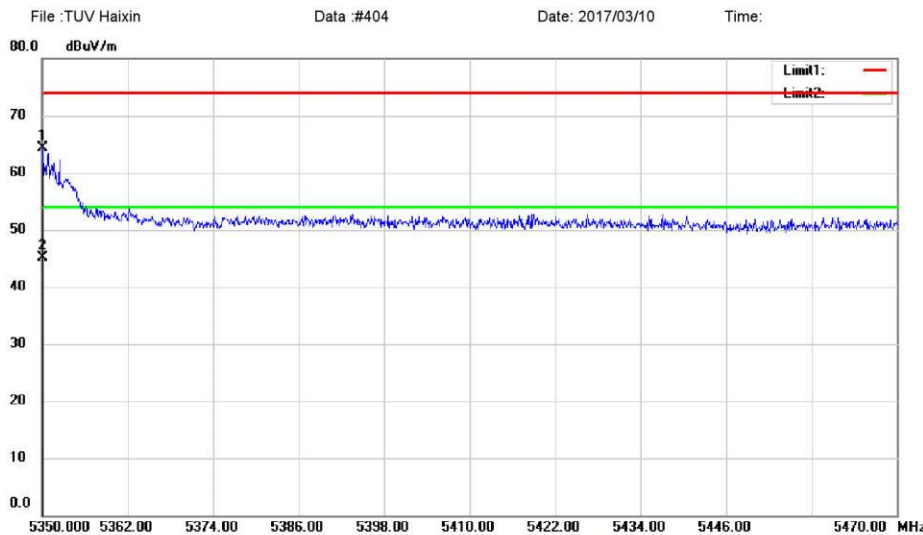

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac40 5310(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5350.120	63.06	1.20	64.26	74.00	-9.74	peak		
2	*	5350.120	43.90	1.20	45.10	54.00	-8.90	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

7. Bandedge


7.1 Bandedge (U-NII-1 Band)

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV Haixin Data: #25 Date: 2017/03/05 Time:

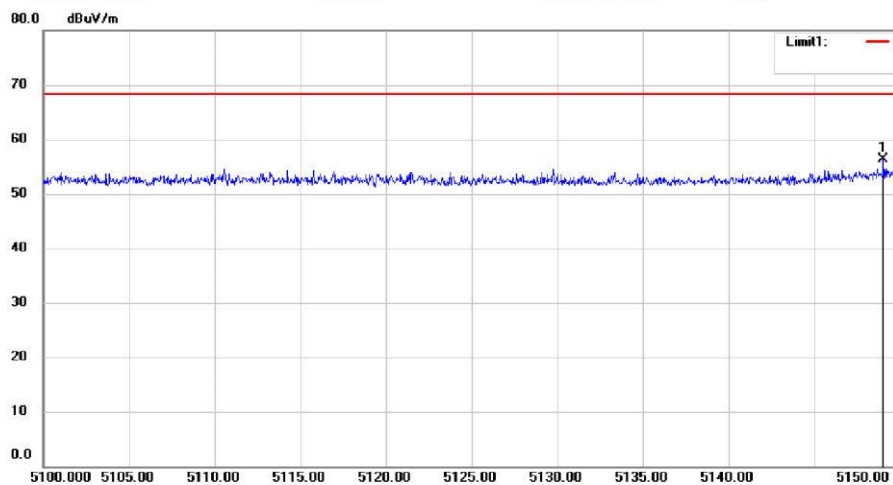

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11a 5180(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5149.050	55.57	0.81	56.38	68.23	-11.85	peak		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

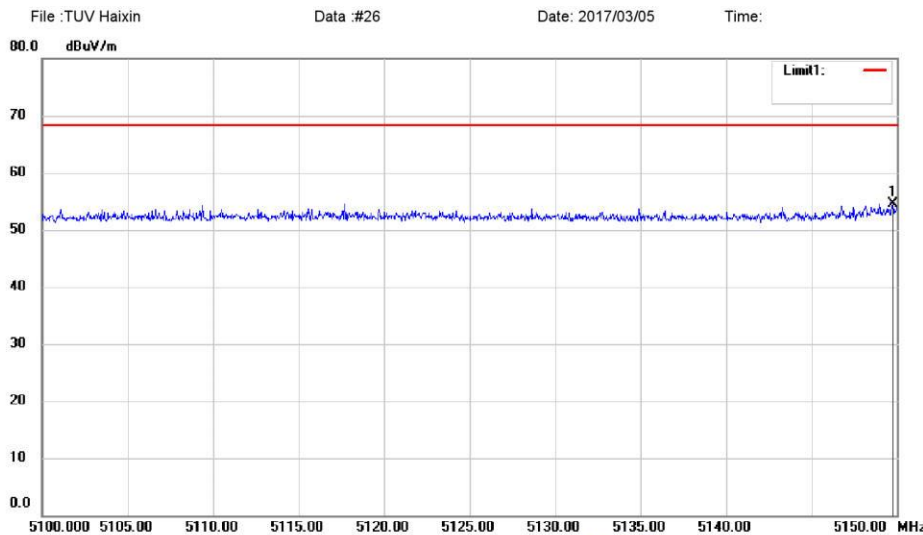

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11a 5180(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5149.750	53.75	0.82	54.57	68.23	-13.66			peak	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

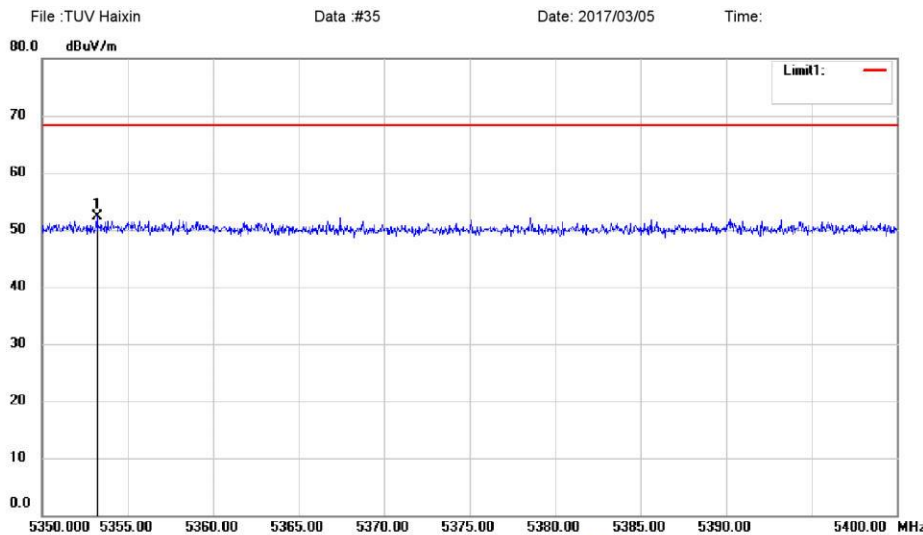

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11a 5240(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5353.200	51.13	1.20	52.33	68.23	-15.90	peak			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

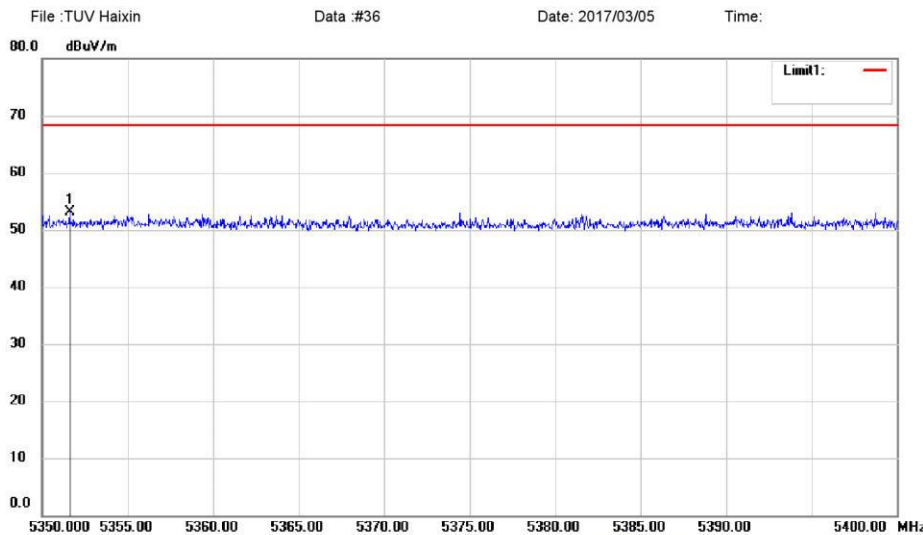

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11a 5240(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5351.600	51.88	1.20	53.08	68.23	-15.15	peak			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

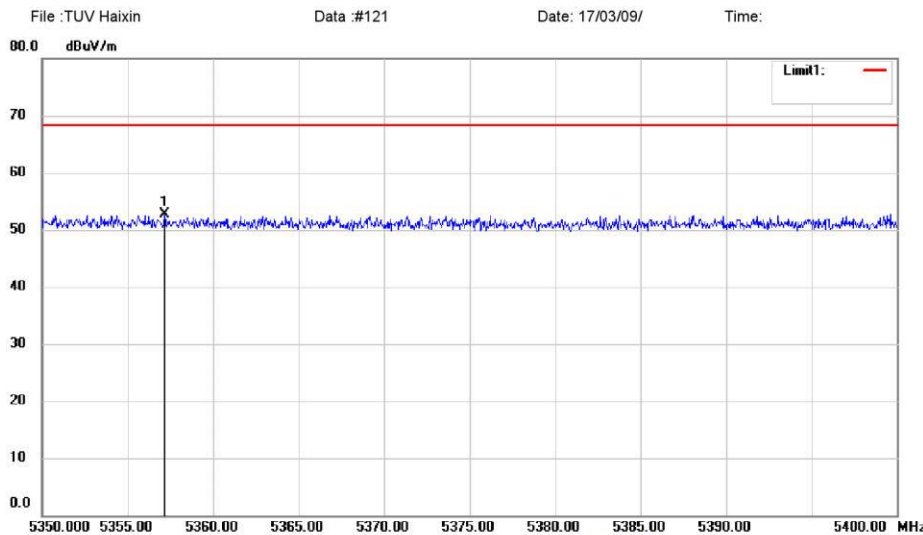

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11nH20 5240(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5357.150	51.52	1.22	52.74	68.23	-15.49	peak			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

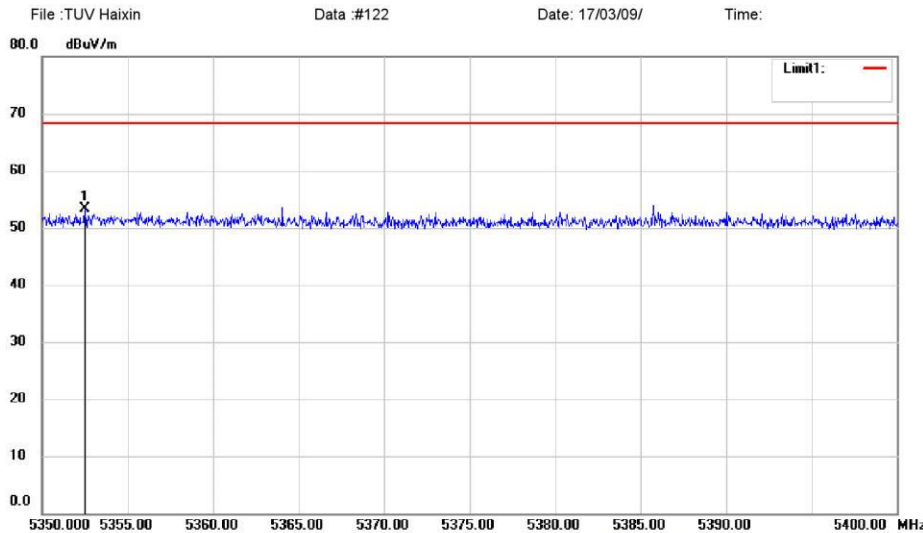

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11nH20 5240(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5352.500	52.03	1.20	53.23	68.23	-15.00	peak			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

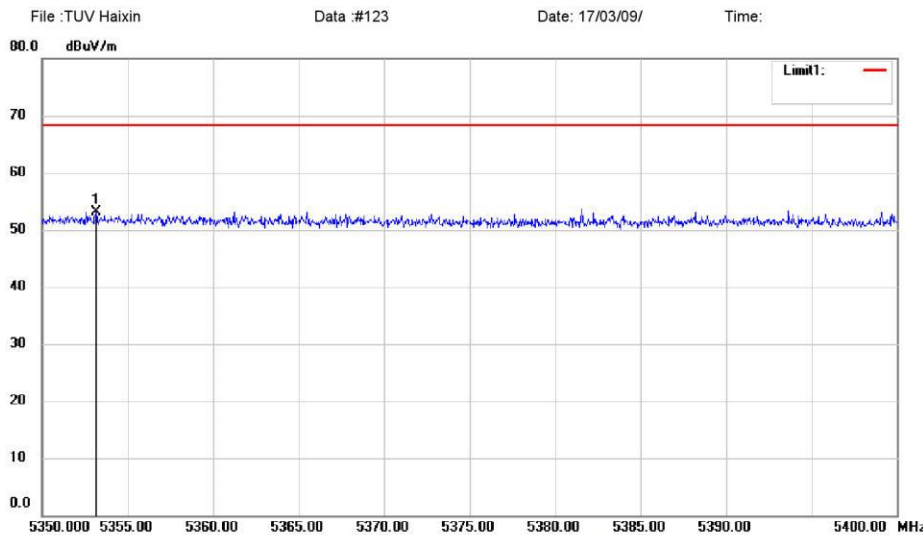

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11nH20 5240(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5353.150	51.98	1.20	53.18	68.23	-15.05	peak			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

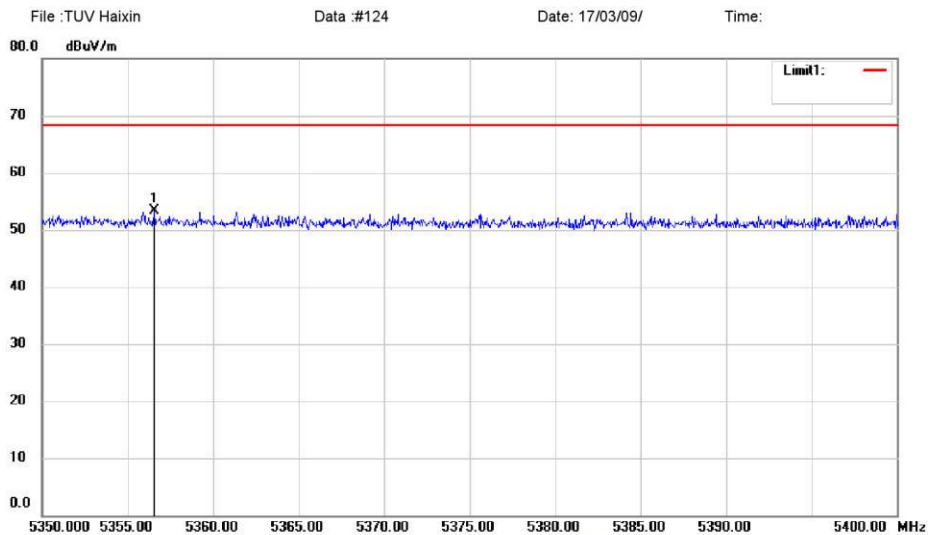

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11nH20 5240(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5356.550	52.11	1.21	53.32	68.23	-14.91			peak	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

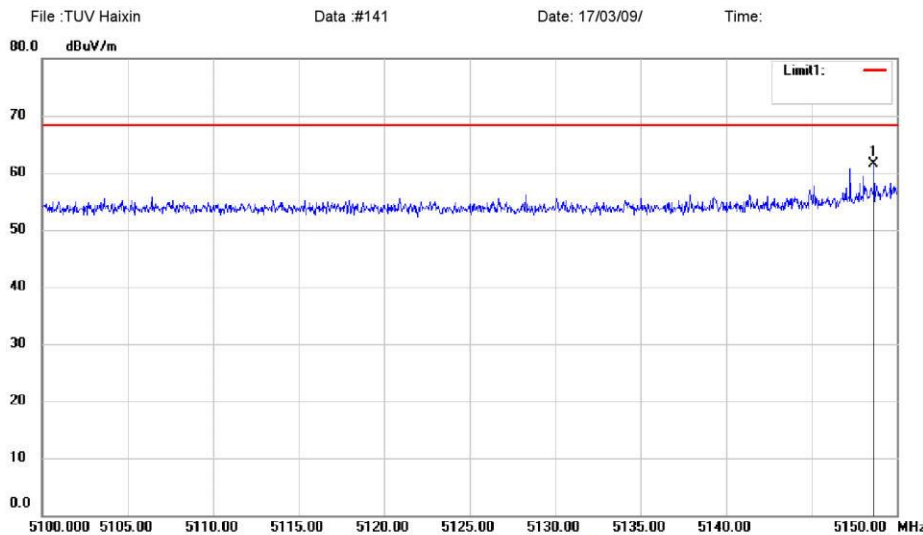

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11nH20 5180(ANT0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	5148.650	60.62	0.81	61.43	68.23	-6.80	peak		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

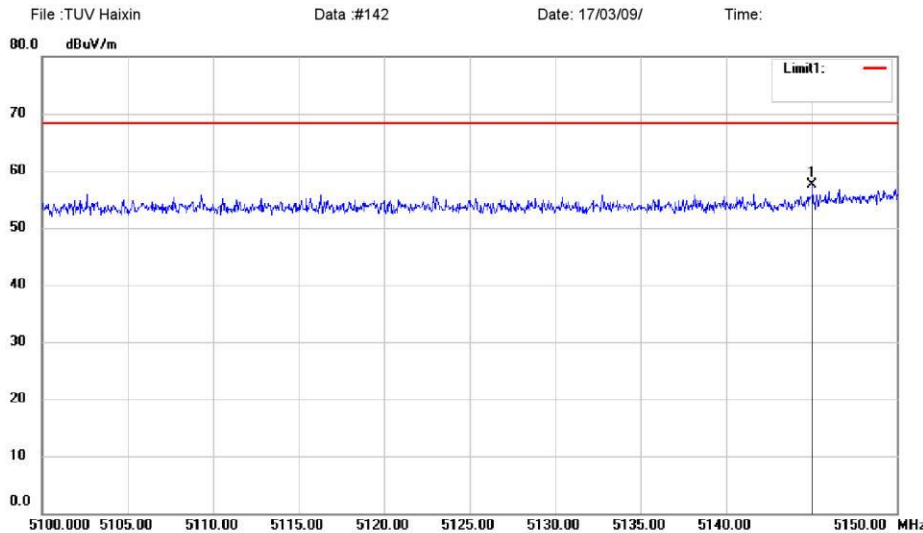

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11nH20 5180(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5145.050	56.67	0.80	57.47	68.23	-10.76			peak	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

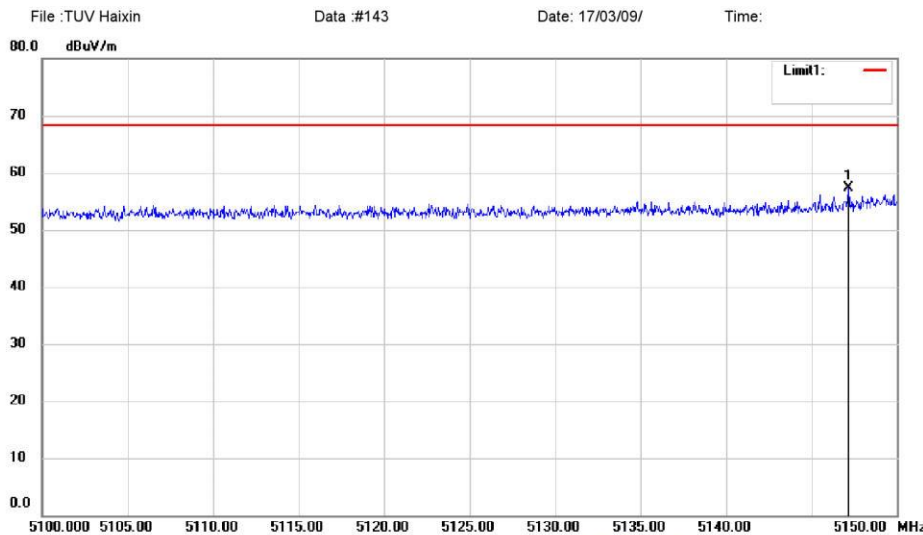

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11nH20 5180(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5147.150	56.58	0.81	57.39	68.23	-10.84			peak	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

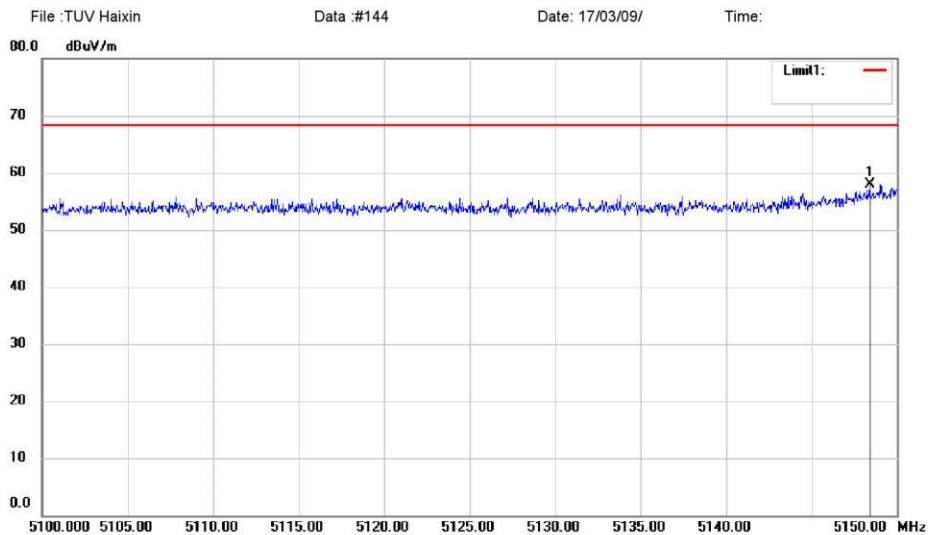

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11nH20 5180(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5148.400	57.07	0.81	57.88	68.23	-10.35	peak			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

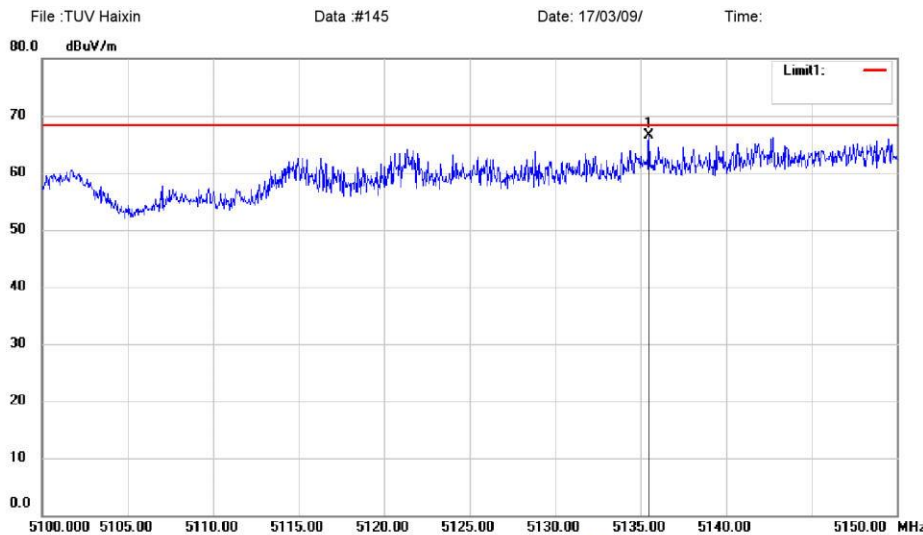

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac80 5210(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5135.500	65.73	0.78	66.51	68.23	-1.72			peak	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

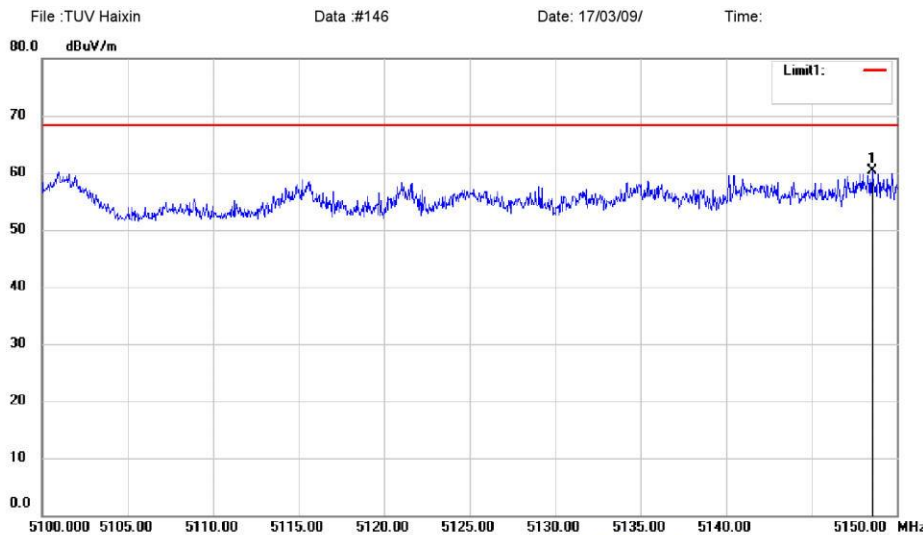

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac80 5210(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5148.550	59.50	0.81	60.31	68.23	-7.92			peak	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

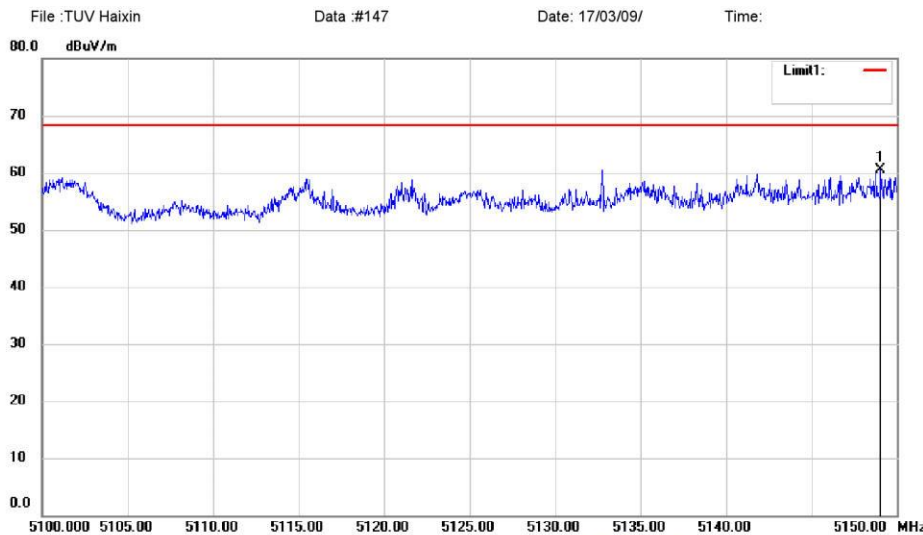

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac80 5210(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5149.050	59.61	0.81	60.42	68.23	-7.81			peak	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

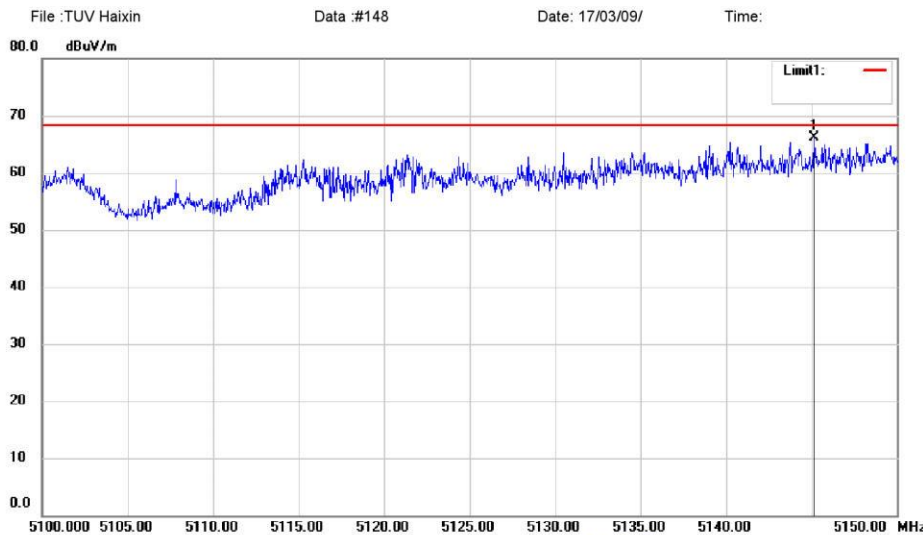

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac80 5210(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5145.150	65.36	0.80	66.16	68.23	-2.07			peak	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

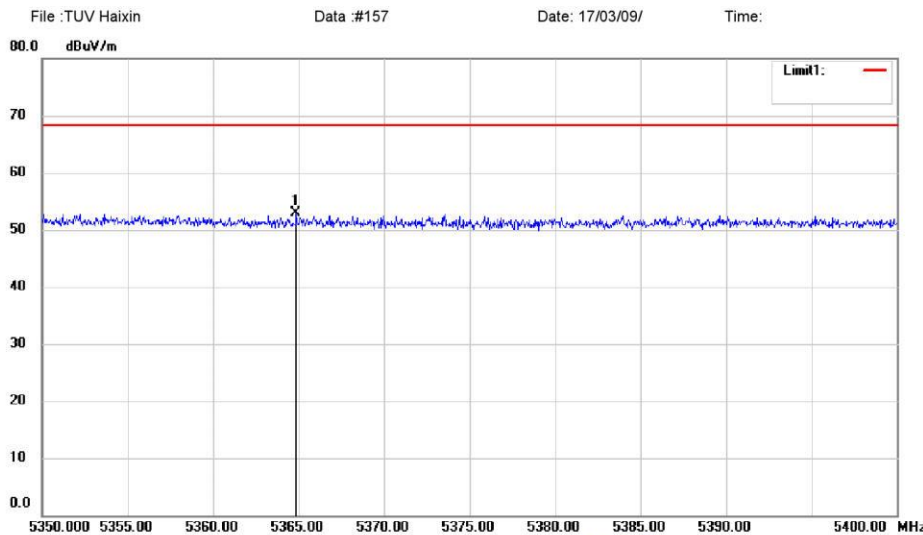

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac80 5210(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5364.850	51.75	1.23	52.98	68.23	-15.25	peak			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

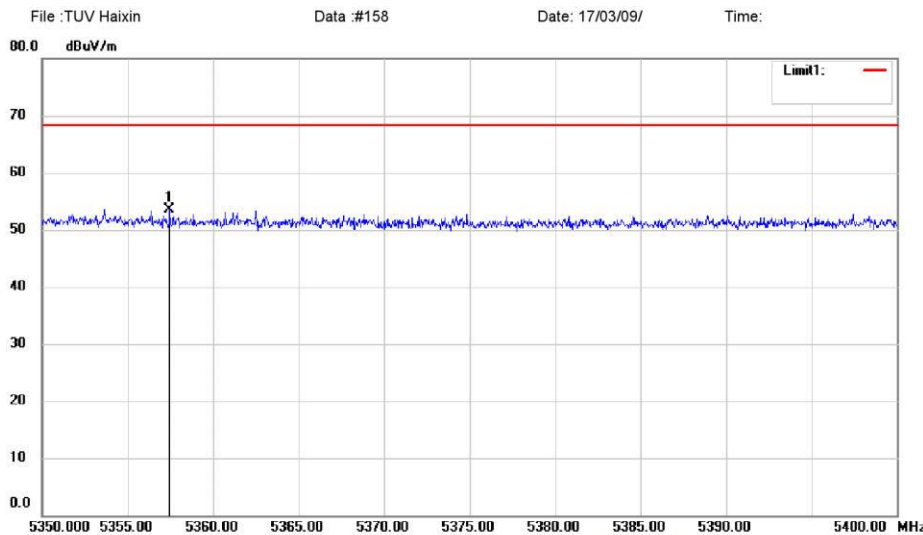

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac80 5210(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5357.450	52.32	1.22	53.54	68.23	-14.69	peak			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

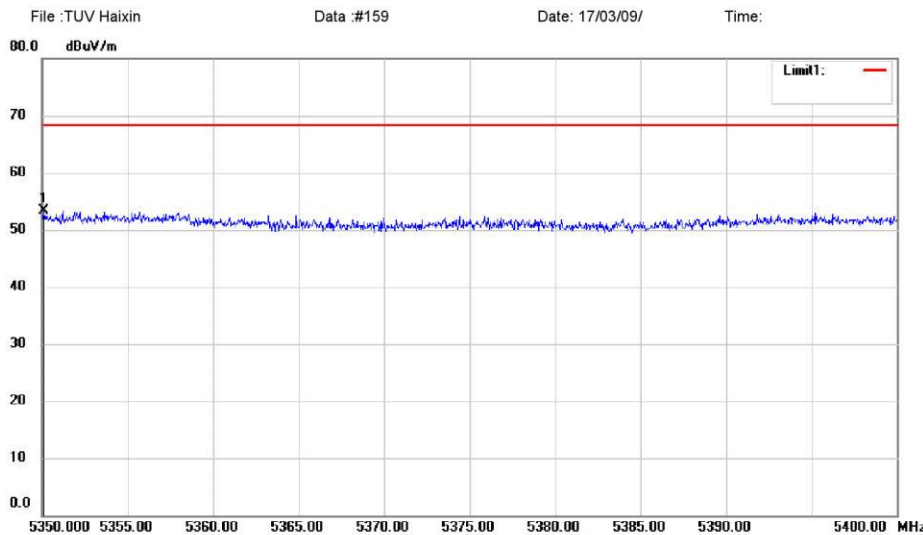

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac80 5210(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5350.100	52.07	1.20	53.27	68.23	-14.96			peak	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

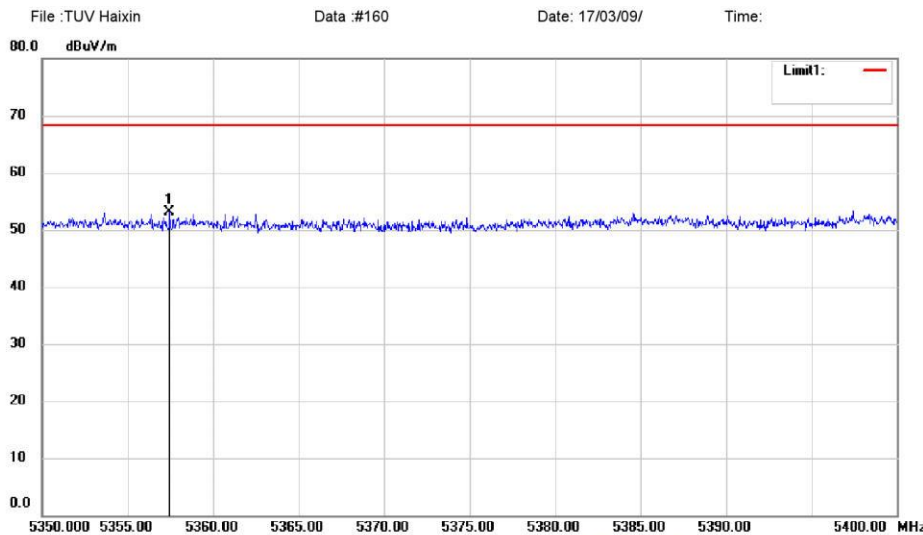

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac80 5210(ANT0+ANT1)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5357.450	51.82	1.22	53.04	68.23	-15.19	peak			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

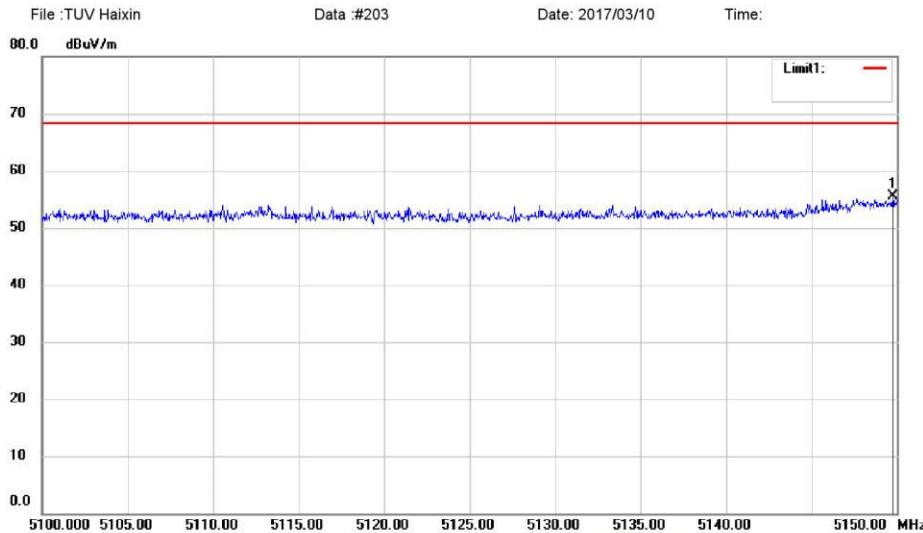

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: Humidity: 50 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5180(ANT0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5149.750	54.65	0.82	55.47	68.23	-12.76			peak	

*:Maximum data x:Over limit !:over margin

Operator: KK