

Nomad Goods, Inc.

TEST REPORT

Report Type:

FCC Part 15C

Model:

NM01150985, NM01898085,
NM01896685

REPORT NUMBER:

211202764SHA-002

ISSUE DATE:

January 25, 2022

DOCUMENT CONTROL NUMBER:

TTRF15c_V1 © 2018 Intertek



Applicant: Nomad Goods, Inc.
1187 Coast Village Rd. #638 Santa Barbara, CA 93108, United States

Address of Applicant: States

Manufacturer: Nomad Goods, Inc.
1187 Coast Village Rd. #638 Santa Barbara, CA 93108, United States

Address of Manufacturer: States

Factory: Zhongshan Zen Factory Ltd.
6th.Industrial Area, Nanlang Town, Zhongshan City,
Guangdong, China

Address of Factory:

FCC ID: 2AJYRNM01150985

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2019): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

PREPARED BY:

REVIEWED BY:



Project Engineer
Sky Yang

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY..... 4

MEASUREMENT RESULT SUMMARY 5

1 GENERAL INFORMATION 6

 1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) 6

 1.2 DESCRIPTION OF TEST FACILITY 7

2 TEST SPECIFICATIONS..... 9

 2.1 STANDARDS OR SPECIFICATION 9

 2.2 MODE OF OPERATION DURING THE TEST..... 9

 2.3 TEST SOFTWARE LIST 9

 2.4 TEST PERIPHERALS LIST 9

 2.5 SUPPORT CABLE LIST..... 9

 2.6 TEST ENVIRONMENT CONDITION:..... 10

 2.7 INSTRUMENT LIST 10

 2.8 MEASUREMENT UNCERTAINTY 10

3 RADIATED EMISSIONS 11

 3.1 LIMIT 11

 3.1.1 *The field strength of any emissions appearing outside of the 127.7 kHz band shall not exceed the general radiated emission limits in §15.209.* 11

 3.2 BLOCK DIAGRAM AND TEST SET UP 12

 3.3 MEASUREMENT PROCEDURE 13

 3.4 TEST RESULTS OF RADIATED EMISSIONS 14

4 POWER LINE CONDUCTED EMISSION..... 17

 4.1 LIMIT 17

 4.1.1 *Limits for conducted disturbance voltage at the mains ports of class B device* 17

 4.2 BLOCK DIAGRAM AND TEST SET UP 18

 4.3 MEASUREMENT PROCEDURE 19

 4.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION..... 20

5 MEASURED BANDWIDTH..... 22

6 ANTENNA REQUIREMENT..... 23

APPENDIX I: PHOTOGRAPH OF TEST SETUP 24

APPENDIX II: PHOTOGRAPH OF EQUIPMENT UNDER TEST 24

Revision History

Report No.	Version	Description	Issued Date
211202764SHA-002	Rev. 01	Initial issue of report	January 25, 2022

Measurement result summary

TEST ITEM	FCC REFERENCE	RESULT
Antenna Requirement	15.203	Pass
Power line conducted emission	15.207	Pass
Radiated emission	15.209	Pass
20dB bandwidth	15.215	Pass

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Base One with MagSafe
Type/Model:	NM01150985, NM01896685, NM01898085
Description of EUT:	The EUT is Base One with MagSafe. The additional model NM01898085, NM01896685 is identical with the test model NM01150985 except for the appearance color.
Rating:	Maximum output power 15W
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Operating Frequency:	127.7 kHz
Antenna Type:	Coil antenna
Sample received date:	December 23, 2021
Date of test:	December 27, 2021 to January 20, 2022

1.2 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN1175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

All tests were sub-contracted.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng Science and Technology Park, Longhua District, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

All tests were sub-contracted at Shenzhen UnionTrust Quality and Technology Co., Ltd, and conducted by Kieron Luo

Reviewed and approved by Wakeyou Wang from Intertek Testing Services Shanghai.

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

IC-Registration No.: 21600-1

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has

TEST REPORT

been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2019)

ANSI C63.10 (2013)

2.2 Mode of operation during the test

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency.

Test Item	EMI Test Modes
Radiated emission	Test Mode 1 :Operating with Max. Power Output(15W) Test Mode 2: Standby

2.3 Test software list

Test Items	Software	Manufacturer	Version
Radiated emission	e3	Audix	9.160333
Conducted emission	e3	Audix	9.160333

2.4 Test peripherals list

Item No	Description	Band and Model	S/No	rating
1	Mobile phone	Apple, iphone12	N/A	15W
2	Adapter	Apple, A1947	N/A	AC100-240V 50/60Hz 1.5A

2.5 Support Cable list

Item No	Description	Length (m)	Cable Type
1	USB Cable	2.0	Shielded without ferrite

2.6 Test environment condition:

Test items	Temperature	Humidity
Power line conducted emission	24.5°C	49% RH
Radiated Emissions	25.3°C	50% RH

2.7 Instrument list

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	3 m SAC	ETS-LINDGREN	3m	N/A	Jan. 22, 2021	Jan. 21, 2024
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	Nov. 14, 2020	Nov. 13, 2022
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 14, 2019	Nov. 13, 2022
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 14, 2020	Nov. 13, 2022
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	Spectrum analyzer	R&S	FSV40-N	101653	Apr. 22, 2021	Apr. 21, 2022

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	Nov. 05, 2021	Nov. 04, 2022

2.8 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Expanded Uncertainty (k=2)
Conducted emission at mains ports	9kHz ~ 150kHz	±3.2 dB
	150kHz ~ 30MHz	±2.7 dB
Radiated Emissions	9kHz ~ 30MHz	± 4.7 dB
	30MHz ~ 1GHz	± 4.6 dB
	1GHz ~ 18GHz	± 4.4 dB
	18GHz~26 GHz	± 4.4 dB
	26 GHz~40 GHz	± 4.6 dB

3 Radiated Emissions

Test result: Pass

3.1 Limit

3.1.1 The field strength of any emissions appearing outside of the 127.7 kHz band shall not exceed the general radiated emission limits in §15.209.

Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:



1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBµV/m) = 20 log Emission level (µV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.
4. For Below 30MHz, the measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

Field strength limit for 13.56MHz = 15848 µV/m at 30m
 = 84 dBµV/m at 30m
 = 84 dBµV/m + 40log (30/3) dB at 3m
 = 124 dBµV/m at 3m

3.2 Block diagram and test set up

For table top equipment

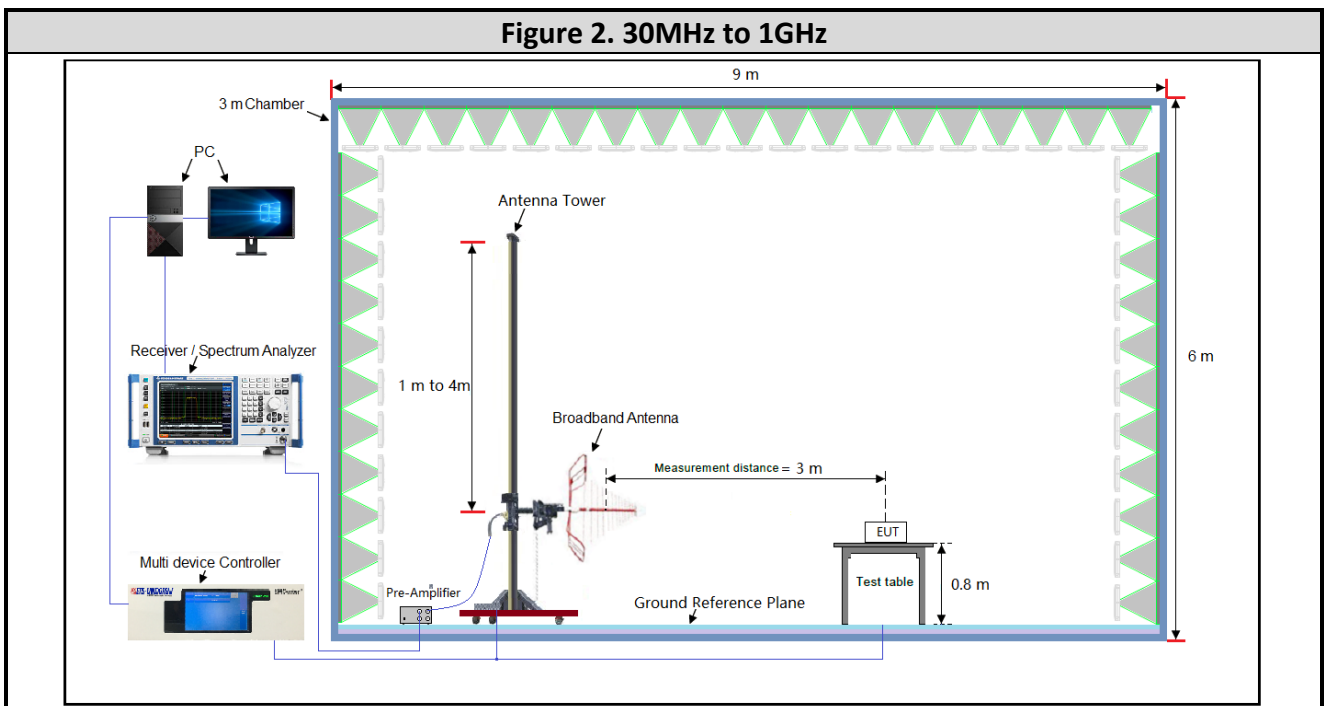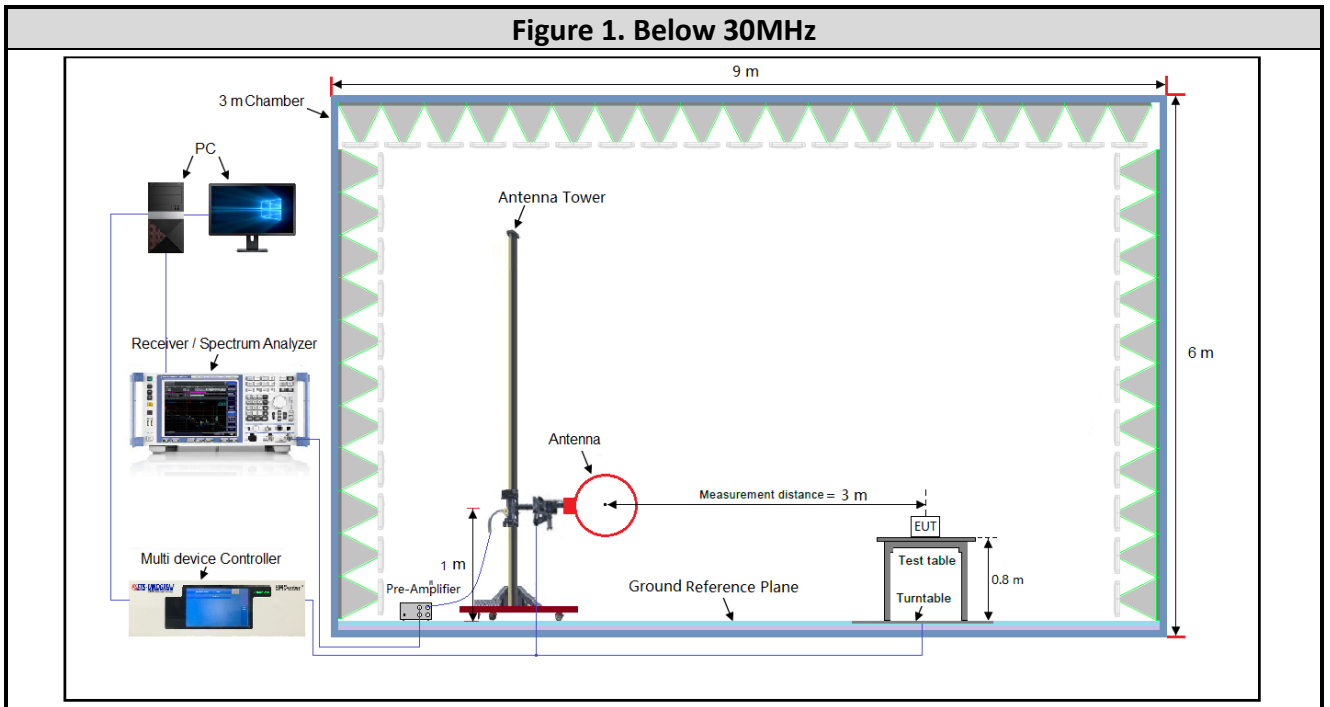

3.3 Measurement Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3-meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- 7) The system was investigated from 9 kHz to 1 GHz. During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	VBW	Measurement
9 kHz – 150 kHz	1kHz	3 kHz	Peak
150 kHz – 30 MHz	9kHz	100 kHz	Peak
30 MHz – 1000 MHz	120 kHz	300 kHz	Peak


TEST REPORT

3.4 Test Results of Radiated Emissions

Radiated Emission Test Data (9 KHz ~ 30 MHz):

Worst case test data: X axes

Test Mode 1

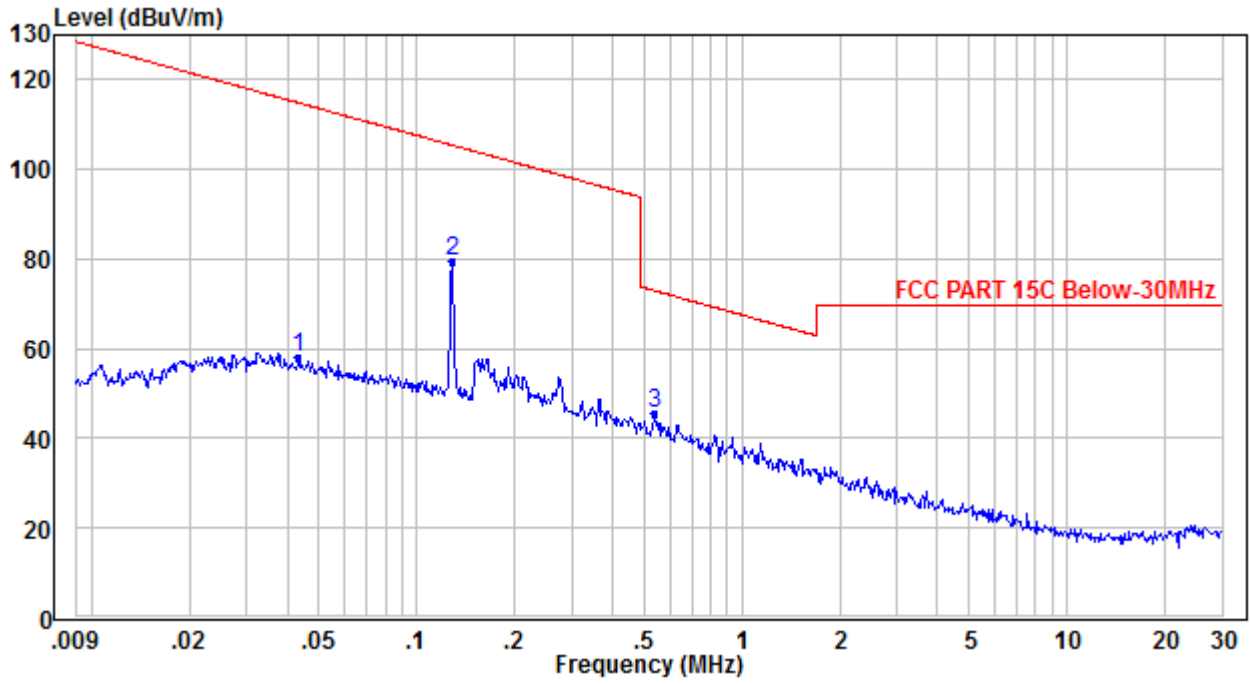


TEST REPORT

Radiated Emission Test Data (30 MHz ~ 1 GHz):


Worst case test data

Test Mode 1

Horizontal

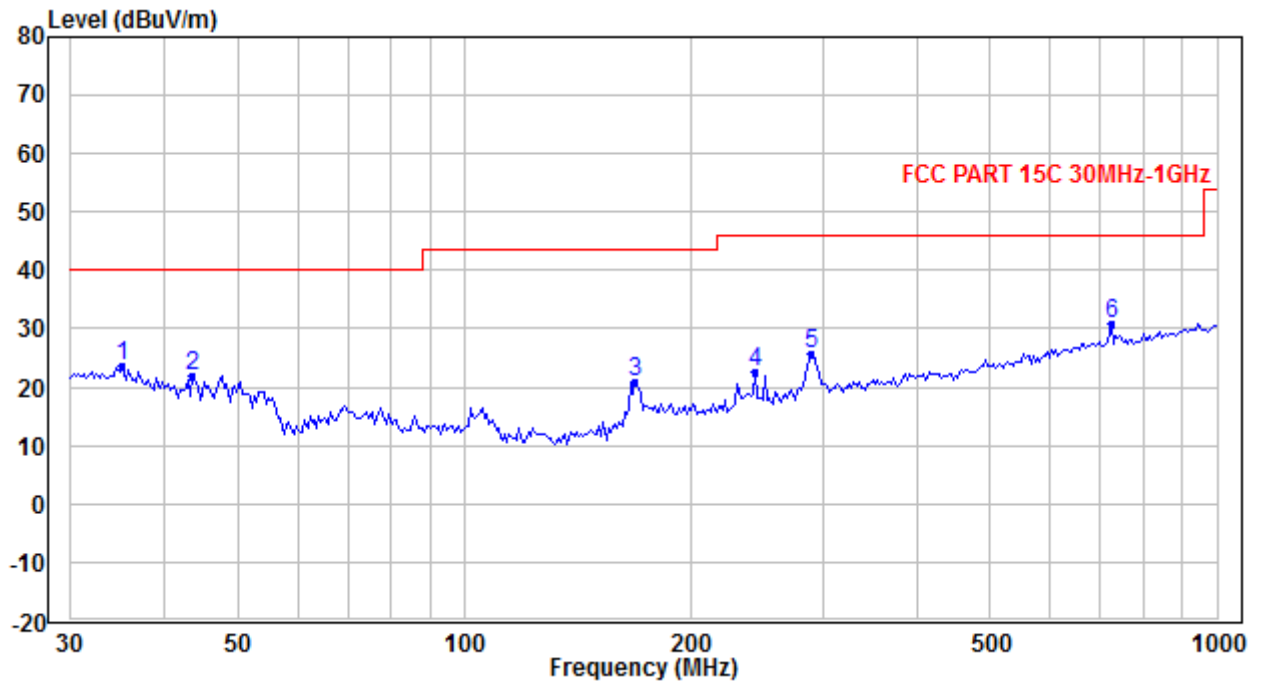

Vertical

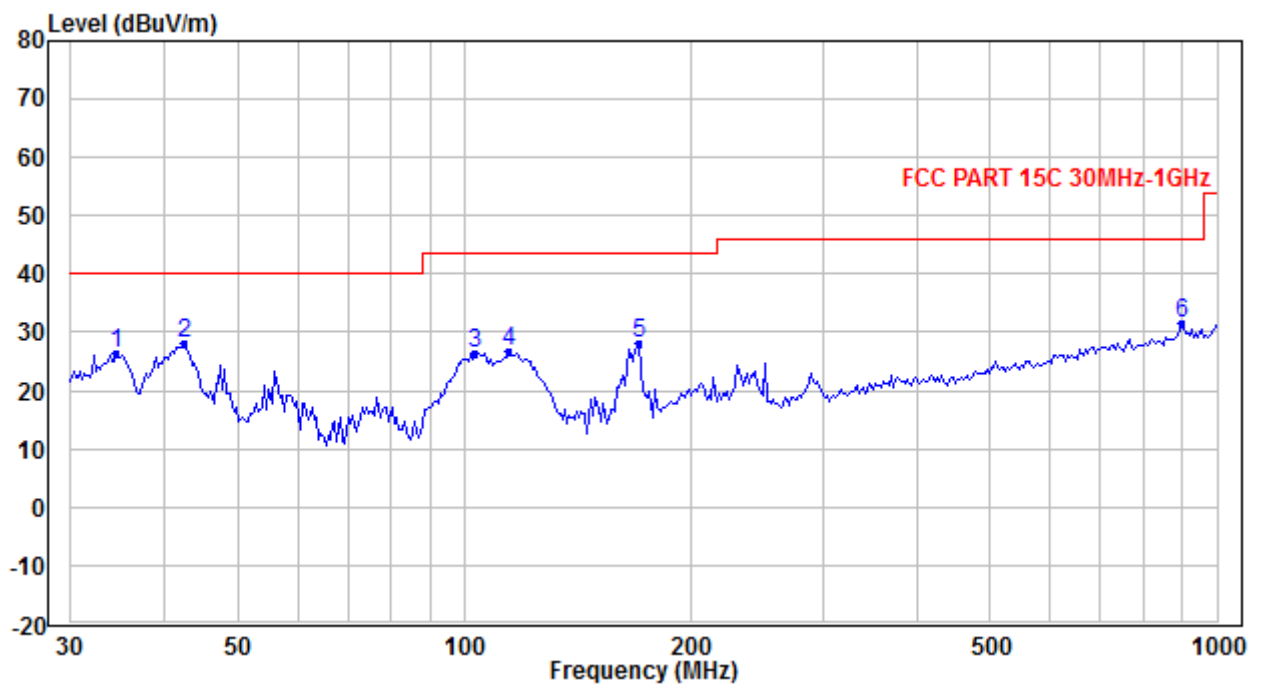

TEST REPORT

Test data 9 KHz ~ 30 MHz:

Frequency (MHz)	Measured level (dBμV/m)	Factor (dB)	Limits (dBμV/m)	Margin (dB)	Detector
0.043	58.14	-14.55	114.89	56.75	Peak
0.128	79.31	-16.81	105.45	26.14	Peak
0.542	45.53	-18.19	72.92	27.39	Peak

Test data 30MHz~1GHz:

Polarization	Frequency (MHz)	Measured level (dBμV/m)	Factor (dB)	Limits (dBμV/m)	Margin (dB)	Detector
H	35.016	23.81	-4.28	40.00	16.19	Peak
	43.538	21.87	-10.12	40.00	18.13	Peak
	168.997	20.88	-11.75	43.50	22.62	Peak
	243.543	22.44	-8.88	46.00	23.56	Peak
	288.284	25.75	-6.93	46.00	20.25	Peak
	723.793	30.90	1.79	46.00	15.10	Peak
V	34.527	26.55	-4.60	40.00	13.45	Peak
	42.331	28.18	-9.30	40.00	11.82	Peak
	103.335	26.39	-15.76	43.50	17.11	Peak
	114.822	26.63	-15.73	43.50	16.87	Peak
	170.189	28.01	-11.45	43.50	15.49	Peak
	899.958	31.55	4.29	46.00	14.45	Peak

Remark:

1. Factor= Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Measured level= Original Receiver Reading + Factor
3. Margin = Limit – Measured level
4. All possible modes of operation were investigated, only the worst-case emissions reported.

4 Power line conducted emission

Test result: PASS

4.1 Limit


4.1.1 Limits for conducted disturbance voltage at the mains ports of class B device

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 ~ 56 *	56 ~ 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

Note: 1. * Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz
 2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

4.2 Block diagram and test set up

For table top equipment

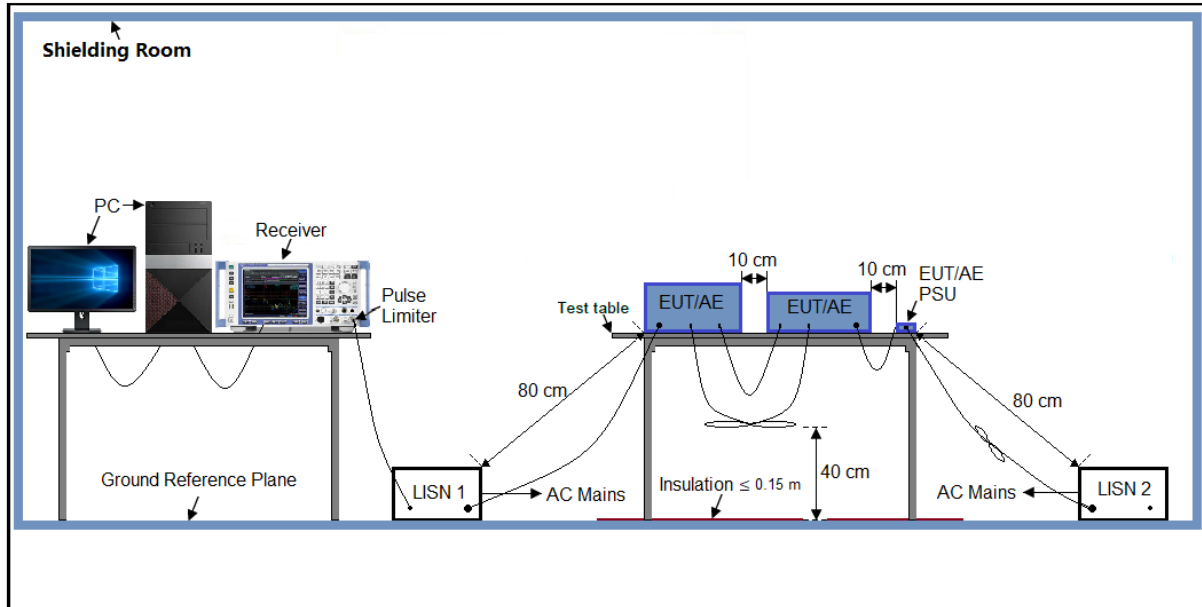

TEST REPORT**4.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.10. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.


TEST REPORT

4.4 Test Results of Power line conducted emission

Worst case test data

Test Mode 1

Test Curve:

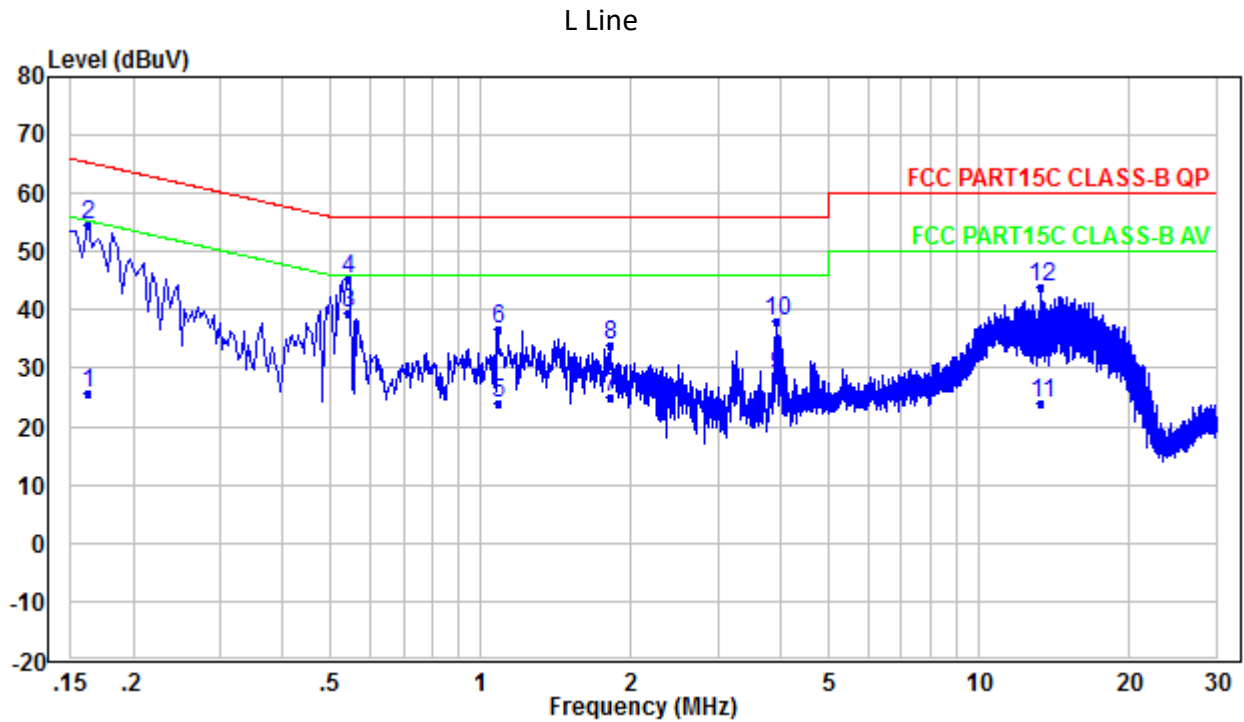


Test Data:

Frequency (MHz)	Quasi-peak			Average		
	Level dB(μV)	Limit dB(μV)	Margin (dB)	Level dB(μV)	Limit dB(μV)	Margin (dB)
0.162	54.72	65.36	10.64	25.72	55.36	29.64
0.542	45.35	56.00	10.65	39.35	46.00	6.65
1.082	36.84	56.00	19.16	23.84	46.00	22.16
1.822	34.07	56.00	21.93	25.07	46.00	20.93
3.938	37.96	56.00	18.04	28.96	46.00	17.04
13.373	43.82	60.00	16.18	23.82	50.00	26.18

TEST REPORT

Test Curve:

N Line

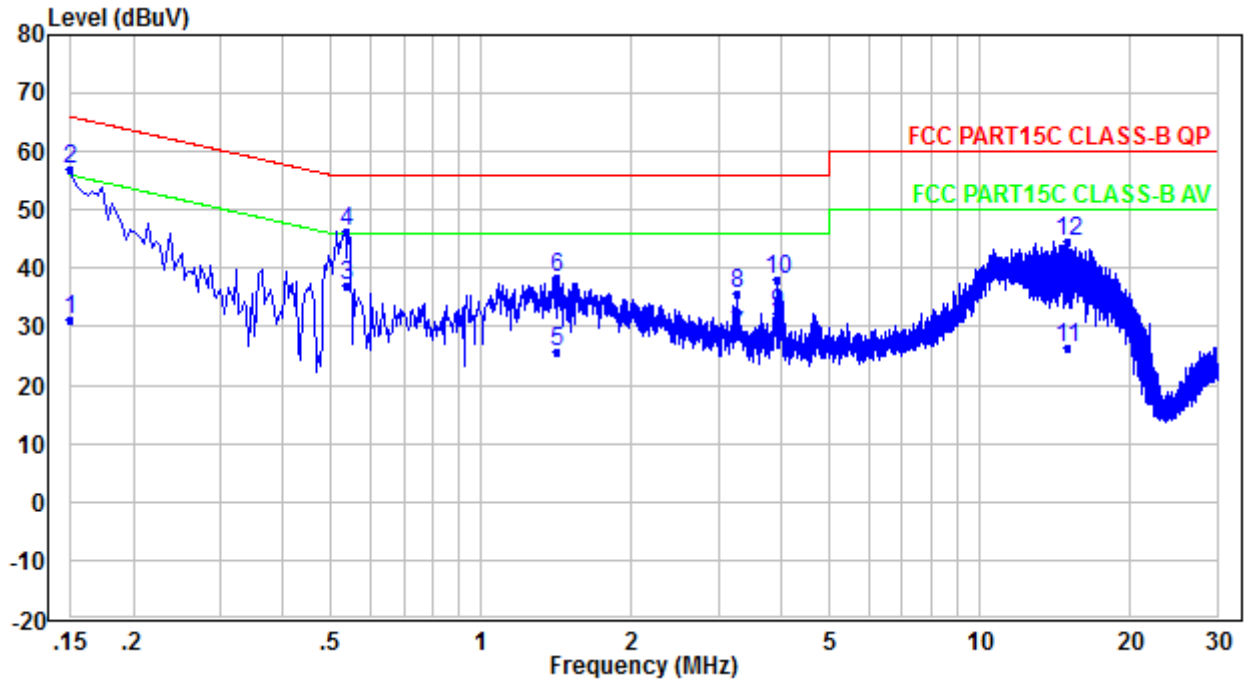

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	Level dB(μV)	Limit dB(μV)	Margin (dB)	Level dB(μV)	Limit dB(μV)	Margin (dB)
0.150	57.05	66.00	8.95	31.05	56.00	24.95
0.534	46.21	56.00	9.79	37.21	46.00	8.79
1.418	38.53	56.00	17.47	25.53	46.00	20.47
3.262	35.6	56.00	20.40	28.60	46.00	17.40
3.914	38.09	56.00	17.91	32.09	46.00	13.91
15.021	44.52	60.00	15.48	26.52	50.00	23.48


Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Level = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Level
 4. All possible modes of operation were investigated, only the worst-case emissions reported.

TEST REPORT

5 Measured Bandwidth

Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designed (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

127.7 kHz

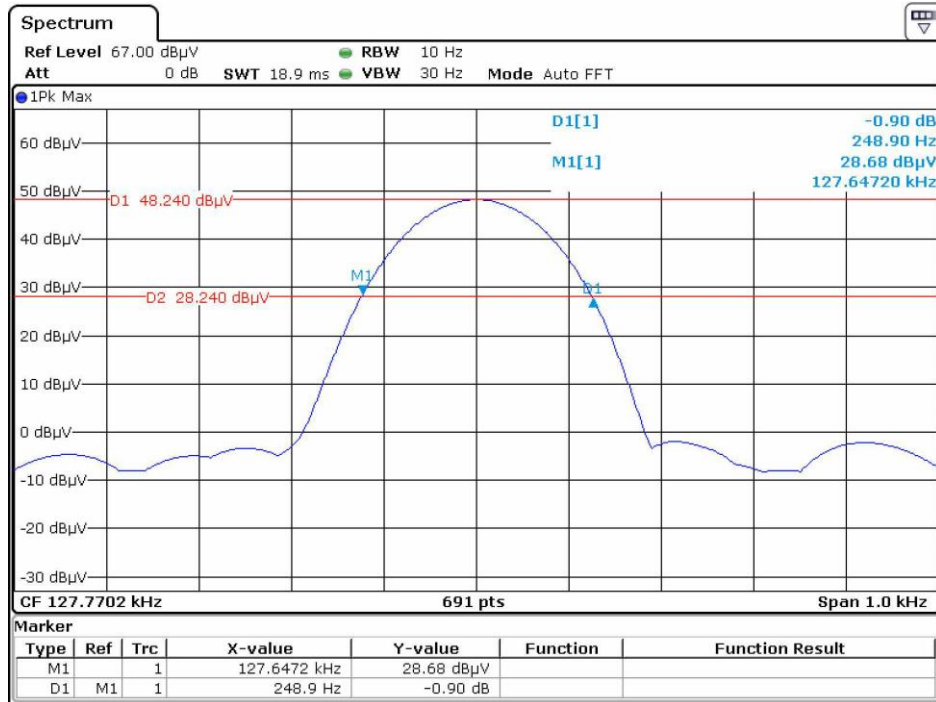

Date: 27.DEC.2021 18:16:29

6 ANTENNA REQUIREMENT

Standard Requirement
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>
<p>EUT Antenna:</p>
<p>This product has a permanent antenna, fulfill the requirement of this section.</p>

Appendix I: Photograph of test setup

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

Appendix II: Photograph of equipment under test

Refer to Appendix 2 for EUT external and internal photos.

***** END *****