



Test Report No.: W7L-P23070009-2RF03



Certificate #6613.01

# VARIANT FCC TEST REPORT (PART 27)



Applicant:	SIMCom Wireless Solutions Limited
Address:	Building 3, No.289 Linhong Road Shanghai China 200335

Manufacturer or Supplier:	SIMCom Wireless Solutions Limited
Address:	Building 3, No.289 Linhong Road Shanghai China 200335
Product:	SIM7672NA
Brand Name:	SIMCom
Model Name:	SIM7672NA
FCC ID:	2AJYU-8XS0003
Date of tests:	Aug. 22, 2023 ~ Nov. 01, 2023

The tests have been carried out according to the requirements of the following standard:

- FCC Part 27     ANSI/TIA/EIA-603-D
- FCC Part 2     ANSI/TIA/EIA-603-E     ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Chao Wu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department
 Date: Nov. 01, 2023	 Date: Nov. 01, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



# TABLE OF CONTENTS

- RELEASE CONTROL RECORD ..... 3**
- 1 SUMMARY OF TEST RESULTS .....4**
  - 1.1 MEASREMENT UNCERTAINTY ..... 7
  - 1.2 TEST SITE AND INSTRUMENTS ..... 8
- 2 GENERAL INFORMATION ..... 10**
  - 2.1 GENERAL DESCRIPTION OF EUT ..... 10
  - 2.2 CONFIGURATION OF SYSTEM UNDER TEST ..... 13
  - 2.3 DESCRIPTION OF SUPPORT UNITS ..... 14
  - 2.4 TEST ITEM AND TEST CONFIGURATION ..... 14
  - 2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 19
- 3 TEST TYPES AND RESULTS .....20**
  - 3.1 OUTPUT POWER MEASUREMENT ..... 20
    - 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT ..... 20
    - 3.1.2 TEST PROCEDURES ..... 20
    - 3.1.3 TEST SETUP ..... 22
    - 3.1.4 TEST RESULTS ..... 23
  - 3.2 FREQUENCY STABILITY MEASUREMENT ..... 33
    - 3.2.1 LIMITS OF FREQUENCY STABILIIITY MEASUREMENT ..... 33
    - 3.2.2 TEST PROCEDURE ..... 33
    - 3.2.3 TEST SETUP ..... 33
    - 3.2.4 TEST RESULTS ..... 34
  - 3.3 OCCUPIED BANDWIDTH MEASUREMENT ..... 35
    - 3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT ..... 35
    - 3.3.2 TEST SETUP ..... 35
    - 3.3.3 TEST PROCEDURES ..... 35
    - 3.3.4 TEST RESULTS ..... 36
  - 3.4 BAND EDGE MEASUREMENT ..... 37
    - 3.4.1 LIMITS OF BAND EDGE MEASUREMENT ..... 37
    - 3.4.2 TEST SETUP ..... 38
    - 3.4.3 TEST PROCEDURES ..... 39
    - 3.4.4 TEST RESULTS ..... 40
  - 3.5 CONDUCTED SPURIOUS EMISSIONS ..... 41
    - 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT ..... 41
    - 3.5.2 TEST PROCEDURE ..... 41
    - 3.5.3 TEST SETUP ..... 41
    - 3.5.4 TEST RESULTS ..... 42
  - 3.6 RADIATED EMISSION MEASUREMENT ..... 43
    - 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 43
    - 3.6.2 TEST PROCEDURES ..... 43
    - 3.6.3 DEVIATION FROM TEST STANDARD ..... 43
    - 3.6.4 TEST SETUP ..... 44
    - 3.6.5 TEST RESULTS ..... 46
  - 3.7 PEAK TO AVERAGE RATIO ..... 80
    - 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT ..... 80
    - 3.7.2 TEST SETUP ..... 80
    - 3.7.3 TEST PROCEDURES ..... 80
    - 3.7.4 TEST RESULTS ..... 81
- 4 INFORMATION ON THE TESTING LABORATORIES .....82**
- 5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....83**



Test Report No.: W7L-P23070009-2RF03

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P23070009RF03	Original release	Sep. 11, 2023
W7L-P23070009-2RF03	Based on the original report product changing the model name and FCC ID, add LTE Band 14, remove LTE Band 7/25/26/38/41, The new sample verify LTE Band 13 RSE worse case of channel bandwidth 5MHz.	Nov. 01, 2023



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
§2.1046	Conducted Output Power	See note1
§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (Band 12) (Band 13) (Band 71)	See note1
§27.50(h)(2)	Equivalent Isotropically Radiated Power	See note1
§2.1055 §27.54	Frequency Stability	See note1
§2.1049	Occupied Bandwidth	See note1
§2.1051 §27.53(c)(2)(4) §27.53(g) §27.53(m)(4)(6) §27.53(a)(4)	Conducted Band Edge Measurements (Band 12) (Band 13) (Band 71)	See note1
§2.1051 §27.53(c)(2)(4) §27.53(g) §27.53(m)(4)(6)	Conducted Spurious Emissions (Band 12) (Band 13) (Band 71)	See note1
§2.1053 §27.53(c)(2)(4) §27.53(f) §27.53(g) §27.53(m)(4)(6)	Radiated Spurious Emissions (Band 12) (Band 13) (Band 71)	See note1 Compliance
NA	Peak to average ratio	See note1



BUREAU  
VERITAS

**Test Report No.: W7L-P23070009-2RF03**

**Note:**

1. This report refers to the data of W7L-P23070009RF03 (FCC ID: 2AJYU-8XS0001, model: SIM7672G).
2. List of the verified results (worse case) in the test item as follows

Test Item / Report No.	W7L-P23070009RF03	W7L-P23070009-2RF03
Radiated Emission Test (30MHz ~ 1GHz)	Margin: -26.96dB	Margin:47.15dB
Radiated Emission Test (Above 1GHz)	LTE Band 13 (channel bandwidth 5MHz) Margin:-4.41dB	LTE Band 13 (channel bandwidth 5MHz) PK+ Margin:19.24dB

**Remark:**

1. All validation data are within increase of below to 3 dB, the result is better than original data.



**Test Report No.: W7L-P23070009-2RF03**

**\*Test Lab Information Reference**

**Lab :**

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

**Lab Address:**

Tower N, Innovation Center, 88 Zhuyi Road, High-tech District, Suzhou City, Anhui Province

**Accredited Test Lab Cert 6613.01**

The FCC Site Registration No. is 434559; The Designation No. is CN1325.

**Lab :**

BV 7Layers Communications Technology (Shenzhen) Co. Ltd

**Lab Address:**

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park,  
Nanshan District, Shenzhen, Guangdong, China

**Accredited Test Lab Cert 3939.01**

The FCC Site Registration No. is 525120; The Designation No. is CN1171.



### 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	±76.97Hz
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions & Radiated Power (30MHz~1GHz)	±4.98dB
Radiated emissions & Radiated Power (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Band Edge Measurements	±4.70dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



**BUREAU  
VERITAS**

Test Report No.: W7L-P23070009-2RF03

## 1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.30,22	Aug.29,24
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A	182185	Feb.16,22	Feb.15,24
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-01Chamber	Nov.25,22	Nov.24,25
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-E MC-02Chamber	Nov.25,22	Nov.24,25
EMI TEST Receiver	R&S	ESR26	101734	Feb.25,22	Feb.24,24
EMI TEST Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.22,22	Aug.21,24
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Feb.23,22	Feb.22,24
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Aug.22,22	Aug.21,24
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Feb.23,22	Feb.22,24
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.27,22	Jun.26,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	Oct.01,22	Sep.30,24
DC Source	HYELEC	HY3010B	551016	Aug.31,22	Aug.30,24
Hygrothermograph	DELI	20210528	SZ014	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM -7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM -4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W13.02	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	W12.14	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W12.14	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	J12J103539-0 0-1	SEP-03-20- 069	Apr.28,23	Oct.27,23
CABLE	R&S	J12J103539-0 0-1	SEP-03-20- 069	Oct.27,23	Apr.26,24
CABLE	R&S	J12J103539-0 0-1	SEP-03-20- 070	Apr.28,23	Oct.27,23
CABLE	R&S	J12J103539-0 0-1	SEP-03-20- 070	Oct.27,23	Apr.26,24
Temperature Chamber	votsch	VT4002	5856607810 0050	May.31,22	May.30,24





**Test Report No.: W7L-P23070009-2RF03**

- NOTE:**
1. The calibration interval of the above test instruments is 6 months or 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
  3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 434559; The Designation No. is CN1325.

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,23	Mar. 27,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.10,23	May.09,24
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.03,22	Sep.02,23
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.02,23	Sep.01,24
Bilog Antenna	ETS-LINDGRE N	3143B	00161965	Feb. 18,23	Feb. 17,24
Horn Antenna	ETS-LINDGRE N	3117	00168692	Feb. 18,23	Feb. 17,24
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Sep.04, 22	Sep.03, 23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Sep.03, 23	Sep.02, 24
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 14,23	Feb. 13,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,23	May. 05,24
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,23	May.09,24
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,23	Feb.16,24
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 22, 23	May. 21,26
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	50HF-010-SMA	May. 06,23	May. 05,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,23	Feb. 13,24
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,23	Feb. 13,24
Temperature Chamber	ESPEC	SH-242	93000855	May. 06,23	May. 05,24
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 14,23	Feb. 13,24
Base station R&S CMW500	Rohde&Schwarz	CMW500	153085	May.10,23	May.09,24
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 11,23	Aug. 10,24

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
  3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT*</b>	SIM7672NA	
<b>BRAND NAME*</b>	SIMCom	
<b>MODEL NAME*</b>	SIM7672NA	
<b>NOMINAL VOLTAGE*</b>	EUT 3.8V	
<b>MODULATION TECHNOLOGY*</b>	LTE	QPSK, 16QAM
<b>FREQUENCY RANGE</b>	LTE Band 12 Channel Bandwidth: 1.4MHz	699.7MHz ~ 715.3MHz
	LTE Band 12 Channel Bandwidth: 3MHz	700.5MHz ~ 714.5MHz
	LTE Band 12 Channel Bandwidth: 5MHz	701.5MHz ~ 713.5MHz
	LTE Band 12 Channel Bandwidth: 10MHz	704MHz ~ 711MHz
	LTE Band 13 Channel Bandwidth: 5MHz	779.5MHz ~ 784.5MHz
	LTE Band 13 Channel Bandwidth: 10MHz	782MHz
	LTE Band 71 Channel Bandwidth: 5MHz	665.5MHz ~ 695.5MHz
	LTE Band 71 Channel Bandwidth: 10MHz	668MHz ~ 693MHz
	LTE Band 71 Channel Bandwidth: 15MHz	670.5MHz ~ 690.5MHz
	LTE Band 71 Channel Bandwidth: 20MHz	673MHz ~ 688MHz
	<b>MAX. EIRP/ERP POWER</b>	LTE Band 12 Channel Bandwidth: 1.4MHz
LTE Band 12 Channel Bandwidth: 3MHz		162.18mW
LTE Band 12 Channel Bandwidth: 5MHz		162.18mW
LTE Band 12 Channel Bandwidth: 10MHz		163.68mW
LTE Band 13 Channel Bandwidth: 5MHz		230.14mW
LTE Band 13 Channel Bandwidth: 10MHz		230.67mW
LTE Band 71 Channel Bandwidth: 5MHz		154.17mW



**BUREAU  
VERITAS**

Test Report No.: W7L-P23070009-2RF03

	LTE Band 71 Channel Bandwidth: 10MHz	155.24mW
	LTE Band 71 Channel Bandwidth: 15MHz	154.17mW
	LTE Band 71 Channel Bandwidth: 20MHz	156.31mW
<b>EMISSION DESIGNATOR</b>	LTE Band 12 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D 16QAM: 1M10W7D
	LTE Band 12 Channel Bandwidth: 3MHz	QPSK: 2M71G7D 16QAM: 2M71W7D
	LTE Band 12 Channel Bandwidth: 5MHz	QPSK: 4M52G7D 16QAM: 4M51W7D
	LTE Band 12 Channel Bandwidth: 10MHz	QPSK: 9M02G7D 16QAM: 4M87W7D
	LTE Band 13 Channel Bandwidth: 5MHz	QPSK: 4M52G7D 16QAM: 4M50W7D
	LTE Band 13 Channel Bandwidth: 10MHz	QPSK: 9M00G7D 16QAM: 4M87W7D
	LTE Band 71 Channel Bandwidth: 5MHz	QPSK: 4M51G7D 16QAM: 4M50W7D
	LTE Band 71 Channel Bandwidth: 10MHz	QPSK: 9M00G7D 16QAM: 4M86W7D
	LTE Band 71 Channel Bandwidth: 15MHz	QPSK: 13M5G7D 16QAM: 4M88W7D
	CLTE Band 71 Channel Bandwidth: 20MHz	QPSK: 18M0G7D 16QAM: 4M90W7D



**BUREAU  
VERITAS**

**Test Report No.: W7L-P23070009-2RF03**

<b>ANTENNA TYPE*</b>	Monopole Antenna with 0.22dBi gain for LTE12 Monopole Antenna with 2.23dBi gain for LTE13 Monopole Antenna with 0.22dBi gain for LTE71
<b>HW VERSION*</b>	V2.02
<b>SW VERSION*</b>	SIM7672M5A
<b>I/O PORTS*</b>	Refer to user's manual
<b>CABLE SUPPLIED*</b>	N/A
<b>EXTREME TEMPERATURE*</b>	-10-55 °C
<b>EXTREME VOLTAGE*</b>	3.2V - 4.2V

**NOTE:**


1. \*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

<b>MODULATION MODE</b>	<b>TX FUNCTION</b>
<b>LTE</b>	<b>1TX/1RX</b>

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

## 2.2 CONFIGURATION OF SYSTEM UNDER TEST

### FOR RADIATION EMISSION TEST

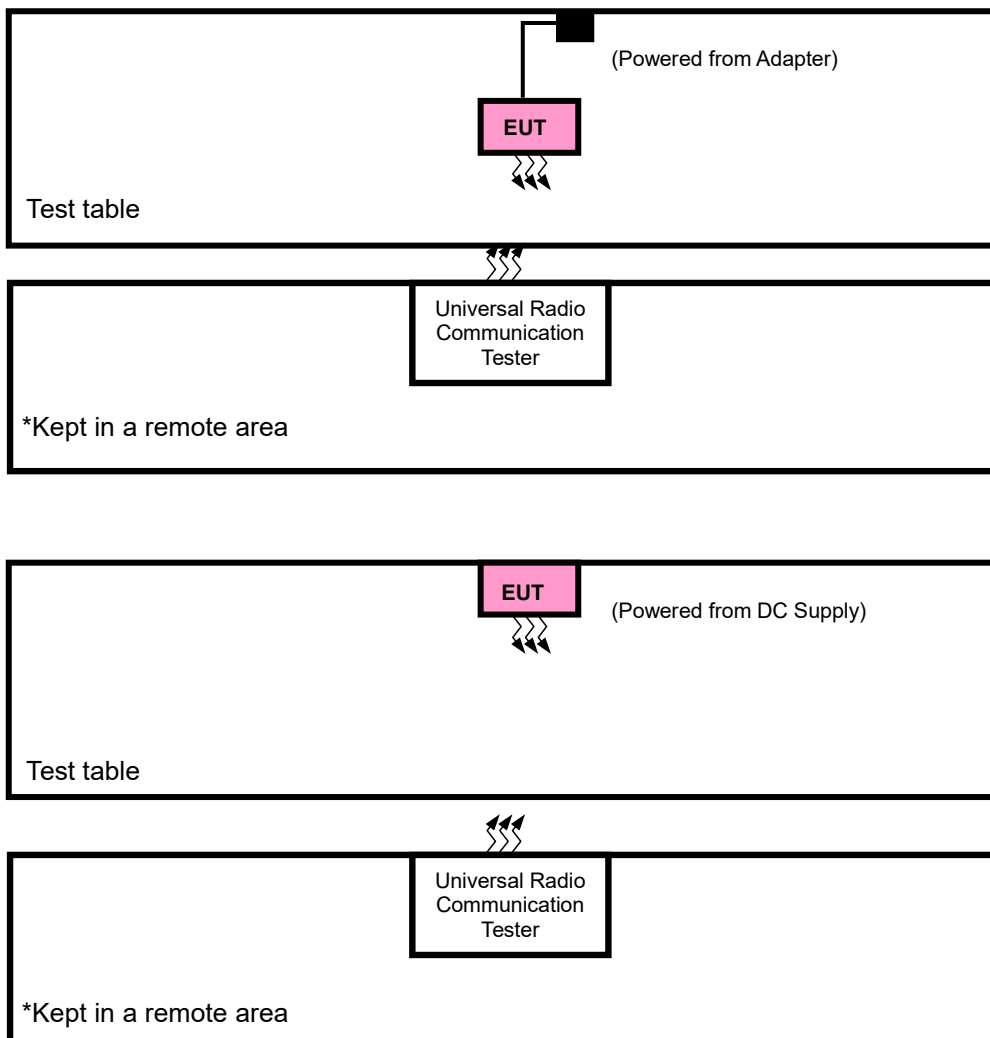



### 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	HYELEC	HY3010B	551016	N/A
2	Adapter	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	USB Line: Shielded, Detachable 1.0m;

### 2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter with LTE link
B	EUT + DC Supply with LTE link

**LTE BAND 12 MODE**

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE		
A	ERP	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset		
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK,16QAM	1 RB / 0 RB Offset		
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK,16QAM	1 RB / 0 RB Offset		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK,16QAM	1 RB / 0 RB Offset		
B	FREQUENCY STABILITY	23060 to 23130	23060, 23095 ,23130	10MHz	QPSK,16QAM	Full RB / 0 RB Offset		
A	OCCUPIED BANDWIDTH	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK,16QAM	Full RB / 0 RB Offse		
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK,16QAM	Full RB / 0 RB Offse		
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK,16QAM	Full RB / 0 RB Offse		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK,16QAM	Full RB / 0 RB Offse		
A	PEAK TO AVERAGE RATIO	23060 to 23130	23060, 23095 ,23130	10MHz	QPSK,16QAM	1 RB / 0 RB Offset Full RB / 0 RB Offse		
A	BAND EDGE	23017 to 23173	23017	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset Full RB / 0 RB Offse		
			23173	1.4MHz	QPSK,16QAM	1 RB / 5 RB Offset Full RB / 0 RB Offse		
		23025 to 23165	23025	3MHz	QPSK,16QAM	1 RB / 0 RB Offset Full RB / 0 RB Offse		
			23165	3MHz	QPSK,16QAM	1 RB / 14 RB Offset Full RB / 0 RB Offse		
		23035 to 23155	23035	5MHz	QPSK,16QAM	1 RB / 0 RB Offset Full RB / 0 RB Offse		
			23155	5MHz	QPSK,16QAM	1 RB / 24 RB Offset Full RB / 0 RB Offse		
		23060 to 23130	23060	10MHz	QPSK,16QAM	1 RB / 0 RB Offset Full RB / 0 RB Offse		
			23130	10MHz	QPSK,16QAM	1 RB / 49 RB Offset Full RB / 0 RB Offse		
		A	CONDCUDED EMISSION	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
				23025 to 23165	23025, 23095 ,23165	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
				23035 to 23155	23035, 23095 ,23155	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
				23060 to 23130	23060, 23095 ,23130	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 0 RB Offset		
		23025 to 23165	23095	3MHz	QPSK	1 RB / 0 RB Offset		
		23035 to 23155	23095	5MHz	QPSK	1 RB / 0 RB Offset		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK	1 RB / 0 RB Offset		

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



LTE BAND 13 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23205 to 23255	23205, 23230, 23255	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	23230	23230	10MHz	QPSK,16QAM	Full RB / 0 RB Offse
A	OCCUPIED BANDWIDTH	23205 to 23255	23205, 23230, 23255	5MHz	QPSK,16QAM	Full RB / 0 RB Offse
		23230	23230	10MHz	QPSK,16QAM	Full RB / 0 RB Offse
A	PEAK TO AVERAGE RATIO	23230	23230	10MHz	QPSK,16QAM	1 RB / 0 RB Offset Full RB / 0 RB Offse
A	BAND EDGE	23205 to 23255	23205	5MHz	QPSK,16QAM	1 RB / 0 RB Offset Full RB / 0 RB Offse
			23255	5MHz	QPSK,16QAM	1 RB / 24 RB Offset Full RB / 0 RB Offse
			23230	10MHz	QPSK,16QAM	1 RB / 0 RB Offset 1 RB / 49 RB Offset Full RB / 0 RB Offse
		23230	23230	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
						1 RB / 49 RB Offset
						Full RB / 0 RB Offse
A	CONDCUDED EMISSION	23205 to 23255	23205, 23230, 23255	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	23205 to 23255	23205, 23230, 23255	5MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.





Test Report No.: W7L-P23070009-2RF03

LTE BAND 71

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE		
A	ERP	133147 to 133447	133147, 133297, 133447	5MHz	QPSK,16QAM	1 RB / 0 RB Offset		
		133172 to 133422	133172, 133297 133422	10MHz	QPSK,16QAM	1 RB / 0 RB Offset		
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK,16QAM	1 RB / 0 RB Offset		
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK,16QAM	1 RB / 0 RB Offset		
B	FREQUENCY STABILITY	133222 to 133372	133222, 133372	20MHz	QPSK,16QAM	Full RB / 0 RB Offse		
A	OCCUPIED BANDWIDTH	133147 to 133447	133147, 133297, 133447	5MHz	QPSK,16QAM	Full RB / 0 RB Offse		
		133172 to 133422	133172, 133297 133422	10MHz	QPSK,16QAM	Full RB / 0 RB Offse		
		133197 to 133397	133197, 133297, 133397	15MHz	QPSK,16QAM	Full RB / 0 RB Offse		
		133222 to 133372	133222, 133322, 133372	20MHz	QPSK,16QAM	Full RB / 0 RB Offse		
A	PEAK TO AVERAGE RATIO	133222 to 133372	133222, 133322, 133372	20MHz	QPSK,16QAM	1 RB / 99 RB Offset Full RB / 0 RB Offse		
A	BAND EDGE	133147 to 133447	133147	5MHz	QPSK,16QAM	1 RB / 0 RB Offset Full RB / 0 RB Offse		
			133447	5MHz	QPSK,16QAM	1 RB / 24 RB Offset Full RB / 0 RB Offse		
		133172 to 133422	133172	10MHz	QPSK,16QAM	1 RB / 0 RB Offset Full RB / 0 RB Offse		
			133422	10MHz	QPSK,16QAM	1 RB / 49 RB Offset Full RB / 0 RB Offse		
		133197 to 133397	133197	15MHz	QPSK,16QAM	1 RB / 0 RB Offset Full RB / 0 RB Offse		
			133397	15MHz	QPSK,16QAM	1 RB / 74 RB Offset Full RB / 0 RB Offse		
		133222 to 133372	133222	20MHz	QPSK,16QAM	1 RB / 0 RB Offset Full RB / 0 RB Offse		
			133372	20MHz	QPSK,16QAM	1 RB / 99 RB Offset Full RB / 0 RB Offse		
		A	CONDCUDEDTED EMISSION	133147 to 133447	133147, 133297, 133447	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
				133172 to 133422	133172, 133297 133422	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
				133197 to 133397	133197, 133297, 133397	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
				133222 to 133372	133222, 133322, 133372	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	133147 to 133447	133297	5MHz	QPSK	1 RB / 0 RB Offset		
		133172 to 133422	133172, 133297 133422	10MHz	QPSK	1 RB / 0 RB Offset		
		133197 to 133397	133297	15MHz	QPSK	1 RB / 0 RB Offset		
		133222 to 133372	133322	20MHz	QPSK	1 RB / 0 RB Offset		

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: W7L-P23070009-2RF03

**TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP&EIRP	23deg. C, 70%RH	EUT 3.8V	Jace Hu
FREQUENCY STABILITY	23deg. C, 70%RH	DC 3.2V/3.8V/4.2V By DC Supply	James Fu
OCCUPIED BANDWIDTH	23deg. C, 70%RH	EUT 3.8V	James Fu
BAND EDGE	23deg. C, 70%RH	EUT 3.8V	James Fu
CONDCUDETED EMISSION	23deg. C, 70%RH	EUT 3.8V	James Fu
RADIATED EMISSION	23deg. C, 70%RH	EUT 3.8V	Jace Hu
PEAK TO AVERAGE RATIO	23deg. C, 70%RH	EUT 3.8V	James Fu



Test Report No.: W7L-P23070009-2RF03

## **2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 27**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-D**

**ANSI/TIA/EIA-603-E**

**ANSI C63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.



### 3 TEST TYPES AND RESULTS

#### 3.1 OUTPUT POWER MEASUREMENT

##### 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP

According to the specific rule Part 27.50(b)(10) and 27.50(c)(10) Fixed, mobile, and Portable stations (hand-held devices) transmitting in the 698-746 MHz, 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

##### 3.1.2 TEST PROCEDURES

###### EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$ERP \text{ or } EIRP = P_{Meas} + G_T - L_c$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively  
(expressed in the same units as  $P_{Meas}$ , typically dBW or dBm);

$P_{Meas}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_T$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);



**BUREAU  
VERITAS**

**Test Report No.: W7L-P23070009-2RF03**

$L_c$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

**CONDUCTED POWER MEASUREMENT:**


- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



Test Report No.: W7L-P23070009-2RF03

### 3.1.3 TEST SETUP

#### CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.4 TEST RESULTS

#### CONDUCTED OUTPUT POWER (dBm)

LTE Band 12

Band/BW	Modulation	RB Size	RB Offset	Low CH 23017	Mid CH 23095	High CH 23173
				Frequency 699.7 MHz	Frequency 707.5 MHz	Frequency 715.3 MHz
12/ 1.4	QPSK	1	0	23.69	22.94	22.77
		1	2	23.31	23.72	22.77
		1	5	24.04	23.55	22.67
		3	0	23.31	23.49	23.10
		3	1	23.41	23.85	22.96
		3	3	23.83	23.84	22.61
	16QAM	6	0	22.58	22.62	21.85
		1	0	22.94	22.12	22.12
		1	2	22.44	22.70	22.46
		1	5	22.68	22.99	22.20
		3	0	23.49	23.11	23.16
		3	1	23.22	23.54	23.22
		3	3	23.18	23.73	23.22
		6	0	21.22	21.55	21.20

Band/BW	Modulation	RB Size	RB Offset	Low CH 23025	Mid CH 23095	High CH 23165
				Frequency 700.5 MHz	Frequency 707.5 MHz	Frequency 714.5 MHz
12/ 3	QPSK	1	0	23.72	22.88	22.74
		1	7	23.24	23.70	22.85
		1	14	24.03	23.59	22.70
		8	0	22.25	22.52	22.12
		8	3	22.33	22.83	21.91
		8	7	22.73	22.95	21.64
		15	0	22.51	22.62	21.84
	16QAM	1	0	22.93	22.18	22.10
		1	7	22.38	22.66	22.52
		1	14	22.58	23.02	22.28
		8	0	22.38	22.18	22.16
		8	3	22.28	22.44	22.29
		8	7	22.15	22.73	22.21
		15	0	21.24	21.56	21.11



Test Report No.: W7L-P23070009-2RF03

Band/BW	Modulation	RB Size	RB Offset	Low CH 23035	Mid CH 23095	High CH 23155
				Frequency 701.5 MHz	Frequency 707.5 MHz	Frequency 713.5 MHz
12/ 5	QPSK	1	0	23.72	22.94	22.78
		1	12	23.26	23.72	22.81
		1	24	24.03	23.58	22.63
		12	0	22.28	22.52	22.11
		12	6	22.41	22.85	21.96
		12	13	22.78	22.94	21.65
		25	0	22.59	22.62	21.94
	16QAM	1	0	22.99	22.11	22.16
		1	12	22.43	22.73	22.48
		1	24	22.69	23.02	22.23
		12	0	22.41	22.14	22.19
		12	6	22.18	22.49	22.24
		12	13	22.22	22.76	22.15
		25	0	21.22	21.54	21.17

Band/BW	Modulation	RB Size	RB Offset	Low CH 23060	Mid CH 23095	High CH 23130
				Frequency 704 MHz	Frequency 707.5 MHz	Frequency 711 MHz
12/ 10	QPSK	1	0	23.74	22.99	22.79
		1	24	23.34	23.76	22.87
		1	49	24.07	23.63	22.73
		25	0	22.36	22.55	22.15
		25	12	22.44	22.89	22.03
		25	25	22.85	22.95	21.69
		50	0	22.60	22.74	21.94
	16QAM	1	0	23.04	22.22	22.21
		1	24	22.47	22.78	22.55
		1	49	22.69	23.08	22.29
		12	0	22.50	22.22	22.20
		12	17	22.29	22.56	22.30
		12	36	22.26	22.77	22.26
		27	0	21.34	21.64	21.21





BUREAU  
VERITAS

Test Report No.: W7L-P23070009-2RF03

LTE Band 13

Band/BW	Modulation	RB Size	RB Offset	Low CH 23205	Mid CH 23230	High CH 23255
				Frequency 779.5 MHz	Frequency 782.0 MHz	Frequency 784.5 MHz
13/ 5	QPSK	1	0	23.45	23.51	23.54
		1	12	22.83	22.87	22.86
		1	24	23.16	23.16	23.19
		12	0	22.35	22.27	22.37
		12	6	22.17	22.14	22.17
		12	13	22.13	22.13	22.18
		25	0	22.27	22.28	22.25
	16QAM	1	0	22.73	22.76	22.84
		1	12	22.56	22.53	22.55
		1	24	22.24	22.29	22.23
		12	0	22.51	22.46	22.49
		12	6	22.32	22.41	22.31
		12	13	22.27	22.22	22.24
		25	0	21.34	21.33	21.31

Band/BW	Modulation	RB Size	RB Offset	/	Mid CH 23230	/
				/	Frequency 782.0 MHz	/
13/ 10	QPSK	1	0	/	23.55	/
		1	24	/	22.90	/
		1	49	/	23.20	/
		25	0	/	22.39	/
		25	12	/	22.22	/
		25	25	/	22.23	/
		50	0	/	22.30	/
	16QAM	1	0	/	22.85	/
		1	24	/	22.57	/
		1	49	/	22.33	/
		12	0	/	22.52	/
		12	17	/	22.43	/
		12	36	/	22.31	/
		27	0	/	21.38	/



**BUREAU  
VERITAS**

**Test Report No.: W7L-P23070009-2RF03**

**LTE Band 71**

Band/BW	Modulation	RB Size	RB Offset	Low CH 133147	Mid CH 133247	High CH 133447
				Frequency 665.5MHz	Frequency 675.5MHz	Frequency 695.5MHz
71/ 5	QPSK	1	0	23.73	23.81	23.35
		1	12	23.81	23.58	23.79
		1	24	23.37	23.44	23.73
		12	0	22.55	22.69	22.68
		12	6	22.71	22.78	22.98
		12	13	22.81	22.91	23.03
		25	0	22.72	22.79	22.79
	16QAM	1	0	23.00	23.10	22.87
		1	12	23.16	23.02	23.20
		1	24	22.61	22.94	23.05
		12	0	22.75	22.88	22.50
		12	6	22.59	22.95	22.65
		12	13	22.52	23.01	22.82
		25	0	21.68	21.65	21.62

Band/BW	Modulation	RB Size	RB Offset	Low CH 133172	Mid CH 133272	High CH 133172
				Frequency 668MHz	Frequency 678MHz	Frequency 693MHz
71/ 10	QPSK	1	0	23.65	23.80	23.35
		1	24	23.84	23.54	23.78
		1	49	23.29	23.49	23.70
		25	0	22.50	22.66	22.63
		25	12	22.64	22.76	22.93
		25	25	22.71	22.87	23.01
		50	0	22.73	22.79	22.80
	16QAM	1	0	22.96	23.12	22.93
		1	24	23.23	22.98	23.18
		1	49	22.62	23.04	23.13
		12	0	22.67	22.91	22.48
		12	17	22.63	23.01	22.58
		12	36	22.60	23.06	22.89
		27	0	21.58	21.67	21.62

Band/BW	Modulation	RB Size	RB Offset	Low CH 133197	Mid CH 133297	High CH 133397
				Frequency 670.5MHz	Frequency 680.5MHz	Frequency 690.5MHz
71/ 15	QPSK	1	0	23.75	23.72	23.34
		1	37	23.81	23.57	23.77
		1	74	23.38	23.45	23.75
		36	0	22.60	22.72	22.69
		36	19	22.68	22.73	22.92
		36	39	22.72	22.93	23.05
		75	0	22.68	22.74	22.86
	16QAM	1	0	22.95	23.05	22.90
		1	37	23.17	23.07	23.12
		1	74	22.63	22.96	23.13
		12	0	22.77	22.87	22.48
		12	30	22.68	22.98	22.60
		12	61	22.51	23.07	22.83
		27	0	21.60	21.70	21.58

Band/BW	Modulation	RB Size	RB Offset	Low CH 133222	Mid CH 133322	High CH 133372
				Frequency 673MHz	Frequency 683MHz	Frequency 688MHz
71/ 20	QPSK	1	0	23.77	23.81	23.39
		1	50	23.87	23.61	23.85
		1	99	23.41	23.54	23.75
		50	0	22.61	22.73	22.71
		50	25	22.73	22.80	23.00
		50	50	22.82	22.96	23.08
		100	0	22.76	22.83	22.89
	16QAM	1	0	23.06	23.15	22.96
		1	50	23.23	23.10	23.22
		1	99	22.70	23.05	23.13
		12	0	22.78	22.99	22.52
		12	42	22.70	23.05	22.68
		12	86	22.62	23.10	22.93
		27	0	21.70	21.77	21.66



BUREAU  
VERITAS

Test Report No.: W7L-P23070009-2RF03

EIRP

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	24.04	0.22	22.11	162.55	3
23095	707.5	23.85	0.22	21.92	155.6	3
23173	715.3	23.1	0.22	21.17	130.92	3

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	23.49	0.22	21.56	143.22	3
23095	707.5	23.73	0.22	21.8	151.36	3
23173	715.3	23.22	0.22	21.29	134.59	3

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	24.03	0.22	22.1	162.18	3
23095	707.5	23.7	0.22	21.77	150.31	3
23165	714.5	22.85	0.22	20.92	123.59	3

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	22.93	0.22	21	125.89	3
23095	707.5	23.02	0.22	21.09	128.53	3
23165	714.5	22.52	0.22	20.59	114.55	3

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	24.03	0.22	22.1	162.18	3
23095	707.5	23.72	0.22	21.79	151.01	3
23155	713.5	22.81	0.22	20.88	122.46	3

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	22.99	0.22	21.06	127.64	3
23095	707.5	23.02	0.22	21.09	128.53	3
23155	713.5	22.48	0.22	20.55	113.5	3

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	24.07	0.22	22.14	163.68	3
23095	707.5	23.76	0.22	21.83	152.41	3
23130	711	22.87	0.22	20.94	124.17	3

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	23.04	0.22	21.11	129.12	3
23095	707.5	23.08	0.22	21.15	130.32	3
23130	711	22.55	0.22	20.62	115.35	3

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



BUREAU  
VERITAS

Test Report No.: W7L-P23070009-2RF03

**LTE BAND 13**

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	23.45	2.23	23.53	225.42	3
23230	782	23.51	2.23	23.59	228.56	3
23255	784.5	23.54	2.23	23.62	230.14	3

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	22.73	2.23	22.81	190.99	3
23230	782	22.76	2.23	22.84	192.31	3
23255	784.5	22.84	2.23	22.92	195.88	3

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
-	-	-	-	-	-	-
23230	782	23.55	2.23	23.63	230.67	3
-	-	-	-	-	-	-

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
-	-	-	-	-	-	-
23230	782	22.85	2.23	22.93	196.34	3
-	-	-	-	-	-	-

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

**LTE BAND 71**

**CHANNEL BANDWIDTH: 5MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133147	665.5	23.81	0.22	21.88	154.17	3
133297	680.5	23.81	0.22	21.88	154.17	3
133447	695.5	23.79	0.22	21.86	153.46	3

**CHANNEL BANDWIDTH: 5MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133147	665.5	23.16	0.22	21.23	132.74	3
133297	680.5	23.1	0.22	21.17	130.92	3
133447	695.5	23.2	0.22	21.27	133.97	3

**CHANNEL BANDWIDTH: 10MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133172	668	23.84	0.22	21.91	155.24	3
133297	680.5	23.8	0.22	21.87	153.82	3
133422	693	23.78	0.22	21.85	153.11	3

**CHANNEL BANDWIDTH: 10MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133172	668	23.23	0.22	21.3	134.9	3
133297	680.5	23.12	0.22	21.19	131.52	3
133422	693	23.18	0.22	21.25	133.35	3

**CHANNEL BANDWIDTH: 15MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133197	670.5	23.81	0.22	21.88	154.17	3
133297	680.5	23.72	0.22	21.79	151.01	3
133397	690.5	23.77	0.22	21.84	152.76	3

**CHANNEL BANDWIDTH: 15MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133197	670.5	23.17	0.22	21.24	133.05	3
133297	680.5	23.07	0.22	21.14	130.02	3
133397	690.5	23.13	0.22	21.2	131.83	3

**CHANNEL BANDWIDTH: 20MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133222	673	23.87	0.22	21.94	156.31	3
133322	683	23.81	0.22	21.88	154.17	3
133372	688	23.85	0.22	21.92	155.6	3

**CHANNEL BANDWIDTH: 20MHz 16QAM**

Channel	Frequency (MHz)	Conducted Power (dBm)	G <sub>T</sub> -L <sub>c</sub> (dB)	ERP (dBm)	ERP (mW)	Limit (W)
133222	673	23.23	0.22	21.3	134.9	3
133322	683	23.15	0.22	21.22	132.43	3
133372	688	23.22	0.22	21.29	134.59	3

**REMARKS:** ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



## 3.2 FREQUENCY STABILITY MEASUREMENT

### 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 3.2.3 TEST SETUP

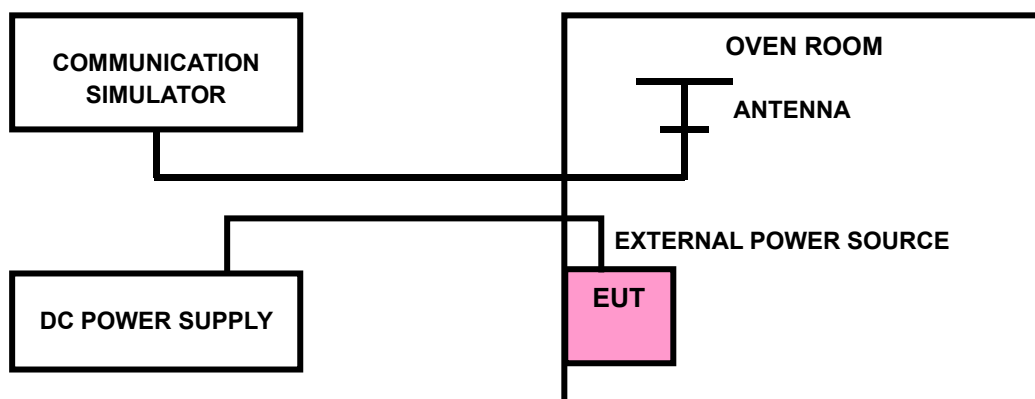



Test Report No.: W7L-P23070009-2RF03

### 3.2.4 TEST RESULTS

Refers to the data of W7L-P23070009RF03 (FCC ID: 2AJYU-8XS0001, model: SIM7672G) .


Note: VL = Low voltage(3.2V); VN/NV = Normal voltage(3.8V); VH = High voltage(4.2V);  
NT = Normal temperature (25°C)

### 3.3 OCCUPIED BANDWIDTH MEASUREMENT

#### 3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### 3.3.2 TEST SETUP

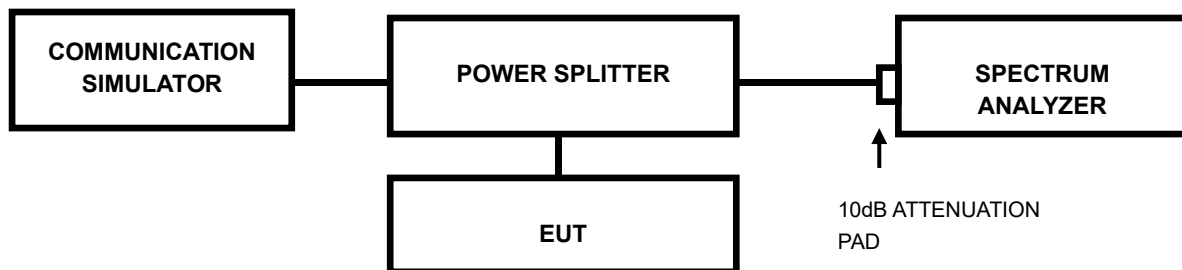

#### 3.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: W7L-P23070009-2RF03

### 3.3.4 TEST RESULTS

Refers to the data of W7L-P23070009RF03 (FCC ID: 2AJYU-8XS0001, model: SIM7672G) .

### 3.4 BAND EDGE MEASUREMENT

#### 3.4.1 LIMITS OF BAND EDGE MEASUREMENT


According to FCC 27.53(c) specified that For operations in the 746-758 MHz band and the 776-788 MHz band , the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emission in a 6.25kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power,  $P(\text{dBW})$ , by at least  $65 + 10 \log 10 P(\text{P})$ , dB, for mobile and portable equipment.

According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

### 3.4.2 TEST SETUP

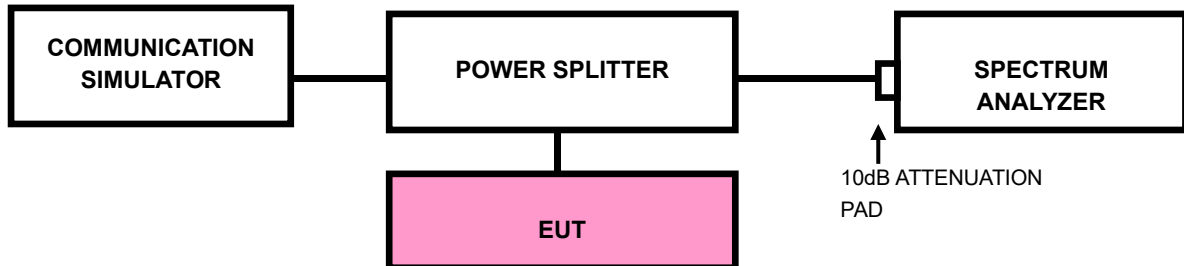

### 3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW)
- d) .Set the resolution bandwidth (RBW)  $\cong$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to  $\cong$  3 x RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to  $\cong$  1001.
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.



Test Report No.: W7L-P23070009-2RF03

#### 3.4.4 TEST RESULTS

Refers to the data of W7L-P23070009RF03 (FCC ID: 2AJYU-8XS0001, model: SIM7672G) .



### 3.5 CONDUCTED SPURIOUS EMISSIONS

#### 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

For: LTE Band7

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $55 + 10 \log_{10}(P)$  dB. The limit of emission is equal to  $-25\text{dBm}$ .


For: LTE Band30

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $70 + 10 \log_{10}(P)$  dB. The limit of emission is equal to  $-40\text{dBm}$ .

#### 3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10<sup>th</sup> harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

#### 3.5.3 TEST SETUP

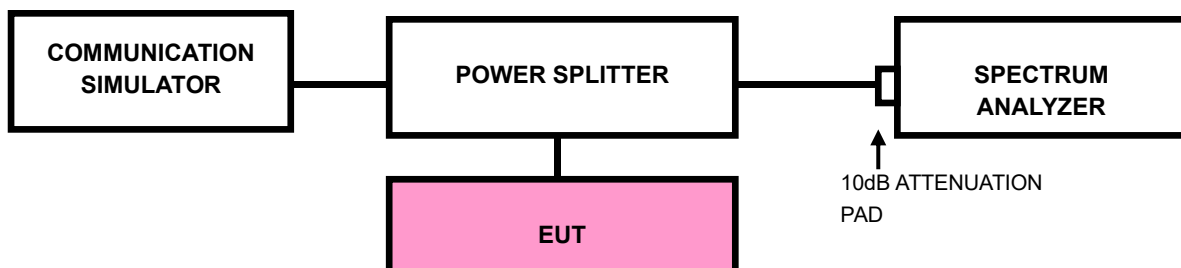



**BUREAU  
VERITAS**

**Test Report No.: W7L-P23070009-2RF03**

### 3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Refers to the data of W7L-P23070009RF03 (FCC ID: 2AJYU-8XS0001, model: SIM7672G) .



### 3.6 RADIATED EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

For: LTE Band7/ Band41

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $55 + 10 \log_{10}(P)$  dB. The limit of emission is equal to  $-25\text{dBm}$ .

#### 3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$ .


**NOTE:** The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

#### 3.6.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.6.4 TEST SETUP

#### < Frequency Range below 30MHz >

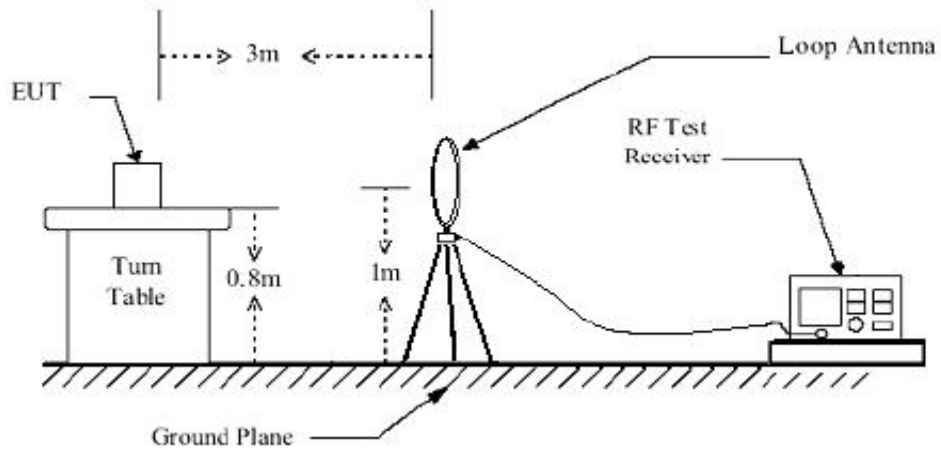

#### < Frequency Range 30MHz~1GHz >

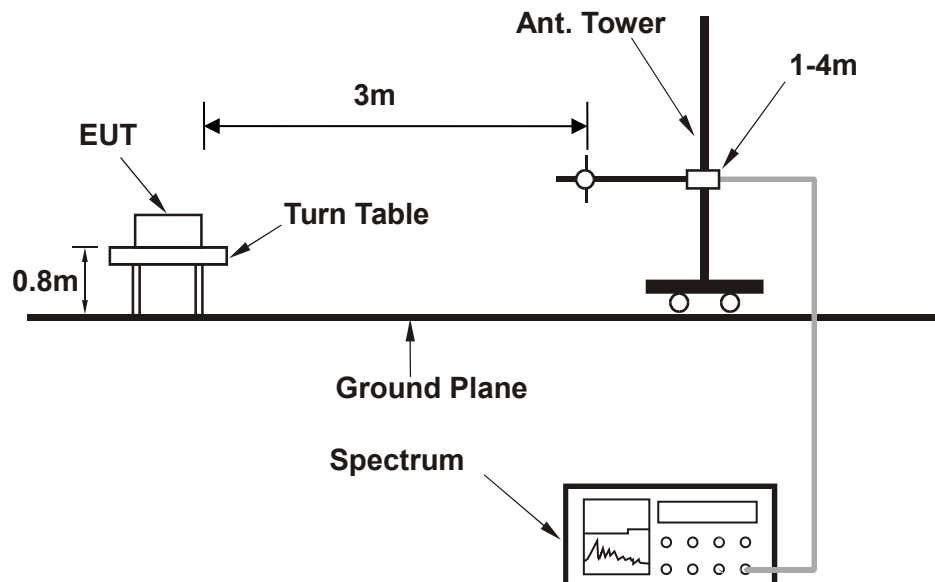




BUREAU  
VERITAS

Test Report No.: W7L-P23070009-2RF03

<Frequency Range above 1GHz>

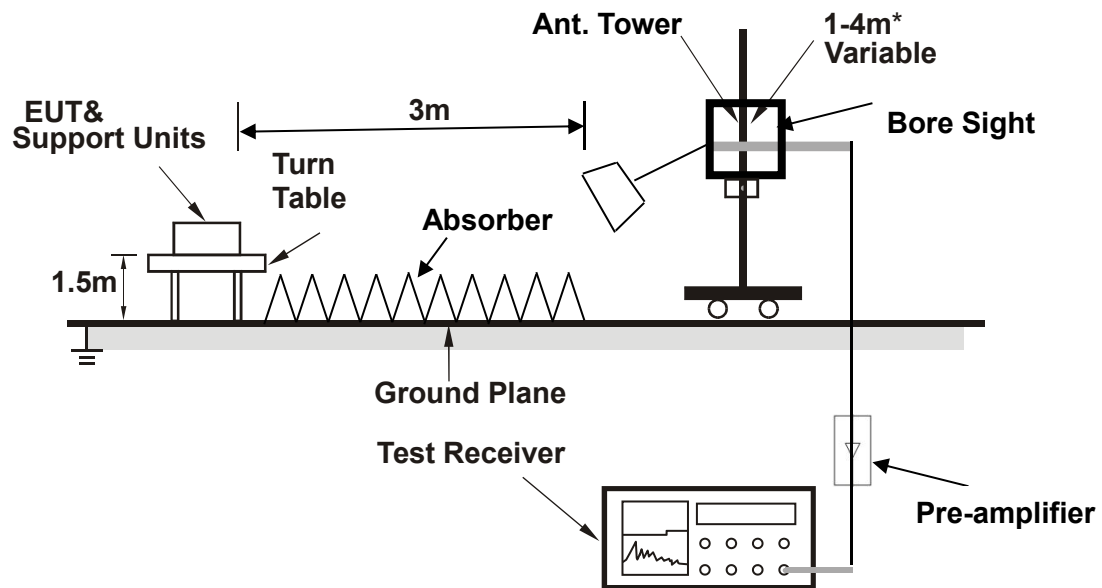

**Note:** Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



### 3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

#### BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 13

CHANNEL BANDWIDTH: 5MHz / QPSK

<b>MODE</b>	TX channel 23230	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	37.350	-61.61	-13.00	48.61	6.73	H	4.9	1
1	46.850	-65.25	-13.00	52.25	3.07	H	359.1	1
1	98.750	-76.15	-13.00	63.15	-4.49	H	167	2
1	190.600	-74.21	-13.00	61.21	1.46	H	0.9	2
1	231.450	-69.90	-13.00	56.90	7.89	H	345.2	1
1	435.250	-69.20	-13.00	56.20	7.24	H	134.8	2

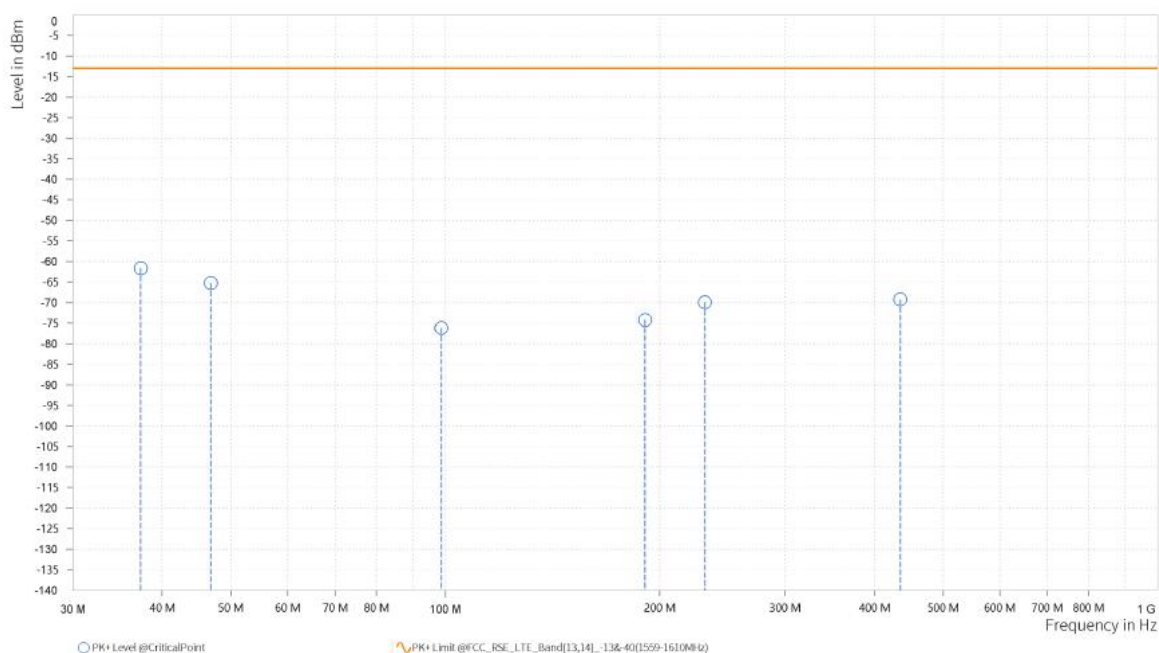




Test Report No.: W7L-P23070009-2RF03

<b>MODE</b>	TX channel 23230	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	32.950	-68.47	-13.00	55.47	0.10	V	304.1	1
1	58.250	-67.68	-13.00	54.68	3.14	V	135.9	2
1	99.950	-60.15	-13.00	47.15	11.18	V	69.8	1
1	112.150	-64.04	-13.00	51.04	7.78	V	261	1
1	202.000	-74.84	-13.00	61.84	0.16	V	356.5	1
1	335.950	-72.53	-13.00	59.53	5.83	V	10.1	2

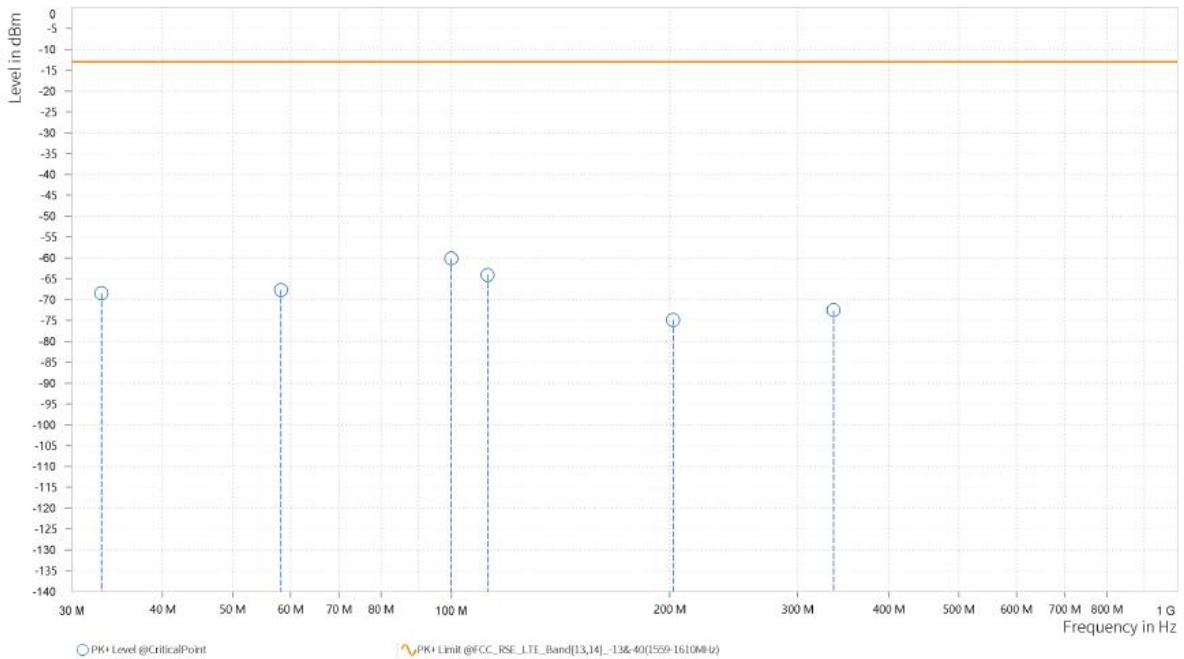



BUREAU  
VERITAS

Test Report No.: W7L-P23070009-2RF03

**ABOVE 1GHz**


**Note:** For higher frequency, the emission is too low to be detected.

**LTE BAND 12**

**CHANNEL BANDWIDTH: 1.4MHz / QPSK**

<b>MODE</b>	TX channel 23095	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1413.000	-45.85	-45.20	-13.00	-32.85	-0.65	Peak	Horizontal
2	2122.500	-54.50	-58.56	-13.00	-41.50	4.06	Peak	Horizontal

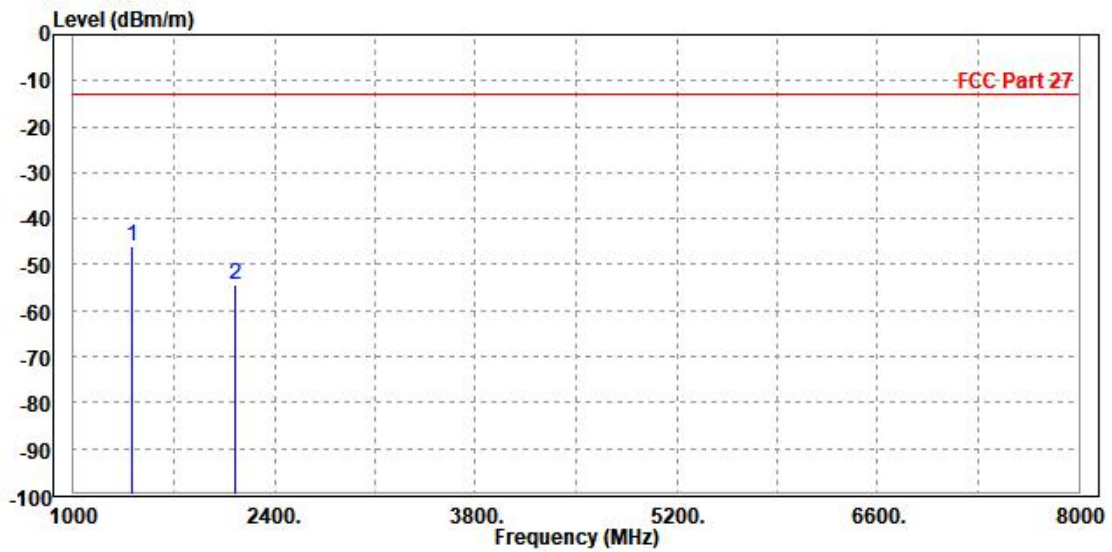






Test Report No.: W7L-P23070009-2RF03

<b>MODE</b>	TX channel 23095	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1415.000	-45.16	-44.75	-13.00	-32.16	-0.41	Peak	Vertical
2	2120.000	-54.40	-58.31	-13.00	-41.40	3.91	Peak	Vertical

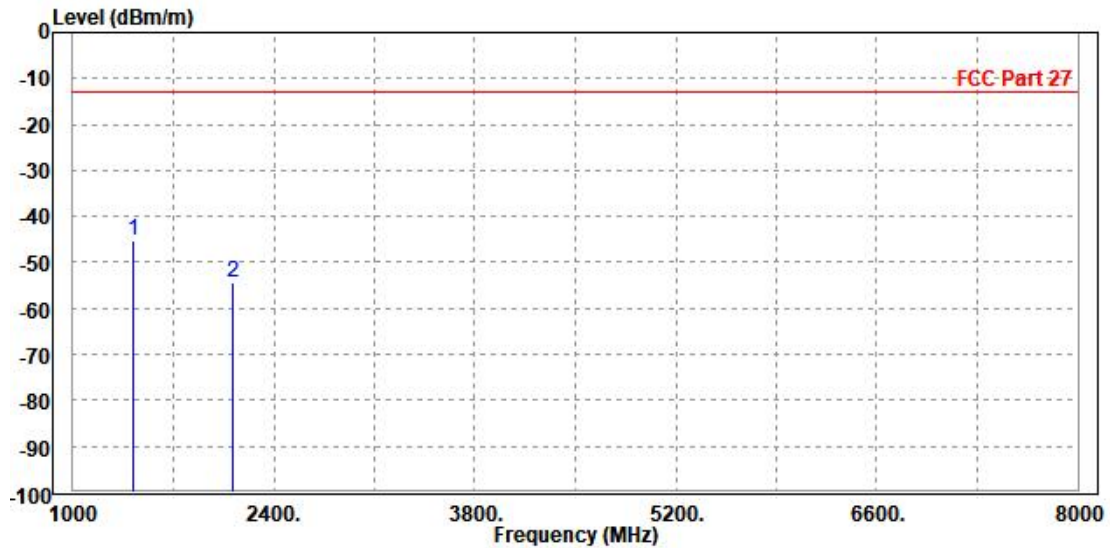




**BUREAU  
VERITAS**

**Test Report No.: W7L-P23070009-2RF03**

**CHANNEL BANDWIDTH: 3MHz / QPSK**

<b>MODE</b>	TX channel 23095	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Read	Limit	Over				
Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP 1415.000	-43.95	-43.30	-13.00	-30.95	-0.65	Peak	Horizontal
2 2120.000	-54.25	-58.31	-13.00	-41.25	4.06	Peak	Horizontal

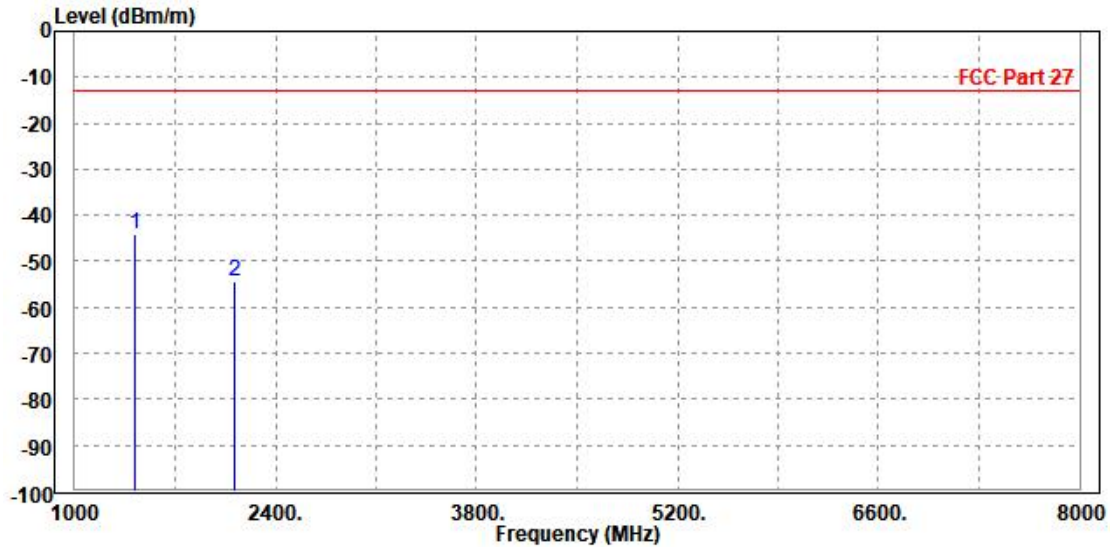




Test Report No.: W7L-P23070009-2RF03

<b>MODE</b>	TX channel 23095	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1413.000	-46.02	-45.60	-13.00	-33.02	-0.42	Peak	Vertical
2	2122.500	-54.36	-58.28	-13.00	-41.36	3.92	Peak	Vertical

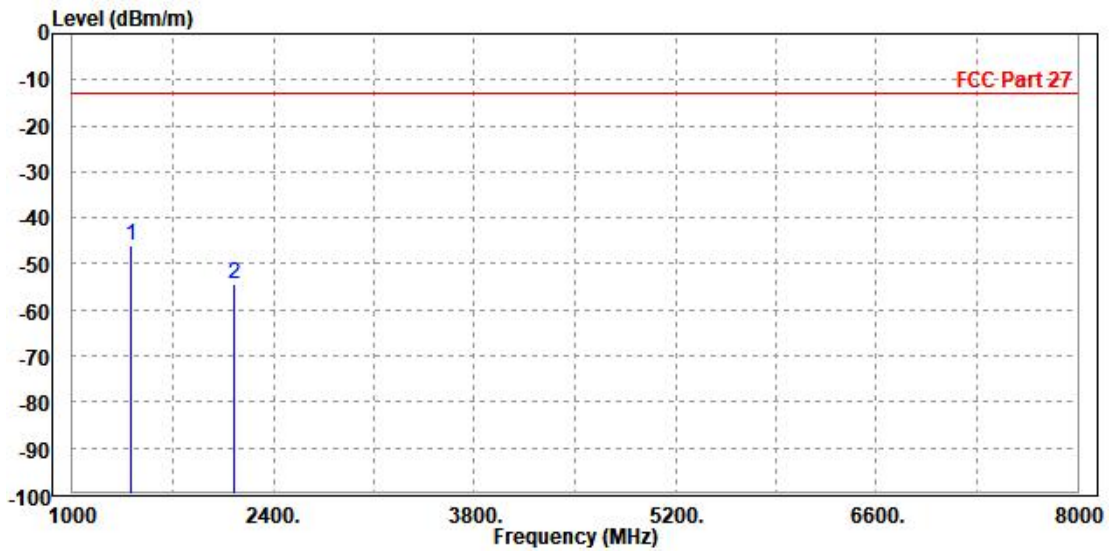




Test Report No.: W7L-P23070009-2RF03

**CHANNEL BANDWIDTH: 5MHz / QPSK**

<b>MODE</b>	TX channel 23095	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1413.000	-45.60	-44.95	-13.00	-32.60	-0.65	Peak	Horizontal
2	2122.500	-54.59	-58.65	-13.00	-41.59	4.06	Peak	Horizontal

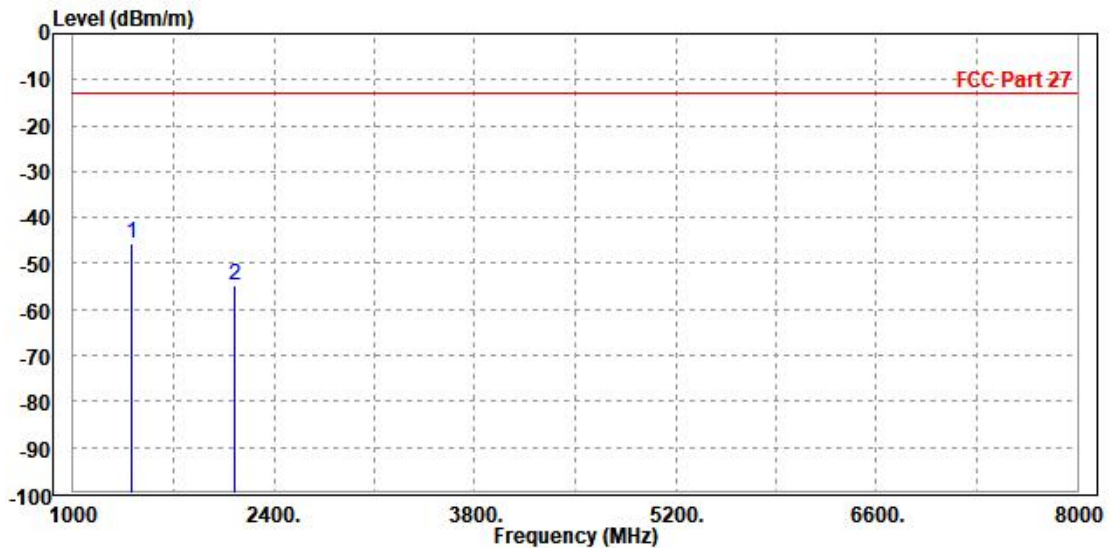




Test Report No.: W7L-P23070009-2RF03

<b>MODE</b>	TX channel 23095	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

		Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP 1415.000	-42.74	-42.33	-13.00	-29.74	-0.41	Peak	Vertical
2 2120.000	-55.50	-59.41	-13.00	-42.50	3.91	Peak	Vertical

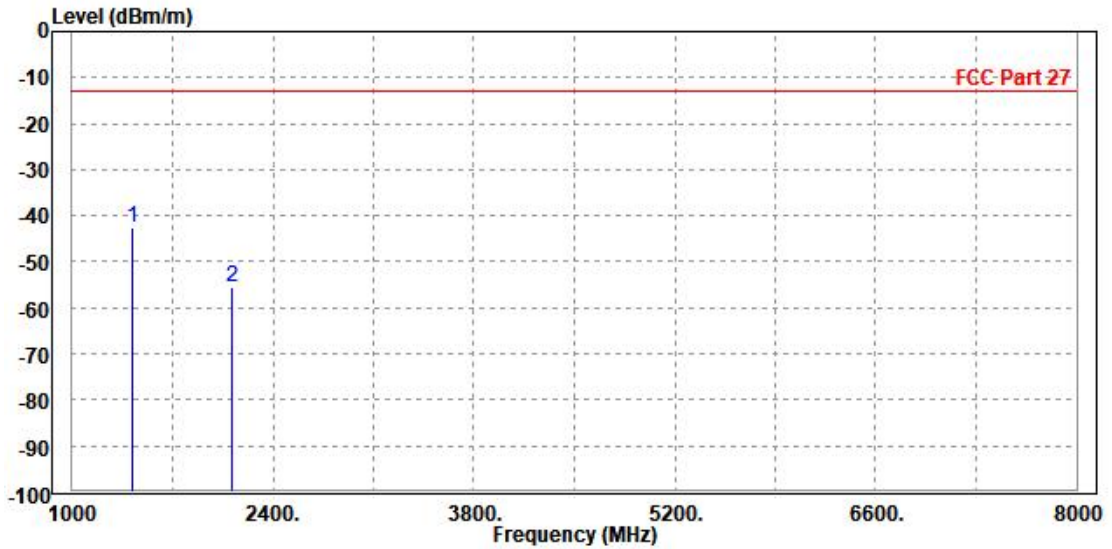




Test Report No.: W7L-P23070009-2RF03

CHANNEL BANDWIDTH: 10MHz / QPSK

CH23060

MODE	TX channel 23060	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1408.000	-49.94	-49.28	-13.00	-36.94	-0.66	Peak	Horizontal
2	2113.000	-55.10	-59.13	-13.00	-42.10	4.03	Peak	Horizontal

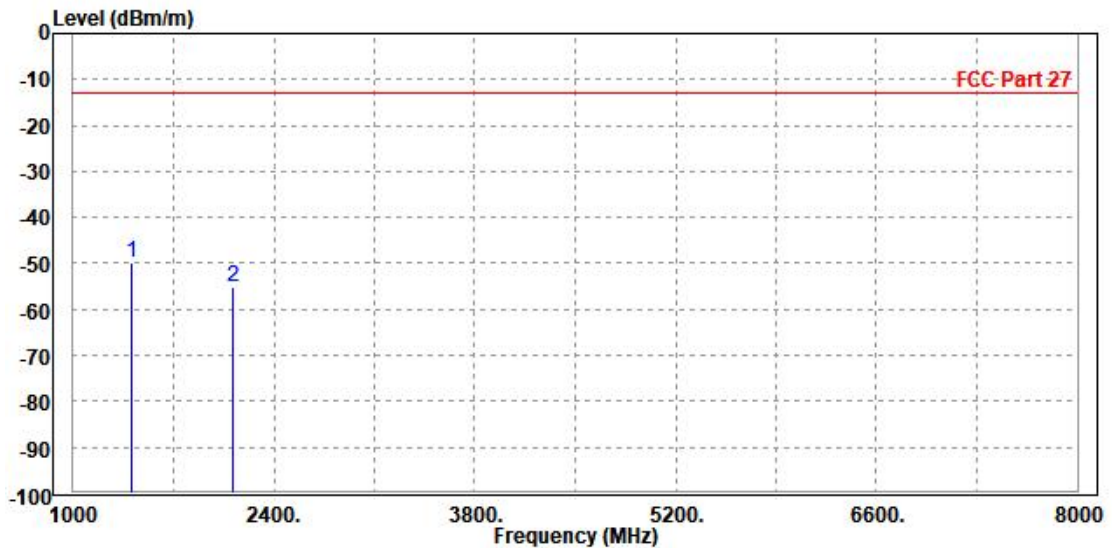




Test Report No.: W7L-P23070009-2RF03

MODE	TX channel 23060	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1413.000	-45.74	-45.32	-13.00	-32.74	-0.42	Peak	Vertical
2	2122.500	-55.34	-59.26	-13.00	-42.34	3.92	Peak	Vertical

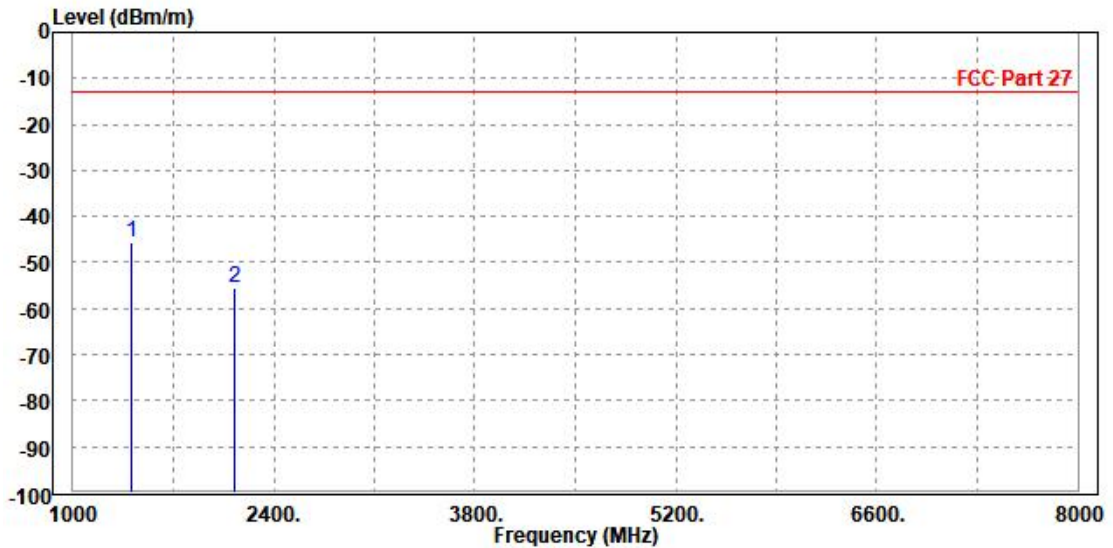




**BUREAU  
VERITAS**

**Test Report No.: W7L-P23070009-2RF03**

**CH23095**

<b>MODE</b>	TX channel 23095	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1413.000	-45.19	-44.54	-13.00	-32.19	-0.65	Peak	Horizontal
2	2122.500	-53.81	-57.87	-13.00	-40.81	4.06	Peak	Horizontal

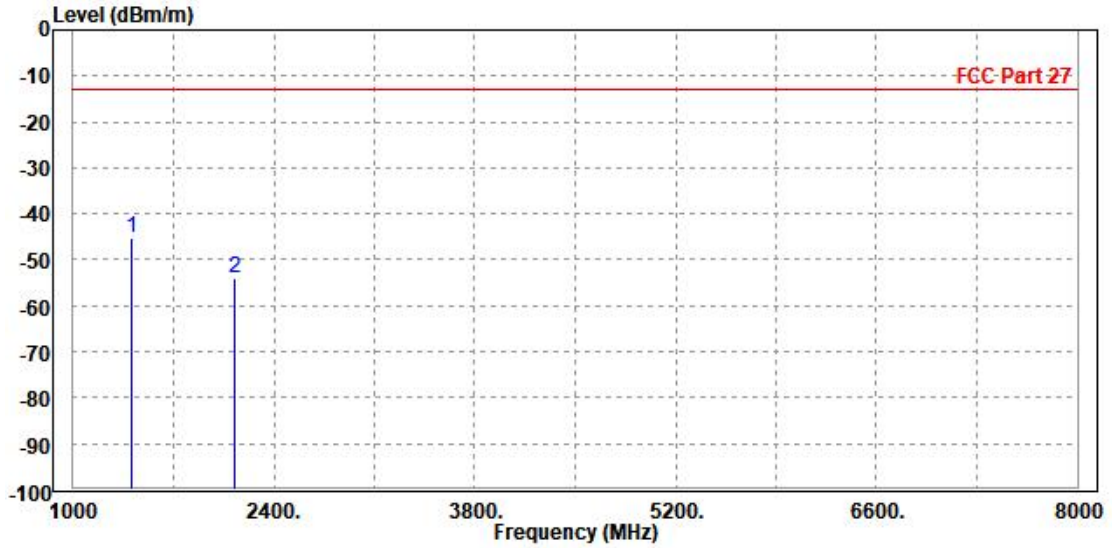






Test Report No.: W7L-P23070009-2RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1415.000	-41.88	-41.47	-13.00	-28.88	-0.41	Peak	Vertical
2	2120.000	-55.22	-59.13	-13.00	-42.22	3.91	Peak	Vertical

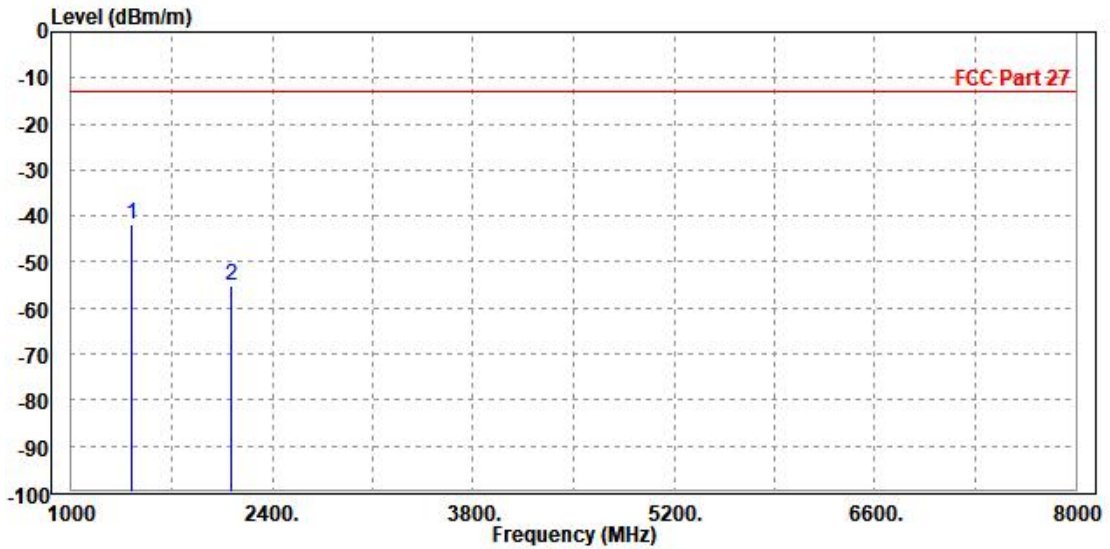




**BUREAU  
VERITAS**

Test Report No.: W7L-P23070009-2RF03

CH23130

<b>MODE</b>	TX channel 23130	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1420.000	-45.41	-44.78	-13.00	-32.41	-0.63	Peak	Horizontal
2	2133.000	-54.83	-58.93	-13.00	-41.83	4.10	Peak	Horizontal

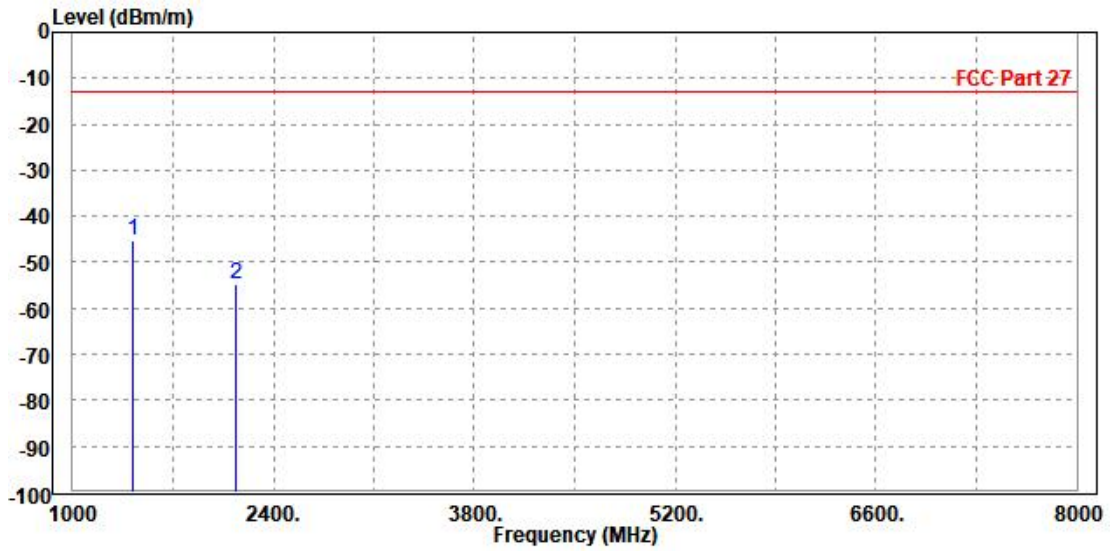




Test Report No.: W7L-P23070009-2RF03

MODE	TX channel 23130	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1422.000	-45.41	-45.03	-13.00	-32.41	-0.38	Peak	Vertical
2	2134.000	-55.26	-59.21	-13.00	-42.26	3.95	Peak	Vertical

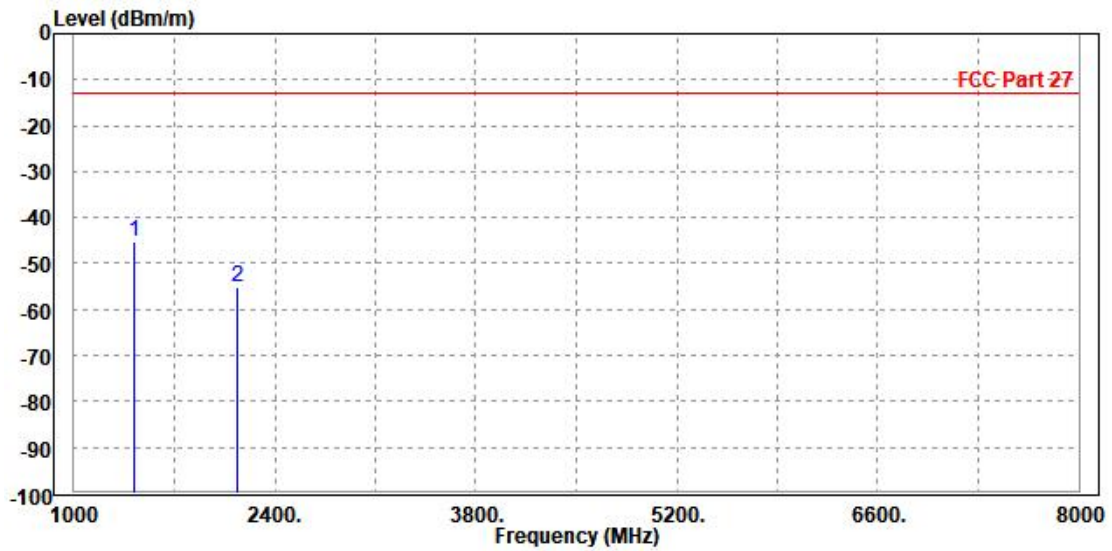



Test Report No.: W7L-P23070009-2RF03


LTE B13

CHANNEL BANDWIDTH: 5MHz / QPSK

CH 23205

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1559.000	-45.15	-45.20	-40.00	-5.15	0.05	Peak	Horizontal
2	2337.000	-53.43	-58.28	-13.00	-40.43	4.85	Peak	Horizontal

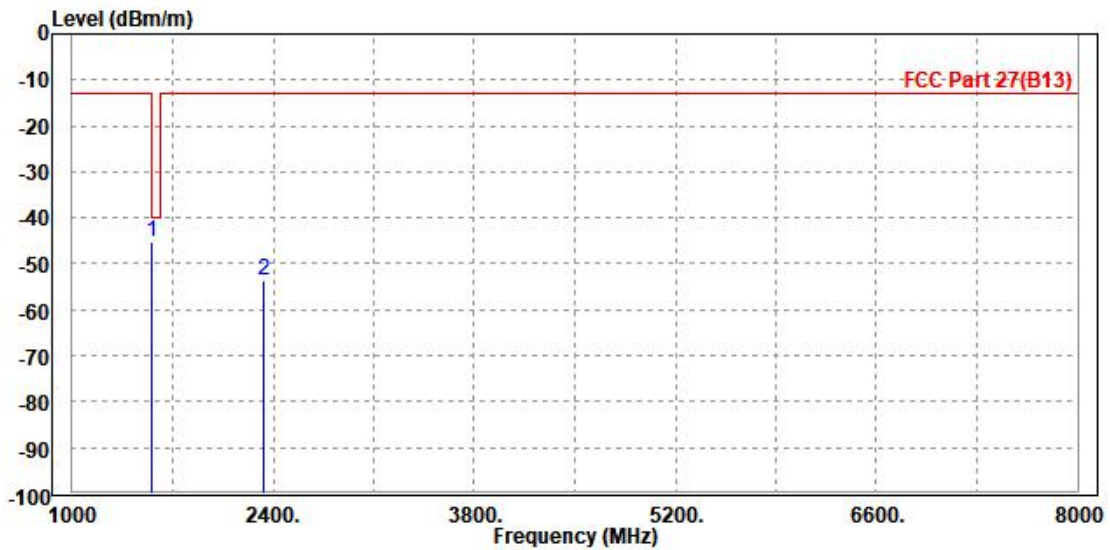




Test Report No.: W7L-P23070009-2RF03

<b>MODE</b>	TX channel 23205	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1560.000	-47.87	-48.27	-40.00	-7.87	0.40	Peak	Vertical
2	2338.500	-54.34	-58.84	-13.00	-41.34	4.50	Peak	Vertical

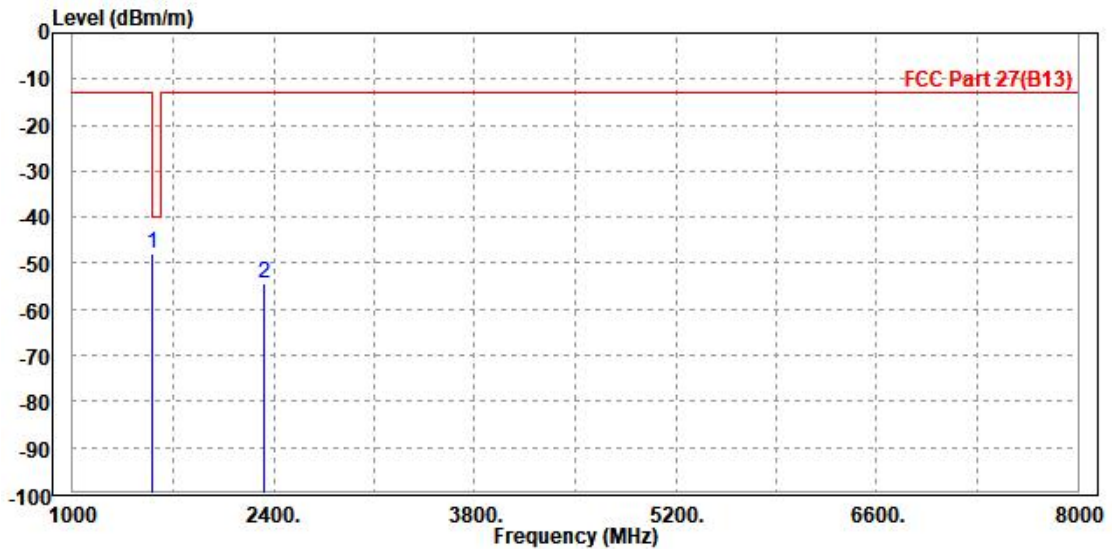




BUREAU  
VERITAS

Test Report No.: W7L-P23070009-2RF03

CH 23230

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1567.000	-45.69	-45.81	-40.00	-5.69	0.12	Peak	Horizontal
2	2346.000	-53.99	-58.87	-13.00	-40.99	4.88	Peak	Horizontal

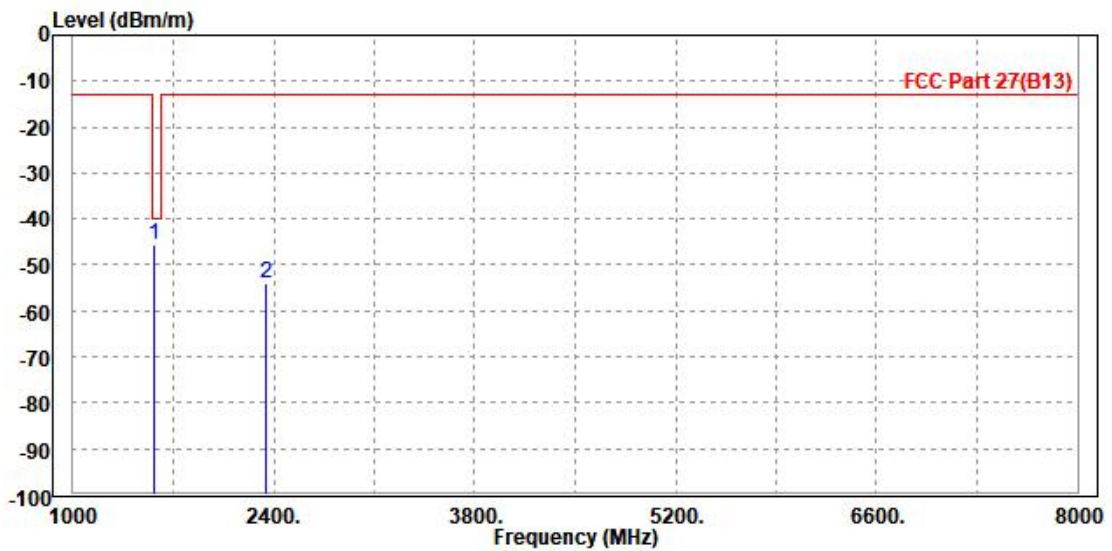




Test Report No.: W7L-P23070009-2RF03

<b>MODE</b>	TX channel 23230	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Chao Wu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1564.000	-46.20	-46.63	-40.00	-6.20	0.43	Peak	Vertical
2	2344.000	-54.58	-59.10	-13.00	-41.58	4.52	Peak	Vertical

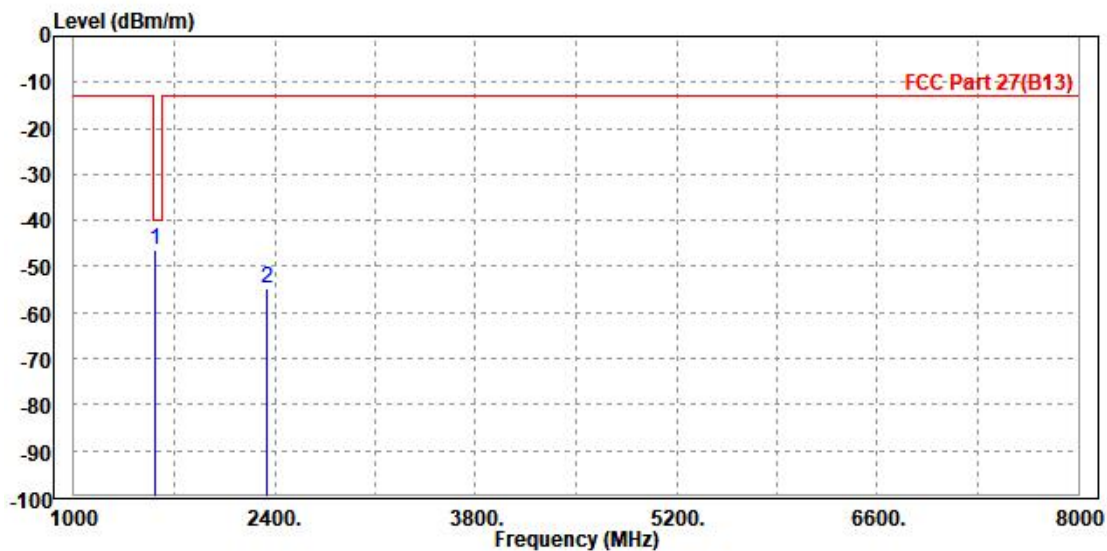




BUREAU  
VERITAS

Test Report No.: W7L-P23070009-2RF03

CH 23255

MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,564.500	-60.90	-40.00	20.90	13.31	H	4.3	2
3	2,346.750	-53.45	-13.00	40.45	20.68	H	299.3	1

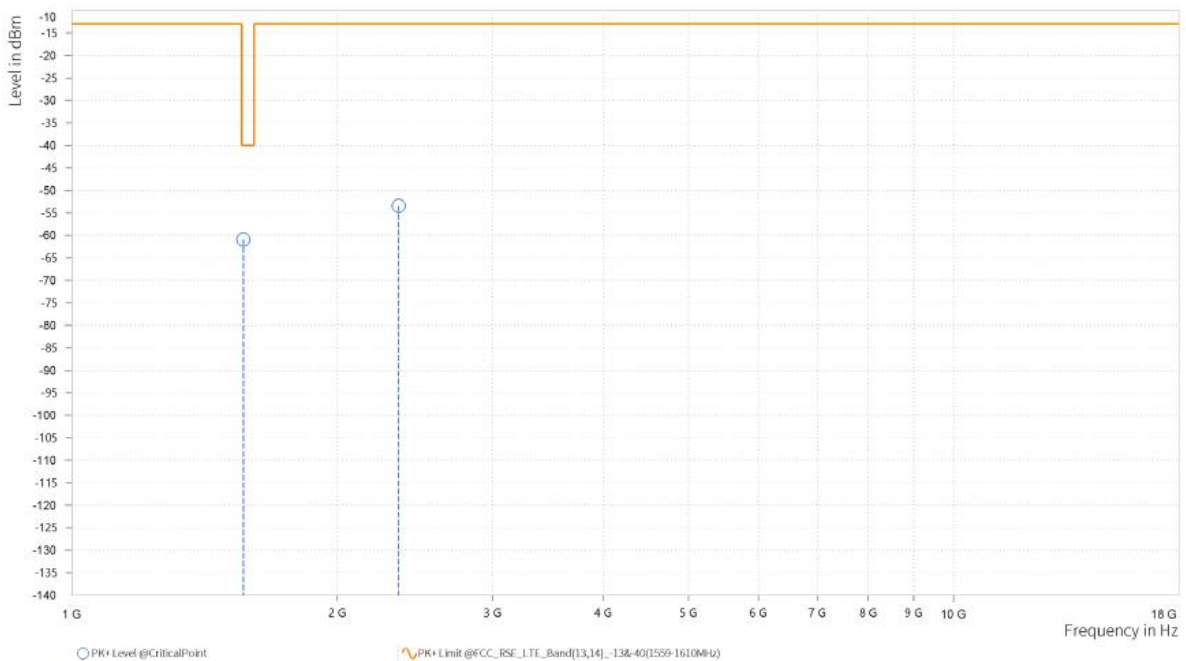






Test Report No.: W7L-P23070009-2RF03

<b>MODE</b>	TX channel 23255	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

Rg	Frequency [MHz]	PK+ Level [dBm]	PK+ Limit [dBm]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	1,564.500	-59.24	-40.00	19.24	14.73	V	359	2
3	2,346.750	-52.83	-13.00	39.83	20.88	V	1	1

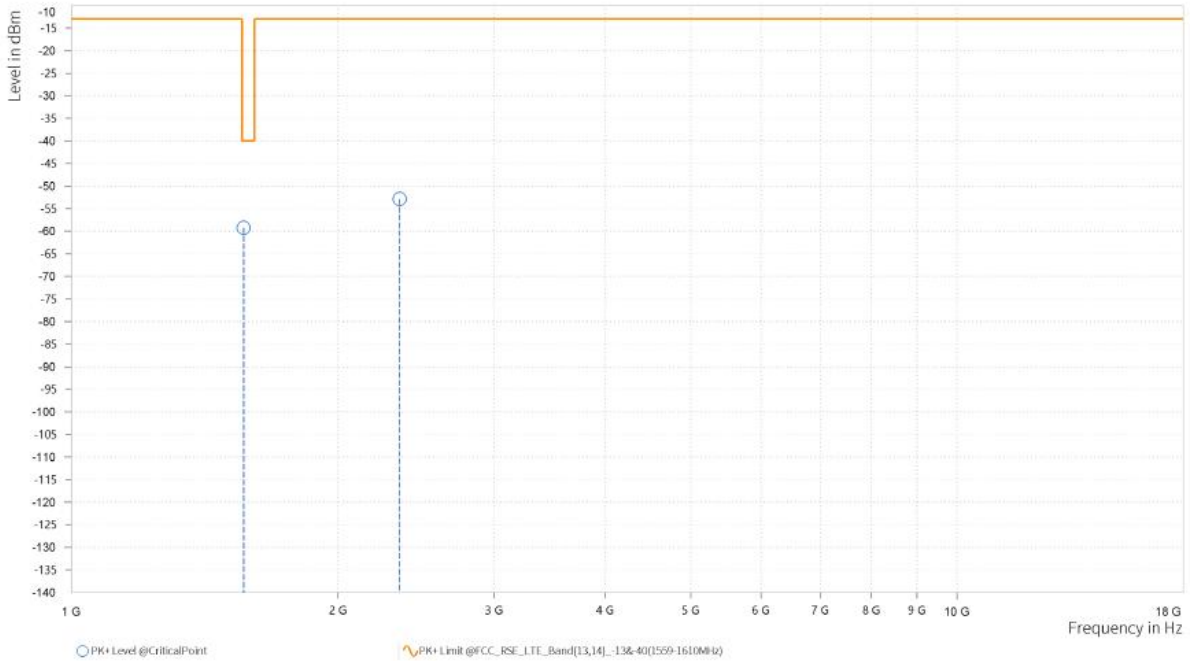




Test Report No.: W7L-P23070009-2RF03

**CHANNEL BANDWIDTH: 10MHz /QPSK**

<b>MODE</b>	TX channel 23230	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1567.000	-45.27	-45.39	-40.00	-5.27	0.12	Peak	Horizontal
2	2346.000	-53.72	-58.60	-13.00	-40.72	4.88	Peak	Horizontal

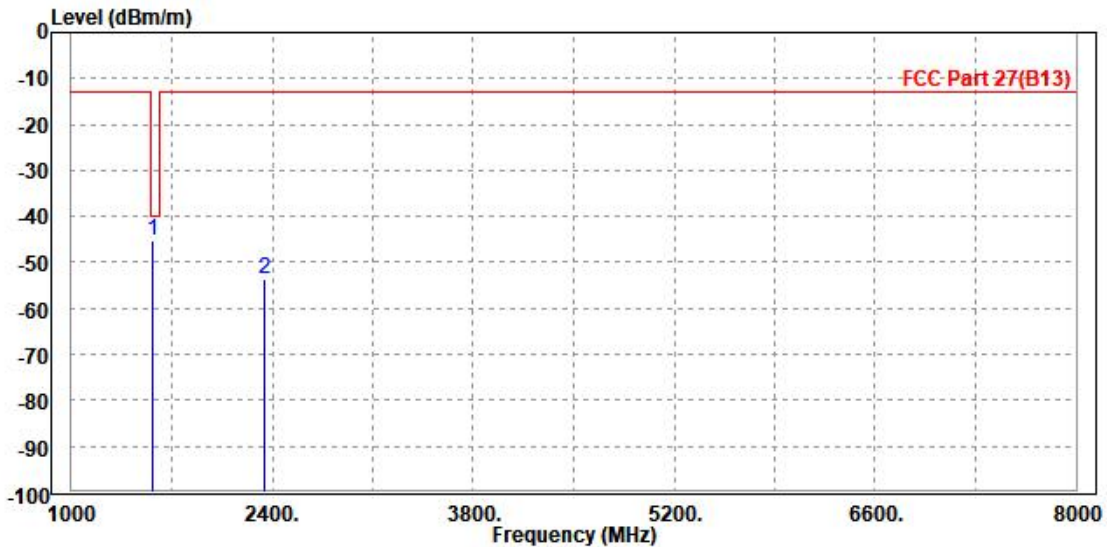




Test Report No.: W7L-P23070009-2RF03

<b>MODE</b>	TX channel 23230	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60HZ
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1564.000	-50.42	-50.85	-40.00	-10.42	0.43	Peak	Vertical
2	2344.000	-54.75	-59.27	-13.00	-41.75	4.52	Peak	Vertical

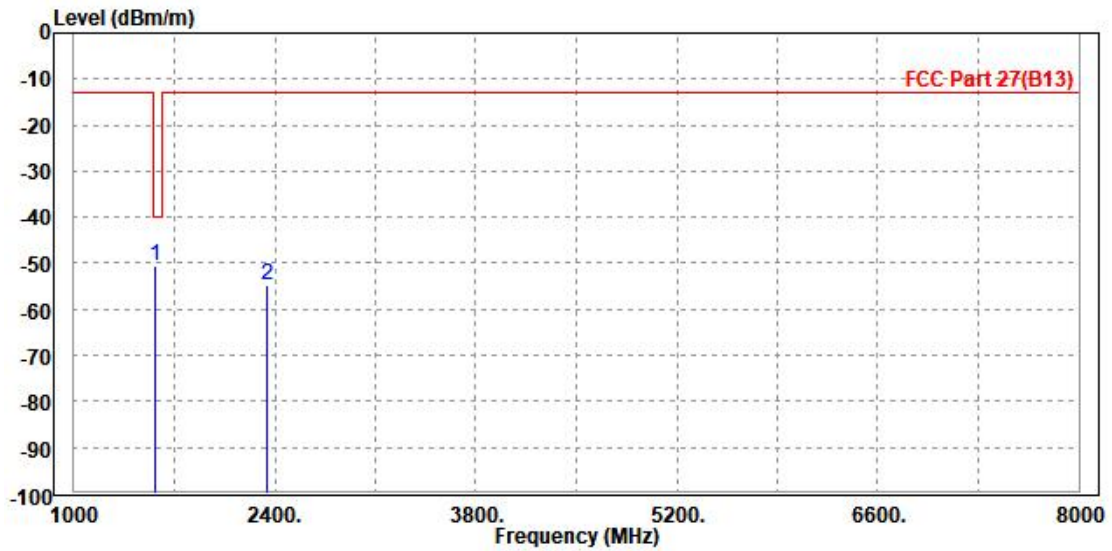




Test Report No.: W7L-P23070009-2RF03

LTE B71

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1361.000	-48.26	-47.47	-13.00	-35.26	-0.79	Peak	Horizontal
2	2044.000	-55.01	-58.79	-13.00	-42.01	3.78	Peak	Horizontal

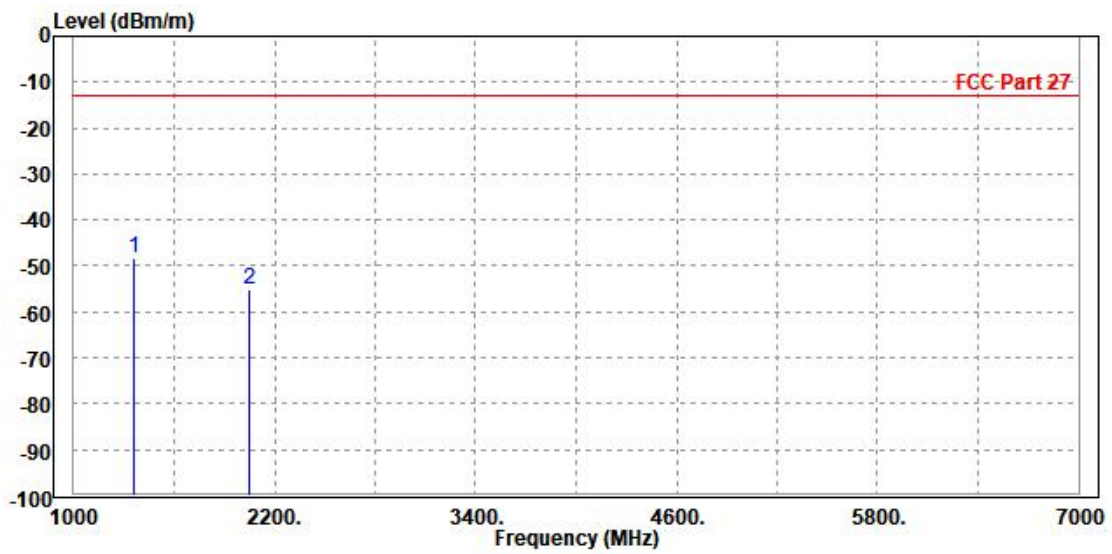




Test Report No.: W7L-P23070009-2RF03

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1360.000	-51.50	-50.85	-13.00	-38.50	-0.65	Peak	Vertical
2	2041.500	-54.33	-58.03	-13.00	-41.33	3.70	Peak	Vertical

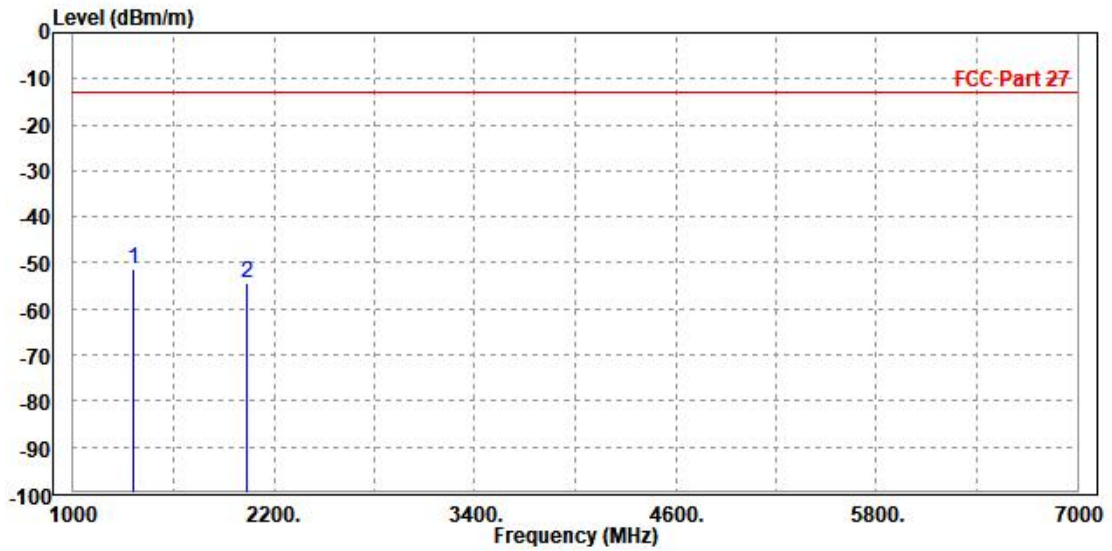




Test Report No.: W7L-P23070009-2RF03

CHANNEL BANDWIDTH: 10MHz / QPSK

CH 133172

MODE	TX channel 133172	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1336.000	-49.96	-49.11	-13.00	-36.96	-0.85	Peak	Horizontal
2	2004.000	-54.86	-58.49	-13.00	-41.86	3.63	Peak	Horizontal

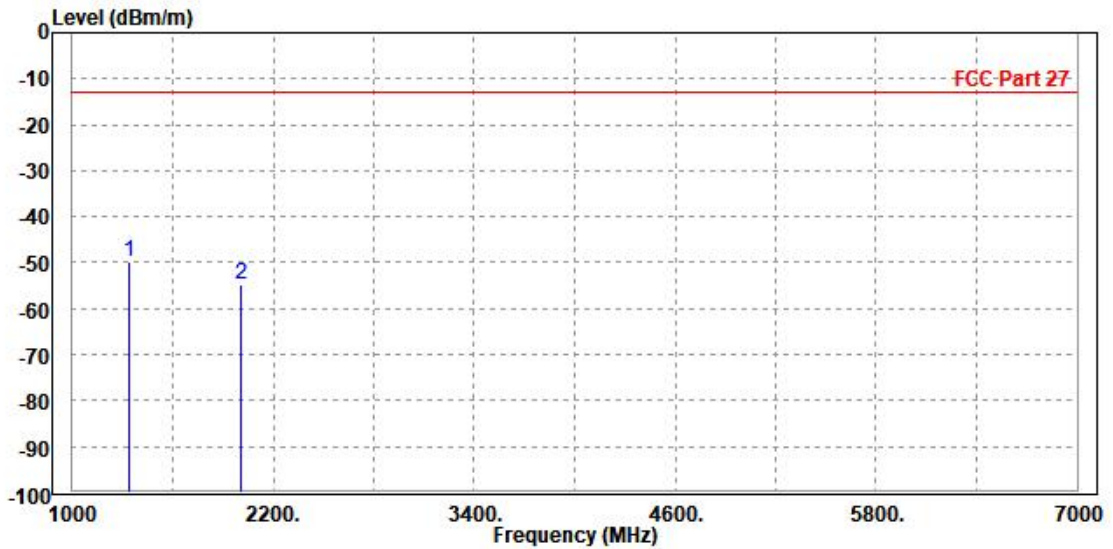




Test Report No.: W7L-P23070009-2RF03

MODE	TX channel 133172	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1336.000	-50.46	-49.71	-13.00	-37.46	-0.75	Peak	Vertical
2	2002.000	-54.97	-58.56	-13.00	-41.97	3.59	Peak	Vertical

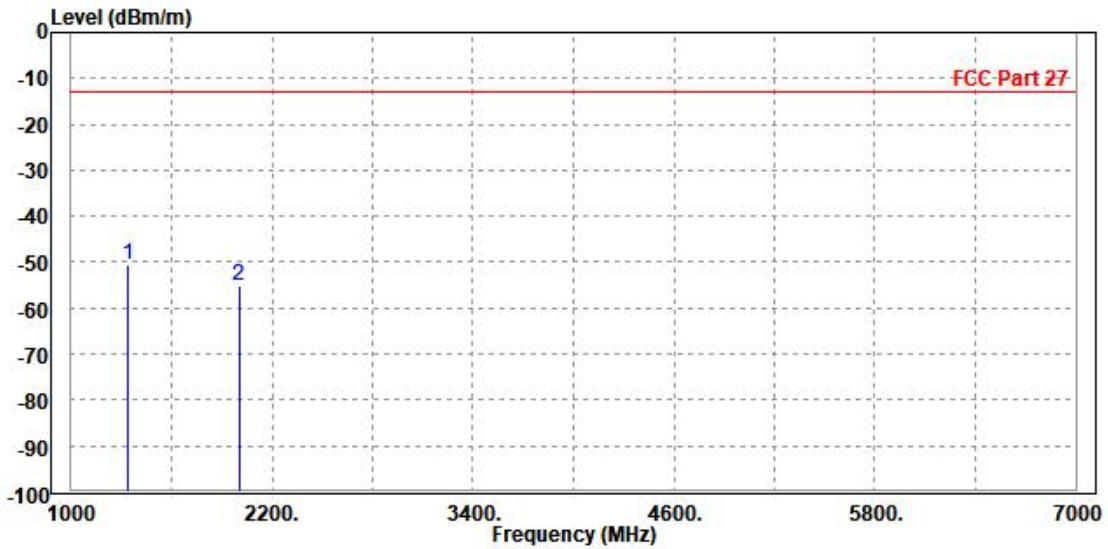




**BUREAU  
VERITAS**

Test Report No.: W7L-P23070009-2RF03

**CH 133297**

<b>MODE</b>	TX channel 133297	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1361.000	-46.06	-45.27	-13.00	-33.06	-0.79	Peak	Horizontal
2	2044.000	-55.58	-59.36	-13.00	-42.58	3.78	Peak	Horizontal

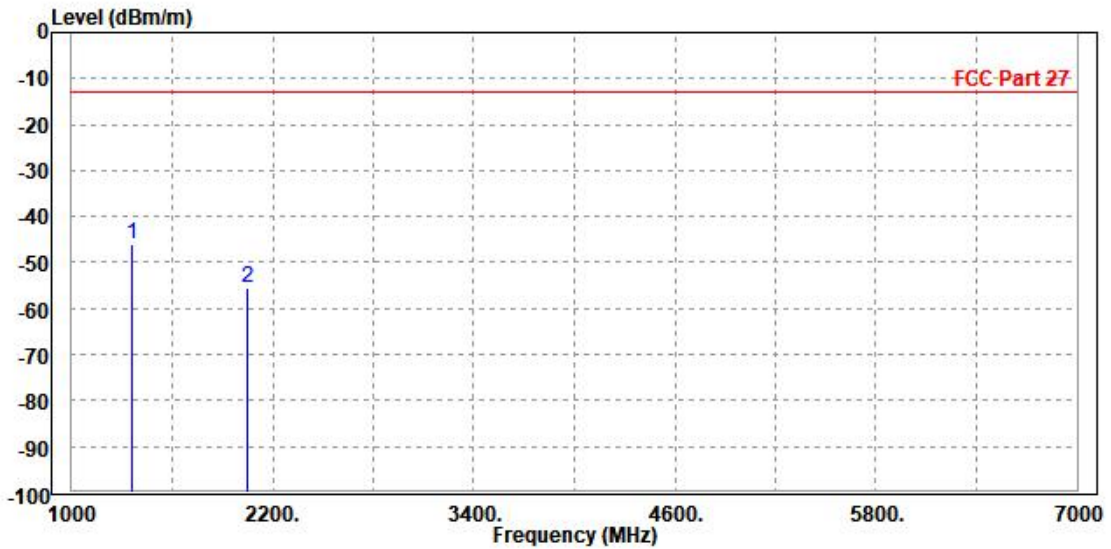






Test Report No.: W7L-P23070009-2RF03

MODE	TX channel 133297	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1360.000	-50.32	-49.67	-13.00	-37.32	-0.65	Peak	Vertical
2	2041.500	-54.58	-58.28	-13.00	-41.58	3.70	Peak	Vertical

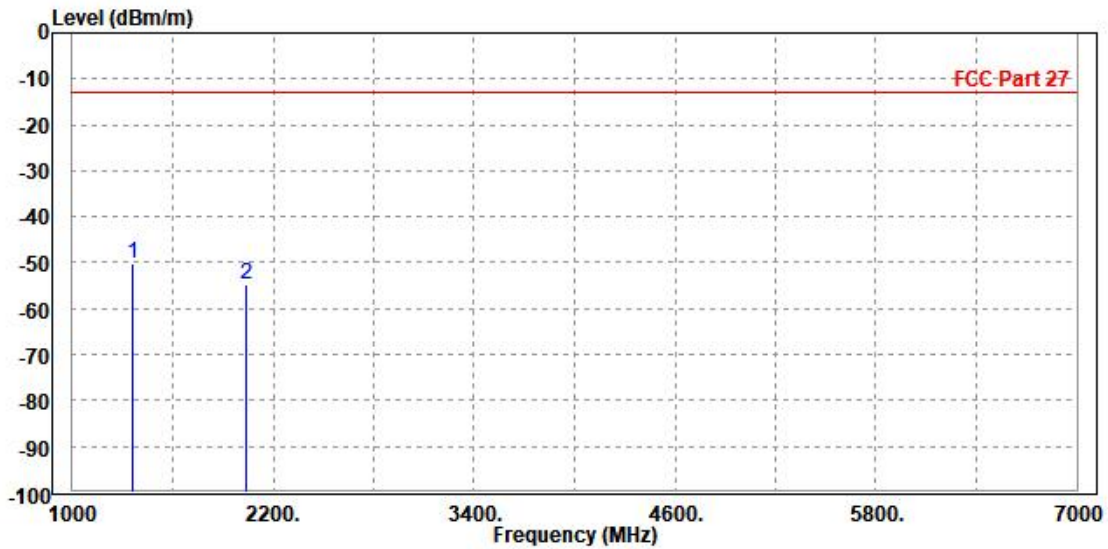




**BUREAU  
VERITAS**

Test Report No.: W7L-P23070009-2RF03

**CH 133422**

<b>MODE</b>	TX channel 133422	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1386.000	-45.21	-44.49	-13.00	-32.21	-0.72	Peak	Horizontal
2	2080.000	-53.82	-57.73	-13.00	-40.82	3.91	Peak	Horizontal

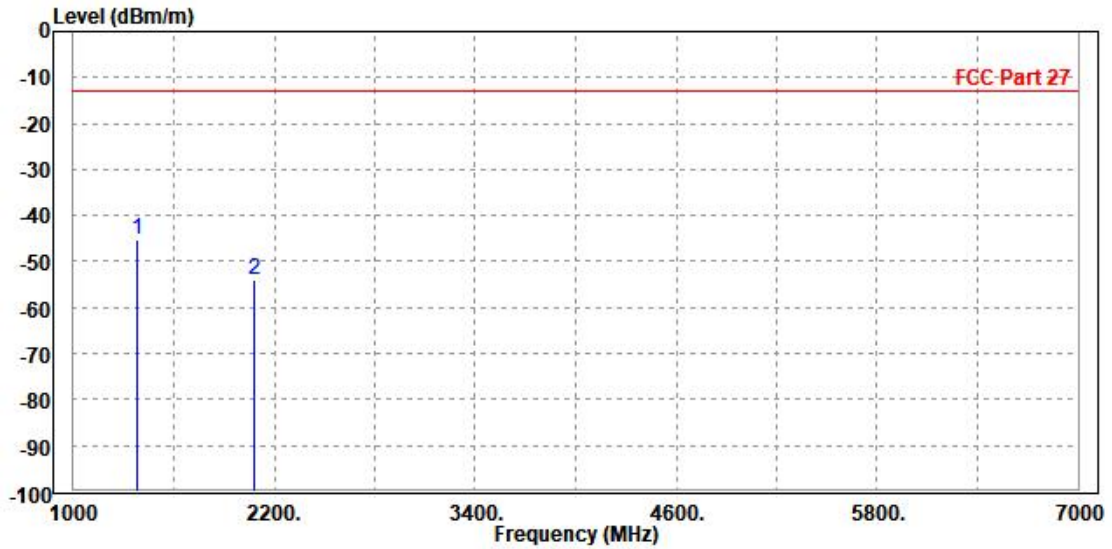




Test Report No.: W7L-P23070009-2RF03

MODE	TX channel 133422	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1384.000	-46.18	-45.64	-13.00	-33.18	-0.54	Peak	Vertical
2	2079.000	-55.47	-59.27	-13.00	-42.47	3.80	Peak	Vertical

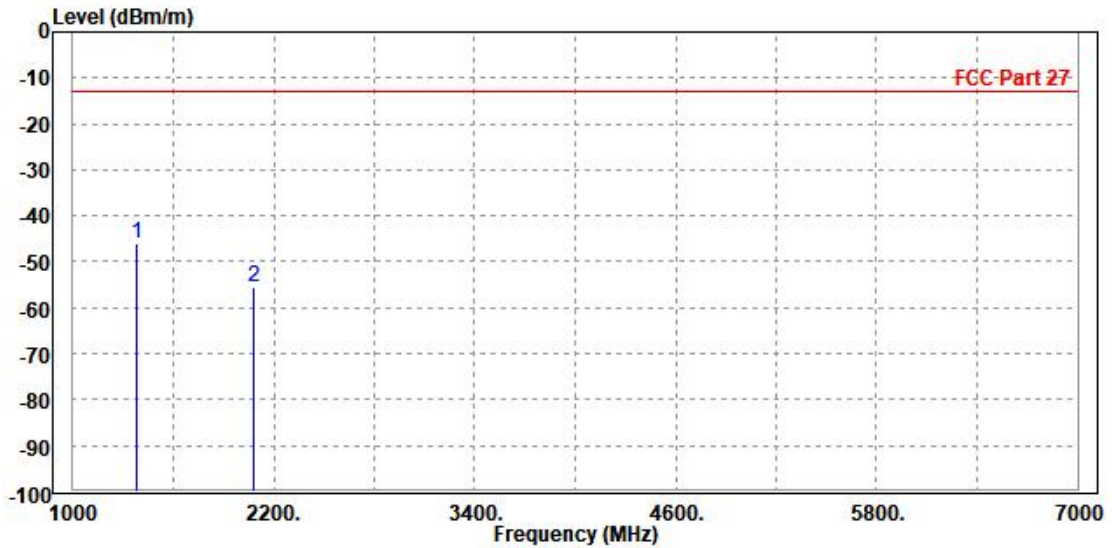




Test Report No.: W7L-P23070009-2RF03

**CHANNEL BANDWIDTH: 15MHz / QPSK**

<b>MODE</b>	TX channel 133297	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1360.000	-48.97	-48.18	-13.00	-35.97	-0.79	Peak	Horizontal
2	2041.500	-54.92	-58.69	-13.00	-41.92	3.77	Peak	Horizontal

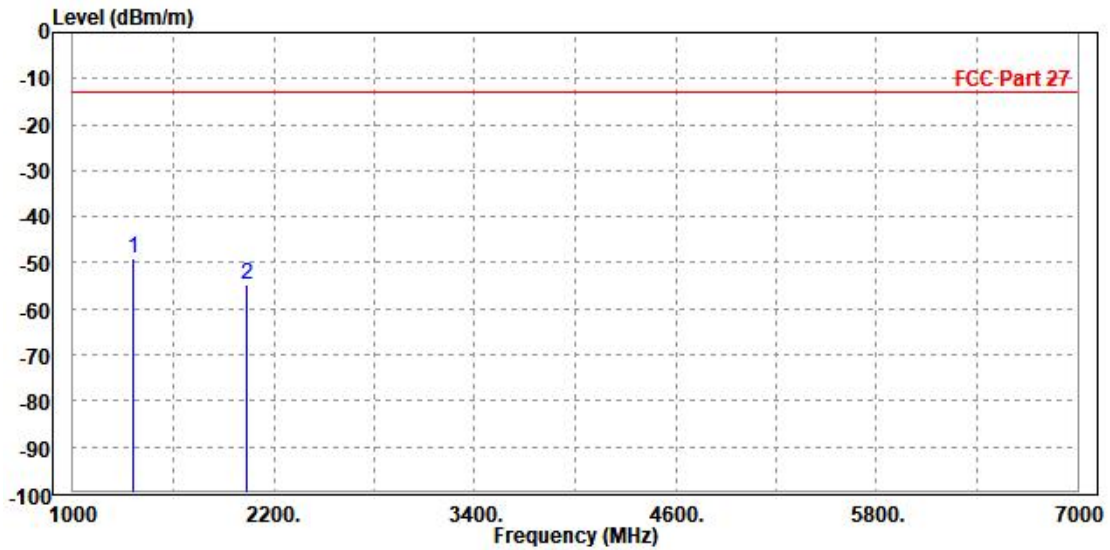




Test Report No.: W7L-P23070009-2RF03

<b>MODE</b>	TX channel 133297	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1361.000	-50.38	-49.74	-13.00	-37.38	-0.64	Peak	Vertical
2	2044.000	-55.18	-58.88	-13.00	-42.18	3.70	Peak	Vertical

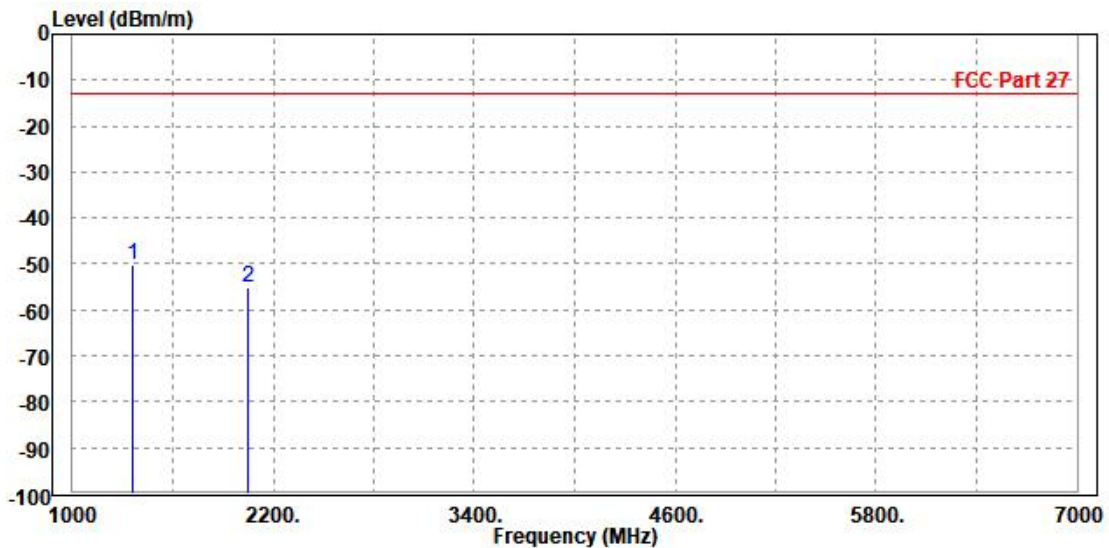




Test Report No.: W7L-P23070009-2RF03

**CHANNEL BANDWIDTH: 20MHz / QPSK**

<b>MODE</b>	TX channel 133322	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1366.000	-57.82	-57.04	-13.00	-44.82	-0.78	Peak	Horizontal
2	PP 2050.000	-55.88	-59.68	-13.00	-42.88	3.80	Peak	Horizontal

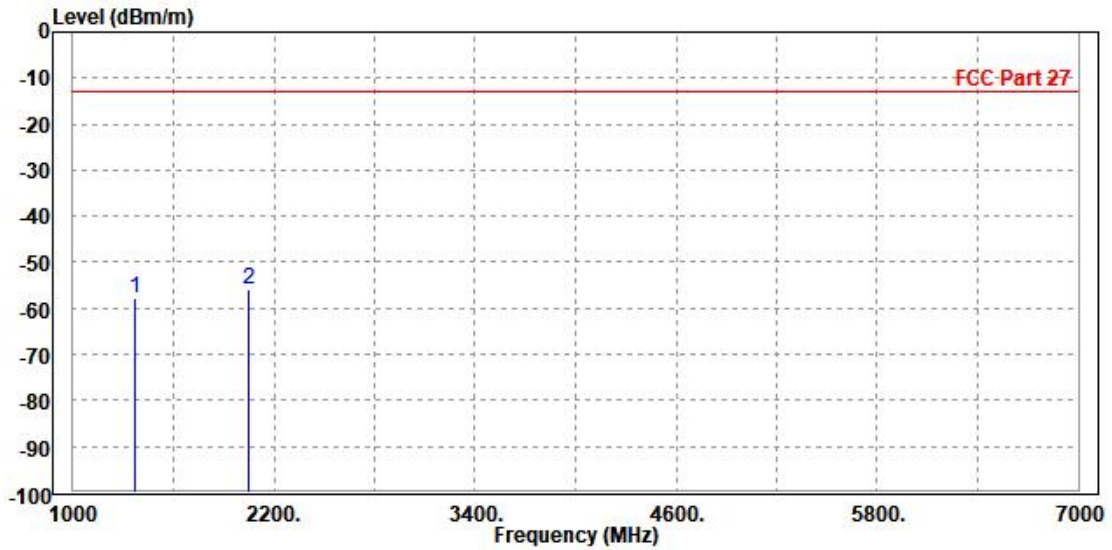




Test Report No.: W7L-P23070009-2RF03

<b>MODE</b>	TX channel 133322	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 70%RH	<b>INPUT POWER</b>	AC 120V/60Hz
<b>TESTED BY</b>	Jace Hu		
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>			

	Read	Limit	Over				
Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP 1366.000	-51.70	-51.08	-13.00	-38.70	-0.62	Peak	Vertical
2 2049.000	-55.15	-58.87	-13.00	-42.15	3.72	Peak	Vertical

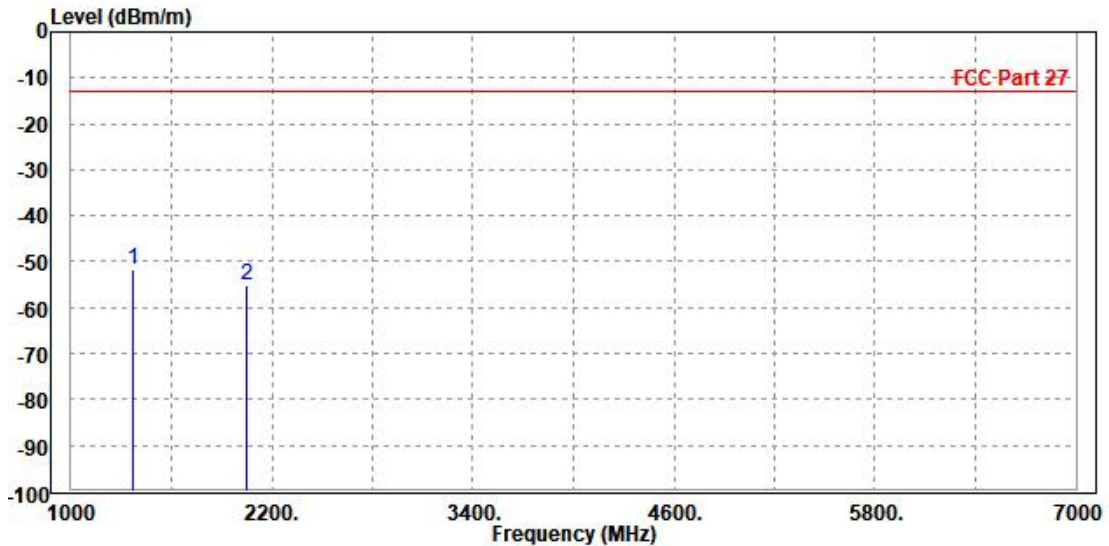


### 3.7 PEAK TO AVERAGE RATIO

#### 3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

#### 3.7.2 TEST SETUP

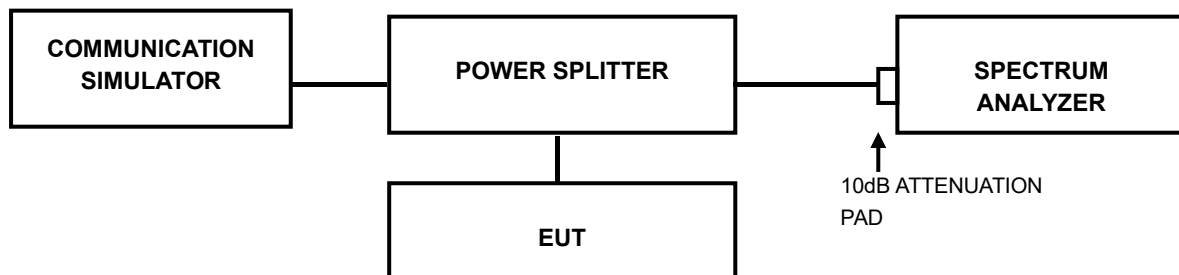

#### 3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.





Test Report No.: W7L-P23070009-2RF03

### 3.7.4 TEST RESULTS

Refers to the data of W7L-P23070009RF03 (FCC ID: 2AJYU-8XS0001, model: SIM7672G) .



Test Report No.: W7L-P23070009-2RF03

## 4 INFORMATION ON THE TESTING LABORATORIES

We, Huarui 7layers High Technology (Suzhou) Co., Ltd. ,were founded in 2020 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Suzhou EMC/RF Lab:**

Tel: +86 (0557) 368 1008



Test Report No.: W7L-P23070009-2RF03

## **5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**--END--**