

## TEST REPORT

Applicant Name & Address : ASSA ABLOY Hong Kong Ltd  
Flat/RM 1901 Tower 3 19/F China Hong Kong City, 33 Canton Road, Tsim Sha Tsui

Sample Description

Product	: Electronic Hotel Door Lock
FCC ID	: 2AK2H-6600103
Model No.	: 6600103
Electrical Rating	: 6Vdc

Date Received : 10 January, 2017  
Date Test Conducted : 10 January, 2017 –24 March, 2017  
Test standards : **47 CFR PART 15 Subpart C: 2015 section 15.225**

Test Result : Pass

Conclusion : The submitted samples complied with the above rules/standards.

Remark : No

\*\*\*\*\*End of Page\*\*\*\*\*

*Prepared and Checked By:*

Daniel He

**Daniel He**  
**Project Engineer**  
**Intertek Guangzhou**

*Approved By:*

Helen Ma *Signature*

**Helen Ma**  
**Team Leader**  
**Intertek Guangzhou**  
27 March 2017 *Date*

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch  
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China  
Tel / Fax: 86-20-8213 9688/86-20-3205 7538  
© 2016 Intertek

FCC ID: 2AK2H-6600103  
TRF No.: FCC Part 15.225

Page 1 of 21

## **CONTENT**

<b>TEST REPORT .....</b>	1
<b>CONTENT .....</b>	2
1.0    Summary of Test.....	3
2.0    General Description .....	4
2.1    Product Description.....	4
2.2    Related Submittal(s) Grants.....	4
2.3    Test Methodology.....	4
2.4    Test Facility.....	4
3.0    System Test Configuration.....	5
3.1    Justification .....	5
3.2    EUT Exercising Software.....	6
3.3    Special Accessories.....	6
3.4    Measurement Uncertainty.....	6
3.5    Equipment Modification.....	7
3.6    Support Equipment List and Description.....	7
4.0    Measurement Results .....	8
4.1    Antenna Requirement: .....	8
4.2    Occupied Bandwidth: .....	9
4.3    Radiated Emission .....	11
4.4    Frequency Stability .....	19
5.0    Test Equipment List.....	21

**1.0 Summary of Test**

TEST	TEST REQUIREMENT	TEST METHOD	RESULT
Antenna Requirement	FCC PART 15 C Section 15.203	FCC PART 15 C Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9	PASS
Radiated Emission	FCC PART 15 C section 15.225 (a), (b), (c), (d)	ANSI C63.10: Clause 6.4 & 6.5	PASS
Frequency Stability	FCC PART 15 C section 15.225 (e)	ANSI C63.10: Clause 6.8	PASS
<b>Remark:</b>			
N/A: not applicable. Refer to the relative section for the details. EUT: In this whole report EUT means Equipment Under Test. Tx: In this whole report Tx (or tx) means Transmitter. Rx: In this whole report Rx (or rx) means Receiver. RF: In this whole report RF means Radio Frequency. ANSI C63.10: the detail version is ANSI C63.10:2013 in the whole report.			

## 2.0 General Description

### 2.1 Product Description

Operating Frequency	13.56 MHz
Type of Modulation:	ASK
Number of Channels	1 Channel
Channel Separation:	N/A
Antenna Type	Cooper Wire printed circuit board
Antenna gain:	0 dBi
Power Supply:	6Vdc
Power cord:	N/A

### 2.2 Related Submittal(s) Grants

This is an application for certification of:  
DXX- Low Power Communications Device Transmitter

### 2.3 Test Methodology

Radiated emission measurement was performed according to the procedures in ANSI C63.10:2013. Radiated emission measurement was performed in semi-anechoic chamber. For radiated emission measurement, preliminary scans and final tests were performed in the semi-anechoic chamber to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise.

### 2.4 Test Facility

All of the tests are performed at:  
Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.  
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City,  
GETDD Guangzhou, China 510663.

This test facility and site measurement data have been fully placed on file with the FCC, test firm registration number is 549654.

### 3.0 System Test Configuration

#### 3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. It was powered by 6Vdc.

When below 30MHz, the measurement antenna was positioned with its plane perpendicular to the ground at the specified distance. When perpendicular to the ground plane, the lowest height of the magnetic antenna was 1 m above the ground and was positioned at 3m distance from the EUT. During testing the loop antenna was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable. When above 30MHz, the antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. The spurious emissions more than 20 dB below the permissible value are not reported.

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

**3.2 EUT Exercising Software**

No

**3.3 Special Accessories**

No special accessories used.

**3.4 Measurement Uncertainty**

No.	Item	Measurement Uncertainty
1	RF output power (conducted)	1.1 dB
2	Occupied Channel Bandwidth	2.3%
3	Power Spectral Density	1.5dB
4	Spurious Emission (TX)-Radiated	4.7 dB (25 MHz-1 GHz)
		4.8 dB (1 GHz-18 GHz)
5	Spurious Emission (TX)-Conducted	1.5 dB
6	Spurious Emission (RX) -Radiated	4.7 dB (25 MHz-1 GHz)
		4.8 dB (1 GHz-25 GHz)
7	Spurious Emission (RX)-Conducted	1.5 dB
8	Conducted Emissions at Mains Terminals	2.58dB
9	Temperature	0.5 °C
10	Humidity	0.4 %
11	Time	1.2%

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.



Report No.: 170110004GZU-001  
Issued: 2017-03-27

### **3.5 Equipment Modification**

Any modifications installed previous to testing by ASSA ABLOY Hong Kong Ltd will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.

### **3.6 Support Equipment List and Description**

The client make a continuous transmit sample for test.

## **4.0 Measurement Results**

### **4.1 Antenna Requirement:**


Standard requirement

15.203 requirement:

For intentional device. According to 15.203. An intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.


EUT Antenna

The antenna is a Cooper Wire printed circuit board and integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0 dBi.

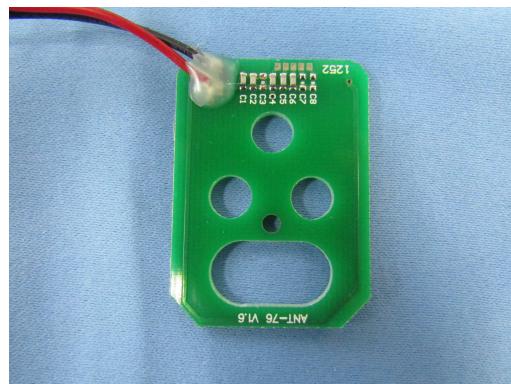

#### 4.2 Occupied Bandwidth:

Test Requirement:	FCC PART 15 C section 15.215(c)  (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated
Test Method:	ANSI C63.10: Clause 6.9
Test Status:	Pre-Scan has been conducted to determine the worst-case mode.
Test Configuration:	

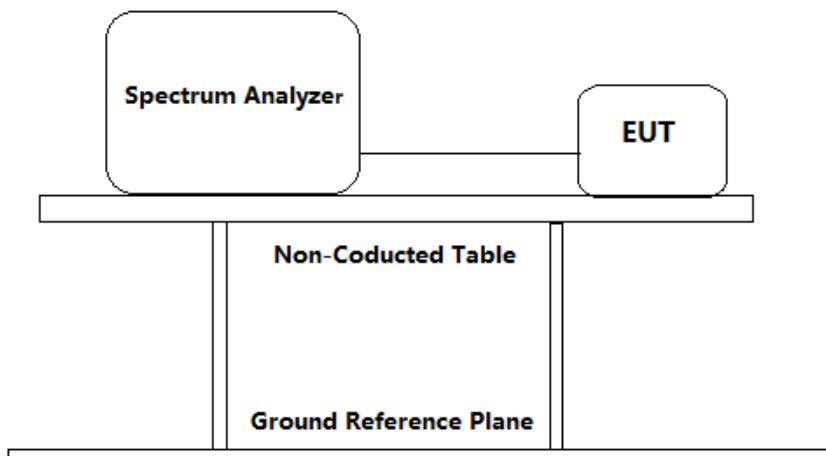

#### Test Procedure:

The transmitter was operated at its maximum carrier power measured under normal test conditions.

- a) The instrument center frequency was set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer was between 1.5 times and 5.0 times the OBW(20 dB Bandwidth).
- b) The nominal IF filter bandwidth (3 dB RBW) was in the range of 1% to 5% of the OBW, and VBW was approximately equal to the RBW.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral


envelope was more than [10 log (OBW/RBW)] below the reference level.

- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) The dynamic range of the instrument at the selected RBW was more than 10 dB below the target “-20 dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW was at least 30 dB below the reference value.
- f) Peak detection and max hold mode (until the trace stabilizes) was used.
- g) Used the 20dB bandwidth function of the instrument and reported the measured bandwidth.
- h) The occupied bandwidth was reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division was clearly labeled. Tabular data was reported in addition to the plot(s).

20 dB bandwidth:

Frequency (MHz)	20 dB bandwidth (kHz)	lower frequency (MHz)	upper frequency (MHz)	Assigned Band (MHz)	Result
13.560	7.22	13.556	13.564	13.553-13.567	Pass

Result plot as follows:

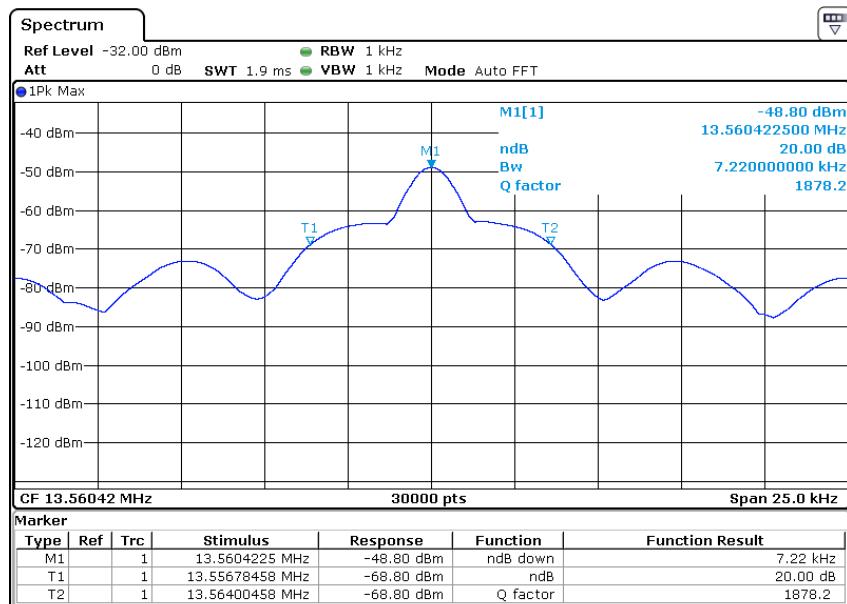

#### 4.3 Radiated Emission

Test Requirement:

FCC PART 15 C section 15.225 (a), (b), (c), (d)

The field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

15.225(a): The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters. i.e. 124.0dB $\mu$ V/m @ 3 m.

15.225(b): Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. i.e. 90.5dB $\mu$ V/m @ 3 m.

15.225(c): Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters. i.e. 80.5dB $\mu$ V/m @ 3 m.

15.225(d) :The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

15.209 (a):

1) Within the bands 0.009-0.490MHz of any emissions shall not exceed 2400/F (kHz) microvolts/meter at 300 meters. i.e. 128.5dB $\mu$ V/m to 93.8 dB $\mu$ V/m @ 3 m.

2) Within the bands 0.490-1.705MHz of any emissions shall not exceed 24000/F (kHz) microvolts/meter at 300 meters. i.e. 128.5dB $\mu$ V/m to 93.8 dB $\mu$ V/m @ 3 m.

§ 15.209 Limit:

Frequency (MHz)	Field Strength (dB $\mu$ V/m @ 3m)
0.009-0.490	128.5 to 93.8
0.490-1.705	68.9 to 62.9
1.705-30.0	69.5
30-88	40
88-216	43.5
216-960	46
Above 960	54

Test Method:

ANSI C63.10: Clause 6.4 and 6.5.

Test Status:

Pre-Scan has been conducted to determine the worst-case mode from all possible configuration.

Test site:

Measurement Distance: 3m (Semi-Anechoic Chamber)

Detector:

Quasi-Peak detector:

RBW=200 Hz for 9 kHz to 150 kHz

RBW=9 kHz for 150 kHz to 30 MHz

RBW=120 kHz for 30 MHz to 1GHz

Sweep = auto




Trace = max hold

## Section 15.205 Restricted bands of operation.

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 -	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.69525	960 - 1240	7.25 - 7.75
4.125 - 4.128	16.80425 -	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	16.80475	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	25.5 - 25.67	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	37.5 - 38.25	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	73 - 74.6	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	74.8 - 75.2	2200 - 2300	14.47 - 14.5
8.291 - 8.294	108 - 121.94	2310 - 2390	15.35 - 16.2
8.362 - 8.366	123 - 138	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	149.9 - 150.05	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.52475 -	3260 - 3267	23.6 - 24.0
12.29 - 12.293	156.52525	3332 - 3339	31.2 - 31.8
12.51975 -	156.7 - 156.9	3345.8 - 3358	36.43 - 36.5
12.52025	162.0125 - 167.17	3600 - 4400	
12.57675 -	167.72 - 173.2		
12.57725	240 - 285		
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in 15.209.

## Test Configuration:

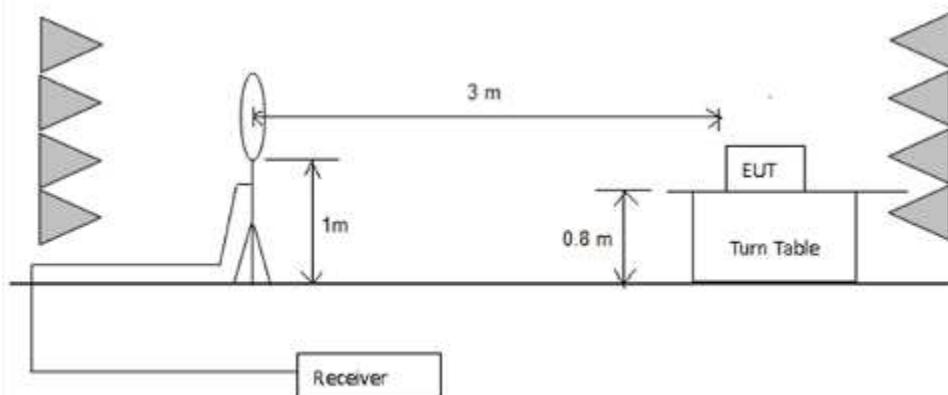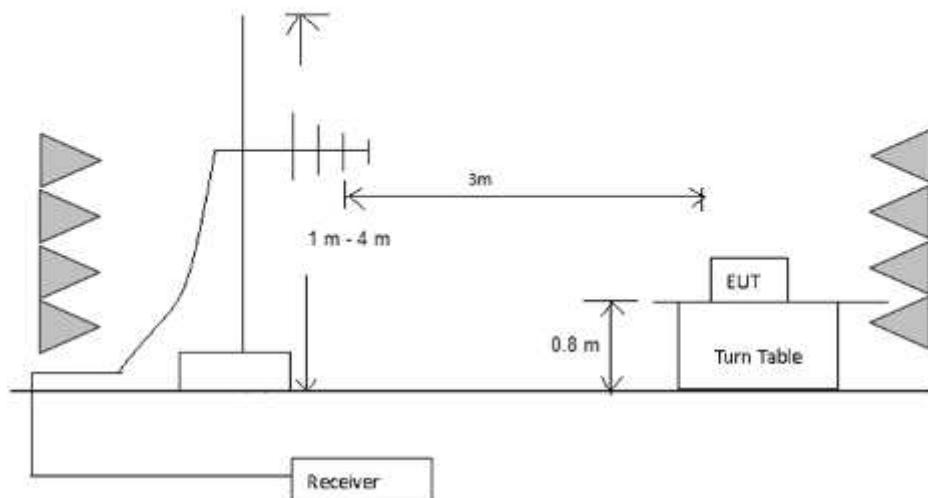1) 9 kHz to 30 MHz emissions:2) 30 MHz to 1 GHz emissions:

**Test Procedure:**

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the special distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.


3) The receiver was scanned from 9 kHz to 200 MHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Report No.: 170110004GZU-001  
Issued: 2017-03-27

### Radiated Emissions (Below 30 MHz)


Pre-test the loop antenna on three orientation (X, Y, Z), Finally find the worst case was X orientation

From 9kHz to 30MHz:

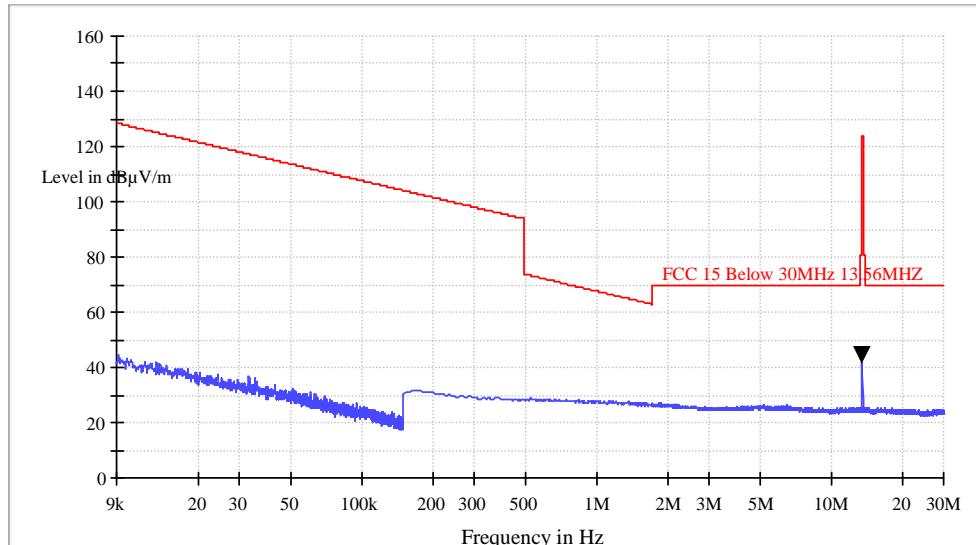

Notes: All other emissions were greater than 20 dB below the limit.

Radiated emission from 13.11MHz to 14.01MHz:

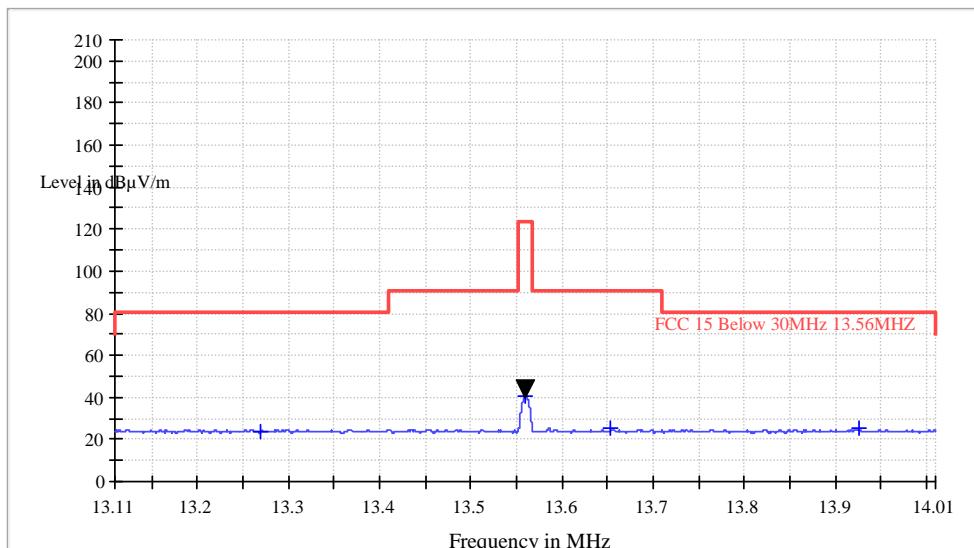

Frequency (MHz)	Receiver Reading Level (dB $\mu$ V)	Correction factors (dB/m)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
13.27	3.0	21.1	24.1	80.5
13.56	19.9	21.0	40.9	124.0
13.65	4.6	21.0	25.6	90.5
13.92	4.6	21.0	25.6	80.5


Remark:

Final Test Level = Receiver Reading + Correction Factor

Correction Factor = Antenna Factor + Cable Loss.

**Radiated Emissions**  
(30MHz -200MHz, 10th harmonic of highest fundamental frequency)**Horizontal:**

Quasi-peak measurement

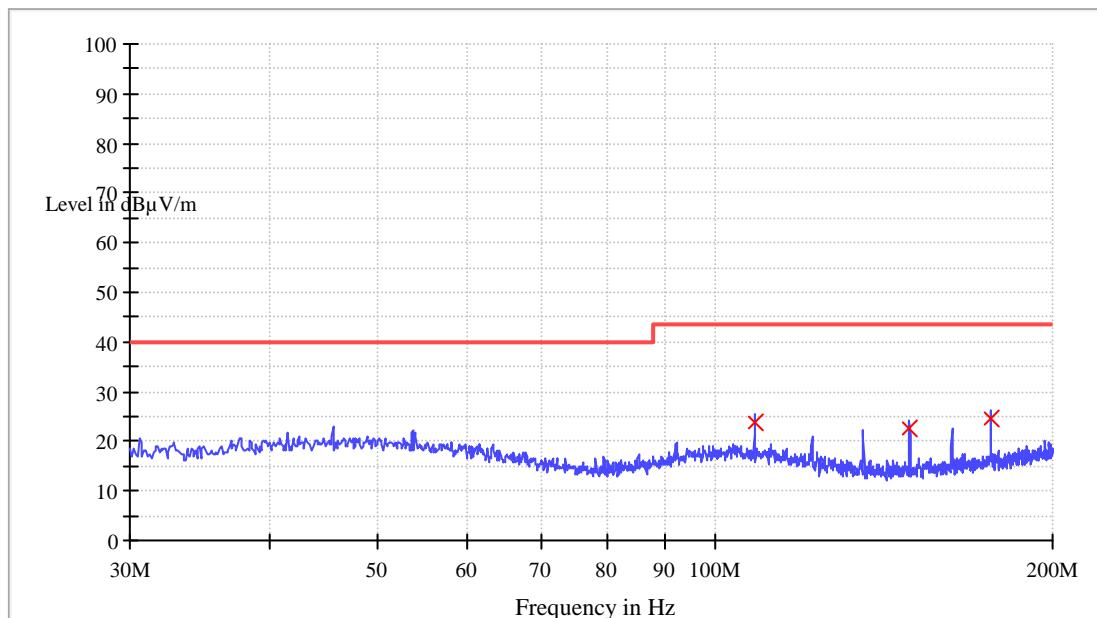


Frequency (MHz)	Receiver Reading Level (dB $\mu$ V)	Correction factors (dB/m)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
108.40	11.4	12.3	23.7	43.5
149.08	13.6	9.1	22.7	43.5
176.20	14.2	10.5	24.7	43.5

**Remark:**

Final Test Level = Receiver Reading + Correction Factor

Correction Factor = Antenna Factor + Cable Loss.

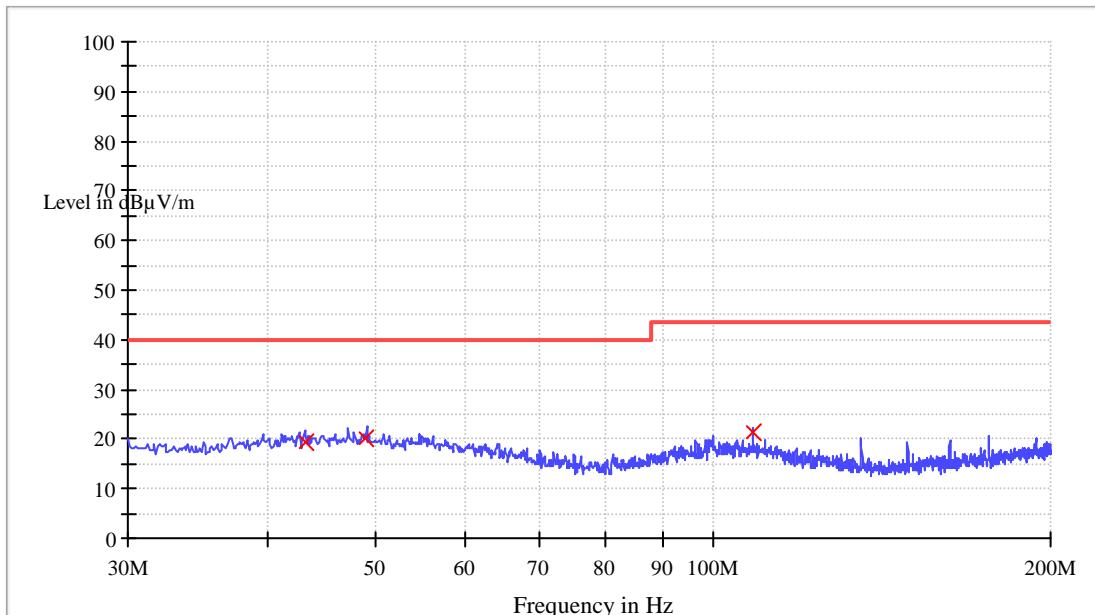**Vertical:**  
Quasi-peak measurement

Frequency (MHz)	Receiver Reading Level (dB $\mu$ V)	Correction factors (dB/m)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
43.16	5.5	13.8	19.3	40.0
49.00	6.2	14.1	20.3	40.0
108.40	9.0	12.3	21.3	43.5

**Remark:**

Final Test Level = Receiver Reading + Correction Factor

Correction Factor = Antenna Factor + Cable Loss.

#### 4.4 Frequency Stability

Test Requirement:

FCC Part 15 C section 15.225 (e)

(e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Method:

ANSI C63.10: Clause 6.8

Test Procedure:

- (1) Supply the EUT with a new battery. Turn the EUT OFF and place it inside the environmental temperature chamber.
- (2) Set the temperature control on the chamber to +50 degrees C and allow the oscillator heater and the chamber temperature to stabilize.
- (3) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency.
- (4) Switch OFF the EUT. Lower the chamber temperature by not more than 10 °C, and allow the temperature inside the chamber to stabilize. Repeat step 3) through step 4) down to the lowest specified temperature.
- (5) At a temperature of 20°C, record the frequency at 85% and 115% of the nominal supply voltage.

**Test Result:**

Operating Frequency: 13.560 MHz,

Limit: total emission within +/- 1.356 kHz (+/- 0.01% of the operating frequency)

Frequency stability vs. temperature		
Environment Temperature (°C)	Measured Frequency (MHz)	Frequency Measure with Time Elapsed Total emission within kHz
50	13.5603	0.3
40	13.5602	0.3
30	13.5601	0.1
20	13.5600	0
10	13.5600	0
0	13.5603	0.3
-10	13.5602	0.2
-20	13.5604	0.4

Frequency stability vs. input voltage		
Power Supplied (Vdc)	Measured Frequency (MHz)	Frequency Measure with Time Elapsed Total emission within kHz
5.1	13.5602	0.2
6.0	13.5600	0
6.6	13.5601	0.1
6.9	13.5602	0.2

## 5.0 Test Equipment List

**Radiated Emission**

Equipment No.	Equipment	Model	Manufacturer	Cal. Due date (YYYY-MM-DD)	Calibration Interval
EM030-04	3m Semi-Anechoic Chamber	9×6×6 m <sup>3</sup>	ETS•LINDGREN	2017/5/9	1Y
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2017/6/7	1Y
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S	2017/6/3	1Y
EM011-04	Loop antenna (9 kHz-30 MHz)	HFH2-Z2	R&S	2017/6/6	1Y
EM061-03	TRILOG Super Broadband test Antenna (30 MHz-1.5 GHz) (TX)	VULB 9161	SCHWARZBECK	2017/6/6	1Y
EM033-01	TRILOG Super Broadband test Antenna(30 MHz-3 GHz) (RX)	VULB 9163	SCHWARZBECK	2017/9/8	1Y
EM033-02	Double-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX)	R&S HF907	R&S	2017/6/6	1Y
EM033-03	High Frequency Antenna & preamplifier(18 GHz~26.5 GHz) (RX)	R&S SCU-26	R&S	2017/4/1	1Y
EM033-04	High Frequency Antenna & preamplifier (26 GHz-40 GHz)	R&S SCU-40	R&S	2017/4/1	1Y
EM031-02-01	Coaxial cable(9 kHz-1 GHz)	N/A	R&S	2017/5/30	1Y
EM033-02-02	Coaxial cable(1 GHz-18 GHz)	N/A	R&S	2017/5/30	1Y
EM033-04-02	Coaxial cable(18 GHz~40 GHz)	N/A	R&S	2017/4/1	1Y
EM031-01	Signal Generator (9 kHz~6 GHz)	SMB100A	R&S	2017/6/11	1Y
SZ180-10	Signal Generator (10MHz-40GHz)	68369B	Wiltron	2017/5/23	1Y
EM040-01	Band Reject/Notch Filter	WRHFV	Wainwright	N/A	1Y
EM040-02	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM040-03	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM022-03	2.45 GHz Filter	BRM50702	Micro-Tronics	2017/5/9	1Y
SA016-16	Programmable Temperature & Humidity Test Chamber	MHU-800LJ	TERCHY	2017/10/21	1Y
SA012-74	Digital Multimeter	FLUKE175	FLUKE	2017/10/13	1Y
EM010-01	Regulated DC Power supply	PAB-3003A	GUANHUA	N/A	1Y
SA040-22	Regulated DC Power supply	IT6721	ITECH	2017/9/18	1Y
EM084-06	Audio Analyzer	8903B	HP	2017/3/29	1Y
EM084-07	Modulation Analyzer	8901B	HP	2017/6/5	1Y