


Antenna specification

1. Dimensions

-

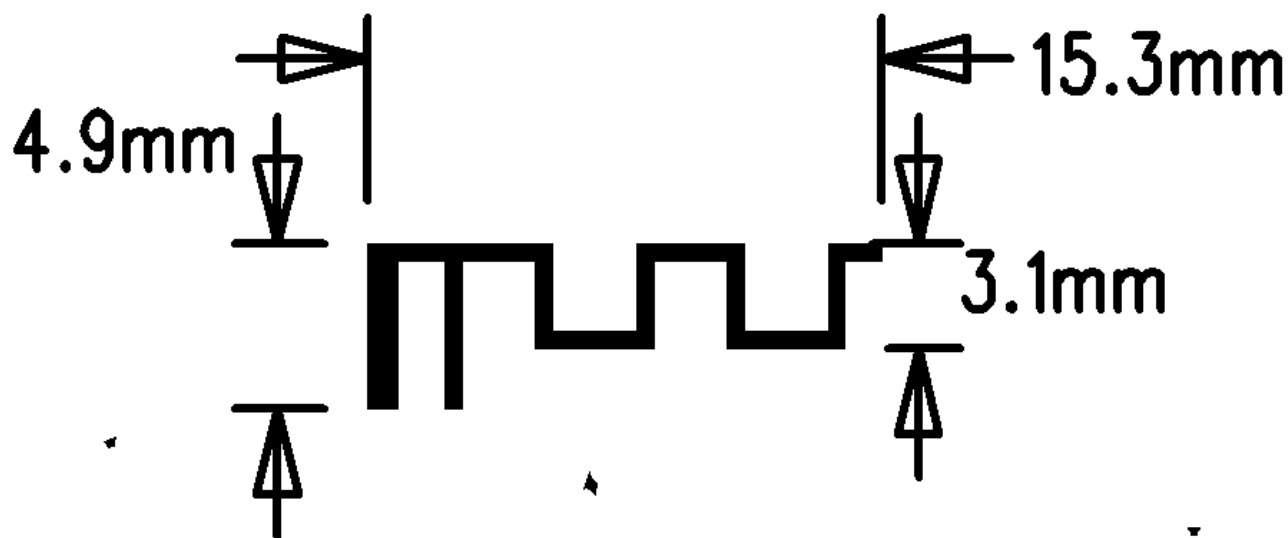

2. Specifications


number	Item	Specifications
1	Working Central Frequency	2441 MHz
2	Band Width	(2402-2480)MHz
3	Gain	1.59 dBi
4	VSWR	≤2.0
5	Antenna type	PCB antenna
6	Azimuth Beam width	Omni - directional
7	Impedance	50 欧姆
8	Modulation mode	GFSK

Frequency (MHz)	Efficiency (%)	Gain (dBi)
2397MHz	20.196	1.47dBi
2450MHz	10.157	1.51 dBi
2482 MHz	21.942	1.59 dBi

3. Instrument testing, software simulation parameters


① VSWR

Mkr1: 2397MHz 1.47 Mkr2: 2450MHz 1.51 Mkr3: 2482 MHz 1.59

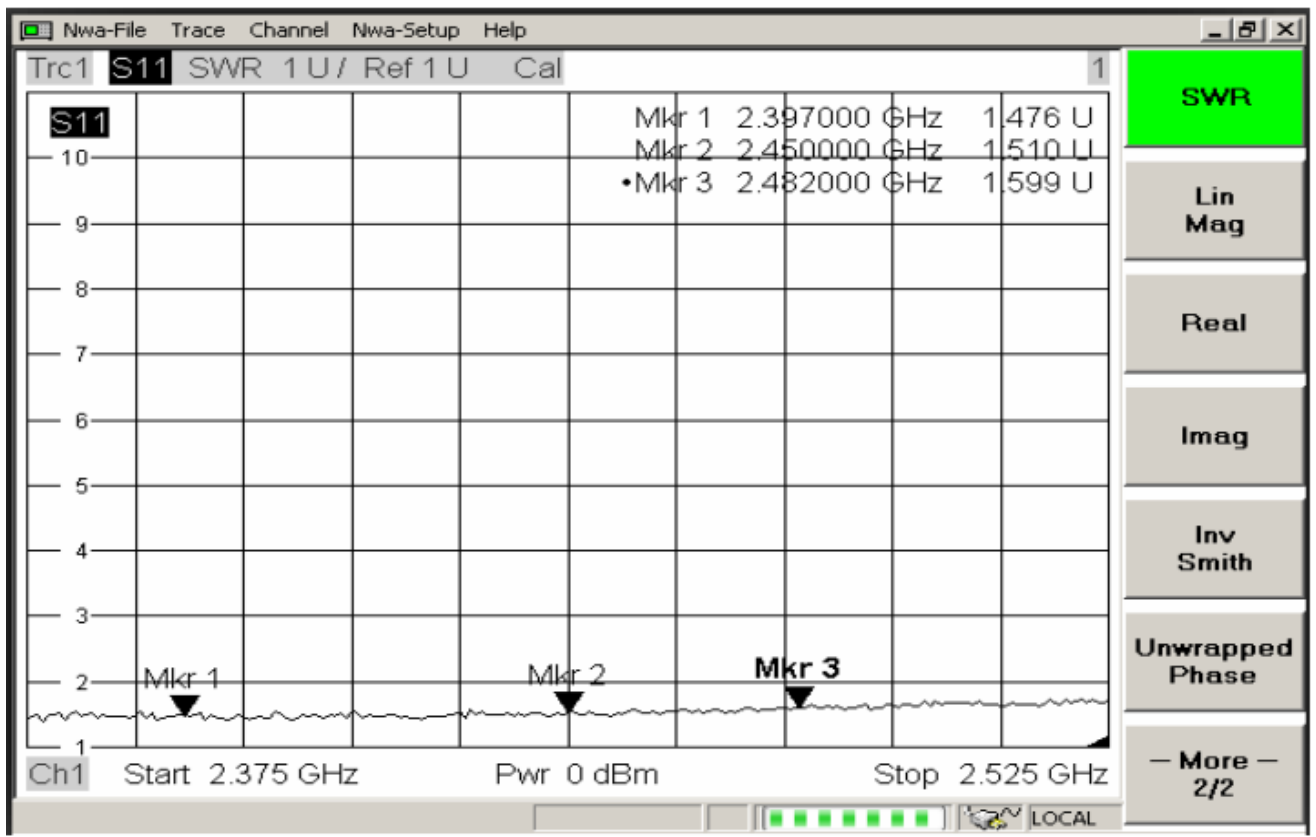


②Smith Char

Mkr1: 2397MHz 73.4 Mkr2: 2450MHz 62.7 Mkr3: 2482MHz 66.8

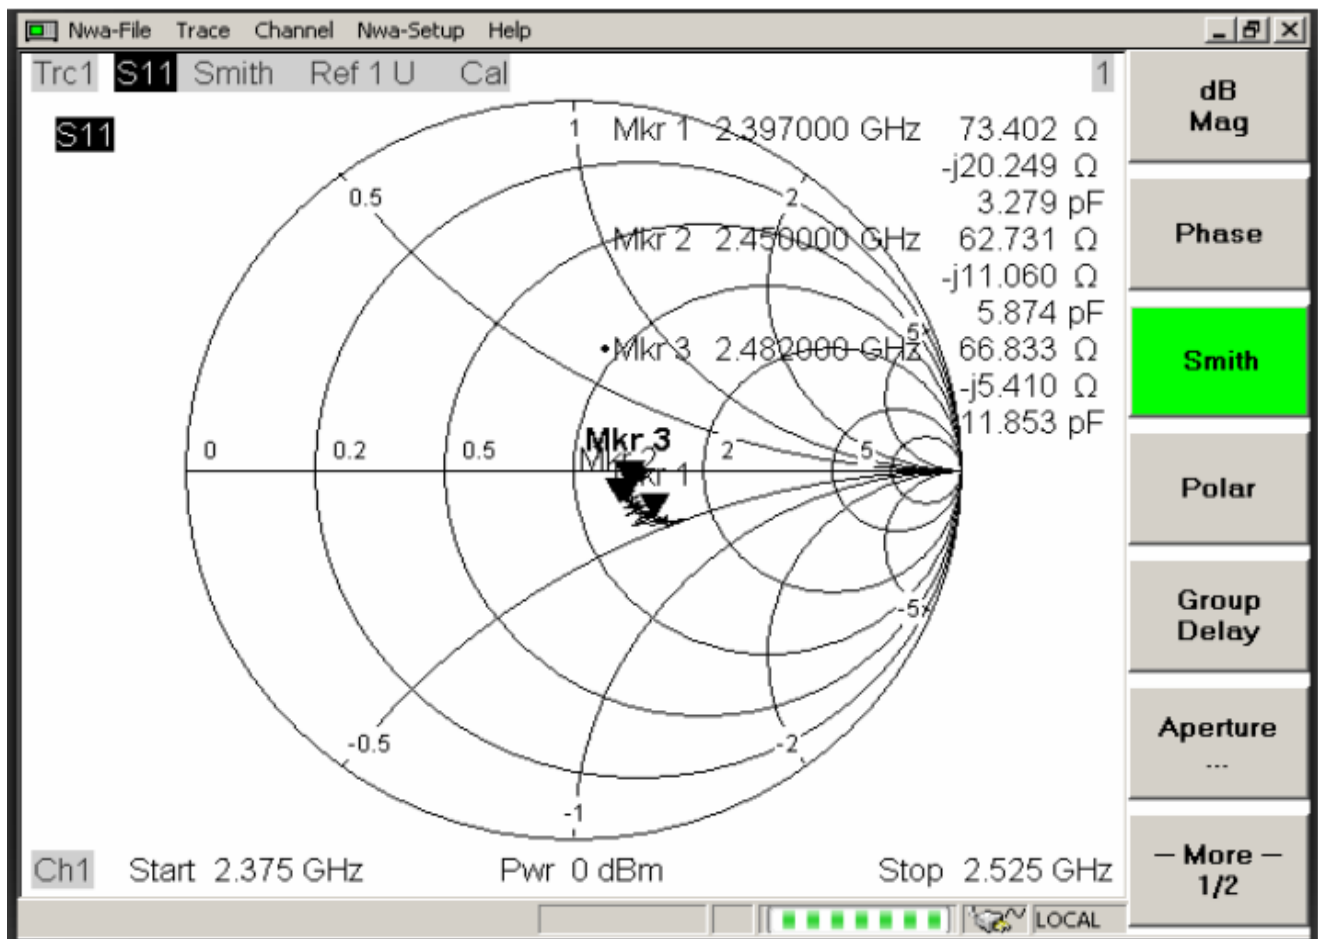


③Return Loss

Mkr1: 2397MHz -15 Mkr2: 2450MHz -18 Mkr3: 2482 MHz -16

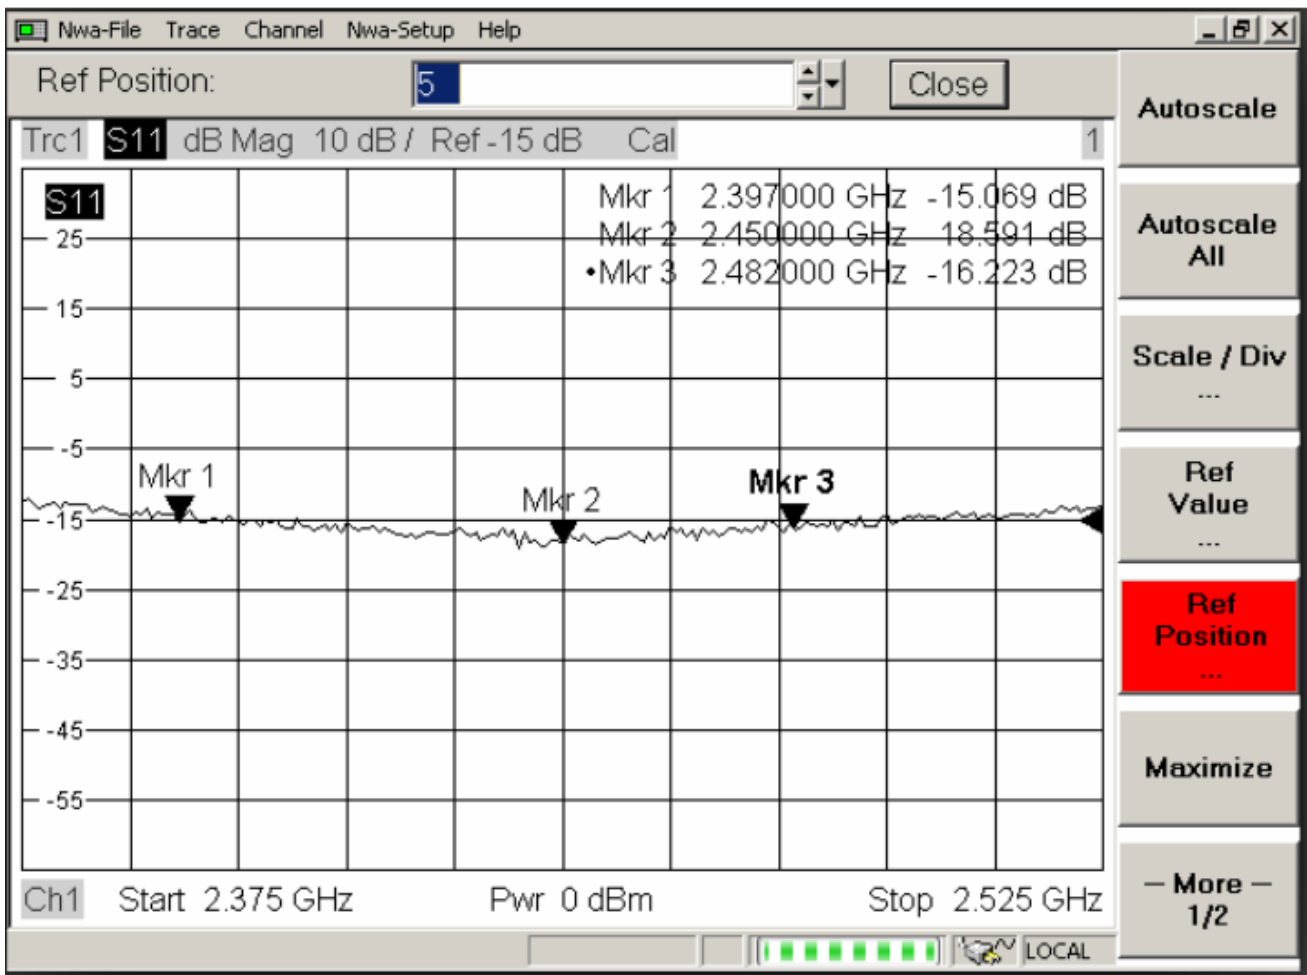

④Smith Char The simulation


Mkr1: 2400MHz 1.234 Mkr2: 2500MHz 1.051 Mkr3: 2600MHz 1.322

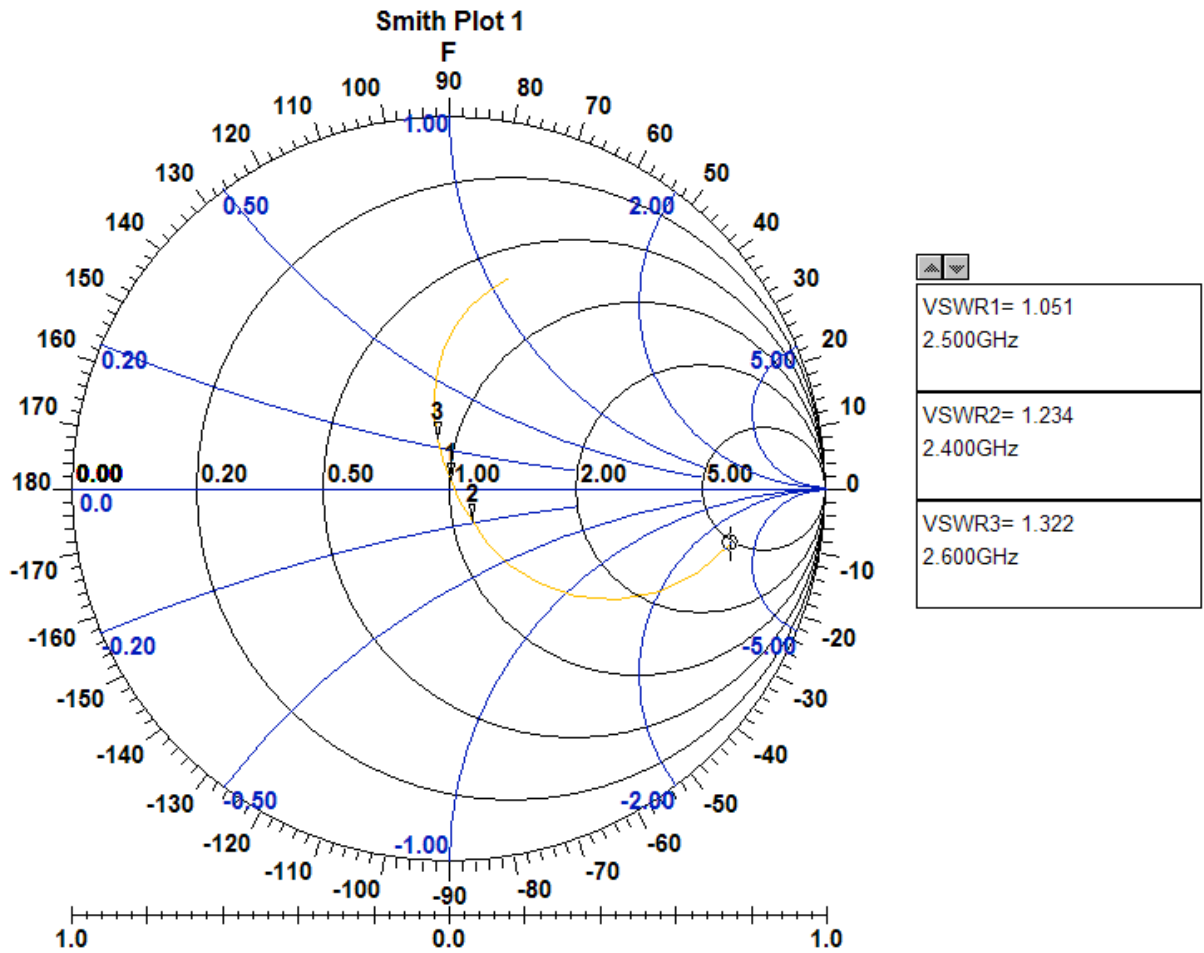

⑤Return Loss The simulation


Mkr1: 2400MHz -19.59 Mkr2: 2450MHz -27.70 Mkr3: 2500MHz -31.97

Mkr4: 2550MHz -21.83

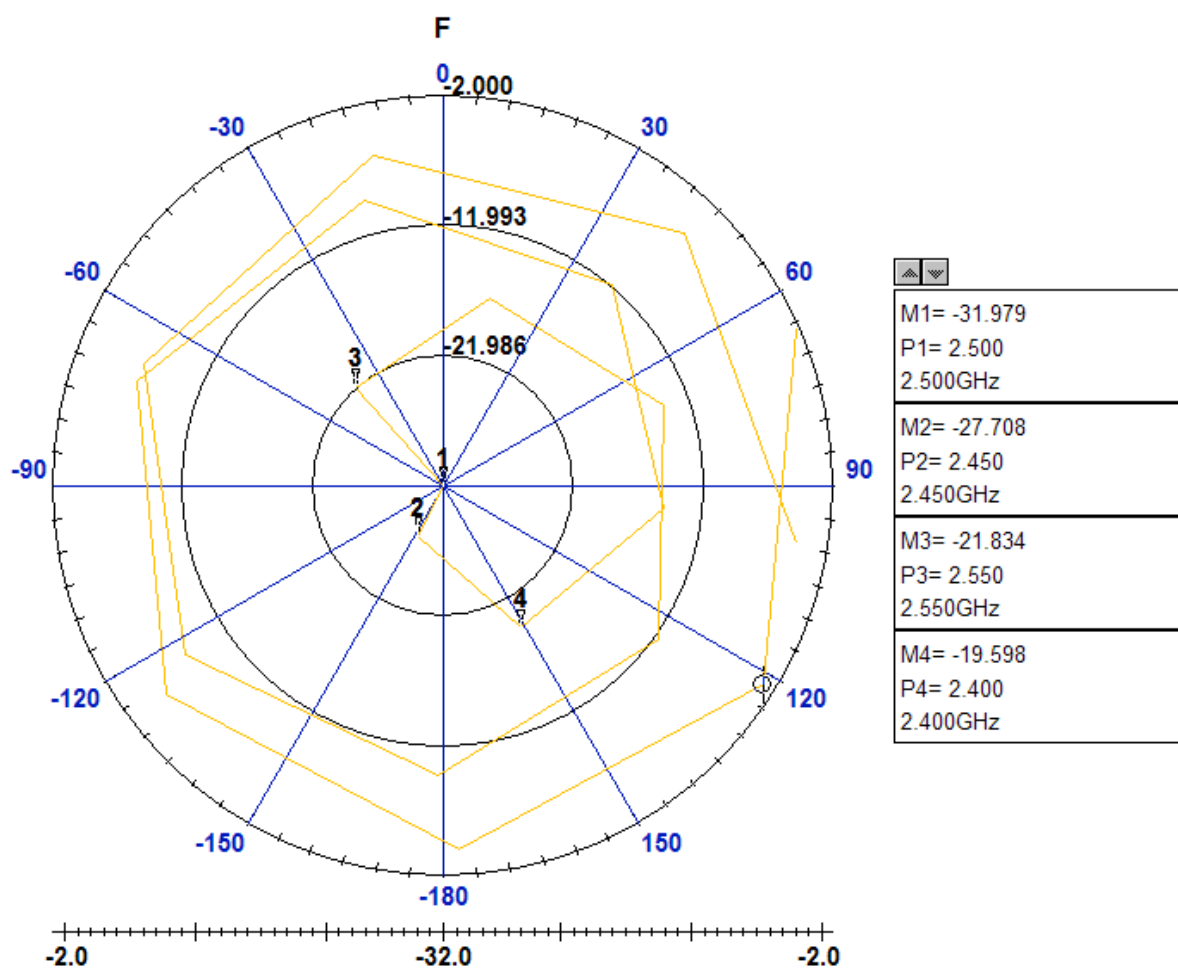


⑥Phase The simulation

Mkr1: 2400MHz -54.89 Mkr2: 2500MHz -82.03 Mkr3: 2600MHz -102.6

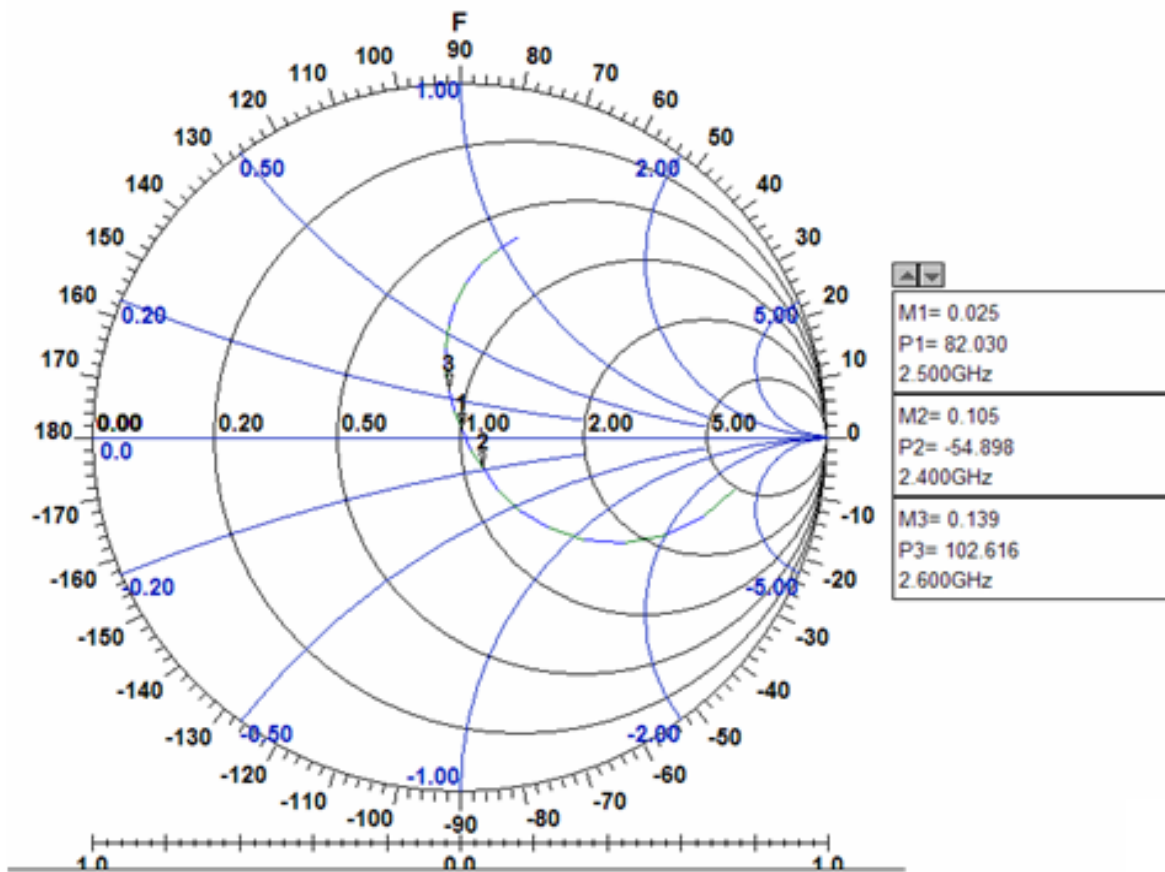


4. Radiation Patterns


XY-plane

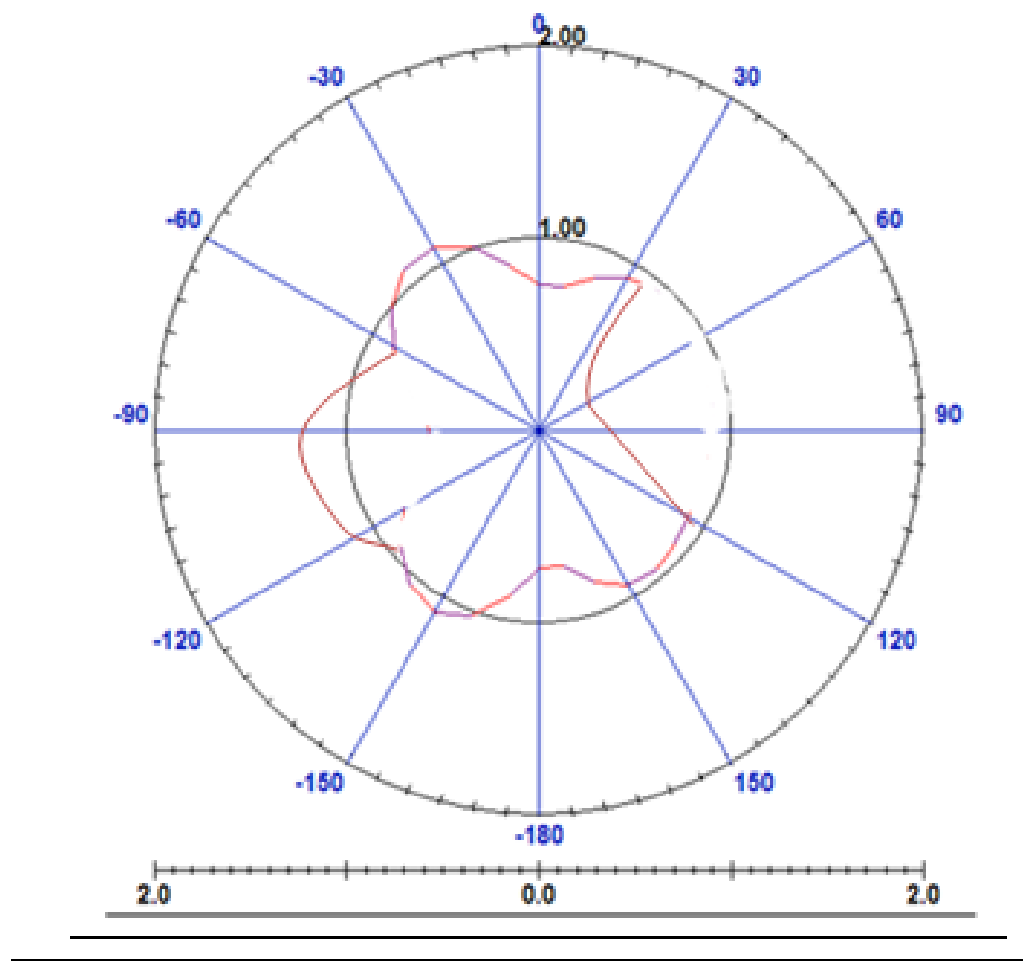

XZ-plane

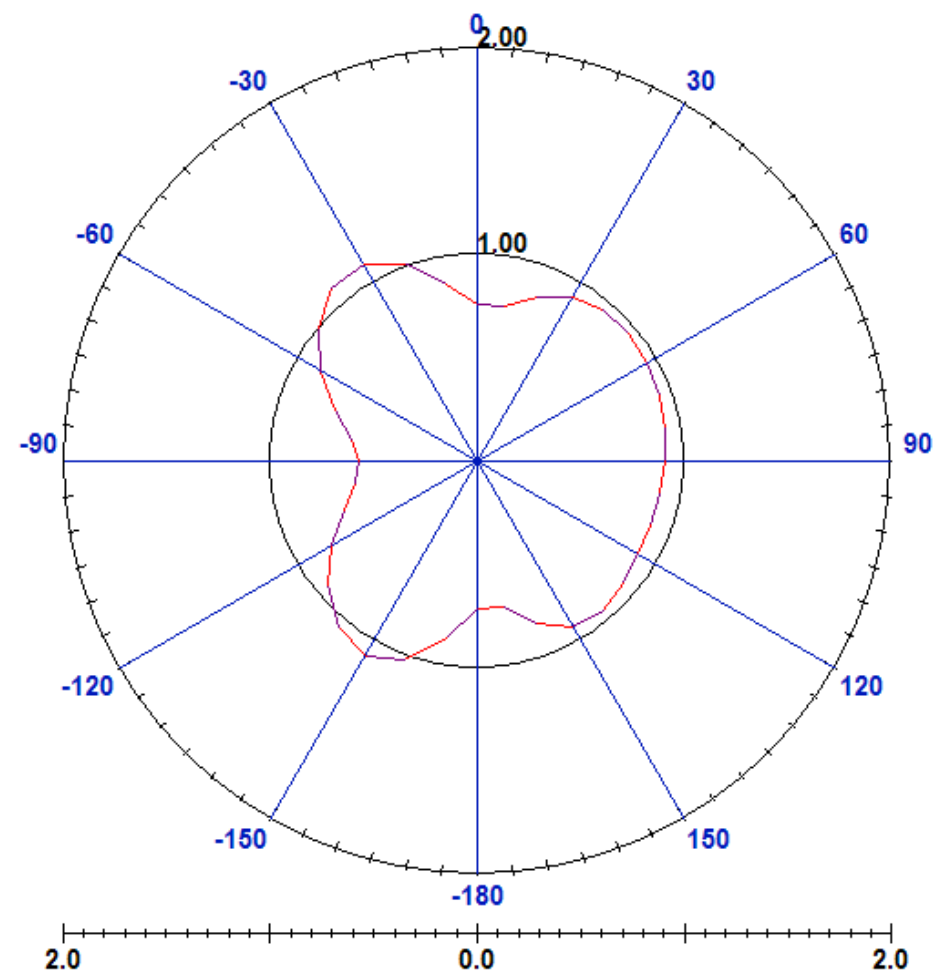

YZ-plane

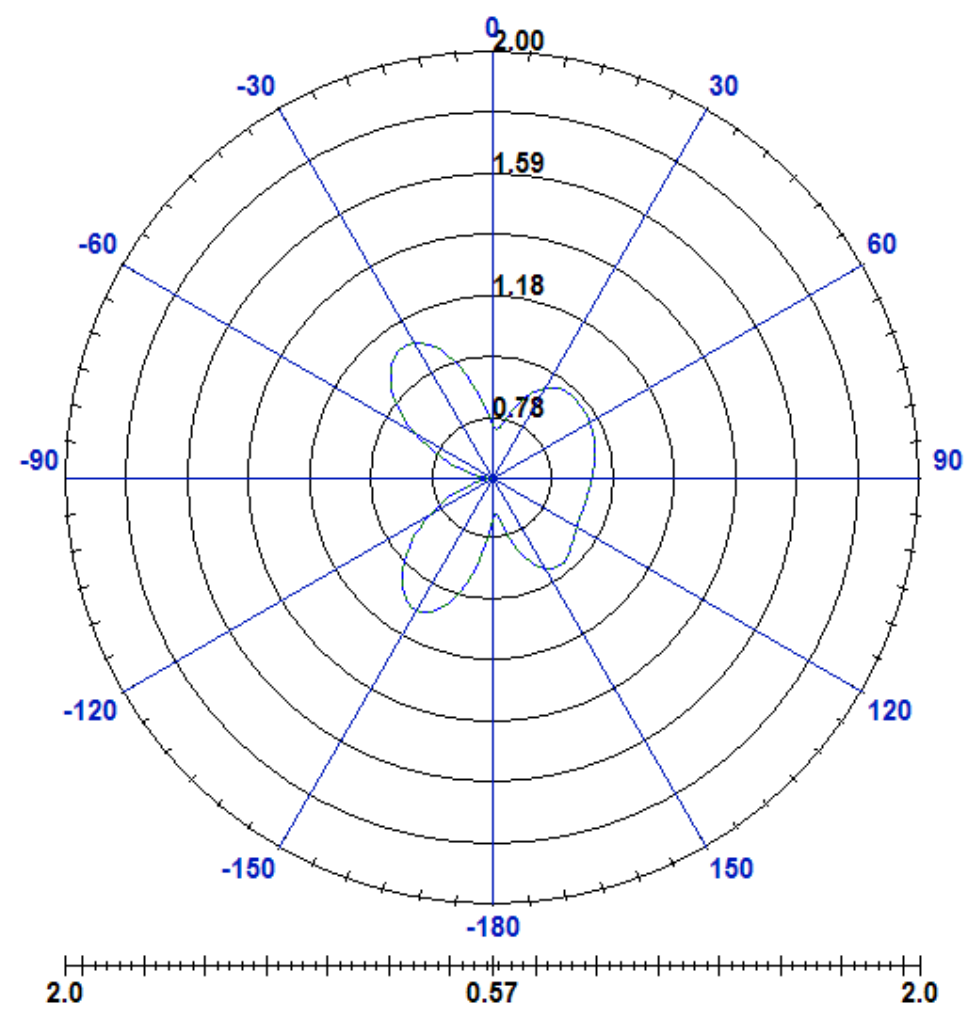

3D Radiation field type

