

TEST REPORT

Product Name : Camera Hub G5 Pro (Wi-Fi)
Model Number : CH-C07E, CH-C07D
FCC ID : 2AKIT-CHC07

Prepared for : Lumi United Technology Co., Ltd.
Address : Room 801-804, Building 1, Chongwen Park, Nanshan
iPark, No. 3370, Liuxian Avenue, Fuguang Community,
Taoyuan Residential District, Nanshan District, Shenzhen,
China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2411080085W01203R
Date(s) of Tests : November 12, 2024 to November 20, 2024
Date of issue : November 23, 2024

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	5
4	TEST METHODOLOGY	6
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
4.2	MEASUREMENT EQUIPMENT USED	6
4.3	DESCRIPTION OF TEST MODES	7
5	FACILITIES AND ACCREDITATIONS	8
5.1	FACILITIES.....	8
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	8
6	TEST SYSTEM UNCERTAINTY	9
7	SETUP OF EQUIPMENT UNDER TEST	10
7.1	RADIO FREQUENCY TEST SETUP 1.....	10
7.2	RADIO FREQUENCY TEST SETUP 2.....	10
7.3	CONDUCTED EMISSION TEST SETUP	12
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	13
7.5	SUPPORT EQUIPMENT.....	13
8	TEST REQUIREMENTS.....	14
8.1	DTS (6DB) BANDWIDTH.....	14
8.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER	17
8.3	MAXIMUM POWER SPECTRAL DENSITY	18
8.4	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS.....	21
8.5	RADIATED SPURIOUS EMISSION	30
8.6	CONDUCTED EMISSIONS TEST	42
8.7	ANTENNA APPLICATION	45

1 TEST RESULT CERTIFICATION

Applicant : Lumi United Technology Co., Ltd.
Address : Room 801-804, Building 1, Chongwen Park, Nanshan iPark, No. 3370, Liuxian Avenue, Fuguang Community, Taoyuan Residential District, Nanshan District, Shenzhen, China
Manufacturer : Lumi United Technology Co., Ltd.
Address : Room 801-804, Building 1, Chongwen Park, Nanshan iPark, No. 3370, Liuxian Avenue, Fuguang Community, Taoyuan Residential District, Nanshan District, Shenzhen, China
EUT : Camera Hub G5 Pro (Wi-Fi)
Model Name : CH-C07E, CH-C07D
Trademark : Aqara


Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS


The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2014) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Date of Test : November 12, 2024 to November 20, 2024

Prepared by : 
Una Yu /Editor

Reviewer : 
Joe Xia/Editor

Approve & Authorized Signer : 
Lisa Wang/Manager



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Device Type:	2.4G ISM Band
Standards:	IEEE802.15.4
Modulation:	O-QPSK
Operating Frequency Range(s):	2405-2480MHz
Number of Channels:	16 Channels
Channel Separation:	5MHz
Transmit Power Max:	7.03 dBm
Antenna Type :	FPC Antenna
Antenna Gain:	0.32 dBi
Power supply:	DC 5V,2A

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AKIT-CHC07 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

The system is compliance with Subpart B is authorized under a DOC procedure

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v04

4.2 MEASUREMENT EQUIPMENT USED

Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESCI	101384	2024/5/11	2025/5/10
AMN	Rohde & Schwarz	ENV216	101161	2024/5/10	2025/5/9
PULSE LIMITER	Rohde & Schwarz	ESH3-Z2	100107	2024/5/10	2025/5/9
AAN	TESEQ	ISN T800	30327	2024/11/1	2025/10/31

Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Pre-Amplifier	HP	8447F	2944A07999	2024/5/11	2025/5/10
EMI Test Receiver	Rohde & Schwarz	ESCI	101414	2024/5/11	2025/5/10
Bilog Antenna	Schwarzbeck	VULB9163	141	2024/6/15	2026/6/14
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2023/5/12	2025/5/11
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1177	2023/5/12	2025/5/11
Cable	Schwarzbeck	AK9513	ACRX1	2024/5/11	2025/5/10
Cable	Rosenberger	N/A	FP2RX2	2024/5/11	2025/5/10
Cable	Schwarzbeck	AK9513	CRPX1	2024/5/11	2025/5/10
Cable	Schwarzbeck	AK9513	CRRX2	2024/5/11	2025/5/10

Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Spectrum Analyzer	Rohde & Schwarz	FSV30	103039	2024/5/11	2025/5/10
Signal Analyzer	Agilent	N9010A	MY53470879	2024/5/10	2025/5/9
RF Control Unit(Power Meter)	Tonscend	JS0806-2	\	2024/5/10	2025/5/9
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2024/5/10	2025/5/9

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

☒ Frequency and Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	17	2435	23	2465
12	2410	18	2440	24	2470
13	2415	19	2445	25	2475
14	2420	20	2450	26	2480
15	2425	21	2455		
16	2430	22	2460		

☒ Test Frequency and Channel:

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	18	2440	26	2480

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

Name of Firm : EMTEK(SHENZHEN) CO., LTD.

Site Location : Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.4-2014 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

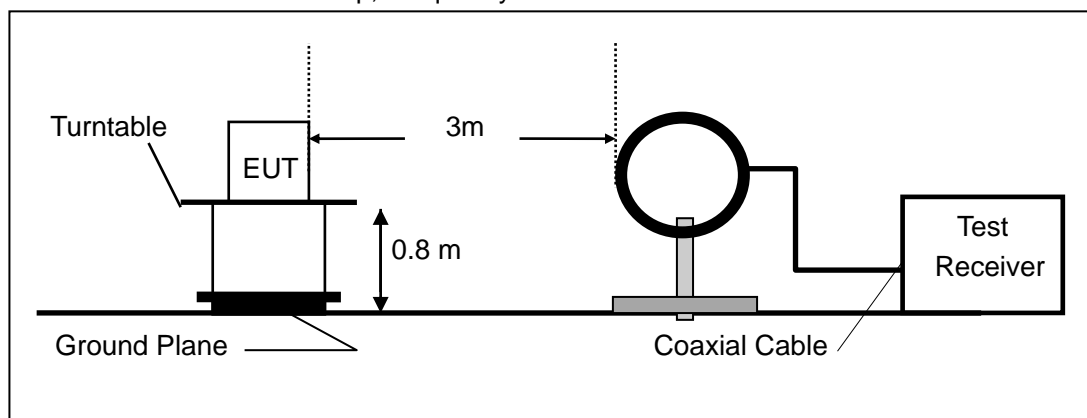


(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

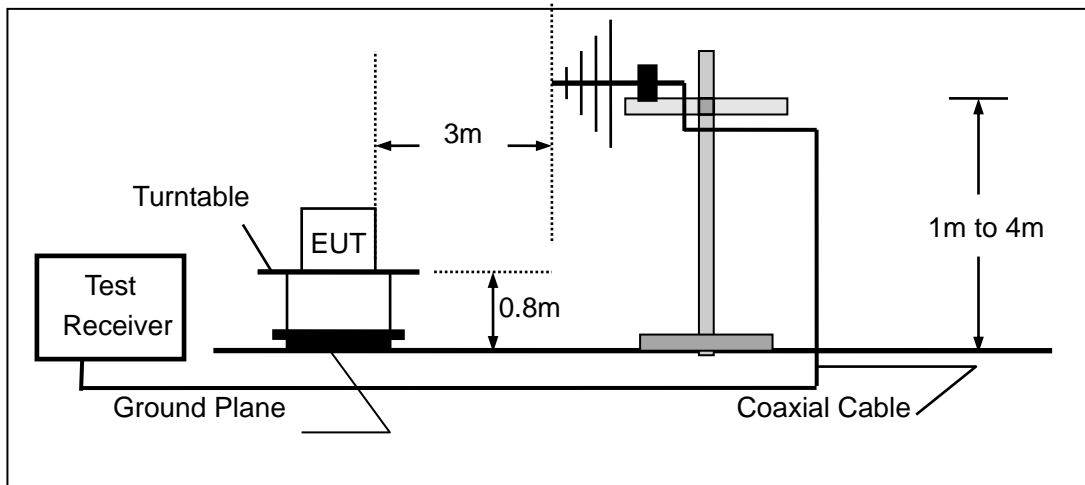

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

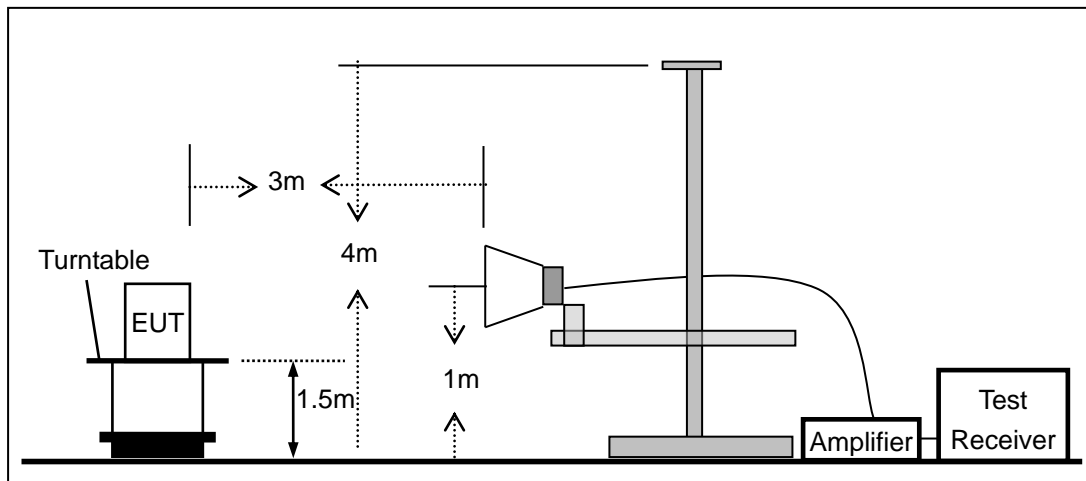

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

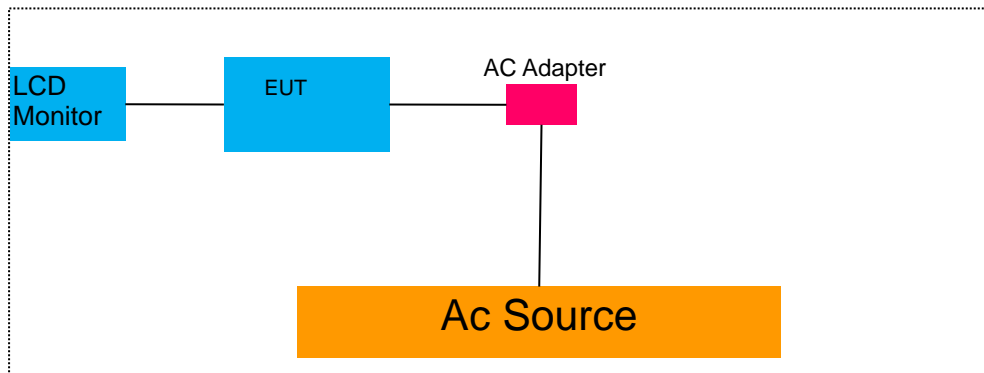

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details

Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Adapter cable	1.5	Unshielded	Without Ferrite

Auxiliary Cable List and Details

Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
HDMI cable	1.5	Shielded	With Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	acer	ZR1	LXTECOCO76643158 372500
LCD Monitor	SONY	SDM-S53/B T8UC7	P-17465811-F

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS (6DB) BANDWIDTH

Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v04

Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

Test Configuration

Test according to clause 7.1 radio frequency test setup 1

Test Procedure

The EUT was operating in O-QPSK mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) = 300 kHz.

Set Span = 2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.


Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.

Test Results


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
ZIGB	Ant1	2405	1.63	2404.19	2405.82	0.5	PASS
ZIGB	Ant1	2440	1.63	2439.19	2440.82	0.5	PASS
ZIGB	Ant1	2480	1.64	2479.18	2480.82	0.5	PASS

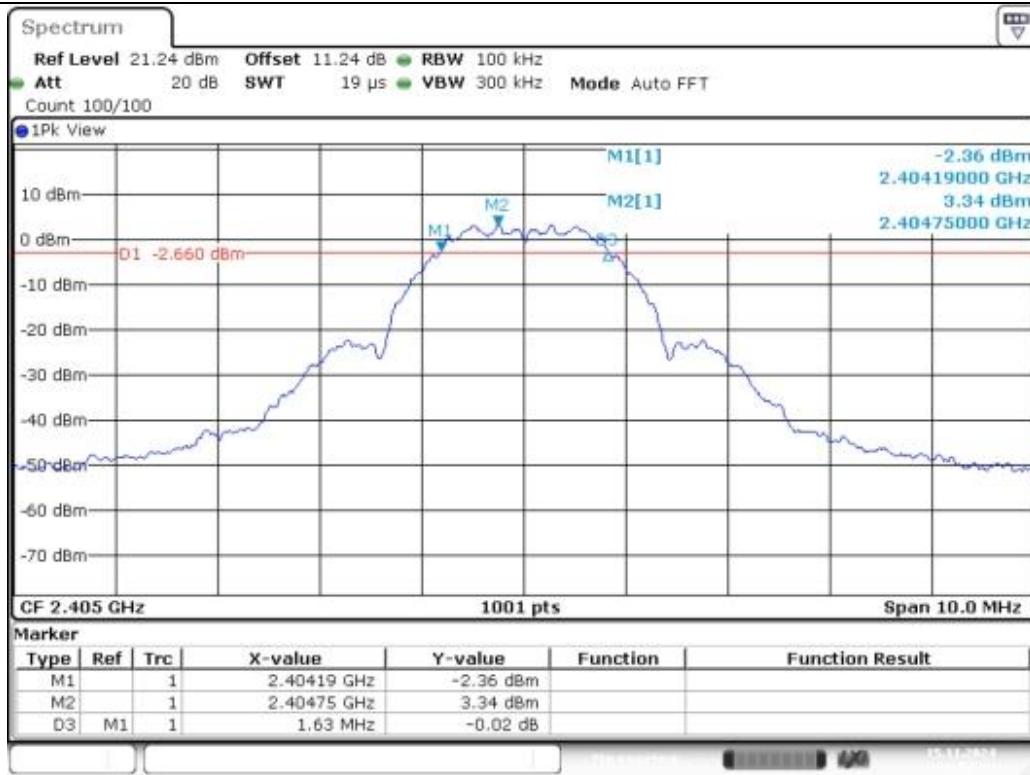


Date: 15.NOV.2024 16:52:27

ZIGB-Ant1-2405-PASS

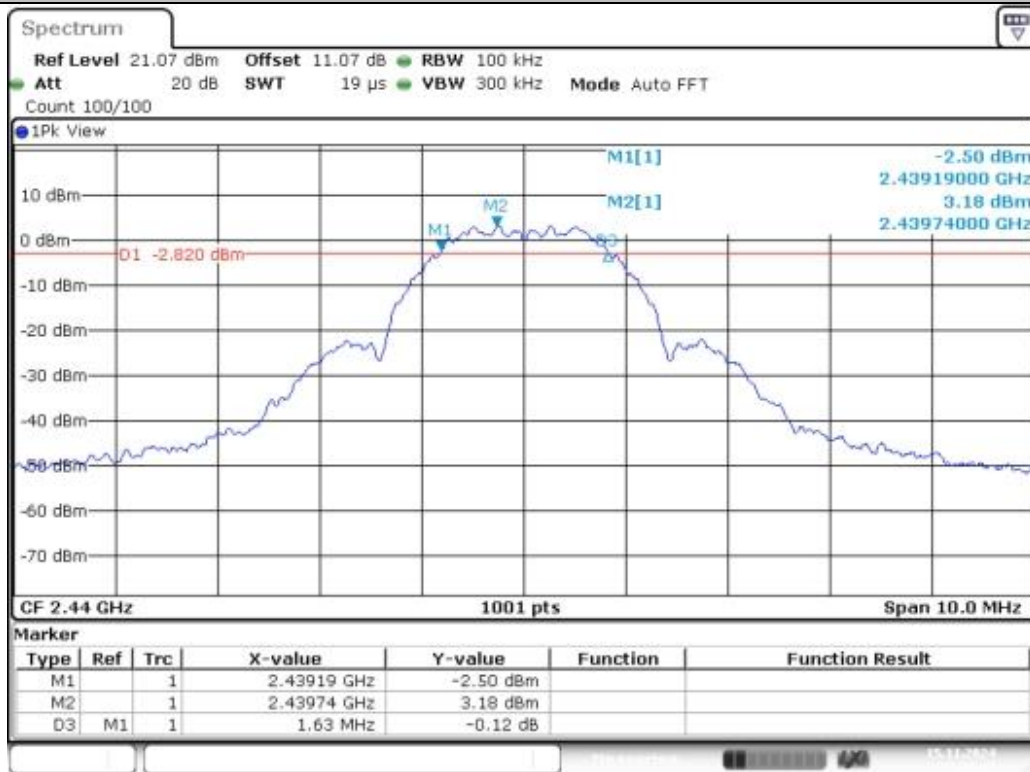

Date: 15.NOV.2024 17:20:48

ZIGB-Ant1-2440-PASS

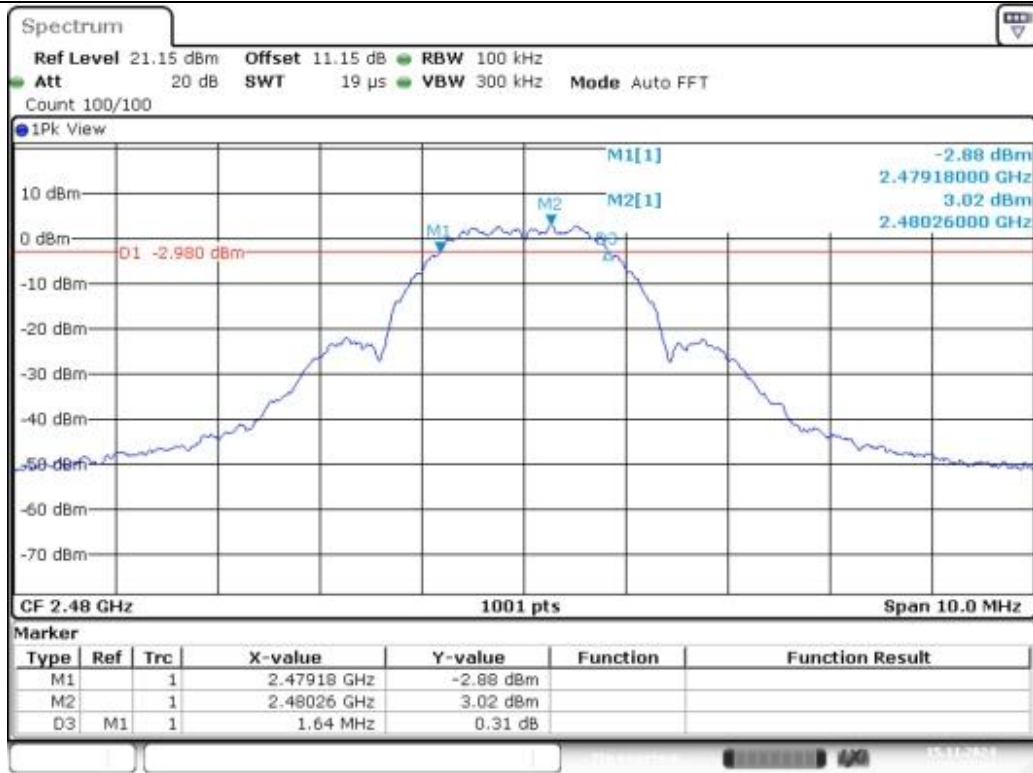

Date: 15.NOV.2024 17:23:21

ZIGB-Ant1-2480-PASS

8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v04

Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.2 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.3 Test Procedure

■ According to FCC Part 15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The testing follows FCC public Notice DA 00-705 Measurement Guidelines.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit = 30 - (Gain - 6)

8.2.4 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

TestMode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
ZIGB	Ant1	2405	7.03	≤30	PASS
ZIGB	Ant1	2440	6.88	≤30	PASS
ZIGB	Ant1	2480	6.76	≤30	PASS

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v04

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.


Use the peak marker function to determine the maximum amplitude level within the RBW.

Note: If antenna Gain exceeds 6 dBi, then PSD Limit=8-(Gain - 6)

8.3.5 Test Results


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
ZIGB	Ant1	2405	-8.16	≤8.00	PASS
ZIGB	Ant1	2440	-8.32	≤8.00	PASS
ZIGB	Ant1	2480	-8.44	≤8.00	PASS

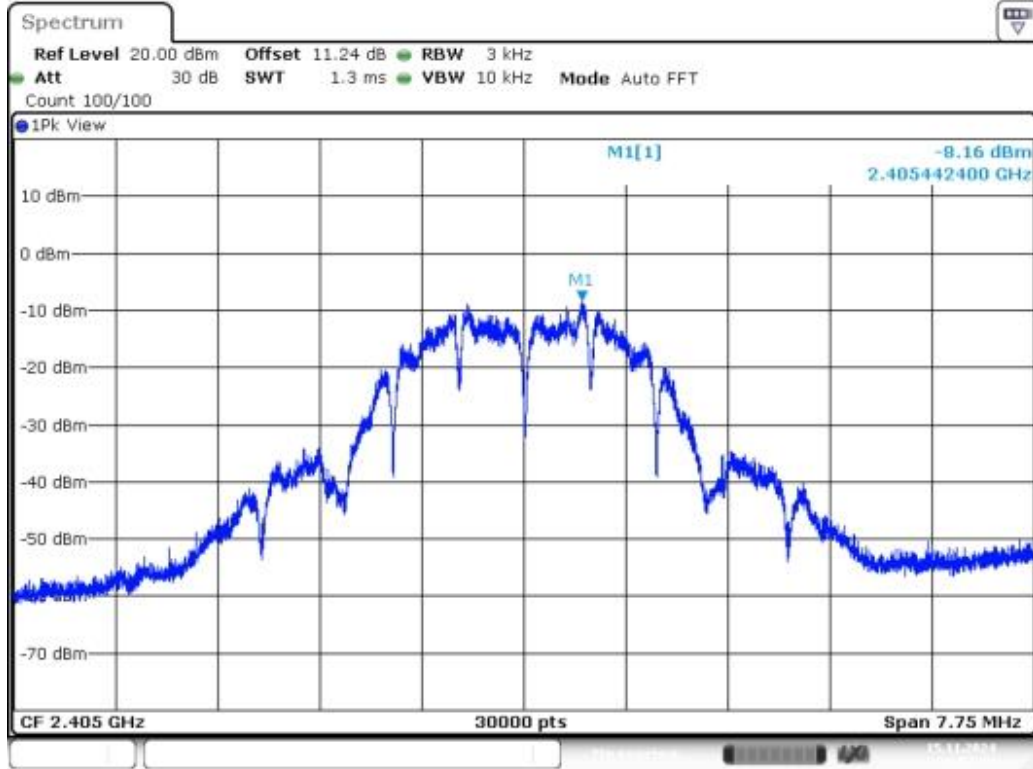

Date: 15.NOV.2024 16:53:00

ZIGB-Ant1-2405-PASS

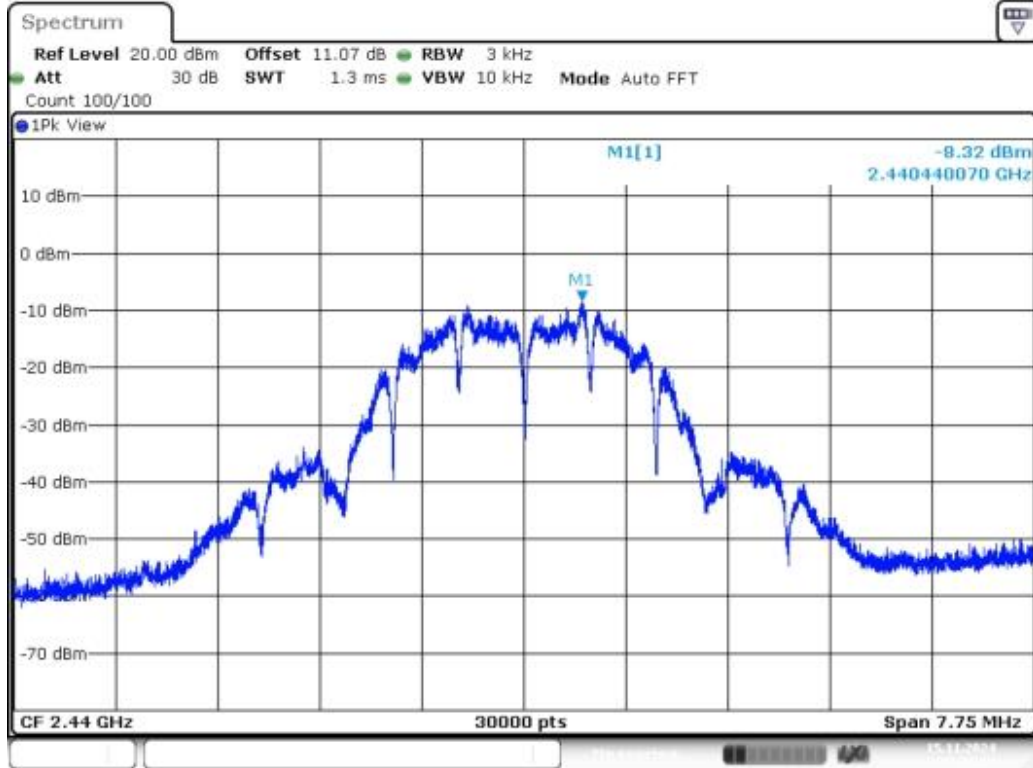

Date: 15.NOV.2024 17:21:18

ZIGB-Ant1-2440-PASS



Date: 15.NOV.2024 17:23:52

ZIGB-Ant1-2480-PASS

8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v04

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.4.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


Band edge measurements

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
ZIGB	Ant1	Low	2405	3.25	-46.48	≤-16.75	PASS
ZIGB	Ant1	High	2480	2.40	-44.47	≤-17.6	PASS

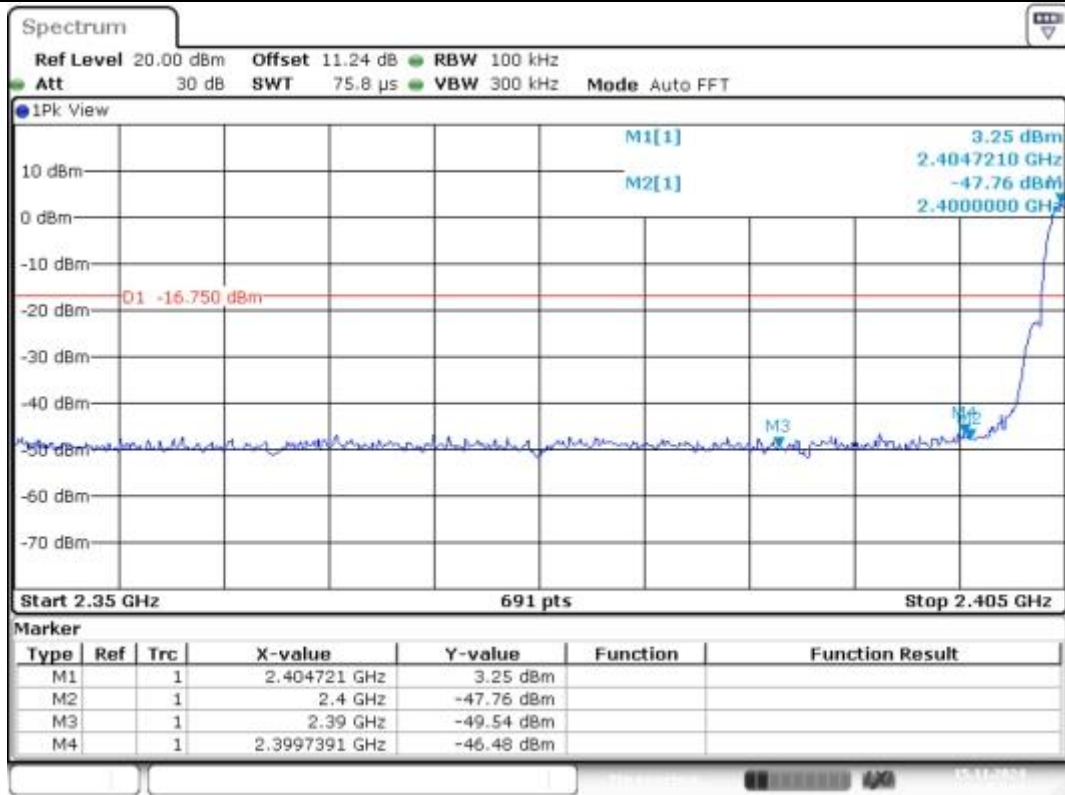

Date: 15.NOV.2024 16:53:13

ZIGB-Ant1-2405-PASS

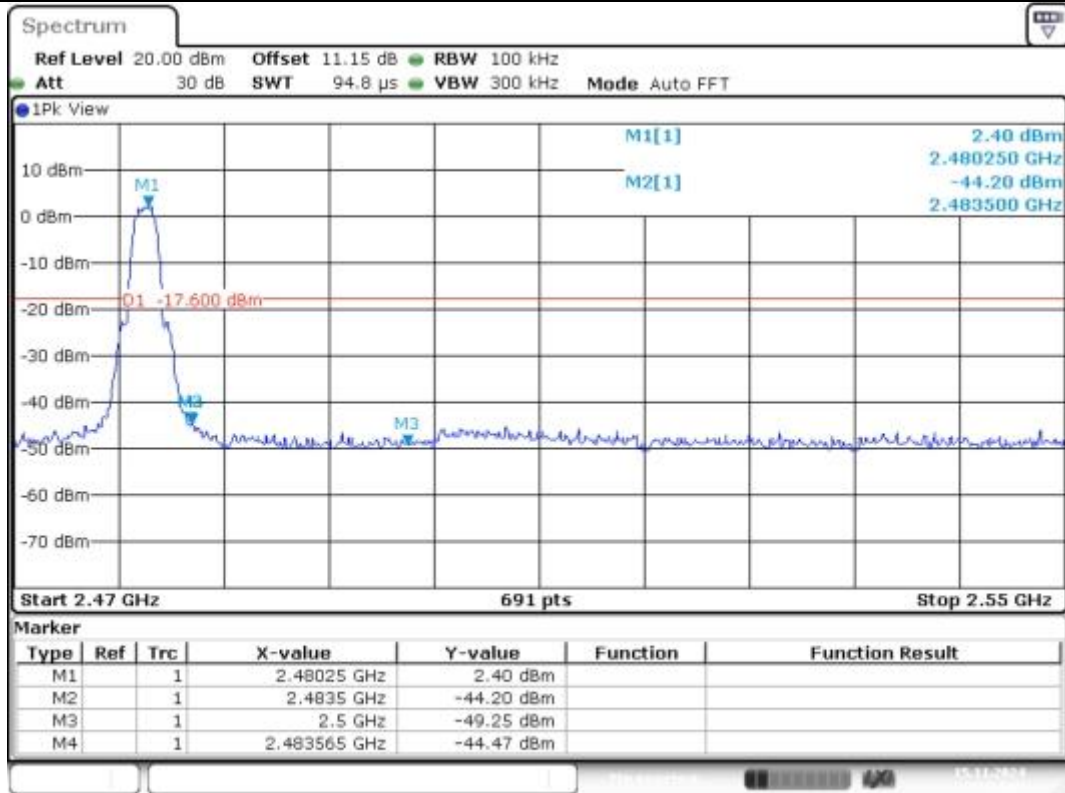

Date: 15.NOV.2024 17:24:05

ZIGB-Ant1-2480-PASS


Conducted Spurious Emission

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
ZIGB	Ant1	2405	0~Reference	3.34	3.34	---	PASS
ZIGB	Ant1	2405	30~1000	3.34	-64.54	≤-16.66	PASS
ZIGB	Ant1	2405	1000~26500	3.34	-54.31	≤-16.66	PASS
ZIGB	Ant1	2440	0~Reference	3.15	3.15	---	PASS
ZIGB	Ant1	2440	30~1000	3.15	-64.19	≤-16.85	PASS
ZIGB	Ant1	2440	1000~26500	3.15	-53.29	≤-16.85	PASS
ZIGB	Ant1	2480	0~Reference	3.01	3.01	---	PASS
ZIGB	Ant1	2480	30~1000	3.01	-64.14	≤-16.99	PASS
ZIGB	Ant1	2480	1000~26500	3.01	-50.82	≤-16.99	PASS




Date: 15.NOV.2024 16:54:24

ZIGB-Ant1-2405-0~Reference-PASS

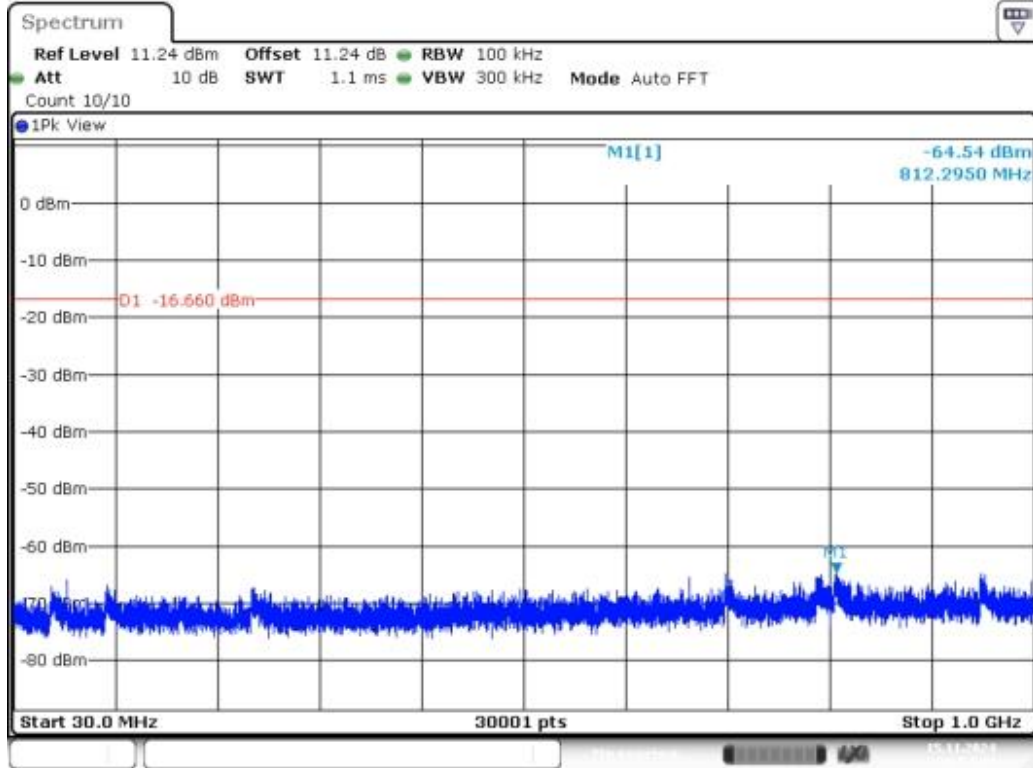


Date: 15.NOV.2024 16:54:33

ZIGB-Ant1-2405-30~1000-PASS

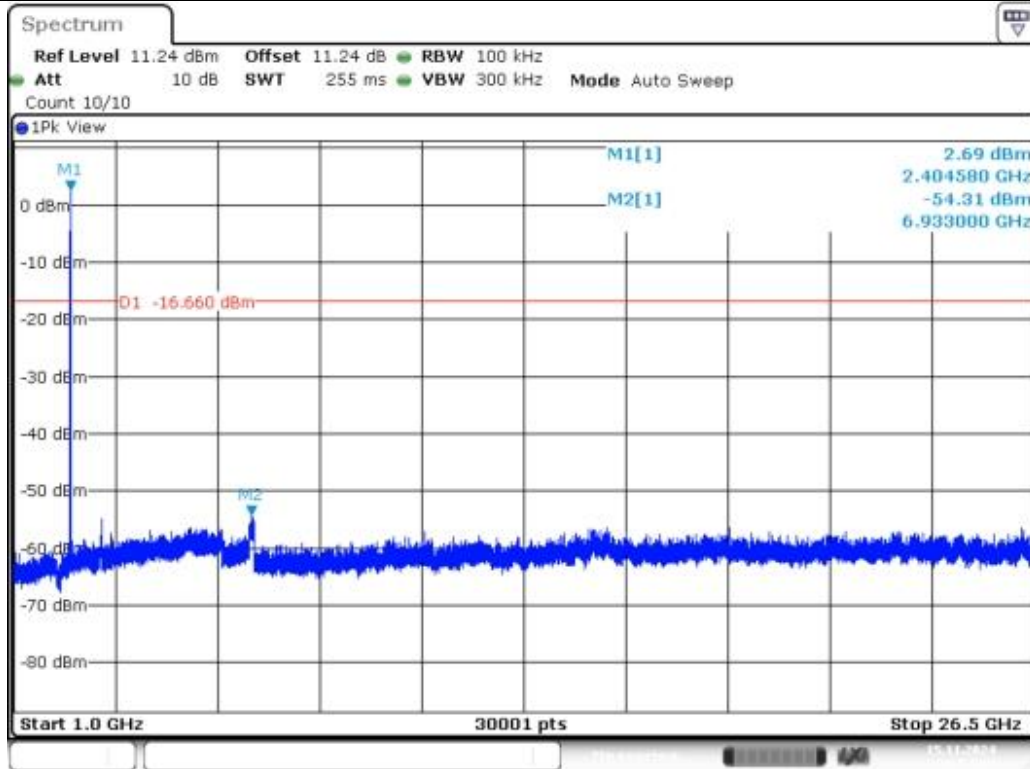


Date: 15.NOV.2024 16:54:55

ZIGB-Ant1-2405-1000~26500-PASS

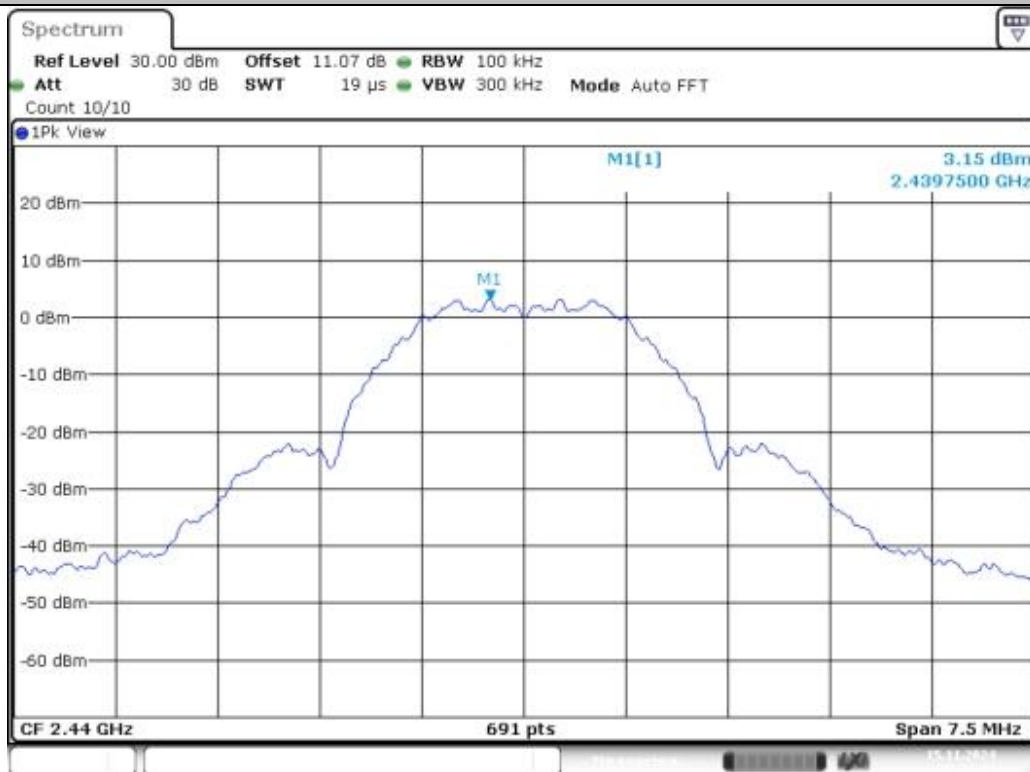


Date: 15.NOV.2024 17:21:30

ZIGB-Ant1-2440-0~Reference-PASS

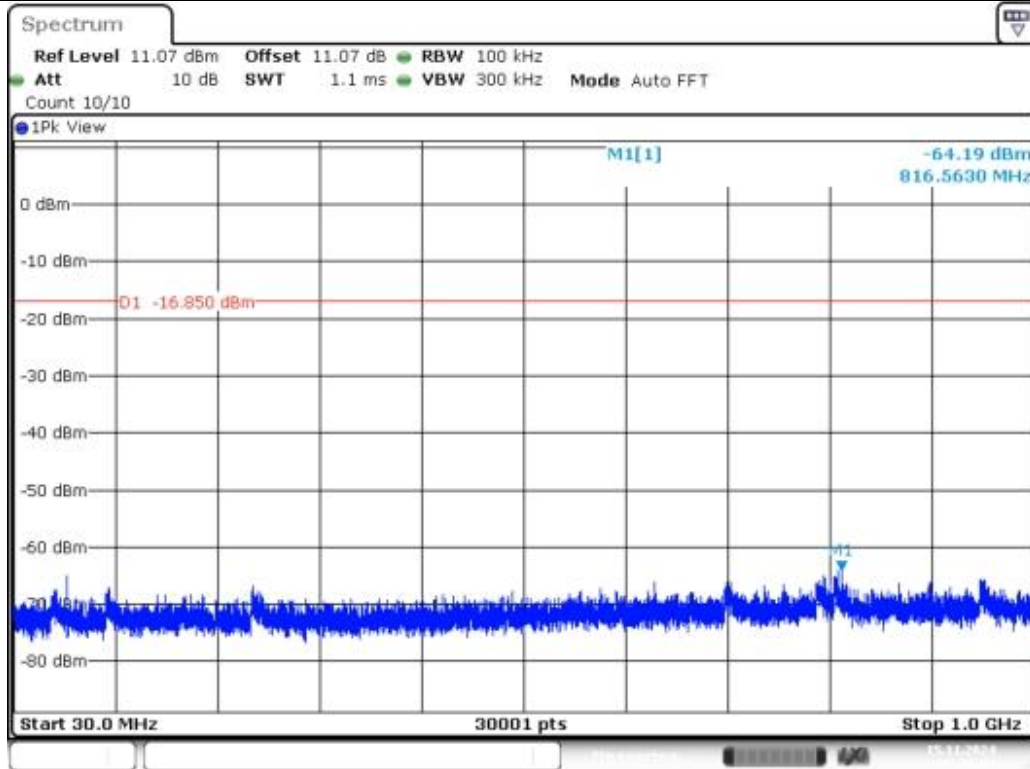

Date: 15.NOV.2024 17:21:39

ZIGB-Ant1-2440-30~1000-PASS

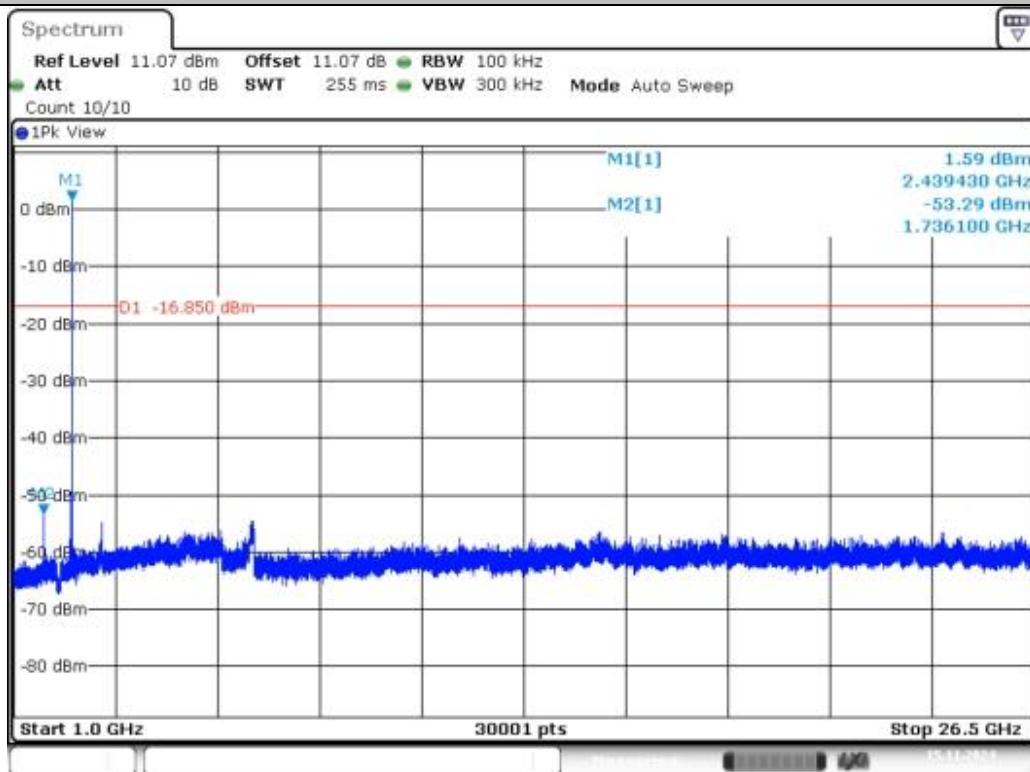


Date: 15.NOV.2024 17:22:02

ZIGB-Ant1-2440-1000~26500-PASS




Date: 15.NOV.2024 17:25:17

ZIGB-Ant1-2480-0~Reference-PASS

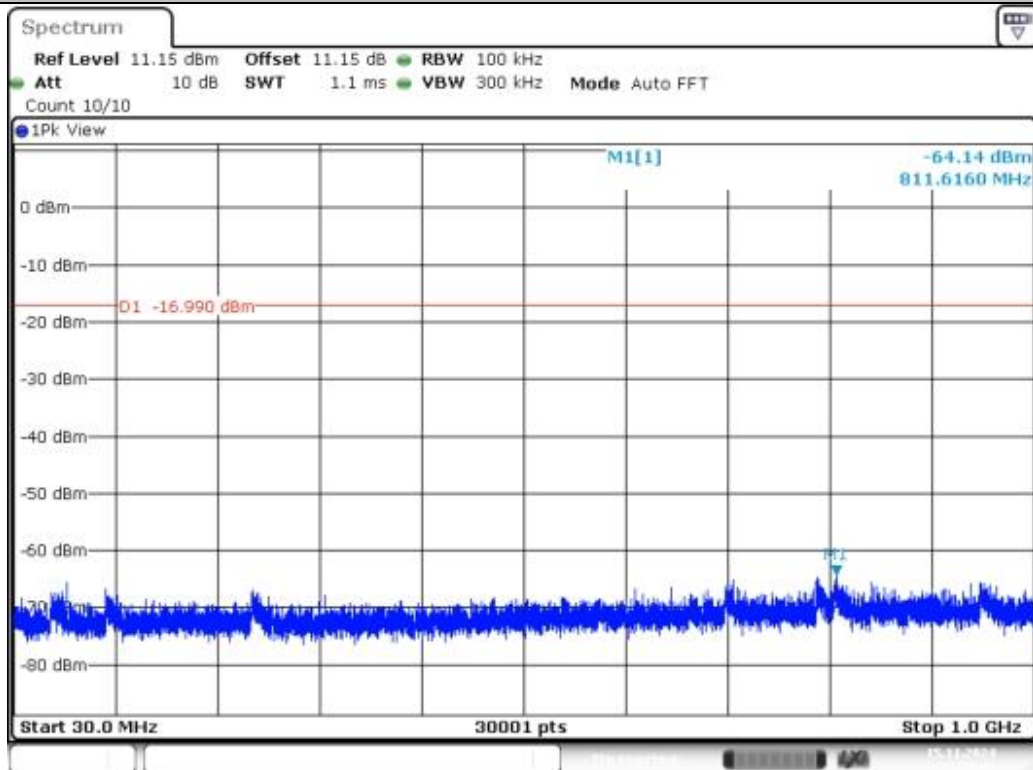

Date: 15.NOV.2024 17:25:26

ZIGB-Ant1-2480-30~1000-PASS

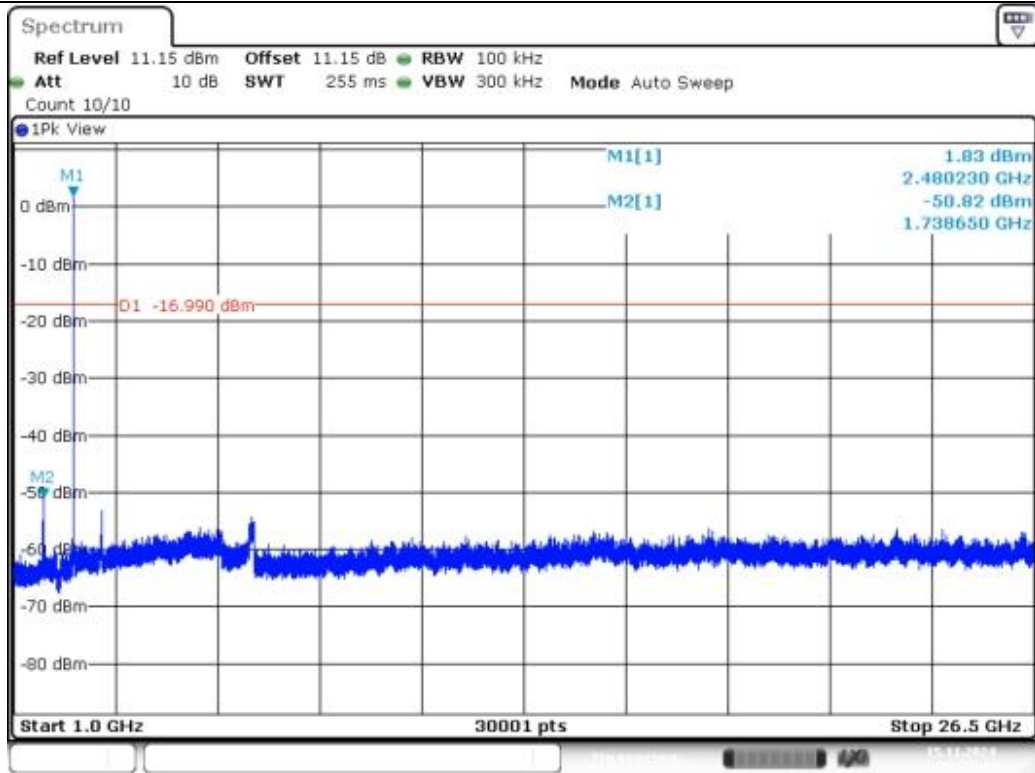

Date: 15.NOV.2024 17:25:48

ZIGB-Ant1-2480-1000~26500-PASS

8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 DTS 01 Meas. Guidance v04

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V/m}$)	300
0.490-1.705	2400/F(KHz)	20 log ($\mu\text{V/m}$)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Test mode: TX Mode

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Test mode: O-QPSK Frequency: Channel 1: 2405MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
7929.37	V	55.06	39.17	74	54	18.94	14.83
9900	V	60.43	43.34	74	54	13.57	10.66
17216.2	V	61.59	45.95	74	54	12.41	8.05
8431.87	H	54.97	41.10	74	54	19.03	12.90
9928.12	H	60.19	42.81	74	54	13.81	11.19
17499.3	H	62.84	47.27	74	54	11.16	6.73

Test mode: O-QPSK Frequency: Channel 8: 2440MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
8435.62	V	55.53	40.72	74	54	18.47	13.28
11505	V	60.28	44.98	74	54	13.72	9.02
17932.5	V	61.83	47.92	74	54	12.17	6.08
8454.37	H	56.21	40.90	74	54	17.79	13.10
9931.87	H	60.27	42.34	74	54	13.73	11.66
16462.5	H	62.45	46.28	74	54	11.55	7.72

Test mode: O-QPSK Frequency: Channel 1: 2480MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
8405.62	V	55.05	40.87	74	54	18.95	13.13
9926.25	V	60.44	42.78	74	54	13.56	11.22
16620	V	61.37	44.80	74	54	12.63	9.20
7957.5	H	55.33	39.09	74	54	18.67	14.91
9881.25	H	60.14	42.74	74	54	13.86	11.26
17656.8	H	61.11	46.52	74	54	12.89	7.48

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Test mode: O-QPSK Frequency: Channel 1: 2405MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	PK(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2385.01	H	43.14	74.00	38.17	54.00
2387.86	V	43.50	74.00	38.31	54.00


Test mode: O-QPSK Frequency: Channel 16: 2480MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	PK(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2484.32	H	43.88	74.00	37.95	54.00
2483.61	V	44.02	74.00	37.87	54.00


- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

All the modulation modes were tested, the data of the worst mode are described in the following table


Test Model	Spurious Emission in Restricted Band 2310-2390MHz		
	O-QPSK		
	<input checked="" type="checkbox"/> Channel 1: 2405MHz	<input type="checkbox"/> Channel 16: 2480MHz	Polarity: H

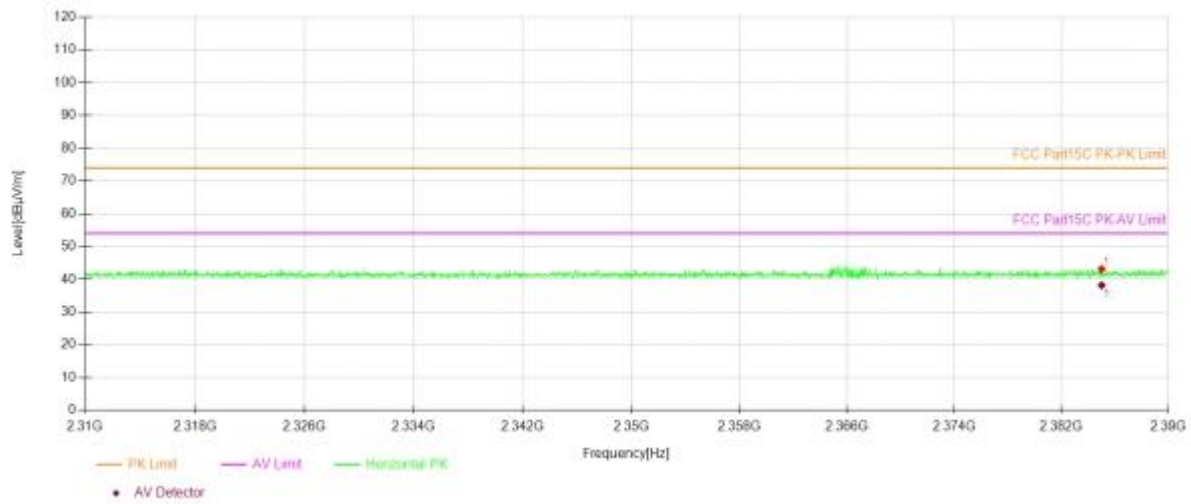


Test Model	Spurious Emission in Restricted Band 2310-2390MHz		
	O-QPSK		
	<input checked="" type="checkbox"/> Channel 1: 2405MHz	<input type="checkbox"/> Channel 16: 2480MHz	Polarity: V

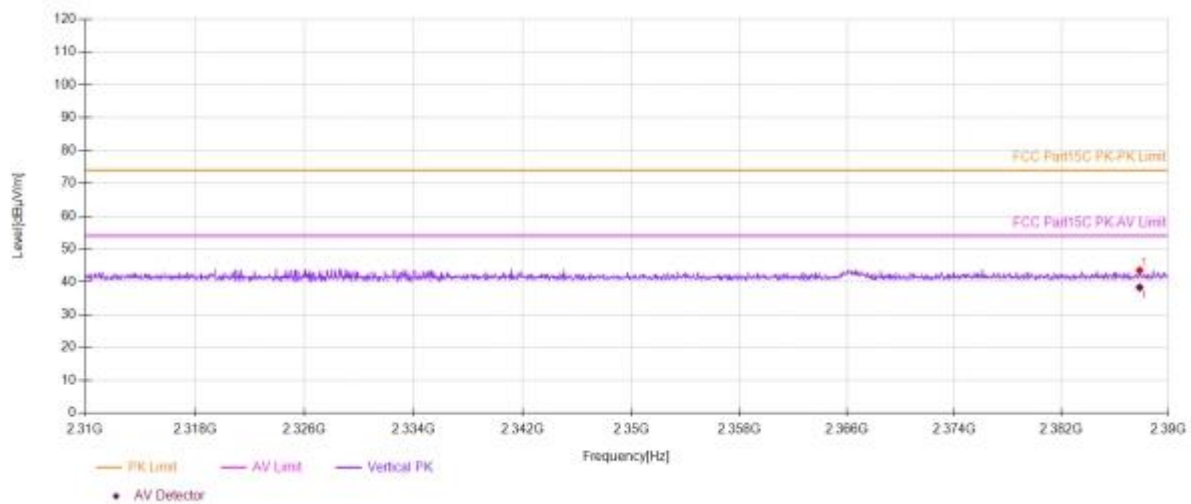

Test Model Spurious Emission in Restricted Band 2483.5-2500MHz
O-QPSK
☐ Channel 1: 2405MHz ☒ Channel 16: 2480MHz Polarity: H

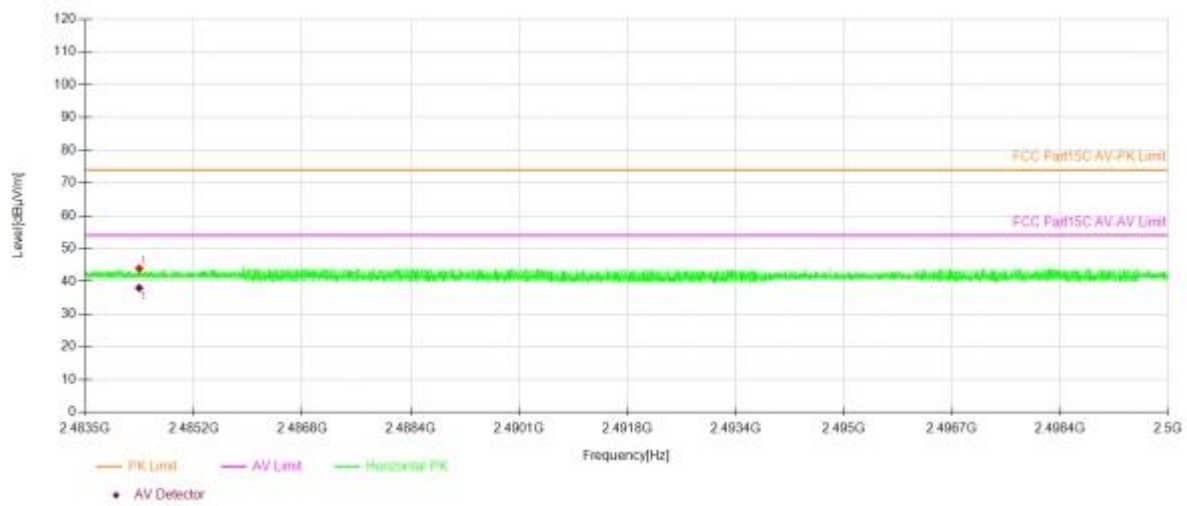


Test Model Spurious Emission in Restricted Band 2483.5-2500MHz
O-QPSK
☐ Channel 1: 2405MHz ☒ Channel 16: 2480MHz Polarity: V

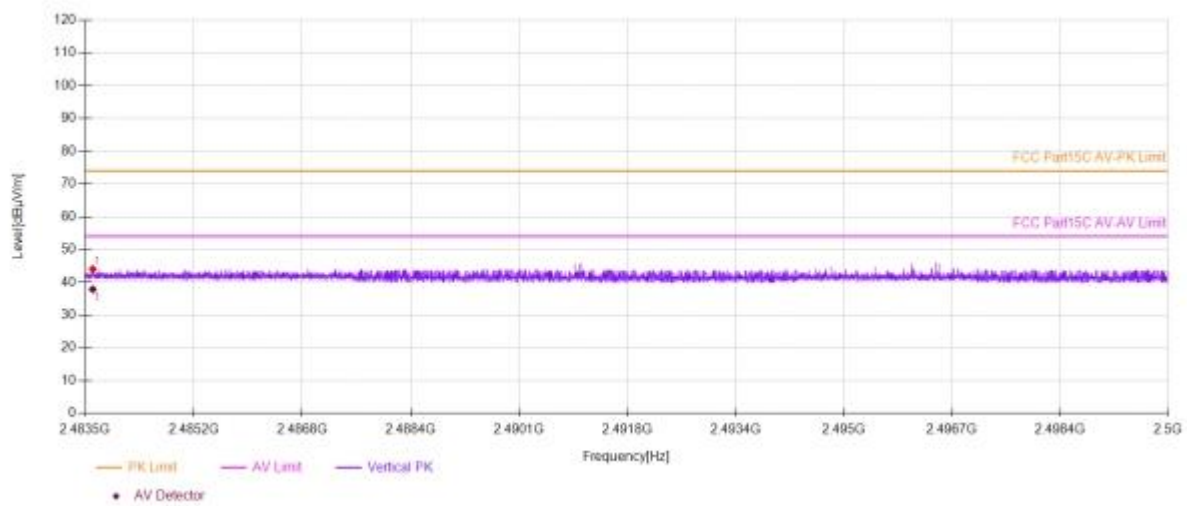

■ Spurious Emission below 1GHz (30MHz to 1GHz)

2405

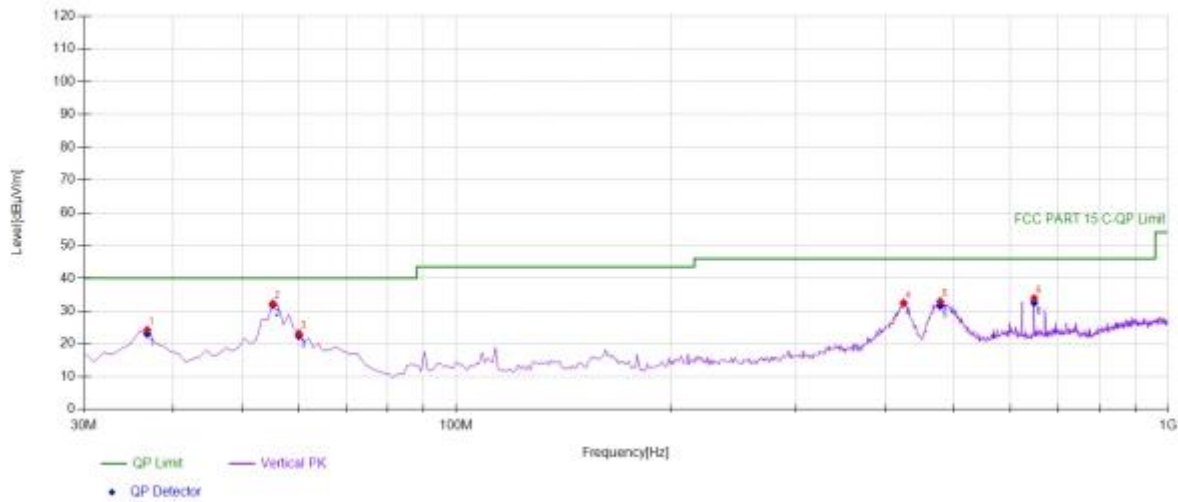


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	42.15	-17.91	24.24	PK	40.00	15.76	Vertical
2	55.2452	49.11	-16.80	32.31	PK	40.00	7.69	Vertical
3	60.1001	40.63	-17.46	23.17	PK	40.00	16.83	Vertical
4	425.185	44.22	-11.72	32.50	PK	46.00	13.50	Vertical
5	478.588	43.14	-10.18	32.96	PK	46.00	13.04	Vertical
6	648.508	41.21	-7.29	33.92	PK	46.00	12.08	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	-17.91	23.04	40.00	16.96
2	55.2452	-16.80	31.83	40.00	8.17
3	60.1001	-17.46	22.37	40.00	17.63
4	425.1852	-11.72	32.41	46.00	13.59
5	478.5886	-10.18	31.59	46.00	14.41
6	648.5085	-7.29	32.55	46.00	13.45

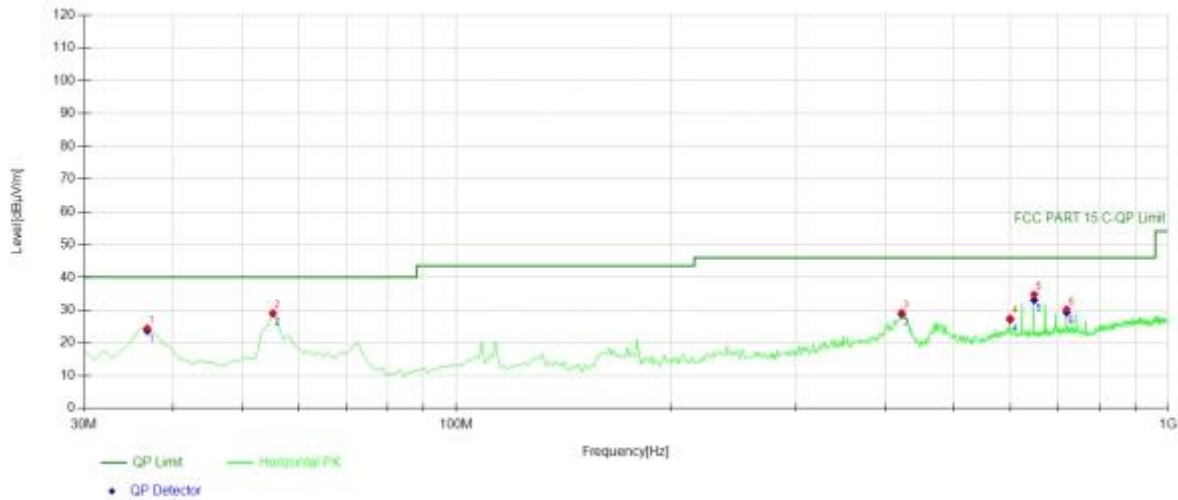


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	42.35	-17.91	24.44	PK	40.00	15.56	Horizontal
2	55.2452	45.82	-16.80	29.02	PK	40.00	10.98	Horizontal
3	422.272	41.00	-11.81	29.19	PK	46.00	16.81	Horizontal
4	599.96	33.92	-6.42	27.50	PK	46.00	18.50	Horizontal
5	648.508	42.03	-7.29	34.74	PK	46.00	11.26	Horizontal
6	720.360	36.39	-6.19	30.20	PK	46.00	15.80	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	-17.91	23.64	40.00	16.36
2	55.2452	-16.80	28.94	40.00	11.06
3	422.2723	-11.81	28.78	46.00	17.22
4	599.96	-6.42	27.09	46.00	18.91
5	648.5085	-7.29	33.05	46.00	12.95
6	720.3604	-6.19	29.22	46.00	16.78

2440

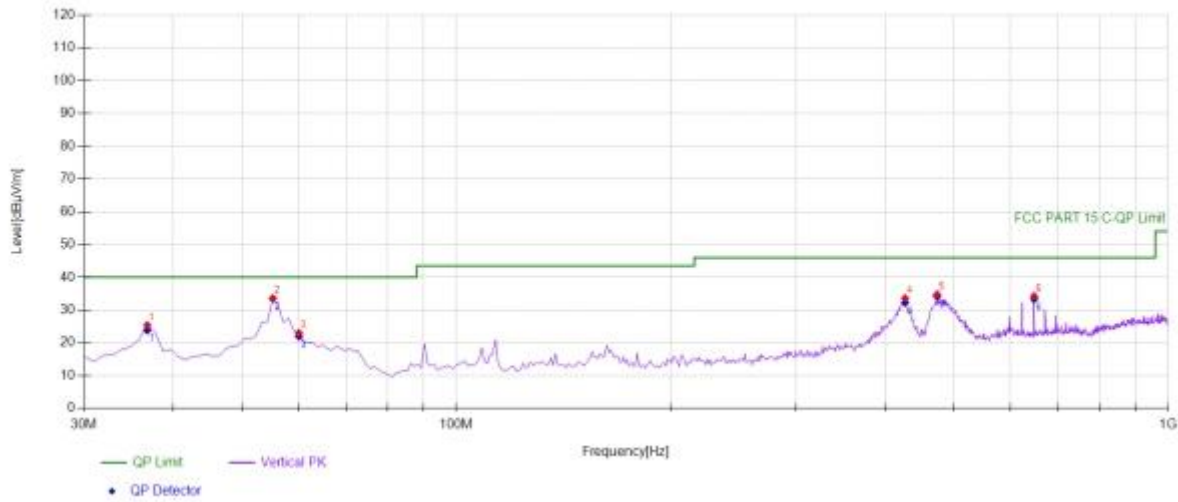


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	43.32	-17.91	25.41	PK	40.00	14.59	Vertical
2	55.2452	50.41	-16.80	33.61	PK	40.00	6.39	Vertical
3	60.1001	40.46	-17.46	23.00	PK	40.00	17.00	Vertical
4	427.127	45.26	-11.65	33.61	PK	46.00	12.39	Vertical
5	473.733	45.01	-10.22	34.79	PK	46.00	11.21	Vertical
6	648.508	41.56	-7.29	34.27	PK	46.00	11.73	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	-17.91	23.85	40.00	16.15
2	55.2452	-16.80	33.49	40.00	6.51
3	60.1001	-17.46	21.99	40.00	18.01
4	427.1271	-11.65	32.27	46.00	13.73
5	473.7337	-10.22	34.17	46.00	11.83
6	648.5085	-7.29	33.32	46.00	12.68

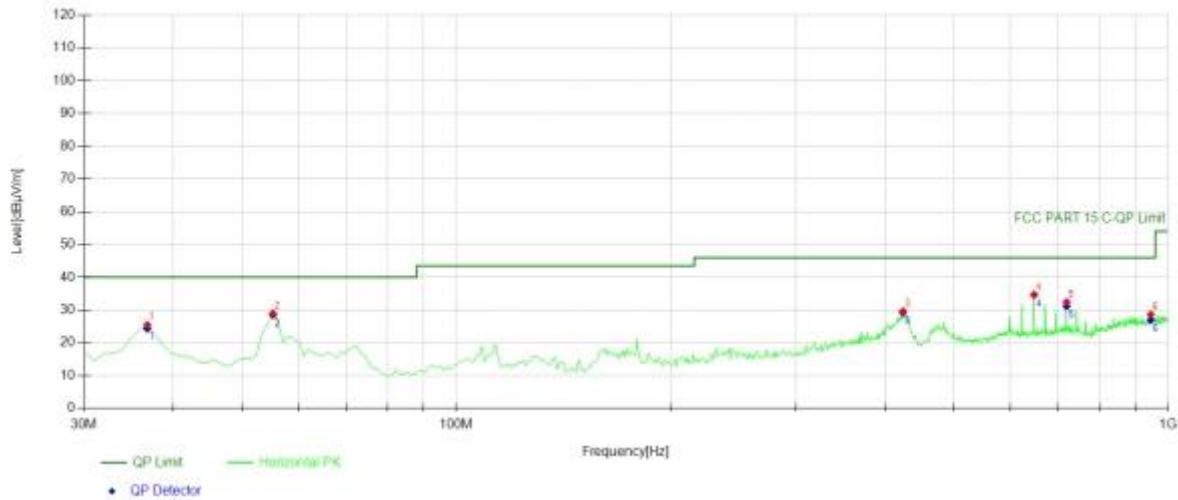


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	43.39	-17.91	25.48	PK	40.00	14.52	Horizontal
2	55.2452	45.72	-16.80	28.92	PK	40.00	11.08	Horizontal
3	424.214	41.35	-11.74	29.61	PK	46.00	16.39	Horizontal
4	648.508	41.98	-7.29	34.69	PK	46.00	11.31	Horizontal
5	720.360	38.64	-6.19	32.45	PK	46.00	13.55	Horizontal
6	945.625	31.85	-3.23	28.62	PK	46.00	17.38	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	-17.91	24.35	40.00	15.65
2	55.2452	-16.80	28.51	40.00	11.49
3	424.2142	-11.74	29.20	46.00	16.80
4	648.5085	-7.29	34.67	46.00	11.33
5	720.3604	-6.19	31.15	46.00	14.85
6	945.6256	-3.23	26.99	46.00	19.01

2480

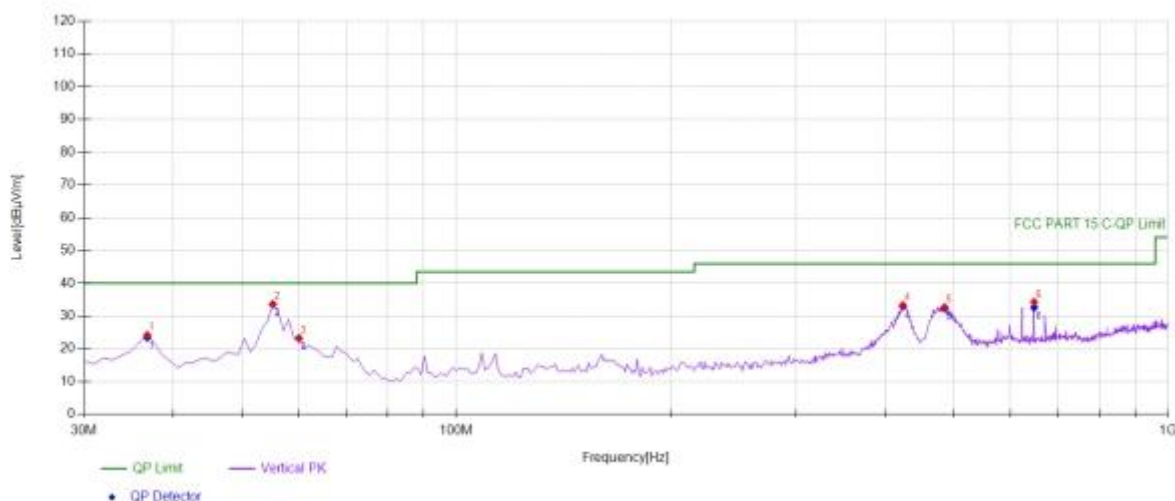


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	42.13	-17.91	24.22	PK	40.00	15.78	Vertical
2	55.2452	50.45	-16.80	33.65	PK	40.00	6.35	Vertical
3	60.1001	40.71	-17.46	23.25	PK	40.00	16.75	Vertical
4	424.214	45.06	-11.74	33.32	PK	46.00	12.68	Vertical
5	485.385	42.84	-10.13	32.71	PK	46.00	13.29	Vertical
6	648.508	41.58	-7.29	34.29	PK	46.00	11.71	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	-17.91	23.45	40.00	16.55
2	55.2452	-16.80	33.59	40.00	6.41
3	60.1001	-17.46	23.19	40.00	16.81
4	424.2142	-11.74	32.94	46.00	13.06
5	485.3854	-10.13	32.33	46.00	13.67
6	648.5085	-7.29	32.62	46.00	13.38

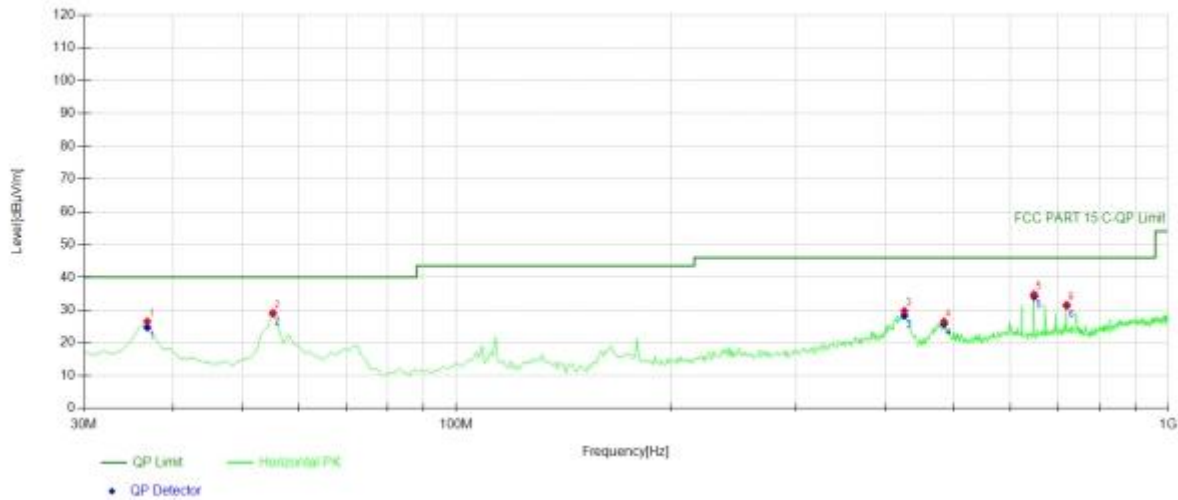

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	44.45	-17.91	26.54	PK	40.00	13.46	Horizontal
2	55.2452	45.90	-16.80	29.10	PK	40.00	10.90	Horizontal
3	426.156	41.44	-11.68	29.76	PK	46.00	16.24	Horizontal
4	484.414	36.65	-10.14	26.51	PK	46.00	19.49	Horizontal
5	648.508	42.10	-7.29	34.81	PK	46.00	11.19	Horizontal
6	720.360	37.83	-6.19	31.64	PK	46.00	14.36	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	-17.91	24.72	40.00	15.28
2	55.2452	-16.80	28.96	40.00	11.04
3	426.1562	-11.68	28.33	46.00	17.67
4	484.4144	-10.14	25.80	46.00	20.20
5	648.5085	-7.29	34.10	46.00	11.90
6	720.3604	-6.19	31.32	46.00	14.68

8.6 CONDUCTED EMISSIONS TEST

Applicable Standard

According to FCC Part 15.207(a)

Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

Test according to clause 7.3 conducted emission test setup


Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

Test Results

Pass

The 120V & 240V voltage have been tested, and the worst result recorded was report as below:

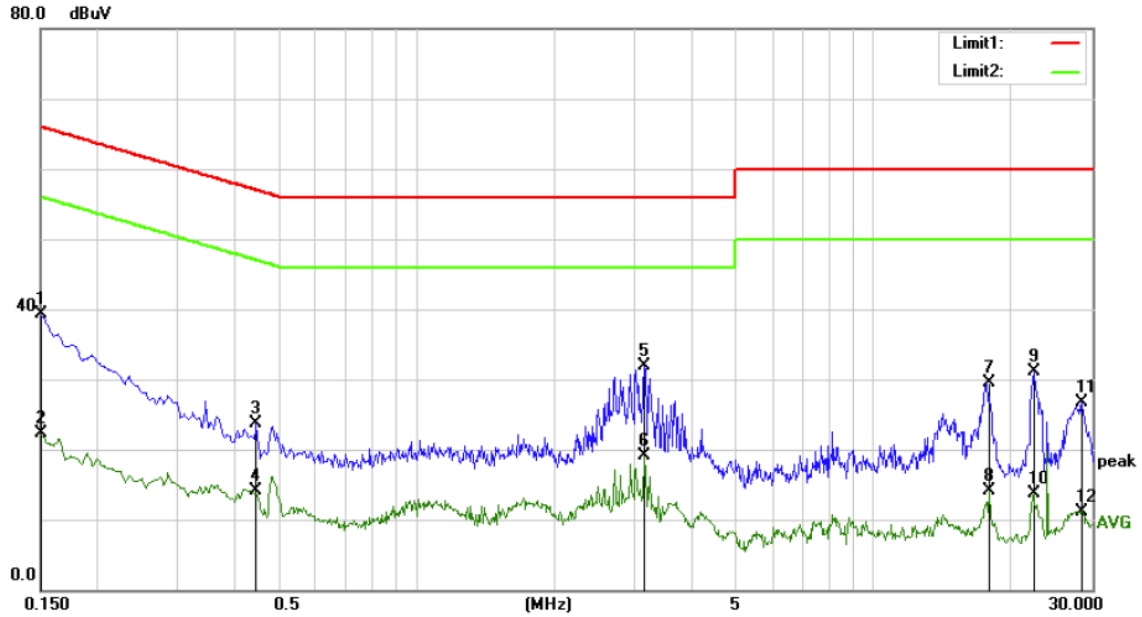

Site Conduction 2#

Phase: **N**

Temperature: 23.3

Limit: (CE)FCC PART 15 class B_QP


Power: DC 5V FROM adapter

Humidity: 47 %

Mode: Zigbee mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	28.70	10.67	39.37	66.00	-26.63	QP	
2		0.1500	11.66	10.67	22.33	56.00	-33.67	AVG	
3		0.4450	13.01	10.65	23.66	56.97	-33.31	QP	
4		0.4450	3.36	10.65	14.01	46.97	-32.96	AVG	
5	*	3.1550	21.48	10.52	32.00	56.00	-24.00	QP	
6		3.1550	8.64	10.52	19.16	46.00	-26.84	AVG	
7		17.9300	18.52	10.97	29.49	60.00	-30.51	QP	
8		17.9300	3.08	10.97	14.05	50.00	-35.95	AVG	
9		22.3050	19.90	11.21	31.11	60.00	-28.89	QP	
10		22.3050	2.50	11.21	13.71	50.00	-36.29	AVG	
11		28.5050	15.37	11.26	26.63	60.00	-33.37	QP	
12		28.5050	-0.06	11.26	11.20	50.00	-38.80	AVG	

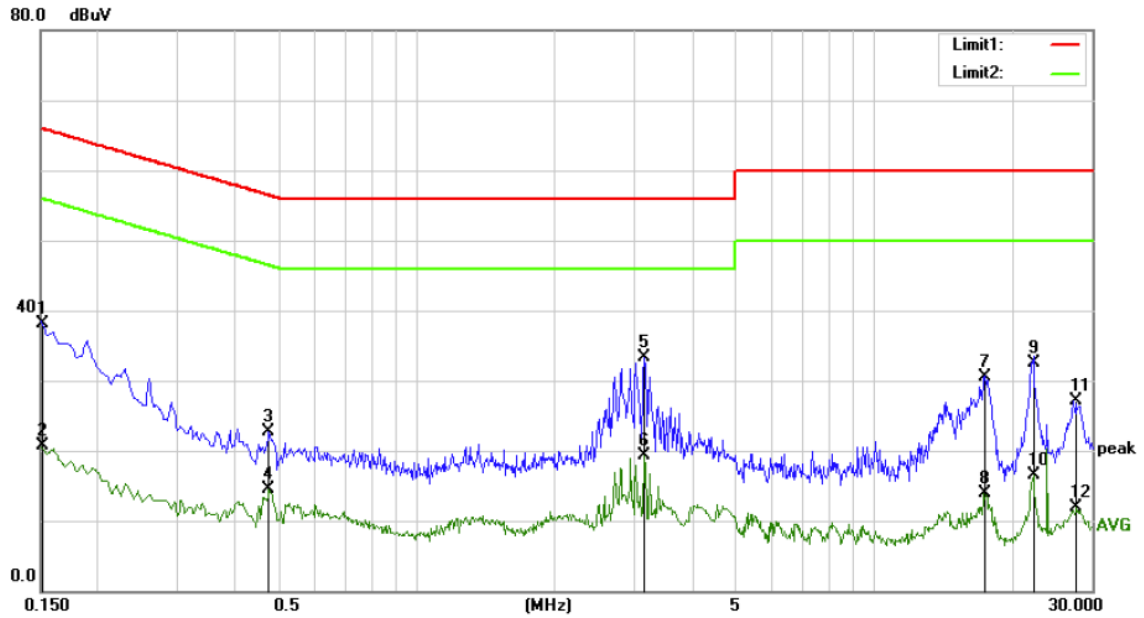

Site: Conduction 2#
 Limit: (CE)FCC PART 15 class B QP
 Mode: Zigbee mode
 Note:

Phase: **L1**
 Power: DC 5V FROM adapter
 Temperature: 23.3
 Humidity: 47 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1515	27.51	10.67	38.18	65.92	-27.74	QP	
2		0.1515	10.02	10.67	20.69	55.92	-35.23	AVG	
3		0.4750	12.03	10.66	22.69	56.43	-33.74	QP	
4		0.4750	3.79	10.66	14.45	46.43	-31.98	AVG	
5	*	3.1550	22.77	10.52	33.29	56.00	-22.71	QP	
6		3.1550	8.86	10.52	19.38	46.00	-26.62	AVG	
7		17.5300	19.67	10.93	30.60	60.00	-29.40	QP	
8		17.5300	3.00	10.93	13.93	50.00	-36.07	AVG	
9		22.3300	21.38	11.21	32.59	60.00	-27.41	QP	
10		22.3300	5.36	11.21	16.57	50.00	-33.43	AVG	
11		27.8300	15.75	11.27	27.02	60.00	-32.98	QP	
12		27.8300	0.54	11.27	11.81	50.00	-38.19	AVG	

8.7 ANTENNA APPLICATION

Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Result

PASS.

The EUT has 1 antenna: a Internal Antenna for ZigBee, the gain is 0.32 dBi;

Note: ☒ Antenna use a permanently attached antenna which is not replaceable.
☐ Not using a standard antenna jack or electrical connector for antenna replacement
☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

----- END OF REPORT -----