
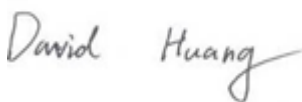


# RF TEST REPORT



Report No.: Q190826S004-FCC-R4

Supersede Report No.: N/A

|  |  |  |  |
|--|--|--|--|
| Applicant  | Cedar Kingdom Corporation Limited                                      |  |  |
| Product Name   | Mobile Phone   |  |  |
| Model No.  | V505c  |  |  |
| Serial No.   | N/A  |  |  |
| Test Standard  | FCC Part 15.247, ANSI C63.10: 2013                                     |  |  |
| Test Date  | Sep 2 to 25, 2019  |  |  |
| Issue Date   | Sep 27, 2019   |  |  |
| Test Result  | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |  |  |
| Equipment complied with the specification  | <input checked="" type="checkbox"/>                                    |  |  |
| Equipment did not comply with the specification  | <input type="checkbox"/>   |  |  |
|   |  |  |  |
| Aaron Liang<br>Test Engineer   |  | David Huang<br>Checked By  |  |
| This test report may be reproduced in full only<br>Test result presented in this test report is applicable to the tested sample only |  |  |  |

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

| Country/Region | Scope                              |
|----------------|------------------------------------|
| USA            | EMC, RF/Wireless, SAR, Telecom     |
| Canada         | EMC, RF/Wireless, SAR, Telecom     |
| Taiwan         | EMC, RF, Telecom, SAR, Safety      |
| Hong Kong      | RF/Wireless, SAR, Telecom          |
| Australia      | EMC, RF, Telecom, SAR, Safety      |
| Korea          | EMI, EMS, RF, SAR, Telecom, Safety |
| Japan          | EMI, RF/Wireless, SAR, Telecom     |
| Singapore      | EMC, RF, SAR, Telecom              |
| Europe         | EMC, RF, SAR, Telecom, Safety      |

|                 |                    |
|-----------------|--------------------|
| Test Report No. | Q190826S004-FCC-R4 |
| Page            | 3 of 40            |

|                 |                    |
|-----------------|--------------------|
| Test Report No. | Q190826S004-FCC-R4 |
| Page            | 4 of 40            |

This page has been left blank intentionally.

# CONTENTS

|   |           |
|---|-----------|
| <b>1. REPORT REVISION HISTORY .....</b>   | <b>6</b>  |
| <b>2. CUSTOMER INFORMATION .....</b>  | <b>6</b>  |
| <b>3. TEST SITE INFORMATION.....</b>  | <b>6</b>  |
| <b>4. EQUIPMENT UNDER TEST (EUT) INFORMATION.....</b>   | <b>7</b>  |
| <b>5. TEST SUMMARY .....</b>  | <b>9</b>  |
| <b>6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....</b>  | <b>10</b> |
| 6.1 ANTENNA REQUIREMENT .....   | 10        |
| 6.2 DTS (6 DB) CHANNEL BANDWIDTH.....   | 11        |
| 6.3 MAXIMUM OUTPUT POWER.....   | 14        |
| 6.4 POWER SPECTRAL DENSITY.....   | 17        |
| 6.5 BAND-EDGE & UNWANTED EMISSIONS INTO RESTRICTED FREQUENCY BANDS.....                             | 19        |
| 6.6 AC POWER LINE CONDUCTED EMISSIONS.....  | 22        |
| 6.7 RADIATED EMISSIONS & RESTRICTED BAND.....   | 26        |
| <b>ANNEX A. TEST INSTRUMENT .....</b>   | <b>34</b> |
| <b>ANNEX B. TEST SETUP AND SUPPORTING EQUIPMENT.....</b>  | <b>36</b> |
| <b>ANNEX C. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST/ DECLARATION OF SIMILARITY.....</b> | <b>40</b> |

## 1. Report Revision History

| Report No.         | Report Version | Description | Issue Date   |
|--------------------|----------------|-------------|--------------|
| Q190826S004-FCC-R4 | NONE           | Original    | Sep 27, 2019 |
|                    |                |             |              |
|                    |                |             |              |
|                    |                |             |              |
|                    |                |             |              |

## 2. Customer information

|                  |  |
|------------------|--|
| Applicant Name   | Cedar Kingdom Corporation Limited  |
| Applicant Add    | Flat/Rm 05, 14/F, Lucky Centre, 165-171 Wanchai Road, Wanchai, Hong Kong |
| Manufacturer     | Cedar Kingdom Corporation Limited  |
| Manufacturer Add | Flat/Rm 05, 14/F, Lucky Centre, 165-171 Wanchai Road, Wanchai, Hong Kong |

## 3. Test site information

|                      |   |
|----------------------|---|
| Lab performing tests | SIEMIC (Shenzhen-China) LABORATORIES  |
| Lab Address          | Zone A, Floor 1, Building 2 Wan Ye Long Technology Park<br>South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China<br>518108 |
| FCC Test Site No.    | 535293  |
| IC Test Site No.     | 4842E-1   |
| Test Software        | Radiated Emission Program-To Shenzhen v2.0  |

## 4. Equipment under Test (EUT) Information

|                               |   |
|-------------------------------|---|
| Description of EUT:           | Mobile Phone  |
| Main Model:                   | V505c   |
| Serial Model:                 | N/A   |
| Date EUT received:            | Aug 28, 2019  |
| Test Date(s):                 | Sep 2 to 25, 2019   |
| Equipment Category :          | DTS   |
| Antenna Gain:                 | GSM850: -0.7dBi<br>PCS1900: 0.4dBi<br>UMTS-FDD Band V: 0.4dBi<br>UMTS-FDD Band II: -0.6dBi<br>WIFI: 0.8dBi<br>Bluetooth/BLE: 0.9dBi   |
| Antenna Type:                 | FPC Antenna   |
| Type of Modulation:           | GSM / GPRS: GMSK<br>EGPRS: GMSK<br>UMTS-FDD: QPSK<br>802.11b/g/n: DSSS, OFDM<br>Bluetooth: GFSK, $\pi$ /4DQPSK, 8DPSK<br>BLE: GFSK<br>GPS: BPSK   |
| RF Operating Frequency (ies): | GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz<br>PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz<br>UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz<br>UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;<br>RX: 1932.4 ~ 1987.6 MHz<br>WIFI: 802.11b/g/n(20M): 2412-2462 MHz<br>WIFI: 802.11n(40M): 2422-2452 MHz |

Bluetooth& BLE: 2402-2480 MHz

GPS: 1575.42 MHz

Max. Output Power: 4.28dBm

GSM 850: 124CH

PCS1900: 299CH

UMTS-FDD Band V: 102CH

UMTS-FDD Band II: 277CH

Number of Channels: WIFI :802.11b/g/n(20M): 11CH

WIFI :802.11n(40M): 7CH

Bluetooth: 79CH

BLE: 40CH

GPS:1CH

Port: Please refer to the user's manual

Trade Name : VIRZO

Adapter :

Model: V505c

Input: AC100-240V~50/60Hz, 150mA

Output: DC 5.0V, 1A

Input Power:

Battery :

Model: S13

Spec: 3.8V, 2500mAh/9.50Wh

Limited charge voltage: 4.35V

FCC ID: 2AKQUVZCKV505C



## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

| FCC Rules                       | Description of Test   | Result     |
|---------------------------------|---|------------|
| §15.203                         | Antenna Requirement   | Compliance |
| §15.247 (a)(2)                  | DTS (6 dB) CHANNEL BANDWIDTH  | Compliance |
| §15.247(b)(3)                   | Conducted Maximum Output Power  | Compliance |
| §15.247(e)                      | Power Spectral Density  | Compliance |
| §15.247(d)                      | Band-Edge & Unwanted Emissions into Restricted Frequency Bands          | Compliance |
| §15.207 (a),                    | AC Power Line Conducted Emissions                                       | Compliance |
| §15.205, §15.209,<br>§15.247(d) | Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands | Compliance |

### Measurement Uncertainty

| Emissions  |   |               |
|--|---|---------------|
| Test Item  | Description   | Uncertainty   |
| Band-Edge & Unwanted Emissions into Restricted Frequency Bands and Radiated Emissions & Unwanted Emissions into Restricted Frequency Bands | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m) | +5.6dB/-4.5dB |
| -  | -   | -             |

## 6. Measurements, Examination And Derived Results

### 6.1 Antenna Requirement

#### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **Antenna Connector Construction**

The EUT has 2 antennas:

A permanently attached FPC antenna for Bluetooth/BLE/WiFi/GPS, the gain is 0.9dBi for Bluetooth/BLE, the gain is 0.8dBi for WiFi.


A permanently attached FPC antenna for GSM/PCS/UMTS, the gain is -0.7dBi for GSM850, 0.4dBi for PCS1900, 0.4dBi for UMTS-FDD Band V, -0.6dBi for UMTS-FDD Band II.

**The antenna meets up with the ANTENNA REQUIREMENT.**

**Result:** Compliance.

## 6.2 DTS (6 dB) Channel Bandwidth

|                      |              |
|----------------------|--------------|
| Temperature          | 23°C         |
| Relative Humidity    | 61%          |
| Atmospheric Pressure | 1010mbar     |
| Test date :          | Sep 4 , 2019 |
| Tested By :          | Aaron Liang  |
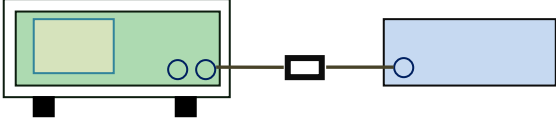
| Spec           | Item   | Requirement                                     | Applicable                          |
|----------------|--|---|-------------------------------------|
| § 15.247(a)(2) | a)   | 6dB BW ≥ 500kHz;                                | <input checked="" type="checkbox"/> |
| RSS Gen(4.6.1) | b)   | 99% BW: For FCC reference only; required by IC. | <input checked="" type="checkbox"/> |
| Test Setup     |  <p style="text-align: center;">Spectrum Analyzer                      EUT</p>  |   |                                     |
| Test Procedure | <p>558074 D01 DTS MEAS Guidance v03r03, 8.1 DTS bandwidth<br/><u>6dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Set RBW = 100 kHz.</li> <li>- Set the video bandwidth (VBW) ≥ 3 RBW.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- Sweep = auto couple.</li> <li>- Allow the trace to stabilize.</li> </ul> <p>Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</p> |   |                                     |
| Remark         |  |   |                                     |
| Result         | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail   |   |                                     |

Test Data     Yes                       N/A


Test Plot     Yes (See below)                       N/A

### 6dB Bandwidth measurement result


#### Test Data

| CH   | Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) |
|------|-----------------|---------------------|------------------------------|
| Low  | 2402            | 0.716               | 1.0750                       |
| Mid  | 2440            | 0.704               | 1.0711                       |
| High | 2480            | 0.712               | 1.0699                       |

#### Test Plots

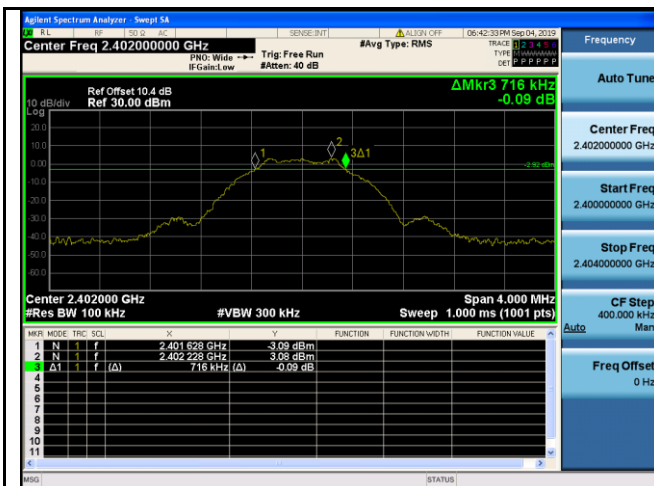


6dB Bandwidth - Low CH 2402

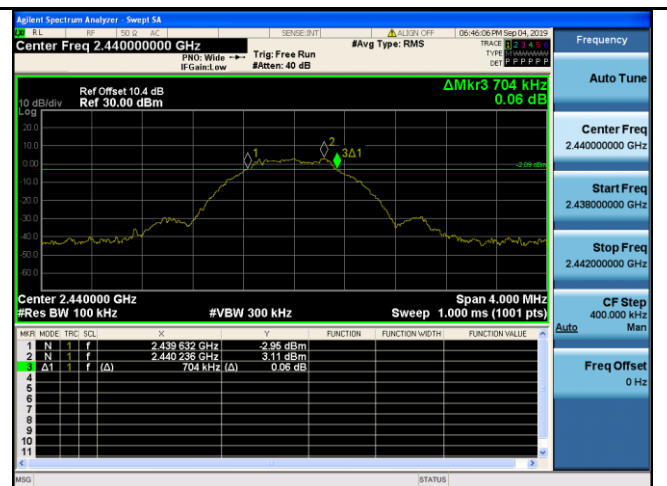


6dB Bandwidth - Mid CH 2440




6dB Bandwidth - High CH 2480

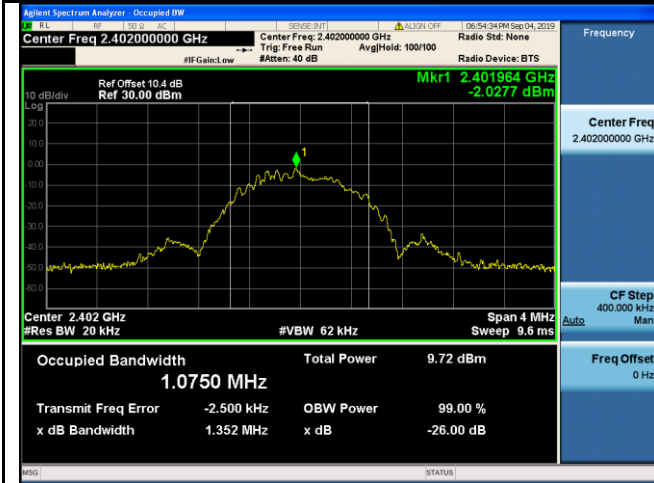


99% Occupied Bandwidth - Low CH 2402

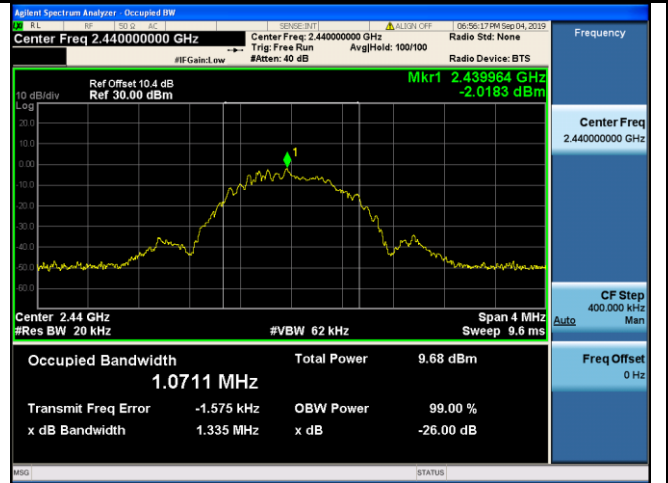

99% Occupied Bandwidth - Mid CH 2440

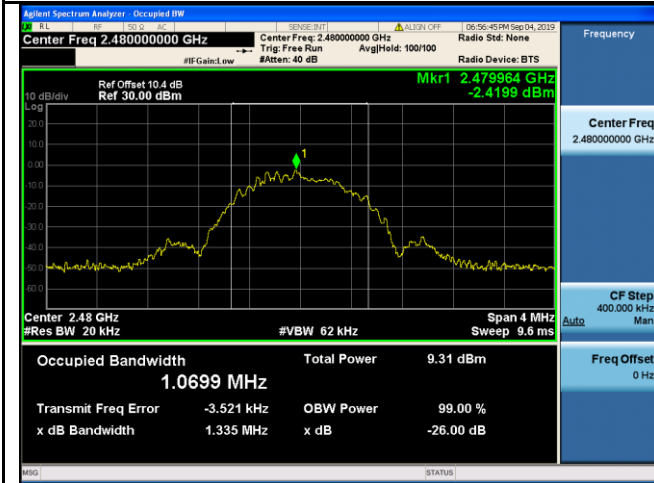

99% Occupied Bandwidth - High CH 2480




### 6.3 Maximum Output Power

|                      |              |
|----------------------|--------------|
| Temperature          | 23°C         |
| Relative Humidity    | 61%          |
| Atmospheric Pressure | 1010mbar     |
| Test date :          | Sep 4 , 2019 |
| Tested By :          | Aaron Liang  |

**Requirement(s):**

| Spec                               | Item | Requirement  | Applicable                          |
|------------------------------------|------|--|-------------------------------------|
| §15.247(b)<br>(3),RSS210<br>(A8.4) | a)   | FHSS in 2400-2483.5MHz with $\geq 75$ channels: $\leq 1$ Watt        | <input type="checkbox"/>            |
|                                    | b)   | FHSS in 5725-5850MHz: $\leq 1$ Watt                                  | <input type="checkbox"/>            |
|                                    | c)   | For all other FHSS in the 2400-2483.5MHz band: $\leq 0.125$ Watt.    | <input type="checkbox"/>            |
|                                    | d)   | FHSS in 902-928MHz with $\geq 50$ channels: $\leq 1$ Watt            | <input type="checkbox"/>            |
|                                    | e)   | FHSS in 902-928MHz with $\geq 25$ & $<50$ channels: $\leq 0.25$ Watt | <input type="checkbox"/>            |
|                                    | f)   | DTS in 902-928MHz, 2400-2483.5MHz: $\leq 1$ Watt                     | <input checked="" type="checkbox"/> |
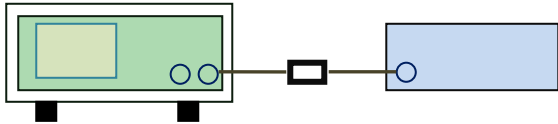
|            |  |
|------------|--|
| Test Setup |  <p style="text-align: center;">Spectrum Analyzer                      EUT</p> |
|------------|--|

|                |   |
|----------------|---|
| Test Procedure | <p>558074 D01 DTS MEAS Guidance v03r03, 9.1.2 Integrated band power method<br/>Maximum output power measurement procedure</p> <p>a) Set the RBW <math>\geq</math> DTS bandwidth.<br/>b) Set VBW <math>\geq 3 \times</math> RBW.<br/>c) Set span <math>\geq 3 \times</math> RBW<br/>d) Sweep time = auto couple.<br/>e) Detector = peak.<br/>f) Trace mode = max hold.<br/>g) Allow trace to fully stabilize.<br/>h) Use peak marker function to determine the peak amplitude level.</p> |
|----------------|---|

|        |  |
|--------|--|
| Remark |  |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |


Test Data  Yes  N/A  
 Test Plot  Yes (See below)  N/A

### Output Power measurement result


#### Test Data

| Type         | CH   | Frequency (MHz) | Conducted Power (dBm) | Limit (dBm) | Result |
|--------------|------|-----------------|-----------------------|-------------|--------|
| Output power | Low  | 2402            | 4.28                  | 30          | Pass   |
|              | Mid  | 2440            | 4.22                  | 30          | Pass   |
|              | High | 2480            | 3.89                  | 30          | Pass   |


#### Test Plots

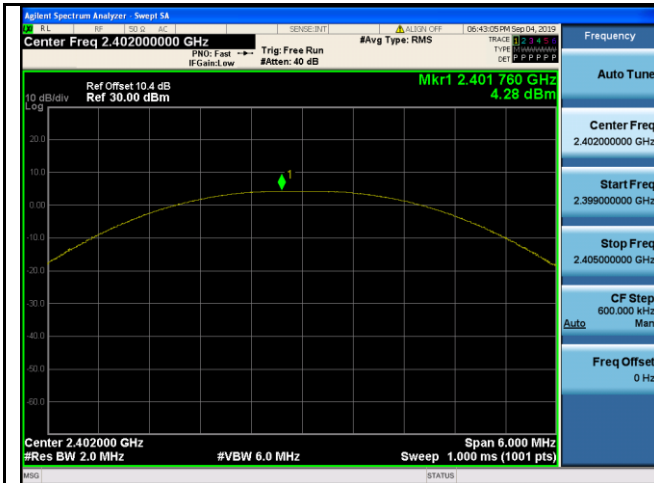

PK Output power - Low CH 2402

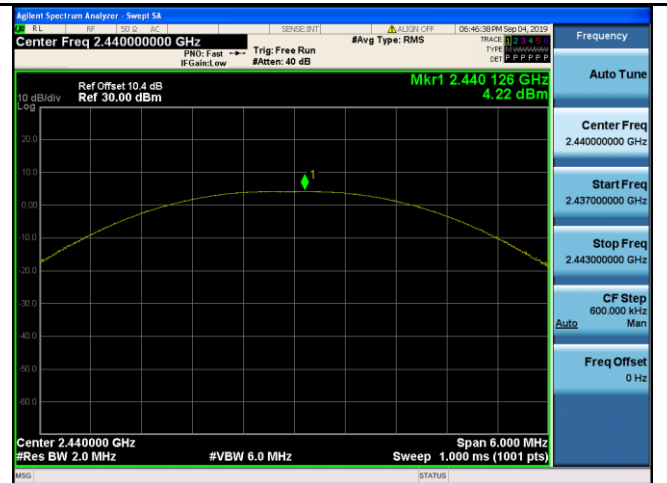

PK Output power - Mid CH 2440

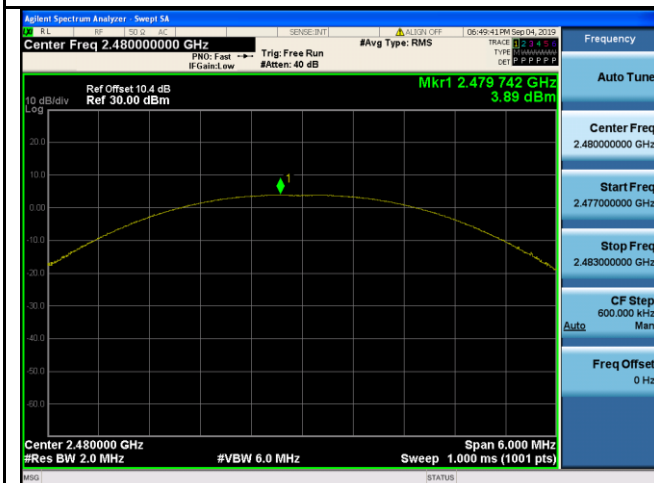

|                                |  |
|--------------------------------|--|
| PK Output power - High CH 2480 |  |
|--------------------------------|--|

**Average OUTPUT POWER(FOR REFERENCE)**


**Test Data**

| CH   | Frequency (MHz) | Average Power (dBm) |
|------|-----------------|---------------------|
| Low  | 2402            | 2.96                |
| Mid  | 2441            | 3.11                |
| High | 2480            | 3.7                 |



## 6.4 Power Spectral Density

|                      |             |
|----------------------|-------------|
| Temperature          | 23°C        |
| Relative Humidity    | 61%         |
| Atmospheric Pressure | 1010mbar    |
| Test date :          | Sep 4, 2019 |
| Tested By :          | Aaron Liang |
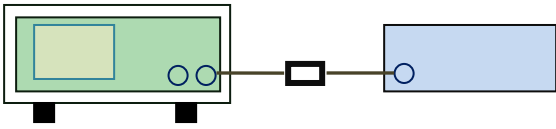
| Spec           | Item  | Requirement  | Applicable                          |
|----------------|---|--|-------------------------------------|
| §15.247(e)     | a)  | The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. | <input checked="" type="checkbox"/> |
| Test Setup     |  <p style="text-align: center;">Spectrum Analyzer                      EUT</p>  |  |                                     |
| Test Procedure | <p>558074 D01 DTS MEAS Guidance v03r03, 10.2 power spectral density method<br/>power spectral density measurement procedure</p> <ul style="list-style-type: none"> <li>- a) Set analyzer center frequency to DTS channel center frequency.</li> <li>- b) Set the span to 1.5 times the DTS bandwidth.</li> <li>- c) Set the RBW to: <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>.</li> <li>- d) Set the VBW <math>\geq 3 \times \text{RBW}</math>.</li> <li>- e) Detector = peak.</li> <li>- f) Sweep time = auto couple.</li> <li>- g) Trace mode = max hold.</li> <li>- h) Allow trace to fully stabilize.</li> <li>- i) Use the peak marker function to determine the maximum amplitude level within the RBW.</li> <li>- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.</li> </ul> |  |                                     |
| Remark         |   |  |                                     |
| Result         | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |  |                                     |


Test Data     Yes                       N/A  
 Test Plot     Yes (See below)                       N/A

## Power Spectral Density measurement result


### Test Data

| Type | CH   | Freq (MHz) | PSD (dBm) | Limit (dBm) | Result |
|------|------|------------|-----------|-------------|--------|
| PSD  | Low  | 2402       | -11.051   | 8           | Pass   |
|      | Mid  | 2440       | -11.091   | 8           | Pass   |
|      | High | 2480       | -11.404   | 8           | Pass   |


### Test Plots

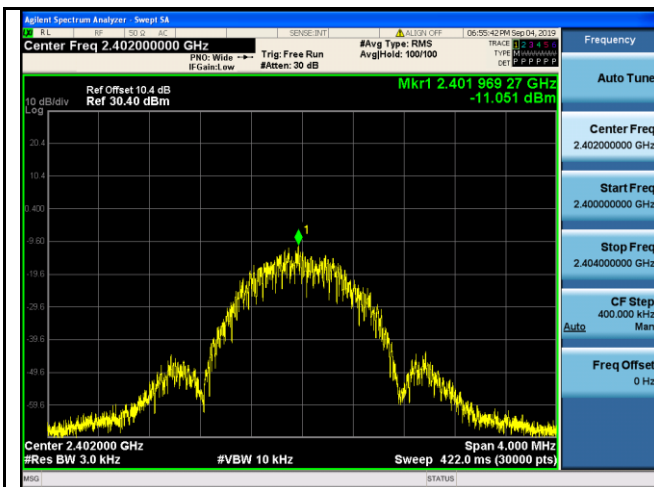

PSD - Low CH 2402

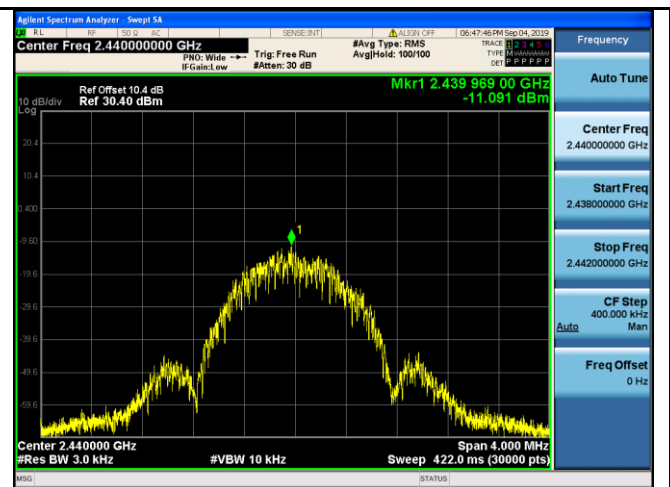

PSD - Mid CH 2440

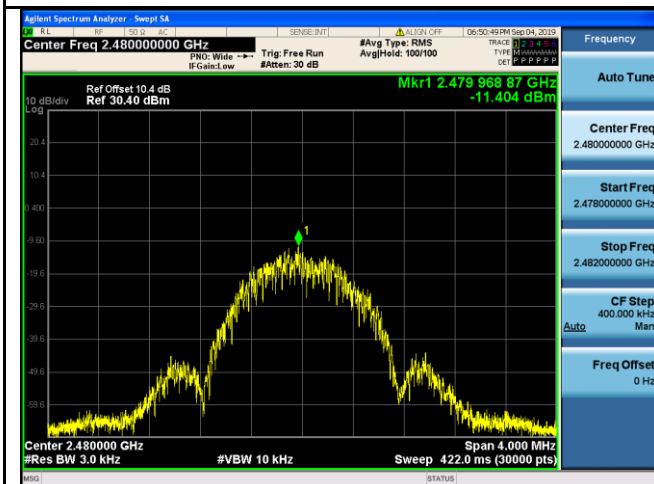


PSD - High CH 2480

## 6.5 Band-Edge & Unwanted Emissions into Restricted Frequency Bands

|                      |               |
|----------------------|---------------|
| Temperature          | 24°C          |
| Relative Humidity    | 66%           |
| Atmospheric Pressure | 1013mbar      |
| Test date :          | Sep 11 , 2019 |
| Tested By :          | Aaron Liang   |

### Requirement(s):

| Spec       | Item | Requirement   | Applicable                          |
|------------|------|---|-------------------------------------|
| §15.247(d) | a)   | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. | <input checked="" type="checkbox"/> |
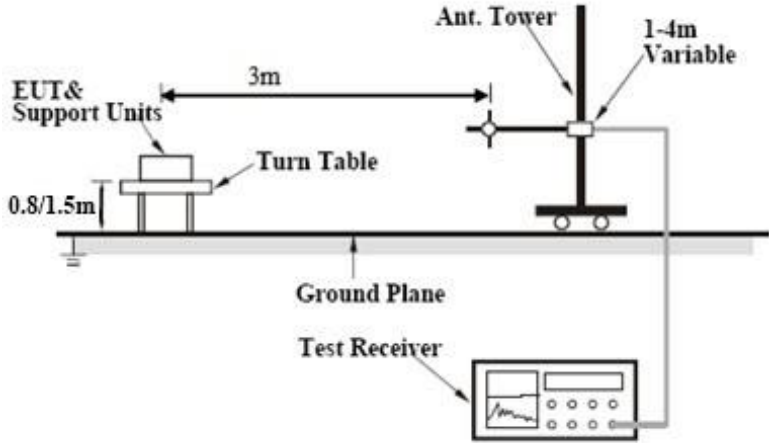
|            |  |
|------------|--|
| Test Setup |  |
|------------|--|

|                |   |
|----------------|---|
| Test Procedure | <p>Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.</li> </ul> |
|----------------|---|


|        |  |
|--------|--|
|        | <ul style="list-style-type: none"> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:               <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul> |
| Remark |  |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail   |

Test Data     Yes                       N/A


Test Plot     Yes (See below)       N/A

### Test Plots

#### Band Edge measurement result

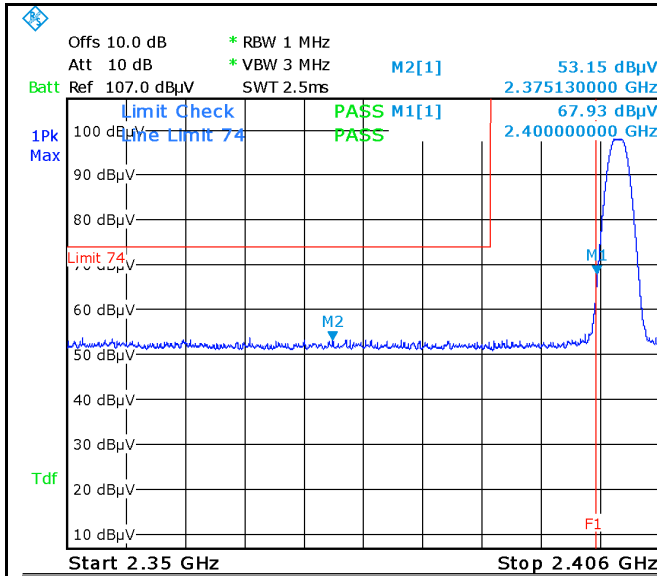

Date: 11.SEP.2019 11:51:20

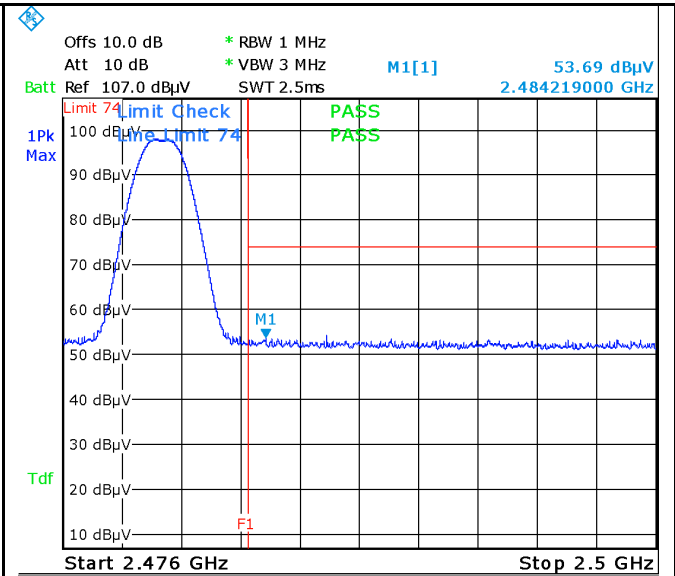


Date: 11.SEP.2019 13:12:49

Band Edge, Left Side (Peak)


Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz

Band Edge, Right Side (Peak)

Note: F1 is frequency 2483.5MHz

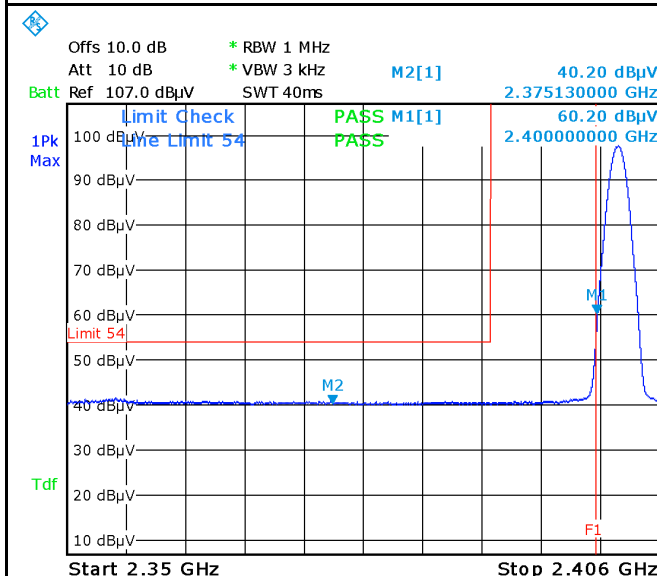

Date: 11.SEP.2019 11:52:10

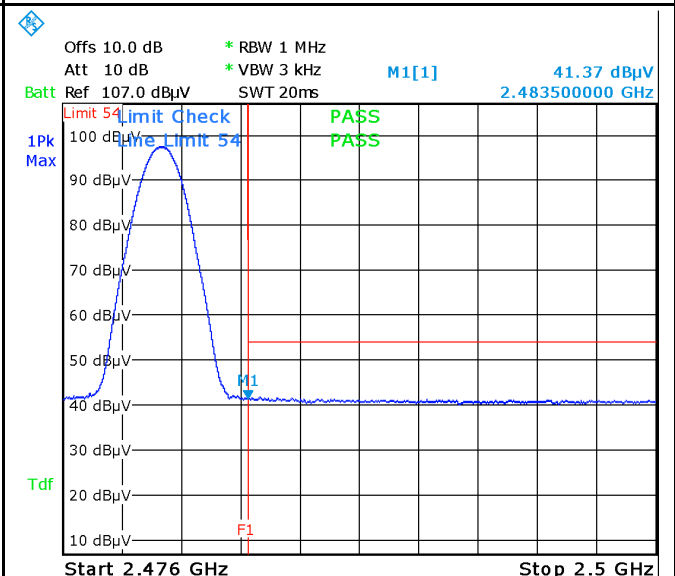

Date: 11.SEP.2019 13:12:06

Band Edge, Left Side-AV

Band Edge, Right Side-AV


Note: Both Horizontal and vertical polarities were investigated.

## 6.6 AC Power Line Conducted Emissions

|                      |               |
|----------------------|---------------|
| Temperature          | 24°C          |
| Relative Humidity    | 64%           |
| Atmospheric Pressure | 1017mbar      |
| Test date :          | Sep 10 , 2019 |
| Tested By :          | Aaron Liang   |

### Requirement(s):

| Spec                        | Item    | Requirement  | Applicable                          |                        |              |  |    |         |            |         |         |         |    |    |        |    |    |
|-----------------------------|---------|--|-------------------------------------|------------------------|--------------|--|----|---------|------------|---------|---------|---------|----|----|--------|----|----|
| 47CFR§15.207, RSS210 (A8.1) | a)      | For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges. | <input checked="" type="checkbox"/> |                        |              |  |    |         |            |         |         |         |    |    |        |    |    |
|                             |         | <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>   |                                     | Frequency ranges (MHz) | Limit (dBµV) |  | QP | Average | 0.15 ~ 0.5 | 66 – 56 | 56 – 46 | 0.5 ~ 5 | 56 | 46 | 5 ~ 30 | 60 | 50 |
|                             |         | Frequency ranges (MHz)   |                                     |                        | Limit (dBµV) |  |    |         |            |         |         |         |    |    |        |    |    |
|                             |         |  |                                     | QP                     | Average      |  |    |         |            |         |         |         |    |    |        |    |    |
| 0.15 ~ 0.5                  | 66 – 56 | 56 – 46  |                                     |                        |              |  |    |         |            |         |         |         |    |    |        |    |    |
| 0.5 ~ 5                     | 56      | 46   |                                     |                        |              |  |    |         |            |         |         |         |    |    |        |    |    |
| 5 ~ 30                      | 60      | 50   |                                     |                        |              |  |    |         |            |         |         |         |    |    |        |    |    |

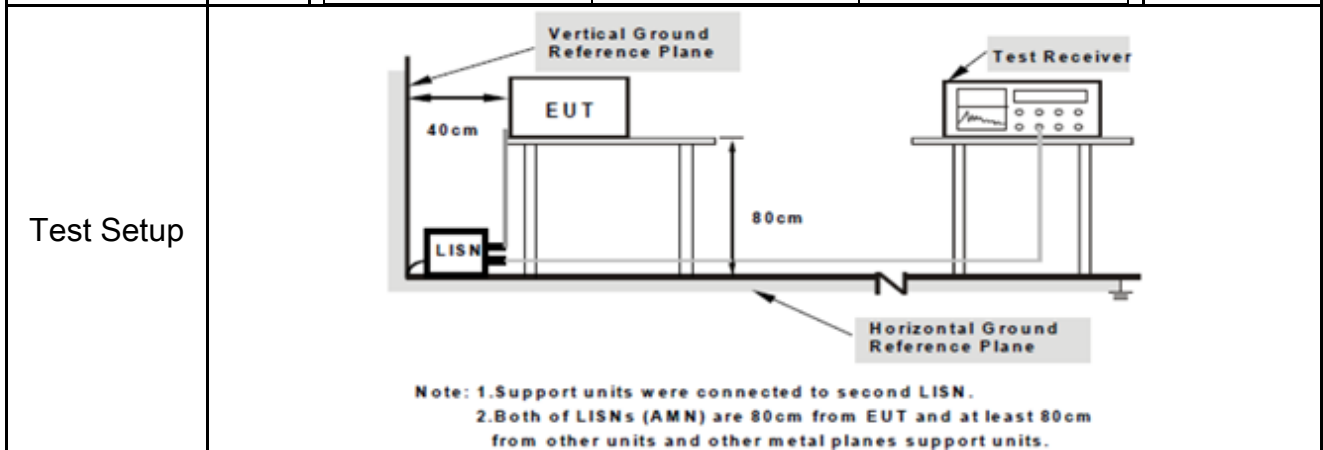


|           |   |
|-----------|---|
| Procedure | <ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol> |
|-----------|---|

|        |  |
|--------|--|
|        | <p>coaxial cable.</p> <ol style="list-style-type: none"> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol> |
| Remark |  |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail   |

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

|                   |                          |
|-------------------|--------------------------|
| <b>Test Mode:</b> | <b>Transmitting Mode</b> |
|-------------------|--------------------------|

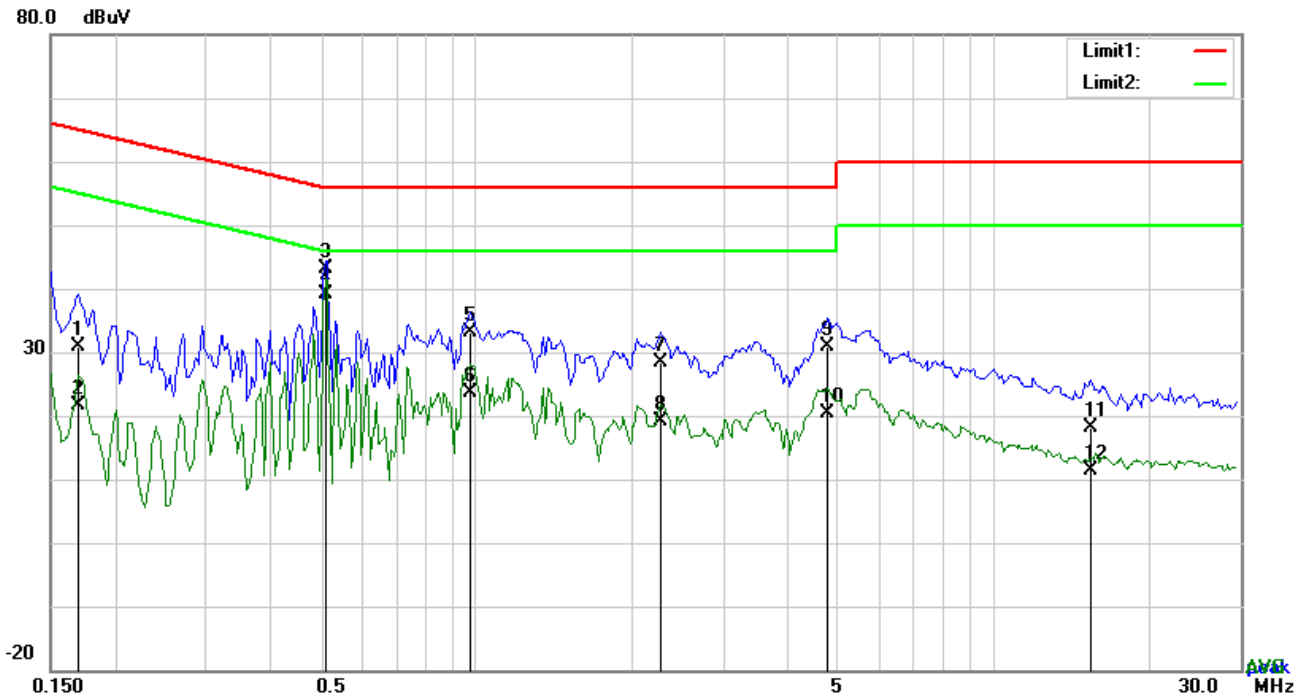


**Test Data**

**Phase Line Plot at 120Vac, 60Hz**

| No. | P/L | Frequency (MHz) | Reading (dBµV) | Detector | Corrected (dB) | Result (dBµV) | Limit (dBµV) | Margin (dB) |
|-----|-----|-----------------|----------------|----------|----------------|---------------|--------------|-------------|
| 1   | L1  | 0.1695          | 20.78          | QP       | 10.12          | 30.90         | 64.98        | -34.08      |
| 2   | L1  | 0.1695          | 11.51          | AVG      | 10.12          | 21.63         | 54.98        | -33.35      |
| 3   | L1  | 0.5127          | 32.99          | QP       | 10.10          | 43.09         | 56.00        | -12.91      |
| 4   | L1  | 0.5127          | 29.15          | AVG      | 10.10          | 39.25         | 46.00        | -6.75       |
| 5   | L1  | 0.9729          | 23.08          | QP       | 10.13          | 33.21         | 56.00        | -22.79      |
| 6   | L1  | 0.9729          | 13.61          | AVG      | 10.13          | 23.74         | 46.00        | -22.26      |
| 7   | L1  | 2.2716          | 18.35          | QP       | 10.15          | 28.50         | 56.00        | -27.50      |
| 8   | L1  | 2.2716          | 9.10           | AVG      | 10.15          | 19.25         | 46.00        | -26.75      |
| 9   | L1  | 4.7823          | 20.77          | QP       | 10.20          | 30.97         | 56.00        | -25.03      |
| 10  | L1  | 4.7823          | 10.28          | AVG      | 10.20          | 20.48         | 46.00        | -25.52      |
| 11  | L1  | 15.4098         | 7.77           | QP       | 10.34          | 18.11         | 60.00        | -41.89      |
| 12  | L1  | 15.4098         | 1.08           | AVG      | 10.34          | 11.42         | 50.00        | -38.58      |



|                   |                          |
|-------------------|--------------------------|
| <b>Test Mode:</b> | <b>Transmitting Mode</b> |
|-------------------|--------------------------|

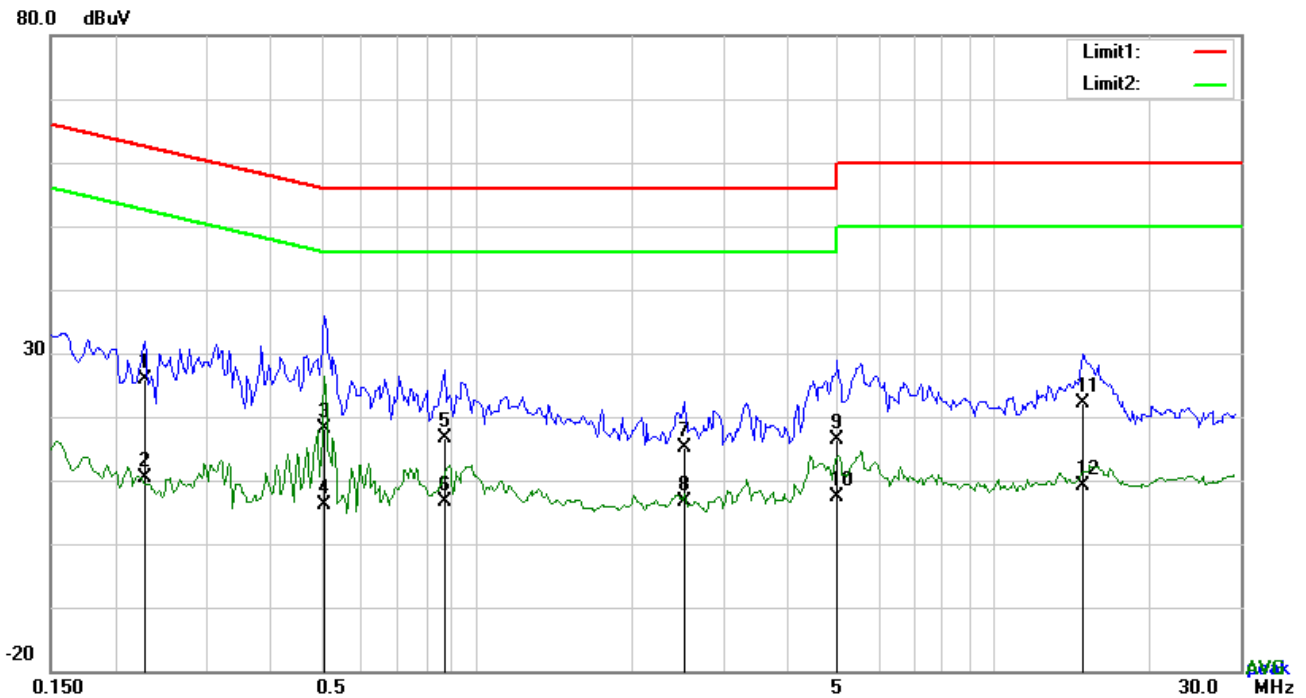

**Test Data**

**Phase Neutral Plot at 120Vac, 60Hz**

| No. | P/L | Frequency (MHz) | Reading (dBuV) | Detector | Corrected (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) |
|-----|-----|-----------------|----------------|----------|----------------|---------------|--------------|-------------|
| 1   | N   | 0.2280          | 15.67          | QP       | 10.13          | 25.80         | 62.52        | -36.72      |
| 2   | N   | 0.2280          | 0.37           | AVG      | 10.13          | 10.50         | 52.52        | -42.02      |
| 3   | N   | 0.5088          | 7.92           | QP       | 10.12          | 18.04         | 56.00        | -37.96      |
| 4   | N   | 0.5088          | -3.92          | AVG      | 10.12          | 6.20          | 46.00        | -39.80      |
| 5   | N   | 0.8676          | 6.50           | QP       | 10.14          | 16.64         | 56.00        | -39.36      |
| 6   | N   | 0.8676          | -3.43          | AVG      | 10.14          | 6.71          | 46.00        | -39.29      |
| 7   | N   | 2.5212          | 4.86           | QP       | 10.17          | 15.03         | 56.00        | -40.97      |
| 8   | N   | 2.5212          | -3.43          | AVG      | 10.17          | 6.74          | 46.00        | -39.26      |
| 9   | N   | 4.9851          | 6.25           | QP       | 10.21          | 16.46         | 56.00        | -39.54      |
| 10  | N   | 4.9851          | -2.83          | AVG      | 10.21          | 7.38          | 46.00        | -38.62      |
| 11  | N   | 14.8911         | 11.85          | QP       | 10.31          | 22.16         | 60.00        | -37.84      |
| 12  | N   | 14.8911         | -1.07          | AVG      | 10.31          | 9.24          | 50.00        | -40.76      |

## 6.7 Radiated Emissions & Restricted Band

|                      |               |
|----------------------|---------------|
| Temperature          | 24°C          |
| Relative Humidity    | 64%           |
| Atmospheric Pressure | 1017mbar      |
| Test date :          | Sep 10 , 2019 |
| Tested By :          | Aaron Liang   |

### Requirement(s):

| Spec                                 | Item  | Requirement  | Applicable            |                       |             |             |             |              |            |    |         |     |          |     |         |     |           |     |                                     |
|--------------------------------------|---|--|-----------------------|-----------------------|-------------|-------------|-------------|--------------|------------|----|---------|-----|----------|-----|---------|-----|-----------|-----|-------------------------------------|
| 47CFR§15.247(d),<br>RSS210<br>(A8.5) | a)  | <p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (µV/m)</th> </tr> </thead> <tbody> <tr> <td>0.009~0.490</td> <td>2400/F(KHz)</td> </tr> <tr> <td>0.490~1.705</td> <td>24000/F(KHz)</td> </tr> <tr> <td>1.705~30.0</td> <td>30</td> </tr> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table> | Frequency range (MHz) | Field Strength (µV/m) | 0.009~0.490 | 2400/F(KHz) | 0.490~1.705 | 24000/F(KHz) | 1.705~30.0 | 30 | 30 – 88 | 100 | 88 – 216 | 150 | 216 960 | 200 | Above 960 | 500 | <input checked="" type="checkbox"/> |
|                                      | Frequency range (MHz)   | Field Strength (µV/m)  |                       |                       |             |             |             |              |            |    |         |     |          |     |         |     |           |     |                                     |
| 0.009~0.490                          | 2400/F(KHz)   |  |                       |                       |             |             |             |              |            |    |         |     |          |     |         |     |           |     |                                     |
| 0.490~1.705                          | 24000/F(KHz)  |  |                       |                       |             |             |             |              |            |    |         |     |          |     |         |     |           |     |                                     |
| 1.705~30.0                           | 30  |  |                       |                       |             |             |             |              |            |    |         |     |          |     |         |     |           |     |                                     |
| 30 – 88                              | 100   |  |                       |                       |             |             |             |              |            |    |         |     |          |     |         |     |           |     |                                     |
| 88 – 216                             | 150   |  |                       |                       |             |             |             |              |            |    |         |     |          |     |         |     |           |     |                                     |
| 216 960                              | 200   |  |                       |                       |             |             |             |              |            |    |         |     |          |     |         |     |           |     |                                     |
| Above 960                            | 500   |  |                       |                       |             |             |             |              |            |    |         |     |          |     |         |     |           |     |                                     |
| b)                                   | <p>For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required</p> <p><input checked="" type="checkbox"/> 20 dB down      <input type="checkbox"/> 30 dB down</p> | <input checked="" type="checkbox"/>  |                       |                       |             |             |             |              |            |    |         |     |          |     |         |     |           |     |                                     |

|                   |  |                                     |
|-------------------|--|-------------------------------------|
|                   | <p>c) or restricted band, emission must also comply with the radiated emission limits specified in 15.209</p>  | <input checked="" type="checkbox"/> |
| <p>Test Setup</p> |  |                                     |
| <p>Procedure</p>  | <ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:             <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.</li> <li>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video</li> </ol> |                                     |

|        |  |
|--------|--|
|        | <p>bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p> |
| Remark |  |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail   |

Test Data     Yes       N/A

Test Plot     Yes (See below)     N/A

**Test Result:**

|                   |                   |
|-------------------|-------------------|
| <b>Test Mode:</b> | Transmitting Mode |
|-------------------|-------------------|

Frequency range: 9KHz - 30MHz

| Freq.<br>(MHz) | Detection<br>value | Factor<br>(dB/m) | Reading<br>(dBuV/m) | Result<br>(dBuV/m) | Limit@3m<br>(dBuV/m) | Margin<br>(dB) |
|----------------|--------------------|------------------|---------------------|--------------------|----------------------|----------------|
| --             | --                 | --               | --                  | --                 | --                   | >20            |
| --             | --                 | --               | --                  | --                 | --                   | >20            |

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

|                   |                          |
|-------------------|--------------------------|
| <b>Test Mode:</b> | <b>Transmitting Mode</b> |
|-------------------|--------------------------|

**30MHz -1GHz**

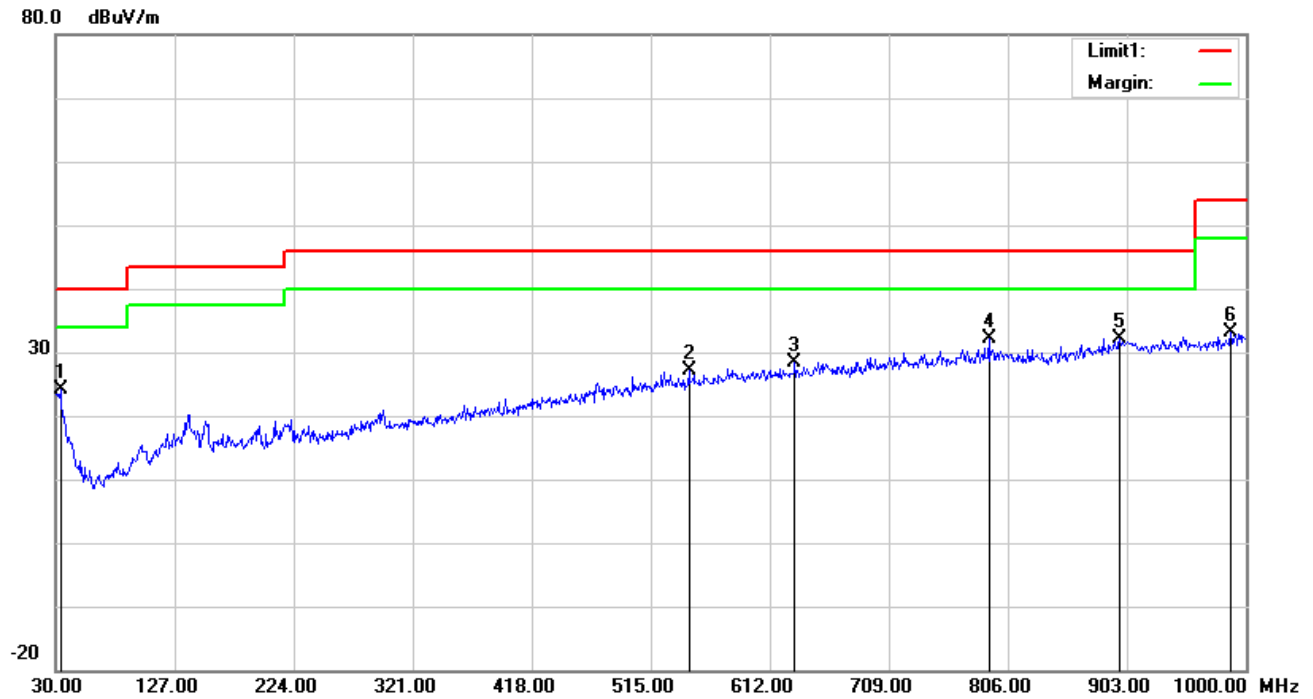


**Test Data**

**Vertical Polarity Plot @3m**

| No. | P/L | Frequency | Reading  | Ant_F  | PA_G  | Cab_L | Result   | Limit    | Margin | Height | Degr ee |
|-----|-----|-----------|----------|--------|-------|-------|----------|----------|--------|--------|---------|
|     |     | (MHz)     | (dBuV/m) | (dB/m) | (dB)  | (dB)  | (dBuV/m) | (dBuV/m) | (dB)   | (cm)   | (°)     |
| 1   | H   | 33.8800   | 28.65    | 17.62  | 22.26 | 0.15  | 24.16    | 40.00    | -15.84 | 100    | 232     |
| 2   | H   | 546.0400  | 27.40    | 19.28  | 21.70 | 2.26  | 27.24    | 46.00    | -18.76 | 100    | 102     |
| 3   | H   | 632.3700  | 27.14    | 20.45  | 21.51 | 2.34  | 28.42    | 46.00    | -17.58 | 100    | 340     |
| 4   | H   | 790.4800  | 28.61    | 22.11  | 21.17 | 2.54  | 32.09    | 46.00    | -13.91 | 100    | 237     |
| 5   | H   | 897.1800  | 26.60    | 23.78  | 20.89 | 2.65  | 32.14    | 46.00    | -13.86 | 100    | 106     |
| 6   | H   | 987.3900  | 26.94    | 24.05  | 20.71 | 2.74  | 33.02    | 54.00    | -20.98 | 100    | 147     |

### 30MHz -1GHz

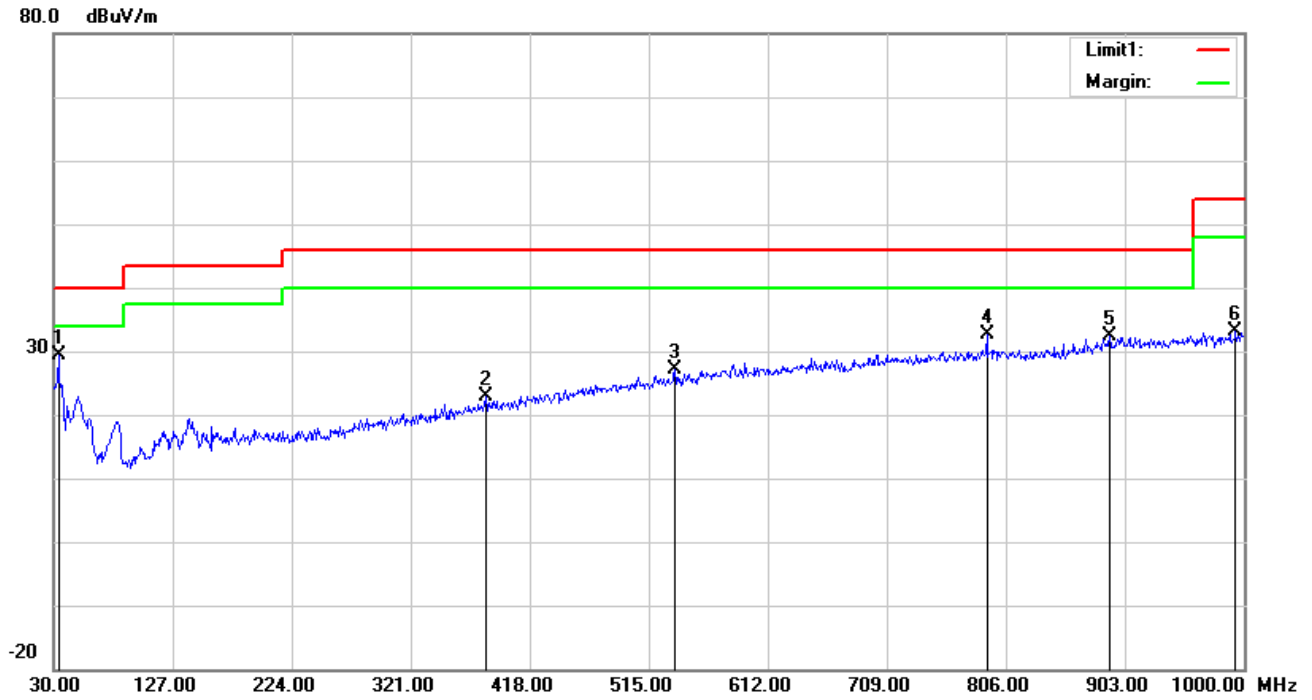

### Test Data

#### Horizontal Polarity Plot @3m

| N o. | P/ L | Frequency (MHz) | Reading (dBuV/m) | Ant_F (dB/m) | PA_G (dB) | Cab_L (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (°) |
|------|------|-----------------|------------------|--------------|-----------|------------|-----------------|----------------|-------------|-------------|------------|
| 1    | V    | 33.8800         | 33.90            | 17.62        | 22.26     | 0.15       | 29.41           | 40.00          | -10.59      | 100         | 126        |
| 2    | V    | 382.1100        | 27.24            | 15.71        | 22.06     | 1.90       | 22.79           | 46.00          | -23.21      | 100         | 209        |
| 3    | V    | 536.3400        | 27.36            | 19.25        | 21.73     | 2.23       | 27.11           | 46.00          | -18.89      | 100         | 167        |
| 4    | V    | 790.4800        | 29.20            | 22.11        | 21.17     | 2.54       | 32.68           | 46.00          | -13.32      | 100         | 17         |
| 5    | V    | 890.3900        | 27.18            | 23.48        | 20.91     | 2.64       | 32.39           | 46.00          | -13.61      | 100         | 219        |
| 6    | V    | 993.2100        | 26.94            | 24.21        | 20.70     | 2.75       | 33.20           | 54.00          | -20.80      | 100         | 43         |

**Above 1GHz**

|                   |                          |
|-------------------|--------------------------|
| <b>Test Mode:</b> | <b>Transmitting Mode</b> |
|-------------------|--------------------------|

**Low Channel: GFSK Mode (Worst Case) (2402 MHz)**

| ANTENNA POLARITY & test distance: HORIZONTAL at 3 m |             |                         |                |             |                    |                      |                  |                          |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.   | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1   | 2375.13     | 53.15 PK                | 74             | -20.85      | 344                | 231                  | 66.8             | -13.65                   |
| 2   | 2375.13     | 40.2 AV                 | 54             | -13.8       | 213                | 14                   | 53.85            | -13.65                   |
| 3   | 2402        | 97.82 PK                |                |             | 206                | 17                   | 111.79           | -13.97                   |
| 4   | 2402        | 97.16 AV                |                |             | 283                | 70                   | 111.13           | -13.97                   |
| 5   | 4804        | 50.08 PK                | 74             | -23.92      | 282                | 242                  | 63.83            | -13.75                   |
| 6   | 4804        | 39.12 AV                | 54             | -14.88      | 340                | 262                  | 52.87            | -13.75                   |
| ANTENNA POLARITY & test distance: Vertical at 3 m   |             |                         |                |             |                    |                      |                  |                          |
| NO.   | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1   | 2390        | 52.16 PK                | 74             | -21.84      | 169                | 340                  | 65.81            | -13.65                   |
| 2   | 2390        | 40.13 AV                | 54             | -13.87      | 150                | 244                  | 53.78            | -13.65                   |
| 3   | 2402        | 97.11 PK                |                |             | 243                | 25                   | 111.08           | -13.97                   |
| 4   | 2402        | 96.59 AV                |                |             | 312                | 181                  | 110.56           | -13.97                   |
| 5   | 4804        | 49.95 PK                | 74             | -24.05      | 294                | 337                  | 63.7             | -13.75                   |
| 6   | 4804        | 38.04 AV                | 54             | -15.96      | 167                | 111                  | 51.79            | -13.75                   |

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Pre-amplifier Gain.
3. Only emissions significantly above equipment noise floor are reported.
4. Margin value = Emission level – Limit value.
5. The testing has been conformed to  $10 \times 2402 \text{MHz} = 24,020 \text{MHz}$
6. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

**Middle Channel: GFSK Mode (Worst Case) (2440 MHz)**

| ANTENNA POLARITY & test distance: HORIZONTAL at 3 m |             |                         |                |             |                    |                      |                  |                          |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.   | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1   | 3874.1      | 39.95 PK                | 74             | -34.05      | 255                | 311                  | 53.8             | -13.85                   |
| 2   | 3874.1      | 31.44 AV                | 54             | -22.56      | 236                | 328                  | 45.29            | -13.85                   |
| 3   | 2440        | 97.12 PK                |                |             | 234                | 140                  | 110.14           | -13.02                   |
| 4   | 2440        | 96.32 AV                |                |             | 364                | 15                   | 109.34           | -13.02                   |
| 5   | 4880        | 50.02 PK                | 74             | -23.98      | 123                | 146                  | 63.77            | -13.75                   |
| 6   | 4880        | 38.46 AV                | 54             | -15.54      | 104                | 40                   | 52.21            | -13.75                   |

| ANTENNA POLARITY & test distance: Vertical at 3 m |             |                         |                |             |                    |                      |                  |                          |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.   | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1   | 3870.5      | 40.14 PK                | 74             | -33.86      | 300                | 124                  | 53.99            | -13.85                   |
| 2   | 3870.5      | 31.74 AV                | 54             | -22.26      | 219                | 161                  | 45.59            | -13.85                   |
| 3   | 2440        | 98.12 PK                |                |             | 272                | 211                  | 111.14           | -13.02                   |
| 4   | 2440        | 97.35 AV                |                |             | 321                | 279                  | 110.37           | -13.02                   |
| 5   | 4880        | 50.08 PK                | 74             | -23.92      | 115                | 232                  | 63.83            | -13.75                   |
| 6   | 4880        | 38.12 AV                | 54             | -15.88      | 201                | 268                  | 51.87            | -13.75                   |

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Preamplifier Gain.
3. Only emissions significantly above equipment noise floor are reported.
4. Margin value = Emission level – Limit value.
5. The testing has been conformed to 10\*2440MHz=24,400MHz
6. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



### High Channel: GFSK Mode (Worst Case) (2480 MHz)

| ANTENNA POLARITY & test distance: HORIZONTAL at 3 m |             |                         |                |             |                    |                      |                  |                          |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO.   | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1   | 2483.5      | 2483.5 PK               | -20.31         | 269         | 43                 | 67.34                | -13.65           | -20.31                   |
| 2   | 2483.5      | 2483.5 AV               | -12.63         | 350         | 275                | 55.02                | -13.65           | -12.63                   |
| 3   | 2480        | 2480 PK                 |                | 379         | 54                 | 111.59               | -13.97           |                          |
| 4   | 2480        | 2480 AV                 |                | 128         | 248                | 109.84               | -13.97           |                          |
| 5   | 4960        | 50.64 PK                | 74             | -23.36      | 340                | 66                   | 64.39            | -13.75                   |
| 6   | 4960        | 39.54 AV                | 54             | -14.46      | 124                | 116                  | 53.29            | -13.75                   |
| ANTENNA POLARITY & test distance: Vertical at 3 m   |             |                         |                |             |                    |                      |                  |                          |
| NO.   | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1   | 2483.5      | 52.16 PK                | 74             | -21.84      | 322                | 310                  | 65.81            | -13.65                   |
| 2   | 2483.5      | 40.79 AV                | 54             | -13.21      | 231                | 344                  | 54.44            | -13.65                   |
| 3   | 2480        | 96.38 PK                |                |             | 298                | 91                   | 110.35           | -13.97                   |
| 4   | 2480        | 95.58 AV                |                |             | 103                | 279                  | 109.55           | -13.97                   |
| 5   | 4960        | 50.42 PK                | 74             | -23.58      | 369                | 56                   | 64.17            | -13.75                   |
| 6   | 4960        | 39.29 AV                | 54             | -14.71      | 305                | 45                   | 53.04            | -13.75                   |

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Preamplifier Gain.
3. Only emissions significantly above equipment noise floor are reported.
4. Margin value = Emission level – Limit value.
5. The testing has been conformed to  $10 \times 2462 \text{ MHz} = 24,620 \text{ MHz}$
6. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

## Annex A. TEST INSTRUMENT

### RE& RSE

#### Frequency Range Below 1GHz

| Equipment                | Manufacturer   | Model No. | Serial No.                 | Last Cal.   | Next Cal.   |
|--------------------------|----------------|-----------|----------------------------|-------------|-------------|
| EMI Test Receiver        | Rohde&Schwarz  | ESL6      | 1300.5001K06<br>-100262-eO | Apr. 04, 19 | Apr. 03, 20 |
| Bilog Antenna            | Sunol Sciences | JB6       | A110712                    | Apr. 08, 19 | Apr. 07, 20 |
| Active Antenna           | CMO-POWER      | AL-130    | 121031                     | Mar. 27, 19 | Mar. 26, 20 |
| Signal Amplifier         | HP             | 8447E     | 443008                     | Mar. 28, 19 | Mar. 27, 20 |
| 3m Semi-anechoic Chamber | SAEMC          | 9m*6m*6m  | N/A                        | Oct. 18,18  | Oct. 17,21  |
| Test Software            | EZ-EMC         | ICP-03A1  | N/A                        | N/A         | N/A         |

### RE& RSE

#### Frequency Range Above 1GHz

| Equipment           | Manufacturer              | Model No. | Serial No.  | Last Cal.   | Next Cal.   |
|---------------------|---------------------------|-----------|-------------|-------------|-------------|
| Spectrum            | Agilent                   | E4446A    | MY46180622  | 8-May-19    | 7-May-20    |
| MXA signal analyzer | Agilent                   | N9020A    | MY49100060  | Mar. 28, 19 | Mar. 27, 20 |
| Horn Antenna        | COM-POWER                 | HAH-118   | 71259       | Mar. 22, 19 | Mar. 21, 20 |
| Horn Antenna        | COM-POWER                 | HAH-118   | 71283       | Mar. 20, 19 | Mar. 19, 20 |
| SHF-EHF Horn        | Schwarzbeck               | BBHA9170  | BBHA9170147 | Jun. 30, 19 | Jun. 29, 20 |
| SHF-EHF Horn        | Schwarzbeck               | BBHA9170  | BBHA9170242 | Jun. 30, 19 | Jun. 29, 20 |
| AMPLIFIER           | EM Electornic Corporation | EM01G26G  | 60613       | Mar. 28, 19 | Mar. 27, 20 |

|                          |                             |           |        |             |            |
|--------------------------|-----------------------------|-----------|--------|-------------|------------|
| AMPLIFIER                | Emc Instruments Corporation | Emc012645 | 980077 | Jan. 04, 19 | Jan. 03,20 |
| 3m Semi-anechoic Chamber | SAEMC                       | 9m*6m*6m  | N/A    | Oct. 18,18  | Oct. 17,21 |
| Test Software            | EZ-EMC                      | ICP-03A1  | N/A    | N/A         | N/A        |


### Antenna Port Conducted RF measurement

| Equipment                       | Manufacturer  | Model No.    | Serial No.                  | Last Cal.   | Next Cal.   |
|---------------------------------|---------------|--------------|-----------------------------|-------------|-------------|
| Wireless Connectivity           | R&S           | CMW270       | 1201.0002K75                | Nov. 29, 18 | Nov. 28, 19 |
| MXA VEXTOR SIGNAL               | Agilent       | n5182a       | MY50140530                  | Mar. 28,19  | Mar. 27,20  |
| MXA signal analyzer             | Agilent       | n9020a       | MY49100060                  | Mar. 28,19  | Mar. 27,20  |
| RF Control Unit                 | Tonscend      | JS0806-2     | 188060112                   | Mar. 28,19  | Mar. 27,20  |
| Signal Generation               | Agilent       | E4421B       | US40051152                  | Nov. 29, 18 | Nov. 28, 19 |
| DC Power Supply                 | Agilent       | E3640A       | MY40004013                  | Mar. 28,19  | Mar. 27,20  |
| Programmable Temperature &      | Hongjin       | HYC-TH-225DH | DG-180746                   | Mar. 28,19  | Mar. 27,20  |
| Test System                     | Tonscend      | JS 1120-3    | N/A                         | N/A         | N/A         |
| Power Splitter                  | Weinschel     | 1580-1       | TL177                       | Mar. 20,19  | Mar. 19,20  |
| Universal Radio Communication   | ROHDE&SCHWARZ | CMU200       | 112012                      | Mar. 28,19  | Mar. 27,20  |
| Universal Radio Communication   | ROHDE&SCHWARZ | CMU200       | 121393                      | Mar. 28,19  | Mar. 27,20  |
| Wireless Communication Test Set | ROHDE&SCHWARZ | CMW500       | 1201.0002K50<br>0-155842-Gd | Aug. 06, 19 | Aug. 05, 20 |


## Annex B. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex B.i. TEST SET UP BLOCK


#### Block Configuration Diagram for AC Line Conducted Emissions

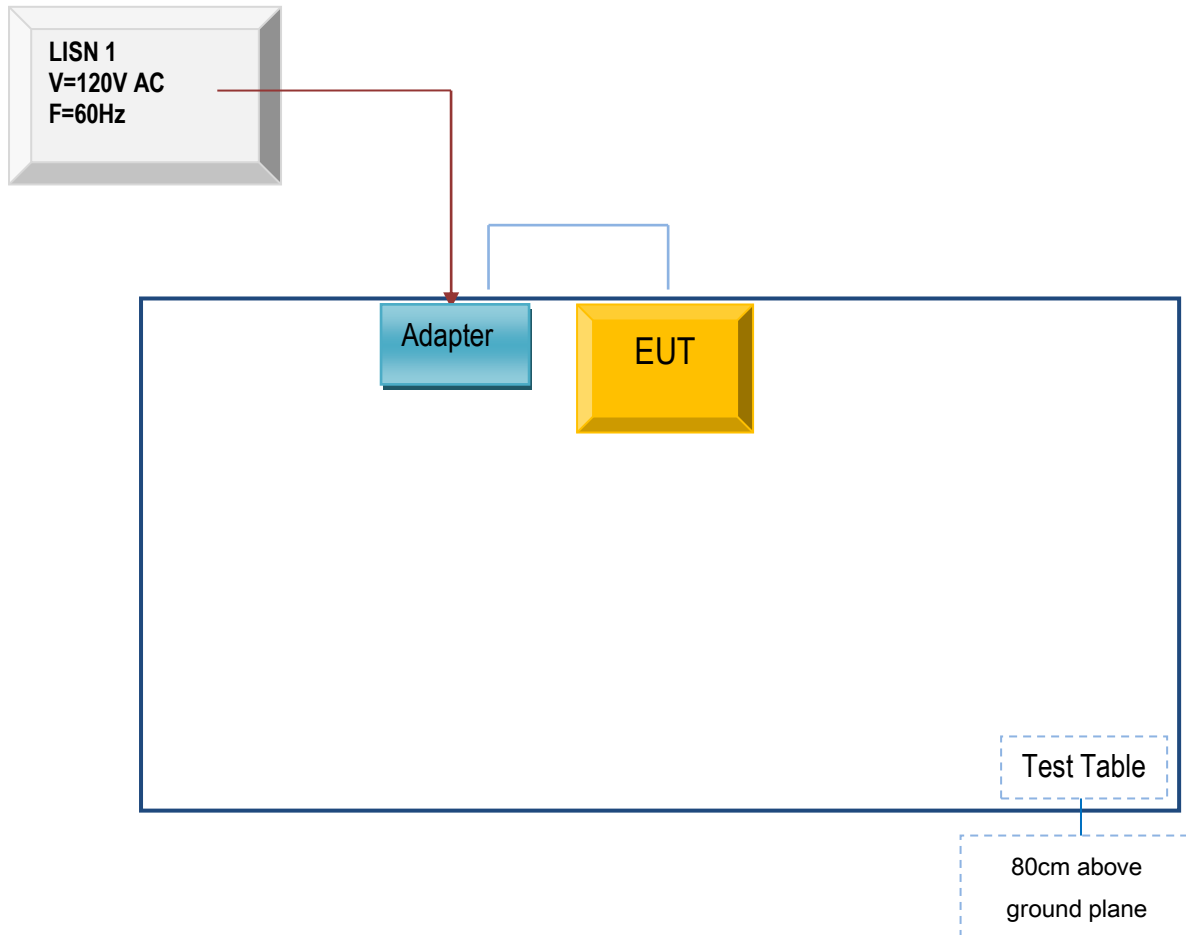

**Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .**

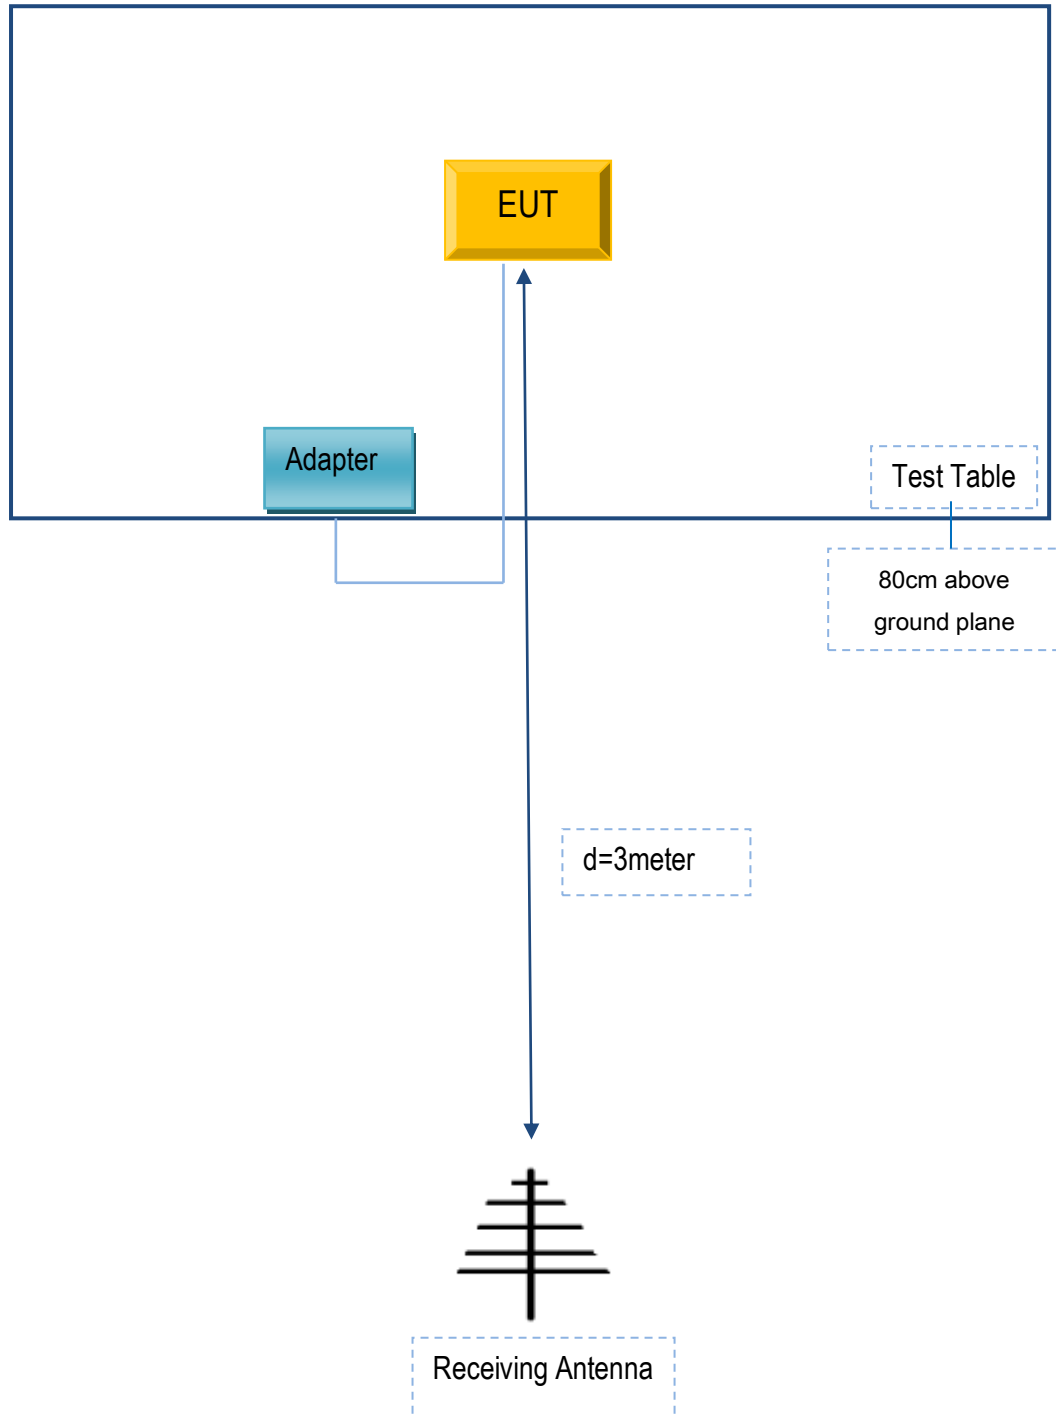

**Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .**

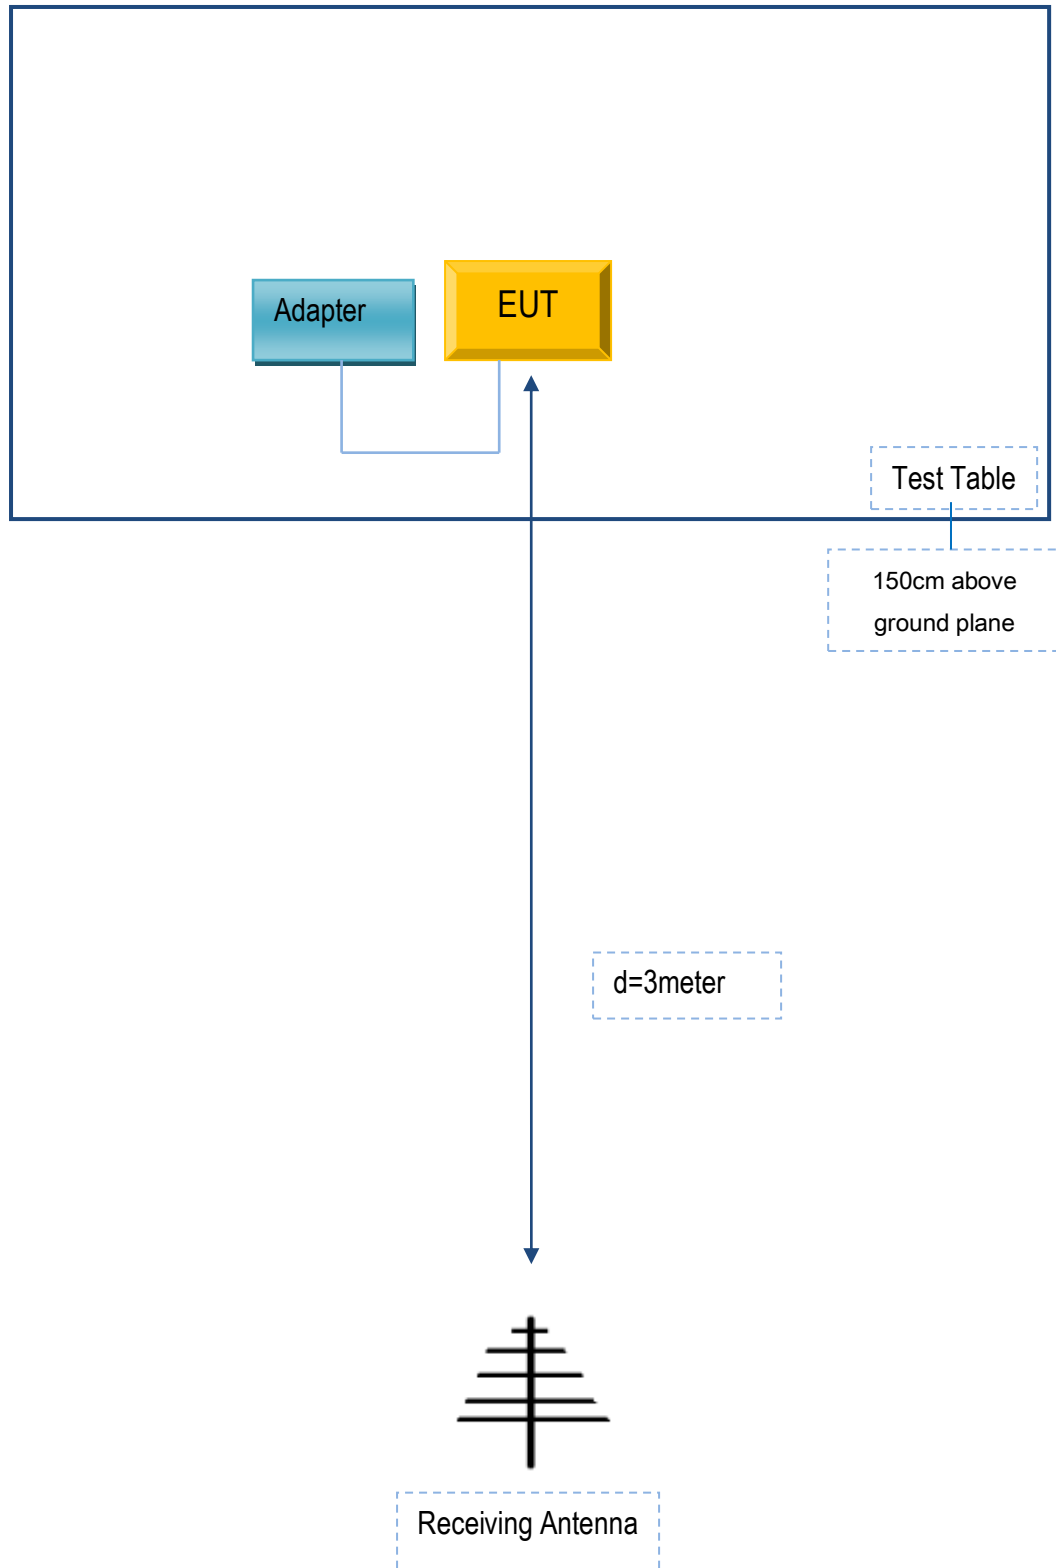

**Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

**Supporting Equipment:**

| Manufacturer | Equipment Description | Model | Serial No |
|--------------|-----------------------|-------|-----------|
| N/A          | N/A                   | N/A   | N/A       |

**Supporting Cable:**

| Cable type | Shield Type | Ferrite Core | Length | Serial No |
|------------|-------------|--------------|--------|-----------|
| N/A        | N/A         | N/A          | N/A    | N/A       |

|                 |                    |
|-----------------|--------------------|
| Test Report No. | Q190826S004-FCC-R4 |
| Page            | 40 of 40           |

**Annex C. User Manual / Block Diagram / Schematics / Partlist/  
DECLARATION OF SIMILARITY**

Please see the attachment