



## TEST REPORT

Product Name: SmartWatch  
FCC ID: 2AKSA-MOBULAAATEL1  
Trademark: MOBULAA  
Model Number: MOBULAA TEL1, MOBULAA TEL2, MOBULAA TEL3, MOBULAA TEL4, MOBULAA TEL5, MOBULAA TEL6, MOBULAA TEL7, MOBULAA TEL8, MOBULAA TEL9, MOBULAA TEL10, MOBULAA KID1, MOBULAA KID2, MOBULAA KID3, MOBULAA KID4, MOBULAA KID5, MOBULAA KID6, MOBULAA KID7, MOBULAA KID8, MOBULAA KID9, MOBULAA KID10  
Prepared For: Shenzhen YLWD Technology Co.,Ltd  
Address: Room 1010, Block B, Hongsong Building, Futian District, Shenzhen, China  
Manufacturer: Dongguan Xinyi Intelligent Technology Co., Ltd  
Address: 3rd Floor, Building 7, Yantian Nanshan Second Industrial Zone, Fenggang Town, Dongguan City, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Nov. 06, 2023  
Sample tested Date: Nov. 06, 2023 to Nov. 29, 2023  
Issue Date: Nov. 29, 2023  
Report No.: CTB231129091RHX  
Test Standards: FCC 47 CFR Part2(2.1093), FCC 47 CFR Part1(1.1310)  
FCC 47 CFR Part1(1.1307), ANSI/IEEE C95.1-2019  
IEEE 1528-2013 & Published RF Exposure KDB Procedures  
Test Results: PASS  
Remark: This is SAR test report.

Compiled by:

Reviewed by:

Approved by:

*Zhang Mao cheng*

*Martin Feng*



Zhang Mao cheng

Martin Feng

Rita Xiao / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

Contents

	Page
1 COVER PAGE.....	1
<b>CONTENTS .....</b>	<b>2</b>
<b>1. VERSION.....</b>	<b>4</b>
<b>2. PRODUCT INFORMATION AND TEST SETUP.....</b>	<b>5</b>
2.1 PRODUCT INFORMATION .....	5
<b>3 EQUIPMENT USED DURING TEST .....</b>	<b>7</b>
3.1 EQUIPMENT LIST .....	7
3.2 TEST EQUIPMENT CALIBRATION .....	8
<b>4 SAR INTRODUCTION.....</b>	<b>9</b>
4.1 INTRODUCTION.....	9
4.2 SAR DEFINITION .....	9
<b>5 SAR MEASUREMENT SETUP.....</b>	<b>10</b>
5.1 SAR MEASUREMENT SETUP .....	10
5.2 DASY5 E-FIELD PROBE SYSTEM .....	11
5.3 PROBE SPECIFICATION .....	11
5.4 ISOTROPIC E-FIELD PROBE.....	11
5.5 PHANTOMS .....	12
5.6 DEVICE HOLDER.....	12
<b>6 SAR TEST PROCEDURE .....</b>	<b>14</b>
6.1 SCANNING PROCEDURE .....	14
6.2 EXTRAPOLATION .....	17
6.3 EAR REFERENCE POINT .....	17
6.4 DEVICE REFERENCE POINTS.....	17
6.5 TEST CONFIGURATION – POSITIONING FOR CHEEK / TOUCH.....	17
6.6 TEST CONFIGURATION – POSITIONING FOR EAR / 15° TILT .....	19
6.7 TEST POSITION – BODY CONFIGURATIONS.....	19
<b>7 EXPOSURE LIMIT .....</b>	<b>20</b>
7.1 UNCONTROLLED ENVIRONMENT .....	20
7.2 CONTROLLED ENVIRONMENT.....	20
<b>8 SYSTEM AND LIQUID VALIDATION .....</b>	<b>21</b>
8.1 SYSTEM VALIDATION.....	21
8.2 LIQUID VALIDATION.....	23
8.3 TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS .....	24
<b>9 SYSTEM VERIFICATION PLOTS .....</b>	<b>26</b>
<b>10 TYPE A MEASUREMENT UNCERTAINTY.....</b>	<b>31</b>
<b>11 OUTPUT POWER VERIFICATION .....</b>	<b>33</b>
11.1 TEST CONDITION: .....	33
11.2 TEST PROCEDURES: .....	33
<b>12 EXPOSURE CONDITIONS CONSIDERATION .....</b>	<b>63</b>



13 RF EXPOSURE..... 64

14 SAR TEST RESULTS ..... 65

14.1 TEST CONDITION: ..... 65

14.2 GENERALLY TEST PROCEDURES:..... 65

14.3 SAR SUMMARY TEST RESULT: ..... 66

14.4 MEASUREMENT VARIABILITY CONSIDERATION ..... 73

14.5 SIMULTANEOUS TRANSMISSION SAR ANALYSIS. .... 74

15 SAR MEASUREMENT REFERENCE ..... 77

16 MAXIMUM SAR MEASUREMENT PLOTS ..... 78

17 CALIBRATION REPORTS-PROBE AND DIPOLE ..... 89

18 SAR SYSTEM PHOTOS..... 90

19 SETUP PHOTO..... 91

20 EUT PHOTOS..... 92



**1. Version**

Report No.	Issue Date	Description	Approved
CTB231129091RHX	Nov. 29, 2023	Original	Valid

## 2. PRODUCT INFORMATION AND TEST SETUP

### 2.1 Product Information

Model(s):	MOBULAA TEL1, MOBULAA TEL2, MOBULAA TEL3, MOBULAA TEL4, MOBULAA TEL5, MOBULAA TEL6, MOBULAA TEL7, MOBULAA TEL8, MOBULAA TEL9, MOBULAA TEL10, MOBULAA KID1, MOBULAA KID2, MOBULAA KID3, MOBULAA KID4, MOBULAA KID5, MOBULAA KID6, MOBULAA KID7, MOBULAA KID8, MOBULAA KID9, MOBULAA KID10
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: MOBULAA TEL1
Bluetooth Version:	Bluetooth 5.0
Wi-Fi Specification:	WIFI(2.4G):IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel GSM/GPRS 850: 824-849MHz GSM/GPRS 1900: 1850-1910MHz WCDMA Band 2: 1850-1910MHz WCDMA Band 5: 824-849MHz FDD-LTE BAND 2: 1850-1910MHz FDD-LTE BAND 5: 824-849MHz FDD-LTE BAND 7: 2500-2570MHz TDD-LTE BAND 38: 2570-2620MHz TDD-LTE BAND 40a: 2305-2315MHz TDD-LTE BAND 41: 2555-2655MHz
Max. RF output power:	Bluetooth: 4.396dBm WiFi (2.4G): 14.841dBm GSM850: 32.52dBm, GSM1900: 29.79dBm WCDMA Band 2: 22.70dBm, WCDMA Band 5: 22.84dBm FDD-LTE BAND 2: 23.39 dBm FDD-LTE BAND 5: 23.39 dBm FDD-LTE BAND 7: 22.09 dBm TDD-LTE BAND 38: 22.76 dBm TDD-LTE BAND 40a: 20.57dBm

	TDD-LTE BAND 41: 23.33dBm
Max.SAR:	0.42 W/Kg 1g Front of face 1.10 W/Kg 10g Wrist-worn
Max Simultaneous SAR	0.49 W/Kg 1g Front of face 1.40 W/Kg 10g Wrist-worn
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK WiFi(2.4G): DSSS, OFDM GMSK, BPSK QPSK, 16QAM
Antenna installation:	Internal antenna
Antenna Gain:	Bluetooth: 0.7dBi WiFi (2.4G): 0.6dBi GSM850: 0.12dBi, GSM1900: 0.85dBi WCDMA Band 2: 0.85dBi WCDMA Band 5: 0.12dBi FDD-LTE BAND 2: 0.85dBi FDD-LTE BAND 5: 0.12dBi FDD-LTE BAND 7: 0.6dBi TDD-LTE BAND 38: 0.66dBi TDD-LTE BAND 40a: 0.39dBi TDD-LTE BAND 41: 0.7dBi
Ratings:	DC 5V charging from adapter DC 3.85V by Battery



### 3 Equipment Used during Test

#### 3.1 Equipment List

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Calibration Due
Data acquisition electronics	SPEAG	DAE4	881	2023/7/14	2024/7/13
Dosimetric E-field Probes	SPEAG	ES3DV3	3089	2023/7/14	2024/7/13
Dosimetric E-field Probes	SPEAG	EX3DV4	7769	2022/9/20	2024/9/19
Dipole	SPEAG	D835V2	4d125	2022/9/20	2025/9/19
Dipole	SPEAG	D1800V2	2d104	2022/9/21	2025/9/20
Dipole	SPEAG	D1900V2	5d145	2022/10/8	2025/10/7
Dipole	SPEAG	D2450V2	801	2022/9/19	2025/9/18
Dipole	SPEAG	D2600V2	1101	2023/1/12	2026/1/11
Communication test set	R&S	CMW500	108058	2023/7/5	2024/7/04
Network analyzer	R&S	ZVB 8	100348	2023/7/5	2024/7/04
Dielectric Assessment Kit	SPEAG	DAK-3.5	1076	/	/
power meter	Agilent	E4419B	N10149	2023/7/5	2024/7/04
MXA signal analyzer	Agilent	N5181A	MY49060920	2023/7/5	2024/7/04
RF Power Meter	Agilent	E9301A	MY41495675	2023/7/5	2024/7/04
Amplifier 300-4200MHz	SHW	SHWPA-00300420P3040-S	22110401	2022/11/17	2024/11/16
Amplifier 2-8GHz	SHW	SHWPA-02000800P3035-S	202211040001	2022/11/17	2024/11/16

### 3.2 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

FCC Test Firm Registration Number: 292923

IC Registered No.:25587

CAB identifier: CN0098



## 4 SAR Introduction

### 4.1 Introduction

This measurement report shows compliance of the EUT with ANSI/IEEE C95.1-2006 and FCC 47 CFR Part2 (2.1093).The test procedures, as described in IEEE 1528-2013 Standard for IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques(300MHz~6GHz) and Published RF Exposure KDB Procedures

### 4.2 SAR Definition

- ▶ SAR : Specific Absorption Rate
- ▶ The SAR characterize the absorption of energy by a quantity of tissue
- ▶ This is related to a increase of the temperature of these tissues during a time period.

$$DAS = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

$$DAS = \frac{\sigma E^2}{\rho}$$

$$DAS = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

### SAR definition

$$SAR = \frac{\sigma E^2}{\rho}$$

#### ▶ SAR : Specific Absorption Rate

- $\sigma$  : Liquid conductivity

- $\epsilon_r = \epsilon' - j\epsilon''$  (complex permittivity of liquid)

- $\sigma = \frac{\epsilon'' \omega}{\epsilon_0}$

- $\rho$ : Liquid density

- $\rho = 1000 \text{ g/L} = 1000\text{Kg/m}^3$

where:

- $\sigma$  = conductivity of the tissue (S/m)
- $\rho$  = mass density of the tissue (kg/m<sup>3</sup>)
- $E$  = rms electric field strength (V/m)

## 5 SAR Measurement Setup

### 5.1 SAR MEASUREMENT SETUP

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD- conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE.

The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.


DASY5 software and SEMCAD data evaluation software.

Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc. The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

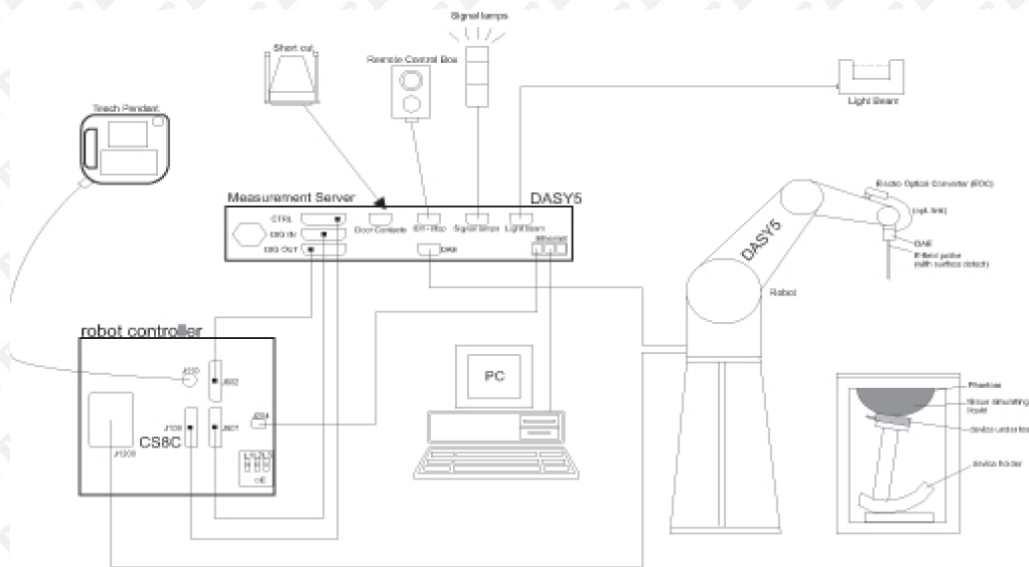

### 5.2 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### 5.3 Probe Specification

Construction Symmetrical design with triangular core  
 Interleaved sensors  
 Built-in shielding against static charges  
 PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration ISO/IEC 17025 calibration service available.

Frequency 4 MHz – 10 GHz  
 Linearity:  $\pm 0.2$  dB (30 MHz – 10 GHz)  
 Directivity  $\pm 0.1$  dB in TSL (rotation around probe axis)  
 $\pm 0.3$  dB in TSL (rotation normal to probe axis)  
 Dynamic Range 10  $\mu$ W/g – >100 W/kg  
 Linearity:  $\pm 0.2$  dB (noise: typically <1  $\mu$ W/g)

Dimensions Overall length: 337 mm (tip: 20 mm)  
 Tip diameter: 2.5 mm (body: 12 mm)  
 Typical distance from probe tip to dipole centers: 1 mm

Application General dosimetry up to 10 GHz  
 Dosimetry in strong gradient fields  
 Compliance tests of Mobile Phones


Compatibility DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



### 5.4 Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

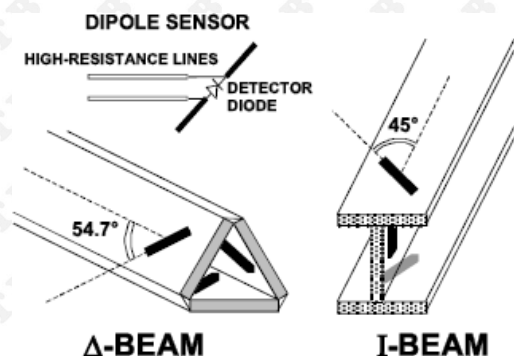



### 5.5 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM Twin Phantom

### 5.6 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG



## 6 SAR Test Procedure

### 6.1 Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max.  $\pm 5\%$ .

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)

#### Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of  $15\text{ mm} \times 15\text{ mm}$  is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

#### Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by  $7 \times 7 \times 5$  points within a cube whose base is centered around the maxima found in the preceding area scan.

#### Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as: • maximum search • extrapolation • boundary correction • peak search for averaged SAR. During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard’s method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard’s method for extrapolation. For a grid using  $7 \times 7 \times 5$  measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube  $7 \times 7 \times 5$  scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.



### Data Storage and Evaluation

#### Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi: compensated signal of channel ( i = x, y, z ) U<sub>i</sub>: input signal of channel ( i = x, y, z )  
 cf: crest factor of exciting field (DASY parameter) dcp<sub>i</sub>: diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E – fieldprobes : 
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H – fieldprobes : 
$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi: compensated signal of channel ( i = x, y, z ) Normi: sensor sensitivity of channel ( i = x, y, z ), [mV/(V/m)<sup>2</sup>] for E-field Probes ConvF: sensitivity enhancement in solution  
 a<sub>ij</sub>: sensor sensitivity factors for H-field probes f: carrier frequency [GHz]  
 Ei: electric field strength of channel i in V/m Hi: magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in W/kg Etot:  
 $\sigma$ : conductivity in [mho/m] or [Siemens/m]  $\rho$ :

total field strength in V/m  
equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.




### 6.2 Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the fourth order least square polynomial method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

### 6.3 Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 6.1 Close-up side view of ERP's**



**Figure 6.2 Front, back and side view of SAM**

### 6.4 Device Reference Points

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 6.3). The “test device reference point” is then located at the same level as the center of the ear reference point. The test device is positioned so that the “vertical centerline” is bisecting the front surface of the device at its top and bottom edges, positioning the “ear reference point” on the outer surface of both the left and right head phantoms on the ear reference point [5].

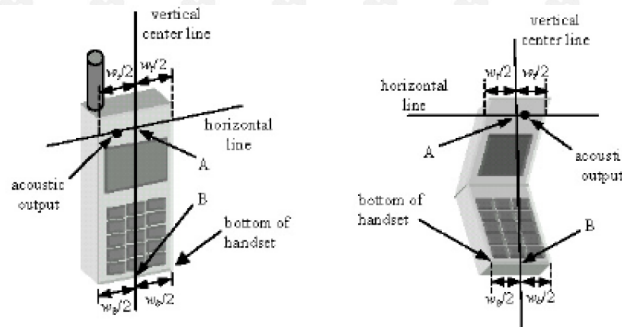


**Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points**

### 6.5 Test Configuration – Positioning for Cheek / Touch

1. Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure below), such that the plane




defined by the vertical center line and the horizontal line of the device is approximately parallel to the sagittal plane of the phantom

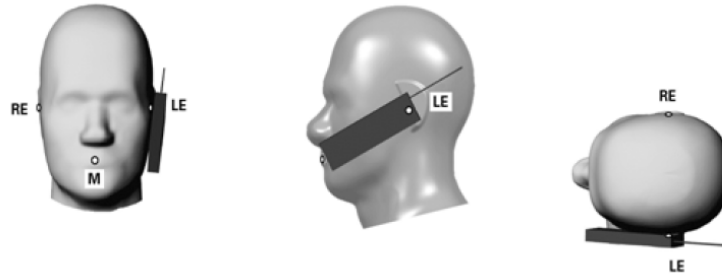

**Figure 7.1 Front, Side and Top View of Cheek/Touch Position**

2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure below.




**Figure 7.2 Side view w/ relevant markings**

### 6.6 Test Configuration – Positioning for Ear / 15° Tilt

With the test device aligned in the Cheek/Touch Position”:

1. While maintaining the orientation of the device, retracted the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
2. Rotate the device around the horizontal line by 15 degrees.
3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure below).

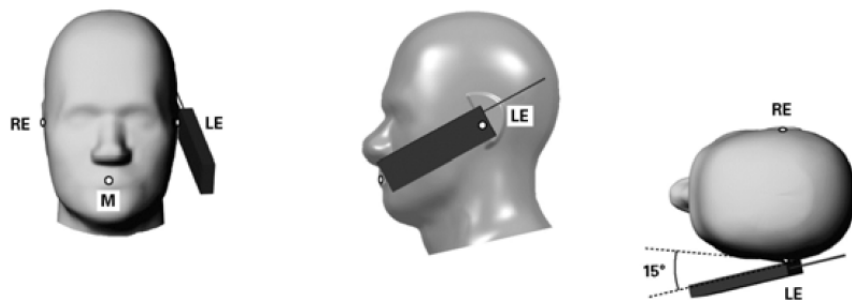


**Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position**

### 6.7 Test Position – Body Configurations

Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.0 cm or holster surface and the flat phantom to 0 cm.

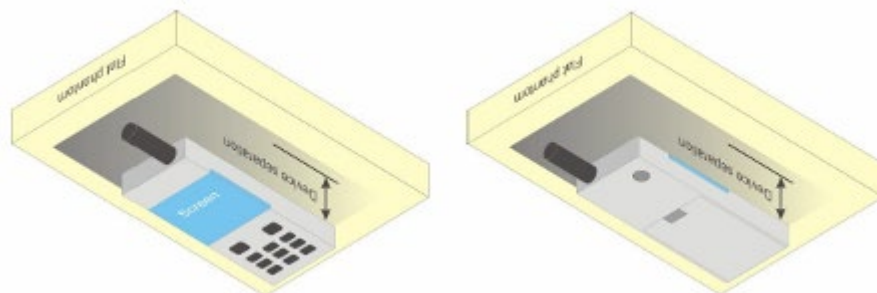

## 7 Exposure limit

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

### 7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 8.1 Human Exposure Limits**

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR <sup>1</sup> Brain	1.60	8.00
SPATIAL AVERAGE SAR <sup>2</sup> Whole Body	0.08	0.40
SPATIAL PEAK SAR <sup>3</sup> Hands, Feet, Ankles, Wrists	4.00	20.00

<sup>1</sup> The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.


<sup>2</sup> The Spatial Average value of the SAR averaged over the whole body.

<sup>3</sup> The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.



## 8 System and liquid validation

### 8.1 System validation

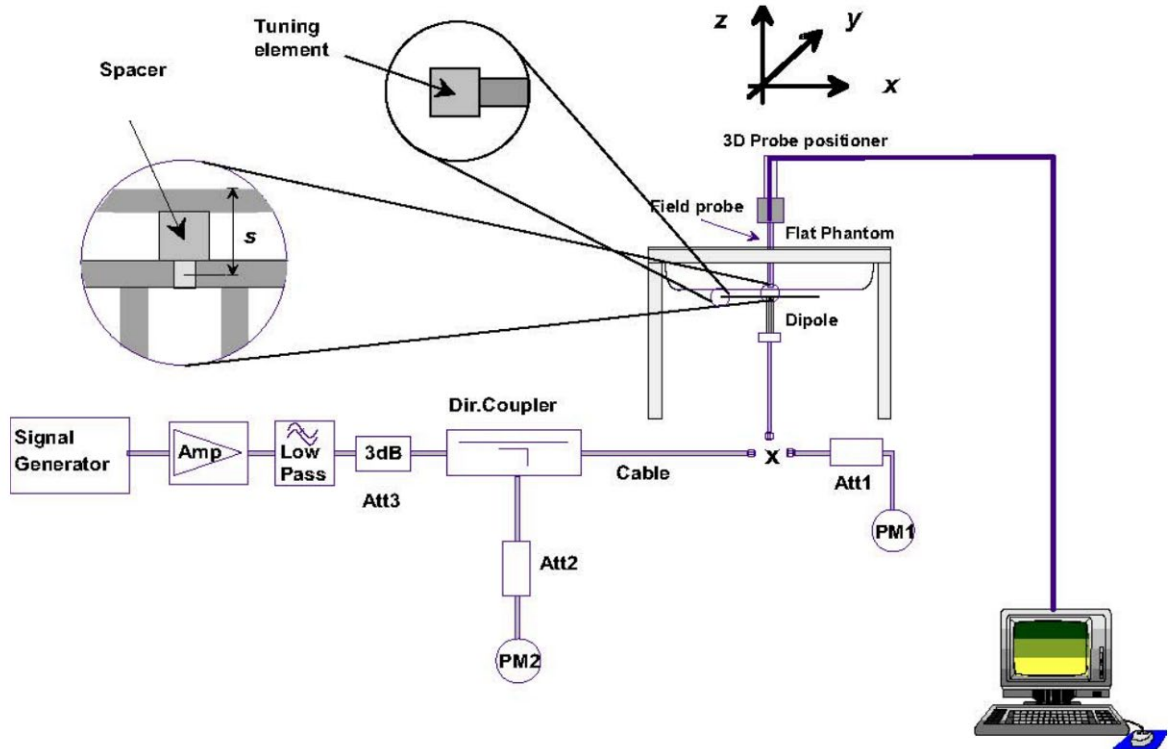

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 30 dBm (1000 mW) before dipole is connected.

**Numerical reference SAR values (W/kg) for reference dipole and flat phantom**

Frequency (MHz)	1g SAR	10g SAR	Local SAR at surface(above feed-point)	Local SAR at surface(y = 2 cm offset from feedpoint)
300	3.02	2.04	4.40	2.10
450	4.92	3.28	7.20	3.20
750	8.49	5.55	12.6	4.59
835	9.56	6.22	14.1	4.90
900	10.9	6.99	16.4	5.40
1450	29.0	16.0	50.2	6.50
1800	38.4	20.1	69.5	6.80
1900	39.7	20.5	72.1	6.60
2000	41.1	21.1	74.6	6.50
2450	52.4	24.0	104	7.70
2600	55.3	24.6	113	8.29
3000	63.8	25.7	140	9.50

**Table 1: system validation (1g)**

Measurement Date	Frequency (MHz)	Liquid Type (head/body)	Target SAR1g (W/kg)	Measured SAR1g (W/kg)	Normalized SAR1g (W/kg)	Deviation (±10%)
2023-11-09	835	head	9.62	2.49	9.96	3.53
2023-11-11	1800	head	38.7	10.6	42.4	9.56
2023-11-16	1900	head	39.6	10.8	43.2	9.09
2023-11-18	2450	head	52	14	56	7.7
2023-11-18	2600	head	57.3	14.6	58.4	1.9

Note: system check input power: 250mW, above 5GHz the input power is 100mW ..

## 8.2 liquid validation

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

### KDB 865664 recommended Tissue Dielectric Parameters

The head and body tissue parameters given in this below table should be used to measure the SAR of transmitters operating in 100 MHz to 6 GHz frequency range. The tissue dielectric parameters of the tissue medium at the test frequency should be within the tolerance required in this document. The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

The head tissue dielectric parameters recommended by IEEE Std 1528-2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in 1528 are derived from tissue dielectric parameters computed from the 4-Cole-Cole equations described above and extrapolated according to the head parameters specified in 1528.

Target Frequency	Head/Body Tissue	
MHz	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800-2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
5800	35.3	5.27



### 8.3 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

**Table 2: Recommended Dielectric Performance of Tissue**

Recommended Dielectric Performance of Tissue												
Ingredients (% by weight )	Frequency (MHz)											
	750		835		1800		1900		2450		2600	
Tissue	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	40.52	51.83	41.45	52.4	55.2	70.2	54.9	40.4	62.7	73.2	54.8	68.1
Salt (NaCl)	1.61	1.52	1.45	1.4	0.3	0.4	0.18	0.5	0.5	0.04	0.1	0.01
Sugar	57.67	46.45	56.0	45.0	0.0	0.0	0.0	58.0	0.0	0.0	0.0	0.0
HEC	0.1	0.1	1.0	1.0	0.0	0.0	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0	0.0	0.0
DGBE	0.0	0.0	0.0	0.0	44.5	29.4	44.92	0.0	0.0	26.7	45.1	31.8
Dielectric	40.93	54.32	42.54	56.1	40.0	53.3	39.9	54.0	39.8	52.5	39.0	52.5
Conductivity	0.87	0.95	0.91	0.95	1.40	1.52	1.42	1.45	1.88	1.78	1.96	2.15

**Table 3: Dielectric Performance of Head Tissue Simulating Liquid**

Temperature: 21°C , Relative humidity: 57%				
Frequency(MHz)	Measured Date	Description	Dielectric Parameters	
			$\epsilon_r$	$\sigma$ (s/m)
835	2023-11-09	Target Value $\pm 5\%$ window	41.50 39.43 — 43.58	0.90 0.855 — 0.945
		Measurement Value	42.28	0.87
1800	2023-11-11	Target Value $\pm 5\%$ window	40.00 38.00 — 42.00	1.40 1.33 — 1.47
		Measurement Value	40.936	1.351
1900	2023-11-16	Target Value $\pm 5\%$ window	40.00 38.00 — 42.00	1.40 1.33 — 1.47
		Measurement Value	39.75	1.45
2450	2023-11-18	Target Value $\pm 5\%$ window	39.2 37.24 — 41.16	1.80 1.71 — 1.89
		Measurement Value	37.97	1.88
2600	2023-11-18	Target Value $\pm 5\%$ window	39.0 37.05 — 40.95	1.96 1.87 — 2.05
		Measurement Value	38.587	2.024

### 9 System Verification Plots

#### System Check-835

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:xxx

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated):  $f = 835$  MHz;  $\sigma = 0.87$  S/m;  $\epsilon_r = 42.28$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 835 MHz; Calibrated: 2023/7/14

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2023/7/14

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 835MHz/d=10mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.61 W/kg

System Performance Check at 835MHz/d=10mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 56.15 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.49 W/kg; SAR(10 g) = 1.68 W/kg

Ratio of SAR at M2 to SAR at M1 = 70.2%

Maximum value of SAR (measured) = 2.66 W/kg

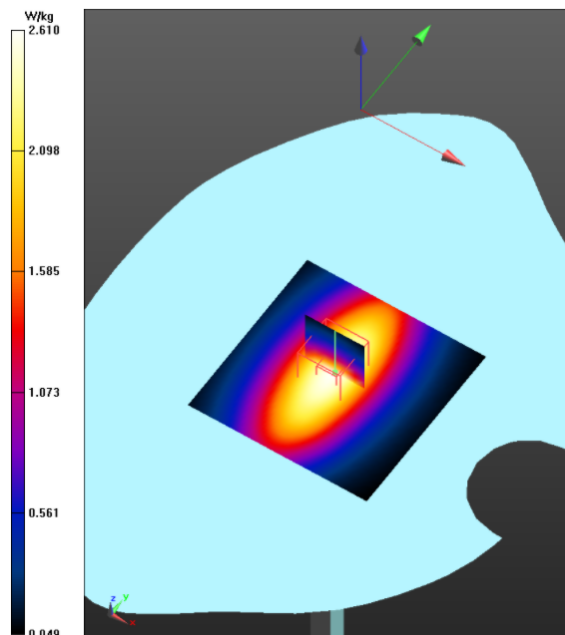




**System Check-1800**

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN:xxx  
 Communication System: UID 0, CW (0); Communication System Band: D1800 (1800.0 MHz); Frequency: 1800 MHz; Communication System PAR: 0 dB; PMF: 1  
 Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.351$  S/m;  $\epsilon_r = 40.936$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)  
 DASY Configuration:  
 Probe: ES3DV3 - SN3089; ConvF(5.35, 5.35, 5.35) @ 1800 MHz; Calibrated: 2023/7/14  
 Modulation Compensation:  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx  
 DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 1800MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 12.3 W/kg

System Performance Check at 1800MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 94.74 V/m; Power Drift = -0.00 dB  
 Peak SAR (extrapolated) = 19.0 W/kg  
 SAR(1 g) = 10.6 W/kg; SAR(10 g) = 5.67 W/kg  
 Smallest distance from peaks to all points 3 dB below = 10.8 mm  
 Ratio of SAR at M2 to SAR at M1 = 57.7%  
 Maximum value of SAR (measured) = 11.9 W/kg

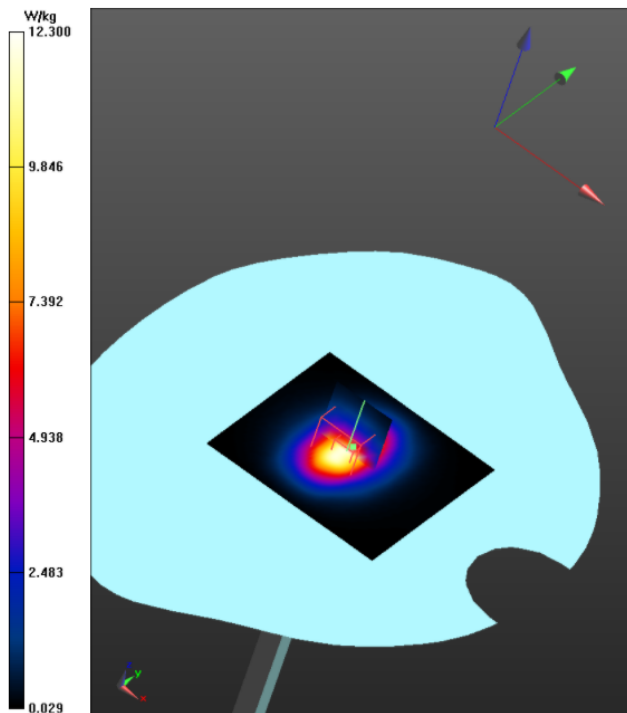

**System Check-1900**

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:xxx

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 39.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

**DASY Configuration:**

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1900 MHz; Calibrated: 2023/7/14

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2023/7/14

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 1900MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan

(61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.4 W/kg

System Performance Check at 1900MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7)

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.02 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 19.9 W/kg

SAR(1 g) = 10.8 W/kg; SAR(10 g) = 5.59 W/kg

Smallest distance from peaks to all points 3 dB below = 10.5 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 12.1 W/kg

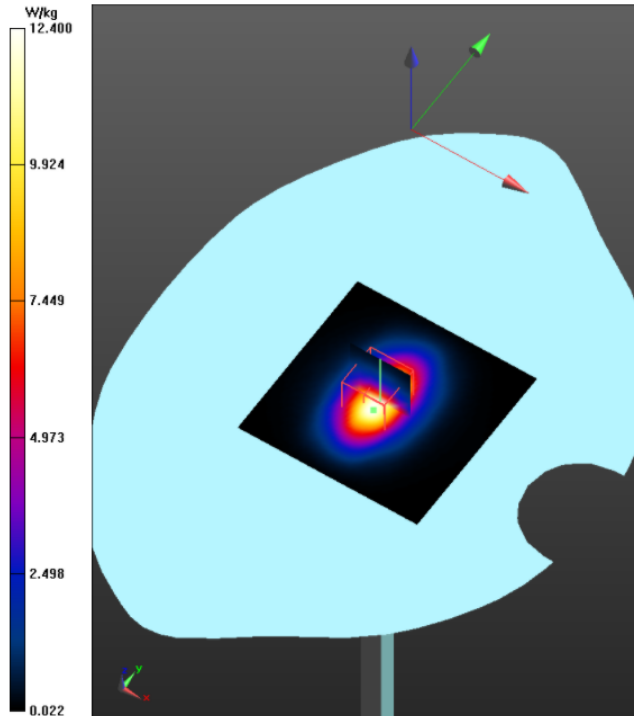

System Check-2450

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:xxx

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.88$  S/m;  $\epsilon_r = 37.97$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.7, 4.7, 4.7) @ 2450 MHz; Calibrated: 2023/7/14

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2023/7/14

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 2450MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 17.1 W/kg

System Performance Check at 2450MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 95.01 V/m; Power Drift = -0.20 dB  
Peak SAR (extrapolated) = 30.3 W/kg  
SAR(1 g) = 14 W/kg; SAR(10 g) = 6.49 W/kg  
Smallest distance from peaks to all points 3 dB below = 10 mm  
Ratio of SAR at M2 to SAR at M1 = 48.5%  
Maximum value of SAR (measured) = 16.0 W/kg

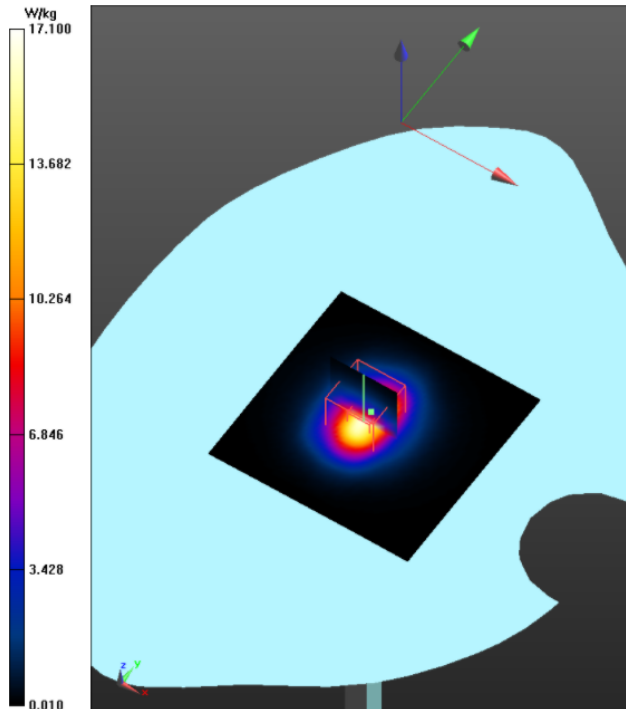




**System Check-2600**

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:xxx  
 Communication System: UID 0, CW (0); Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Communication System PAR: 0 dB; PMF: 1  
 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.024$  S/m;  $\epsilon r = 38.587$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2011)  
 DASYS Configuration:  
 Probe: ES3DV3 - SN3089; ConvF(4.57, 4.57, 4.57) @ 2600 MHz; Calibrated: 2023/7/14  
 Modulation Compensation:  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = -1.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx  
 DASYS52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 2600MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 17.2 W/kg

System Performance Check at 2600MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 92.37 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 32.7 W/kg  
 SAR(1 g) = 14.6 W/kg; SAR(10 g) = 6.45 W/kg  
 Smallest distance from peaks to all points 3 dB below = 9.2 mm  
 Ratio of SAR at M2 to SAR at M1 = 46.6%  
 Maximum value of SAR (measured) = 16.4 W/kg

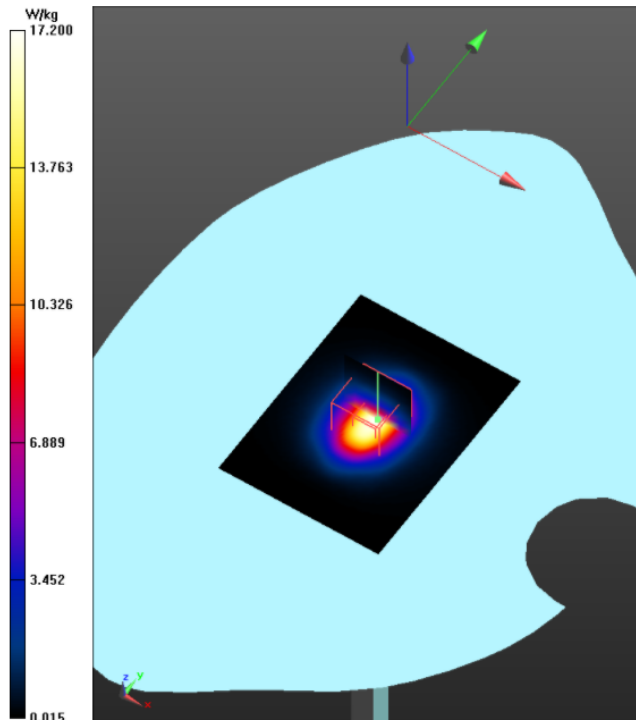

## 10 Type a Measurement Uncertainty

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table below :

Uncertainty Distribution	Normal	Rectangle	Triangular	U Shape
Multi-plying Factor(a)	1/k(b)	1 / $\sqrt{3}$	1 / $\sqrt{6}$	1 / $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

### Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type -sum- by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The COMOSAR Uncertainty Budget is show in below table:



<b>DASY5 Uncertainty</b> Measurement uncertainty for 300MHz to 3GHz averaged over 1 gram/ 10 gram								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) vef f
<b>Measurement System</b>								
Probe Calibration	±6.0 %	N	1	1	1	±6.0 %	±6.0 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Modulation Responsem	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	√3	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
<b>Test Sample Related</b>								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Power Scalingp	±0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±6.1 %	R	√3	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.)DAK	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) DAK	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity BB	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity BB	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
<b>Combined Std. Uncertainty</b>						±11.2 %	±11.1 %	361
<b>Expanded STD Uncertainty</b>						±22.3 %	±22.2 %	



## 11 Output Power Verification

### 11.1 Test Condition:

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The base station simulator was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ±1.5dB.
3. Environmental Conditions
 

Temperature	23°C
Relative Humidity	53%
Atmospheric Pressure	1019mbar
4. Tested By : Andy Feng

### 11.2 Test Procedures:

#### Mobile Phone radio output power measurement

1. The transmitter output port was connected to base station emulator.
2. Establish communication link between emulator and EUT and set EUT to operate at maximum output power all the time.
3. Select lowest, middle, and highest channels for each band and different possible test mode.
4. Measure the conducted peak burst power and conducted average burst power from EUT antenna port.

#### Other radio output power measurement:

The output power was measured using power meter at low, mid, and hi channels.

#### Source-based Time Averaged Burst Power Calculation:

For TDMA, the following duty cycle factor was used to calculate the source-based time average power

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Duty cycle factor	-9.03 dB	-6.02 dB	-4.26 dB	-3.01 dB
Crest Factor	8	4	2.66	2

**Remark:** *Time slot duty cycle factor = 10 \* log (Time Slot Duty Cycle)*

*Source based time averaged power = Maximum burst averaged power (1 Uplink) – 9.03 dB*

*Source based time averaged power = Maximum burst averaged power (2 Uplink) – 6.02 dB*

*Source based time averaged power = Maximum burst averaged power (3 Uplink) – 4.26 dB*

*Source based time averaged power = Maximum burst averaged power (4 Uplink) – 3.01 dB*

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM	32.20	32.13	32.43	32±1	29.79	29.52	29.34	29±1
GPRS 1 slots	32.26	32.18	32.52	32±1	29.78	29.49	29.30	29±1
GPRS 2 slots	30.14	30.00	30.29	30±1	27.76	27.17	26.88	27±1
GPRS 3 slots	28.24	27.97	28.34	28±1	26.33	25.68	25.34	26±1
GPRS 4 slots	26.32	25.99	26.68	26±1	24.40	23.58	23.20	24±1
Remark : GPRS, CS1 coding scheme. EGPRS, MCS5 coding scheme. Multi 1 Slot , Support Max 4 downlink, 1 uplink , 5 working link Multi 2 Slots , Support Max 4 downlink, 2 uplink , 5 working link Multi 3 Slots , Support Max 4 downlink, 3 uplink , 5 working link Multi 4 Slots , Support Max 4 downlink, 4 uplink , 5 working link								

Source Based time Average Power (dBm)								
Band	GSM850				PCS1900			
Channel	128	190	251	Time Average factor	512	661	810	Time Average factor
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM	23.17	23.10	23.40	-9.03	20.76	20.49	20.31	-9.03
GPRS 1 slots	23.23	23.15	23.49	-9.03	20.75	20.46	20.27	-9.03
GPRS 2 slots	24.12	23.98	24.27	-6.02	21.74	21.15	20.86	-6.02
GPRS 3 slots	23.98	23.71	24.08	-4.26	22.07	21.42	21.08	-4.26
GPRS 4 slots	23.31	22.98	23.67	-3.01	21.39	20.57	20.19	-3.01

Remark :

Time average factor = 1 uplink ,  $10 \cdot \log(1/8) = -9.03\text{dB}$  , 2 uplink ,  $10 \cdot \log(2/8) = -6.02\text{dB}$  , 3 uplink ,  $10 \cdot \log(3/8) = -4.26\text{dB}$  , 4 uplink ,  $10 \cdot \log(4/8) = -3.01\text{dB}$

Source based time average power = Burst Average power + Time Average factor

**Note:** DUT was set in GPRS(2Tx slots) due to GSM850 and set in GPRS(3Tx slots) due to PCS1900 the Maximum source-base time average output power for body SAR.



WCDMA - Average Power (dBm)								
Band	WCDMA Band II				WCDMA Band V			
Channel	9262	9400	9538	Tune up Power tolerant	4132	4182	4233	Tune up Power tolerant
Frequency (MHz)	1852.4	1880	1907.6	/	826.4	836.4	846.6	/
RMC 12.2k	22.68	22.53	22.49	<b>22±1</b>	22.44	22.69	22.84	<b>22±1</b>
HSDPA Subtest-1	21.37	21.90	21.55	<b>21±1</b>	22.51	22.74	22.19	<b>22±1</b>
HSDPA Subtest-2	20.80	21.40	21.38	<b>21±1</b>	22.29	22.57	22.05	<b>22±1</b>
HSDPA Subtest-3	20.75	20.94	21.13	<b>21±1</b>	22.06	22.03	21.75	<b>22±1</b>
HSDPA Subtest-4	20.27	21.01	20.94	<b>21±1</b>	21.70	21.88	21.29	<b>22±1</b>
HSUPA Subtest-1	22.70	22.58	22.53	<b>22±1</b>	22.45	22.69	22.83	<b>22±1</b>
HSUPA Subtest-2	22.70	22.58	22.55	<b>22±1</b>	22.41	22.67	22.85	<b>22±1</b>
HSUPA Subtest-3	22.70	22.59	22.54	<b>22±1</b>	22.44	22.72	22.84	<b>22±1</b>
HSUPA Subtest-4	22.71	22.58	22.53	<b>22±1</b>	22.47	22.70	22.86	<b>22±1</b>
HSUPA Subtest-5	22.71	22.62	22.55	<b>22±1</b>	22.45	22.68	22.85	<b>22±1</b>

### LTE Power Reduction

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS\_01".

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 <sup>1</sup>	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
--					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

**LTE Band 2:**

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	18607	1850.7	QPSK	1	0	23.36	23.0±1	/
				1	2	23.38	23.0±1	/
				1	5	23.32	23.0±1	/
				3	0	23.32	23.0±1	/
				3	2	23.24	23.0±1	/
				6	0	21.67	22.0±1	1.0
			16QAM	1	0	22.83	22.0±1	1.0
				1	2	22.82	22.0±1	1.0
				1	5	22.83	22.0±1	1.0
				3	0	22.17	22.0±1	1.0
				3	2	22.20	22.0±1	1.0
				6	0	21.48	22.0±1	1.0
	18900	1880	QPSK	1	0	22.99	23.0±1	/
				1	2	23.05	23.0±1	/
				1	5	23.03	23.0±1	/
				3	0	23.13	23.0±1	/
				3	1	23.09	23.0±1	/
				6	0	21.55	22.0±1	1.0
			16QAM	1	0	22.59	22.0±1	1.0
				1	2	22.60	22.0±1	1.0
				1	5	22.57	22.0±1	1.0
				3	0	22.03	22.0±1	1.0
				3	2	22.02	22.0±1	1.0
				6	0	21.16	22.0±1	1.0
19193	1909.3	QPSK	1	0	23.13	23.0±1	/	
			1	2	23.15	23.0±1	/	
			1	5	23.11	23.0±1	/	
			3	0	22.99	23.0±1	/	
			3	2	23.01	23.0±1	/	
			6	0	21.47	22.0±1	1.0	
		16QAM	1	0	22.65	22.0±1	1.0	
			1	2	22.63	22.0±1	1.0	
			1	5	22.65	22.0±1	1.0	
			3	0	21.97	22.0±1	1.0	
			3	2	22.02	22.0±1	1.0	
			6	0	21.05	22.0±1	1.0	



BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	18615	1851.5	QPSK	1	0	23.21	23.0±1	/
				1	8	23.20	23.0±1	/
				1	14	23.16	23.0±1	/
				6	0	21.81	22.0±1	1.0
				6	9	21.68	22.0±1	1.0
				15	0	21.74	22.0±1	1.0
			16QAM	1	0	22.33	22.0±1	1.0
				1	8	22.31	22.0±1	1.0
				1	14	22.26	22.0±1	1.0
				6	0	21.52	22.0±1	1.0
				6	9	21.44	22.0±1	1.0
				15	0	21.27	22.0±1	1.0
	18900	1880	QPSK	1	0	23.04	23.0±1	/
				1	8	23.08	23.0±1	/
				1	14	23.13	23.0±1	/
				6	4	21.64	22.0±1	1.0
				6	9	21.59	22.0±1	1.0
				15	0	21.60	22.0±1	1.0
			16QAM	1	0	22.65	22.0±1	1.0
				1	8	22.65	22.0±1	1.0
				1	14	22.69	22.0±1	1.0
				6	0	21.25	22.0±1	1.0
				6	9	21.01	22.0±1	1.0
				15	0	21.15	22.0±1	1.0
	19185	1908.5	QPSK	1	0	22.91	23.0±1	/
				1	8	23.04	23.0±1	/
				1	14	23.11	23.0±1	/
6				0	21.51	22.0±1	1.0	
6				9	21.53	22.0±1	1.0	
15				0	21.49	22.0±1	1.0	
16QAM			1	0	21.72	22.0±1	1.0	
			1	8	21.69	22.0±1	1.0	
			1	14	21.75	22.0±1	1.0	
			6	0	21.22	22.0±1	1.0	
			6	9	21.08	22.0±1	1.0	
			15	0	21.85	22.0±1	1.0	

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	18625	1852.5	QPSK	1	0	23.22	23.0±1	/
				1	12	23.16	23.0±1	/
				1	24	23.10	23.0±1	/
				12	0	21.80	22.0±1	1.0
				12	11	21.61	22.0±1	1.0
				25	0	21.70	22.0±1	1.0
			16QAM	1	0	22.24	22.0±1	1.0
				1	12	22.17	22.0±1	1.0
				1	24	22.19	22.0±1	1.0
				12	0	21.27	22.0±1	1.0
				12	11	21.20	22.0±1	1.0
				25	0	21.25	22.0±1	1.0
	18900	1880	QPSK	1	0	23.01	23.0±1	/
				1	12	23.06	23.0±1	/
				1	24	23.07	23.0±1	/
				12	0	21.63	22.0±1	1.0
				12	11	21.57	22.0±1	1.0
				25	0	21.61	22.0±1	1.0
			16QAM	1	0	21.82	22.0±1	1.0
				1	12	21.87	22.0±1	1.0
				1	24	21.88	22.0±1	1.0
				12	0	21.13	22.0±1	1.0
				12	11	21.95	22.0±1	1.0
				25	0	21.23	22.0±1	1.0
19175	1907.5	QPSK	1	0	23.18	23.0±1	/	
			1	12	23.08	23.0±1	/	
			1	24	23.13	23.0±1	/	
			12	0	21.46	22.0±1	1.0	
			12	11	21.57	22.0±1	1.0	
			25	0	21.55	22.0±1	1.0	
		16QAM	1	0	22.21	22.0±1	1.0	
			1	12	22.16	22.0±1	1.0	
			1	24	22.24	22.0±1	1.0	
			12	0	21.03	22.0±1	1.0	
			12	11	21.90	22.0±1	1.0	
			25	0	21.10	22.0±1	1.0	

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	18650	1855	QPSK	1	0	23.21	23.0±1	/
				1	24	23.10	23.0±1	/
				1	49	23.05	23.0±1	/
				25	0	21.74	22.0±1	1.0
				25	24	21.71	22.0±1	1.0
				50	0	21.70	22.0±1	1.0
			16QAM	1	0	22.25	22.0±1	1.0
				1	24	22.15	22.0±1	1.0
				1	49	22.04	22.0±1	1.0
				25	0	21.30	22.0±1	1.0
				25	24	21.10	22.0±1	1.0
				50	0	21.32	22.0±1	1.0
	18900	1880	QPSK	1	0	23.11	23.0±1	/
				1	24	23.05	23.0±1	/
				1	49	23.11	23.0±1	/
				25	0	21.46	22.0±1	1.0
				25	24	21.72	22.0±1	1.0
				50	0	21.58	22.0±1	1.0
			16QAM	1	0	22.41	22.0±1	1.0
				1	24	22.33	22.0±1	1.0
				1	49	22.46	22.0±1	1.0
				25	0	21.10	22.0±1	1.0
				25	24	21.30	22.0±1	1.0
				50	0	21.20	22.0±1	1.0
19150	1905	QPSK	1	0	23.20	23.0±1	/	
			1	24	23.13	23.0±1	/	
			1	49	23.12	23.0±1	/	
			25	0	21.53	22.0±1	1.0	
			25	24	21.48	22.0±1	1.0	
			50	0	21.51	22.0±1	1.0	
		16QAM	1	0	21.52	22.0±1	1.0	
			1	24	21.47	22.0±1	1.0	
			1	49	21.47	22.0±1	1.0	
			25	0	21.02	22.0±1	1.0	
			25	24	21.12	22.0±1	1.0	
			50	0	21.14	22.0±1	1.0	



BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	18675	1857.5	QPSK	1	0	23.22	23.0±1	/
				1	37	23.07	23.0±1	/
				1	74	22.98	23.0±1	/
				36	0	21.79	22.0±1	1.0
				36	35	21.59	22.0±1	1.0
				75	0	21.58	22.0±1	1.0
			16QAM	1	0	22.23	22.0±1	1.0
				1	37	22.12	22.0±1	1.0
				1	74	21.98	22.0±1	1.0
				36	0	21.31	22.0±1	1.0
				36	35	21.22	22.0±1	1.0
				75	0	21.09	22.0±1	1.0
	18900	1880	QPSK	1	0	23.08	23.0±1	/
				1	37	23.05	23.0±1	/
				1	74	23.07	23.0±1	/
				36	0	21.55	22.0±1	1.0
				36	35	21.59	22.0±1	1.0
				75	0	21.57	22.0±1	1.0
			16QAM	1	0	22.40	22.0±1	1.0
				1	37	22.39	22.0±1	1.0
				1	74	22.46	22.0±1	1.0
				36	0	21.97	22.0±1	1.0
				36	35	21.23	22.0±1	1.0
				75	0	21.20	22.0±1	1.0
19125	1902.5	QPSK	1	0	23.20	23.0±1	/	
			1	37	23.17	23.0±1	/	
			1	74	23.11	23.0±1	/	
			36	0	21.69	22.0±1	1.0	
			36	35	21.48	22.0±1	1.0	
			75	0	21.58	22.0±1	1.0	
		16QAM	1	0	22.24	22.0±1	1.0	
			1	37	22.13	22.0±1	1.0	
			1	74	22.11	22.0±1	1.0	
			36	0	21.17	22.0±1	1.0	
			36	35	21.11	22.0±1	1.0	
			75	0	21.08	22.0±1	1.0	

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	18700	1860	QPSK	1	0	23.39	23.0±1	/
				1	49	23.20	23.0±1	/
				1	99	23.18	23.0±1	/
				50	0	21.60	22.0±1	1.0
				50	24	21.46	22.0±1	1.0
				100	0	21.53	22.0±1	1.0
			16QAM	1	0	22.37	22.0±1	1.0
				1	49	22.22	22.0±1	1.0
				1	99	22.22	22.0±1	1.0
				50	0	21.34	22.0±1	1.0
				50	49	21.00	22.0±1	1.0
				100	0	21.16	22.0±1	1.0
	18900	1880	QPSK	1	0	23.39	23.0±1	/
				1	49	23.39	23.0±1	/
				1	99	23.32	23.0±1	/
				50	0	21.67	22.0±1	1.0
				50	24	21.98	22.0±1	1.0
				100	0	21.63	22.0±1	1.0
			16QAM	1	0	21.81	22.0±1	1.0
				1	49	21.80	22.0±1	1.0
				1	99	21.89	22.0±1	1.0
				50	0	21.97	22.0±1	1.0
				50	24	21.12	22.0±1	1.0
				100	0	21.19	22.0±1	1.0
19100	1900	QPSK	1	0	23.37	23.0±1	/	
			1	49	23.32	23.0±1	/	
			1	99	23.24	23.0±1	/	
			50	0	21.69	22.0±1	1.0	
			50	24	21.61	22.0±1	1.0	
			100	0	21.57	22.0±1	1.0	
		16QAM	1	0	22.28	22.0±1	1.0	
			1	49	22.24	22.0±1	1.0	
			1	99	22.15	22.0±1	1.0	
			50	0	21.23	22.0±1	1.0	
			50	24	21.13	22.0±1	1.0	
			100	0	21.21	22.0±1	1.0	

**LTE Band 5:**

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	20407	824.7	QPSK	1	0	22.83	23.0±1	/
				1	2	22.86	23.0±1	/
				1	5	22.90	23.0±1	/
				3	0	22.82	23.0±1	/
				3	2	22.84	23.0±1	/
				6	0	21.17	22.0±1	1.0
			16QAM	1	0	22.72	22.0±1	1.0
				1	2	22.62	22.0±1	1.0
				1	5	22.60	22.0±1	1.0
				3	0	21.82	22.0±1	1.0
				3	2	21.86	22.0±1	1.0
				6	0	21.57	22.0±1	1.0
	20525	836.5	QPSK	1	0	22.90	23.0±1	/
				1	2	23.17	23.0±1	/
				1	5	23.12	23.0±1	/
				3	0	23.25	23.0±1	/
				3	2	23.14	23.0±1	/
				6	0	21.52	22.0±1	1.0
			16QAM	1	0	21.30	22.0±1	1.0
				1	2	21.48	22.0±1	1.0
				1	5	21.62	22.0±1	1.0
				3	0	22.14	22.0±1	1.0
				3	2	22.07	22.0±1	1.0
				6	0	21.29	22.0±1	1.0
	20634	848.3	QPSK	1	0	23.39	23.0±1	/
				1	2	23.39	23.0±1	/
				1	5	23.34	23.0±1	/
3				0	23.18	23.0±1	/	
3				2	23.14	23.0±1	/	
6				0	21.83	22.0±1	1.0	
16QAM			1	0	22.61	22.0±1	1.0	
			1	2	22.80	22.0±1	1.0	
			1	5	22.78	22.0±1	1.0	
			3	0	22.12	22.0±1	1.0	
			3	2	22.26	22.0±1	1.0	
			6	0	21.35	22.0±1	1.0	



BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	20415	825.5	QPSK	1	0	22.86	23.0±1	/
				1	8	22.91	23.0±1	/
				1	14	22.93	23.0±1	/
				8	0	21.16	22.0±1	1.0
				8	9	21.46	22.0±1	1.0
				15	0	21.16	22.0±1	1.0
			16QAM	1	0	21.75	22.0±1	1.0
				1	8	21.69	22.0±1	1.0
				1	14	21.85	22.0±1	1.0
				8	0	21.80	22.0±1	1.0
				8	9	21.10	22.0±1	1.0
				15	0	20.60	22.0±1	1.0
	20525	836.5	QPSK	1	0	22.78	23.0±1	/
				1	8	23.08	23.0±1	/
				1	14	23.08	23.0±1	/
				8	0	21.28	22.0±1	1.0
				8	9	21.57	22.0±1	1.0
				15	0	21.51	22.0±1	1.0
			16QAM	1	0	22.50	22.0±1	1.0
				1	8	22.76	22.0±1	1.0
				1	14	22.80	22.0±1	1.0
				8	0	20.84	22.0±1	1.0
				8	9	21.22	22.0±1	1.0
				15	0	21.07	22.0±1	1.0
	20635	847.5	QPSK	1	0	23.31	23.0±1	/
				1	8	23.36	23.0±1	/
				1	14	23.32	23.0±1	/
8				0	21.67	22.0±1	1.0	
8				9	21.89	22.0±1	1.0	
15				0	21.62	22.0±1	1.0	
16QAM			1	0	21.67	22.0±1	1.0	
			1	8	21.63	22.0±1	1.0	
			1	14	21.72	22.0±1	1.0	
			8	0	21.28	22.0±1	1.0	
			8	9	21.38	22.0±1	1.0	
			15	0	21.08	22.0±1	1.0	

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20425	826.5	QPSK	1	0	22.69	23.0±1	/
				1	49	22.67	23.0±1	/
				1	99	22.87	23.0±1	/
				12	0	21.24	22.0±1	1.0
				12	24	21.31	22.0±1	1.0
				25	0	21.39	22.0±1	1.0
			16QAM	1	0	21.48	22.0±1	1.0
				1	49	21.38	22.0±1	1.0
				1	99	21.57	22.0±1	1.0
				12	0	21.62	22.0±1	1.0
				12	24	21.79	22.0±1	1.0
				25	0	21.03	22.0±1	1.0
	20525	836.5	QPSK	1	0	22.81	23.0±1	/
				1	49	23.17	23.0±1	/
				1	99	23.17	23.0±1	/
				12	0	21.26	22.0±1	1.0
				12	24	21.60	22.0±1	1.0
				25	0	21.71	22.0±1	1.0
			16QAM	1	0	21.81	22.0±1	1.0
				1	49	22.22	22.0±1	1.0
				1	99	22.11	22.0±1	1.0
				12	0	21.66	22.0±1	1.0
				12	49	21.04	22.0±1	1.0
				25	0	21.01	22.0±1	1.0
20625	846.5	QPSK	1	0	23.17	23.0±1	/	
			1	49	23.06	23.0±1	/	
			1	99	23.07	23.0±1	/	
			12	0	21.75	22.0±1	1.0	
			12	49	21.68	22.0±1	1.0	
			25	0	21.73	22.0±1	1.0	
		16QAM	1	0	22.13	22.0±1	1.0	
			1	49	22.20	22.0±1	1.0	
			1	99	22.35	22.0±1	1.0	
			12	0	21.07	22.0±1	1.0	
			12	49	21.08	22.0±1	1.0	
			25	0	21.99	22.0±1	1.0	

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20450	829	QPSK	1	0	22.80	23.0±1	/
				1	49	22.86	23.0±1	/
				1	99	22.94	23.0±1	/
				25	0	21.39	22.0±1	1.0
				25	49	21.47	22.0±1	1.0
				50	0	21.45	22.0±1	1.0
			16QAM	1	0	21.59	22.0±1	1.0
				1	49	21.68	22.0±1	1.0
				1	99	21.72	22.0±1	1.0
				25	0	21.95	22.0±1	1.0
				25	49	21.96	22.0±1	1.0
				50	0	21.63	22.0±1	1.0
	20525	836.5	QPSK	1	0	22.97	23.0±1	/
				1	49	23.39	23.0±1	/
				1	99	23.19	23.0±1	/
				25	0	21.38	22.0±1	1.0
				25	49	21.97	22.0±1	1.0
				50	0	21.52	22.0±1	1.0
			16QAM	1	0	22.04	22.0±1	1.0
				1	49	22.13	22.0±1	1.0
				1	99	22.23	22.0±1	1.0
				25	0	21.86	22.0±1	1.0
				25	49	21.17	22.0±1	1.0
				50	0	21.12	22.0±1	1.0
	20600	844	QPSK	1	0	23.13	23.0±1	/
				1	49	23.24	23.0±1	/
				1	99	23.18	23.0±1	/
25				0	21.73	22.0±1	1.0	
25				49	21.60	22.0±1	1.0	
50				0	21.52	22.0±1	1.0	
16QAM			1	0	21.48	22.0±1	1.0	
			1	49	21.47	22.0±1	1.0	
			1	99	21.72	22.0±1	1.0	
			25	0	21.99	22.0±1	1.0	
			25	49	21.14	22.0±1	1.0	
			50	0	21.99	22.0±1	1.0	



**LTE Band 7:**

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20775	2502.5	QPSK	1	0	21.74	22.0±1	/
				1	49	21.68	22.0±1	/
				1	99	21.72	22.0±1	/
				12	0	20.20	21.0±1	1.0
				12	24	20.29	21.0±1	1.0
				12	49	20.23	21.0±1	1.0
			16QAM	25	0	20.72	21.0±1	1.0
				1	0	20.69	21.0±1	1.0
				1	49	20.79	21.0±1	1.0
				1	99	20.72	21.0±1	1.0
				12	0	20.76	21.0±1	1.0
				12	24	20.76	21.0±1	1.0
	21100	2535	QPSK	12	49	21.62	21.0±1	1.0
				25	0	21.64	21.0±1	1.0
				1	0	21.71	22.0±1	/
				1	49	21.29	22.0±1	/
				1	99	21.33	22.0±1	/
				12	0	20.37	21.0±1	1.0
			16QAM	12	24	20.72	21.0±1	1.0
				12	49	20.74	21.0±1	1.0
				25	0	20.80	21.0±1	1.0
				1	0	20.84	21.0±1	1.0
				1	49	20.91	21.0±1	1.0
				1	99	20.78	21.0±1	1.0
21425	2567.5	QPSK	12	0	21.81	21.0±1	1.0	
			12	24	21.83	21.0±1	1.0	
			12	49	21.86	21.0±1	1.0	
			25	0	20.19	21.0±1	1.0	
			1	0	21.24	22.0±1	/	
			1	49	21.28	22.0±1	/	
		16QAM	1	99	21.49	22.0±1	/	
			12	0	20.54	21.0±1	1.0	
			12	24	20.58	21.0±1	1.0	
			12	49	20.76	21.0±1	1.0	
			25	0	20.69	21.0±1	1.0	
			1	0	20.93	21.0±1	1.0	
16QAM	1	49	21.74	21.0±1	1.0			
	1	99	21.68	21.0±1	1.0			
	12	0	21.72	21.0±1	1.0			
	12	24	20.20	21.0±1	1.0			
	12	49	20.29	21.0±1	1.0			
	25	0	20.23	21.0±1	1.0			

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20800	2505	QPSK	1	0	21.69	22.0±1	/
				1	49	21.65	22.0±1	/
				1	99	21.66	22.0±1	/
				25	0	20.15	21.0±1	1.0
				25	24	20.26	21.0±1	1.0
				25	49	20.18	21.0±1	1.0
				50	0	20.65	21.0±1	1.0
			16QAM	1	0	20.68	21.0±1	1.0
				1	49	20.62	21.0±1	1.0
				1	99	20.83	21.0±1	1.0
				25	0	20.80	21.0±1	1.0
				25	24	20.96	21.0±1	1.0
				25	49	21.80	21.0±1	1.0
				50	0	21.77	21.0±1	1.0
	21100	2535	QPSK	1	0	21.90	22.0±1	/
				1	49	20.28	22.0±1	/
				1	99	20.35	22.0±1	/
				25	0	20.19	21.0±1	1.0
				25	24	21.15	21.0±1	1.0
				25	49	21.18	21.0±1	1.0
				50	0	21.21	21.0±1	1.0
			16QAM	1	0	20.91	21.0±1	1.0
				1	49	20.04	21.0±1	1.0
				1	99	20.90	21.0±1	1.0
				25	0	21.86	21.0±1	1.0
				25	24	21.97	21.0±1	1.0
				25	49	22.05	21.0±1	1.0
50				0	20.12	21.0±1	1.0	
21400	2565	QPSK	1	0	20.21	22.0±1	/	
			1	49	20.34	22.0±1	/	
			1	99	20.17	22.0±1	/	
			25	0	20.26	21.0±1	1.0	
			25	24	20.25	21.0±1	1.0	
			25	49	20.53	21.0±1	1.0	
			50	0	20.87	21.0±1	1.0	
		16QAM	1	0	20.84	21.0±1	1.0	
			1	49	21.69	21.0±1	1.0	
			1	99	21.65	21.0±1	1.0	
			25	0	21.66	21.0±1	1.0	
			25	24	20.15	21.0±1	1.0	
			25	49	20.26	21.0±1	1.0	
			50	0	20.18	21.0±1	1.0	

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20825	2507.5	QPSK	1	0	21.65	22.0±1	/
				1	49	21.63	22.0±1	/
				1	99	21.57	22.0±1	/
				36	0	20.24	21.0±1	1.0
				36	24	20.11	21.0±1	1.0
				36	49	20.05	21.0±1	1.0
				75	0	20.66	21.0±1	1.0
			16QAM	1	0	20.68	21.0±1	1.0
				1	49	20.60	21.0±1	1.0
				1	99	20.97	21.0±1	1.0
				36	0	20.92	21.0±1	1.0
				36	24	20.73	21.0±1	1.0
				36	49	20.73	21.0±1	1.0
				75	0	21.82	21.0±1	1.0
	21100	2535	QPSK	1	0	21.88	22.0±1	/
				1	49	20.23	22.0±1	/
				1	99	20.38	22.0±1	/
				36	0	20.28	21.0±1	1.0
				36	24	21.13	21.0±1	1.0
				36	49	21.34	21.0±1	1.0
				75	0	21.40	21.0±1	1.0
			16QAM	1	0	20.99	21.0±1	1.0
				1	49	20.03	21.0±1	1.0
				1	99	20.84	21.0±1	1.0
				36	0	21.88	21.0±1	1.0
				36	24	21.88	21.0±1	1.0
				36	49	21.04	21.0±1	1.0
75				0	20.24	21.0±1	1.0	
21375	2562.5	QPSK	1	0	20.22	22.0±1	/	
			1	49	20.22	22.0±1	/	
			1	99	20.82	22.0±1	/	
			36	0	20.81	21.0±1	1.0	
			36	24	20.96	21.0±1	1.0	
			36	49	20.82	21.0±1	1.0	
			75	0	20.84	21.0±1	1.0	
		16QAM	1	0	20.52	21.0±1	1.0	
			1	49	21.65	21.0±1	1.0	
			1	99	21.63	21.0±1	1.0	
			36	0	21.57	21.0±1	1.0	
			36	24	20.24	21.0±1	1.0	
			36	49	20.11	21.0±1	1.0	
			75	0	20.05	21.0±1	1.0	



BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)		
20MHz	20850	2510	QPSK	1	0	21.86	22.0±1	/		
				1	49	21.86	22.0±1	/		
				1	99	21.84	22.0±1	/		
				50	0	20.22	21.0±1	1.0		
				50	24	20.13	21.0±1	1.0		
				50	49	20.13	21.0±1	1.0		
			16QAM	100	0	20.62	21.0±1	1.0		
				1	0	20.58	21.0±1	1.0		
				1	49	20.49	22.0±1	1.0		
				1	99	20.93	21.0±1	1.0		
				50	0	20.86	21.0±1	1.0		
				50	24	20.79	21.0±1	1.0		
	21100	2535	QPSK	50	49	21.92	21.0±1	1.0		
				100	0	21.99	21.0±1	1.0		
				1	0	22.09	22.0±1	/		
				1	49	22.09	22.0±1	/		
				1	99	21.29	22.0±1	/		
				50	0	20.29	21.0±1	1.0		
			16QAM	50	24	21.90	21.0±1	1.0		
				50	49	21.03	21.0±1	1.0		
				100	0	21.08	21.0±1	1.0		
				1	0	20.91	21.0±1	1.0		
				1	49	20.99	21.0±1	1.0		
				1	99	20.78	21.0±1	1.0		
			21350	2560	QPSK	50	0	21.93	21.0±1	1.0
						50	24	21.89	21.0±1	1.0
						50	49	22.07	21.0±1	1.0
						100	0	20.08	21.0±1	1.0
						1	0	21.32	22.0±1	/
						1	49	21.15	22.0±1	/
16QAM	1	99			21.64	22.0±1	/			
	50	0			20.49	21.0±1	1.0			
	50	24			20.73	21.0±1	1.0			
	50	49			20.75	21.0±1	1.0			
	100	0			20.88	21.0±1	1.0			
	1	0			20.79	21.0±1	1.0			
				1	49	21.86	21.0±1	1.0		
				1	99	21.86	21.0±1	1.0		
				50	0	21.84	21.0±1	1.0		
				50	24	20.22	21.0±1	1.0		
				50	49	20.13	21.0±1	1.0		
				100	0	20.13	21.0±1	1.0		

**LTE Band 38:**

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	37775	2572.5	QPSK	1	0	21.98	22.0±1	/
				1	49	22.09	22.0±1	/
				1	99	22.04	22.0±1	/
				12	0	20.60	21.0±1	1.0
				12	24	20.62	21.0±1	1.0
				12	49	20.54	21.0±1	1.0
			16QAM	25	0	21.18	21.0±1	1.0
				1	0	21.35	21.0±1	1.0
				1	49	21.36	21.0±1	1.0
				1	99	20.91	21.0±1	1.0
				12	0	20.93	21.0±1	1.0
				12	24	20.25	21.0±1	1.0
	38000	2595	QPSK	12	49	21.28	21.0±1	1.0
				25	0	21.26	21.0±1	1.0
				1	0	22.19	22.0±1	/
				1	49	21.07	22.0±1	/
				1	99	21.03	22.0±1	/
				12	0	20.93	21.0±1	1.0
			16QAM	12	24	21.25	21.0±1	1.0
				12	49	21.53	21.0±1	1.0
				25	0	21.34	21.0±1	1.0
				1	0	20.64	21.0±1	1.0
				1	49	20.64	21.0±1	1.0
				1	99	20.46	21.0±1	1.0
38225	2617.5	QPSK	12	0	21.56	21.0±1	1.0	
			12	24	21.68	21.0±1	1.0	
			12	49	21.76	21.0±1	1.0	
			25	0	21.18	21.0±1	1.0	
			1	0	21.20	22.0±1	/	
			1	49	21.06	22.0±1	/	
		16QAM	1	99	21.80	22.0±1	/	
			12	0	21.27	21.0±1	1.0	
			12	24	21.95	21.0±1	1.0	
			12	49	20.75	21.0±1	1.0	
			25	0	20.74	21.0±1	1.0	
			1	0	20.83	21.0±1	1.0	
16QAM	1	49	21.98	21.0±1	1.0			
	1	99	21.09	21.0±1	1.0			
	12	0	21.04	21.0±1	1.0			
	12	24	20.60	21.0±1	1.0			
	12	49	20.62	21.0±1	1.0			
	25	0	20.54	21.0±1	1.0			

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	37800	2575	QPSK	1	0	21.85	22.0±1	/
				1	49	22.09	22.0±1	/
				1	99	22.18	22.0±1	/
				25	0	20.35	21.0±1	1.0
				25	24	20.66	21.0±1	1.0
				25	49	20.53	21.0±1	1.0
			16QAM	50	0	20.85	21.0±1	1.0
				1	0	20.96	21.0±1	1.0
				1	49	21.18	21.0±1	1.0
				1	99	20.09	21.0±1	1.0
				25	0	20.28	21.0±1	1.0
				25	24	20.20	21.0±1	1.0
	38000	2595	QPSK	25	49	21.43	21.0±1	1.0
				50	0	21.46	21.0±1	1.0
				1	0	22.52	22.0±1	/
				1	49	21.88	22.0±1	/
				1	99	21.91	22.0±1	/
				25	0	20.84	21.0±1	1.0
			16QAM	25	24	21.89	21.0±1	1.0
				25	49	21.23	21.0±1	1.0
				25	0	21.14	21.0±1	1.0
				50	0	21.14	21.0±1	1.0
				1	0	20.59	21.0±1	1.0
				1	49	20.49	21.0±1	1.0
38200	2615	QPSK	1	99	20.50	21.0±1	1.0	
			25	0	21.39	21.0±1	1.0	
			25	24	21.45	21.0±1	1.0	
			25	49	21.72	21.0±1	1.0	
			50	0	20.97	21.0±1	1.0	
			1	0	21.04	22.0±1	/	
		16QAM	1	49	21.95	22.0±1	/	
			1	99	21.27	22.0±1	/	
			25	0	21.61	21.0±1	1.0	
			25	24	21.74	21.0±1	1.0	
			25	49	20.61	21.0±1	1.0	
			50	0	20.80	21.0±1	1.0	
16QAM	1	0	20.60	21.0±1	1.0			
	1	49	21.85	21.0±1	1.0			
	1	99	21.09	21.0±1	1.0			
	25	0	21.18	21.0±1	1.0			
	25	24	20.35	21.0±1	1.0			
	25	49	20.66	21.0±1	1.0			
				50	0	20.53	21.0±1	1.0



BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	37825	2577.5	QPSK	1	0	21.87	22.0±1	/
				1	49	22.12	22.0±1	/
				1	99	22.37	22.0±1	/
				36	0	20.53	21.0±1	1.0
				36	24	20.81	21.0±1	1.0
				36	49	20.60	21.0±1	1.0
				75	0	21.00	21.0±1	1.0
			16QAM	1	0	21.19	21.0±1	1.0
				1	49	21.43	21.0±1	1.0
				1	99	20.10	21.0±1	1.0
				36	0	20.32	21.0±1	1.0
				36	24	20.45	21.0±1	1.0
				36	49	21.50	21.0±1	1.0
				75	0	21.51	21.0±1	1.0
	38000	2595	QPSK	1	0	22.35	22.0±1	/
				1	49	21.86	22.0±1	/
				1	99	21.94	22.0±1	/
				36	0	20.84	21.0±1	1.0
				36	24	21.85	21.0±1	1.0
				36	49	21.03	21.0±1	1.0
				75	0	21.22	21.0±1	1.0
			16QAM	1	0	20.55	21.0±1	1.0
				1	49	20.62	21.0±1	1.0
				1	99	20.51	21.0±1	1.0
				36	0	21.29	21.0±1	1.0
				36	24	21.42	21.0±1	1.0
				36	49	21.57	21.0±1	1.0
				75	0	20.90	21.0±1	1.0
38175	2612.5	QPSK	1	0	21.92	22.0±1	/	
			1	49	21.94	22.0±1	/	
			1	99	21.43	22.0±1	/	
			36	0	21.50	21.0±1	1.0	
			36	24	21.63	21.0±1	1.0	
			36	49	20.45	21.0±1	1.0	
			75	0	20.56	21.0±1	1.0	
		16QAM	1	0	21.87	21.0±1	1.0	
			1	49	21.12	21.0±1	1.0	
			1	99	21.37	21.0±1	1.0	
			36	0	20.53	21.0±1	1.0	
			36	24	20.81	21.0±1	1.0	
			36	49	20.60	21.0±1	1.0	
			75	0	20.61	21.0±1	1.0	

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	37850	2580	QPSK	1	0	21.79	22.0±1	/
				1	49	22.12	22.0±1	/
				1	99	22.34	22.0±1	/
				50	0	20.61	21.0±1	1.0
				50	24	20.95	21.0±1	1.0
				50	49	20.72	21.0±1	1.0
			16QAM	100	0	21.01	21.0±1	1.0
				1	0	21.28	21.0±1	1.0
				1	49	21.82	22.0±1	1.0
				1	99	20.41	21.0±1	1.0
				50	0	20.64	21.0±1	1.0
				50	24	20.39	21.0±1	1.0
	38000	2595	QPSK	50	49	22.43	21.0±1	1.0
				100	0	22.55	21.0±1	1.0
				1	0	22.52	22.0±1	/
				1	49	22.76	22.0±1	/
				1	99	21.98	22.0±1	/
				50	0	21.03	21.0±1	1.0
			16QAM	50	24	21.97	21.0±1	1.0
				50	49	21.17	21.0±1	1.0
				100	0	21.03	21.0±1	1.0
				1	0	20.55	21.0±1	1.0
				1	49	20.64	21.0±1	1.0
				1	99	20.56	21.0±1	1.0
	38150	2610	QPSK	50	0	21.49	21.0±1	1.0
				50	24	21.55	21.0±1	1.0
				50	49	21.75	21.0±1	1.0
100				0	20.91	21.0±1	1.0	
1				0	21.15	22.0±1	/	
1				49	21.96	22.0±1	/	
16QAM			1	99	21.59	22.0±1	/	
			50	0	21.45	21.0±1	1.0	
			50	24	21.83	21.0±1	1.0	
			50	49	20.59	21.0±1	1.0	
			100	0	20.73	21.0±1	1.0	
			1	0	20.60	21.0±1	1.0	
16QAM	1	49	21.79	21.0±1	1.0			
	1	99	21.12	21.0±1	1.0			
	50	0	21.34	21.0±1	1.0			
	50	24	20.61	21.0±1	1.0			
	50	49	20.95	21.0±1	1.0			
	100	0	20.72	21.0±1	1.0			

**LTE Band 40a:**

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	38725	2307.5	QPSK	1	0	20.11	20.0±1	/
				1	49	20.25	20.0±1	/
				1	99	20.30	20.0±1	/
				12	0	19.45	19.0±1	1.0
				12	24	19.52	19.0±1	1.0
				12	49	19.47	19.0±1	1.0
				25	0	19.34	19.0±1	1.0
			16QAM	1	0	19.46	19.0±1	1.0
				1	49	19.02	19.0±1	1.0
				1	99	18.39	19.0±1	1.0
				12	0	18.35	19.0±1	1.0
				12	24	18.64	19.0±1	1.0
				12	49	19.21	19.0±1	1.0
				25	0	19.17	19.0±1	1.0
	38750	2310	QPSK	1	0	20.40	20.0±1	/
				1	49	19.49	20.0±1	/
				1	99	19.64	20.0±1	/
				12	0	19.58	19.0±1	1.0
				12	24	19.03	19.0±1	1.0
				12	49	19.14	19.0±1	1.0
				25	0	19.96	19.0±1	1.0
			16QAM	1	0	18.30	19.0±1	1.0
				1	49	18.33	19.0±1	1.0
				1	99	18.46	19.0±1	1.0
				12	0	19.37	19.0±1	1.0
				12	24	19.47	19.0±1	1.0
				12	49	19.43	19.0±1	1.0
25				0	19.59	19.0±1	1.0	
38775	2312.5	QPSK	1	0	19.57	20.0±1	/	
			1	49	19.69	20.0±1	/	
			1	99	19.50	20.0±1	/	
			12	0	19.94	19.0±1	1.0	
			12	24	19.00	19.0±1	1.0	
			12	49	18.53	19.0±1	1.0	
			25	0	18.46	19.0±1	1.0	
		16QAM	1	0	18.52	19.0±1	1.0	
			1	49	19.11	19.0±1	1.0	
			1	99	19.25	19.0±1	1.0	
			12	0	19.30	19.0±1	1.0	
			12	24	19.45	19.0±1	1.0	
			12	49	19.52	19.0±1	1.0	
			25	0	19.47	19.0±1	1.0	



BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	38750	2310	QPSK	1	0	20.37	20.0±1	/
				1	49	20.43	20.0±1	/
				1	99	20.57	20.0±1	/
				25	0	19.55	19.0±1	1.0
				25	24	19.66	19.0±1	1.0
				25	49	19.49	19.0±1	1.0
				50	0	19.55	19.0±1	1.0
			16QAM	1	0	19.76	19.0±1	1.0
				1	49	19.69	19.0±1	1.0
				1	99	18.54	19.0±1	1.0
				25	0	18.52	19.0±1	1.0
				25	24	18.74	19.0±1	1.0
				25	49	19.37	19.0±1	1.0
				50	0	19.43	19.0±1	1.0

**LTE Band 41:**

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	40265	2557.5	QPSK	1	0	22.45	23.0±1	/
				1	49	22.53	23.0±1	/
				1	99	22.39	23.0±1	/
				12	0	21.02	22.0±1	1.0
				12	24	21.98	22.0±1	1.0
				12	49	21.91	22.0±1	1.0
				25	0	21.69	22.0±1	1.0
			16QAM	1	0	21.85	22.0±1	1.0
				1	49	21.65	22.0±1	1.0
				1	99	21.31	22.0±1	1.0
				12	0	21.43	22.0±1	1.0
				12	24	21.54	22.0±1	1.0
				12	49	22.54	22.0±1	1.0
				25	0	22.52	22.0±1	1.0
	40740	2605	QPSK	1	0	22.56	23.0±1	/
				1	49	22.17	23.0±1	/
				1	99	22.13	23.0±1	/
				12	0	21.16	22.0±1	1.0
				12	24	21.63	22.0±1	1.0
				12	49	21.74	22.0±1	1.0
				25	0	21.56	22.0±1	1.0
			16QAM	1	0	21.87	22.0±1	1.0
				1	49	21.85	22.0±1	1.0
				1	99	21.67	22.0±1	1.0
				12	0	23.24	22.0±1	1.0
				12	24	23.22	22.0±1	1.0
				12	49	23.33	22.0±1	1.0
25				0	21.76	22.0±1	1.0	
41215	2652.5	QPSK	1	0	22.63	23.0±1	/	
			1	49	22.70	23.0±1	/	
			1	99	22.75	23.0±1	/	
			12	0	22.80	22.0±1	1.0	
			12	24	22.35	22.0±1	1.0	
			12	49	21.28	22.0±1	1.0	
			25	0	21.26	22.0±1	1.0	
		16QAM	1	0	21.26	22.0±1	1.0	
			1	49	22.45	22.0±1	1.0	
			1	99	22.53	22.0±1	1.0	
			12	0	22.39	22.0±1	1.0	
			12	24	21.02	22.0±1	1.0	
			12	49	21.98	22.0±1	1.0	
			25	0	21.91	22.0±1	1.0	

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	40290	2560	QPSK	1	0	22.46	23.0±1	/
				1	49	22.36	23.0±1	/
				1	99	22.42	23.0±1	/
				25	0	21.77	22.0±1	1.0
				25	24	21.70	22.0±1	1.0
				25	49	21.74	22.0±1	1.0
			16QAM	50	0	21.90	22.0±1	1.0
				1	0	22.23	22.0±1	1.0
				1	49	22.15	22.0±1	1.0
				1	99	21.43	22.0±1	1.0
				25	0	21.35	22.0±1	1.0
				25	24	21.38	22.0±1	1.0
	40740	2605	QPSK	25	49	21.65	22.0±1	1.0
				50	0	22.67	22.0±1	1.0
				1	0	22.68	23.0±1	/
				1	49	22.06	23.0±1	/
				1	99	22.18	23.0±1	/
				25	0	21.09	22.0±1	1.0
			16QAM	25	24	21.58	22.0±1	1.0
				25	49	21.88	22.0±1	1.0
				50	0	22.06	22.0±1	1.0
				1	0	21.70	22.0±1	1.0
				1	49	21.78	22.0±1	1.0
				1	99	21.59	22.0±1	1.0
41190	2650	QPSK	25	0	22.10	22.0±1	1.0	
			25	24	22.14	22.0±1	1.0	
			25	49	22.11	22.0±1	1.0	
			50	0	21.52	22.0±1	1.0	
			1	0	22.51	23.0±1	/	
			1	49	22.51	23.0±1	/	
		16QAM	1	99	22.00	23.0±1	/	
			25	0	22.14	22.0±1	1.0	
			25	24	22.17	22.0±1	1.0	
			25	49	21.09	22.0±1	1.0	
			50	0	21.07	22.0±1	1.0	
			1	0	21.17	22.0±1	1.0	
				1	49	22.46	22.0±1	1.0
				1	99	22.36	22.0±1	1.0
				25	0	22.42	22.0±1	1.0
				25	24	21.77	22.0±1	1.0
				25	49	21.70	22.0±1	1.0
				50	0	21.74	22.0±1	1.0
				50	0	21.74	22.0±1	1.0



BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	40315	2562.5	QPSK	1	0	22.59	23.0±1	/
				1	49	22.50	23.0±1	/
				1	99	22.46	23.0±1	/
				36	0	21.80	22.0±1	1.0
				36	24	21.81	22.0±1	1.0
				36	49	21.84	22.0±1	1.0
				75	0	21.34	22.0±1	1.0
			16QAM	1	0	21.31	22.0±1	1.0
				1	49	21.19	22.0±1	1.0
				1	99	21.26	22.0±1	1.0
				36	0	21.26	22.0±1	1.0
				36	24	21.43	22.0±1	1.0
				36	49	22.81	22.0±1	1.0
				75	0	22.70	22.0±1	1.0
	40740	2605	QPSK	1	0	22.76	23.0±1	/
				1	49	22.16	23.0±1	/
				1	99	22.13	23.0±1	/
				36	0	21.15	22.0±1	1.0
				36	24	22.12	22.0±1	1.0
				36	49	22.29	22.0±1	1.0
				75	0	22.09	22.0±1	1.0
			16QAM	1	0	21.82	22.0±1	1.0
				1	49	21.79	22.0±1	1.0
				1	99	21.82	22.0±1	1.0
				36	0	22.90	22.0±1	1.0
				36	24	22.92	22.0±1	1.0
				36	49	22.93	22.0±1	1.0
75				0	21.53	22.0±1	1.0	
41165	2647.5	QPSK	1	0	22.58	23.0±1	/	
			1	49	22.52	23.0±1	/	
			1	99	22.07	23.0±1	/	
			36	0	22.06	22.0±1	1.0	
			36	24	22.07	22.0±1	1.0	
			36	49	21.95	22.0±1	1.0	
			75	0	21.09	22.0±1	1.0	
		16QAM	1	0	21.16	22.0±1	1.0	
			1	49	22.59	22.0±1	1.0	
			1	99	22.50	22.0±1	1.0	
			36	0	22.46	22.0±1	1.0	
			36	24	21.80	22.0±1	1.0	
			36	49	21.81	22.0±1	1.0	
			75	0	21.84	22.0±1	1.0	

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	40340	2565	QPSK	1	0	22.37	23.0±1	/
				1	49	23.22	23.0±1	/
				1	99	22.48	23.0±1	/
				50	0	21.96	22.0±1	1.0
				50	24	21.92	22.0±1	1.0
				50	49	21.02	22.0±1	1.0
			16QAM	100	0	21.50	22.0±1	1.0
				1	0	21.84	22.0±1	1.0
				1	49	22.00	22.0±1	1.0
				1	99	21.66	22.0±1	1.0
				50	0	21.80	22.0±1	1.0
				50	24	21.54	22.0±1	1.0
	40740	2605	QPSK	50	49	22.97	22.0±1	1.0
				100	0	22.87	22.0±1	1.0
				1	0	23.00	23.0±1	/
				1	49	23.33	23.0±1	/
				1	99	22.23	23.0±1	/
				50	0	21.18	22.0±1	1.0
			16QAM	50	24	22.38	22.0±1	1.0
				50	49	21.38	22.0±1	1.0
				100	0	21.43	22.0±1	1.0
				1	0	21.82	22.0±1	1.0
				1	49	21.89	22.0±1	1.0
				1	99	21.78	22.0±1	1.0
41140	2645	QPSK	50	0	22.21	22.0±1	1.0	
			50	24	22.12	22.0±1	1.0	
			50	49	21.26	22.0±1	1.0	
			100	0	21.30	22.0±1	1.0	
			1	0	22.66	23.0±1	/	
			1	49	22.59	23.0±1	/	
		16QAM	1	99	22.21	23.0±1	/	
			50	0	22.07	22.0±1	1.0	
			50	24	22.12	22.0±1	1.0	
			50	49	21.26	22.0±1	1.0	
			100	0	21.30	22.0±1	1.0	
			1	0	21.22	22.0±1	1.0	
				1	49	22.37	22.0±1	1.0
				1	99	22.22	22.0±1	1.0
				50	0	22.48	22.0±1	1.0
				50	24	21.96	22.0±1	1.0
				50	49	21.92	22.0±1	1.0
				100	0	21.02	22.0±1	1.0

**WIFI Mode (2.4G)**

Mode	Channel number	Frequency (MHz)	Data rate(Mbps)	Average Output Power(dBm)	Average Tune up limited(dBm)
802.11b	1	2412	1	14.841	14.0±1
	6	2437	1	14.712	14.0±1
	11	2462	1	14.391	14.0±1
802.11g	1	2412	6	13.44	13.0±1
	6	2437	6	13.544	13.0±1
	11	2462	6	13.721	13.0±1
802.11n(HT20)	1	2412	MCS0	13.413	13.0±1
	6	2437	MCS0	13.594	13.0±1
	11	2462	MCS0	13.629	13.0±1
802.11n(HT40)	3	2422	MCS0	12.742	13.0±1
	6	2437	MCS0	12.971	13.0±1
	9	2452	MCS0	13.013	13.0±1

**Bluetooth Measurement Result**

Mode	Frequency (MHz)	Average Output Power(dBm)	Tune up limited(dBm)
GFSK	2402	3.277	4.0±1
	2441	3.101	4.0±1
	2480	3.037	4.0±1
π/4DQPSK	2402	4.128	4.0±1
	2441	3.829	4.0±1
	2480	3.785	4.0±1
8DPSK	2402	4.396	4.0±1
	2441	4.159	4.0±1
	2480	3.664	4.0±1

**BLE Measurement Result (1M)**

Channel number	Frequency (MHz)	Average Output Power(dBm)	Tune up limited(dBm)
0	2402	-0.955	-1.0±1
19	2440	-1.106	-2.0±1
39	2480	-0.731	-1.0±1



## 12 Exposure Conditions Consideration

EUT antenna location:



Note:

1. Per KDB 447498 D01 General RF Exposure Guidance v06, Transmitters that are built-in within a wrist watch or similar wrist-worn devices typically operate in speaker mode for voice communication, with the device worn on the wrist and positioned next to the mouth. Next to the mouth exposure required 1-g SAR and the wrist-worn condition required 10-g extremity SAR.

### 13 RF Exposure

**Standard Requirement:**

Referring to RSS-102-issue5, SAR Test Exclusion Threshold for 2450MHz is 4mW, when the test separation is  $\leq 5$ mm, the maximum tune up power of 2.4G WIFI is 15dBm=31.62mW, the maximum tune up power of BT is 5dBm=3.16mW, so SAR for 2.4G WIFI is required and BT is not required.



## 14 SAR Test Results

### 14.1 Test Condition:

1. SAR Measurement  
The distance between the EUT and the antenna of the emulator is more than 50 cm and the output power radiated from the emulator antenna is at least 30 dB less than the output power of EUT.
2. Environmental Conditions
 

Temperature	23°C
Relative Humidity	57%
Atmospheric Pressure	1019mbar
3. Tested By : Andy Feng

### 14.2 Generally Test Procedures:

1. Establish communication link between EUT and base station emulation by air link.
2. Place the EUT in the selected test position. (Cheek, tilt or flat)
3. Perform SAR testing at middle or highest output power channel under the selected test mode. If the measured 1-g SAR is  $\leq 0.8$  W/kg, then testing for the other channel will not be performed.
4. When SAR is  $< 0.8$  W/kg, no repeated SAR measurement is required

#### For WCDMA test:

1. KDB941225 D01-Body SAR is not required for HSDPA when the average output of each RF channel with HSDPA active is less than 0.25dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC  $< 75\%$  of the SAR limit.
2. KDB941225 D01-Body SAR is not required for handset with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 0.25dB higher than that measure without HSUPA/HSDPA using 12.2kbps RMC AND THE maximum SAR for 12.2kbps RMC is  $< 75\%$  of the SAR limit

#### For LTE test:

1. According to FCC KDB 941225 D05v02r05:
  - a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
    - i. The required channel and offset combination with the highest maximum output power is required for SAR.
    - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
    - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
  - b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
  - c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg.
  - d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to  $\frac{1}{2}$  dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.
  - e. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).



**14.3 SAR Summary Test Result:**
**SAR Values of EGSM 850MHz Band**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg for front of face)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaling Factor	Scaled SAR 1g(W/kg)
--	Voice call	Front of face Distance: 10mm	High	33	32.43	0.018	1.14025	0.02

**Extremity SAR Values of EGSM 850MHz Band**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		Limbs SAR 10g(W/Kg), Limit(4.0W/kg for Wrist-worn)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 10g(W/kg)	Scaling Factor	Scaled SAR 10g(W/kg)
1	GPRS 2 slots	Wrist-worn Distance: 0mm	High	31	30.29	0.475	1.177606	0.56

**SAR Values of DCS 1900MHz Band**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg for front of face)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaling Factor	Scaled SAR 1g(W/kg)
--	Voice call	Front of face Distance: 10mm	Low	30	29.79	0.022	1.0495	0.02

**Extremity SAR Values of DCS 1900MHz Band**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		Limbs SAR 10g(W/Kg), Limit(4.0W/kg for Wrist-worn)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 10g(W/kg)	Scaling Factor	Scaled SAR 10g(W/kg)
2	GPRS 3 slots	Wrist-worn Distance: 0mm	Low	27	26.33	0.401	1.16681	0.47

**SAR Values of WCDMA BAND V**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg for front of face)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaling Factor	Scaled SAR 1g(W/kg)
--	RMC 12.2kbps	Front of face Distance: 10mm	High	23	22.84	0.152	1.037528	0.16

**Extremity SAR Values of WCDMA BAND V**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		Limbs SAR 10g(W/Kg), Limit(4.0W/kg for Wrist-worn)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 10g(W/kg)	Scaling Factor	Scaled SAR 10g(W/kg)
3	RMC 12.2kbps	Wrist-worn Distance: 0mm	High	23	22.84	0.407	1.037528	0.42

**SAR Values of WCDMA BAND II**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg for front of face)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaling Factor	Scaled SAR 1g(W/kg)
--	RMC 12.2kbps	Front of face Distance: 10mm	Low	23	22.68	0.404	1.076465	0.43

**Extremity SAR Values of WCDMA BAND II**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		Limbs SAR 10g(W/Kg), Limit(4.0W/kg for Wrist-worn)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 10g(W/kg)	Scaling Factor	Scaled SAR 10g(W/kg)
4	Voice call	Wrist-worn Distance: 0mm	Low	23	22.68	0.706	1.076465	0.76

**SAR Values of LTE BAND 2, 20MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg for front of face)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaling Factor	Scaled SAR 1g(W/kg)
--	1RB #49	Front of face Distance: 10mm	Mid	24	23.39	0.152	1.1508	0.17
--	50%RB #24	Front of face Distance: 10mm	Mid	22	21.98	0.134	1.004616	0.13

**Extremity SAR Values of LTE BAND 2, 20MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		Limbs SAR 10g(W/Kg), Limit(4.0W/kg for Wrist-worn)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 10g(W/kg)	Scaling Factor	Scaled SAR 10g(W/kg)
5	1RB #49	Wrist-worn Distance: 0mm	Mid	24	23.39	0.808	1.1508	0.93
--	50%RB #24	Wrist-worn Distance: 0mm	Mid	22	21.98	0.741	1.004616	0.74



**SAR Values of LTE BAND 5, 10MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg for front of face)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaling Factor	Scaled SAR 1g(W/kg)
--	1RB #49	Front of face Distance: 10mm	Mid	24	23.39	0.202	1.1508	0.23
--	50%RB #24	Front of face Distance: 10mm	Mid	22	21.97	0.156	1.006932	0.16

**Extremity SAR Values of LTE BAND 5, 10MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		Limbs SAR 10g(W/Kg), Limit(4.0W/kg for Wrist-worn)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 10g(W/kg)	Scaling Factor	Scaled SAR 10g(W/kg)
6	1RB #49	Wrist-worn Distance: 0mm	Mid	24	23.39	0.441	1.1508	0.51
--	50%RB #24	Wrist-worn Distance: 0mm	Mid	22	21.97	0.399	1.006932	0.40

**SAR Values of LTE BAND 7, 20MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg for front of face)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaling Factor	Scaled SAR 1g(W/kg)
--	1RB #49	Front of face Distance: 10mm	Mid	23	22.09	0.263	1.233105	0.32
--	50%RB #24	Front of face Distance: 10mm	Mid	22	21.90	0.251	1.023293	0.26

**Extremity SAR Values of LTE BAND 7, 20MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		Limbs SAR 10g(W/Kg), Limit(4.0W/kg for Wrist-worn)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 10g(W/kg)	Scaling Factor	Scaled SAR 10g(W/kg)
7	1RB #49	Wrist-worn Distance: 0mm	Mid	23	22.09	0.893	1.233105	1.10
--	50%RB #24	Wrist-worn Distance: 0mm	Mid	22	21.90	0.789	1.023293	0.81

**SAR Values of LTE BAND 38, 20MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg for front of face)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaling Factor	Scaled SAR 1g(W/kg)
--	1RB #49	Front of face Distance: 10mm	Mid	23	22.76	0.111	1.056818	0.12
--	50%RB #24	Front of face Distance: 10mm	Mid	22	21.97	0.102	1.006932	0.10

**Extremity SAR Values of LTE BAND 38, 20MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		Limbs SAR 10g(W/Kg), Limit(4.0W/kg for Wrist-worn)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 10g(W/kg)	Scaling Factor	Scaled SAR 10g(W/kg)
8	1RB #49	Wrist-worn Distance: 0mm	Mid	23	22.76	0.285	1.056818	0.30
--	50%RB #24	Wrist-worn Distance: 0mm	Mid	22	21.97	0.230	1.006932	0.23

**SAR Values of LTE BAND 40a, 10MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg for front of face)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaling Factor	Scaled SAR 1g(W/kg)
--	1RB #49	Front of face Distance: 10mm	Mid	21	20.57	0.210	1.104079	0.23
--	50%RB #24	Front of face Distance: 10mm	Mid	20	19.66	0.156	1.081434	0.17

**Extremity SAR Values of LTE BAND 40a, 10MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		Limbs SAR 10g(W/Kg), Limit(4.0W/kg for Wrist-worn)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 10g(W/kg)	Scaling Factor	Scaled SAR 10g(W/kg)
9	1RB #49	Wrist-worn Distance: 0mm	Mid	21	20.57	0.550	1.104079	0.61
--	50%RB #24	Wrist-worn Distance: 0mm	Mid	20	19.66	0.454	1.081434	0.49

**SAR Values of LTE BAND 41, 20MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg for front of face)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaling Factor	Scaled SAR 1g(W/kg)
--	1RB #49	Front of face Distance: 10mm	Mid	24	23.33	0.056	1.16681	0.07
--	50%RB #24	Front of face Distance: 10mm	Mid	23	22.38	0.052	1.153453	0.06

**Extremity SAR Values of LTE BAND 41, 20MHz ,QPSK**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		Limbs SAR 10g(W/Kg), Limit(4.0W/kg for Wrist-worn)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 10g(W/kg)	Scaling Factor	Scaled SAR 10g(W/kg)
10	1RB #49	Wrist-worn Distance: 0mm	Mid	24	23.33	0.296	1.16681	0.35
--	50%RB #24	Wrist-worn Distance: 0mm	Mid	23	22.38	0.288	1.153453	0.33

**SAR Values of 2.4G WIFI**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg for front of face)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaling Factor	Scaled SAR 1g(W/kg)
--	DSSS	Front of face Distance: 10mm	Low	15	14.841	0.041	1.03729	0.04
--	DSSS	Front of face Distance: 10mm	Low	15	14.841	0.036	1.03729	0.04

**Extremity SAR Values of 2.4G WIFI**

Test Plot	Test Mode	Test Positions	Channel	Power(dBm)		Limbs SAR 10g(W/Kg), Limit(4.0W/kg for Wrist-worn)		
				Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 10g(W/kg)	Scaling Factor	Scaled SAR 10g(W/kg)
10	DSSS	Wrist-worn Distance: 0mm	Low	15	14.841	0.287	1.03729	0.30
--	DSSS	Wrist-worn Distance: 0mm	Low	15	14.841	0.270	1.03729	0.28



- Note:**1. KDB941225 D01-Body SAR is not required for HSDPA when the average output of each RF channel with HSDPA active is less than 0.25dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC<75% of the SAR limit.
2. KDB941225 D01-Body SAR is not required for handset with HSUPA/HSDPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 0.25dB higher than that measure without HSUPA/HSDPA using 12.2kbps RMC and The maximum SAR for 12.2kbps RMC is<75% of the SAR limit

#### 14.4 Measurement variability consideration

Refer to FCC KDB 248227 section 5.2.1~5.2.2:

##### 802.11b DSSS SAR Test Requirements:

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure.

SAR test reduction is determined according to the following:

1) When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is  $\leq 0.8$  W/kg,

no further SAR testing is required for 802.11b DSSS in that exposure configuration.

2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg,

SAR is required for the third channel; i.e., all channels require testing.

##### 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3).

SAR is not required for the following 2.4 GHz OFDM conditions.

1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.

2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

Note: 802.11b DSSS SAR test is required. The highest reported SAR for DSSS\* the ratio of OFDM to DSSS(Max output power) is  $0.287 \times 0.773 = 0.2219$  W/Kg  $< 1.2$  W/Kg, so the OFDM SAR test is not required.

**According to KDB 865664 D01v01r04 section 2.8.1, repeated measurements are required following the procedures as below:**

Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.

When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.

Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).

Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

#### No Repeated SAR

#### 14.5 Simultaneous Transmission SAR Analysis.

##### List of Mode for Simultaneous Multi-band Transmission:

No.	Configurations	Front of face SAR	Wrist-worn SAR
1	GSM(Voice) + WLAN 2.4GHz(Data)	Yes	--
2	GPRS (Data) + WLAN 2.4GHz(Data)	--	Yes
3	GSM(Voice) + Bluetooth(Data)	Yes	--
4	GPRS (Data) + Bluetooth(Data)	--	Yes
6	WCDMA (Data) + WLAN 2.4GHz(Data)	Yes	Yes
8	WCDMA (Data) + Bluetooth(Data)	Yes	Yes
9	LTE (Date) + WLAN 2.4GHz(Data)	Yes	Yes
10	LTE (Date) + Bluetooth(Data)	Yes	Yes

##### Remark:

- GSM/ WCDMA/LTE share the same antenna, and cannot transmit simultaneously.
- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[ $\sqrt{f(\text{GHz})/x}$ ]  
W/kg for test separation distances  $\leq 50$  mm;

where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 v06 as below:

##### BT:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	X	SAR(1g) 10mm
5	3.16	10	2.402	7.5	0.07
Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	X	SAR(10g) 5mm
5	3.16	5	2.402	18.75	0.05

- The maximum SAR summation is calculated based on the same configuration and test position



**Front of face SAR Simultaneous  
WWAN and 2.4G WIFI**

Position	WWAN (maximum)		2.4G WIFI	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GSM850	0.02	0.04	0.06
Front	PCS1900	0.02	0.04	0.06
Front	WCDMA Band II	0.42	0.04	0.46
Front	WCDMA Band V	0.16	0.04	0.20
Front	LTE BAND 2(1RB)	0.17	0.04	0.21
Front	LTE BAND 5(1RB)	0.23	0.04	0.27
Front	LTE BAND 7(1RB)	0.32	0.04	0.36
Front	LTE BAND 38(1RB)	0.12	0.04	0.16
Front	LTE BAND 40a(1RB)	0.23	0.04	0.27
Front	LTE BAND 41(1RB)	0.07	0.04	0.11

**WWAN and BT**

Position	WWAN (maximum)		BT	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GSM850	0.02	0.07	0.09
Front	PCS1900	0.02	0.07	0.09
Front	WCDMA Band II	0.42	0.07	0.49
Front	WCDMA Band V	0.16	0.07	0.23
Front	LTE BAND 2(1RB)	0.17	0.07	0.24
Front	LTE BAND 5(1RB)	0.23	0.07	0.30
Front	LTE BAND 7(1RB)	0.32	0.07	0.39
Front	LTE BAND 38(1RB)	0.12	0.07	0.19
Front	LTE BAND 40a(1RB)	0.23	0.07	0.30
Front	LTE BAND 41(1RB)	0.07	0.07	0.14

**Remark:** BT and WIFI the 1g SAR value is not being captured by the measurement system, the 1g-SAR value is conservatively used for simultaneous transmission analysis.

**Wrist-worn SAR Simultaneous  
WWAN and 2.4G WIFI**

Position	WWAN (maximum)		2.4G WIFI	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.56	0.30	0.86
Back	PCS1900	0.47	0.30	0.77
Back	WCDMA Band II	0.76	0.30	1.06
Back	WCDMA Band V	0.42	0.30	0.72
Back	LTE BAND 2(1RB)	0.93	0.30	1.23
Back	LTE BAND 5(1RB)	0.51	0.30	0.81
Back	LTE BAND 7(1RB)	1.10	0.30	1.40
Back	LTE BAND 38(1RB)	0.30	0.30	0.60
Back	LTE BAND 40a(1RB)	0.61	0.30	0.91
Back	LTE BAND 41(1RB)	0.35	0.30	0.65

**WWAN and BT**

Position	WWAN (maximum)		BT	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.56	0.05	0.61
Back	PCS1900	0.47	0.05	0.52
Back	WCDMA Band II	0.76	0.05	0.81
Back	WCDMA Band V	0.42	0.05	0.47
Back	LTE BAND 2(1RB)	0.93	0.05	0.98
Back	LTE BAND 5(1RB)	0.51	0.05	0.56
Back	LTE BAND 7(1RB)	1.10	0.05	1.15
Back	LTE BAND 38(1RB)	0.30	0.05	0.35
Back	LTE BAND 40a(1RB)	0.61	0.05	0.66
Back	LTE BAND 41(1RB)	0.35	0.05	0.40

**Remark:** BT and WIFI the 1g SAR value is not being captured by the measurement system, the 1g-SAR value is conservatively used for simultaneous transmission analysis.

**15 SAR Measurement Reference****References**

1. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
2. IEEE Std. C95.1-2005, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz”, 2005
3. IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, June 2013
4. IEC 62209-2, “Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices—Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate(SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30MHz to 6GHz)”, April 2010
5. FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 23<sup>th</sup>, 2015
6. FCC KDB 941225 D01 v03r01, “3G SAR Measurement Procedures”, Oct 23<sup>th</sup>, 2015
7. FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 16<sup>th</sup>, 2015
8. FCC KDB 941225 D06 v02r01, “SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities”, Oct 23<sup>th</sup>, 2015
9. FCC KDB865664 D01 v01r04, “SAR Measurement Requirements 100MHz to 6GHz”, Aug 7<sup>th</sup>, 2015
10. FCC KDB865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations ”, Oct 23<sup>th</sup>, 2015
11. FCC KDB648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 23<sup>th</sup>, 2015



**16 Maximum SAR measurement Plots**

**Plot 1**

DUT: DUT Sample; Type: Sample; Serial: Not Specified

Communication System: UID 0, Generic GSM (0); Communication System Band: GPRS 850 (824.0 -849.0 MHz); Frequency: 848.8 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104  
 Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.899$  S/m;  $\epsilon_r = 41.325$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 848.8 MHz; Calibrated: 2023/7/14  
 Modulation Compensation: Not calibrated  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 2; Type: QD000P40CD; Serial: TP:xxxx  
 DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA231106002X smartwatch/Back/Area Scan (61x81x1): Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.08 W/kg

KA231106002X smartwatch/Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 30.05 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.475 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 0.994 W/kg

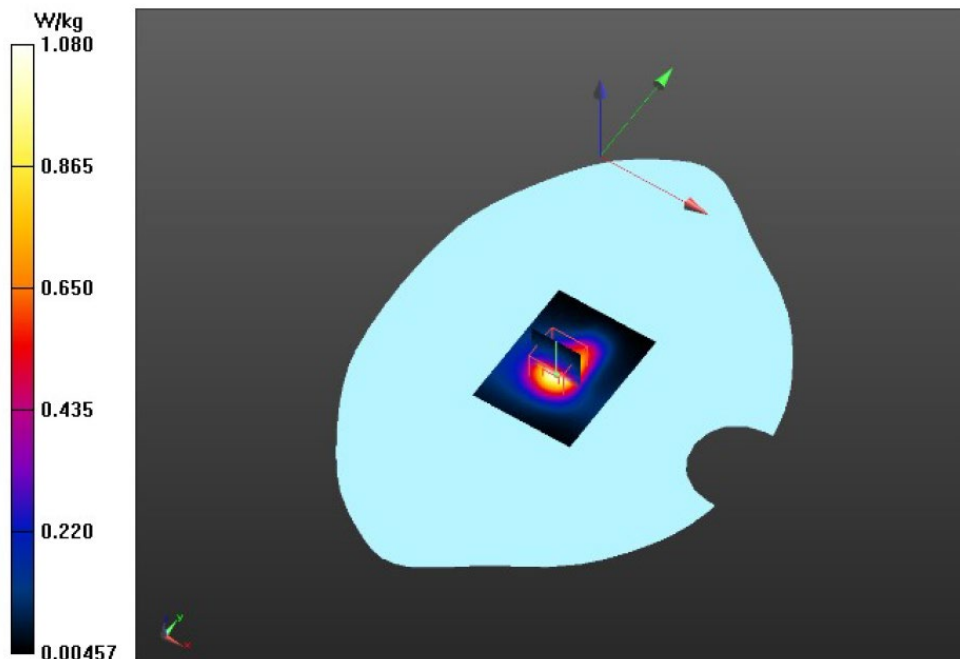

**Plot 2**

DUT: DUT Sample; Type: Sample; Serial: Not Specified


Communication System: UID 0, Generic GSM (0); Communication System Band: GPRS 1900 (1850.0 -1910 MHz); Frequency: 1850.2 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104  
 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 39.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1850.2 MHz; Calibrated: 2023/7/14  
 Modulation Compensation: Not calibrated  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx  
 DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA231106002X smartwatch/Back/Area Scan (61x81x1): Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm  
 Maximum value of SAR (interpolated) = 1.14 W/kg

KA231106002X smartwatch/Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
 Reference Value = 25.48 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 1.80 W/kg  
 SAR(1 g) = 0.840 W/kg; SAR(10 g) = 0.401 W/kg  
 Smallest distance from peaks to all points 3 dB below = 10 mm  
 Ratio of SAR at M2 to SAR at M1 = 54.5%  
 Maximum value of SAR (measured) = 0.934 W/kg

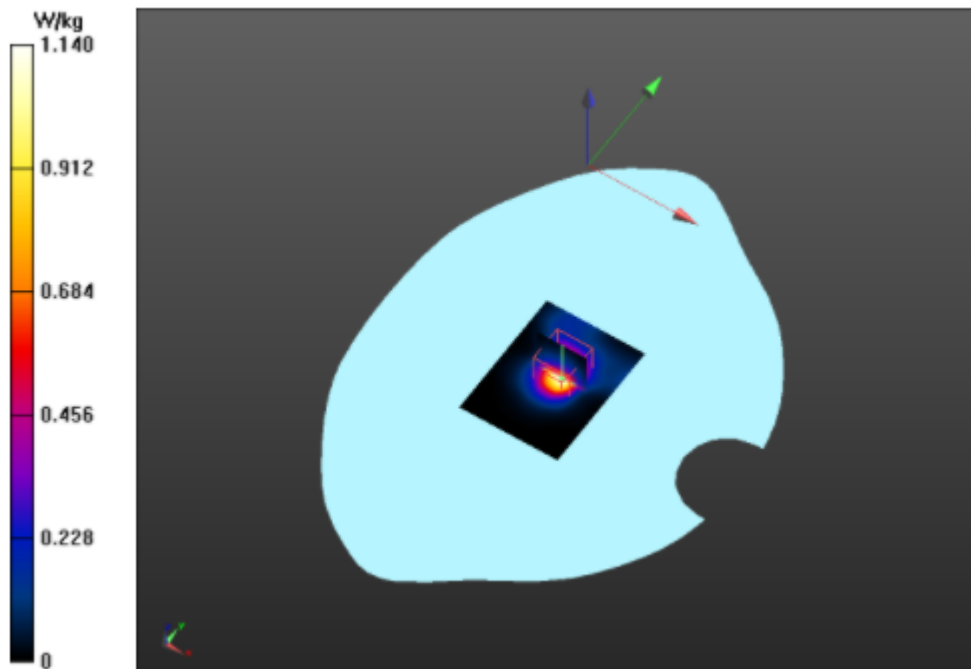

**Plot 3**

DUT: DUT Sample; Type: Sample; Serial: Not Specified


Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA BAND5 RMC;  
 Frequency: 836.4 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005  
 Medium parameters used:  $f = 836.41$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 41.48$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 836.4 MHz; Calibrated: 2023/7/14  
 Modulation Compensation:  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 2; Type: QD000P40CD; Serial: TP:xxxx  
 DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA231106002X smartwatch/Back/Area Scan (61x81x1): Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm  
 Maximum value of SAR (interpolated) = 0.873 W/kg

KA231106002X smartwatch/Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
 Reference Value = 27.80 V/m; Power Drift = 0.00 dB  
 Peak SAR (extrapolated) = 1.63 W/kg  
 SAR(1 g) = 0.766 W/kg; SAR(10 g) = 0.407 W/kg  
 Smallest distance from peaks to all points 3 dB below = 12 mm  
 Ratio of SAR at M2 to SAR at M1 = 54.1%  
 Maximum value of SAR (measured) = 0.827 W/kg

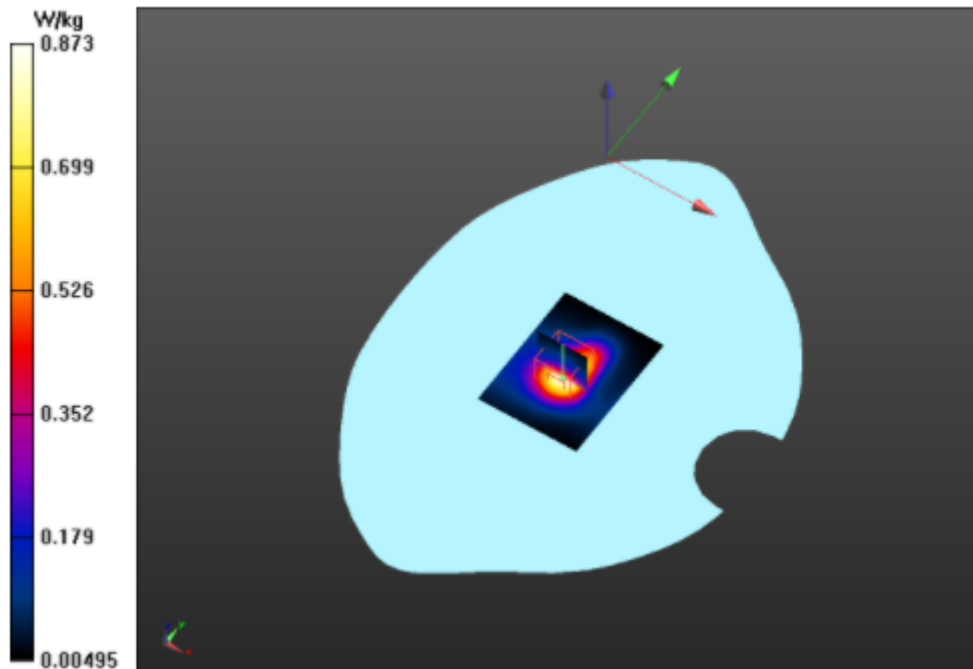



**Plot 4**

DUT: DUT Sample; Type: Sample; Serial: Not Specified


Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA BAND2 RMC;  
 Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 39.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1880 MHz; Calibrate  
 d: 2023/7/14  
 Modulation Compensation:  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx  
 DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA231106002X smartwatch/Back/Area Scan (61x81x1): Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm  
 Maximum value of SAR (interpolated) = 1.95 W/kg

KA231106002X smartwatch/Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
 Reference Value = 32.50 V/m; Power Drift = 0.17 dB  
 Peak SAR (extrapolated) = 2.77 W/kg  
 SAR(1 g) = 1.42 W/kg; SAR(10 g) = 0.706 W/kg  
 Smallest distance from peaks to all points 3 dB below = 9.8 mm  
 Ratio of SAR at M2 to SAR at M1 = 57.5%  
 Maximum value of SAR (measured) = 1.60 W/kg

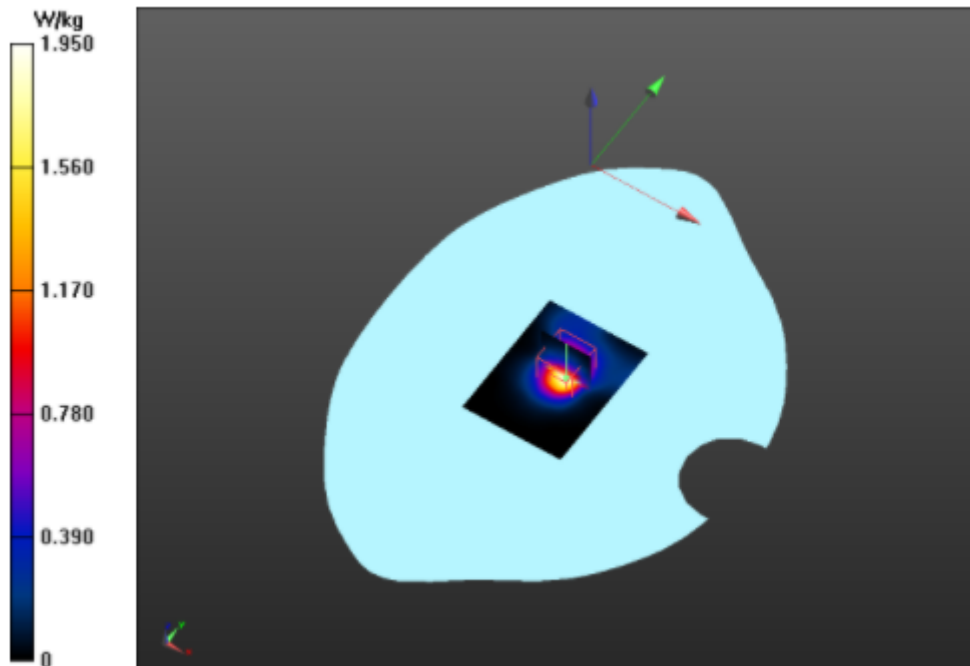

**Plot 5**

DUT: DUT Sample; Type: Sample; Serial: Not Specified

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1860 MHz; Communication System PAR: 0 dB; PMF: 1  
 Medium parameters used (interpolated):  $f = 1860$  MHz;  $\sigma = 1.43$  S/m;  $\epsilon_r = 39.827$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1860 MHz; Calibrated: 2023/7/14  
 Modulation Compensation:  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx  
 DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)


KA231106002X smartwatch/Back/Area Scan (61x81x1): Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 2.35 W/kg

KA231106002X smartwatch/Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 35.84 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 3.25 W/kg  
 SAR(1 g) = 1.65 W/kg; SAR(10 g) = 0.808 W/kg  
 Smallest distance from peaks to all points 3 dB below = 9.2 mm  
 Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 1.86 W/kg

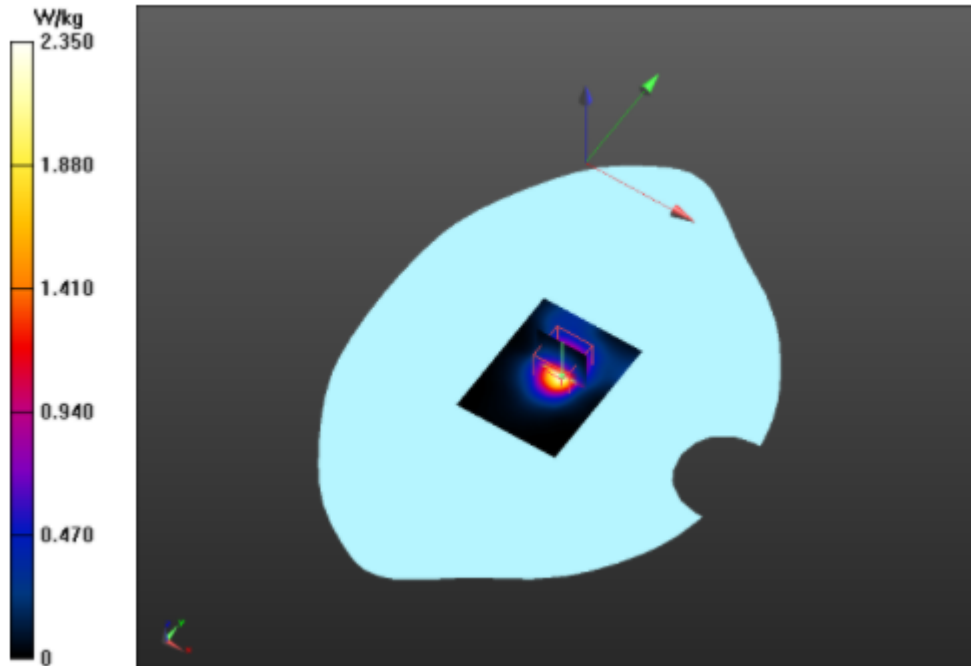

**Plot 6**

DUT: DUT Sample; Type: Sample; Serial: Not Specified

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 844 MHz; Communication System PAR: 0 dB; PMF: 1  
 Medium parameters used (interpolated):  $f = 844$  MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 41.385$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 844 MHz; Calibrated: 2023/7/14  
 Modulation Compensation:  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 2; Type: QD000P40CD; Serial: TP:xxxx  
 DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)


KA231106002X smartwatch/Back/Area Scan (61x81x1): Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.977 W/kg

KA231106002X smartwatch/Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 28.88 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 1.74 W/kg  
 SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.441 W/kg  
 Smallest distance from peaks to all points 3 dB below = 12.6 mm  
 Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 0.890 W/kg

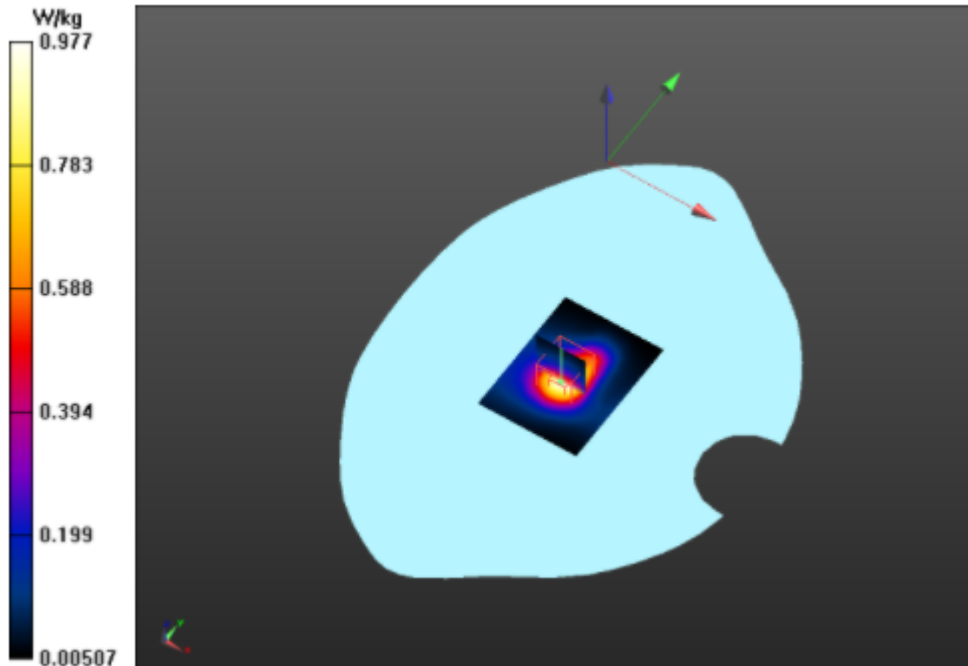



**Plot 7**

DUT: DUT Sample; Type: Sample; Serial: Not Specified

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2535 MHz; Communication System PAR: 0 dB; PMF: 1  
 Medium parameters used (interpolated):  $f = 2535$  MHz;  $\sigma = 1.921$  S/m;  $\epsilon_r = 38.97$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.7, 4.7, 4.7) @ 2535 MHz; Calibrated: 2023/7/14  
 Modulation Compensation:  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx  
 DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)


KA231106002X smartwatch/Back/Area Scan (61x81x1): Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 2.93 W/kg

KA231106002X smartwatch/Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 25.46 V/m; Power Drift = 0.64 dB  
 Peak SAR (extrapolated) = 5.89 W/kg  
 SAR(1 g) = 2.38 W/kg; SAR(10 g) = 0.893 W/kg  
 Smallest distance from peaks to all points 3 dB below = 5.8 mm  
 Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 2.83 W/kg

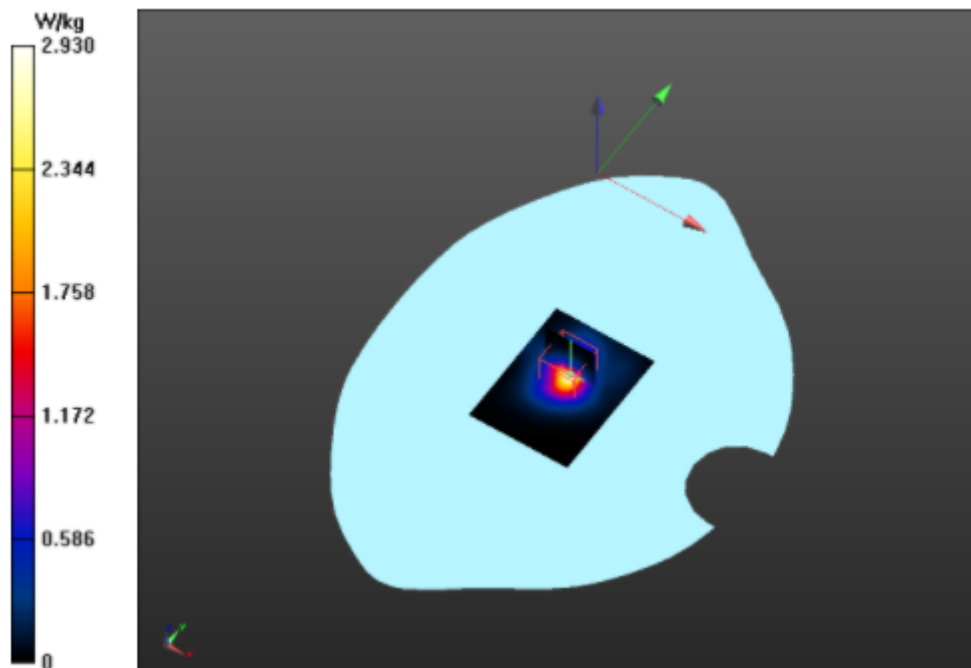

**Plot 8**

DUT: DUT Sample; Type: Sample; Serial: Not Specified

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz); Frequency: 2610 MHz; Communication System PAR: 0 dB; PMF: 1  
 Medium parameters used (interpolated):  $f = 2610$  MHz;  $\sigma = 2.024$  S/m;  $\epsilon_r = 38.531$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:


Probe: ES3DV3 - SN3089; ConvF(4.57, 4.57, 4.57) @ 2610 MHz; Calibrated: 2023/7/14  
 Modulation Compensation:  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx  
 DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA231106002X smartwatch/Back/Area Scan (61x81x1): Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.01 W/kg

KA231106002X smartwatch/Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm  
 Reference Value = 15.66 V/m; Power Drift = 0.00 dB  
 Peak SAR (extrapolated) = 2.12 W/kg  
 SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.285 W/kg  
 Smallest distance from peaks to all points 3 dB below = 5.8 mm  
 Ratio of SAR at M2 to SAR at M1 = 44.1%

Maximum value of SAR (measured) = 0.971 W/kg

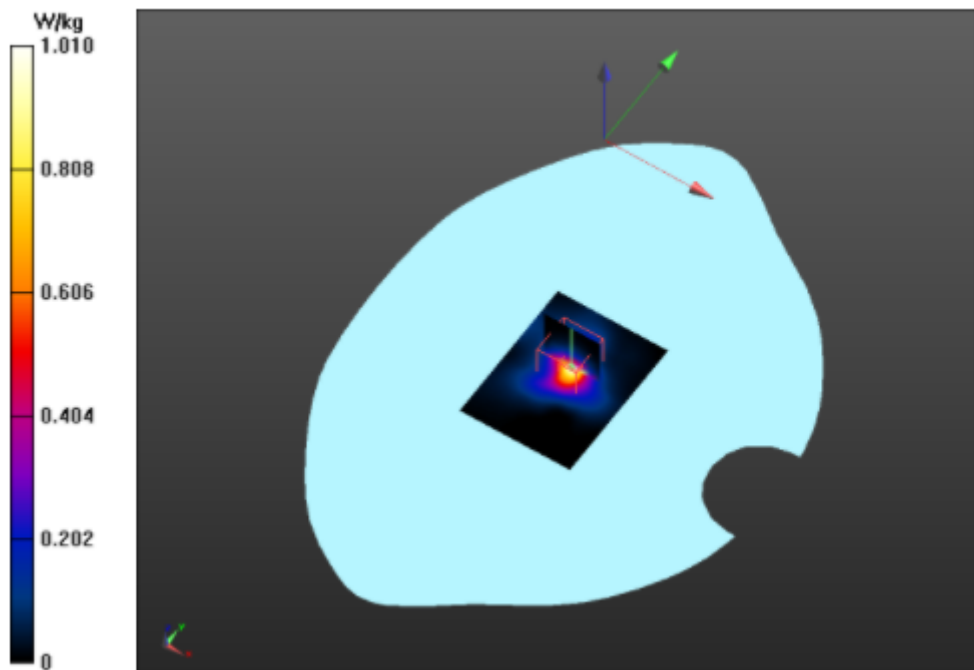

**Plot 9**

DUT: DUT Sample; Type: Sample; Serial: Not Specified

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 40a, E-UTRA/TDD (2300.0 - 2340.0 MHz); Frequency: 2310 MHz; Communication System PAR: 0 dB; PMF: 1  
 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.82$  S/m;  $\epsilon_r = 38.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.87, 4.87, 4.87) @ 2310 MHz; Calibrated: 2023/7/14  
 Modulation Compensation:  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx  
 DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)


KA231106002X smartwatch/Back/Area Scan (61x81x1): Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.60 W/kg

KA231106002X smartwatch/Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 18.40 V/m; Power Drift = 0.15 dB  
 Peak SAR (extrapolated) = 2.88 W/kg  
 SAR(1 g) = 1.32 W/kg; SAR(10 g) = 0.550 W/kg  
 Smallest distance from peaks to all points 3 dB below = 6.7 mm  
 Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 1.45 W/kg

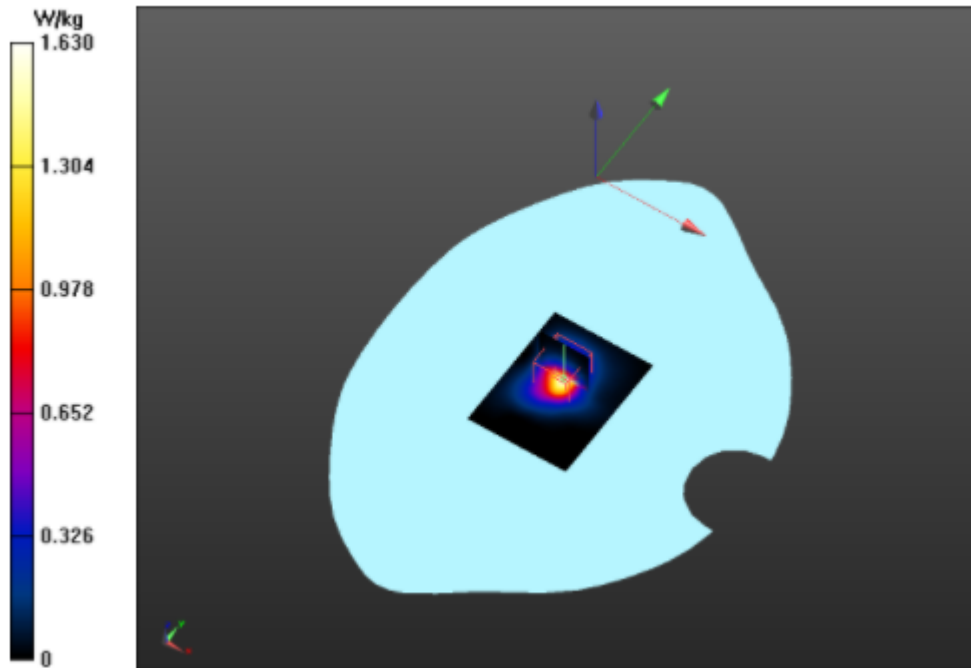



### Plot 10

DUT: DUT Sample; Type: Sample; Serial: Not Specified

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 41, E-UTRA/TDD (2555.0 - 2655.0 MHz); Frequency: 2645 MHz; Communication System PAR: 0 dB; PMF: 1  
Medium parameters used (interpolated):  $f = 2645$  MHz;  $\sigma = 2.064$  S/m;  $\epsilon_r = 38.407$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.57, 4.57, 4.57) @ 2645 MHz; Calibrated: 2023/7/14  
Modulation Compensation:  
Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx  
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA231106002X smartwatch/Back/Area Scan (61x81x1): Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.03 W/kg

KA231106002X smartwatch/Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 14.07 V/m; Power Drift = 0.43 dB


Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 0.830 W/kg; SAR(10 g) = 0.296 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 0.993 W/kg

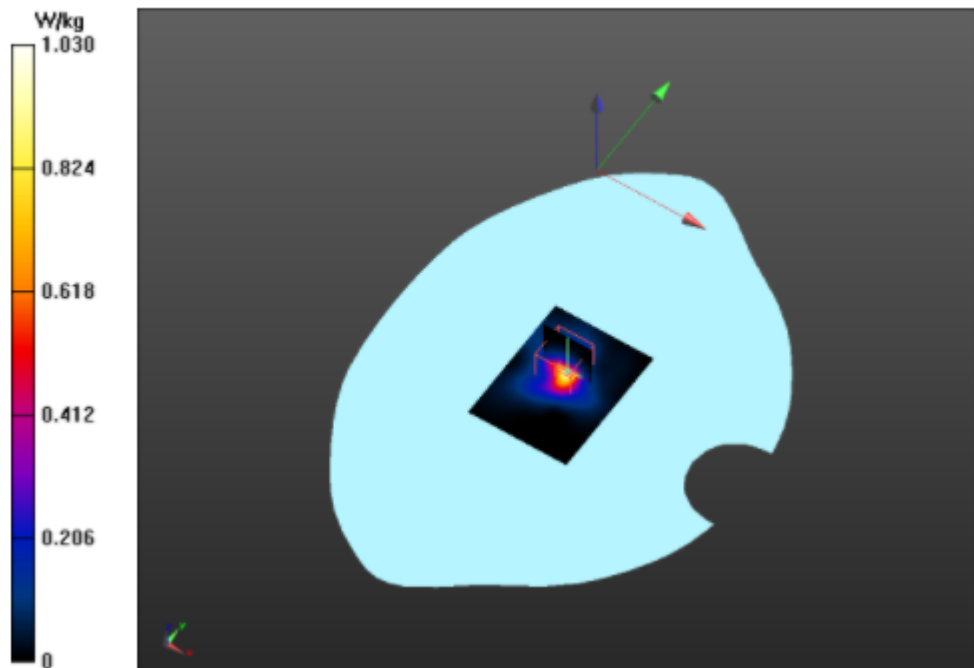

**Plot 11**

DUT: DUT Sample; Type: Sample; Serial: Not Specified  
 Communication System: UID 0, 2.4G WIFI (0); Communication System Band: 2.4G WIFI 11B; Frequency: 2412 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005  
 Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.838$  S/m;  $\epsilon_r = 38.149$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)  
 DASY Configuration:  
 Probe: ES3DV3 - SN3089; ConvF(4.7, 4.7, 4.7) @ 2412 MHz; Calibrated: 2023/7/14  
 Modulation Compensation:  
 Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.0, 32.0$   
 Electronics: DAE4 Sn881; Calibrated: 2023/7/14  
 Phantom: SAM 1; Type: QD000P40CD; Serial: TP:xxxx  
 DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA231106002X smartwatch/Back/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.00 W/kg

KA231106002X smartwatch/Back/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.07 V/m; Power Drift = 0.28 dB


Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.287 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 45.9%

Maximum value of SAR (measured) = 0.972 W/kg

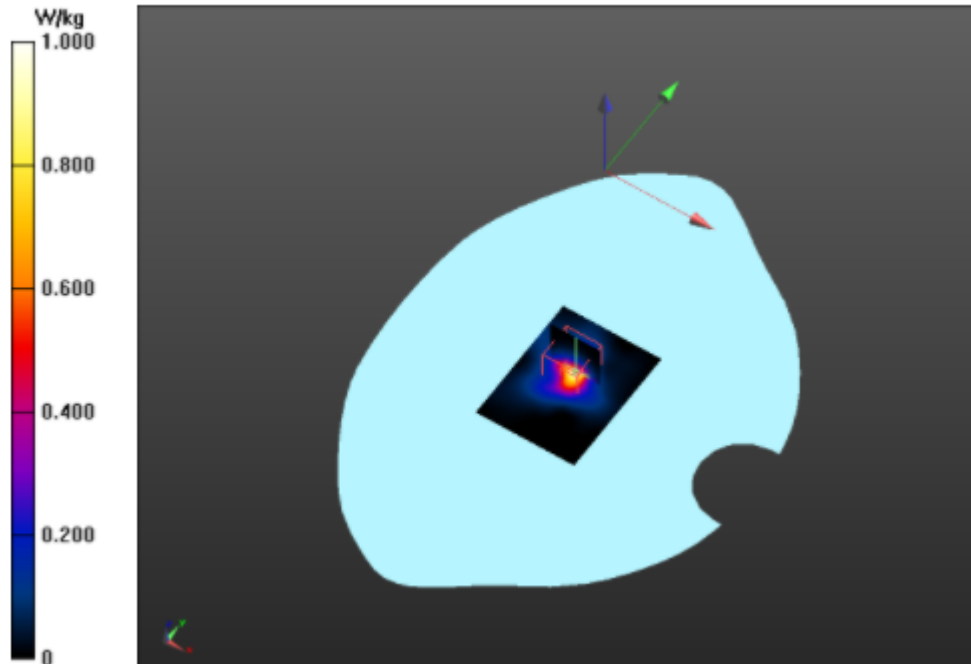


## 17 Calibration Reports-Probe and Dipole

The Probe, Dipole and DAE calibration please refer to the Attachment.



**18 SAR System Photos**

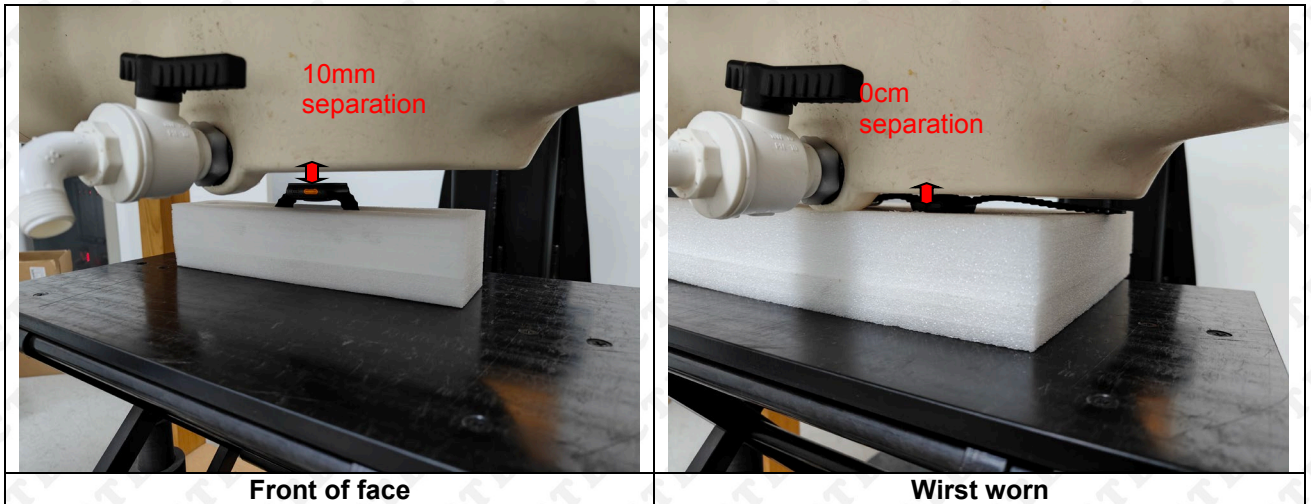**19 Setup Photo**



**20 EUT Photos**  
**Front Side**



**Back Side**



====End of report====