

# TEST REPORT

**FCC ID: 2AKSAMOVIC-F**

**Product: Mobile phone**

**Model No.: F4001**

**Additional Model No.: F4002, F4003, F4004, F4005, F4501, F4502, F4503, F4504, F4505, F5001, F5002, F5003, F5004, F5005, F5501, F5502, F5503, F5504, F5505, F6001, F6002, F6003, F6004, F6005**

**Trade Mark: MOVIC**

**Report No.: TCT170705E063**

**Issued Date: July 12, 2017**

Issued for:

**Shenzhen YLWD Technology co., LTD**

**RM1002.A.Haisong BLD.RDTairan.FuTian District Shenzhen, China**

Issued By:

**Shenzhen Tongce Testing Lab.**

**1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China**

**TEL: +86-755-27673339**

**FAX: +86-755-27673332**

**Note:** This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

**TABLE OF CONTENTS**

1. Test Certification..... 3

2. Test Result Summary..... 4

3. EUT Description..... 5

4. Genera Information..... 7

    4.1. Test environment and mode..... 7

    4.2. Test Mode..... 9

    4.3. Description of Support Units..... 10

    4.4. Configuration of Tested System..... 11

    4.5. Measurement Results Explanation Example..... 11

5. Facilities and Accreditations..... 12

    5.1. Facilities..... 12

    5.2. Location..... 12

    5.3. Measurement Uncertainty..... 12

6. Test Results and Measurement Data..... 13

    6.1. Conducted Output Power Measurement..... 13

    6.2. Peak to Average Ratio..... 15

    6.3. 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 21

    6.4. Band Edge and Conducted Spurious Emission Measurement..... 27

    6.5. Effective Radiated Power and Effective Isotropic Radiated Power  
    Measurement..... 36

    6.6. Field Strength of Spurious Radiation Measurement..... 43

    6.7. Frequency Stability Measurement..... 51

**Appendix A: Photographs of Test Setup**

**Appendix B: Photographs of EUT**

**1. Test Certification**

<b>Product:</b>	Mobile phone
<b>Model No.:</b>	F4001
<b>Additional Model:</b>	F4002, F4003, F4004, F4005, F4501, F4502, F4503, F4504, F4505, F5001, F5002, F5003, F5004, F5005, F5501, F5502, F5503, F5504, F5505, F6001, F6002, F6003, F6004, F6005
<b>Trade Mark:</b>	<b>MOVIC</b>
<b>Applicant:</b>	Shenzhen YLWD Technology co., LTD
<b>Address:</b>	RM1002.A.Haisong BLD.RDTairan.FuTian District Shenzhen, China
<b>Manufacturer:</b>	Shenzhen YLWD Technology co., LTD
<b>Address:</b>	RM1002.A.Haisong BLD.RDTairan.FuTian District Shenzhen, China
<b>Date of Test:</b>	July 05, 2017 – July 11, 2017
<b>Applicable Standards:</b>	FCC CFR Title 47 Part 2 FCC CFR Title 47 Part22 FCC CFR Title 47 Part24

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



Brews Xu

Date:

July 11, 2017

Reviewed By:



Joe Zhou

Date:

July 12, 2017

Approved By:



Tomsin

Date:

July 12, 2017

## 2. Test Result Summary

Requirement	CFR 47 Section	Result
Conducted Output Power	§22.913; §2.1046 §24.232;	PASS
Peak-to-Average Ratio	§2.1046; §24.232(d)	PASS
Effective Radiated Power	§2.1046; §22.913(a) §24.232;	PASS
Equivalent Isotropic Radiated Power	§2.1046; §22.913(a) §24.232;	PASS
Occupied Bandwidth	§2.1049	PASS
Band Edge	§2.1051 §22.917(a) §24.238(a)	PASS
Conducted Spurious Emission	§2.1051; §22.917 §24.238;	PASS
Field Strength of Spurious Radiation	§2.1053; §22.917(a) §24.238;	PASS
Frequency Stability for Temperature & Voltage	§2.1055; §22.355 §24.235;	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 3. EUT Description

<b>Product:</b>	Mobile phone
<b>Model No.:</b>	F4001
<b>Additional Model:</b>	F4002, F4003, F4004, F4005, F4501, F4502, F4503, F4504, F4505, F5001, F5002, F5003, F5004, F5005, F5501, F5502, F5503, F5504, F5505, F6001, F6002, F6003, F6004, F6005
<b>Trade Mark:</b>	<b>MOVIC</b>
<b>3G Version:</b>	WCDMA:R99 HSDPA: Release 5 HSUPA: Release 6
<b>Tx Frequency:</b>	GSM/GPRS 850: 824.2 MHz ~ 848.8 MHz GSM/GPRS 1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
<b>Rx Frequency:</b>	GSM/GPRS 850: 869.2 MHz ~ 893.8 MHz GSM/GPRS 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
<b>Maximum Output Power to Antenna:</b>	GSM850: 32.60dBm GSM1900: 29.70dBm GPRS 850: 32.19dBm GPRS 1900: 29.29dBm WCDMA Band V: 23.27dBm WCDMA Band II: 22.75dBm
<b>99% Occupied Bandwidth:</b>	GSM850: 245KGXM GSM1900: 249KGXM GPRS850 Class 8: 245KGXW GPRS1900 Class 8: 249KGXW WCDMA Band V RMC 12.2Kbps: 4M21F9W WCDMA Band II RMC 12.2Kbps: 4M21F9W
<b>Type of Modulation:</b>	GSM/GPRS: GMSK WCDMA/HSDPA/HSUPA: QPSK
<b>Antenna Type:</b>	Internal Antenna
<b>Antenna Gain:</b>	GSM/GPRS 850: -1.2dBi GSM/GPRS 1900: 1.62dBi WCDMA Band V: -0.98dBi WCDMA Band II: 1.34dBi
<b>Power Supply:</b>	Rechargeable Li-ion Battery DC3.7V/2000mAh
<b>AC adapter:</b>	Adapter Information: Input: AC100-240V, 50/60Hz, 0.2A Output: 5.0V, 1000mA

**Remark:**

All models above are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement.

## 4. General Information

### 4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in communication with CMU200 and select channel with modulation
Remark: This product has a built-in rechargeable battery, so in an independent test, the EUT battery was fully-charged.	
The sample was placed (0.8m below 1GHz, 0.8m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

**Description Operation Frequency**

GSM 850		PCS1900	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....	....	....	....
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...	...	...	...
250	848.60	809	1909.60
251	848.80	810	1909.80

WCDMA Band V		WCDMA Band II	
Channel:	Frequency (MHz)	Channel:	Frequency (MHz)
4132	826.40	9262	1852.40
4133	826.60	9263	1852.60
....	....	....	....
4182	836.40	9399	1879.80
4183	836.60	9400	1880.00
4184	836.80	9401	1880.20
...	...	...	...
4233	846.60	9538	1907.60



## 4.2. Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power. Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 20000 MHz for PCS1900, WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
GSM 850	GSM Link GPRS class 12 Link	GSM Link GPRS class 12 Link
PCS 1900	GSM Link GPRS class 12 Link	GSM Link GPRS class 12 Link
WCDMA Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link
WCDM Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link

**Note:** The maximum power levels are chosen to test as the worst case configuration as follows:  
 GPRS multi-slot class 8 mode for GMSK modulation, EDGE multi-slot class 8 mode for 8PSK modulation.  
 RMC 12.2Kbps mode for WCDMA band V and WCDMA band II, only these modes were used for all tests. In addition to above worst-case test, below investigating on all data rates and all modes are compliance with each FCC test case which has specific test limits. For spurious emissions at antenna port, the EUT was investigated the band edges on low and high channels, and the unwanted spurious emissions on middle channel for all modes, the results are PASS, then only the worst-results were reported in the test report. The Radiated Spurious emissions for GPRS and EDGE modes were investigated on the middle channel and the PASS results were not worst than those data tested from the highest power channels.

### 4.3. Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4. Configuration of Tested System

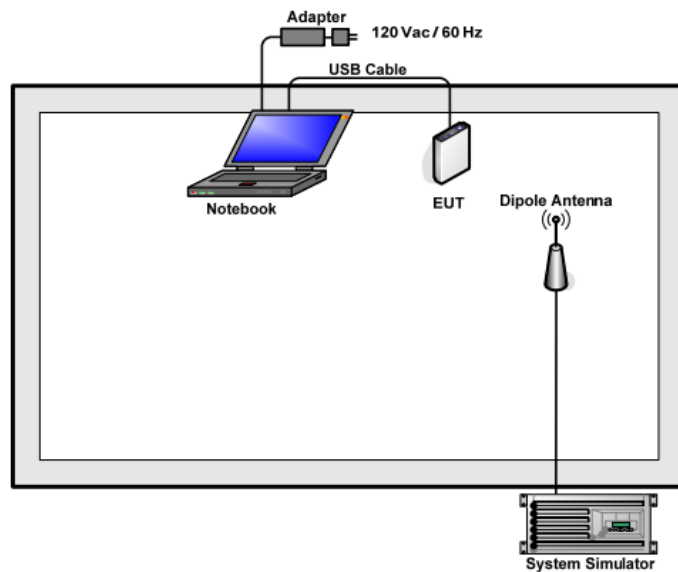

#### 4.5. Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor.  
*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 3 dB and a 5dB attenuator.

Example: *Offset (dB) = RF cable loss (dB) + attenuator factor (dB).*  
*= 8(dB)*

## 5. Facilities and Accreditations

### 5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

### 5.2. Location

Shenzhen Tongce Testing Lab

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China

TEL: +86-755-27673339

### 5.3. Measurement Uncertainty


The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

## 6. Test Results and Measurement Data

### 6.1. Conducted Output Power Measurement

#### 6.1.1. Test Specification
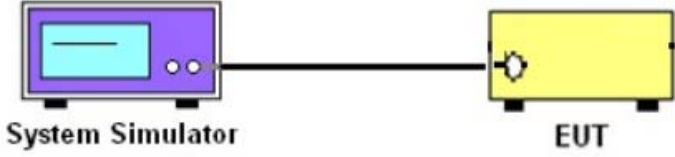
<b>Test Requirement:</b>	FCC part 22.913(a) and FCC part 24.232(b) FCC part 27.50(d);
<b>Test Method:</b>	FCC part 2.1046
<b>Operation mode:</b>	Refer to item 4.1
<b>Limits:</b>	GSM 850 7W PCS 1900 2W WCDMA Band V: 7W WCDMA Band II: 2W
<b>Test Setup:</b>	 <p>The diagram illustrates the test setup. On the left is a purple box labeled 'System Simulator' with a screen and two buttons. A black cable connects it to a yellow box on the right labeled 'EUT' (Equipment Under Test).</p>
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The transmitter output port was connected to the system simulator.</li> <li>2. Set EUT at maximum power through system simulator.</li> <li>3. Select lowest, middle, and highest channels for each band and different modulation.</li> <li>4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.</li> </ol>
<b>Test Result:</b>	PASS

#### 6.1.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Oct. 13, 2017
RF cable (9kHz-40GHz)	TCT	RE-05	N/A	Oct. 13, 2017
Antenna Connector	TCT	RFC-02	N/A	Oct. 13, 2017

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


**6.1.3. Test data**

**Conducted Power Measurement Results:**

Average Conducted Power (*Unit: dBm)						
Band	GSM850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM	32.56	32.60	32.58	29.66	29.70	29.68
GPRS class8	32.12	32.19	32.15	29.22	29.29	29.25
GPRS class10	31.34	31.40	31.37	28.44	28.50	28.47
GPRS class11	30.44	30.50	30.37	27.54	27.60	27.47
GPRS class12	29.53	29.63	29.59	26.43	26.53	26.49
Average Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
WCDMA RMC 12.2K	23.16	23.27	23.24	22.64	22.75	22.72
HSDPA Subtest-1	22.70	22.83	22.75	22.18	22.31	22.23
HSDPA Subtest-2	22.40	22.52	22.47	21.88	22.00	21.95
HSDPA Subtest-3	22.34	22.47	22.41	21.82	21.95	21.89
HSDPA Subtest-4	22.28	22.45	22.40	21.76	21.93	21.88
HSUPA Subtest-1	22.04	22.17	22.07	21.52	21.65	21.55
HSUPA Subtest-2	21.94	22.07	21.99	21.42	21.55	21.47
HSUPA Subtest-3	21.89	21.70	21.67	21.37	21.18	21.15
HSUPA Subtest-4	21.50	21.64	21.55	20.98	21.12	21.03
HSUPA Subtest-5	21.41	21.48	21.46	20.89	20.96	20.94

## 6.2. Peak to Average Ratio

### 6.2.1. Test Specification
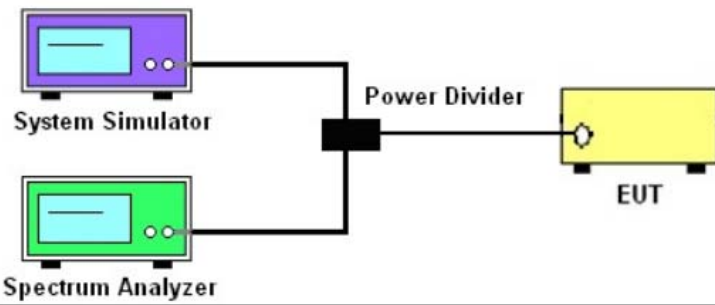
<b>Test Requirement:</b>	FCC part 24.232(d) ; FCC part 22.913; FCC part 27.50(d);
<b>Test Method:</b>	FCC KDB 971168 v02r02 Section 5.7.1
<b>Operation mode:</b>	Refer to item 4.1
<b>Limit:</b>	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
<b>Test Setup:</b>	 <p>The diagram illustrates the test setup. A System Simulator (purple) and a Spectrum Analyzer (green) are connected to a Power Divider (black). The Power Divider is then connected to the EUT (Equipment Under Test, yellow).</p>
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.</li> <li>2. The EUT was connected to spectrum analyzer and system simulator via a power divider.</li> <li>3. Set EUT to transmit at maximum output power.</li> <li>4. For GSM/EGPRS operating modes, signal gating is implemented on the spectrum analyzer by triggering from the system simulator.</li> <li>5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.</li> </ol>
<b>Test Result:</b>	PASS

### 6.2.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Oct. 13, 2017
Spectrum Analyzer	Agilent	N9020A	MY49100060	Oct. 13, 2017
RF cable (9kHz-40GHz)	TCT	RE-05	N/A	Oct. 13, 2017
Antenna Connector	TCT	RFC-02	N/A	Oct. 13, 2017

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**6.2.3. Test Data**

Cellular Band						
Mode	GSM 850			PCS 1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	2.60	2.61	2.61	2.67	2.66	2.62


Cellular Band						
Mode	WCDMA Band V (RMC 12.2Kbps)			WCDMA Band II (RMC 12.2Kbps)		
Channel	4132	4183	4233	9262	9400	9538
Frequency (MHz)	826.4	836.6	846.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	2.92	2.95	2.97	2.92	2.91	2.85

Test plots as follows:




**GSM 850**


**Peak-to-Average Ratio on Channel 128**

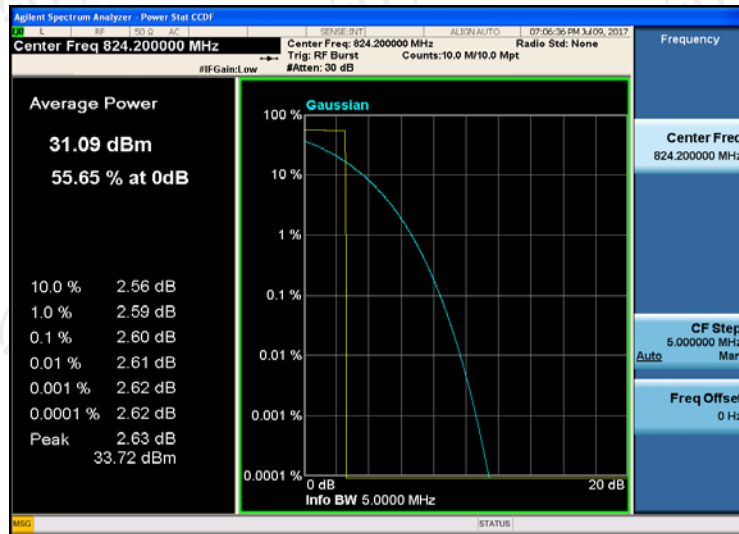


**Peak-to-Average Ratio on Channel 190**

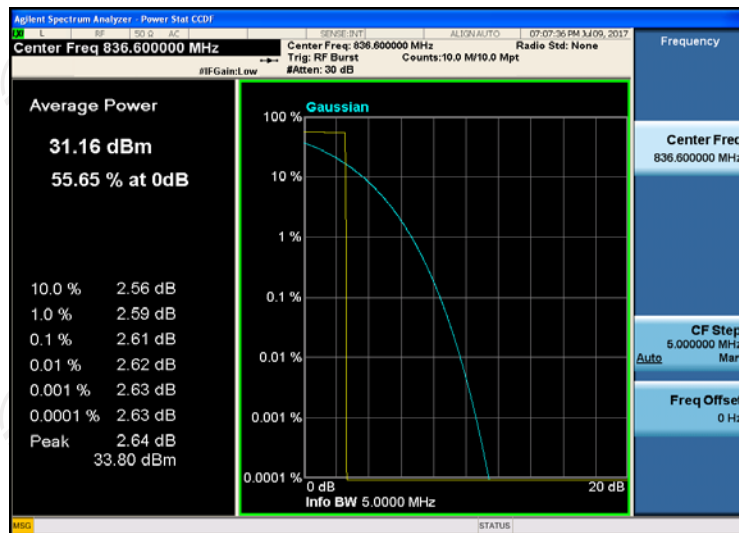


**Peak-to-Average Ratio on Channel 251**

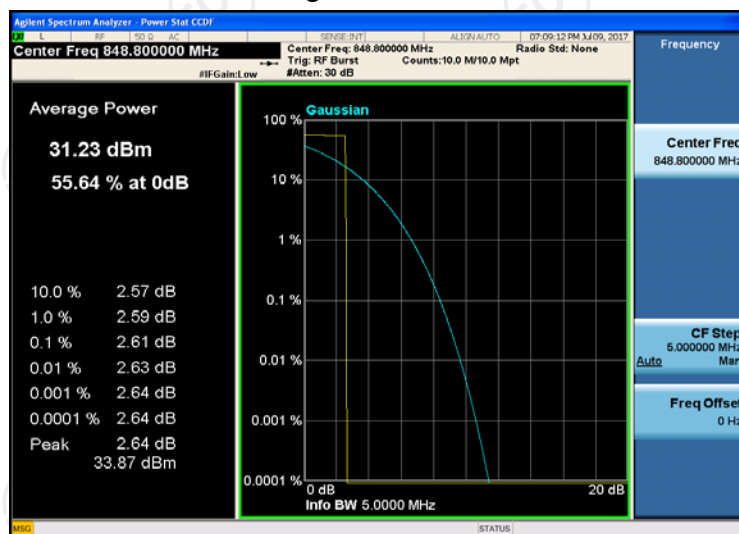


Peak-to-Average Ratio on Channel 512

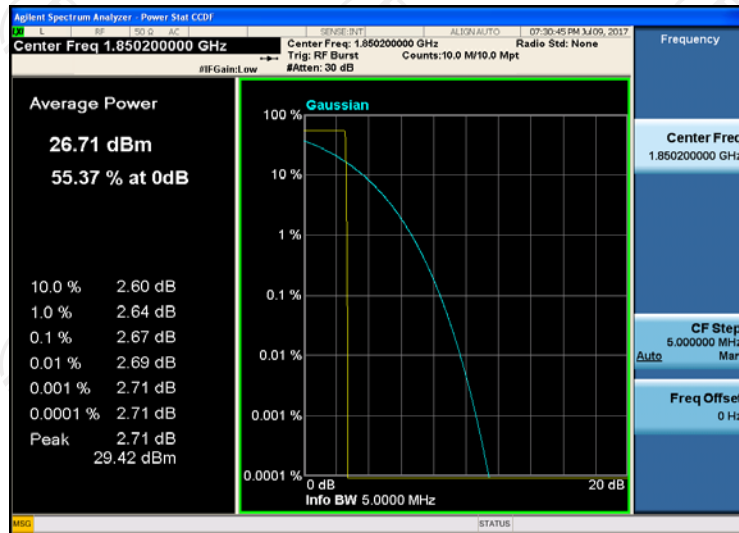


Peak-to-Average Ratio on Channel 661

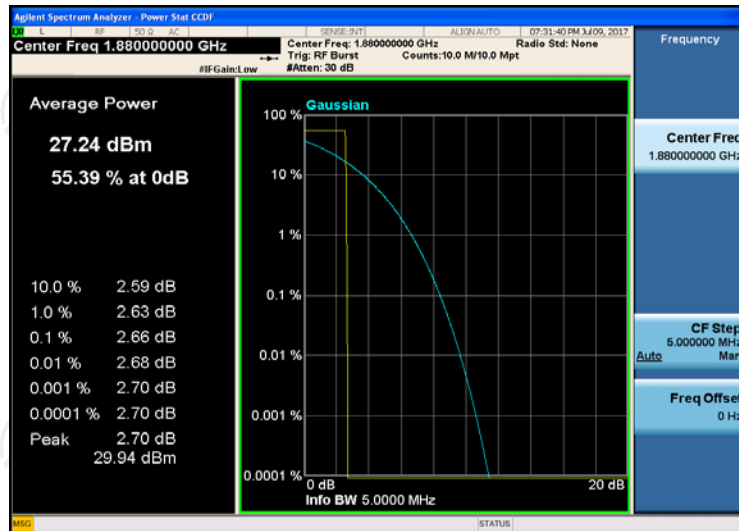


Peak-to-Average Ratio on Channel 810

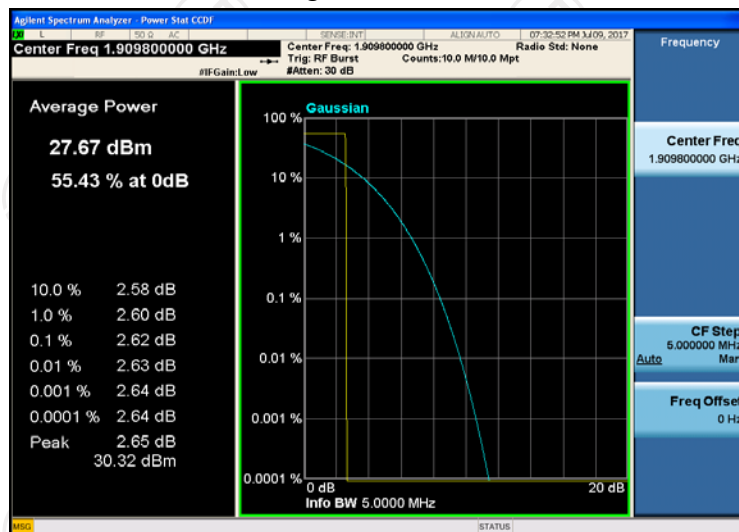


Peak-to-Average Ratio on Channel 4132

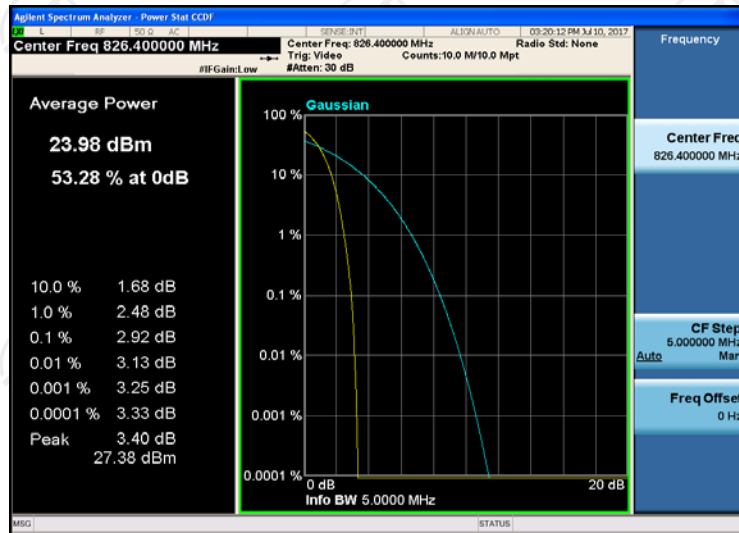


Peak-to-Average Ratio on Channel 4183

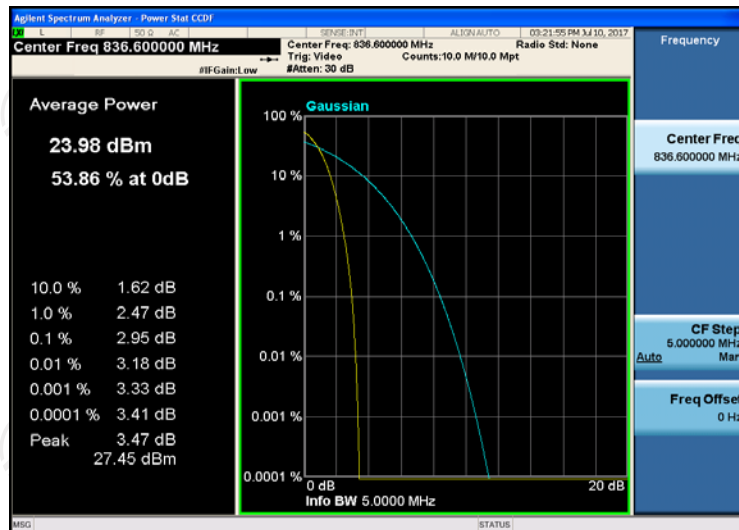


Peak-to-Average Ratio on Channel 4233

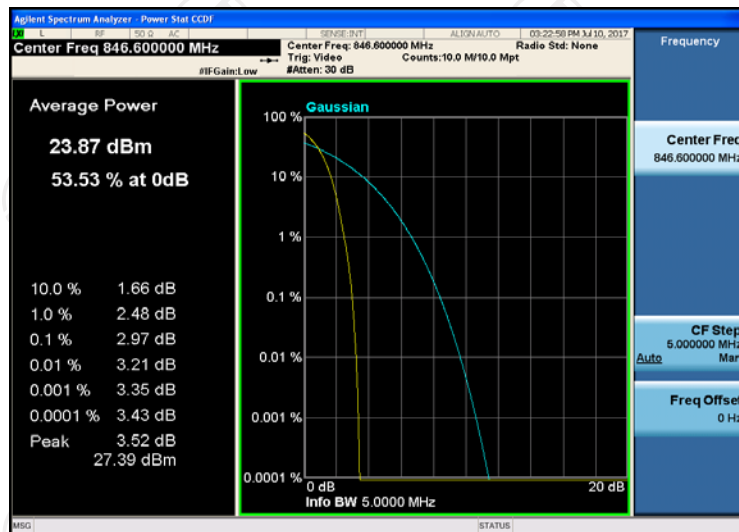


## Peak-to-Average Ratio on Channel 9262

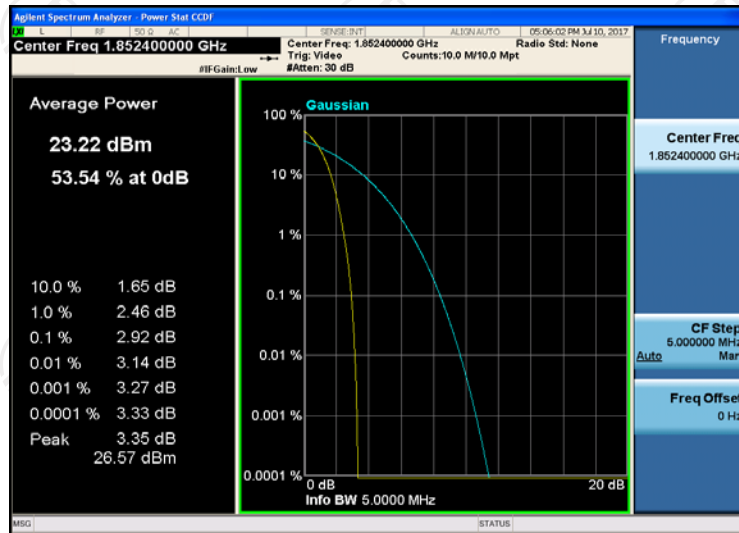

## Peak-to-Average Ratio on Channel 9400

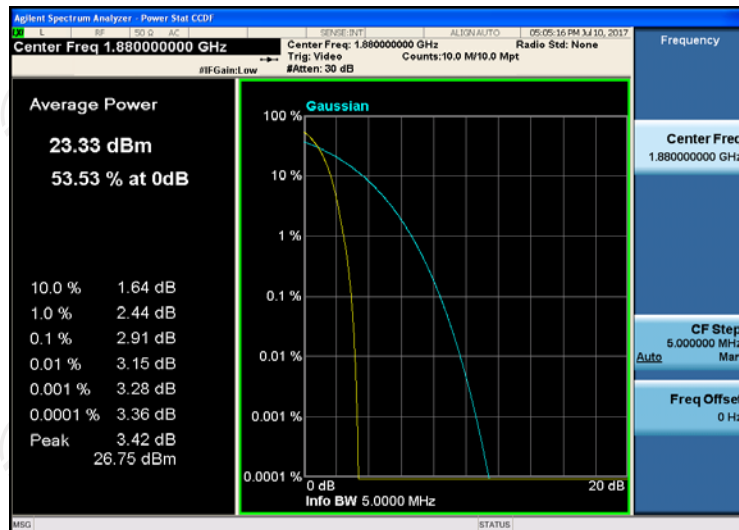


## Peak-to-Average Ratio on Channel 9538

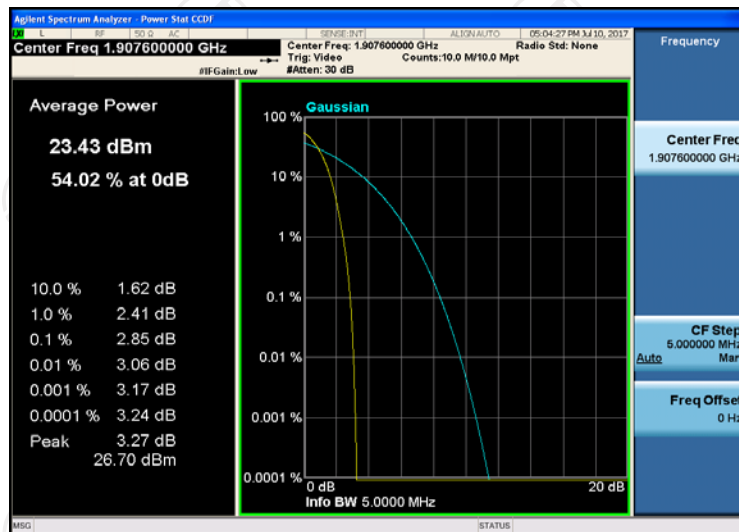

### 6.3. 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 6.3.1. Test Specification
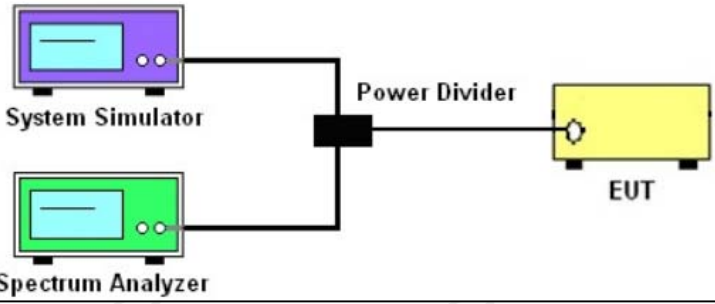
<b>Test Requirement:</b>	FCC part 2.1049
<b>Test Method:</b>	FCC part 2.1049
<b>Operation mode:</b>	Refer to item 4.1
<b>Limit:</b>	N/A
<b>Test Setup:</b>	 <p>The diagram illustrates the test setup. On the left, there are two instruments: a System Simulator (top, purple) and a Spectrum Analyzer (bottom, green). Both are connected to a central Power Divider (black). The Power Divider is then connected to the EUT (Equipment Under Test, yellow) on the right.</p>
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 v02r02 Section 4.2.</li> <li>2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.</li> <li>3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.</li> <li>5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.</li> </ol>
<b>Test Result:</b>	PASS

#### 6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Oct. 13, 2017
Spectrum Analyzer	Agilent	N9020A	MY49100060	Oct. 13, 2017
RF cable (9kHz-40GHz)	TCT	RE-05	N/A	Oct. 13, 2017
Antenna Connector	TCT	RFC-02	N/A	Oct. 13, 2017

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test data

Cellular Band						
Mode	GSM850			PCS 1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
99% OBW (kHz)	243.48	245.47	243.60	249.41	245.84	245.07
26dB BW (kHz)	316.3	315.9	318.9	314.0	316.7	316.8


Cellular Band			
Mode	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.6	846.6
99% OBW (kHz)	4158.8	4129.6	4169.8
26dB BW (kHz)	4694	4663	4693

Cellular Band			
Mode	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (kHz)	4152.4	4166.0	4156.5
26dB BW (kHz)	4691	4714	4682


Test plots as follows:

Band:	GSM 850	Test Mode:	GSM Link (GMSK)
-------	---------	------------	-----------------


26dB&99% Occupied Bandwidth Plot on Channel 128

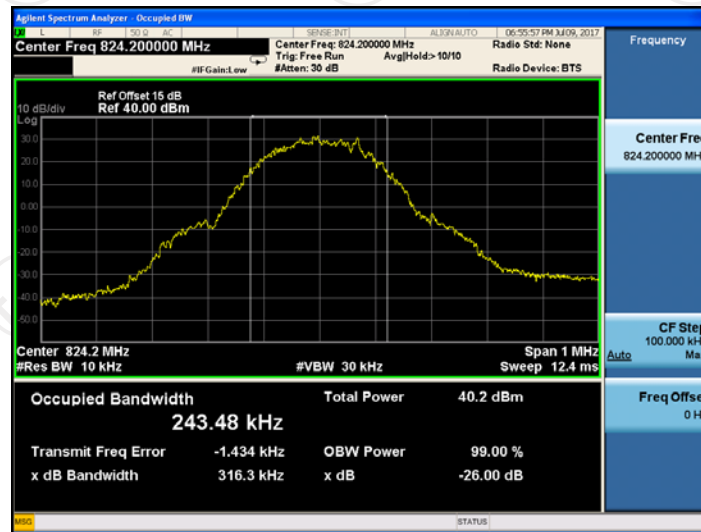

26dB&99% Occupied Bandwidth Plot on Channel 190

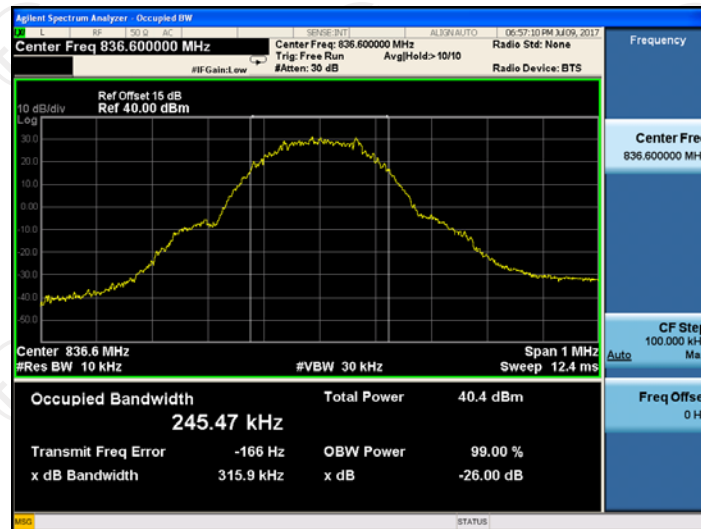


26dB&99% Occupied Bandwidth Plot on Channel 251

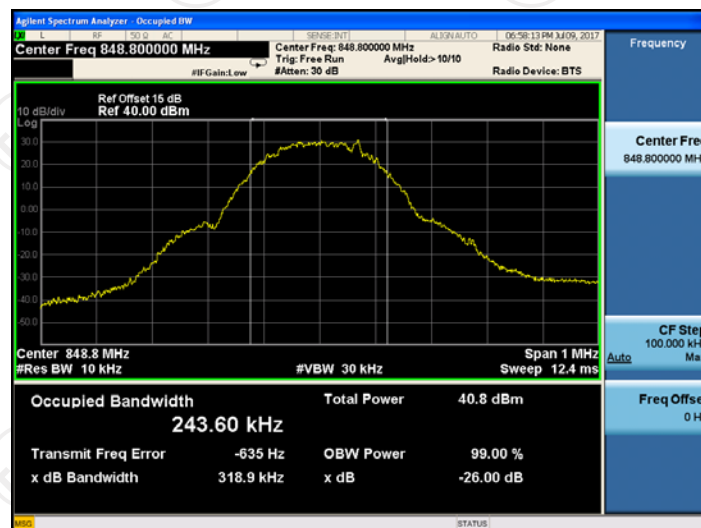


Band:	GSM 1900	Test Mode:	GSM Link (GMSK)
-------	----------	------------	-----------------


26dB&99% Occupied Bandwidth Plot on Channel 512

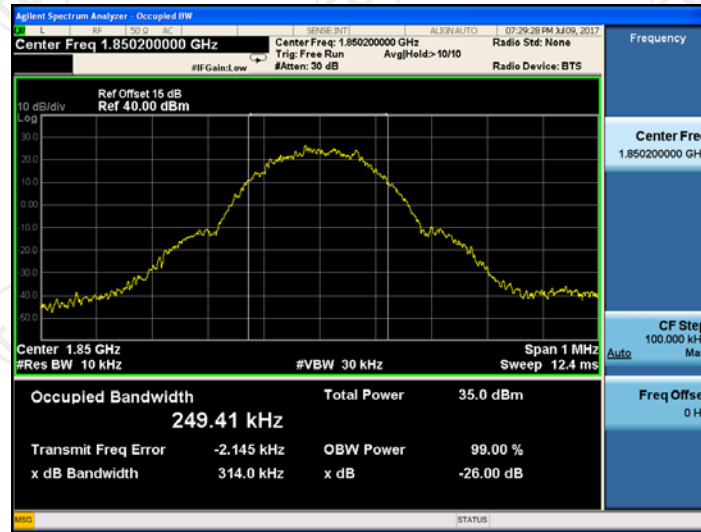

26dB&99% Occupied Bandwidth Plot on Channel 661

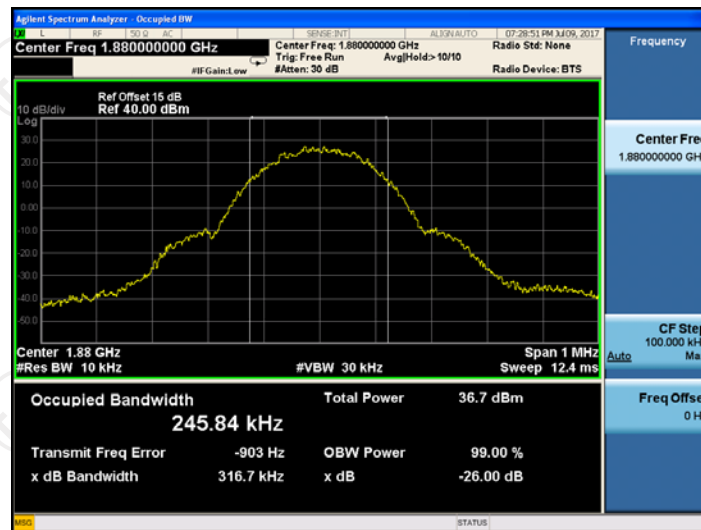


26dB&99% Occupied Bandwidth Plot on Channel 810

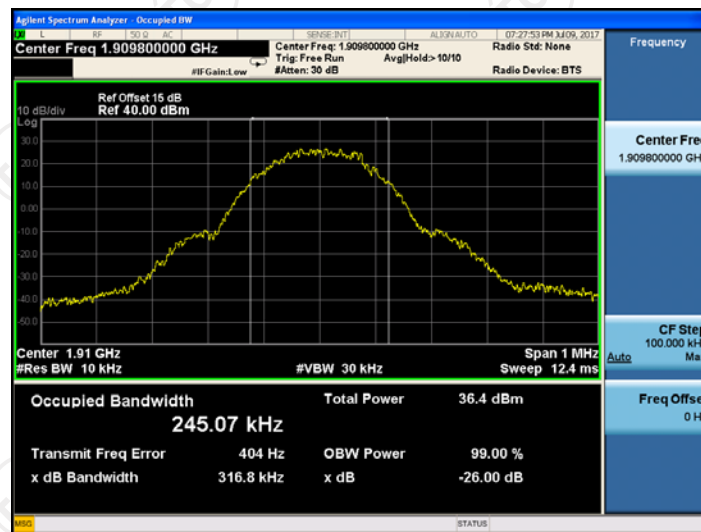




Band:	WCDMA Band V	Test Mode:	RMC 12.2Kbps Link (QPSK)
-------	--------------	------------	--------------------------


26dB&99% Occupied Bandwidth Plot on Channel 4132

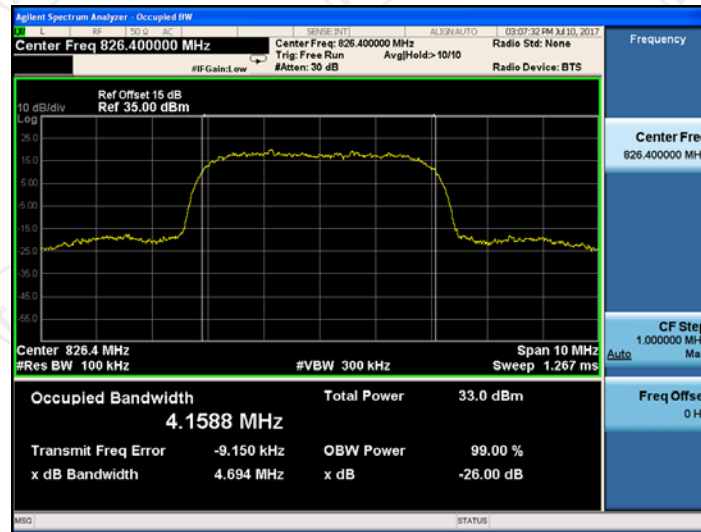

26dB&99% Occupied Bandwidth Plot on Channel 4183

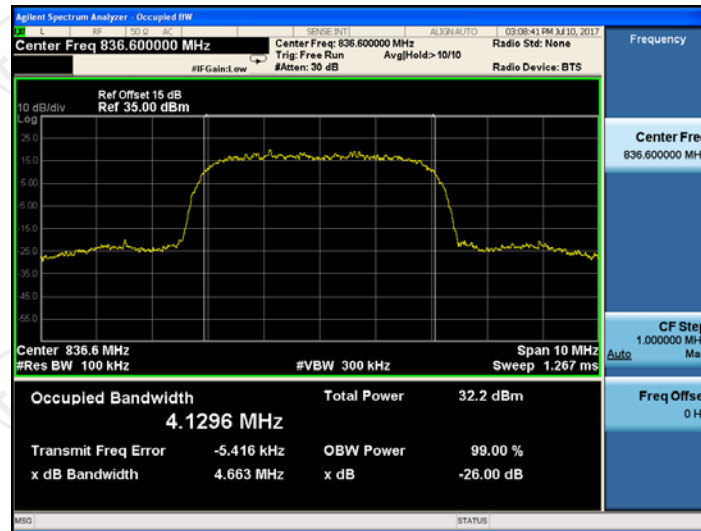


26dB&99% Occupied Bandwidth Plot on Channel 4233

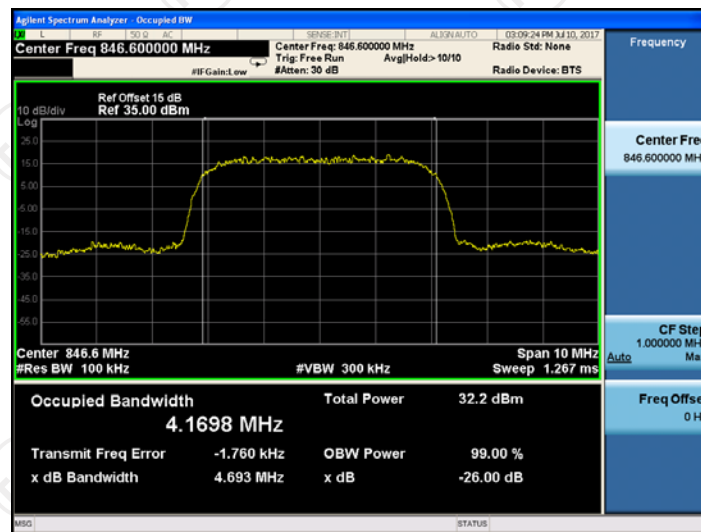


Band:	WCDMA Band II	Test Mode:	RMC 12.2Kbps Link (QPSK)
-------	---------------	------------	--------------------------


26dB&99% Occupied Bandwidth Plot on Channel 9262

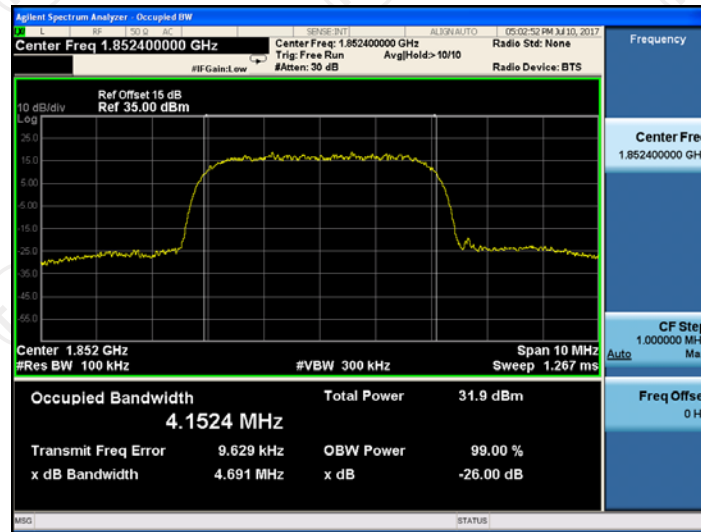

26dB&99% Occupied Bandwidth Plot on Channel 9400

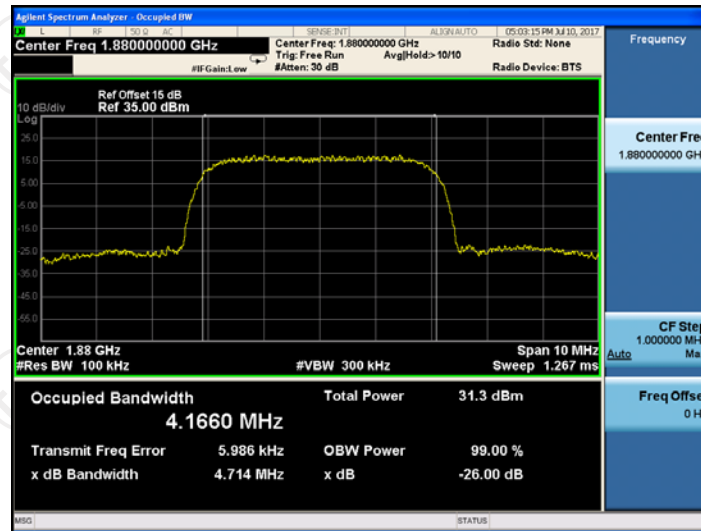


26dB&99% Occupied Bandwidth Plot on Channel 9538

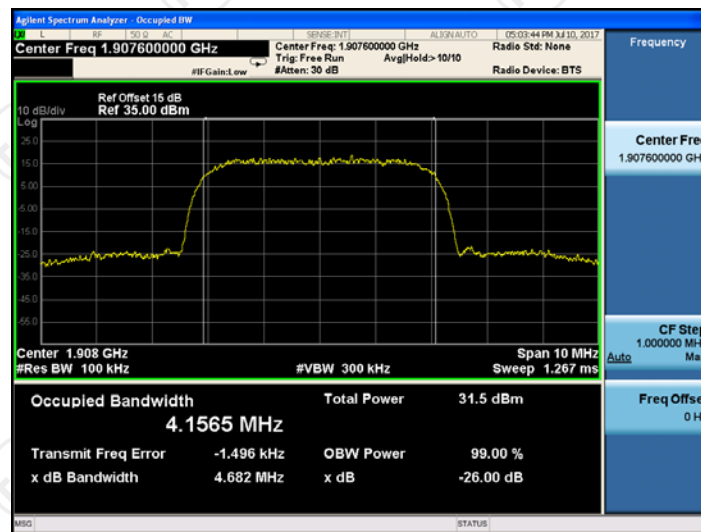

## 6.4. Band Edge and Conducted Spurious Emission Measurement

### 6.4.1. Test Specification
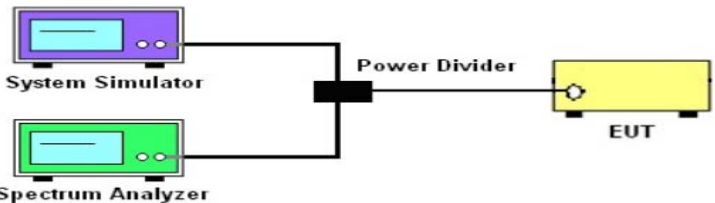
<b>Test Requirement:</b>	FCC part22.917(a) and FCC part24.238(a) FCC part27.53(g)
<b>Test Method:</b>	FCC part2.1051
<b>Operation mode:</b>	Refer to item 4.1
<b>Limit:</b>	-13dBm
<b>Test Setup:</b>	 <p>The diagram illustrates the test setup. A System Simulator (purple) and a Spectrum Analyzer (green) are connected to a Power Divider (black). The Power Divider is connected to the EUT (yellow).</p>
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 v02r02 Section 6.0.</li> <li>2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.</li> <li>3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>4. The band edges of low and high channels for the highest RF powers were measured.</li> <li>5. The conducted spurious emission for the whole frequency range was taken.</li> <li>6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</li> <li>7. The limit line is derived from <math>43 + 10\log(P)</math> dB below the transmitter power  <math>P(\text{Watts}) = P(\text{W}) - [43 + 10\log(P)] (\text{dB}) = [30 + 10\log(P)] (\text{dBm}) - [43 + 10\log(P)] (\text{dB}) = -13\text{dBm}</math>.</li> </ol>
<b>Test Result:</b>	PASS

### 6.4.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Oct. 13, 2017
Spectrum Analyzer	Agilent	N9020A	MY49100060	Oct. 13, 2017
RF cable (9kHz-40GHz)	TCT	RE-05	N/A	Oct. 13, 2017
Antenna Connector	TCT	RFC-02	N/A	Oct. 13, 2017


**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

### 6.4.3. Test data


Test plots as follows:

Band:	GSM 850	Test Mode:	GSM Link (GMSK)
-------	---------	------------	-----------------

Lower Band Edge Plot on Channel 128

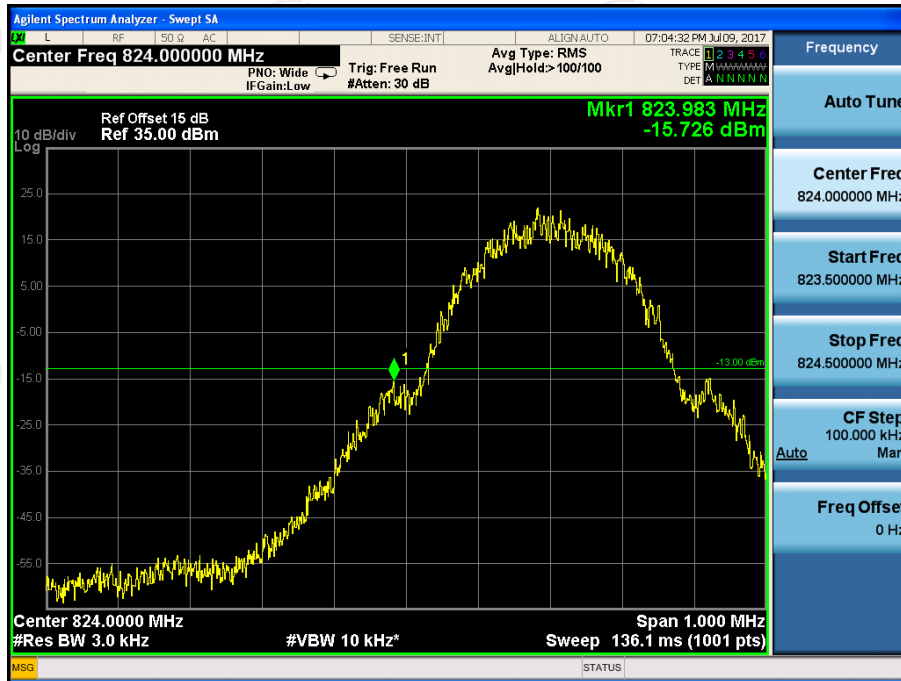


Higher Band Edge Plot on Channel 251

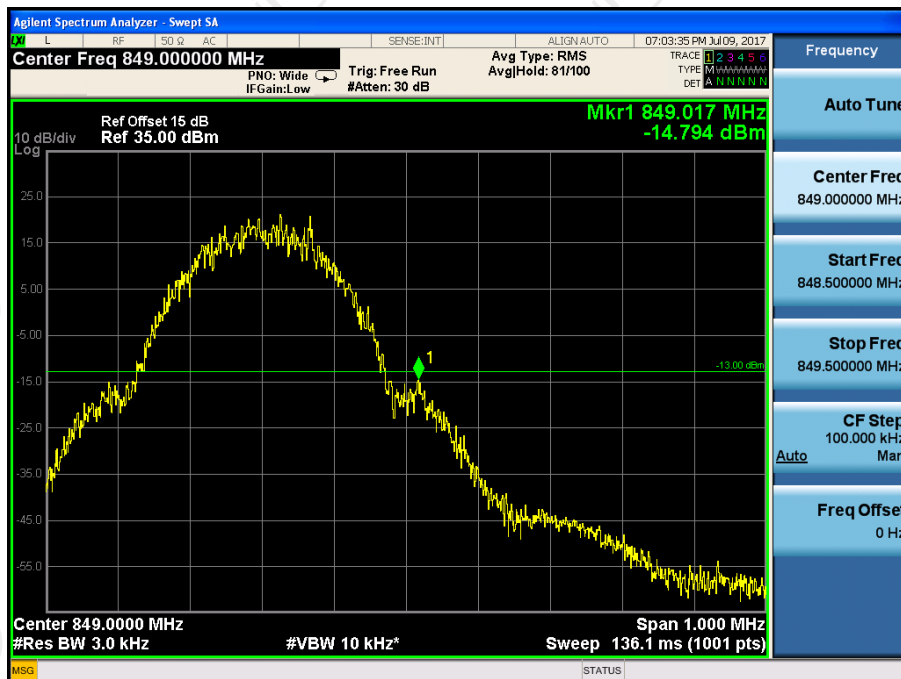


Band:	GSM 1900	Test Mode:	GSM Link (GMSK)
-------	----------	------------	-----------------

### Lower Band Edge Plot on Channel 512

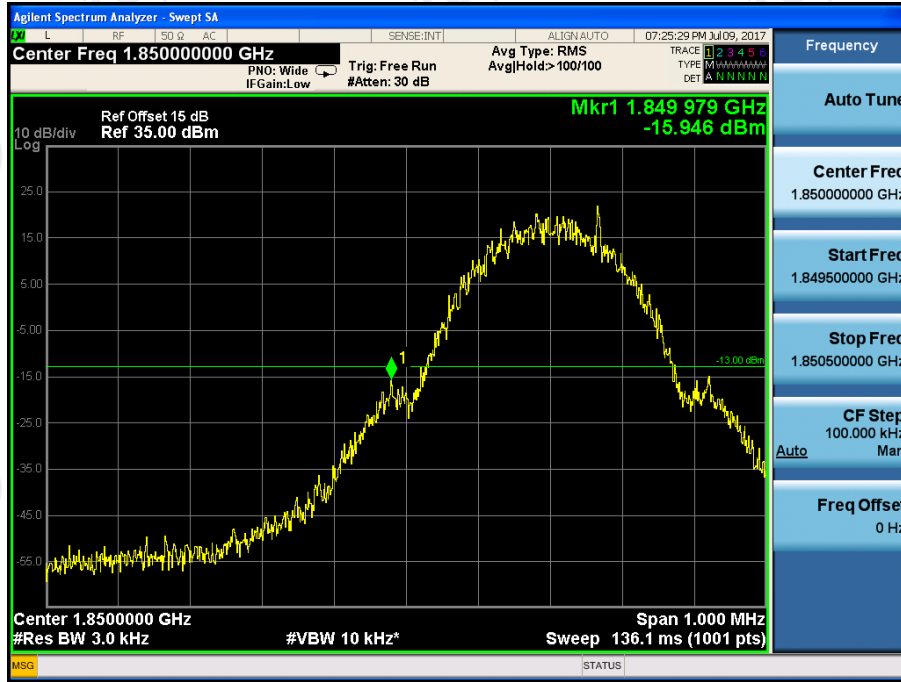


### Higher Band Edge Plot on Channel 810

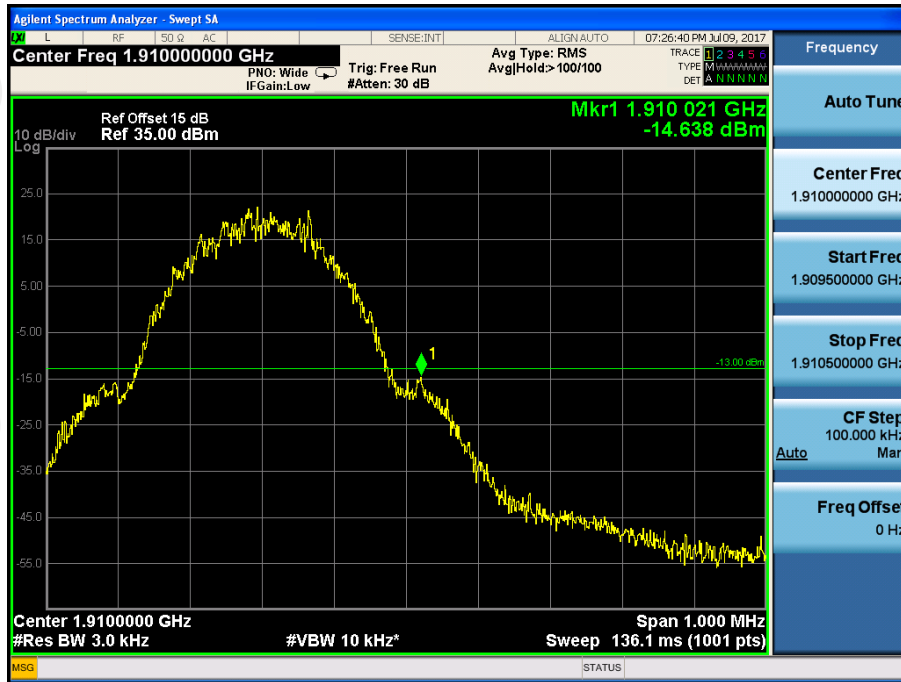

Band:	WCDMA Band V	Test Mode:	RMC 12.2Kbps Link (QPSK)
-------	--------------	------------	--------------------------

Lower Band Edge Plot on Channel 4132

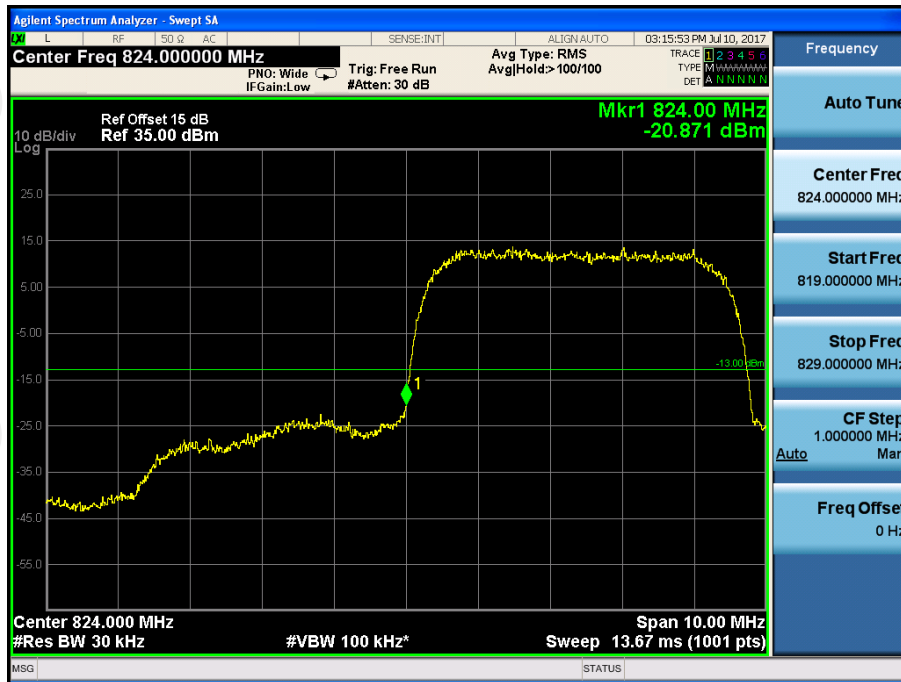

Higher Band Edge Plot on Channel 4233



Band:	WCDMA Band II	Test Mode:	RMC 12.2Kbps Link (QPSK)
-------	---------------	------------	--------------------------

Lower Band Edge Plot on Channel 9262




Higher Band Edge Plot on Channel 9538




Band:	GSM 850	Test Mode:	GSM Link (GMSK)
-------	---------	------------	-----------------


Conducted Spurious Emission on Channel 128

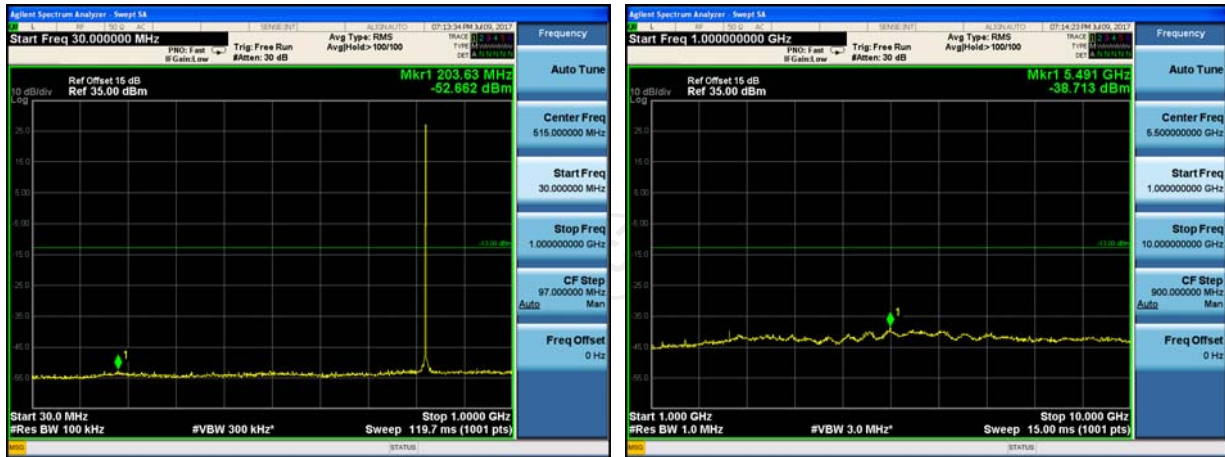

Conducted Spurious Emission on Channel 189

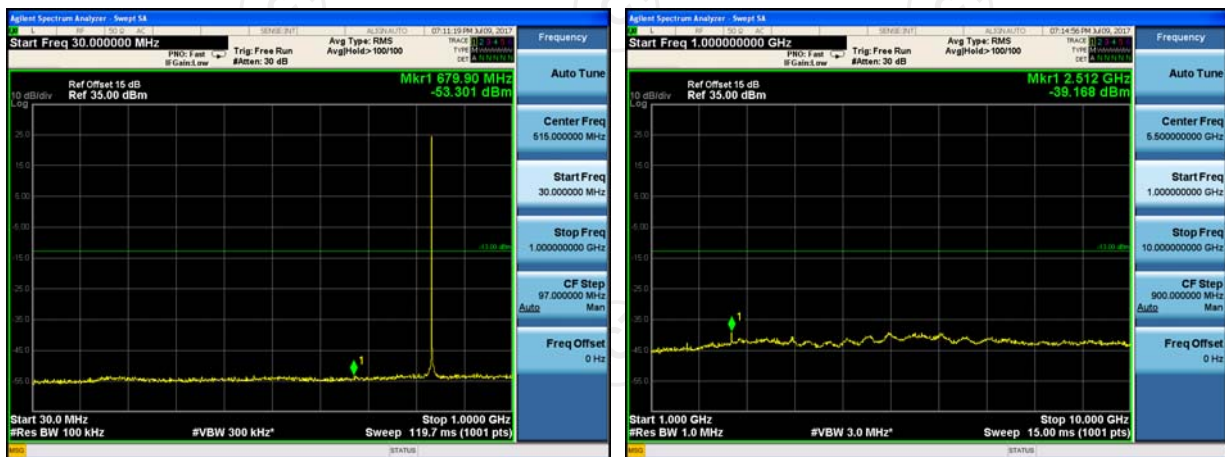


Conducted Spurious Emission on Channel 251

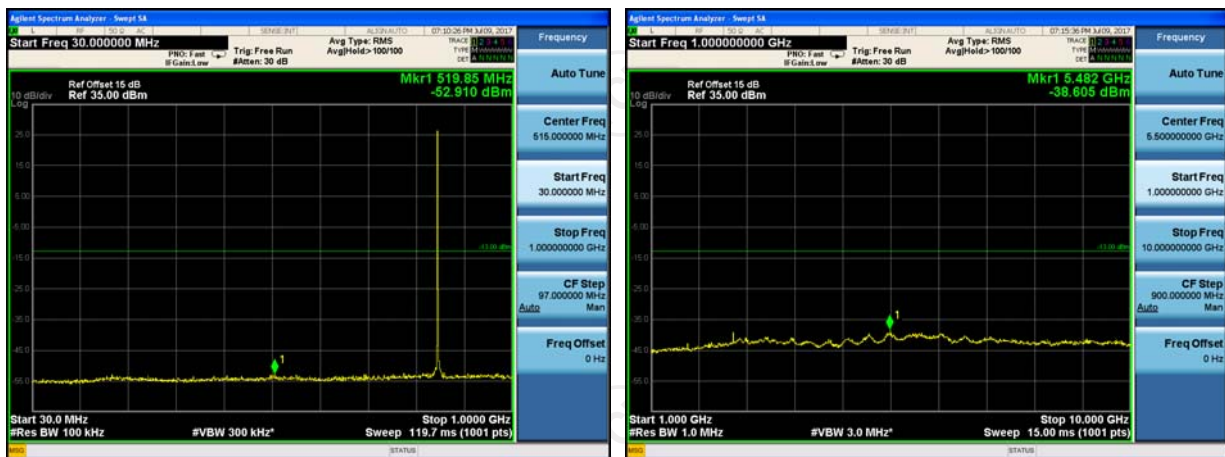




Band:	GSM 1900	Test Mode:	GSM Link (GMSK)
-------	----------	------------	-----------------


Conducted Spurious Emission on Channel 512

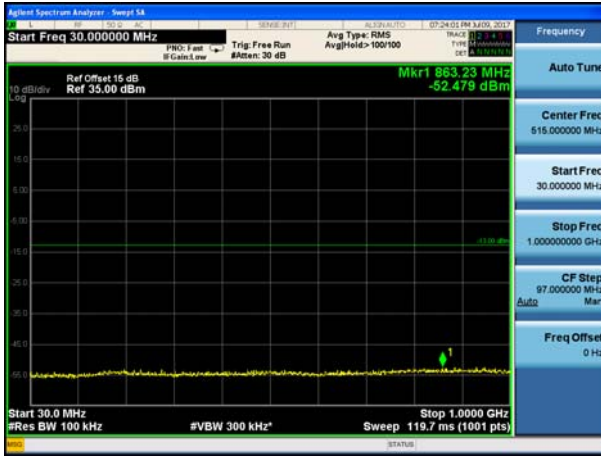

Conducted Spurious Emission on Channel 661

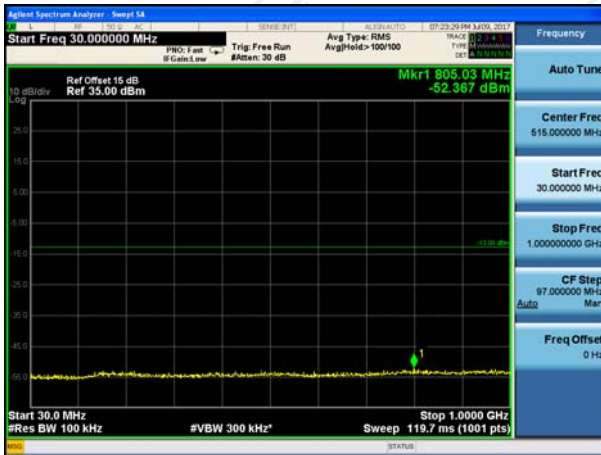


Conducted Spurious Emission on Channel 810


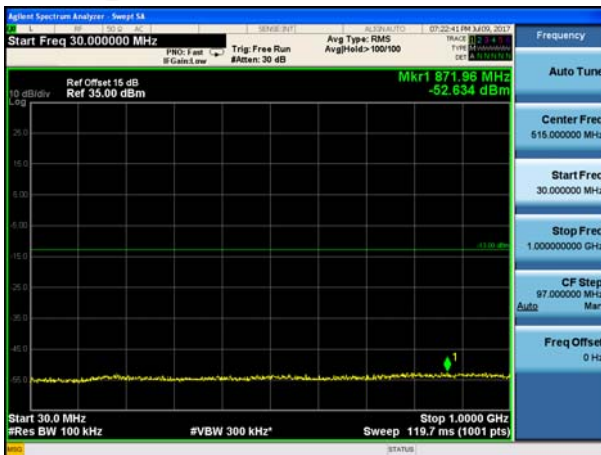


Band:	WCDMA Band V	Test Mode:	RMC 12.2Kbps Link (QPSK)
-------	--------------	------------	--------------------------



Conducted Spurious Emission on Channel 4132

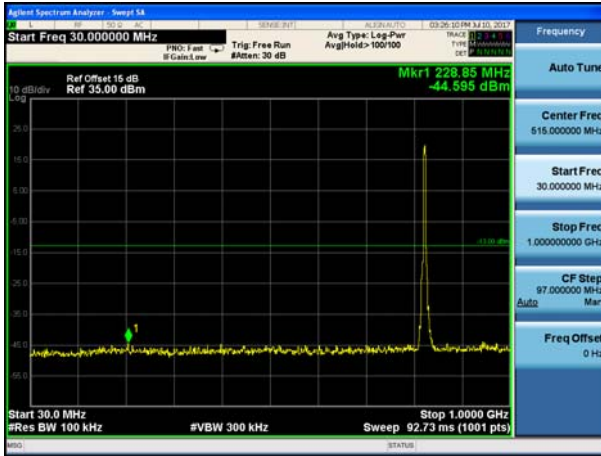

Conducted Spurious Emission on Channel 4183

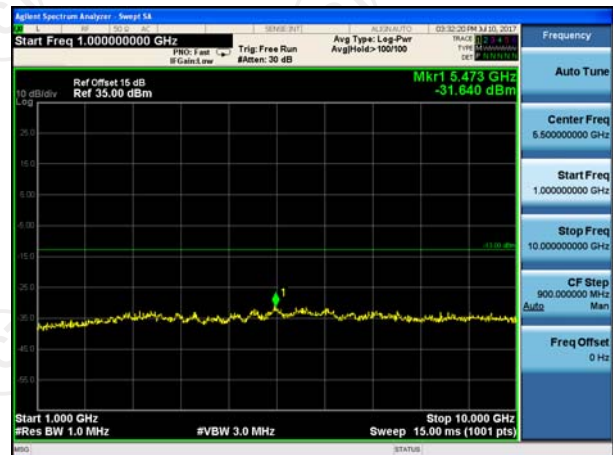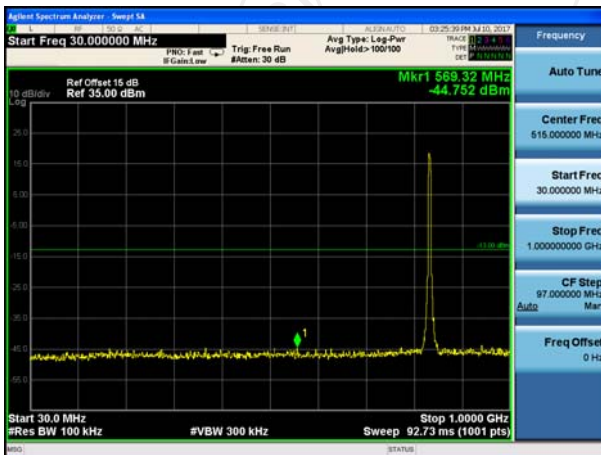


Conducted Spurious Emission on Channel 4233

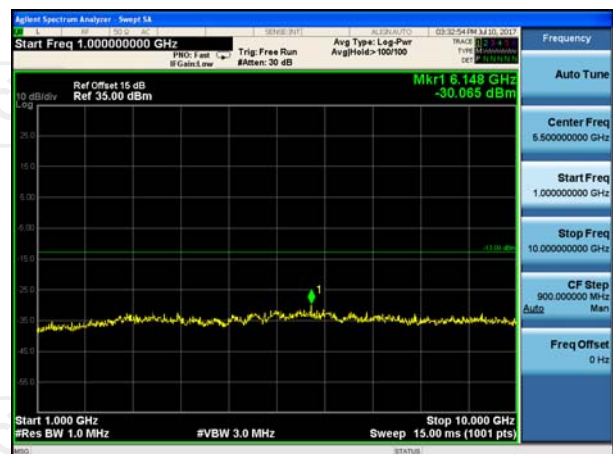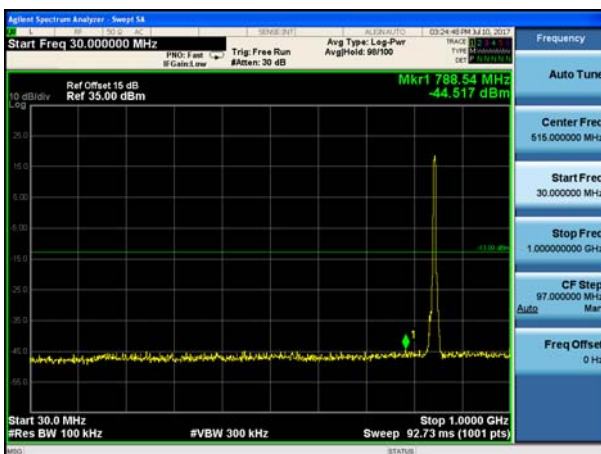


Band:	WCDMA Band II	Test Mode:	RMC 12.2Kbps Link (QPSK)
-------	---------------	------------	--------------------------


Conducted Spurious Emission on Channel 9262

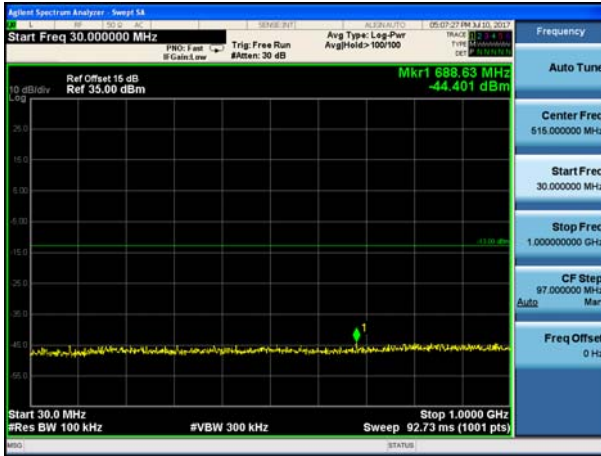

Conducted Spurious Emission on Channel 9400


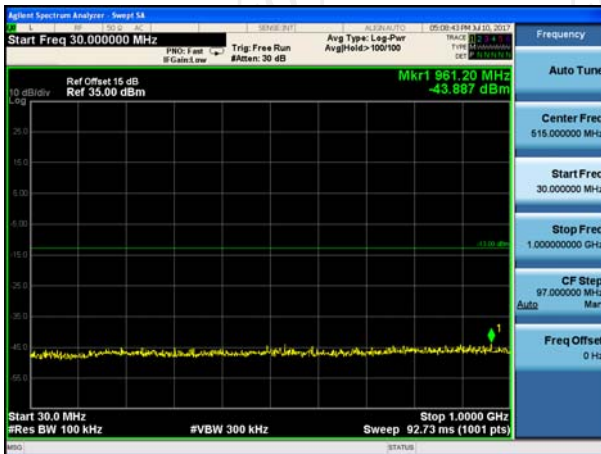


Conducted Spurious Emission on Channel 9538

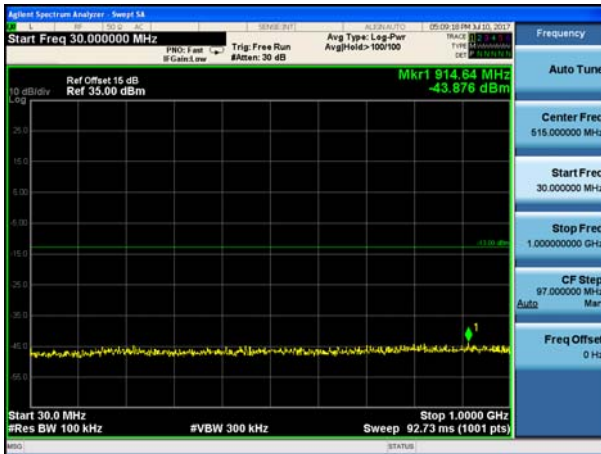

## 6.5. Effective Radiated Power and Effective Isotropic Radiated Power Measurement

### 6.5.1. Test Specification
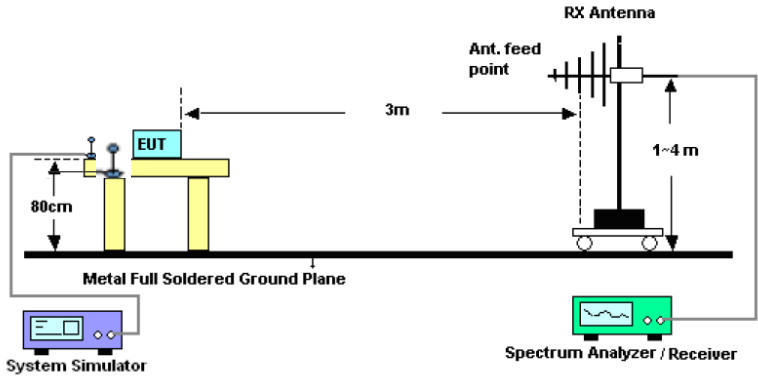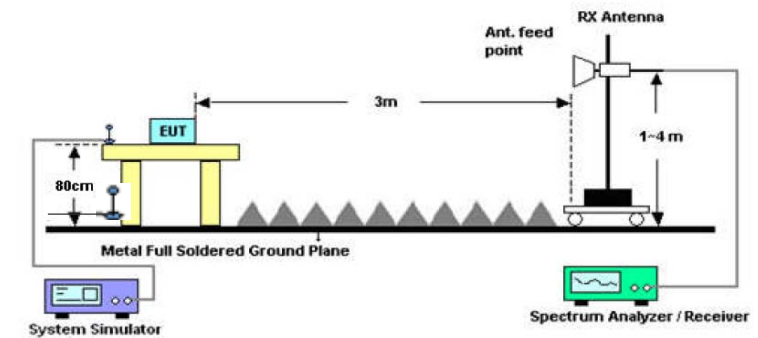
<b>Test Requirement:</b>	FCC part 22.913(a) and FCC part 24.232(b) FCC part 27.50(d)																								
<b>Test Method:</b>	FCC part 2.1046																								
<b>Receiver Setup:</b>	<table border="1"> <thead> <tr> <th></th> <th>GSM/GPRS/EDGE</th> <th>WCDMA/HSPA</th> </tr> </thead> <tbody> <tr> <td>SPAN</td> <td>500kHz</td> <td>10MHz</td> </tr> <tr> <td>RBW</td> <td>10kHz</td> <td>100kHz</td> </tr> <tr> <td>VBW</td> <td>30kHz</td> <td>300kHz</td> </tr> <tr> <td>Detector</td> <td>RMS</td> <td>RMS</td> </tr> <tr> <td>Trace</td> <td>Average</td> <td>Average</td> </tr> <tr> <td>Average Type</td> <td>Power</td> <td>Power</td> </tr> <tr> <td>Sweep Count</td> <td>100</td> <td>100</td> </tr> </tbody> </table>		GSM/GPRS/EDGE	WCDMA/HSPA	SPAN	500kHz	10MHz	RBW	10kHz	100kHz	VBW	30kHz	300kHz	Detector	RMS	RMS	Trace	Average	Average	Average Type	Power	Power	Sweep Count	100	100
		GSM/GPRS/EDGE	WCDMA/HSPA																						
	SPAN	500kHz	10MHz																						
	RBW	10kHz	100kHz																						
	VBW	30kHz	300kHz																						
	Detector	RMS	RMS																						
	Trace	Average	Average																						
Average Type	Power	Power																							
Sweep Count	100	100																							
<b>Limit:</b>	GSM850 7W ERP PCS1900 2W EIRP WCDMA Band V: 7W ERP WCDMA Band II: 2W EIRP																								
<b>Test Setup:</b>	<p>From 30MHz to 1GHz</p>  <p>Above 1GHz</p> 																								
<b>Test Procedure:</b>	1. The testing follows FCC KDB 971168 v02r02 Section																								

	<p>5.8. and ANSI / TIA-603-D-2010 Section 2.2.17.</p> <ol style="list-style-type: none"> <li>2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.</li> <li>3. Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment.</li> <li>4. Replace the transmitter under test with a substitution antenna. The center of the antenna should be at the same location as the center of the antenna under test.</li> <li>5. Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. LOSS = Generator Output Power (dBm) – Analyzer reading (dBm)</li> <li>6. Determine the effective radiated output power at each angular position from the readings in steps 3) and 5) using the following equation: ERP (dBm) = LVL (dBm) + LOSS (dB)</li> <li>7. The maximum ERP is the maximum value determined in the preceding step.</li> <li>8. Calculating ERP: ERP (dBm) = Output Power (dBm) - Losses (dB) + Antenna Gain (dBd) Antenna Gain (dBd) = Antenna Gain (dBi) - 2.15 EIRP = ERP – 2.15</li> </ol>
<b>Test results:</b>	PASS

**6.5.2. Test Instruments**

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Oct. 13, 2017
Spectrum Analyzer	ROHDE&SCHW ARZ	R&S	FSQ	Oct. 13, 2017
Signal Generator	HP	83623B	3614A00396	Oct. 13, 2017
Broadband Antenna	Schwarzbeck	VULB9163	340	Oct. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Oct. 13, 2017
Broadband Antenna	Schwarzbeck	VULB9163	412	Oct. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9120D	1201	Mar. 05, 2018
Dipole Antenna	TCT	TCT-RF	N/A	Oct. 13, 2017
Coax cable (9kHz-1GHz)	TCT	RE-low-01	N/A	Oct. 13, 2017
Coax cable (9kHz-40GHz)	TCT	RE-high-02	N/A	Oct. 13, 2017
Coax cable (9kHz-1GHz)	TCT	RE-low-03	N/A	Oct. 13, 2017
Coax cable (9kHz-40GHz)	TCT	RE-High-04	N/A	Oct. 13, 2017
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.5.3. Test Data

Test Result of ERP

GSM850 (GSM) Radiated Power ERP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.20	H	11.31	21.66	32.97	1.98
836.60	H	11.38	21.54	32.92	1.96
848.80	H	11.46	21.46	32.92	1.96
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.20	H	11.29	21.66	32.95	1.97
836.60	H	11.37	21.54	32.91	1.95
848.80	H	11.27	21.46	32.73	1.87

GPRS 850 (1-solt) Radiated Power ERP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.20	H	10.54	21.66	32.20	1.66
836.60	H	10.63	21.54	32.17	1.65
848.80	H	10.57	21.46	32.03	1.60
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.20	H	10.42	21.66	32.08	1.61
836.60	H	10.47	21.54	32.01	1.59
848.80	H	10.50	21.46	31.96	1.57

**Note:** All GPRS slot have been tested, but only the worst GPRS 1-slot show in this test item.

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	H	2.45	21.62	24.07	0.26
836.60	H	2.53	21.57	24.10	0.26
846.60	H	2.48	21.44	23.92	0.25
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	H	2.24	21.62	23.86	0.24
836.60	H	2.28	21.57	23.85	0.24
846.60	H	2.19	21.44	23.63	0.23

\* ERP = LVL (dBm) + Correction Factor (dB) - 2.15

Correction Factor = S.G. Power - Cable loss + Antenna Gain - SPA. Reading



**Test Result of EIRP**

GSM1900 (GSM) Radiated Power EIRP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
1850.20	H	7.89	21.66	29.55	0.90
1880.00	H	7.78	21.54	29.32	0.86
1909.80	H	7.82	21.46	29.28	0.85
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
1850.20	H	7.46	21.66	29.12	0.82
1880.00	H	7.52	21.54	29.06	0.81
1909.80	H	7.49	21.46	28.95	0.79

GPRS1900 (1-slot) Radiated Power EIRP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
1850.20	H	7.69	21.66	29.35	0.86
1880.00	H	7.72	21.54	29.26	0.84
1909.80	H	7.64	21.46	29.10	0.81
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
1850.20	H	7.36	21.66	29.02	0.80
1880.00	H	7.39	21.54	28.93	0.78
1909.80	H	7.41	21.46	28.87	0.77

**Note:** All GPRS slot have been tested, but only the worst GPRS 1-slot show in this test item.



WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP					
Horizontal Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
1852.40	H	-10.15	31.78	21.63	0.15
1880.00	H	-10.11	31.63	21.52	0.14
1907.60	H	-10.14	31.75	21.61	0.14
Vertical Polarization (Antenna Pol.)					
Frequency (MHz)	(EUT Pol.)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
1852.40	H	-10.27	31.78	21.51	0.14
1880.00	H	-10.32	31.63	21.31	0.14
1907.60	H	-10.28	31.75	21.47	0.14

\* EIRP = LVL (dBm) + Correction Factor (dB)

Correction Factor = S.G. Power - Cable loss + Substitution Antenna Gain - SPA. Reading

## 6.6. Field Strength of Spurious Radiation Measurement

### 6.6.1. Test Specification
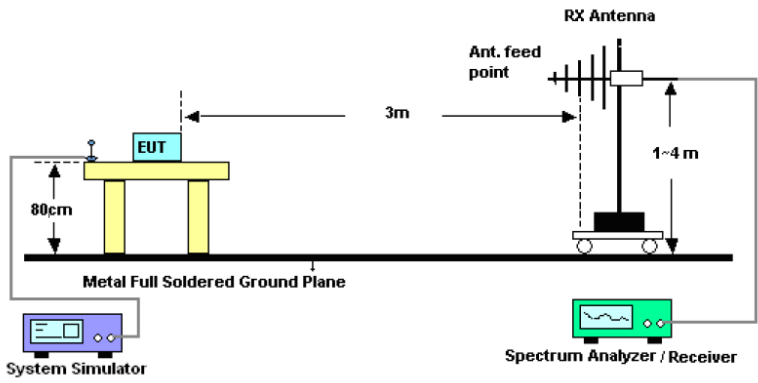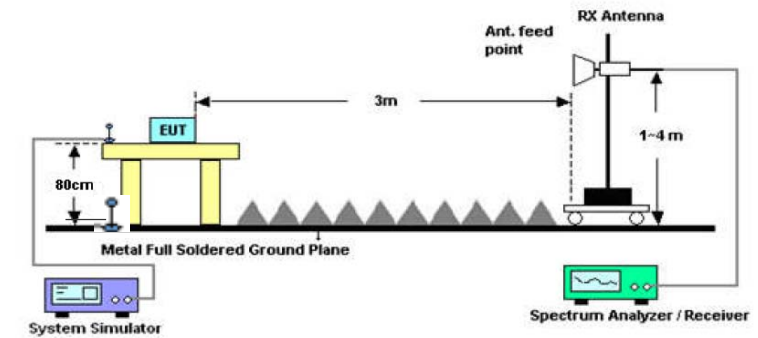
<b>Test Requirement:</b>	FCC part 22.917(a) and FCC part 24.238(a) FCC part 27.53(g)
<b>Test Method:</b>	FCC part 2.1053
<b>Operation mode:</b>	Refer to item 4.1
<b>Limit:</b>	-13dBm
<b>Test setup:</b>	<p>For 30MHz~1GHz</p>  <p>Above 1GHz</p> 
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.</li> <li>2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.</li> <li>3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.</li> <li>4. The table was rotated 360 degrees to determine the position of the highest spurious emission.</li> <li>5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.</li> <li>6. Make the measurement with the spectrum analyzer's</li> </ol>

	<p>RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.</p> <p>7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.</p> <p>8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.</p> <p>9. Taking the record of output power at antenna port.</p> <p>10. Repeat step 7 to step 8 for another polarization.</p> <p>11. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain</p> <p>12. ERP (dBm) = EIRP - 2.15</p> <p>13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</p> <p>14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)</p> <p>= P(W) - [43 + 10log(P)] (dB)</p> <p>= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)</p> <p>= -13dBm.</p>
<b>Test results:</b>	PASS
<b>Remark:</b>	All modulations have been tested, but only the worst modulation show in this test item.

**6.6.2. Test Instruments**

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Oct. 13, 2017
Spectrum Analyzer	ROHDE&SCHW ARZ	R&S	FSQ	Oct. 13, 2017
Signal Generator	HP	83623B	3614A00396	Oct. 13, 2017
Broadband Antenna	Schwarzbeck	VULB9163	340	Oct. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Oct. 13, 2017
Broadband Antenna	Schwarzbeck	VULB9163	412	Oct. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9120D	1201	Mar. 05, 2018
Horn Antenna	Schwarzbeck	BBH 9170	582	Jun. 07, 2018
Dipole Antenna	TCT	TCT-RF	N/A	Oct. 13, 2017
Coax cable (9kHz-1GHz)	TCT	RE-low-01	N/A	Oct. 13, 2017
Coax cable (9kHz-40GHz)	TCT	RE-high-02	N/A	Oct. 13, 2017
Coax cable (9kHz-1GHz)	TCT	RE-low-03	N/A	Oct. 13, 2017
Coax cable (9kHz-40GHz)	TCT	RE-High-04	N/A	Oct. 13, 2017
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**6.6.3. Test Data**

**Frequency Range (9 kHz-30MHz)**

Frequency (MHz)	Level@3m (dB $\mu$ V/m)	Limit@3m (dB $\mu$ V/m)
--	--	--
--	--	--
--	--	--
--	--	--

**Note:** 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

<b>Band</b>	<b>GSM 850</b>		<b>Test channel:</b>	<b>Lowest</b>
<b>Test mode:</b>			<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1648.40	Vertical	-38.57	-13.00	PASS
2472.60	V	-41.62		
3296.80	V	-50.63		
1648.40	Horizontal	-43.22		
2472.60	H	-39.59		
3296.80	H	-51.14		
<b>Band</b>	<b>GSM 850</b>		<b>Test channel:</b>	<b>Middle</b>
<b>Test mode:</b>			<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-40.47	-13.00	PASS
2509.80	V	-43.42		
3346.40	V	-51.06		
1673.20	Horizontal	-41.13		
2509.80	H	-39.14		
3346.40	H	-52.70		
<b>Band</b>	<b>GSM 850</b>		<b>Test channel:</b>	<b>Highest</b>
<b>Test mode:</b>			<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1697.60	Vertical	-40.80	-13.00	PASS
2546.40	V	-41.34		
3395.20	V	-56.36		
1697.60	Horizontal	-45.14		
2546.40	H	-43.06		
3395.20	H	-55.80		

<b>Band</b>	<b>PCS 1900</b>		<b>Test channel:</b>	<b>Lowest</b>
<b>Test mode:</b>			<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
<b>Frequency (MHz)</b>	<b>Spurious Emission</b>		<b>Limit (dBm)</b>	<b>Result</b>
	<b>Polarization</b>	<b>Level (dBm)</b>		
3700.40	Vertical	-49.31	-13.00	PASS
5550.60	V	-45.41		
7400.80	V	-52.04		
3700.40	Horizontal	-48.26		
5550.60	H	-50.19		
7400.80	H	-48.90		
<b>Test mode:</b>	<b>PCS 1900</b>		<b>Test channel:</b>	<b>Middle</b>
<b>Test mode:</b>			<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
<b>Frequency (MHz)</b>	<b>Spurious Emission</b>		<b>Limit (dBm)</b>	<b>Result</b>
	<b>Polarization</b>	<b>Level (dBm)</b>		
3760.00	Vertical	-49.12	-13.00	PASS
5640.00	V	-53.02		
7520.00	V	-47.55		
3760.00	Horizontal	-47.70		
5640.00	H	-50.85		
7520.00	H	-51.20		
<b>Test mode:</b>	<b>PCS 1900</b>		<b>Test channel:</b>	<b>Highest</b>
<b>Test mode:</b>			<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
<b>Frequency (MHz)</b>	<b>Spurious Emission</b>		<b>Limit (dBm)</b>	<b>Result</b>
	<b>Polarization</b>	<b>Level (dBm)</b>		
3819.60	Vertical	-46.24	-13.00	PASS
5729.40	V	-50.64		
7639.20	V	-54.29		
3819.60	Horizontal	-48.31		
5729.40	H	-50.79		
7639.20	H	-52.69		




<b>Band</b>	<b>WCDMA Band V</b>		<b>Test channel:</b>	<b>Lowest</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>		<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1652.80	Vertical	-52.47	-13.00	PASS
2479.20	V	-52.88		
3305.60	V	-50.10		
1652.80	Horizontal	-49.45		
2479.20	H	-51.18		
3305.60	H	-53.09		
<b>Test mode:</b>	<b>WCDMA Band V</b>		<b>Test channel:</b>	<b>Middle</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>		<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1673.20	Vertical	-50.41	-13.00	PASS
2509.80	V	-48.56		
3346.40	V	-53.01		
1673.20	Horizontal	-51.79		
2509.80	H	-50.21		
3346.40	H	-52.65		
<b>Test mode:</b>	<b>WCDMA Band V</b>		<b>Test channel:</b>	<b>Highest</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>		<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1693.20	Vertical	-52.99	-13.00	PASS
2539.80	V	-51.37		
3386.40	V	-50.81		
1693.20	Horizontal	-49.60		
2539.80	H	-52.29		
3386.40	H	-48.06		

<b>Band</b>	<b>WCDMA Band II</b>		<b>Test channel:</b>	<b>Lowest</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>		<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3704.80	Vertical	-50.18	-13.00	PASS
5557.20	V	-47.60		
7409.60	V	-51.25		
3704.80	Horizontal	-53.11		
5557.20	H	-49.76		
7409.60	H	-52.78		
<b>Test mode:</b>	<b>WCDMA Band II</b>		<b>Test channel:</b>	<b>Middle</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>		<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3760.00	Vertical	-51.41	-13.00	PASS
5640.00	V	-52.59		
7520.00	V	-50.56		
3760.00	Horizontal	-46.98		
5640.00	H	-51.49		
7520.00	H	-53.75		
<b>Test mode:</b>	<b>WCDMA Band II</b>		<b>Test channel:</b>	<b>Highest</b>
<b>Test mode:</b>	<b>RMC 12.2Kbps Link (QPSK)</b>		<b>Temperature :</b>	<b>25°C</b>
			<b>Relative Humidity:</b>	<b>56%</b>
<b>Note:</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3815.20	Vertical	-51.67	-13.00	PASS
5722.80	V	-49.32		
7630.40	V	-51.83		
3815.20	Horizontal	-53.87		
5722.80	H	-49.11		
7630.40	H	-51.60		

## 6.7. Frequency Stability Measurement

### 6.7.1. Test Specification
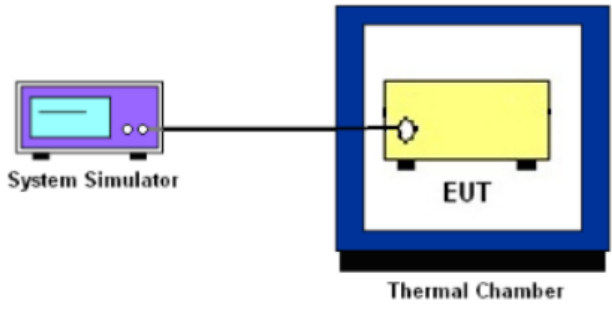
<b>Test Requirement:</b>	FCC Part 2.1055 ; FCC Part 22.355 ; FCC Part 24.235 FCC Part 27.54
<b>Test Method:</b>	FCC Part 2.1055(a)(1)(b)
<b>Operation mode:</b>	Refer to item 4.1
<b>Limit:</b>	±2.5 ppm
<b>Test Setup:</b>	 <p>The diagram shows a purple 'System Simulator' connected by a cable to a yellow 'EUT' (Equipment Under Test) which is housed inside a blue 'Thermal Chamber'.</p>
<b>Test Procedure:</b>	<p><b>Test Procedures for Temperature Variation</b></p> <ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 v02r02 Section 9.0.</li> <li>2. The EUT was set up in the thermal chamber and connected with the system simulator.</li> <li>3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.</li> <li>4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.</li> </ol> <p><b>Test Procedures for Voltage Variation</b></p> <ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 v02r02 Section 9.0.</li> <li>2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.</li> <li>3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.</li> <li>4. The variation in frequency was measured for the worst case.</li> </ol>
<b>Test Result:</b>	PASS
<b>Remark:</b>	All three channels of all modulations have been tested, but only the worst channel and the worst modulation show in this test item.

**6.7.2. Test Instruments**

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Oct. 13, 2017
Programable tempratuce and humidity chamber	JQ	JQ-2000	N/A	Oct. 13, 2017
DC power supply	Kingrang	KR3005K 30V/5A	N/A	Oct. 13, 2017
RF cable (9kHz-40GHz)	TCT	RE-04	N/A	Oct. 13, 2017
Antenna Connector	TCT	RFC-03	N/A	Oct. 13, 2017

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.7.3. Test Data

Test Result of Temperature Variation

<b>Band :</b>	<b>GSM 850</b>	<b>Channel:</b>	<b>190</b>
<b>Limit (ppm) :</b>	<b>2.5</b>	<b>Frequency:</b>	<b>836.6MHz</b>
Temperature (°C)	Deviation (ppm)		Result
50	0.017		PASS
40	0.014		
30	0.012		
20	0.011		
10	0.011		
0	0.014		
-10	0.010		
-20	0.012		
-30	0.013		

<b>Band :</b>	<b>GSM 1900</b>	<b>Channel:</b>	<b>661</b>
<b>Limit (ppm) :</b>	<b>Note</b>	<b>Frequency:</b>	<b>1880MHz</b>
Temperature (°C)	Deviation (ppm)		Result
50	0.022		PASS
40	0.024		
30	0.020		
20	0.021		
10	0.019		
0	0.022		
-10	0.020		
-20	0.021		
-30	0.022		

**Note:** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

<b>Band :</b>	<b>WCDMA Band V</b>	<b>Channel:</b>	<b>4183</b>
<b>Limit (ppm) :</b>	<b>2.5ppm</b>	<b>Frequency:</b>	<b>836.6MHz</b>
<b>Temperature (°C)</b>	<b>RMC 12.2Kbps Deviation (ppm)</b>		<b>Result</b>
50	0.021		PASS
40	0.019		
30	0.020		
20	0.018		
10	0.017		
0	0.015		
-10	0.011		
-20	0.010		
-30	0.015		

<b>Band :</b>	<b>WCDMA Band II</b>	<b>Channel:</b>	<b>9400</b>
<b>Limit (ppm) :</b>	<b>Note</b>	<b>Frequency:</b>	<b>1880MHz</b>
<b>Temperature (°C)</b>	<b>RMC 12.2Kbps Deviation (ppm)</b>		<b>Result</b>
50	0.019		PASS
40	0.016		
30	0.015		
20	0.015		
10	0.017		
0	0.021		
-10	0.016		
-20	0.013		
-30	0.017		

**Note:** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

**Test Result of Voltage Variation**

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH190	GSM	4.2	+0.012	2.5	PASS
		3.8	+0.010		
		BEP	+0.009		
GSM 1900 CH661	GSM	4.2	+0.019	(Note 3.)	
		3.8	+0.021		
		BEP	+0.015		
WCDMA Band V CH4182	RMC 12.2Kbps	4.2	-0.017	2.5	
		3.7	-0.013		
		BEP	-0.015		
WCDMA Band II CH9400	RMC 12.2Kbps	4.2	-0.011	(Note 3.)	
		3.7	-0.012		
		BEP	-0.013		

**Note:**



1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.40 V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

**Appendix A: Photographs of Test Setup**

Product: Mobile phone

Model: F4001

Radiated Emission

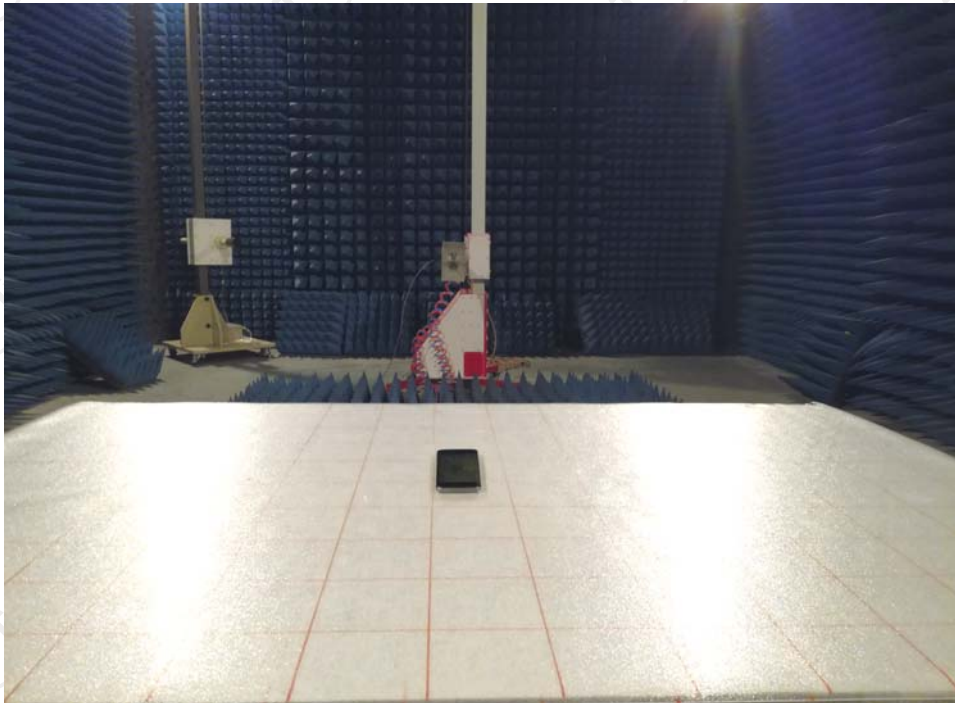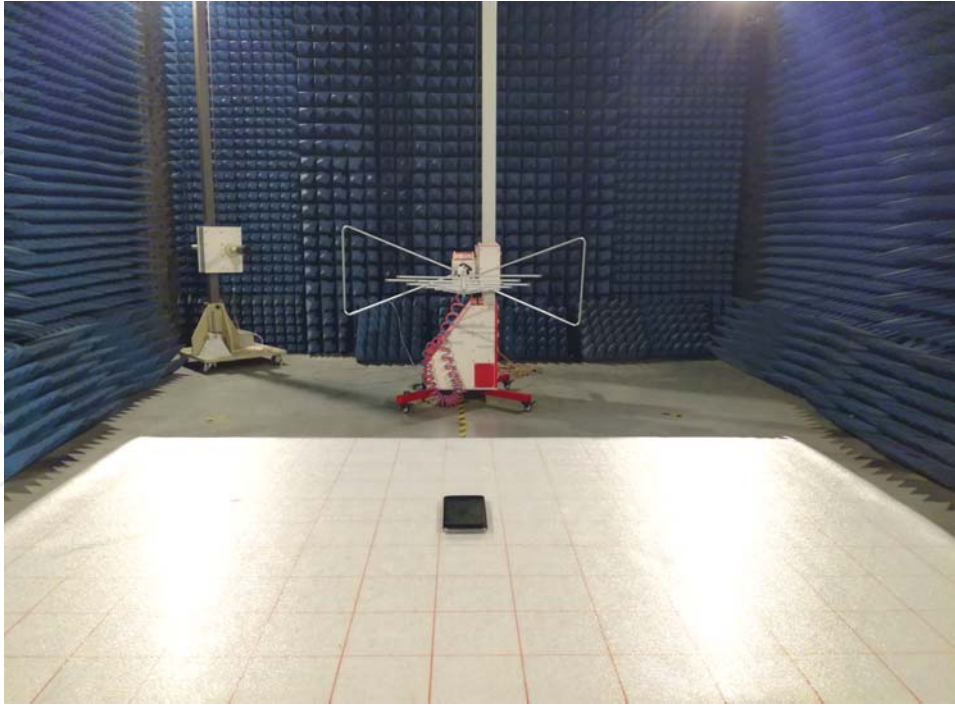



## Appendix B: Photographs of EUT

Refer to test report TCT170705E025

**\*\*\*\*\*END OF REPORT\*\*\*\*\***