



FCC Part 15C Test Report

FCC ID:2AKVJH2S

Product Name:	Electric skateboard
Trademark:	N/A
Model Name :	H2S
Prepared For :	Shenzhen Dongboshi tech co., Ltd
Address :	3 floor B, 1st building , NanFengCheng Industrial Area, ChuangYe Road NO.11, ShiYanRoad Shilongzai Community, BaoAn district, Shenzhen City.
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101, Yousong Road, Longhua New District, Shenzhen,China
Test Date:	Dec. 02 - Dec. 22, 2016
Date of Report :	Dec. 22, 2016
Report No.:	BCTC-FY161105555E



VERIFICATION OF COMPLIANCE

Applicant's name.....: **Shenzhen Dongboshi tech co., Ltd**

Address.....: 3 floor B, 1st building , NanFengCheng Industrial Area,
ChuangYe Road NO.11, ShiYanRoad Shilongzai Community,
BaoAn district, Shenzhen City.

Manufacture's Name.....: **Shenzhen Dongboshi tech co., Ltd**

Address.....: 3 floor B, 1st building , NanFengCheng Industrial Area,
ChuangYe Road NO.11, ShiYanRoad Shilongzai Community,
BaoAn district, Shenzhen City.

Product description

Product name.....: Electric skateboard

Trademark: N/A

Model Name: H2S

Standards: FCC Part15.249-2016
ANSI C63.10-2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Test Result.....: **Pass**

Testing Engineer : _____

Eric Yang

Eric Yang

Reviewer
(Supervisor) : _____

Simon Wang

Simon Wang

Approved &
Authorized
Signer(Manager) : _____



Carson Zhang



Table of Contents

Page

. SUMMARY OF TEST RESULTS.....	5
TEST FACILITY.....	5
MEASUREMENT UNCERTAINTY.....	5
. GENERAL INFORMATION.....	6
GENERAL DESCRIPTION OF EUT.....	6
DESCRIPTION OF TEST MODES.....	7
TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING.....	7
BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED.....	8
DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE).....	9
EQUIPMENTS LIST FOR ALL TEST ITEMS.....	10
. EMC EMISSION TEST.....	11
CONDUCTED EMISSION MEASUREMENT.....	11
POWER LINE CONDUCTED EMISSION LIMITS.....	11
TEST PROCEDURE.....	12
DEVIATION FROM TEST STANDARD.....	12
TEST SETUP.....	12
EUT OPERATING CONDITIONS.....	12
TEST RESULTS.....	13
RADIATED EMISSION MEASUREMENT.....	15
RADIATED EMISSION LIMITS.....	15
TEST PROCEDURE.....	16
DEVIATION FROM TEST STANDARD.....	16
TEST SETUP.....	17
EUT OPERATING CONDITIONS.....	18
TEST RESULTS	19
. BANDWIDTH TEST.....	23
APPLIED PROCEDURES / LIMIT.....	23
TEST PROCEDURE.....	23
DEVIATION FROM STANDARD.....	23
TEST SETUP.....	23
EUT OPERATION CONDITIONS.....	23
TEST RESULTS.....	24
. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	26
DEVIATION FROM STANDARD.....	27
TEST SETUP.....	27



Table of Contents

Page

EUT OPERATION CONDITIONS.....	27
TEST RESULTS.....	27
. ANTENNA REQUIREMENT.....	30
STANDARD REQUIREMENT.....	30
EUT ANTENNA.....	30
. EUT TEST PHOTO.....	31
. EUT PHOTO.....	33



. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207(a)	Conducted Emission	PASS	
15.209(a)&&15.249(a) &15.249(c)&15.205(a)	Fundamental &Radiated Spurious Emission Measurement	PASS	
15.215(c)	Bandwidth	PASS	
15.249(d)	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add.:No.101,Yousong Road,Longhua New District, Shenzhen,China

FCC Registration No.:187086

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



. GENERAL INFORMATION

GENERAL DESCRIPTION OF EUT

Equipment	Electric skateboard	
Trade Name	N/A	
Model Name	H2S	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Electric skateboard	
	Operation Frequency:	2402MHz-2480MHz
	Modulation Type:	GFSK
	Number Of Channel	16CH
	Antenna Designation:	Please see Note 3.
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Battery	DC 3.7V/400mAh	
Connecting I/O Port(s)	Please refer to the User's Manual	
hardware version	C-2235-1.3	
Software version	V1.0	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	07	2431	13	2471
02	2405	08	2434	14	2474
03	2408	09	2445	15	2477
04	2411	10	2448	16	2480
05	2425	11	2451	----	----
06	2428	12	2454	----	----

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	Internal Antenna	N/A	0dBi	

DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH01	GFSK
Mode 2	CH08	
Mode 3	CH16	
Mode 4	Link mode	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test


TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Frequency	2402 MHz	2434MHz	2480 MHz
Channel	Low	Middle	High



BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

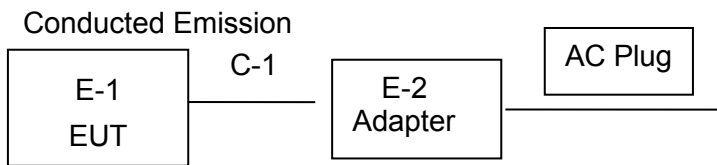

Radiated Spurious Emission Test



**DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Electric skateboard	N/A	H2S	N/A	EUT
E-2	Adapter	N/A	N/A	N/A	Peripheral

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	0.8m	Adapter Cable

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



EQUIPMENTS LIST FOR ALL TEST ITEMS

For Conducted Emission at the mains terminals Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	843 Shielded Room	ChengYu	843 Room	843	2016.07.06	2017.07.05	1 year
2	EMI Receiver	R&S	ESCI	101421	2016.06.07	2017.06.06	1 year
3	LISN	Schwarzbeck	NSLK8127	8127739	2016.07.06	2017.07.05	1 year
4	Attenuator	R&S	ESH3-Z2	BCTC021E	2016.06.07	2017.06.06	1 year

Radiation test, Band-edge test and 20db bandwidth test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2016.07.06	2017.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year
3	Bilog Antenna	R&S	VULB 9168	VULB9168-438	2016.07.06	2017.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.07	2017.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.06.07	2017.06.06	1 year
6	Horn Antenna	R&S	HF906	10027	2016.07.06	2017.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year
8	Amplifier	R&S	BBV9743	9743-019	2016.08.25	2017.08.24	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year
10	RF cables	R&S	R203	R20X	2016.07.06	2017.07.05	1 year
11	Antenna connector	Florida RFLabs	Lab-Fle	RF 01#	2016.07.06	2017.07.05	1 year



. EMC EMISSION TEST

CONDUCTED EMISSION MEASUREMENT

POWER LINE CONDUCTED EMISSION Limits

(Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quas -peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

DEVIATION FROM TEST STANDARD

No deviation

TEST SETUP

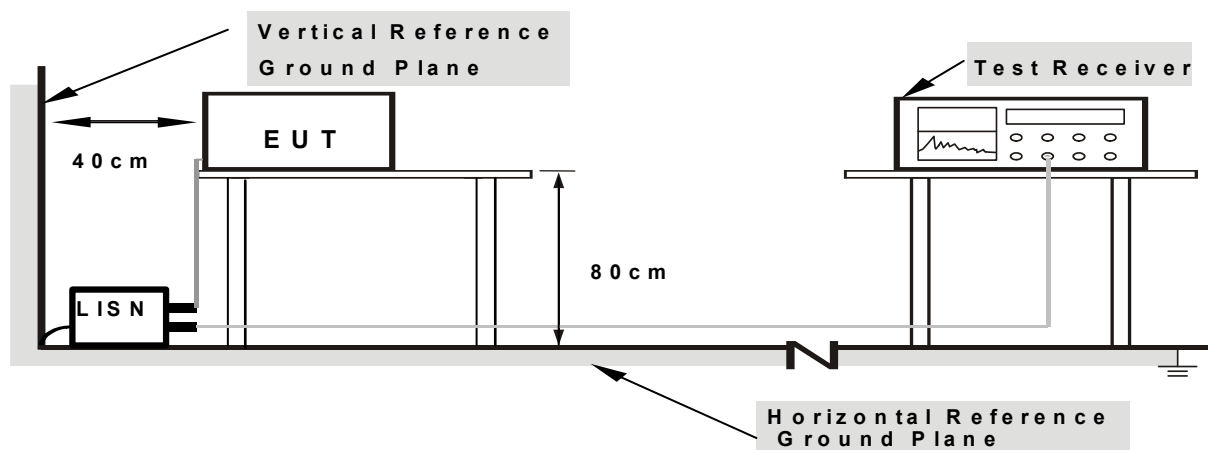


Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

**TEST RESULTS**


Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	Input: AC120V/60Hz Output: DC 5V	Test Mode :	Mode4

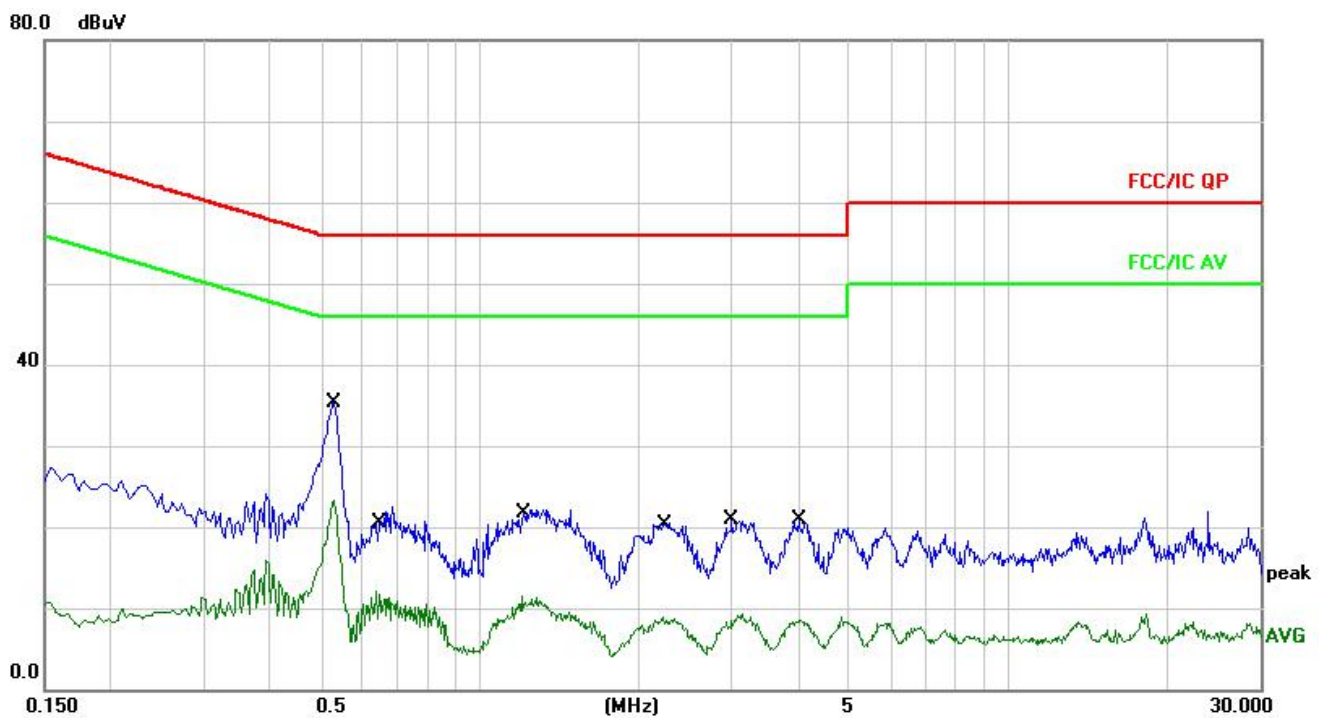

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1	*	0.5299	25.56	9.68	35.24	56.00	-20.76	QP	
2		0.5299	13.60	9.68	23.28	46.00	-22.72	AVG	
3		0.6380	12.76	9.68	22.44	56.00	-33.56	QP	
4		0.6380	2.51	9.68	12.19	46.00	-33.81	AVG	
5		1.2020	12.45	9.69	22.14	56.00	-33.86	QP	
6		1.2020	1.73	9.69	11.42	46.00	-34.58	AVG	
7		2.2220	10.73	9.72	20.45	56.00	-35.55	QP	
8		2.2220	-0.79	9.72	8.93	46.00	-37.07	AVG	
9		3.0020	11.24	9.72	20.96	56.00	-35.04	QP	
10		3.0020	-0.41	9.72	9.31	46.00	-36.69	AVG	
11		4.0140	11.17	9.73	20.90	56.00	-35.10	QP	
12		4.0140	-1.19	9.73	8.54	46.00	-37.46	AVG	



Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	Input: AC120V/60Hz Output: DC 5V	Test Mode :	Mode4

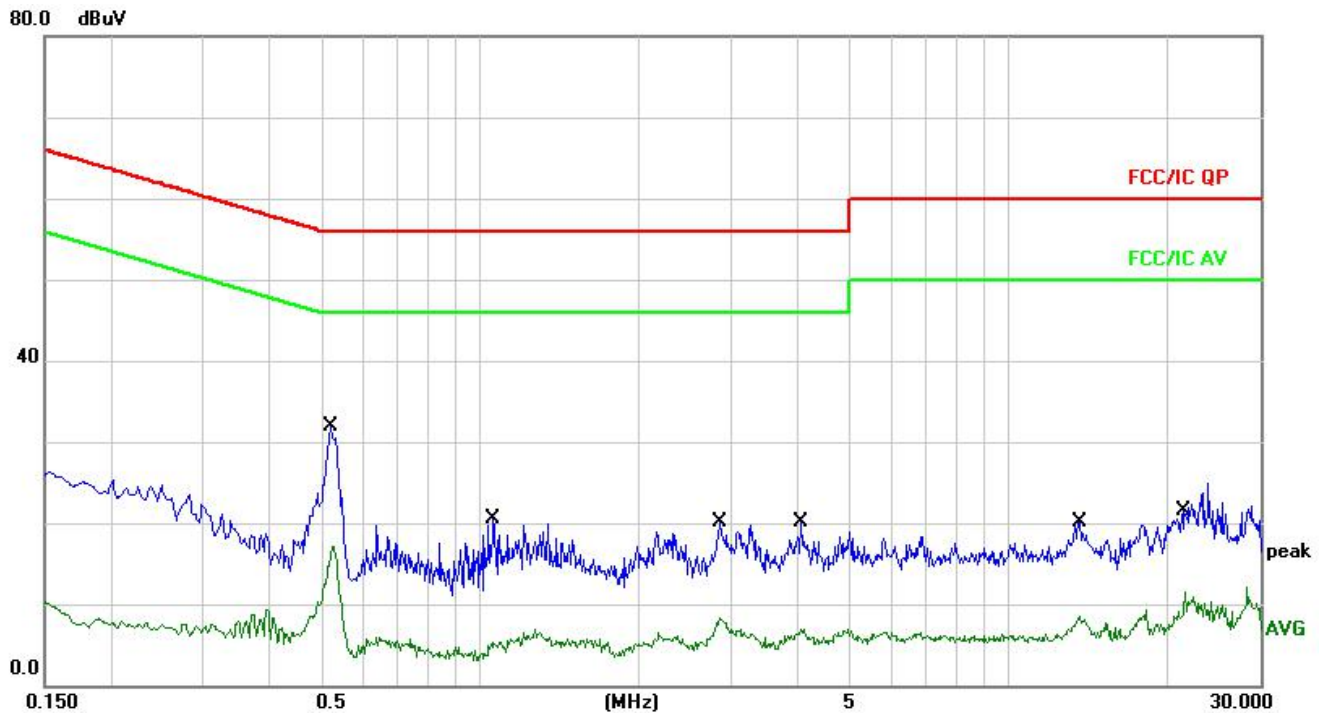

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.5220	22.32	9.68	32.00	56.00	-24.00	QP	
2		0.5220	7.50	9.68	17.18	46.00	-28.82	AVG	
3		1.0620	10.71	9.69	20.40	56.00	-35.60	QP	
4		1.0620	-3.72	9.69	5.97	46.00	-40.03	AVG	
5		2.8540	10.40	9.72	20.12	56.00	-35.88	QP	
6		2.8540	-1.35	9.72	8.37	46.00	-37.63	AVG	
7		4.0500	10.44	9.73	20.17	56.00	-35.83	QP	
8		4.0500	-2.84	9.73	6.89	46.00	-39.11	AVG	
9		13.6660	10.32	9.84	20.16	60.00	-39.84	QP	
10		13.6660	-1.34	9.84	8.50	50.00	-41.50	AVG	
11		21.6620	14.99	9.85	24.84	60.00	-35.16	QP	
12		21.6620	1.57	9.85	11.42	50.00	-38.58	AVG	



RADIATED EMISSION MEASUREMENT

RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

DEVIATION FROM TEST STANDARD


No deviation

TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

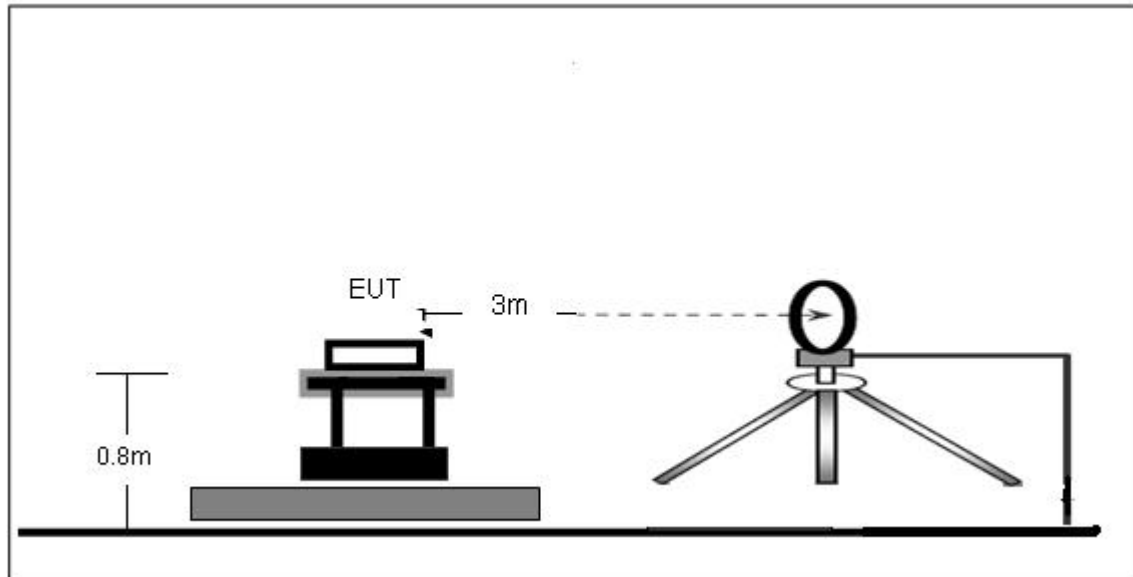

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

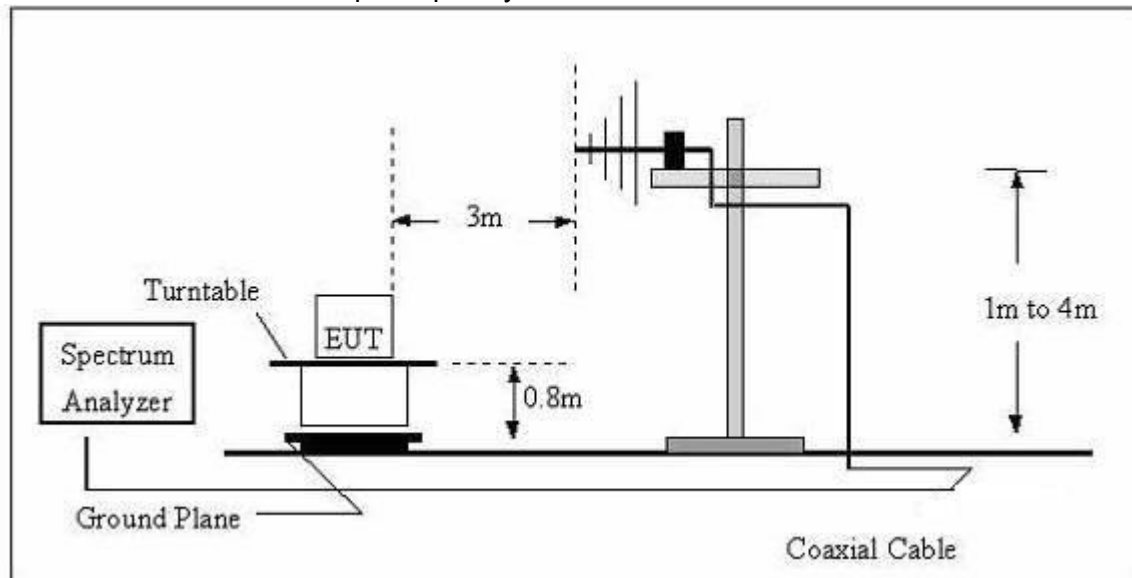

(C) Radiated Emission Test-Up Frequency Above 1GHz

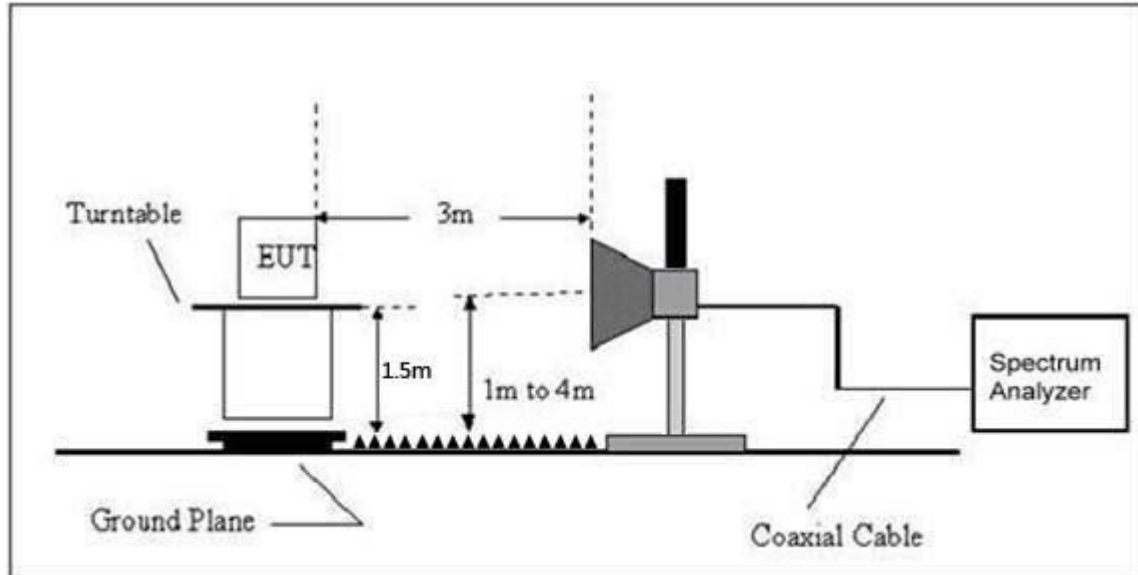

EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



TEST RESULTS

Radiated Spurious Emission (Below 30MHz)

Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 3.7V		
Test Mode :	Mode 4		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



Radiated Spurious Emission (Between 30MHz – 1GHz)

Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode : (Worst)	Mode 4		



No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1	56.5929	24.74	-15.55	9.19	40.00	-30.81	QP		
2	100.9339	23.82	-16.42	7.40	43.50	-36.10	QP		
3	199.9856	27.12	-15.63	11.49	43.50	-32.01	QP		
4	259.2338	28.73	-13.43	15.30	46.00	-30.70	QP		
5	339.5888	29.98	-10.77	19.21	46.00	-26.79	QP		
6 *	437.1199	27.99	-8.58	19.41	46.00	-26.59	QP		



Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode : (Worst)	Mode 4		



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1	*	36.7662	32.06	-16.72	15.34	40.00	-24.66	QP		
2		42.7496	28.72	-14.98	13.74	40.00	-26.26	QP		
3		91.8163	26.58	-17.76	8.82	43.50	-34.68	QP		
4		126.3286	28.96	-19.24	9.72	43.50	-33.78	QP		
5		259.2338	29.64	-13.43	16.21	46.00	-29.79	QP		
6		403.2500	28.62	-9.32	19.30	46.00	-26.70	QP		


Radiated Spurious Emission (1GHz to 10th harmonics)

	Freq.	Receiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Margin	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
Lower Channel 2402MHz	2402	89.27	PK	H	13.85	103.12	114	-10.88	Pass
	2402	70.98	Ave	H	13.85	84.83	94	-9.17	Pass
	4804	50.34	PK	H	19.33	69.67	74	-4.33	Pass
	4804	27.29	Ave	H	19.33	46.62	54	-7.38	Pass
	2402	88.39	PK	V	13.85	102.24	114	-11.76	Pass
	2402	70.44	Ave	V	13.85	84.29	94	-9.71	Pass
	4804	49.68	PK	V	19.33	69.01	74	-4.99	Pass
	4804	28.53	Ave	V	19.33	47.86	54	-6.14	Pass
Middle Channel 2440MHz	2440	88.3	PK	H	13.94	102.24	114	-11.76	Pass
	2440	70.15	Ave	H	13.94	84.09	94	-9.91	Pass
	4880	48.76	PK	H	19.43	68.19	74	-5.81	Pass
	4880	30.57	Ave	H	19.43	50.00	54	-4.00	Pass
	2440	89.04	PK	V	13.94	102.98	114	-11.02	Pass
	2440	71.37	Ave	V	13.94	85.31	94	-8.69	Pass
	4880	49.08	PK	V	19.43	68.51	74	-5.49	Pass
	4880	29.36	Ave	V	19.43	48.79	54	-5.21	Pass
Upper Channel 2480MHz	2480	88.75	PK	H	14.02	102.77	114	-11.23	Pass
	2480	70.39	Ave	H	14.02	84.41	94	-9.59	Pass
	4960	46.25	PK	H	19.51	65.76	74	-8.24	Pass
	4960	28.78	Ave	H	19.51	48.29	54	-5.71	Pass
	2480	87.91	PK	V	14.02	101.93	114	-12.07	Pass
	2480	71.35	Ave	V	14.02	85.37	94	-8.63	Pass
	4960	45.54	PK	V	19.51	65.05	74	-8.95	Pass
	4960	28.28	Ave	V	19.51	47.79	54	-6.21	Pass

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.

**. BANDWIDTH TEST****APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.249) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.249	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100KHz
VB	\geq RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW \geq RBW, Sweep time = Auto.

DEVIATION FROM STANDARD

No deviation.


TEST SETUP**EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**TEST RESULTS**

EUT :	Electric skateboard	Model Name :	H2S
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH01 / CH08 /CH16		

	Frequency	20dB Bandwidth (kHz)	Result
GFSK	2402 MHz	2111	PASS
	2434 MHz	2113	PASS
	2480 MHz	2252	PASS

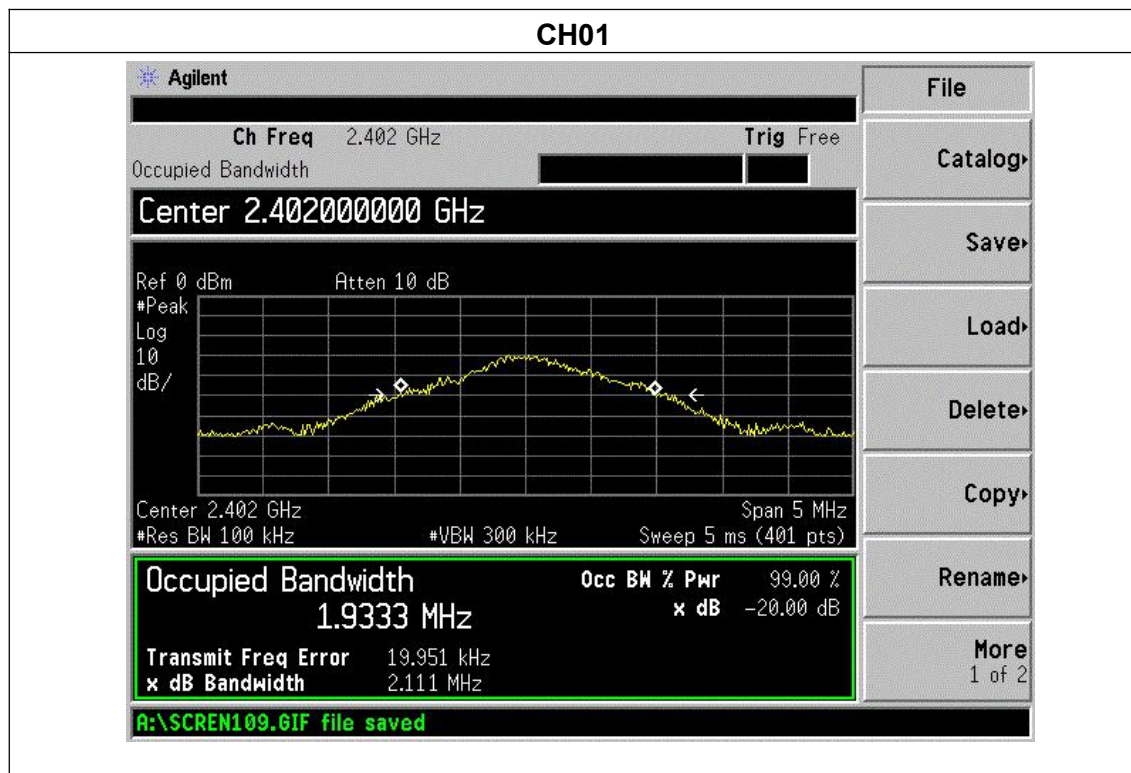




CH08



CH16

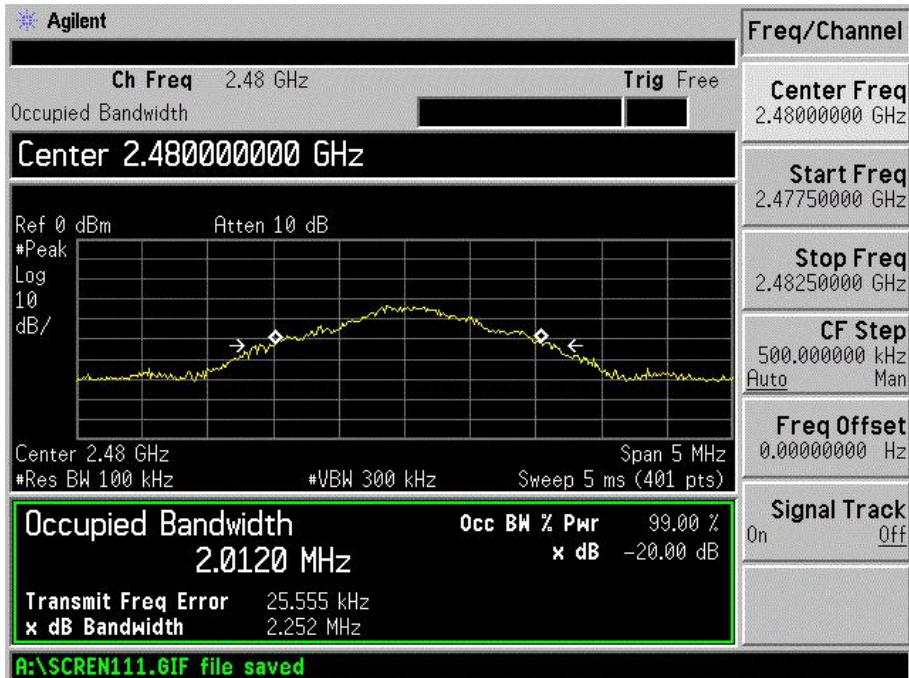



. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.


Note:

Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

DEVIATION FROM STANDARD

No deviation.

TEST SETUP

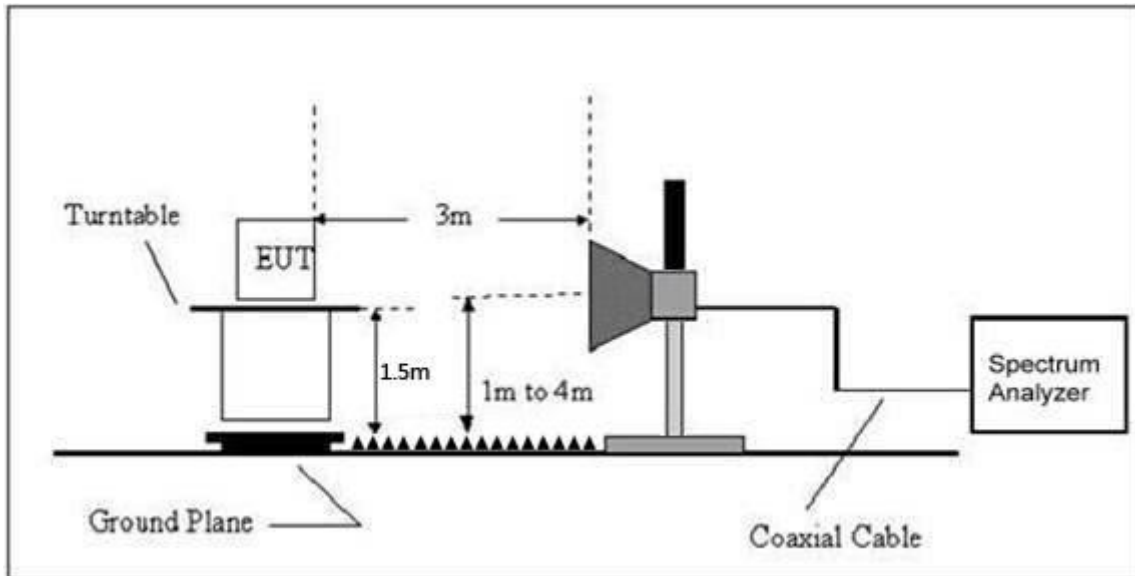

EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

TEST RESULTS


Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH01/ CH16		

	Frequency (MHz)	Antenna polarization (H/V)	Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission (dBuV/m)	Band edge Limit (dBuV/m)		Result
						PK	PK	AV	
GFSK	<2400	H	2390.00	35.39	13.83	49.22	74.00	54.00	Pass
	<2400	V	2390.00	34.98	13.83	48.81	74.00	54.00	Pass
	<2400	H	2400.00	35.45	13.85	49.30	74.00	54.00	Pass
	<2400	V	2400.00	34.90	13.85	48.75	74.00	54.00	Pass
	>2483.5	H	2483.50	35.48	14.02	49.50	74.00	54.00	Pass
	>2483.5	V	2483.50	34.78	14.02	48.80	74.00	54.00	Pass
	>2483.5	H	2485.50	34.99	14.04	49.03	74.00	54.00	Pass
	>2483.5	V	2485.50	35.36	14.04	49.40	74.00	54.00	Pass


If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.



2402MHz Horizontal

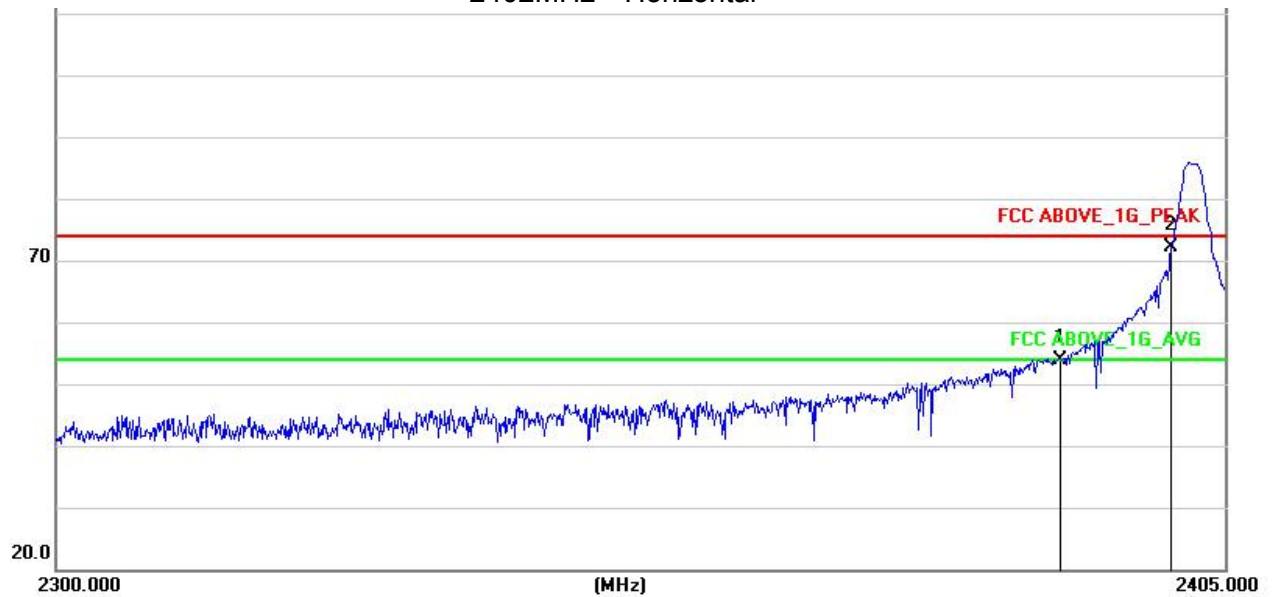


2402MHz Vertical

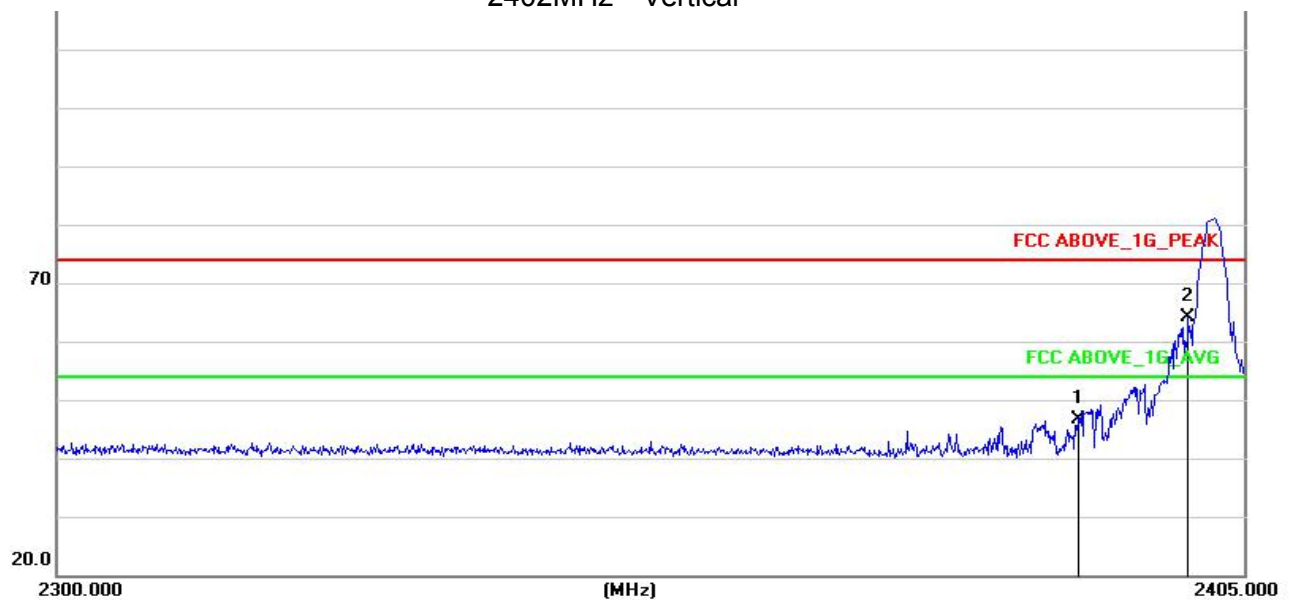




2480MHz Horizontal

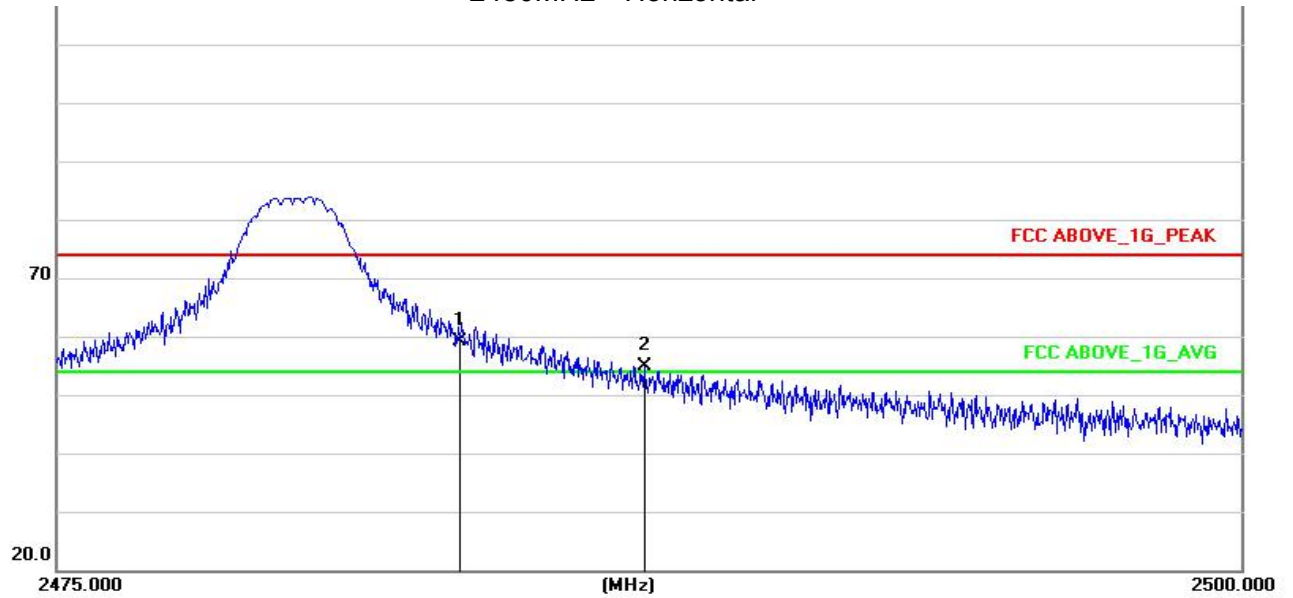

2480MHz Vertical

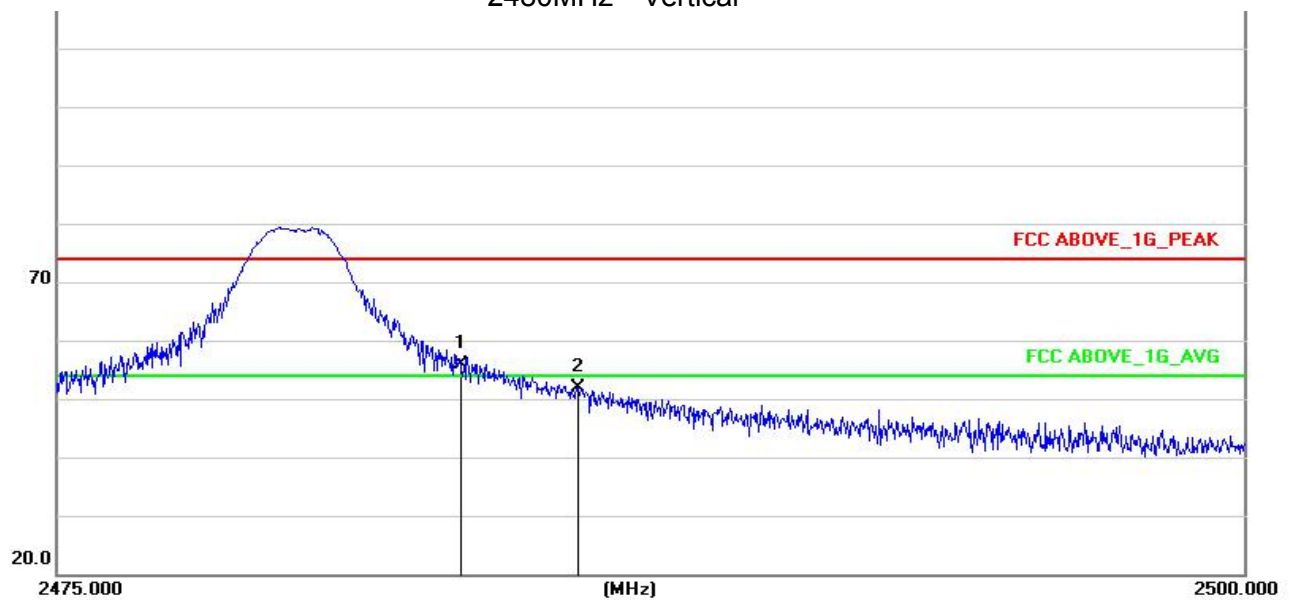



. ANTENNA REQUIREMENT

STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT ANTENNA

The EUT antenna is Internal antenna. It complies with the standard requirement.





. EUT TEST PHOTO

Conducted Measurement Photos



Radiated Measurement Photos

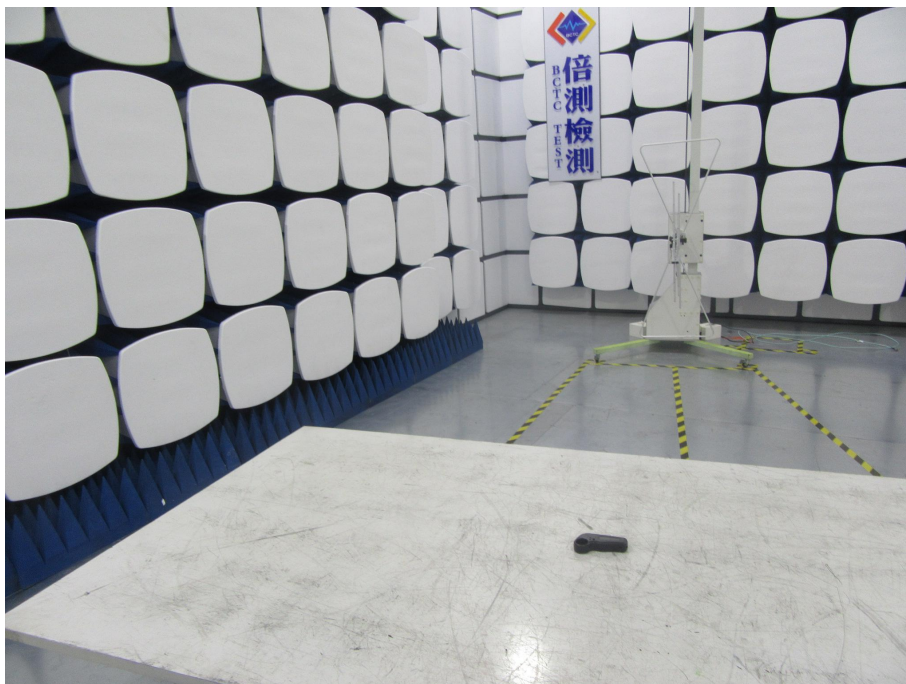

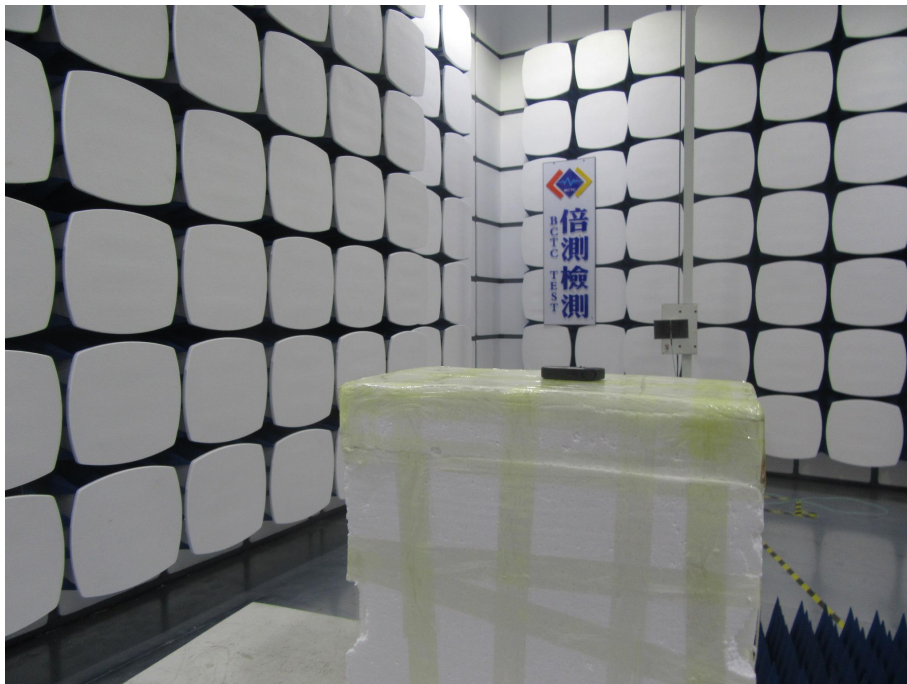



. EUT PHOTO



******* END OF REPORT *******