



Shenzhen Shuodian Electronic Technology Co.,Ltd
Page number 1-10

SPECIFICATION

for

S1 Mini 2.4G WIFI Antenna

Customer No.

400103290

Product No.

WA-S1 Mini 2.4G WIFI-PCB-120MM

Author: XiaofengZeng Review: Liming

Release Date: 2023.04.23

ShenZhen Shuodian Electronic Technology Co., Ltd

508 West, building 64, Jinlong Industrial City, majialong, Nanshan District, Shenzhen

E-mail: sz_shuodian@163.com

Tel: 0755-86006322

Fax: 0755-86006323

Shenzhen Shuodian Electronic Technology Co.,Ltd



Contents

SPECIFICATION	1
SHENZHEN SHUODIAN ELECTRONIC TECHNOLOGY CO., LTD	1
CONTENTS	2
1. BILATERAL CONFIRMATION PAGE	3
2. GENERAL	4
3. GENERAL PRODUCT SPECIFICATIONS	4
4. SPECIFICATION DETIALS	5
4.1 MECHANICAL PROPERTIES	5
4.2 ELECTRIC PERFORMANCE	7
5. PRODUCT PACKAGING	10
6. DOCUMENT RESUME	10



1. Bilateral Confirmation page

1.1 Customer signature

Customer: XIE CHUANG

Seapartment/post	Sign	Date
Hardware Engineer/RD		
Mechanical/MD		
Project Manager/PM		
Commercial/Puchasing		
Checker		

1.2 Signature of ShuoDian Technology company

Seapartment/post	Sign	Date
Antenna Engineer/RD		
Mechanical/MD		
Project Manager/PM		
QA		
Checker		



2. General

2.1 Scope of application

This specification is only applicable to XIECHUANG S1 Mini 2.4G WIFI antenna

2.2 Operating temperature range

Temperature range of this product: -20 ~ +65 °C

2.3 Storage temperature range:

This product is stored at - 30 ~ + 75 °C

3. General product specifications

NO.	ITEMS	DETAILS
1	Type	S1 Mini 2.4G WIFI
2	Operating Frequency Band	2400-2500MHz
3	VSWR	≤2.0
4	Impedance	50Ω
5	Antenna Type	Dipole
6	Antenna composition	PCB
7	Entity Picture	



4. Specification Details

4.1 Mechanical Properties

4.11 Product Composition:

No.	Material	Size (MM)
1	PCB	40.3*7*0.8 Black
2	CABLE	IPEX-1 L=120 black


4.12 Apperance

Good appearance without scars 、 dirts、 protuberances, etc.

4.13 Antenna Picture and Structure Dimension

Product drawings:

Shenzhen Shuodian Electronic Technology Co.,Ltd

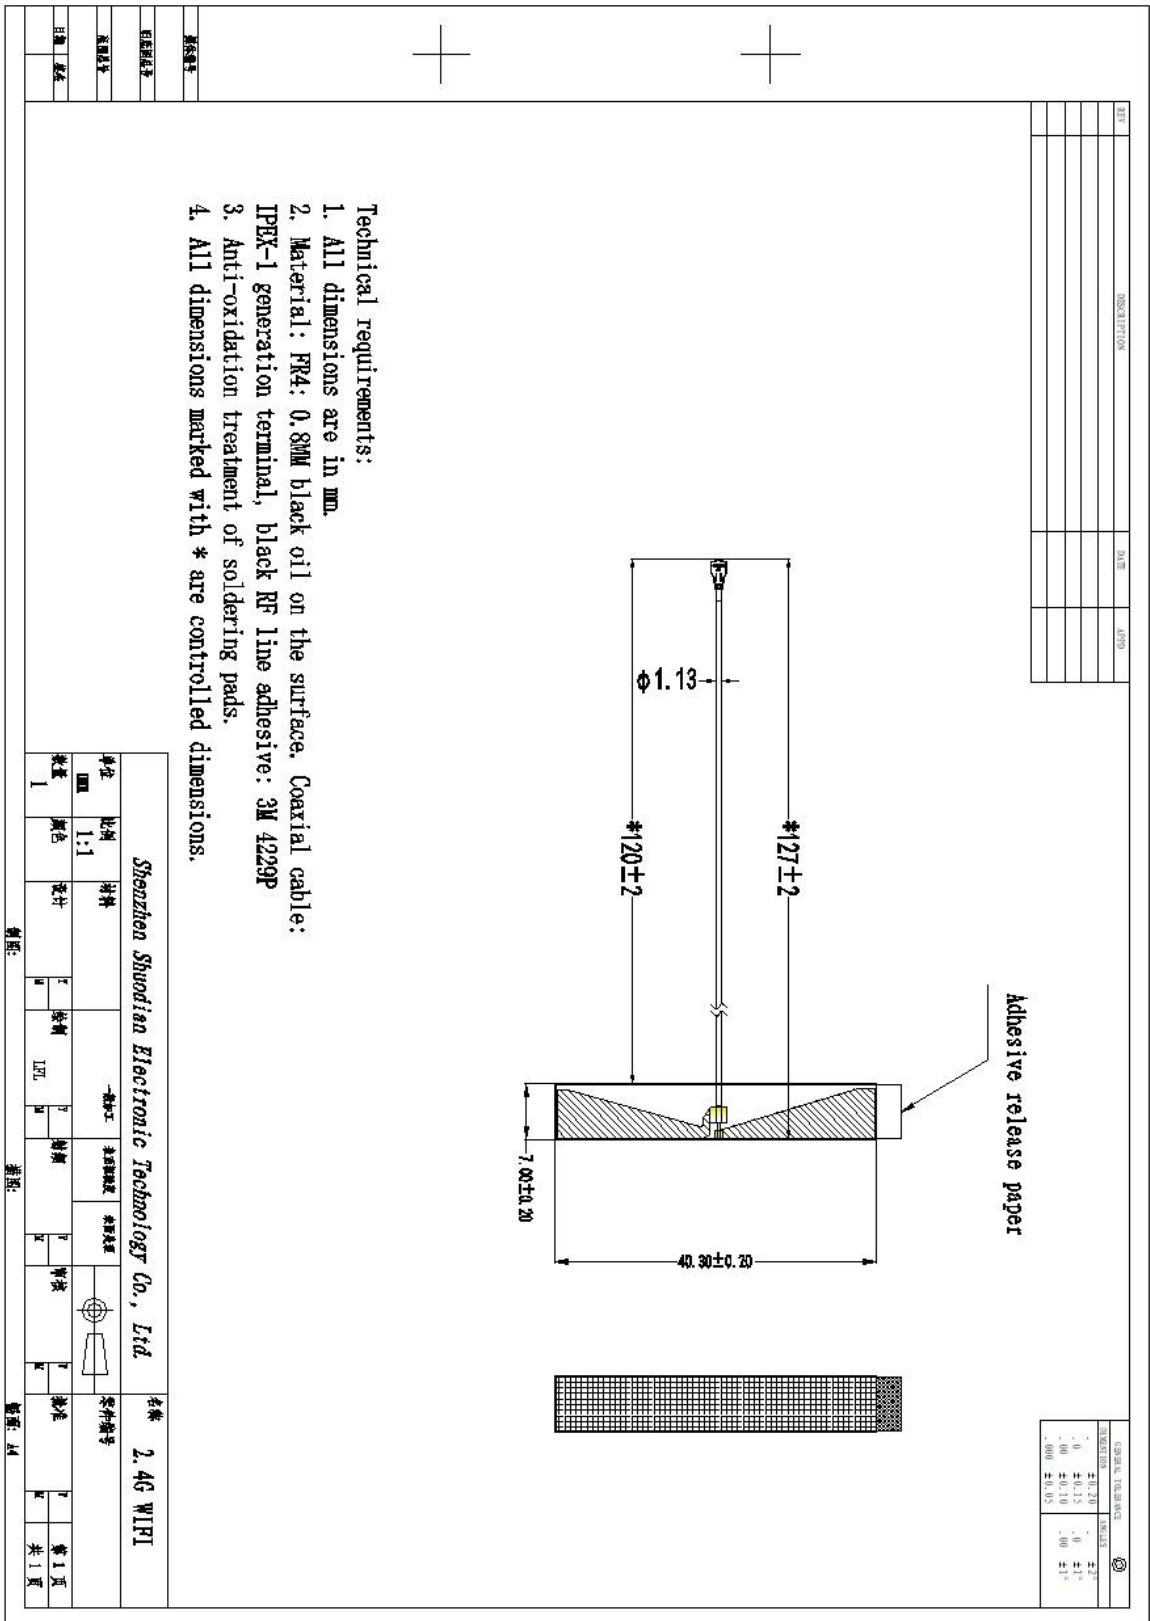



4.2 Electric Performance


4.21 Test condition

Environment:		Equipment:	
Temperature:	10℃——+30℃	Network Analyzer:	Agilent E8358A
Humidity:	≤80% (+40℃)	Anechior Chamber:	ETS
Atmospher:	750mmkg±30mmkg		

4.22 Test Data for Electrical Performance:

4.22.1 S11 of the Antenna:

Marker	2400MHz	2450MHz	2500MHz
Returnloss	-13.2	-19.3	-17.0
VSWR	1.5	1.2	1.3

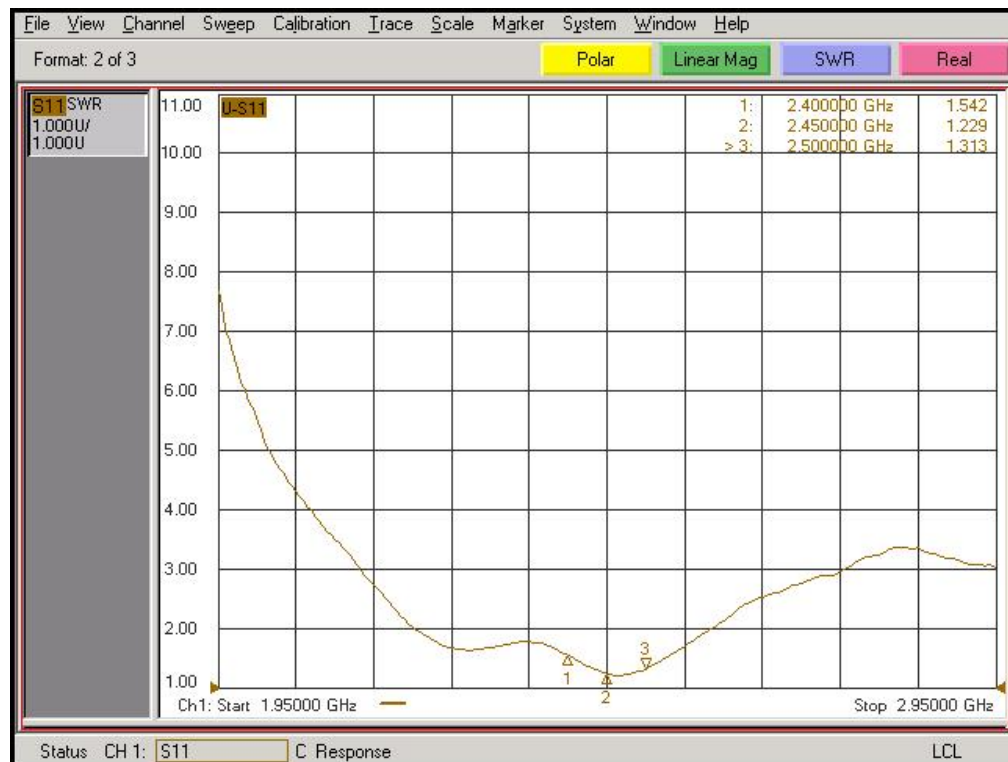





4. 22. 2 Passive gain、 efficiency and Radiation Pattern:

频率 (MHz)	Gain (dBi)	Efficiency (%)
2400.0	2.69	64.1
2410.0	2.52	61.5
2420.0	2.62	63.2
2430.0	2.46	61.6
2440.0	2.63	64.5
2450.0	2.72	66.2
2460.0	3.09	71.7
2470.0	3.10	71.2
2480.0	3.12	71.6
2490.0	3.11	71.8
2500.0	3.06	71.2



Radiation Pattern 2450MHz

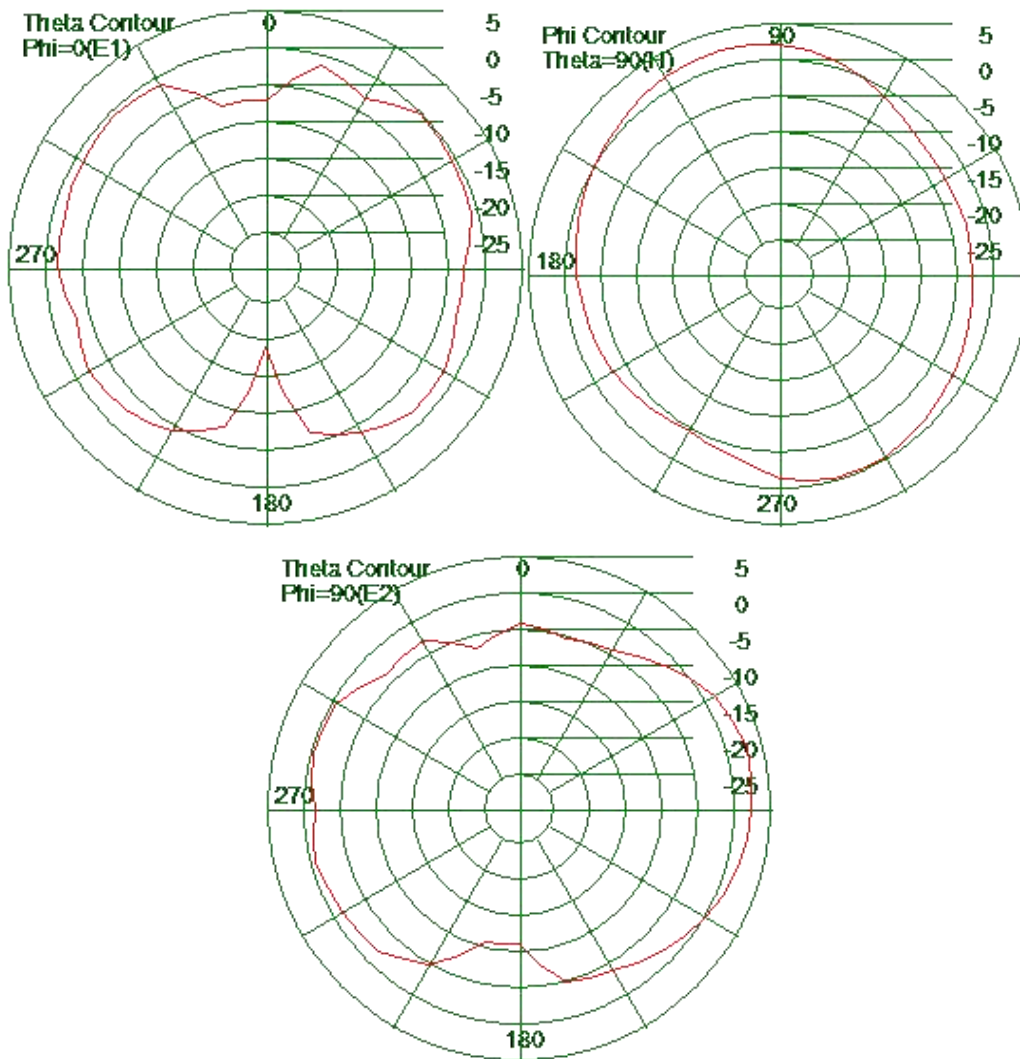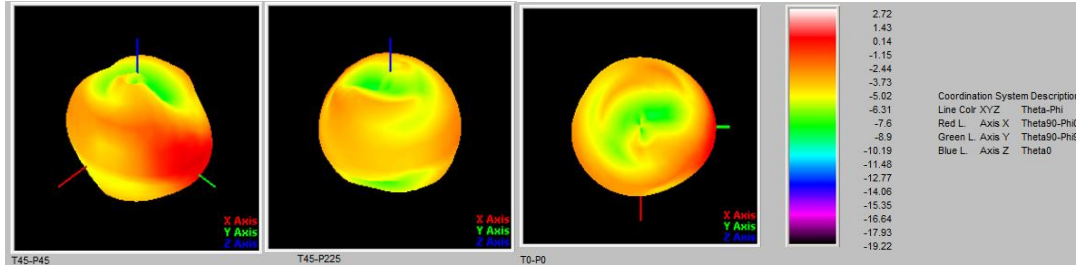



5. Product Packaging

Manner of packing:

Packed in self sealed bags, 200 pcs each.

6. Document Resume

Document No.	
Release Date	2024/04/23
Author	XiofengZeng
Review	LiMing

Revised History

Date	Version	Revised Record
2023/04/23	1.00	New Project