



FCC Test Report

Client Name : Shenzhen Anboqi Technology Co.,Ltd

Client Address : 3F Building B, No.1 Road 1, Shangxue Technology Park
Bantian Town, Longgang District, Shenzhen, Guangdong

Product Name : Battery camera

Report Date : Oct. 12, 2024

Shenzhen Tian Hai Test Technology Co., Ltd.



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	7
1.4. Description of Test Configuration	7
1.5. Description Of Test Setup	8
1.6. Test Equipment List	9
1.7. Measurement Uncertainty	10
1.8. Description of Test Facility	10
2. Summary of Test Results	11
3. Conducted Emission Test	12
3.1. Test Standard and Limit	12
3.2. Test Setup	12
3.3. Test Procedure	12
3.4. Test Data	12
4. Radiation Spurious Emission and Band Edge	15
4.1. Test Standard and Limit	15
4.2. Test Setup	15
4.3. Test Procedure	16
4.4. Test Data	17
5. Maximum Peak Output Power Test	24
5.1. Test Standard and Limit	24
5.2. Test Setup	24
5.3. Test Procedure	24
5.4. Test Data	24
6. 6DB Occupy Bandwidth Test	25
6.1. Test Standard and Limit	25
6.2. Test Setup	25
6.3. Test Procedure	25
6.4. Test Data	25
7. Power Spectral Density Test	26
7.1. Test Standard and Limit	26
7.2. Test Setup	26
7.3. Test Procedure	26
7.4. Test Data	26
8. 100kHz Bandwidth of Frequency Band Edge Requirement	27
8.1. Test Standard and Limit	27
8.2. Test Setup	27
8.3. Test Procedure	27
8.4. Test Data	27



9. Antenna Requirement.....	28
9.1. Test Standard and Requirement.....	28
9.2. Antenna Connected Construction.....	28
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	29
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	29
APPENDIX III -- INTERNAL PHOTOGRAPH.....	29



TEST REPORT


Applicant : Shenzhen Anboqi Technology Co.,Ltd
Manufacturer : Shenzhen Anboqi Technology Co.,Ltd
Product Name : Battery camera
Model No. : ABQ-Q9, ABQ-Q1, ABQ-Q2, ABQ-Q3, ABQ-Q5, ABQ-Q6, ABQ-Q7, ABQ-Q8,
ABQ-Q10, ABQ-Q11, ABQ-Q12, ABQ-Q13, ABQ-Q14, ABQ-Q15, ABQ-Q16,
ABQ-Q17, ABQ-Q18, ABQ-Q19, ABQ-Q20, ABQ-Q21, ABQ-Q22, QXX
Trade Mark : N/A
Rating(s) : DC 5V = 1A

Test Standard(s) : FCC Part15 Subpart C, Section 15.247
Test Method(s) : ANSI C63.10: 2020, KDB558074 D01 DTS Meas Guidance v05r02

The device described above is tested by Shenzhen Tian Hai Test Technology Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Tian Hai Test Technology Co., Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Tian Hai Test Technology Co., Ltd.

Date of Receipt : Oct. 12, 2024
Date of Test : Sept.. 29~Oct. 12, 2024

Tested by : 
(Suny Zhuo)

Reviewed by : 
(Blue Hu)

Approved & Authorized Signer : 
(Binglee)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Oct. 12, 2024



1. General Information

1.1. Client Information

Applicant	:	Shenzhen Anboqi Technology Co.,Ltd
Address	:	3F Building B, No.1 Road 1, Shangxue Technology Park Bantian Town, Longgang District, Shenzhen, Guangdong
Manufacturer	:	Shenzhen Anboqi Technology Co.,Ltd
Address	:	F/9, Building B, No.5, Rd.1, Shangxue Technology Park, Bantian, Longgang Dist., Shenzhen
Factory	:	Shenzhen Anboqi Technology Co.,Ltd
Address	:	F/9, Building B, No.5, Rd.1, Shangxue Technology Park, Bantian, Longgang Dist., Shenzhen

1.2. Description of Device (EUT)

Product Name	:	Battery camera
Model No.	:	ABQ-Q9, ABQ-Q1, ABQ-Q2, ABQ-Q3, ABQ-Q5, ABQ-Q6, ABQ-Q7, ABQ-Q8, ABQ-Q10, ABQ-Q11, ABQ-Q12, ABQ-Q13, ABQ-Q14, ABQ-Q15, ABQ-Q16, ABQ-Q17, ABQ-Q18, ABQ-Q19, ABQ-Q20, ABQ-Q21, ABQ-Q22, QXX(All samples are the same except the model number, so we prepare "ABQ-Q9" for test only.)
Trade Mark	:	/
Test Power Supply	:	DC 5V = 1A
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	/

RF Specification

Operation Mode	:	☒ BT BLE
Support Rate	:	☒ 1Mbps ☐ 2Mbps
Operation Frequency	:	2402~2480MHz
Number of Channel	:	40 Channels
Modulation Type	:	GFSK
Antenna Type	:	FPC Antenna
Antenna Gain(Peak)	:	3.47dBi (Provided by customer)

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



1.3. Auxiliary Equipment Used During Test

Description	Model	Manufacturer
Apple phone	Redmi K50 Ultra	Redmi
Adapter	K24-09	PLSEN

1.4. Description of Test Configuration


Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	09	2420	18	2438	27	2456	36	2474
01	2404	10	2422	19	2440	28	2458	37	2476
02	2406	11	2424	20	2442	29	2460	38	2478
03	2408	12	2426	21	2444	30	2462	39	2480
04	2410	13	2428	22	2446	31	2464		
05	2412	14	2430	23	2448	32	2466		
06	2414	15	2432	24	2450	33	2468		
07	2416	16	2434	25	2452	34	2470		
08	2418	17	2436	26	2454	35	2472		

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT was tested with channel 0, 19 and 39.



1.5. Description Of Test Setup

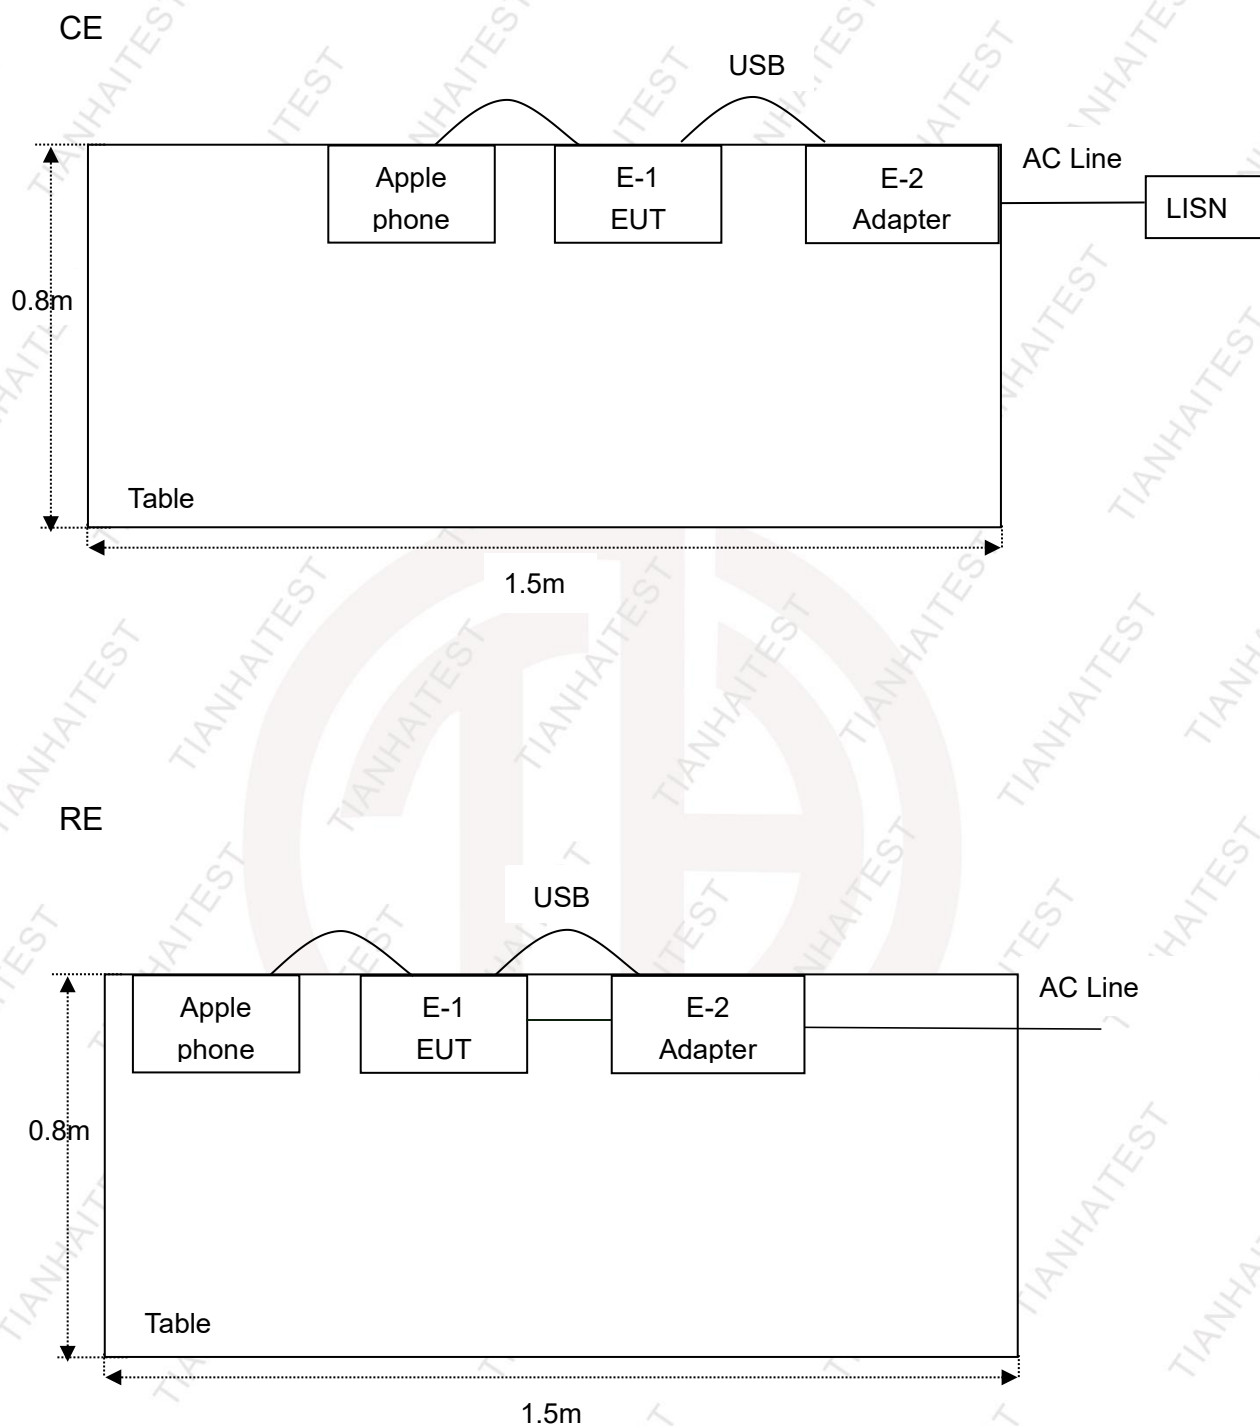



1.6. Test Equipment List

Conducted Emission				
Kind of Equipment	Manufacturer	Type	S/N	Calibrate until
EMI Test Receiver	R&S	ESR7	102333	2024-11-13
L.I.S.N	Schwarzbeck	NNLK 8128	5089	2024-11-13
8-Wire ISN CAT6	Schwarzbeck	NTFM 8158	231	2024-11-13
BT-6058 Limiter	Schwarzbeck	VTSD 9561-F	847	2024-11-13
Test software	FALA	/	EMC-CON 3A1.1	/
Radiated Emission (3m)				
EMI Test Receiver	R&S	ESR7	102333	2024-11-13
MXA Signal Analyzer	Keysight	N9020A	MY51281805	2025-04-22
Bilog Antenna	Schwarzbeck	VULB 9168	01148	2024-11-13
Pre-Amplifier	Schwarzbeck	BBV 9718 B	00109	2024-11-13
Pre-Amplifier	Schwarzbeck	BBV 9743 B	00253	2024-11-13
Pre-Amplifier	GUANGGU ELECTRONIC	GLNA18-40GK-5372	20210331001	2024-11-13
Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00148	2024-11-13
Horn Antenna	Schwarzbeck	BBHA 9120	02379	2024-11-13
Pre-Amplifier	GUANGGU ELECTRONIC	GLNA18-40GK-5372	20210331001	2024-11-13
Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00148	2024-11-13
Broadband horn antenna	OCEAN MICROWAVE	0BH100400	26999002	2024-11-13
Test software	FALA	/	FA-03A2 RE	/
RF Test System				
Wideband radio communication tester	R&S	CMW500	131134	2024-11-13
EXA Signal Analyzer	Keysight	N9010A	MY54488841	2025-04-22
MXG Vector Signal Generator	Agilent	N5182B	MY59100603	2024-11-13
Signal Generator	R&S	SMB100A	113650	2025-04-22
RF control unit	Tonscend	JS0806-2	21C8060397	/
DC Power supply	Agilent	E3632A	MY50120052	/
RF test system	Tonscend	/	V2.6.88.0346	/



1.7. Measurement Uncertainty

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	N/A
Transmitter power conducted	0.57 dB	N/A
Transmitter power Radiated	2.20 dB	N/A
Conducted spurious emission	1.60 dB	N/A
Radiated spurious emission	2.20 dB	N/A
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.10dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: V
	2.56dB	Polarize: H

(1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

(2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

(3) The measurement uncertainty is not included in the test result.

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 173438

Shenzhen Tian Hai Test Technology Co.,Ltd, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 173438

Test Location

Shenzhen Tian Hai Test Technology Co., Ltd.125-126, No.66, Zhangge Road, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, China



2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBUV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

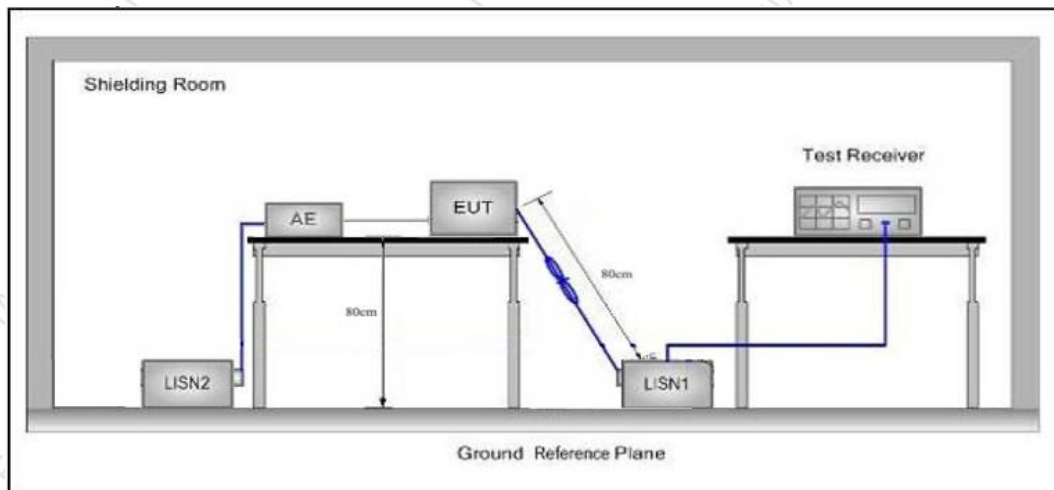

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

During the test, pre-scan all modes, only the worst case is recorded in the report.


AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.

Please to see the following pages.



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: GFSK (2440MHz)
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Temp.(°C)/Hum.(%RH): 22°C/54%RH

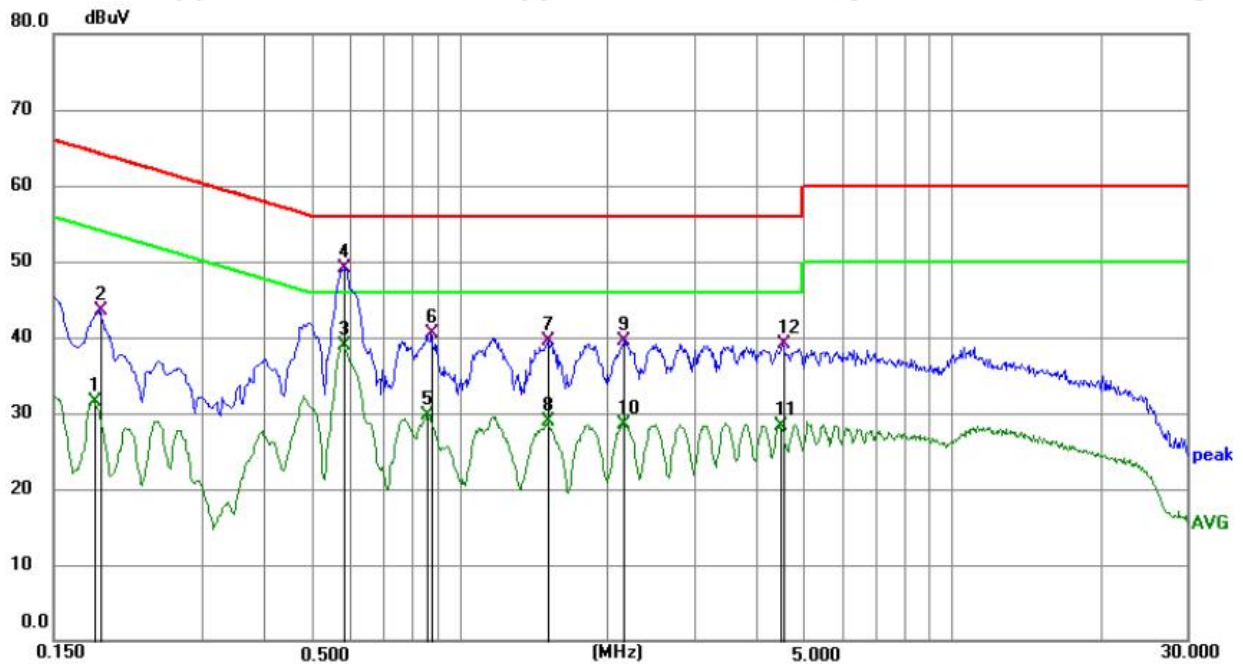


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1815	21.00	10.57	31.57	54.42	-22.85	AVG
2	0.1864	32.91	10.57	43.48	64.20	-20.72	QP
3	0.5823	28.21	10.64	38.85	46.00	-7.15	AVG
4 *	0.5854	38.51	10.65	49.16	56.00	-6.84	QP
5	0.8573	19.09	10.64	29.73	46.00	-16.27	AVG
6	0.8757	29.87	10.64	40.51	56.00	-15.49	QP
7	1.5113	28.79	10.67	39.46	56.00	-16.54	QP
8	1.5113	18.19	10.67	28.86	46.00	-17.14	AVG
9	2.1552	28.90	10.68	39.58	56.00	-16.42	QP
10	2.1552	17.79	10.68	28.47	46.00	-17.53	AVG
11	4.4777	17.64	10.73	28.37	46.00	-17.63	AVG
12	4.5254	28.30	10.72	39.02	56.00	-16.98	QP

Note: Result = Reading + Factor Over Limit = Result - Limit



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: GFSK (2440MHz)
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Temp.(°C)/Hum.(%RH): 22°C/54%RH

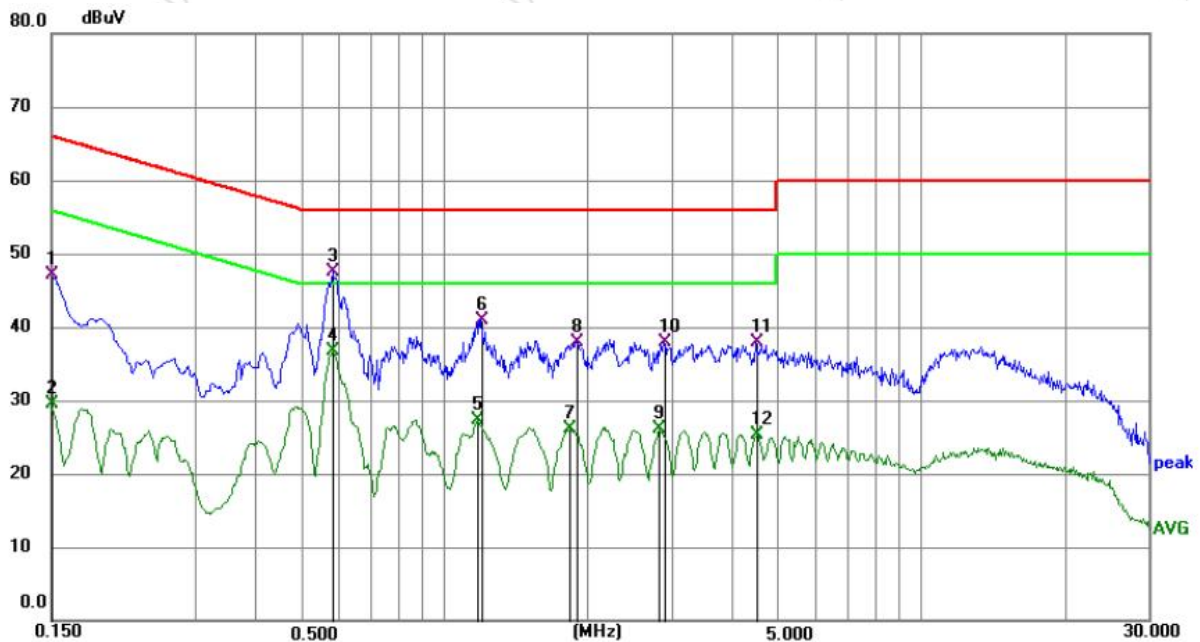

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	36.59	10.59	47.18	66.00	-18.82	QP
2	0.1500	18.91	10.59	29.50	56.00	-26.50	AVG
3 *	0.5820	36.81	10.64	47.45	56.00	-8.55	QP
4	0.5820	26.02	10.64	36.66	46.00	-9.34	AVG
5	1.1760	16.56	10.65	27.21	46.00	-18.79	AVG
6	1.1940	30.28	10.65	40.93	56.00	-15.07	QP
7	1.8375	15.39	10.68	26.07	46.00	-19.93	AVG
8	1.8915	27.22	10.68	37.90	56.00	-18.10	QP
9	2.8365	15.44	10.70	26.14	46.00	-19.86	AVG
10	2.8905	27.17	10.70	37.87	56.00	-18.13	QP
11	4.5195	27.13	10.72	37.85	56.00	-18.15	QP
12	4.5329	14.52	10.72	25.24	46.00	-20.76	AVG

Note: Result = Reading + Factor Over Limit = Result - Limit



4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

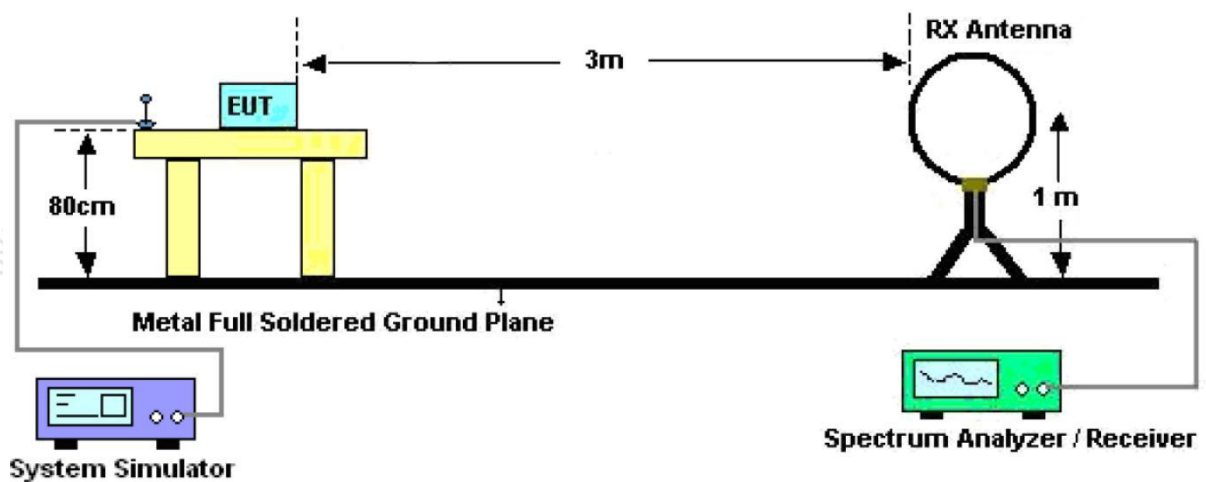


Figure 1. Below 30MHz

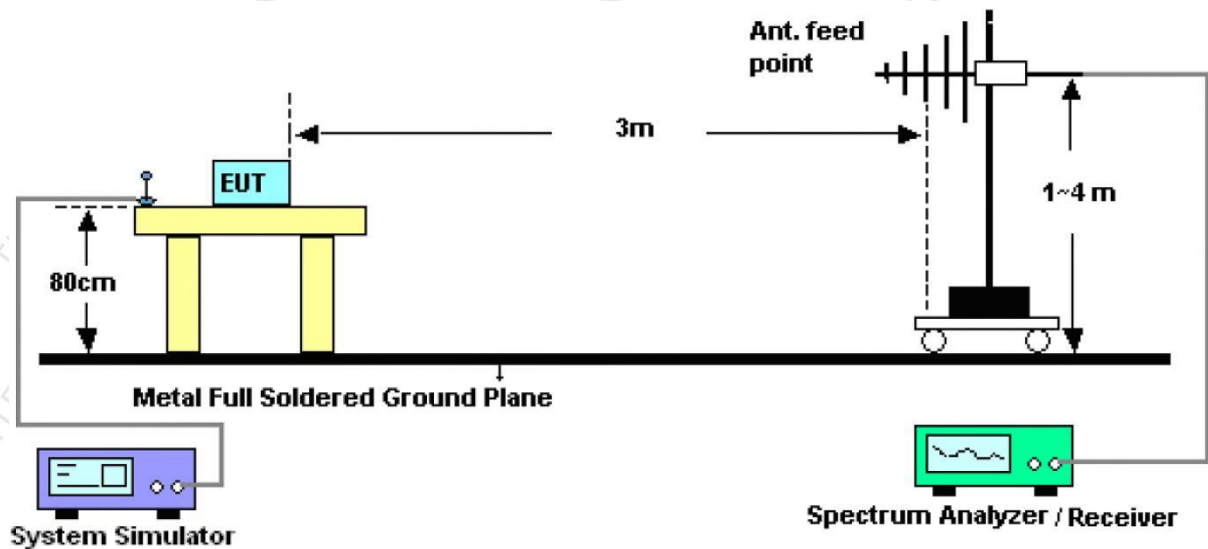


Figure 2. 30MHz to 1GHz

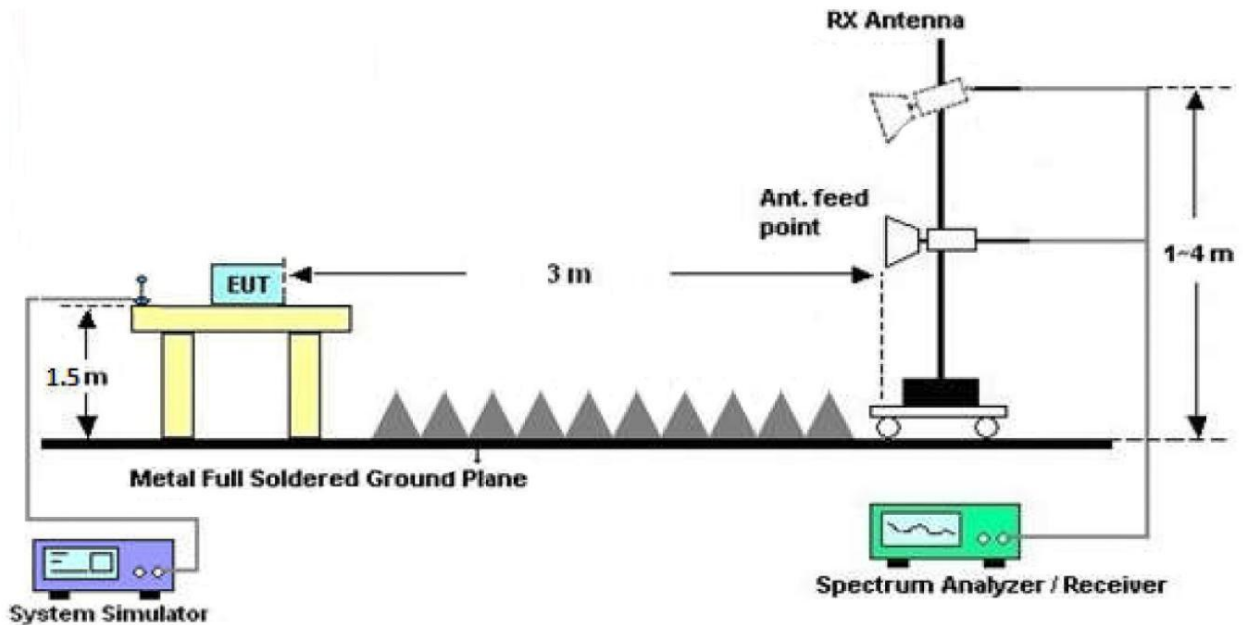


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:



Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

For average measurement:

–VBW=10Hz, When duty cycle is no less than 98 percent

– $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.4 duty cycle.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.



Test Results (30~1000MHz)

Test Mode: GFSK (2402MHz)
Power Source: AC 120V/60Hz for Adapter
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 23.9°C/53%RH

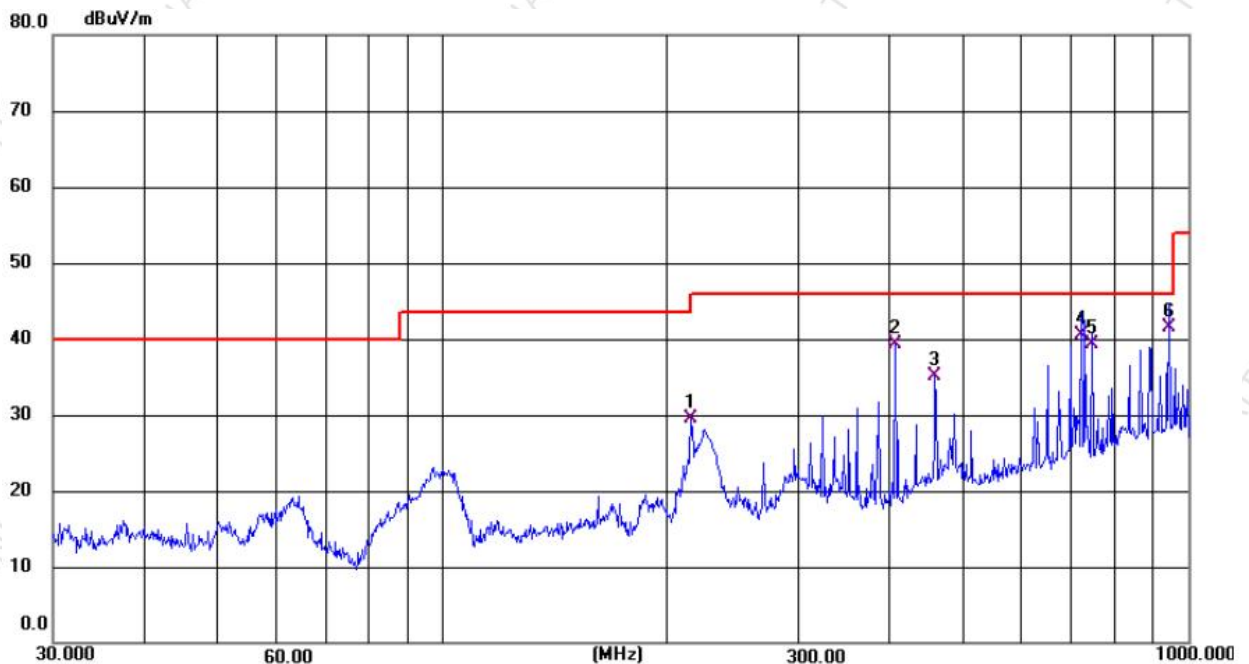

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	215.9861	47.39	-17.86	29.53	43.50	-13.97	QP
2	405.0214	51.63	-12.28	39.35	46.00	-6.65	QP
3	459.0339	46.16	-10.97	35.19	46.00	-10.81	QP
4	720.0827	46.71	-6.21	40.50	46.00	-5.50	QP
5	744.0828	45.04	-5.74	39.30	46.00	-6.70	QP
6 *	945.1085	44.87	-3.27	41.60	46.00	-4.40	QP

Note: Result = Reading + Factor Over Limit = Result - Limit



Test Results (30~1000MHz)

Test Mode: GFSK (2402MHz)
Power Source: AC 120V/60Hz for Adapter
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 23.2°C/53%RH



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.3968	47.05	-15.19	31.86	40.00	-8.14	QP
2	98.9366	50.95	-19.34	31.61	43.50	-11.89	QP
3	224.2046	53.17	-18.92	34.25	46.00	-11.75	QP
4	621.0362	46.78	-7.05	39.73	46.00	-6.27	QP
5 *	729.1026	46.04	-5.44	40.60	46.00	-5.40	QP
6	864.1161	42.84	-3.64	39.20	46.00	-6.80	QP

Note: Result = Reading + Factor Over Limit = Result - Limit



Test Results (1GHz-25GHz)

Test Mode: CH00			Test channel: Lowest			
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	49.79	5.56	55.35	74.00	-18.65	Vertical
7206.00	46.58	5.02	51.60	74.00	-22.40	Vertical
9608.00	42.16	7.56	49.72	74.00	-24.28	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	49.12	5.88	55.00	74.00	-19.00	Horizontal
7206.00	47.77	6.48	54.25	74.00	-19.75	Horizontal
9608.00	43.15	7.96	51.11	74.00	-22.89	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	31.56	5.61	37.17	54.00	-16.83	Vertical
7206.00	33.20	5.08	38.28	54.00	-15.72	Vertical
9608.00	34.22	6.11	40.33	54.00	-13.67	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	32.57	5.61	38.18	54.00	-15.82	Horizontal
7206.00	34.56	5.08	39.64	54.00	-14.36	Horizontal
9608.00	34.36	6.17	40.53	54.00	-13.47	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test Mode: CH19			Test channel: Middle			
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	45.87	5.09	50.96	74.00	-23.04	Vertical
7320.00	46.63	5.54	52.17	74.00	-21.83	Vertical
9760.00	40.25	7.63	47.88	74.00	-26.12	Vertical
12200.00	*			74.00		Vertical
14640.00	*			74.00		Vertical
4880.00	44.11	6.88	50.99	74.00	-23.01	Horizontal
7320.00	43.85	7.52	51.37	74.00	-22.63	Horizontal
9760.00	39.98	7.92	47.90	74.00	-26.14	Horizontal
12200.00	*			74.00		Horizontal
14640.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4880.00	30.00	5.86	35.86	54.00	-18.14	Vertical
7320.00	25.25	9.56	34.81	54.00	-19.19	Vertical
9760.00	23.28	11.93	35.21	54.00	-18.79	Vertical
12200.00	*			54.00		Vertical
14640.00	*			54.00		Vertical
4880.00	32.24	5.38	37.62	54.00	-16.38	Vertical
7320.00	23.21	11.55	34.76	54.00	-19.24	Horizontal
9760.00	22.49	11.12	33.61	54.00	-20.39	Horizontal
12200.00	*			54.00		Horizontal
14640.00	*			54.00		Horizontal



Test Results (1GHz-25GHz)

Test Mode: CH39			Test channel: Highest			
Peak value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	48.22	4.25	52.47	74.00	-21.53	Vertical
7440.00	46.69	5.02	51.71	74.00	-22.29	Vertical
9920.00	42.55	6.87	49.42	74.00	-24.58	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	45.44	5.25	50.69	74.00	-23.31	Horizontal
7440.00	46.67	6.02	52.69	74.00	-21.31	Horizontal
9920.00	38.11	7.45	45.56	74.00	-28.44	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal
Average value:						
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	33.24	5.23	38.47	54.00	-15.53	Vertical
7440.00	31.15	5.05	36.20	54.00	-17.80	Vertical
9920.00	26.48	9.59	36.07	54.00	-17.93	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	31.11	5.18	36.29	54.00	-17.71	Horizontal
7440.00	27.25	8.25	35.50	54.00	-18.50	Horizontal
9920.00	24.63	10.59	35.22	54.00	-18.78	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal

Remark:

- 1.Result =Reading + Factor
2. "*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Radiated Band Edge:

Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Antenna Pol.	Detector
2390	58.65	7.94	66.59	74.00	-7.41	H	Peak
2400	58.85	7.49	66.34	74.00	-7.66	V	Peak
2390	35.11	7.35	42.46	54.00	-11.54	H	AVG
2400	37.32	7.82	45.14	54.00	-8.86	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Antenna Pol.	Detector
2483.5	56.55	7.88	64.43	74.00	-9.57	H	Peak
2500	50.38	6.64	57.02	74.00	-16.98	V	Peak
2483.5	39.74	7.43	47.17	54.00	-6.83	H	AVG
2500	36.51	7.22	43.73	54.00	-10.27	V	AVG

Remark:

1. Level =Reading+ Factor




5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	1W (30dBm)

5.2. Test Setup



5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW $\geq$ DTS bandwidth.
2. Set the VBW $\geq 3 \times$ RBW.
3. Set the span $\geq 3 \times$ RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.

Additional test for duty cycle.

Please refer to Appendix G of the Appendix Test Data.




6. 6DB Occupy Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	$\geq 500\text{kHz}$

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 100kHz, VBW $\geq 3 \times$ RBW
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

6.4. Test Data

Pass

Please refer to Appendix A of the Appendix Test Data.




7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm/3KHz

7.2. Test Setup



7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW $\geq 3 \times$ RBW, Span = 1.5x DTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.4. Test Data

Pass

Please refer to Appendix D of the Appendix Test Data.




8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2. Test Setup



8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

8.4. Test Data

Pass

Please refer to Appendix E&F of the Appendix Test Data.

Radiated sidebands are tested using conduction method instead

Pass

Please refer to Appendix H of the Appendix Test Data.



9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

9.2. Antenna Connected Construction

The antenna is a FPC Antenna which permanently attached, and the best case gain of the antenna is 3.47dBi . It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----