

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : W172R-D036
AGR No. : A171A-129R
Applicant : MYUNGSUNG Automaiton & Technology Co., Ltd.
Address : 26, Jangdae-gil, Ochang-eup, Cheongwon-gu, Cheongju-si, Chungcheongbuk-do, Korea
Manufacturer : MYUNGSUNG Automaiton & Technology Co., Ltd.
Address : 26, Jangdae-gil, Ochang-eup, Cheongwon-gu, Cheongju-si, Chungcheongbuk-do, Korea
Type of Equipment : So Gnee Smart Scale
FCC ID. : 2ALBTSOGNEESCALE-1
Model Name : SoGneeScale-1
Serial number : N/A
Total page of Report : 32 pages (including this page)
Date of Incoming : February 13, 2017
Date of issue : February 27, 2017


SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Ki-Hong, Nam / Asst, Chief Engineer
ONETECH Corp.

Approved by:

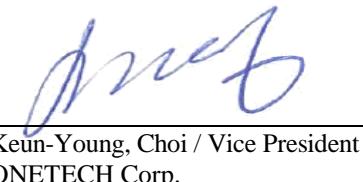
Keun-Young, Choi / Vice President
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	8
5.4 CONFIGURATION OF TEST SYSTEM	9
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. MINIMUM 6 DB BANDWIDTH	11
7.1 OPERATING ENVIRONMENT	11
7.2 TEST SET-UP	11
7.3 TEST EQUIPMENT USED.....	11
7.4 TEST DATA	12
8. MAXIMUM PEAK OUTPUT POWER	14
8.1 OPERATING ENVIRONMENT	14
8.2 TEST SET-UP	14
8.3 TEST EQUIPMENT USED.....	14
8.4 TEST DATA	15
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	17
9.1 OPERATING ENVIRONMENT	17

9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	17
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	17
9.4 TEST EQUIPMENT USED.....	17
9.5 TEST DATA FOR CONDUCTED EMISSION	18
9.6 TEST DATA FOR RADIATED EMISSION.....	23
9.6.1 Radiated Emission which fall in the Restricted Band and Band Edge	23
9.6.2 Spurious & Harmonic Radiated Emission.....	24
10. PEAK POWER SPECTRAL DENSITY	25
10.1 OPERATING ENVIRONMENT	25
10.2 TEST SET-UP	25
10.3 TEST EQUIPMENT USED.....	25
10.4 TEST DATA.....	26
11. RADIATED EMISSION TEST	28
11.1 OPERATING ENVIRONMENT	28
11.2 TEST SET-UP	28
11.3 TEST EQUIPMENT USED.....	28
11.4 TEST DATA FOR TRANSMITTING MODE	29
11.4.1 Test data for 30 MHz ~ 1 GHz	29
11.4.2 Test data for Below 30 MHz	32
11.4.3 Test data for above 1 GHz	32

REVISION HISTORY

Issued Report No.	Issued Date	Revisions	Effect Section
W172R-D036	February 27, 2017	Initial Issue	All

DOCUMENT HISTORY

Revision No.	Issued Date	Revisions	Effect Section
Original	February 27, 2017	Initial Issue	-
Revision 1	March 6, 2017	Modification the Type of Equipment	Page 1, 5, 7, 8, 29
Revision 2	March 7, 2017	Modification the Type of Equipment	Page 1, 5, 7, 8, 29

1. VERIFICATION OF COMPLIANCE

Applicant : MYUNGSUNG Automaiton & Technology Co., Ltd.
Address : 26, Jangdae-gil, Ochang-eup, Cheongwon-gu, Cheongju-si, Chungcheongbuk-do, Korea
Contact Person : Jongbok, Choi / Chief R&D Center Manager
Telephone No. : +82-43-715-9580
FCC ID : 2ALBTSOGNEESCALE-1
Model Name : SoGneeScale-1
Brand Name : So!Gnee Smart Scale
Serial Number : N/A
Date : February 27, 2017

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	So Gnee Smart Scale
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT	Certification
AUTHORIZATION REQUESTED	
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not performed because the EUT is operated by DC battery.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

- Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

- Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The MYUNGSUNG Automaiton & Technology Co., Ltd., Model SoGneeScale-1 (referred to as the EUT in this report) is a So Gnee Smart Scale. The product specification described herein was obtained from product data sheet or user's manual.

Device Type	So Gnee Smart Scale
Temperature Range	-10 °C to 50 °C
Operating Frequency	2 402 MHz ~ 2 480 MHz
RF Output Power	0.37 dBm
Number of Channel	40 Channel
Modulation Type	GFSK
Antenna Type	CHIP Antenna
USED RF CHIP	Marker: TEXAS INSTRUMENTS Model Name: CC2540
Antenna Gain	1.9 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32 MHz, 32.768 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

- None

4. EUT MODIFICATIONS

- None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	MYUNGSUNG Automaiton & Technology Co., Ltd.	N/A	N/A
Sensor	N/A	N/A	N/A
Power switch	N/A	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
SoGneeScale-1	MYUNGSUNG Automaiton & Technology Co., Ltd.	So Gnee Smart Scale (EUT)	-
TG-L900S	TG&Co.	Smartphone	-

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is "XZ" axis, but the worst data was recorded in this report.

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC battery.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied by battery.	

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 24.3 °C
Relative humidity : 43.9 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.



7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)

All test equipment used is calibrated on a regular basis.


7.4 Test data



- Test Date : February 22, 2017 ~ February 24, 2017
- Test Result : Pass

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402	689.30	500	189.30
Middle	2 440	689.30	500	189.30
High	2 480	699.30	500	199.30

Remark. Margin = Measured Value - Limit

Tested by: Hyung-Kwon, Oh / Engineer

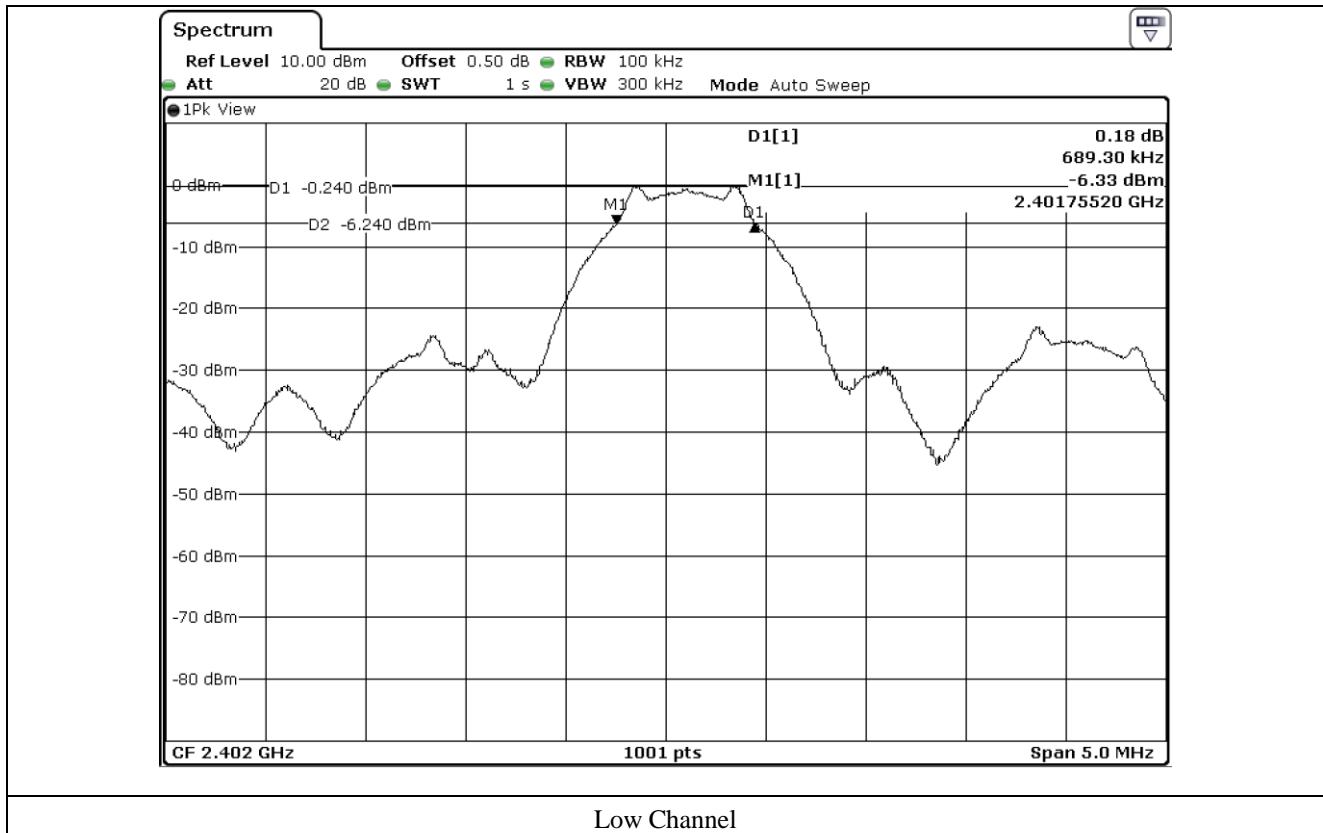

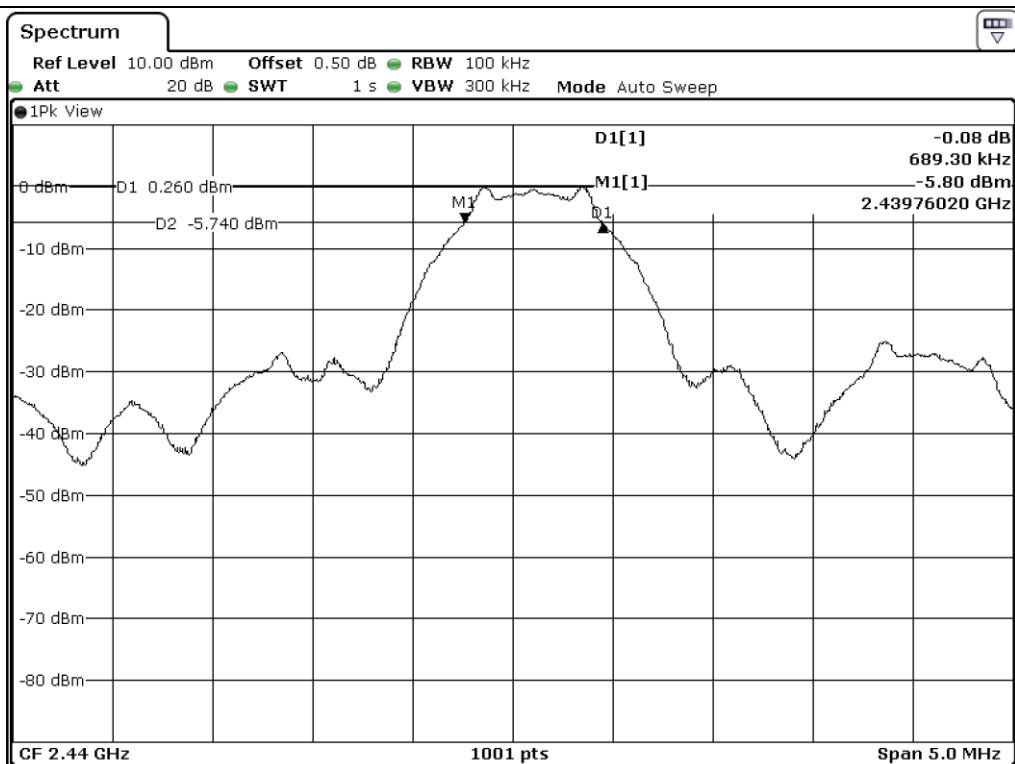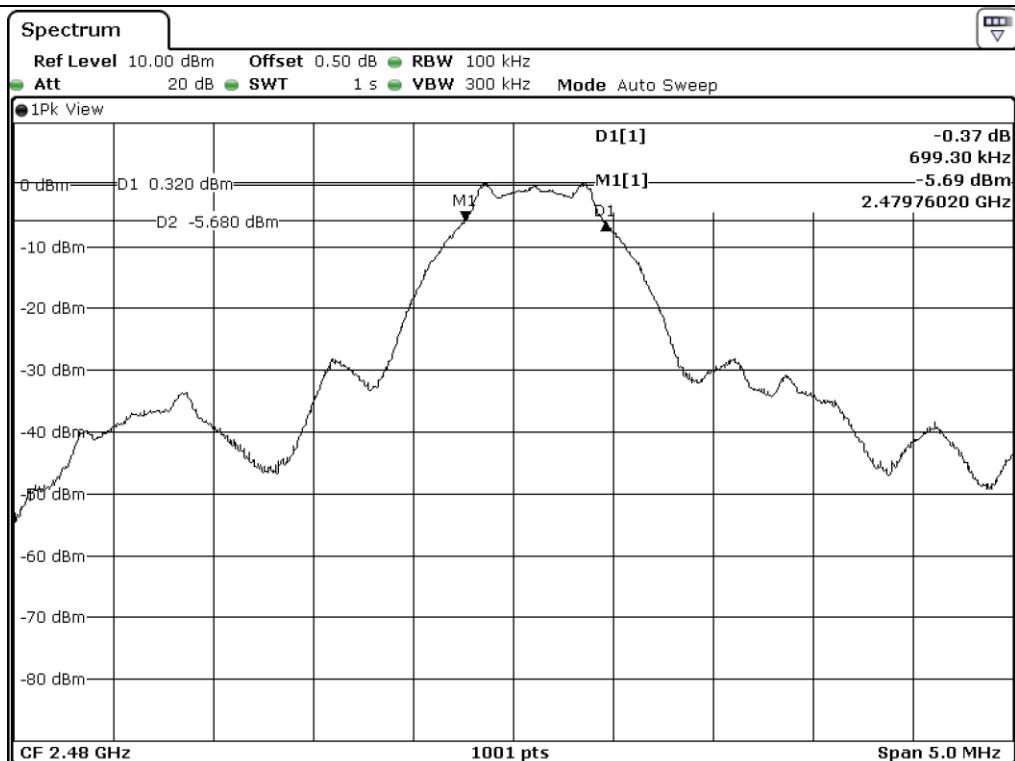**Middle Channel****High Channel**

8. MAXIMUM PEAK OUTPUT POWER


8.1 Operating environment

Temperature : 24.3 °C
Relative humidity : 43.9 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

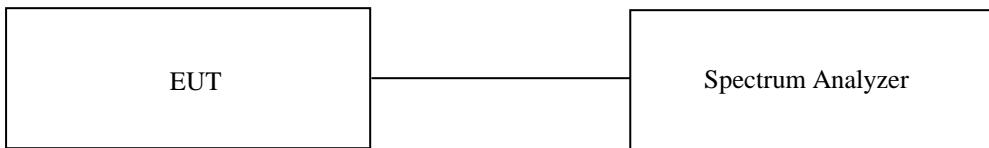

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data


- Test Date : February 22, 2017 ~ February 24, 2017
- Test Result : Pass



CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	0.11	30.00	29.89
MIDDLE	2 440	0.24	30.00	29.76
HIGH	2 480	0.37	30.00	29.63

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)



Tested by: Hyung-Kwon, Oh / Engineer

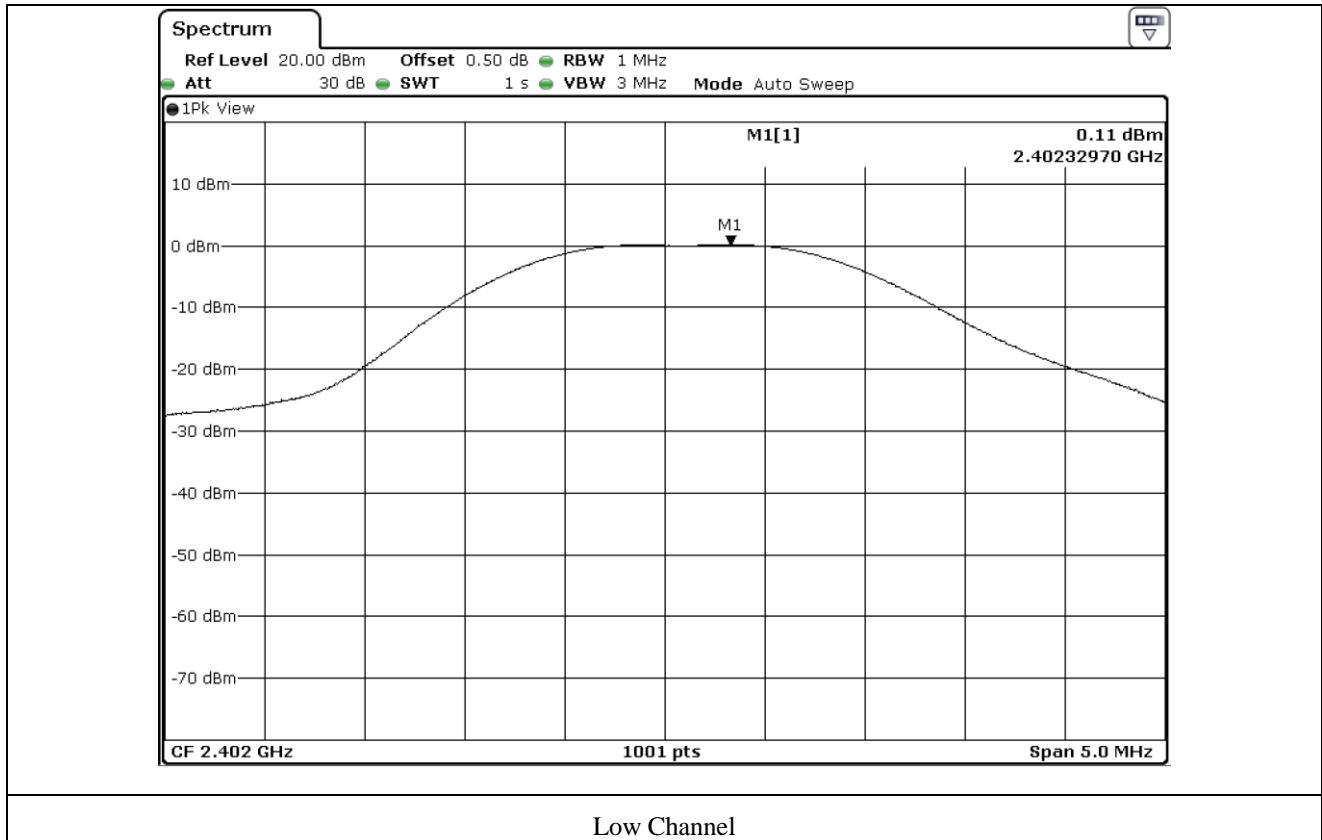

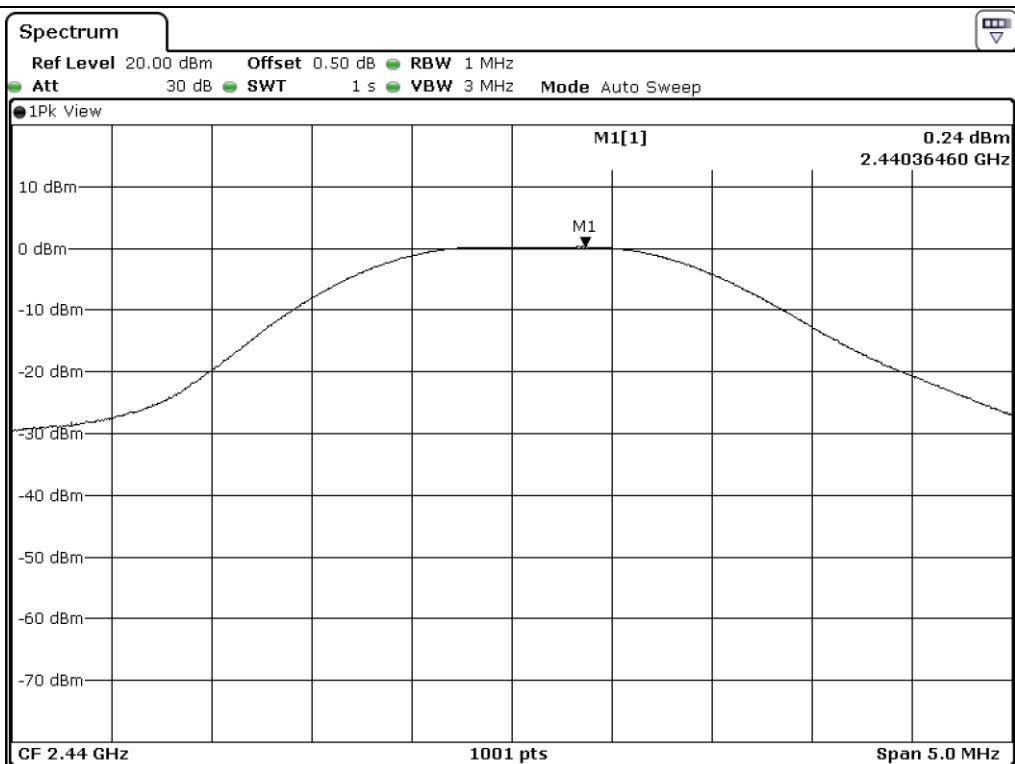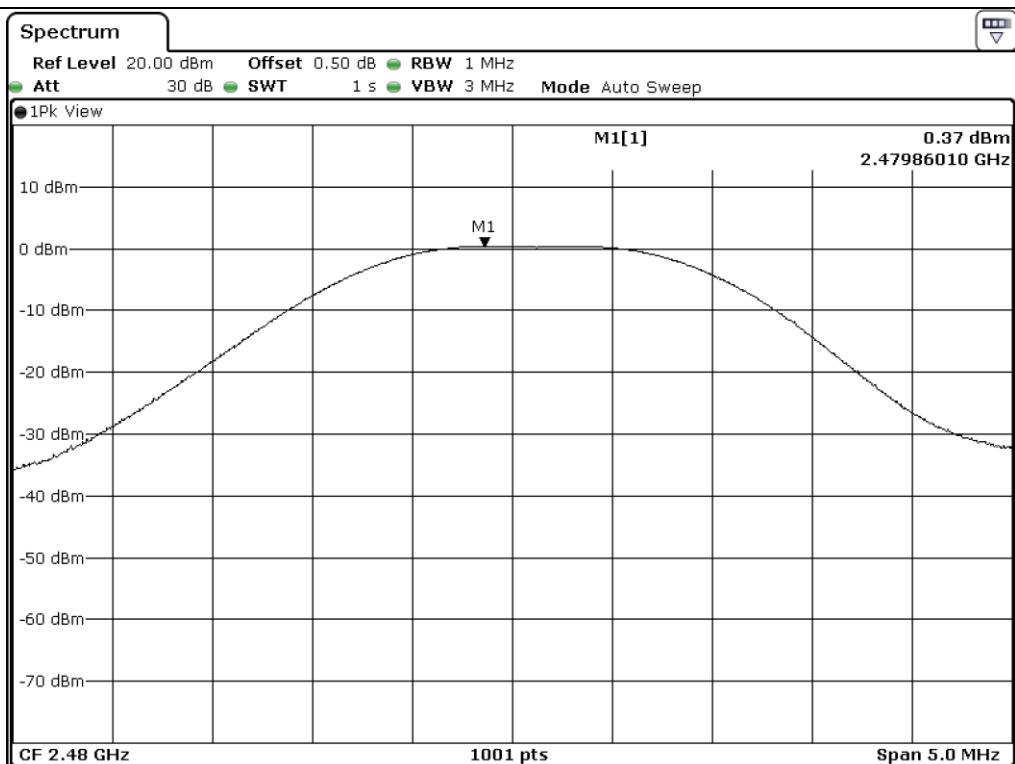**Middle Channel****High Channel**


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 24.3 °C
Relative humidity : 43.9 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

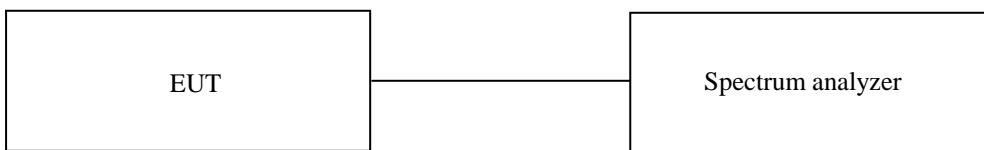

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


9.4 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 06, 2016 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 05, 2016 (1Y)
■ - SCU-18	Rohde & Schwarz	Pre-Amplifier	102209	May 31, 2016 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	May 31, 2016 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Apr. 15, 2016 (1Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Aug. 31, 2015 (2Y)

All test equipment used is calibrated on a regular basis.


9.5 Test data for conducted emission

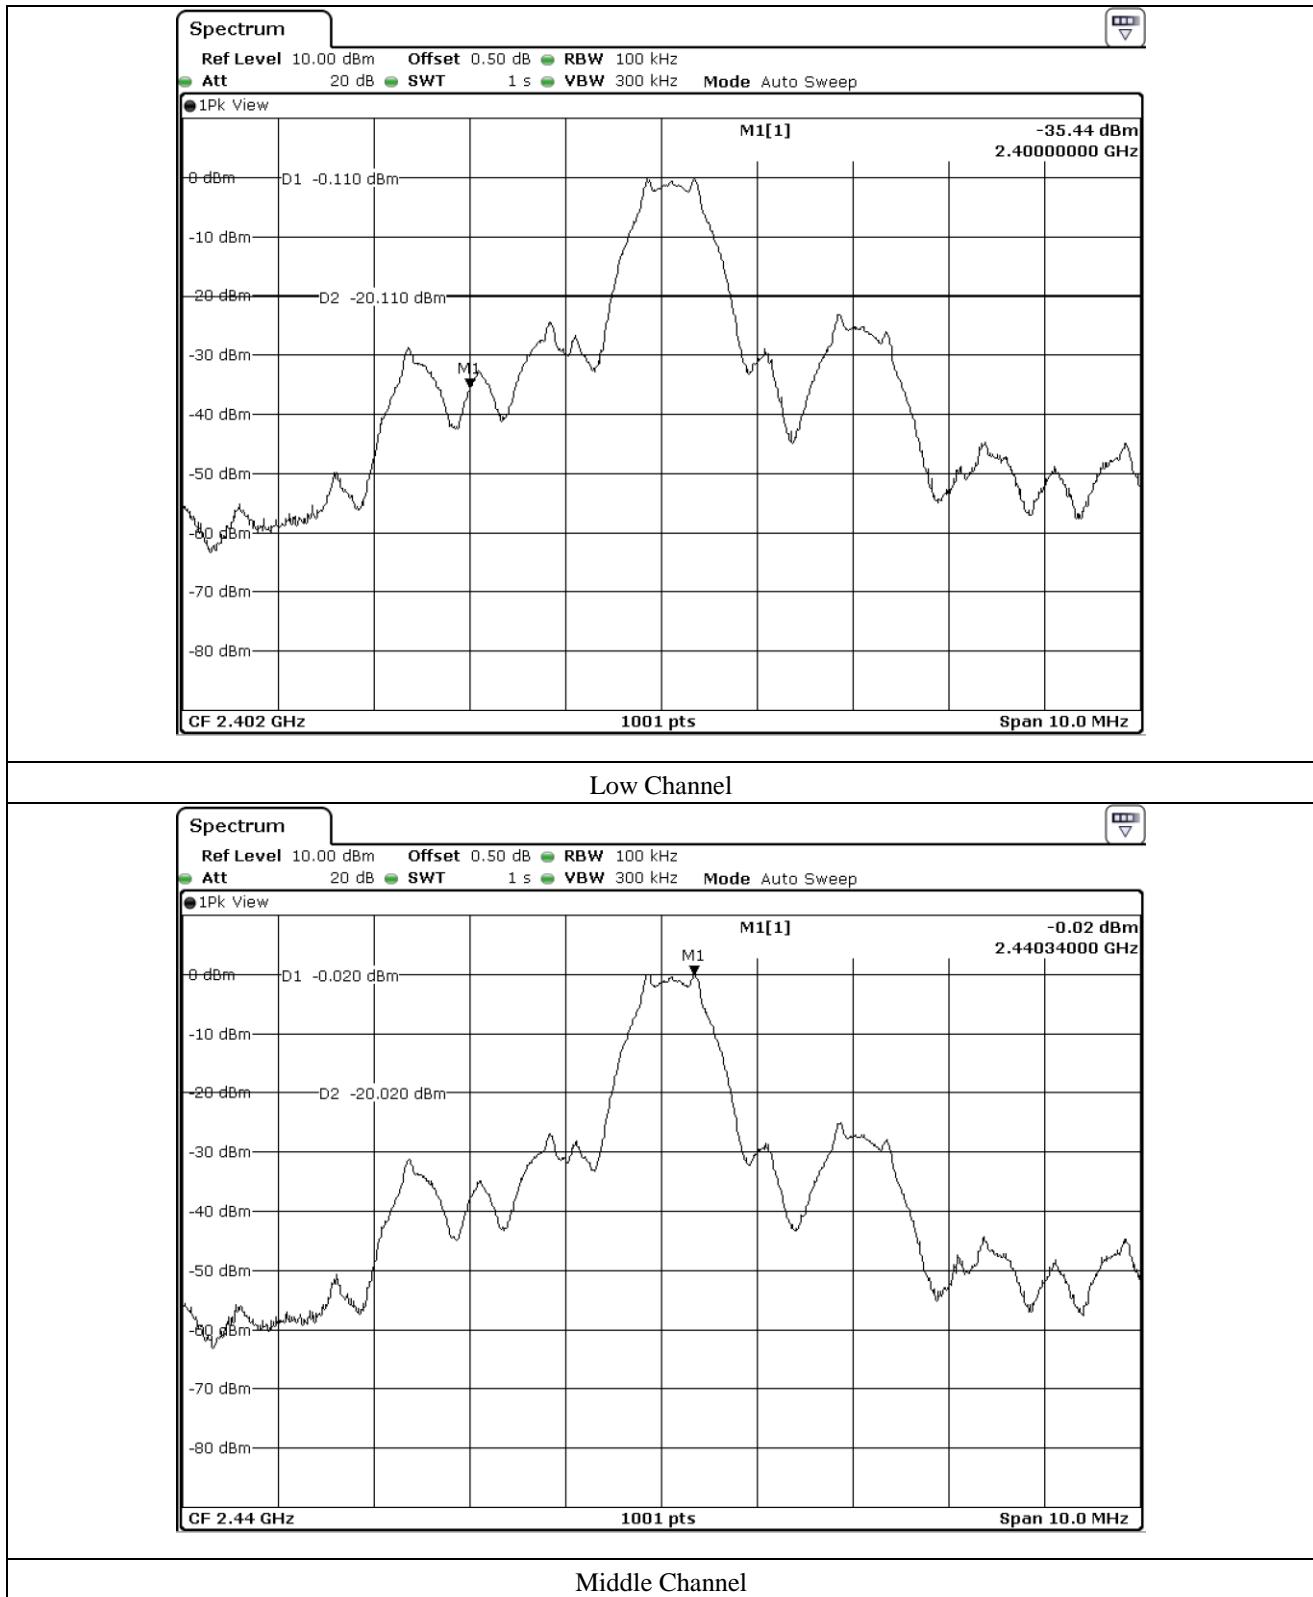


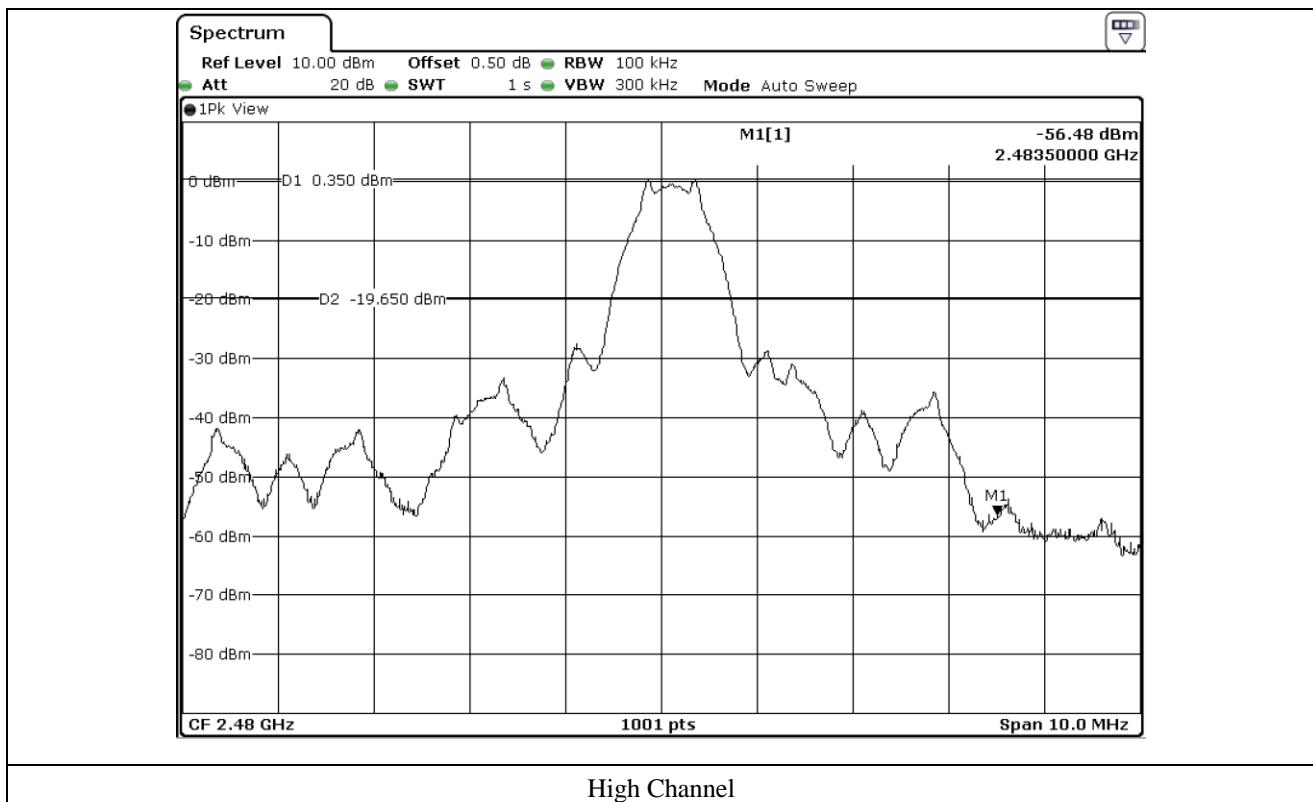



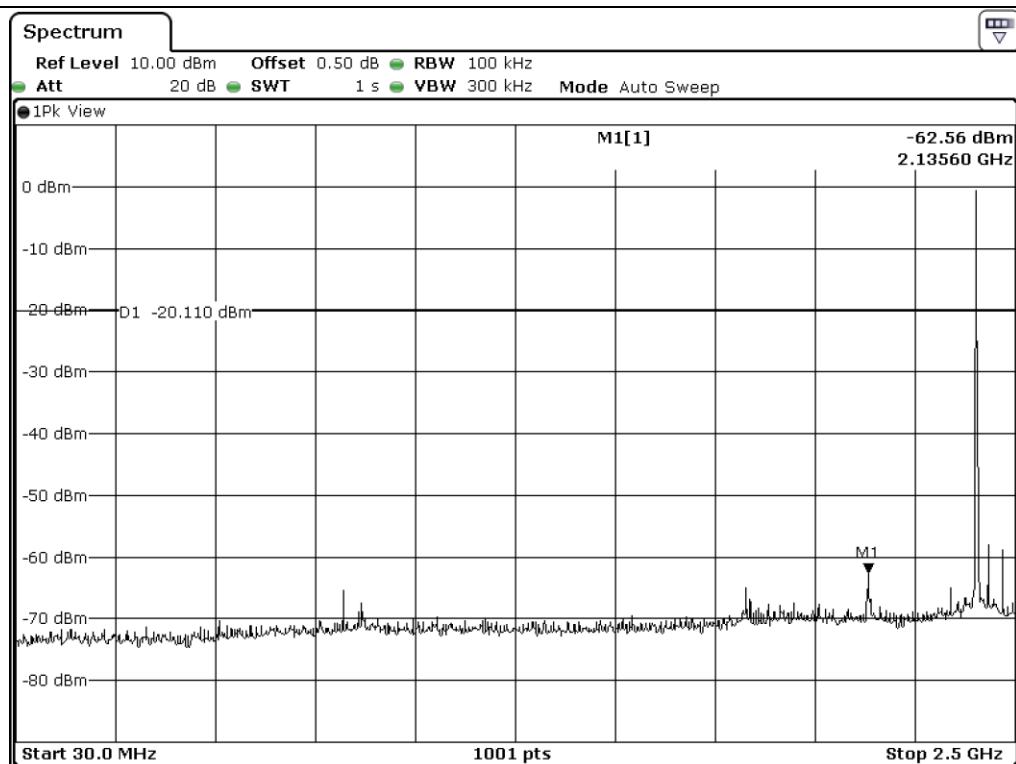


Low Channel

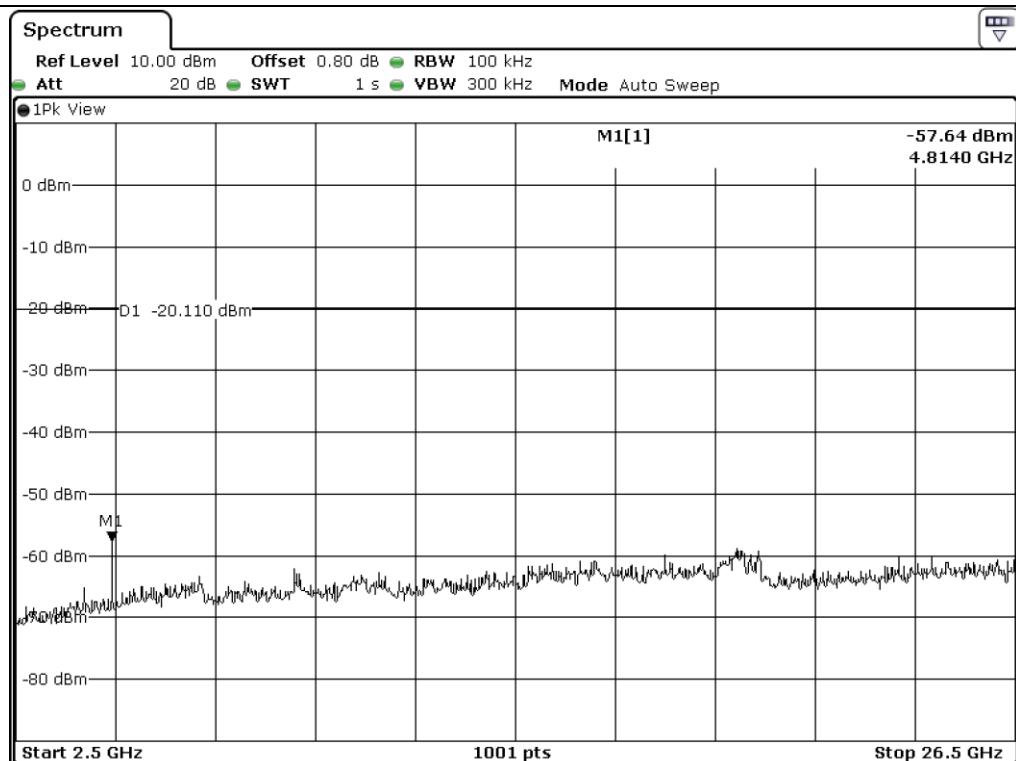

Low Channel

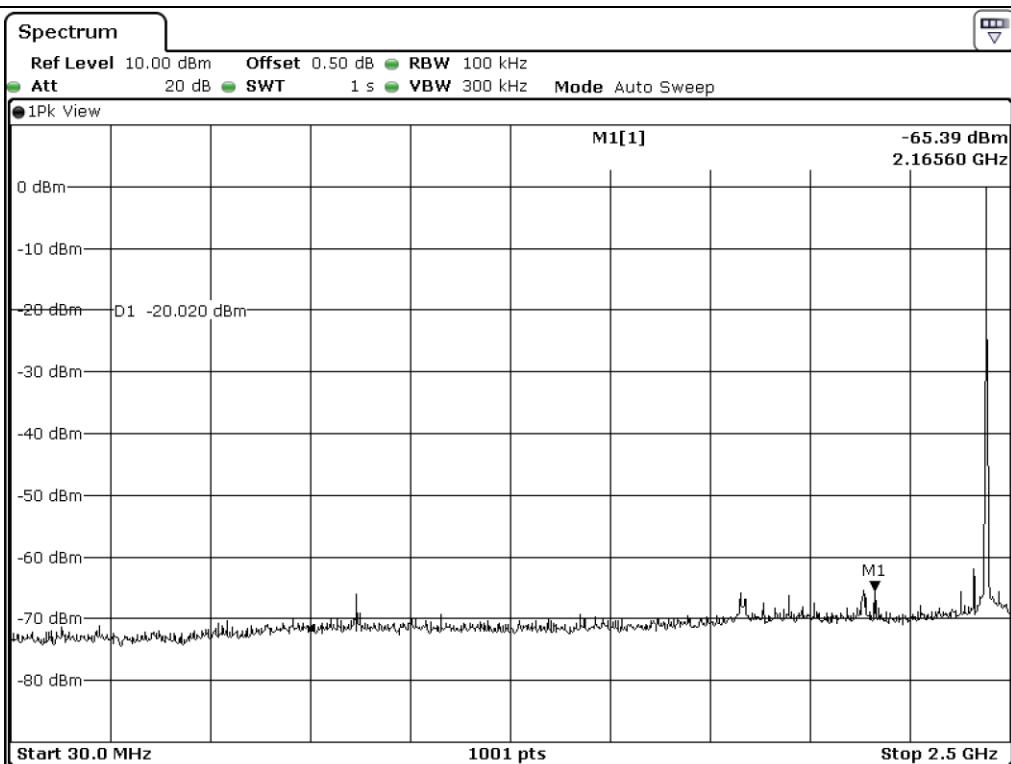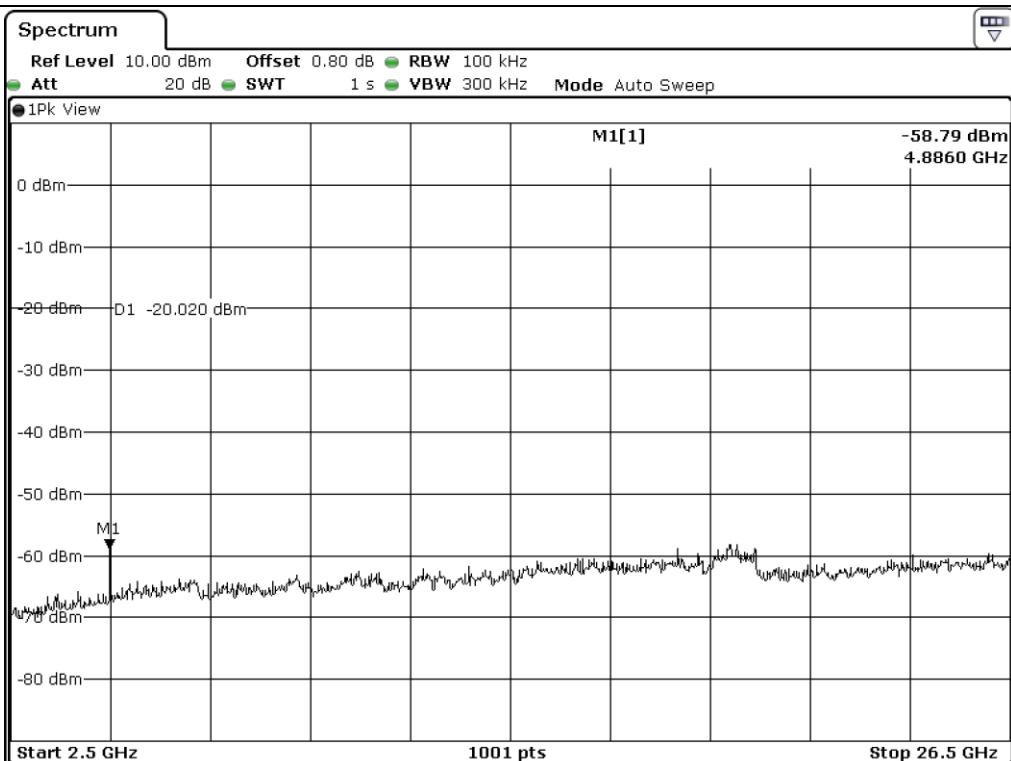**Middle Channel****Middle Channel**

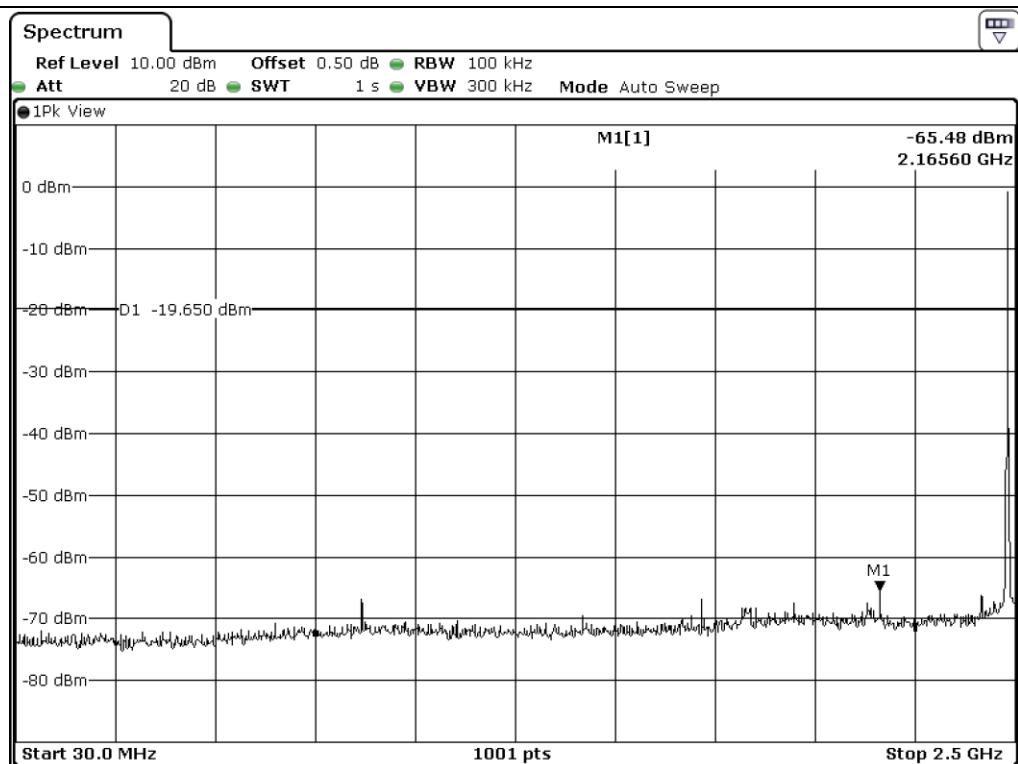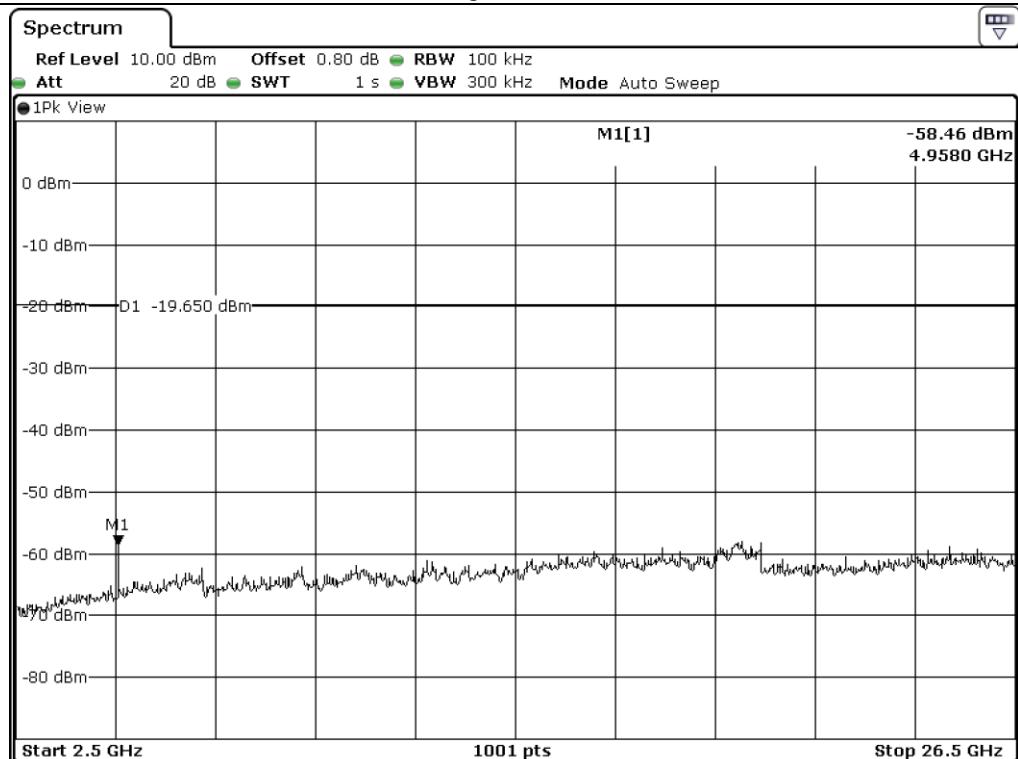**High Channel****High Channel**

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band and Band Edge

- Test Date : February 22, 2017 ~ February 24, 2017
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (MHz)	Reading (dB μ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	41.35	Peak	H	27.06	11.25	40.19	39.47	74.00	34.53
	35.49	Average	H				33.61	54.00	20.39
	39.85	Peak	V				37.97	74.00	36.03
	32.18	Average	V				30.30	54.00	23.70
Test Data for Low Channel									
2 400.00	41.44	Peak	H	27.24	11.36	40.18	39.86	74.00	34.14
	35.60	Average	H				34.02	54.00	19.98
	40.01	Peak	V				38.43	74.00	35.57
	33.87	Average	V				32.29	54.00	21.71
Test Data for High Channel									
2 483.50	41.69	Peak	H	27.57	11.49	40.16	40.59	74.00	33.41
	34.51	Average	H				33.41	54.00	20.59
	40.13	Peak	V				39.03	74.00	34.97
	34.28	Average	V				33.18	54.00	20.82

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dB μ V/m) - Total Level (dB μ V/m)

Total Level = Reading + Antenna Factor + Cable Loss - Pre-Amplifier Gain



Tested by: Hyung-Kwon, Oh / Engineer

9.6.2 Spurious & Harmonic Radiated Emission

- Test Date : February 22, 2017 ~ February 24, 2017
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (MHz)	Reading (dB μ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	43.58	Peak	H	30.70	16.10	40.60	49.78	74.00	24.22
	36.80	Average	H				43.00	54.00	11.00
	41.15	Peak	V				47.35	74.00	26.65
	35.99	Average	V				42.19	54.00	11.81
Test Data for Middle Channel									
4 880.00	42.18	Peak	H	30.90	16.30	40.60	48.78	74.00	25.22
	35.80	Average	H				42.40	54.00	11.60
	40.97	Peak	V				47.57	74.00	26.43
	34.53	Average	V				41.13	54.00	12.87
Test Data for High Channel									
4 960.00	42.82	Peak	H	31.00	16.50	40.60	49.72	74.00	24.28
	35.59	Average	H				42.49	54.00	11.51
	40.81	Peak	V				47.71	74.00	26.29
	34.97	Average	V				41.87	54.00	12.13

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dB μ V/m) - Total Level (dB μ V/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Hyung-Kwon, Oh / Engineer

10. PEAK POWER SPECTRAL DENSITY


10.1 Operating environment

Temperature : 24.3 °C
Relative humidity : 43.9 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

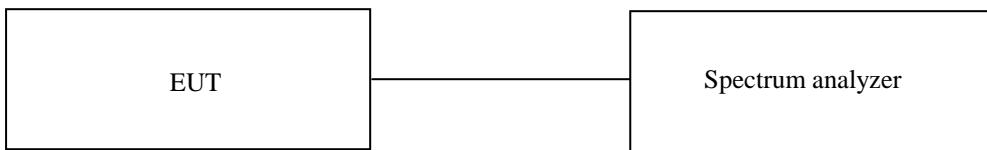

10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data

- Test Date : February 22, 2017 ~ February 24, 2017


- Test Result : Pass



- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402	-12.47	8.00	20.47
Middle	2 440	-11.67	8.00	19.67
High	2 480	-12.14	8.00	20.14

Remark. Margin = Limit – Measured value

Tested by: Hyung-Kwon, Oh / Engineer

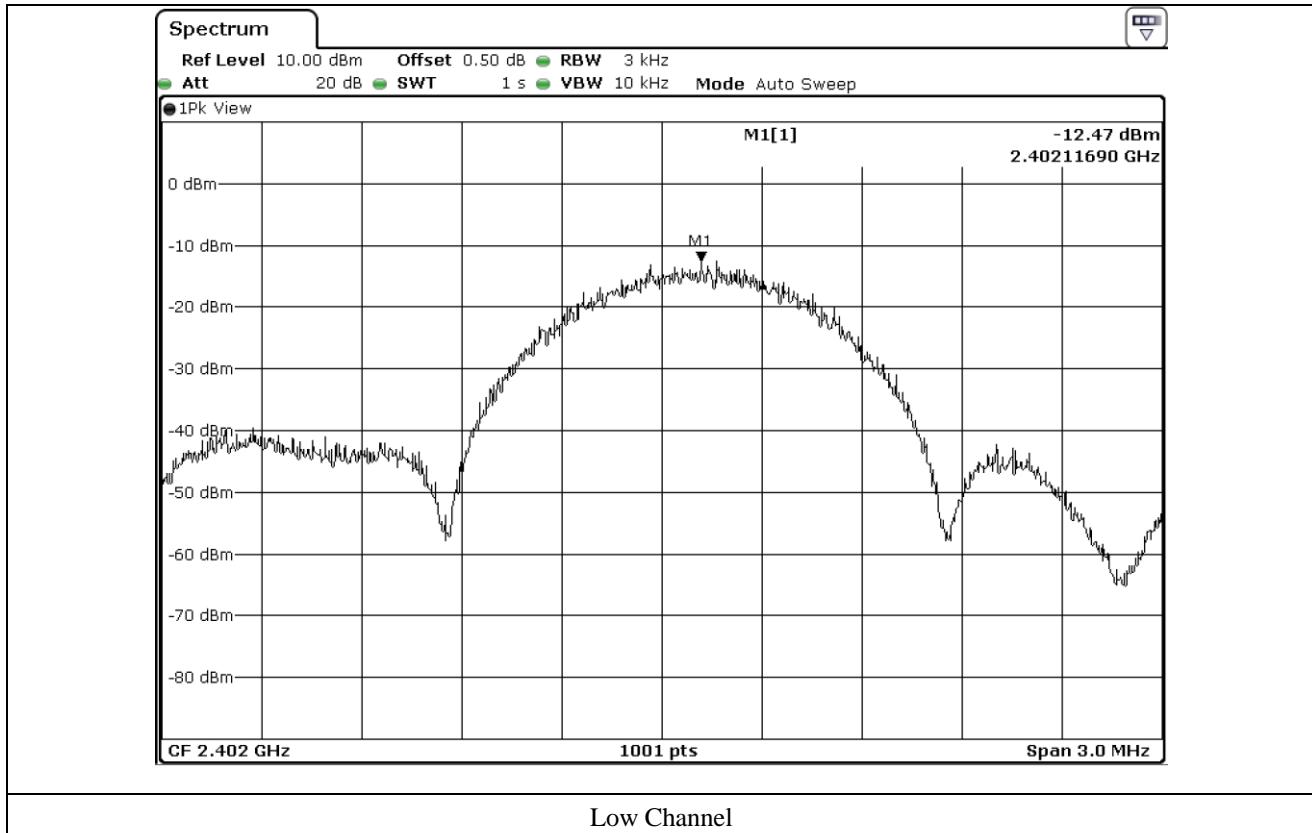

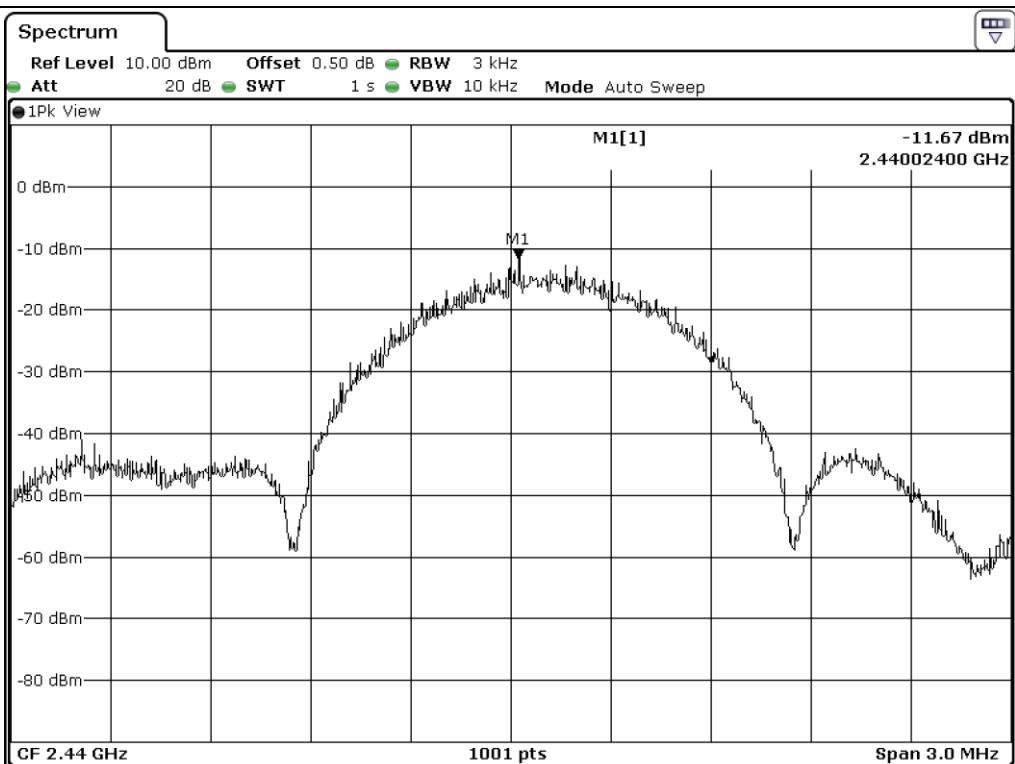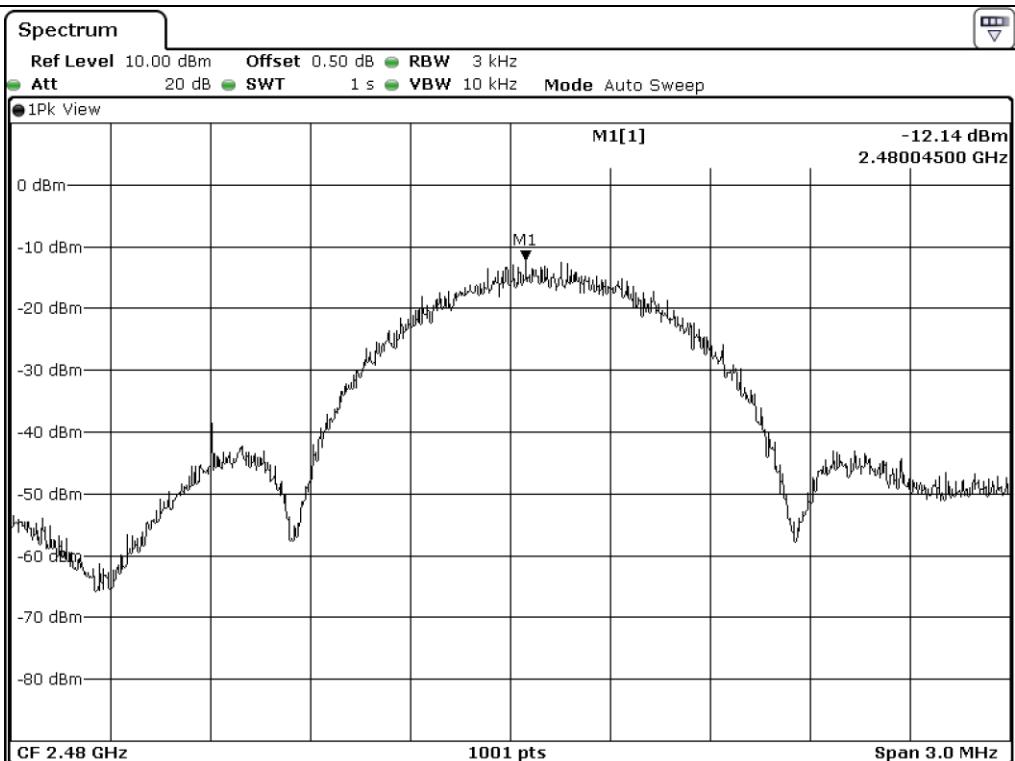**Middle Channel****High Channel**

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : (23 ~ 24) °C
Relative humidity : (45 ~ 46) % R.H.

11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 06, 2016 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 05, 2016 (1Y)
■ - SCU-18	Rohde & Schwarz	Pre-Amplifier	102209	May 31, 2016 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Apr. 15, 2016 (1Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Aug. 31, 2015 (2Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for Transmitting Mode


11.4.1 Test data for 30 MHz ~ 1 GHz

Humidity Level : (45 ~ 46) % R.H. Temperature: (23 ~ 24) °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247
 Result : PASSED

EUT : So Gnee Smart Scale Date: February 23, 2017


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operating condition : Low Channel

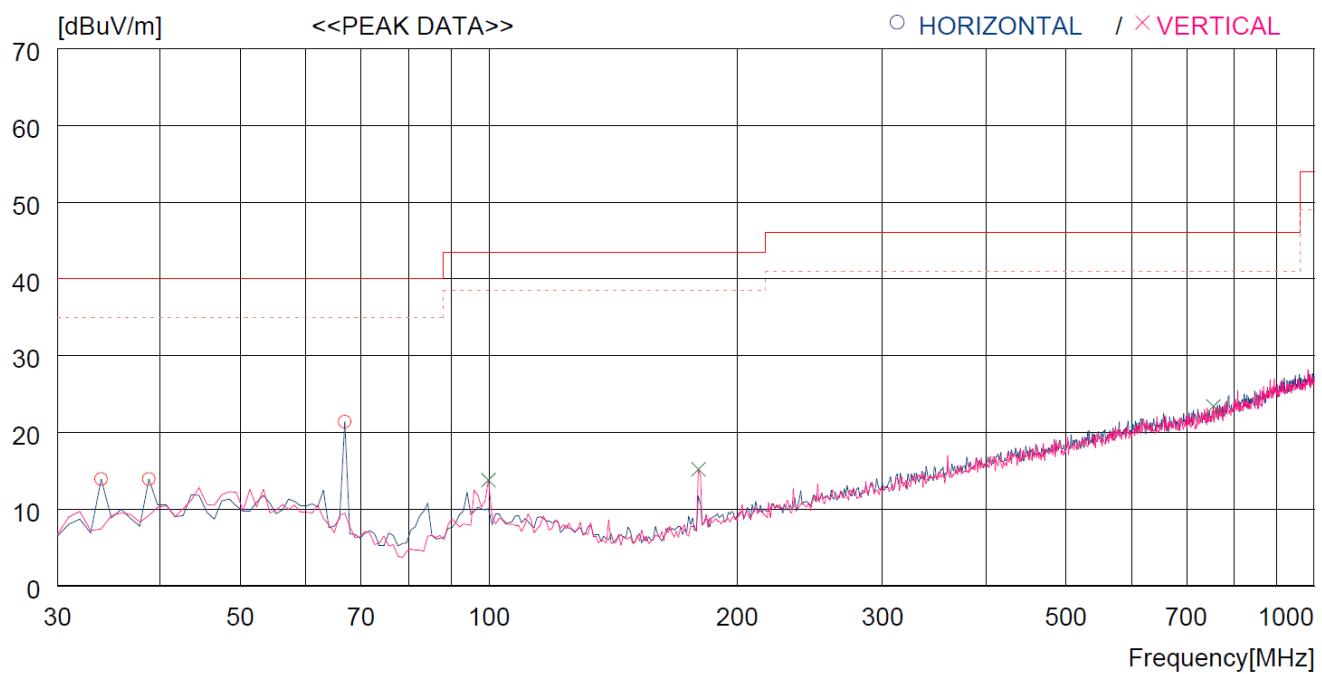


No.	FREQ [MHz]	READING PEAK [dBuV]	ANT. FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dB]	MARGIN [cm]	ANTENNA [DEG]	TABLE
----- Horizontal -----										
1	33.880	33.1	11.9	1.7	32.8	13.9	40.0	26.1	400	359
2	38.730	32.0	13.0	1.8	32.9	13.9	40.0	26.1	200	271
3	66.860	41.3	10.9	2.3	33.1	21.4	40.0	18.6	300	0
----- Vertical -----										
4	99.840	32.5	11.9	2.7	33.3	13.8	43.5	29.7	200	0
5	179.380	34.8	9.7	3.6	32.9	15.2	43.5	28.3	100	359
6	754.583	29.2	20.3	7.6	33.7	23.4	46.0	22.6	200	0

Operating condition : Middle Channel

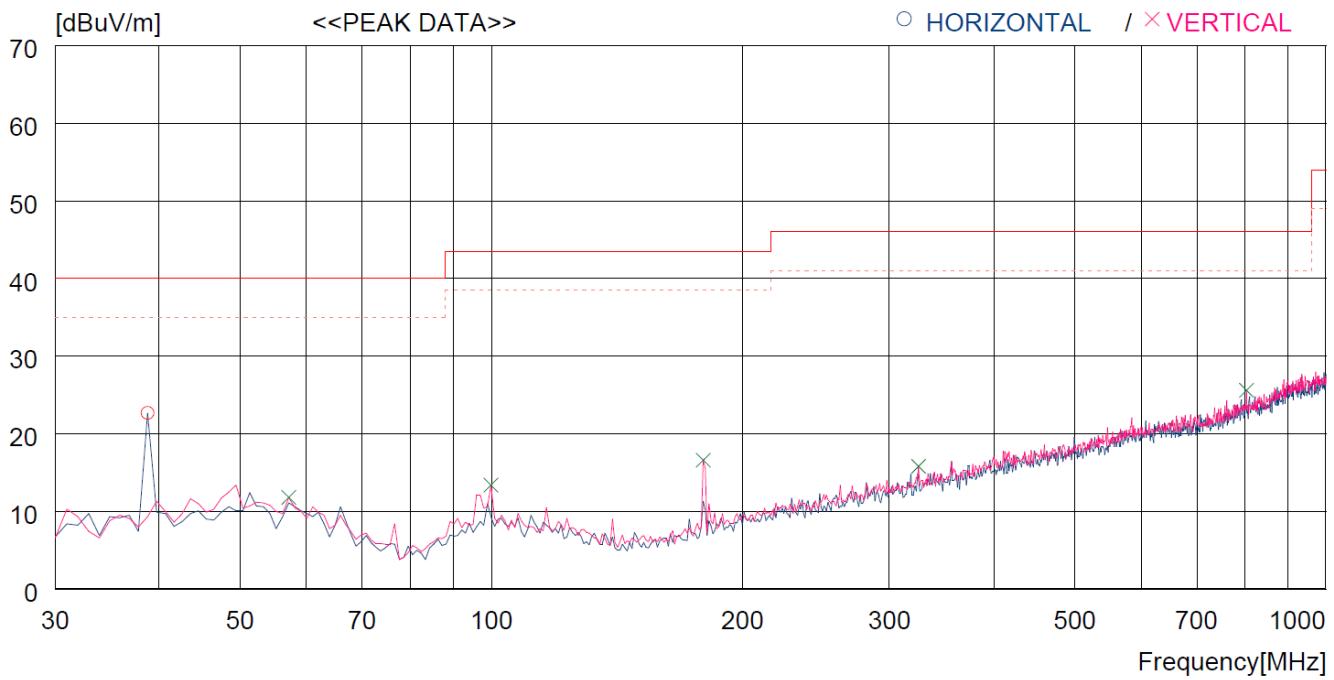

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	LIMIT [dB]	MARGIN		ANTENNA TABLE [cm]	[DEG]
									TABLE [cm]	[DEG]		
----- Horizontal -----												
1	38.730	40.8	13.0	1.8	32.9	22.7	40.0	17.3	400	359		
----- Vertical -----												
2	57.160	29.3	13.4	2.1	33.0	11.8	40.0	28.2	100	284		
3	99.840	32.1	11.9	2.7	33.3	13.4	43.5	30.1	100	348		
4	179.380	36.2	9.7	3.6	32.9	16.6	43.5	26.9	100	334		
5	324.880	29.5	14.2	4.8	32.7	15.8	46.0	30.2	300	0		
6	803.082	30.1	20.9	7.9	33.3	25.6	46.0	20.4	100	235		

Operating condition : High Channel

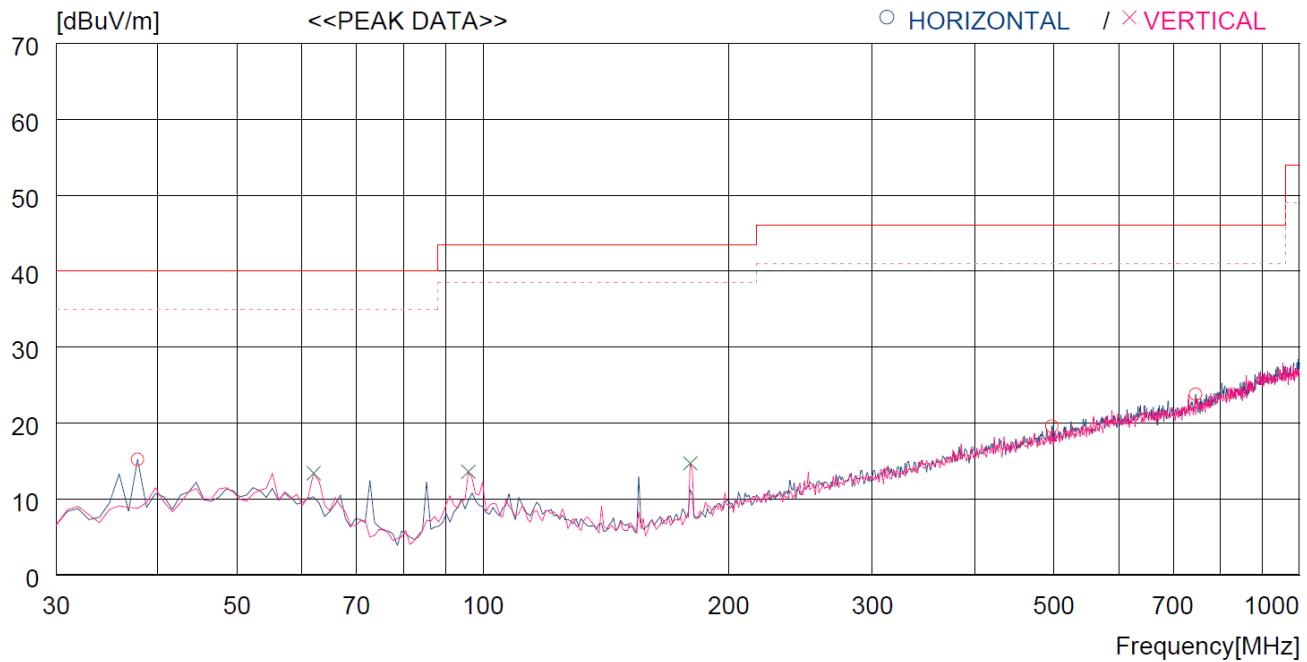

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
-----	------------	---------------------	-----------------	-----------	-----------	-----------------	----------------	-------------	--------------	-------------

----- Horizontal -----

1	37.760	33.6	12.7	1.8	32.9	15.2	40.0	24.8	300	320
2	497.541	29.2	17.3	6.0	32.9	19.6	46.0	26.4	400	69
3	745.854	29.8	20.2	7.5	33.7	23.8	46.0	22.2	200	110

----- Vertical -----

4	62.010	31.7	12.6	2.2	33.1	13.4	40.0	26.6	100	359
5	95.960	33.0	11.2	2.7	33.3	13.6	43.5	29.9	100	359
6	179.380	34.3	9.7	3.6	32.9	14.7	43.5	28.8	100	308

Tested by: Hyung-Kwon, Oh / Engineer

11.4.2 Test data for Below 30 MHz

- Test Date : February 23, 2017
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
It was not observed any emissions from the EUT.									

11.4.3 Test data for above 1 GHz

- Test Date : February 23, 2017
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
It was not observed any emissions from the EUT.									



Tested by: Hyung-Kwon, Oh / Engineer