



## FCC PART 15.247

## TEST REPORT

For

**Dongguan Xing Yue Electronic co., Ltd**

#98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan City, Guang Dong, China

**FCC ID: 2ALCFXO-9199**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Music Backpack Speaker
<b>Test Engineer:</b> <u>Chris Wang</u> <i>Chris. Wang</i>	
<b>Report Number:</b> <u>RSHA171121001-00A</u>	
<b>Report Date:</b> <u>2017-12-25</u>	
<b>Reviewed By:</b> <u>Oscar Ye</u> <i>Oscar. Ye</i> <u>RF Leader</u>	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY.....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>FCC §15.247 (I) &amp; §1.1310 &amp; §2.1093 - RF EXPOSURE .....</b>	<b>11</b>
MEASUREMENT RESULT .....	11
<b>FCC §15.203 – ANTENNA REQUIREMENT.....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
ANTENNA CONNECTOR CONSTRUCTION .....	12
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP .....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE .....	13
CORRECTED FACTOR & MARGIN CALCULATION .....	14
TEST RESULTS SUMMARY .....	14
TEST DATA .....	14
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>17</b>
APPLICABLE STANDARD .....	17
EUT SETUP .....	17
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE .....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	18
TEST RESULTS SUMMARY .....	18
TEST DATA .....	19
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>25</b>
APPLICABLE STANDARD .....	25
TEST PROCEDURE .....	25
TEST DATA .....	25
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>	<b>31</b>

APPLICABLE STANDARD .....	31
TEST PROCEDURE .....	31
TEST DATA .....	31
<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>37</b>
APPLICABLE STANDARD .....	37
TEST PROCEDURE .....	37
TEST DATA .....	37
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>40</b>
APPLICABLE STANDARD .....	40
TEST PROCEDURE .....	40
TEST DATA .....	40
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>56</b>
APPLICABLE STANDARD .....	56
TEST PROCEDURE .....	56
TEST DATA .....	56
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>62</b>
APPLICABLE STANDARD .....	62
TEST PROCEDURE .....	62
TEST DATA .....	62

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant	Dongguan Xing Yue Electronic co., Ltd
Tested Model	XO-9199
Product Type	Music Backpack Speaker
Dimension	Φ 120*40.55 mm(H)
Power Supply	DC 3.7V by battery and DC 5.0V charging from USB port

\*All measurement and test data in this report was gathered from production sample serial number: 20171121001.  
(Assigned by the BACL. The EUT supplied by the applicant was received on 2017-11-21)

### Objective

This test report is prepared on behalf of Dongguan Xing Yue Electronic co., Ltd in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

N/A

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Item	Uncertainty	
AC Power Lines Conducted Emissions	3.19dB	
RF conducted test with spectrum	0.9dB	
RF Output Power with Power meter	0.5dB	
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
Occupied Bandwidth	0.5kHz	
Temperature	1.0°C	
Humidity	6%	

## Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road,Kunshan,Jiangsu province,China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

Channel list for Bluetooth:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	77	2479
39	2441	78	2480

EUT was tested with Channel 0, 39 and 78.

### EUT Exercise Software

RF test tool: FCCAssist V1.5

GFSK Power level: 10

$\pi/4$ -DQPSK Power level: 10

8-DPSK Power level: 10

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

**Support Equipment List and Details**

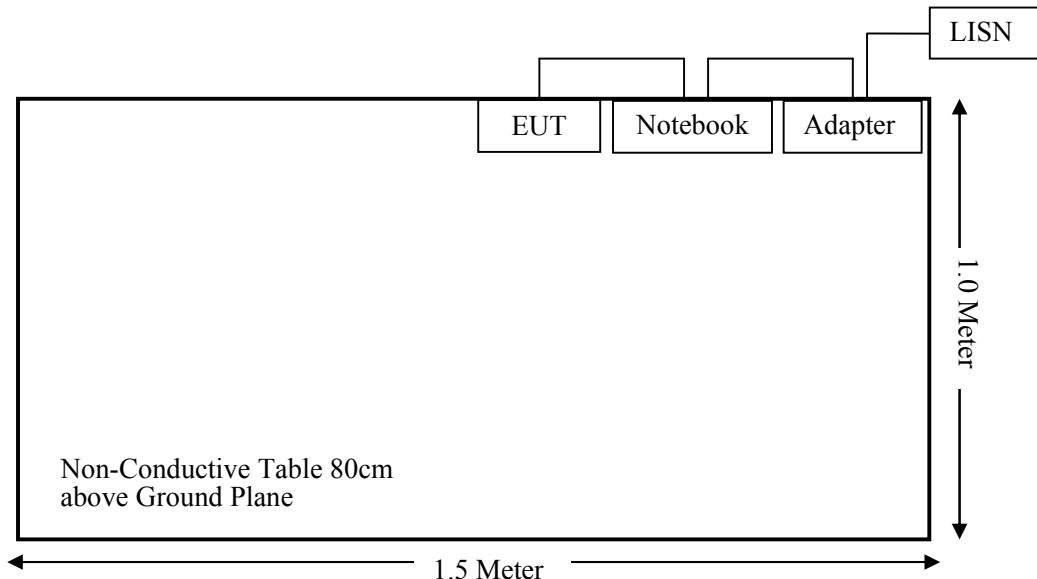
Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263

**External I/O Cable**

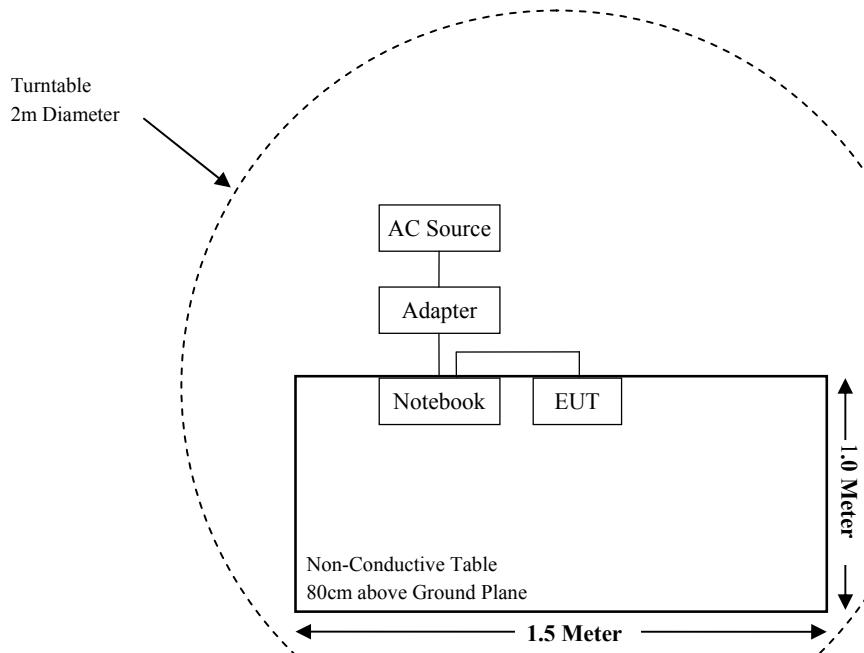
Cable Description	Shielding Type	Length (m)	From Port	To
USB Cable	Unshielding	0.3	EUT	Notebook

**Block Diagram of Test Setup**

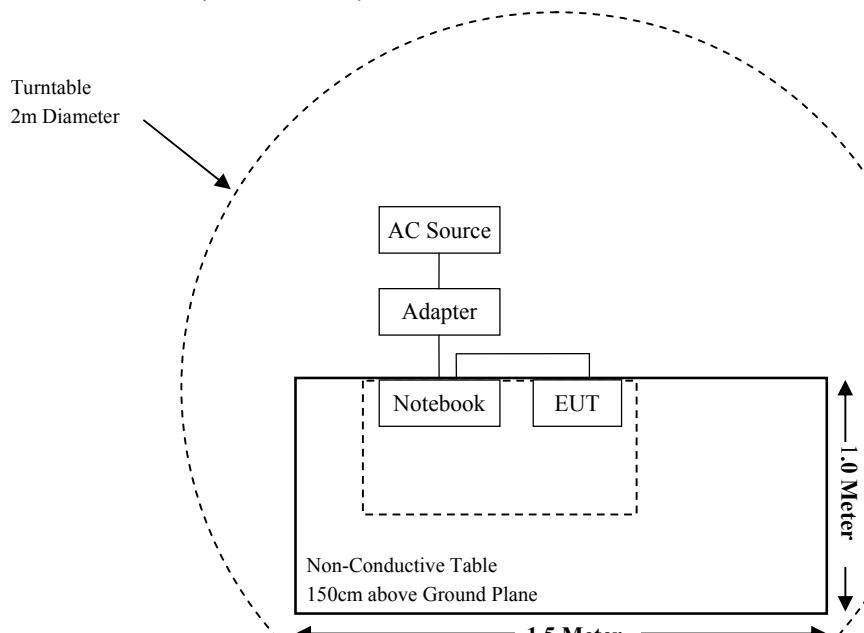
For Conducted Emissions:



For Radiated Emissions(Below 1GHz):



For Radiated Emissions(Above 1GHz):



**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.247 (I), §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber 1#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-25	2018-11-24
Sunol Sciences	Broadband Antenna	JB3	A040914-2	2016-01-09	2019-01-08
Sonoma Instrunent	Pre-amplifier	310N	171205	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2017-08-15	2018-08-14
<b>Radiated Emission Test (Chamber 2#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2017-08-27	2018-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-12-22	2017-12-21
Heatsink Required	Amplifier	QLW-18405536-J0	15964001009	2016-12-22	2017-12-21
SINOSCITE	Band Reject Filter	BSF2402-2480MN-0898	/	2017-08-05	2018-08-04
Narda	Attenuator/10dB	10dB	/	/	/
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2017-08-15	2018-08-14
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2017-07-22	2018-07-21
WEINSCHEL	3dB Attenuator	N/A	N/A	2017-08-15	2018-08-14
Dongguan Xing Yue	RF Cable	/	/	/	/
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-25	2018-11-24
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2017-10-10	2018-10-09
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2017-01-10	2018-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2017-08-15	2018-08-14

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.247 (I) & §1.1310 & §2.1093 - RF EXPOSURE

### Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

### Measurement Result

Frequency Range (MHz)	Target Output Power		Minimum test separation distance required for the exposure conditions (mm)
	(dBm)	(mW)	
2402-2480	0.50	1.12	5.00

#### Note:

The target output power is declared by the manufacturer.

**Result:**  $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] = 1.12 / 5 * \sqrt{2.48} = 0.4 < 3$ .

So the stand-alone SAR evaluation is not necessary.

## FCC §15.203 – ANTENNA REQUIREMENT

### Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### Antenna Connector Construction

The EUT has a PCB antenna arrangement for Bluetooth, which the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

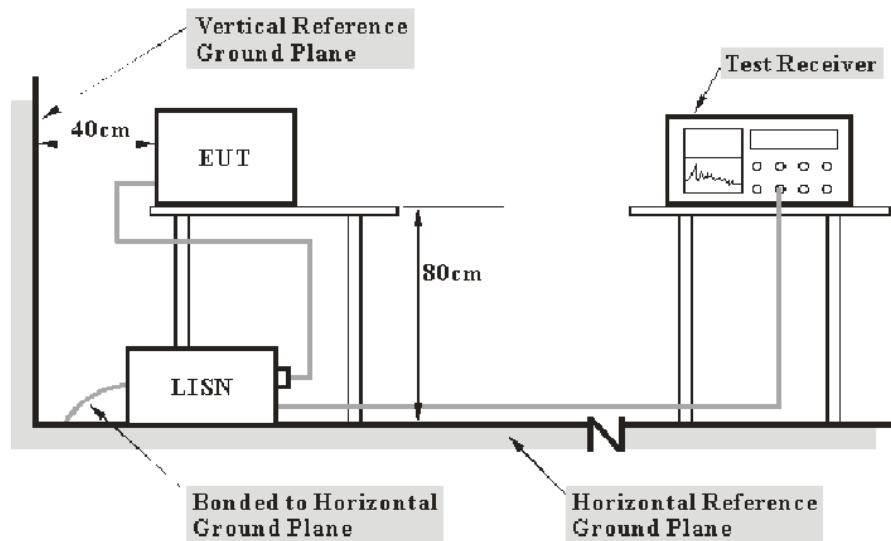
**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup



Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Reading}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

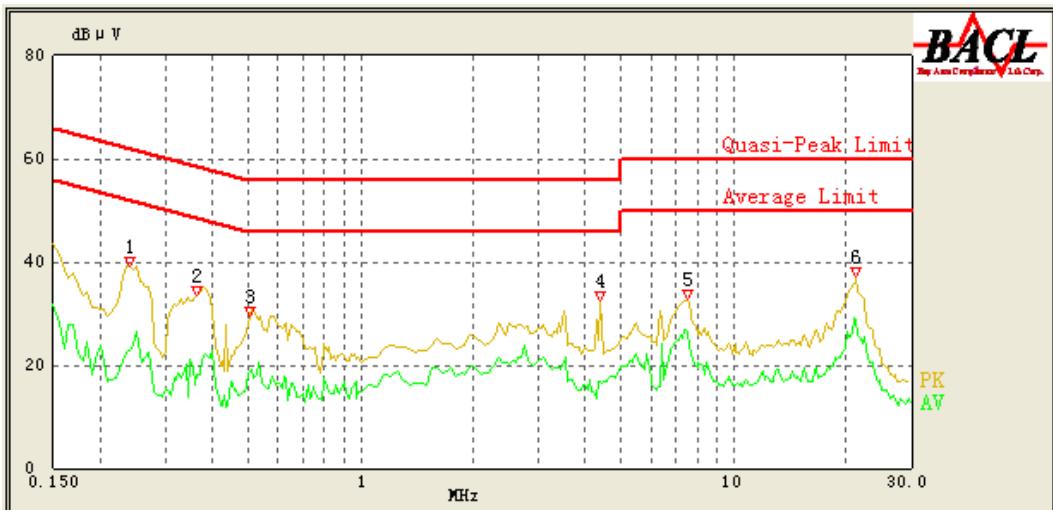
## Test Data

### Environmental Conditions

<b>Temperature:</b>	23.4 °C
<b>Relative Humidity:</b>	49 %
<b>ATM Pressure:</b>	101.1 kPa

*The testing was performed by Chris Wang on 2017-12-01.*

*EUT operation mode: Transmitting in high channel of 8-DPSK mode (Worst case)*

**AC 120V/60 Hz, Line**

Frequency (MHz)	Reading (dB $\mu$ V)	Detector (QP/Avg/AV/QP)	Bandwidth (kHz)	Line	Correction (dB)	Limit (dB $\mu$ V)	Margin (dB)	Comment
0.240	39.31	QP	9.000	L1	16.02	63.43	24.12	Compliance
0.240	22.72	Avg	9.000	L1	16.02	53.43	30.71	Compliance
0.365	33.38	QP	9.000	L1	16.05	59.86	26.48	Compliance
0.365	18.32	Avg	9.000	L1	16.05	49.86	31.54	Compliance
0.505	29.46	QP	9.000	L1	16.08	56.00	26.54	Compliance
0.500	18.54	Avg	9.000	L1	16.08	46.00	27.46	Compliance
4.400	32.55	QP	9.000	L1	15.85	56.00	23.45	Compliance
4.450	16.45	Avg	9.000	L1	15.85	46.00	29.55	Compliance
7.500	32.73	QP	9.000	L1	15.99	60.00	27.27	Compliance
7.550	26.61	Avg	9.000	L1	15.99	50.00	23.39	Compliance
21.300	37.03	QP	9.000	L1	16.45	60.00	22.97	Compliance
21.350	28.69	Avg	9.000	L1	16.45	50.00	21.31	Compliance

**AC 120V/60 Hz, Neutral**

Frequency (MHz)	Reading (dB $\mu$ V)	Detector (QP/Avg/AV)	Bandwidth (kHz)	Line	Correction (dB)	Limit (dB $\mu$ V)	Margin (dB)	Comment
0.235	39.35	QP	9.000	N	16.06	63.57	24.22	Compliance
0.235	26.99	Avg	9.000	N	16.06	53.57	26.58	Compliance
0.495	32.59	QP	9.000	N	16.11	56.14	23.55	Compliance
0.495	20.58	Avg	9.000	N	16.11	46.14	25.56	Compliance
0.750	27.47	QP	9.000	N	15.98	56.00	28.53	Compliance
0.745	20.27	Avg	9.000	N	15.98	46.00	25.73	Compliance
4.000	31.89	QP	9.000	N	15.88	56.00	24.11	Compliance
4.000	24.70	Avg	9.000	N	15.88	46.00	21.30	Compliance
7.300	35.38	QP	9.000	N	15.93	60.00	24.62	Compliance
7.300	29.30	Avg	9.000	N	15.93	50.00	20.70	Compliance
21.050	39.05	QP	9.000	N	16.18	60.00	20.95	Compliance
21.100	30.62	Avg	9.000	N	16.18	50.00	19.38	Compliance

**Note:**

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Margin = Limit – Reading

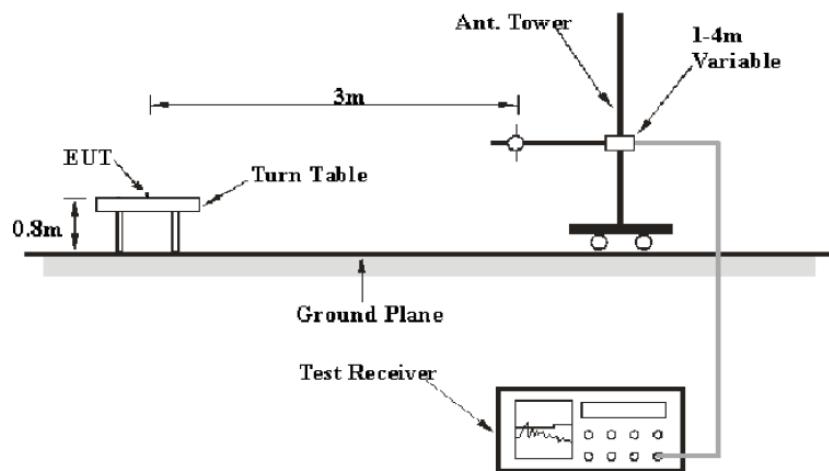
## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### Applicable Standard

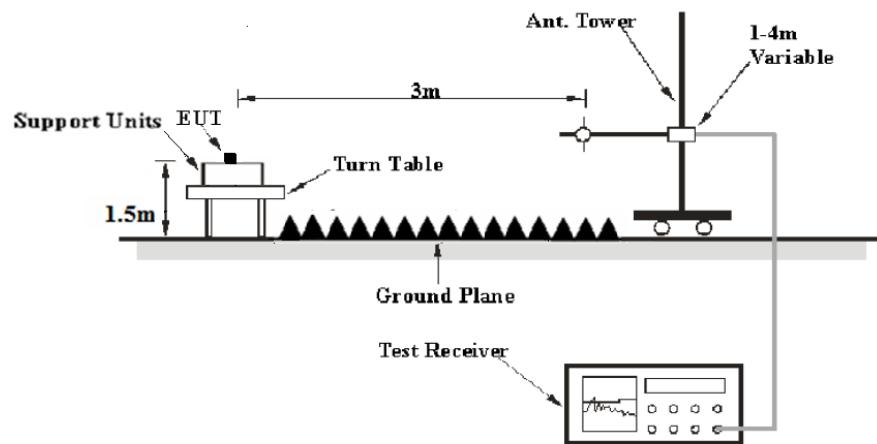
FCC §15.205; §15.209; §15.247(d)

### EUT Setup

Below 1 GHz:



Above 1GHz:



The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	23.4 °C
<b>Relative Humidity:</b>	49 %
<b>ATM Pressure:</b>	101.1 kPa

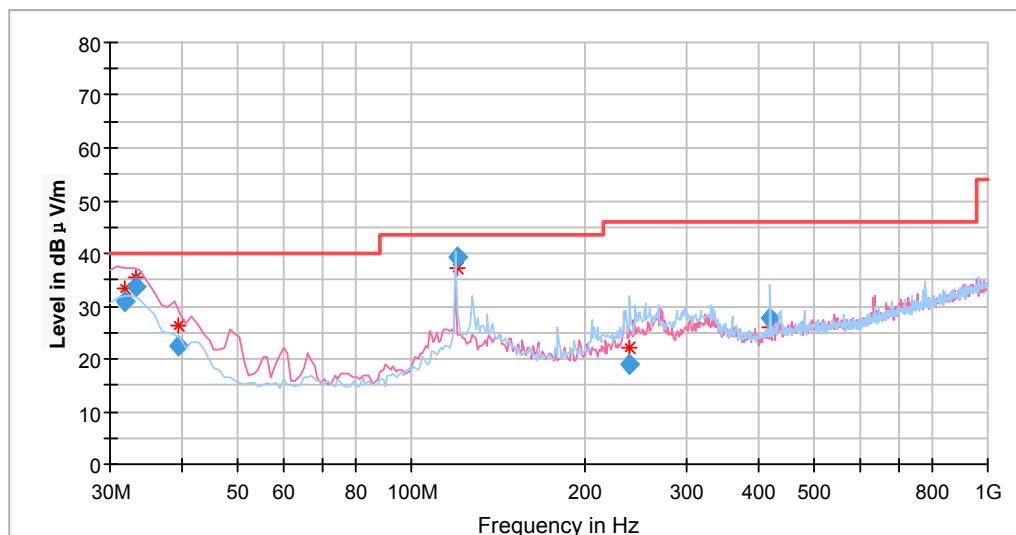
The testing was performed by Chris Wang on 2017-11-30 to 2017-12-19.

EUT operation mode: Transmitting

### Spurious Emission Test:

#### 30MHz-1GHz:

Pre-Scan with GFSK,  $\pi/4$ -DQPSK, 8-DPSK modes of operation in the X,Y and Z axes of orientation, the worst case 8-DPSK Mode in X-axis of orientation was recorded



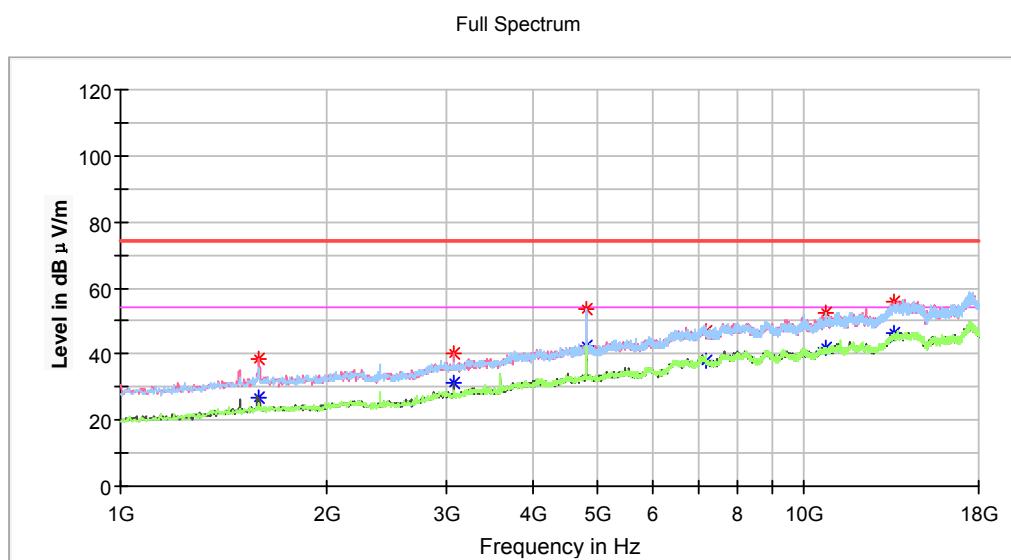
Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corr. (dB)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
31.793070	30.98	101.0	V	301.0	-5.6	40.00	9.02
33.325600	33.68	101.0	V	127.0	-6.6	40.00	6.32
39.392640	22.29	199.0	V	89.0	-10.8	40.00	17.71
119.997680	39.17	199.0	H	154.0	-11.6	43.50	4.33
238.767600	18.97	101.0	H	280.0	-12.6	46.00	27.03
419.926800	27.80	101.0	H	1.0	-8.1	46.00	18.20

**1GHz-18GHz:**

*Pre-Scan with GFSK,  $\pi/4$ -DQPSK, 8-DPSK modes of operation in the X, Y and Z axes of orientation, the worst case 8-DPSK Mode in Y-axis of orientation was recorded*

Note:

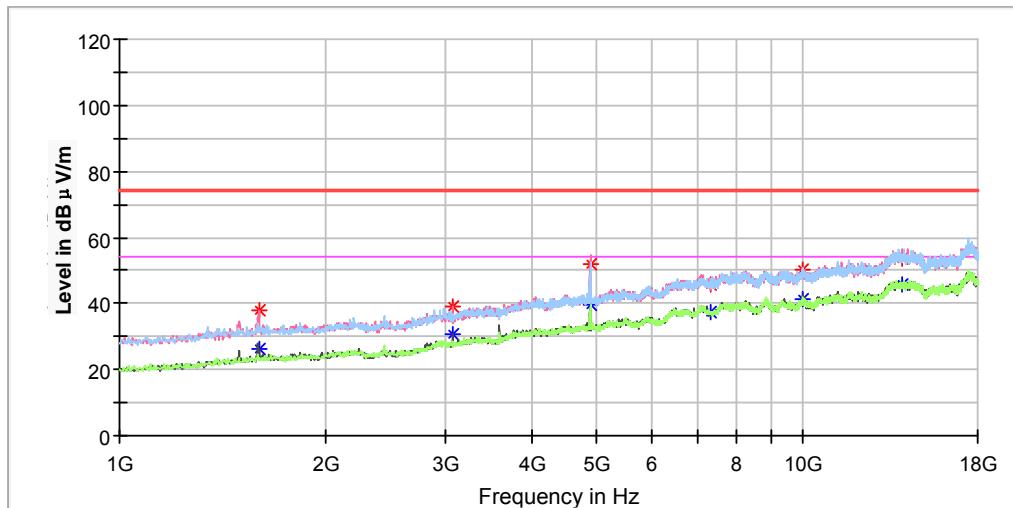
1. This test was performed with the 2.4-2.4835GHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
Corrected Amplitude = Corrected Factor + Reading  
Margin = Limit - Corrected. Amplitude

**Low Channel: 2402MHz**

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corr. (dB)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Height (cm)	Polar (H/V)				
1591.600000	---	26.82	200.0	V	164.0	-9.8	54.00	27.18
1591.600000	38.72	---	200.0	V	164.0	-9.8	74.00	35.28
3070.600000	---	31.17	250.0	V	199.0	-4.6	54.00	22.83
3070.600000	40.41	---	250.0	V	199.0	-4.6	74.00	33.59
4804.600000	---	42.16	250.0	H	353.0	-0.6	54.00	11.84
4804.600000	53.66	---	250.0	H	353.0	-0.6	74.00	20.34
7206.000000	46.66	---	250.0	H	200.0	6.3	74.00	27.34
7206.000000	---	38.06	250.0	H	200.0	6.3	54.00	15.94
10778.400000	---	41.71	250.0	H	66.0	10.8	54.00	12.29
10778.400000	52.41	---	250.0	H	66.0	10.8	74.00	21.59
13556.200000	---	46.07	150.0	V	359.0	17.2	54.00	7.93
13556.200000	55.71	---	150.0	V	359.0	17.2	74.00	18.29

**Middle Channel: 2441MHz**

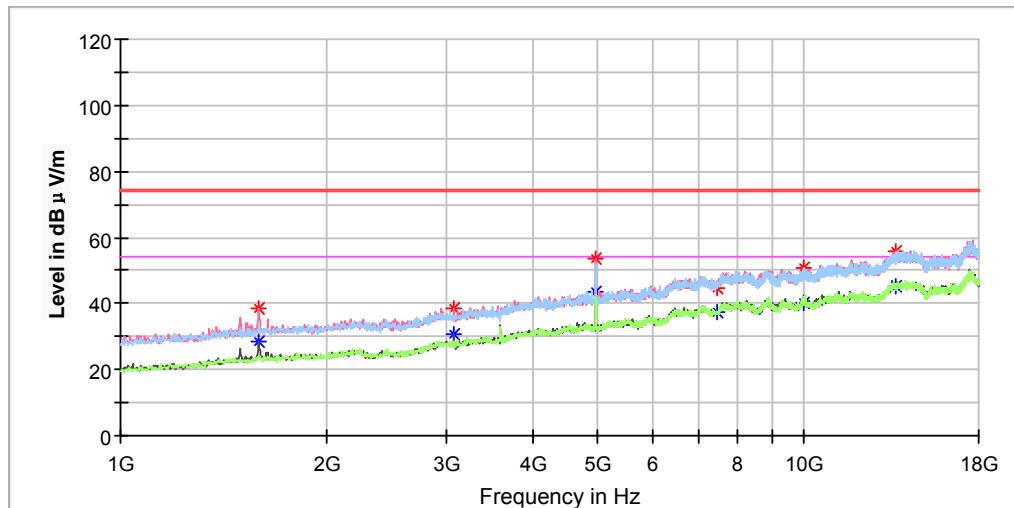
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corr. (dB)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Height (cm)	Polar (H/V)				
1598.400000	---	26.39	250.0	V	182.0	-9.8	54.00	27.61
1598.400000	37.85	---	200.0	V	182.0	-9.8	74.00	36.15
3070.600000	---	30.88	200.0	V	208.0	-4.6	54.00	23.12
3070.600000	38.85	---	200.0	V	208.0	-4.6	74.00	35.15
4882.000000	52.00	---	150.0	H	353.0	-0.4	74.00	22.00
4882.000000	---	39.82	150.0	H	353.0	-0.4	54.00	14.18
7323.000000	45.60	---	150.0	V	98.0	6.6	74.00	28.40
7323.000000	---	37.56	150.0	V	98.0	6.6	54.00	16.44
9979.400000	---	41.21	250.0	V	287.0	9.1	54.00	12.79
9979.400000	50.35	---	250.0	V	287.0	9.1	74.00	23.65
13957.400000	53.40	---	200.0	H	229.0	16.7	74.00	20.60
13957.400000	---	45.75	200.0	H	229.0	16.7	54.00	8.25

**High Channel: 2480MHz**

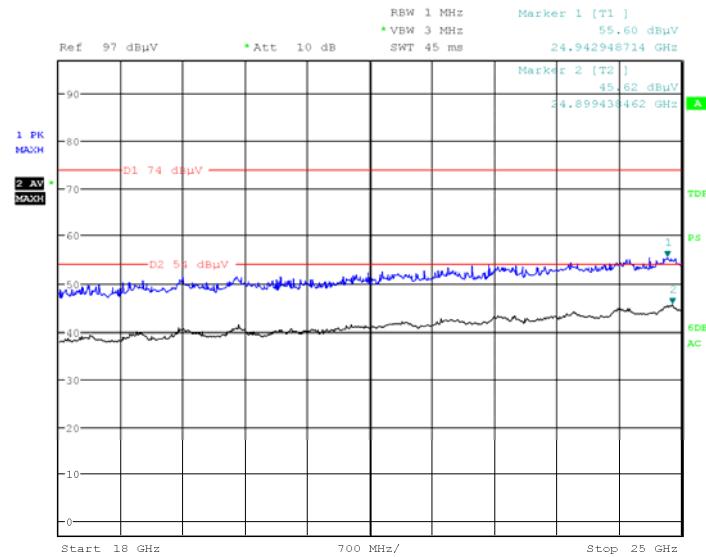
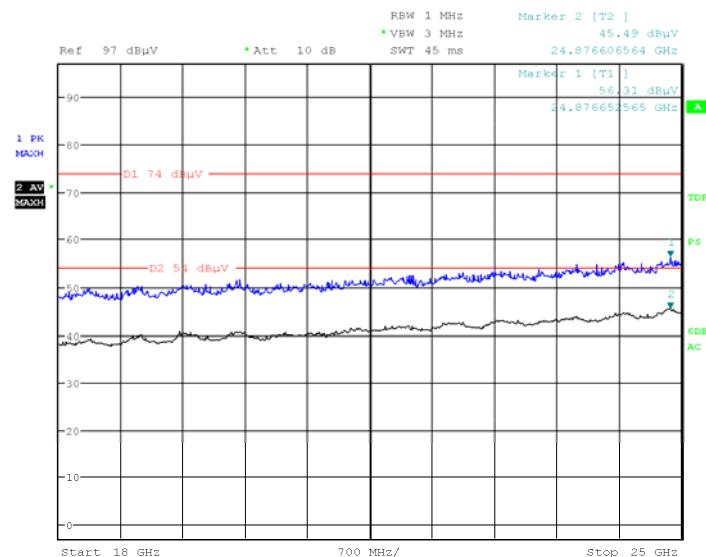
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corr. (dB)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Height (cm)	Polar (H/V)				
1591.600000	---	28.61	250.0	V	174.0	-9.8	54.00	25.39
1591.600000	38.47	---	250.0	V	174.0	-9.8	74.00	35.53
3070.600000	---	30.49	200.0	V	199.0	-4.6	54.00	23.51
3070.600000	38.37	---	200.0	V	199.0	-4.6	74.00	35.63
4960.000000	---	43.44	250.0	V	266.0	-0.3	54.00	10.56
4960.000000	53.44	---	250.0	V	266.0	-0.3	74.00	20.56
7440.000000	44.89	---	200.0	H	233.0	7.0	74.00	29.11
7440.000000	---	37.40	200.0	H	233.0	7.0	54.00	16.60
10010.000000	---	40.41	250.0	H	164.0	9.1	54.00	13.59
10010.000000	51.00	---	250.0	H	164.0	9.1	74.00	23.00
13590.200000	---	44.97	200.0	V	331.0	17.2	54.00	9.03
13590.200000	55.78	---	200.0	V	331.0	17.2	74.00	18.22

**18GHz-25GHz:**

*Pre-Scan with GFSK, π/4-DQPSK, 8-DPSK modes of operation in the X,Y and Z axes of orientation, the worst case 8-DPSK Mode in X-axis of orientation was recorded*

**Horizontal****Vertical**

### Restricted Bands Emissions:

*Pre-Scan with GFSK, π/4-DQPSK, 8-DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case 8-DPSK Mode in X-axis of orientation was recorded*

Note:

1. This test was performed with a 10dB Attenuator.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corr. (dB)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V /m)	Average (dB $\mu$ V /m)	Height (cm)	Polar (H/V)				
Left Band Edge								
2389.950000	46.06	---	150.0	H	100.0	2.6	74.00	27.94
2389.950000	---	36.91	150.0	H	100.0	2.6	54.00	17.09
Right Band Edge								
2483.520000	45.69	---	200.0	H	149.0	2.8	74.00	28.31
2483.520000	---	37.83	200.0	H	149.0	2.8	54.00	16.17

## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

Temperature:	23.4 °C
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa

*The testing was performed by Chris Wang on 2017-12-03.*

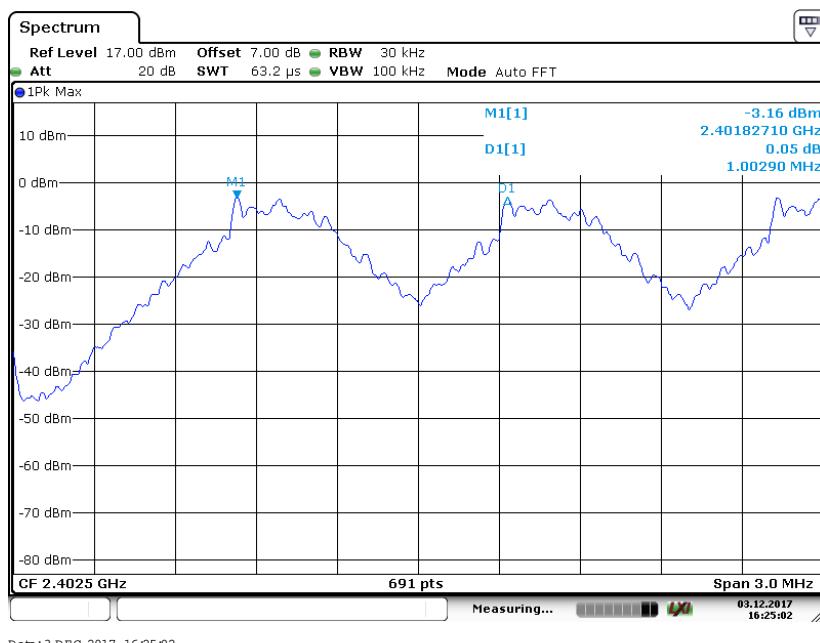
*EUT operation mode: Transmitting*

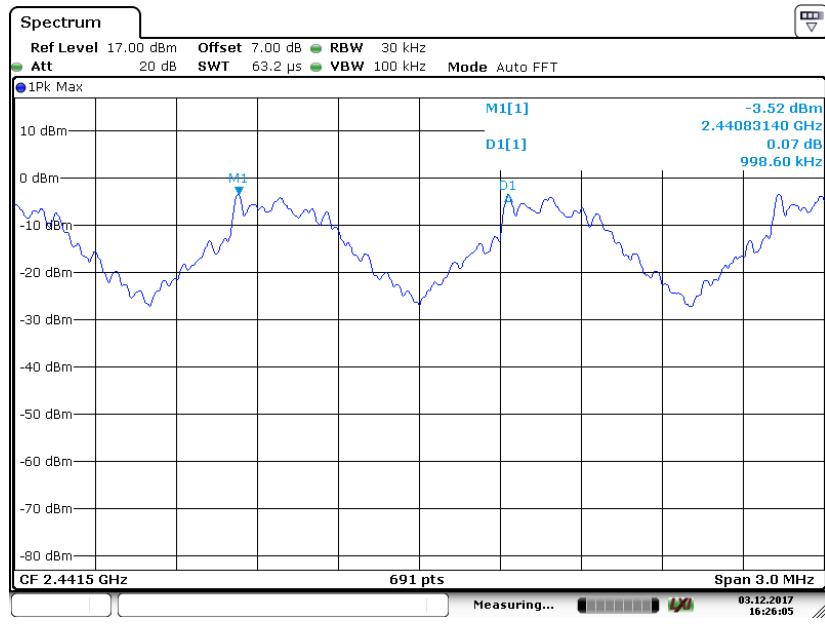
*Test Result: Compliance.*

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
<b>BDR (GFSK)</b>	Low	2402	1.003	0.645	Pass
	Adjacent	2403			
	Middle	2441	0.999	0.640	Pass
	Adjacent	2442			
	High	2480	1.003	0.640	Pass
	Adjacent	2479			
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	1.003	0.874	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.874	Pass
	Adjacent	2442			
	High	2480	1.003	0.874	Pass
	Adjacent	2479			
<b>EDR (8-DPSK)</b>	Low	2402	0.999	0.880	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.874	Pass
	Adjacent	2442			
	High	2480	1.003	0.869	Pass
	Adjacent	2479			

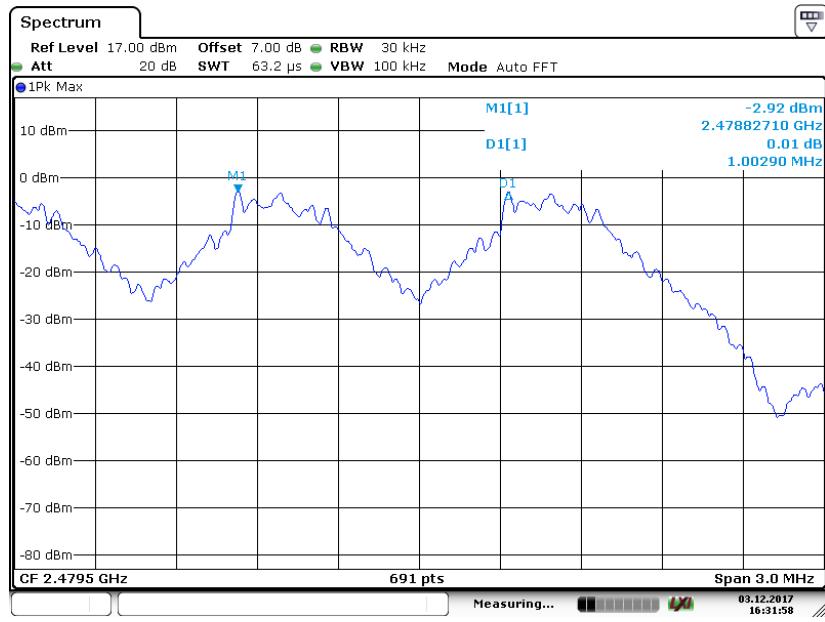
Note: Limit = 20 dB bandwidth\*2/3

### BDR (GFSK): Low Channel

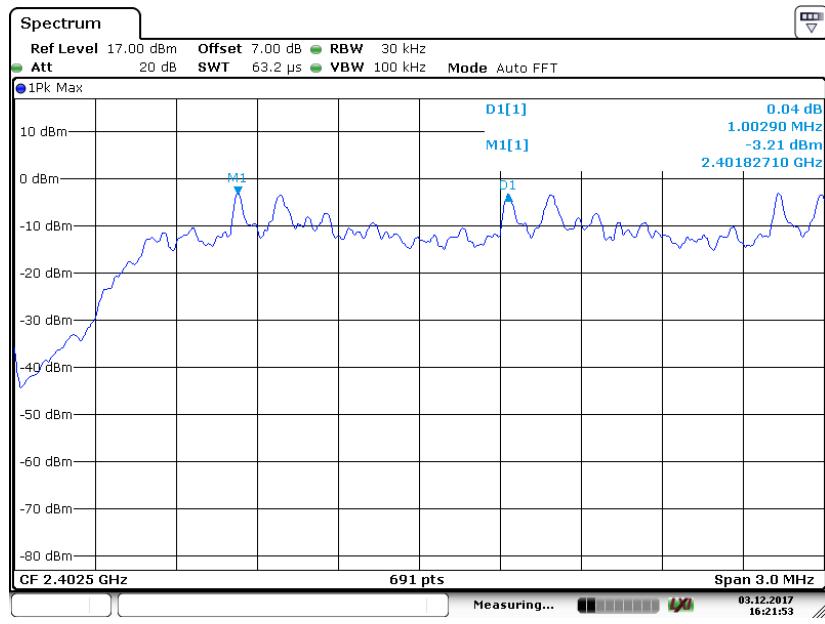
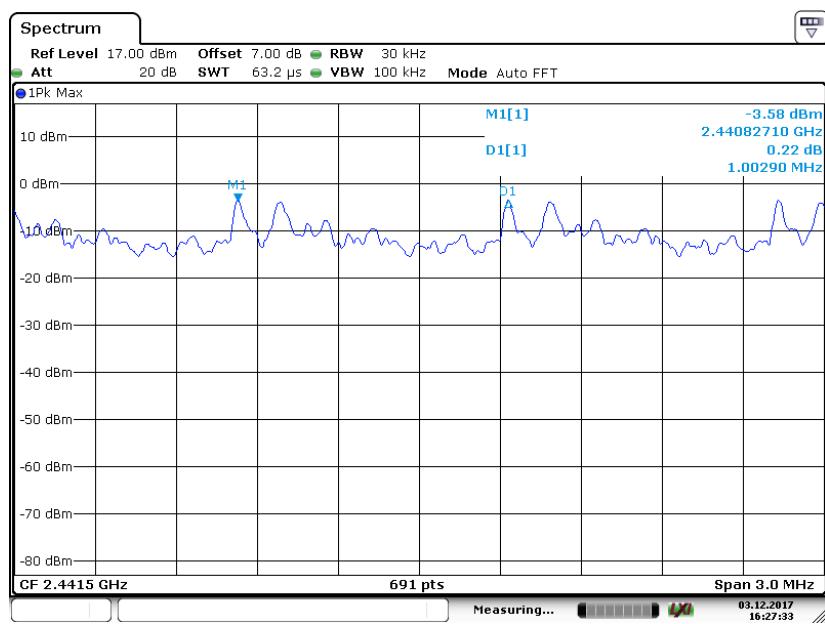


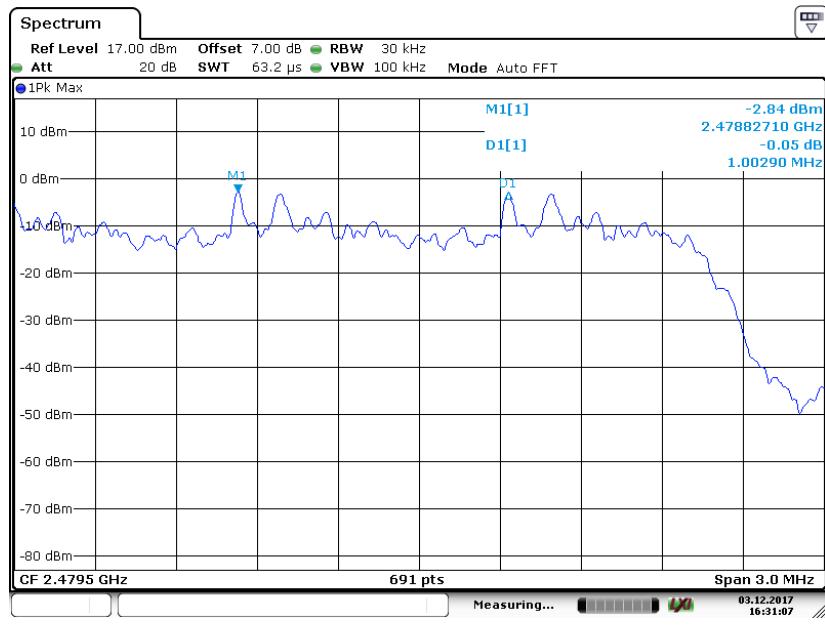
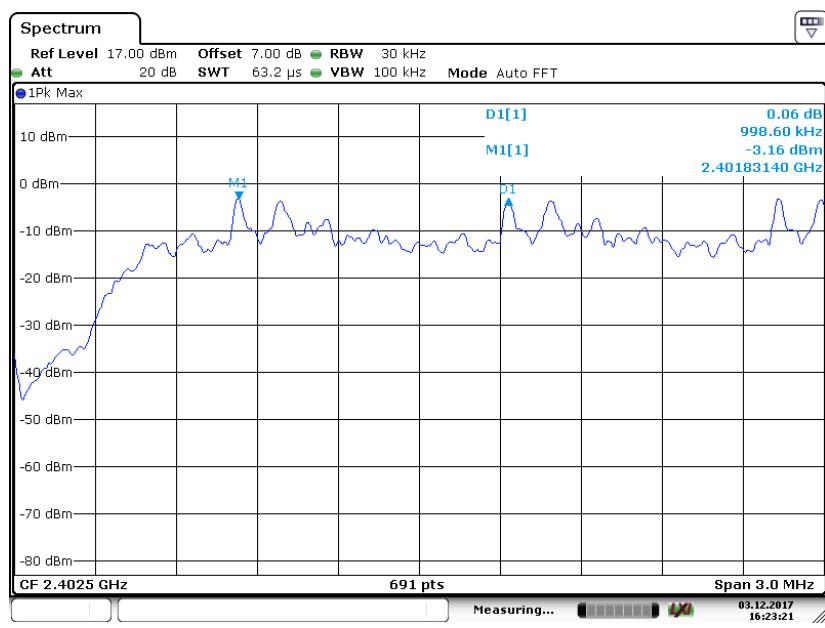
**BDR (GFSK): Middle Channel**

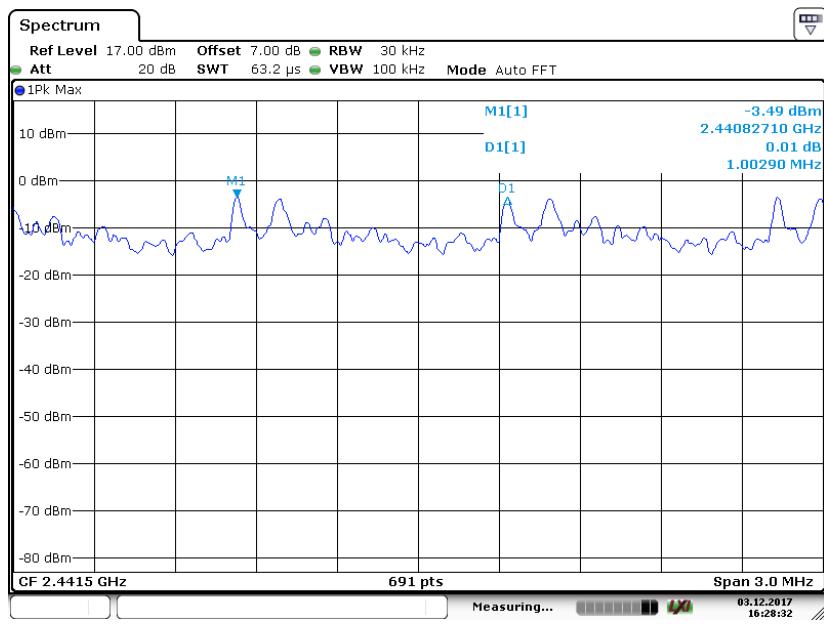
Date: 3 DEC 2017 16:26:05

**BDR (GFSK): High Channel**

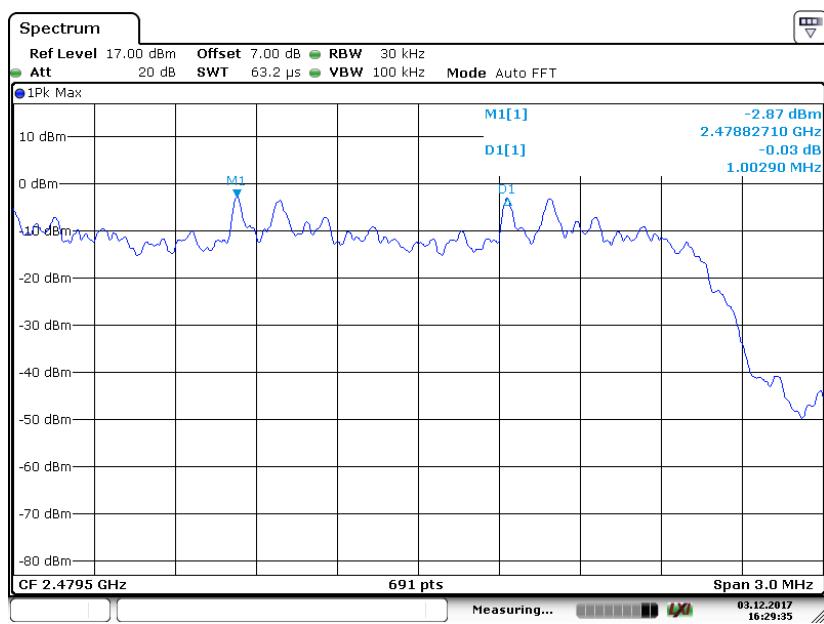
Date: 3 DEC 2017 16:31:58

**EDR ( $\pi/4$ -DQPSK): Low Channel****EDR ( $\pi/4$ -DQPSK): Middle Channel**

**EDR ( $\pi/4$ -DQPSK): High Channel****EDR (8-DPSK): Low Channel**

**EDR (8-DPSK): Middle Channel**

Date: 3 DEC 2017 16:28:32

**EDR (8-DPSK): High Channel**

Date: 3 DEC 2017 16:29:35

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Data

#### Environmental Conditions

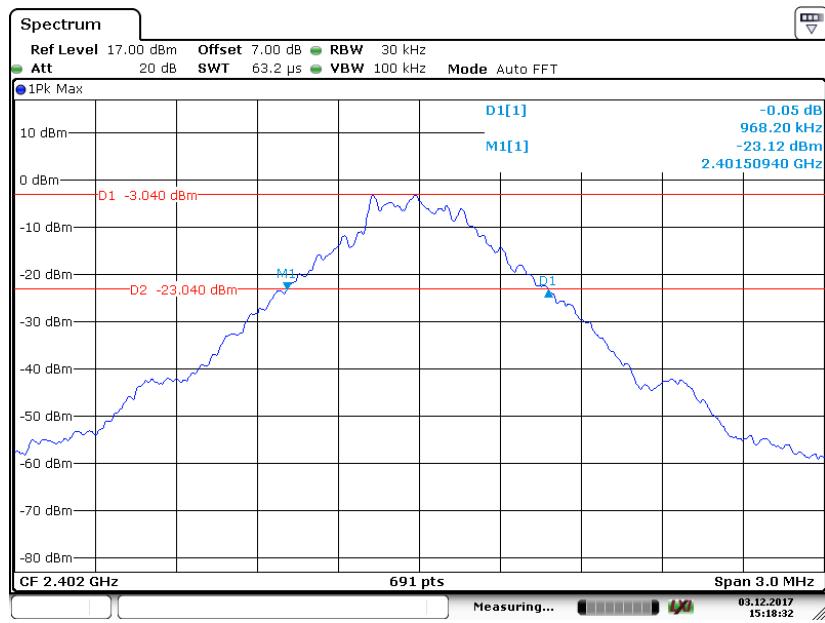
<b>Temperature:</b>	23.2 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.3 kPa

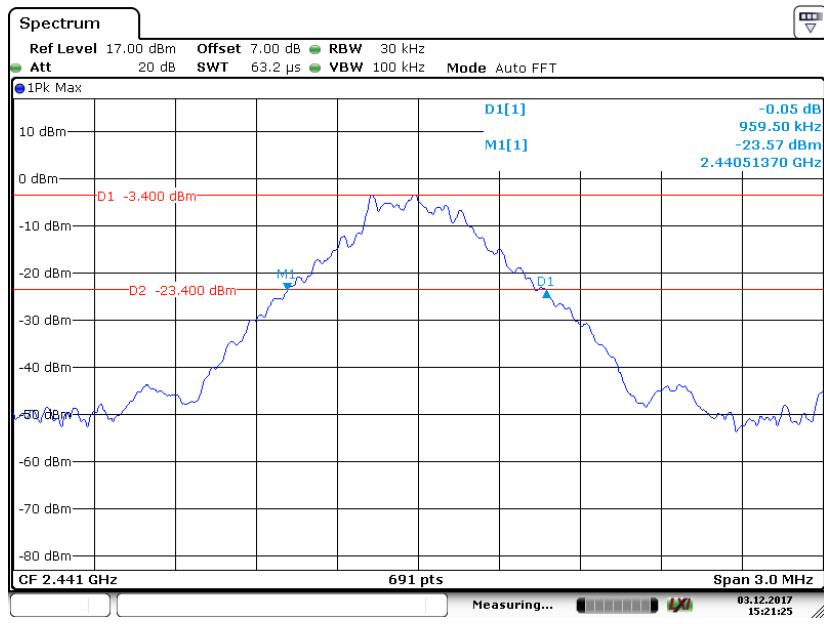
The testing was performed by Chris Wang on 2017-12-03.

EUT operation mode: Transmitting

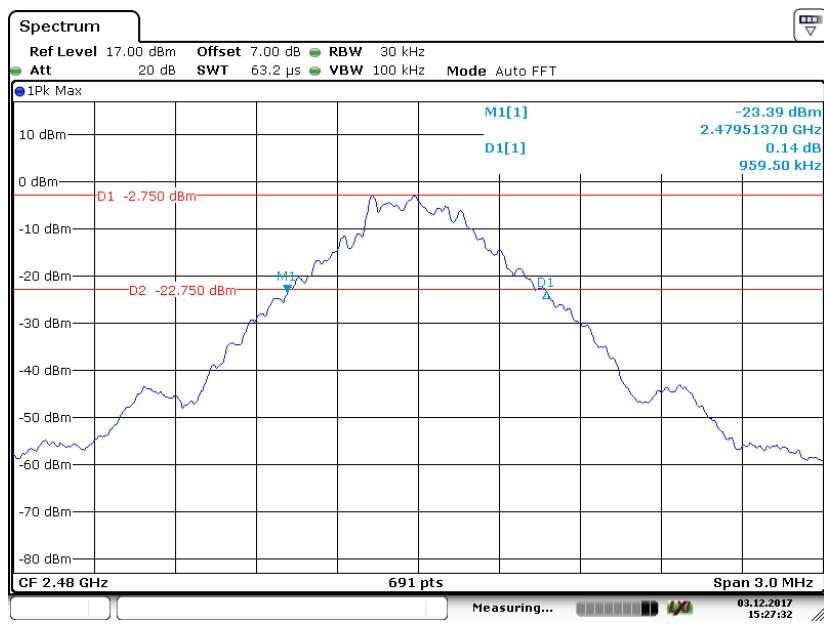
Test Result: Compliance.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (kHz)
BDR (GFSK)	Low	2402	0.968
	Middle	2441	0.960
	High	2480	0.960
EDR ( $\pi/4$ -DQPSK)	Low	2402	1.311
	Middle	2441	1.311
	High	2480	1.311
EDR (8-DPSK)	Low	2402	1.320
	Middle	2441	1.311
	High	2480	1.303

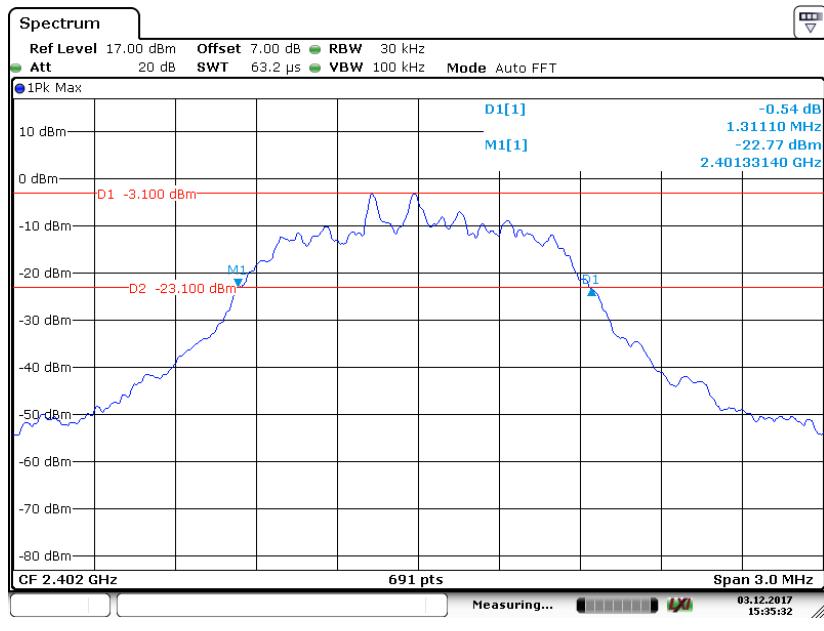
**BDR (GFSK): Low Channel**

**BDR (GFSK): Middle Channel**

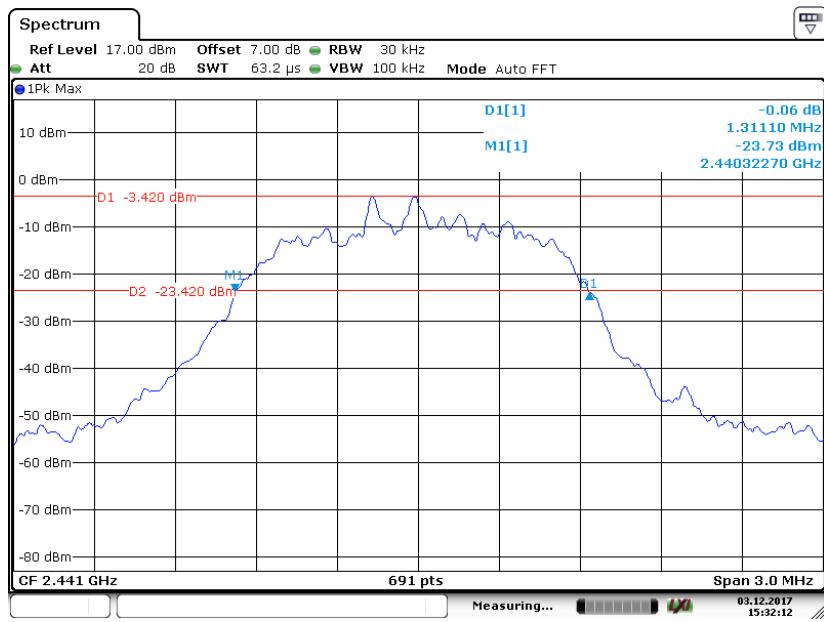
Date: 3 DEC 2017 15:21:26

**BDR (GFSK): High Channel**

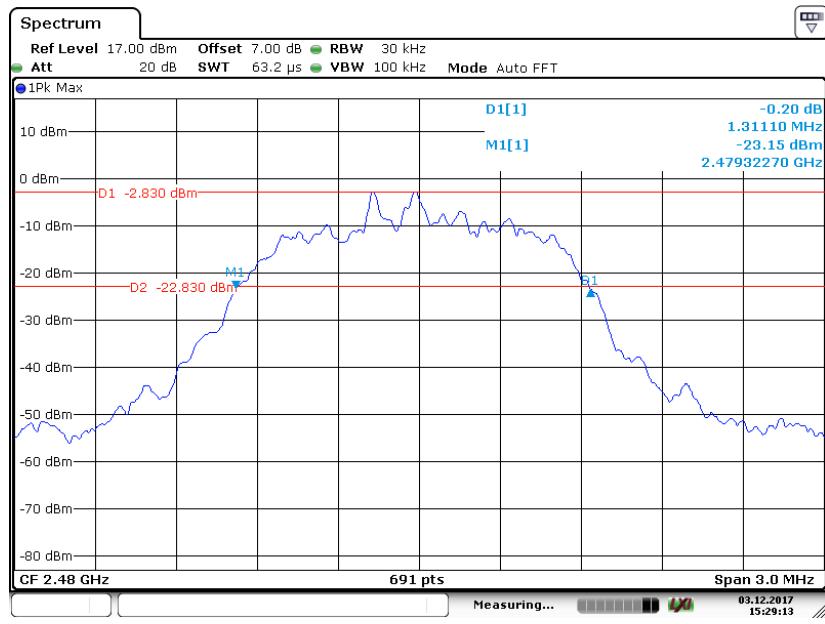
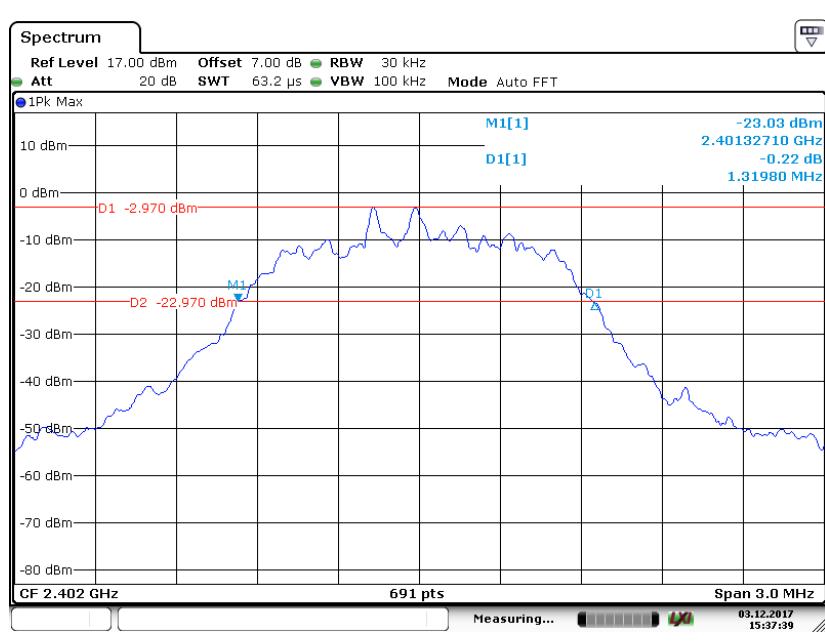
Date: 3 DEC 2017 15:27:32

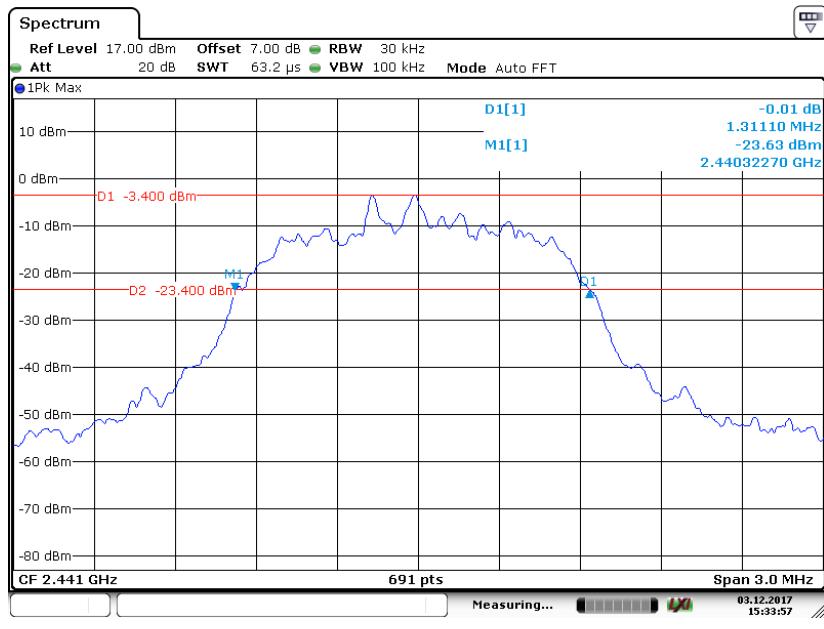
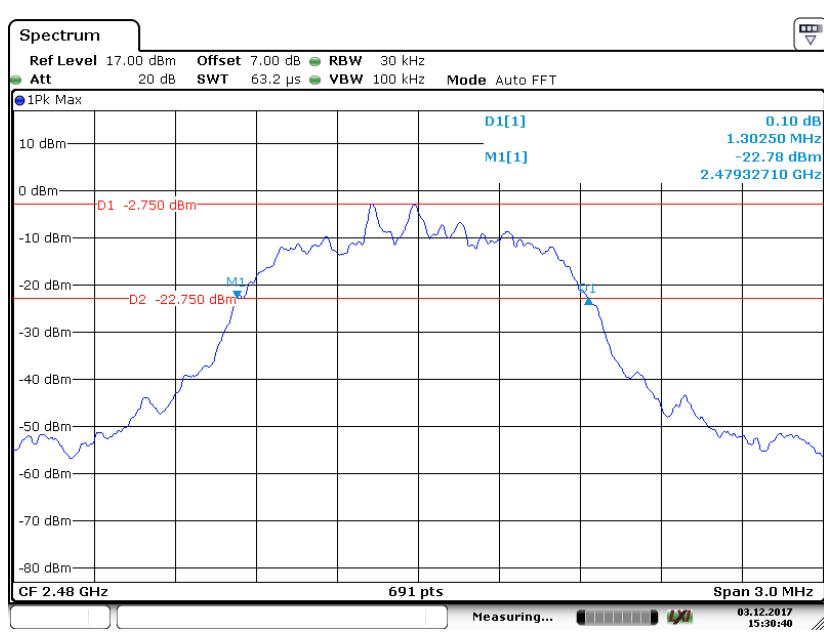
**EDR ( $\pi/4$ -DQPSK): Low Channel**

Date: 3 DEC 2017 15:35:32

**EDR( $\pi/4$ -DQPSK): Middle Channel**

Date: 3 DEC 2017 15:32:12

**EDR ( $\pi/4$ -DQPSK): High Channel****EDR (8-DPSK): Low Channel**

**EDR (8-DPSK): Middle Channel****EDR (8-DPSK): High Channel**

## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

### Test Data

#### Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

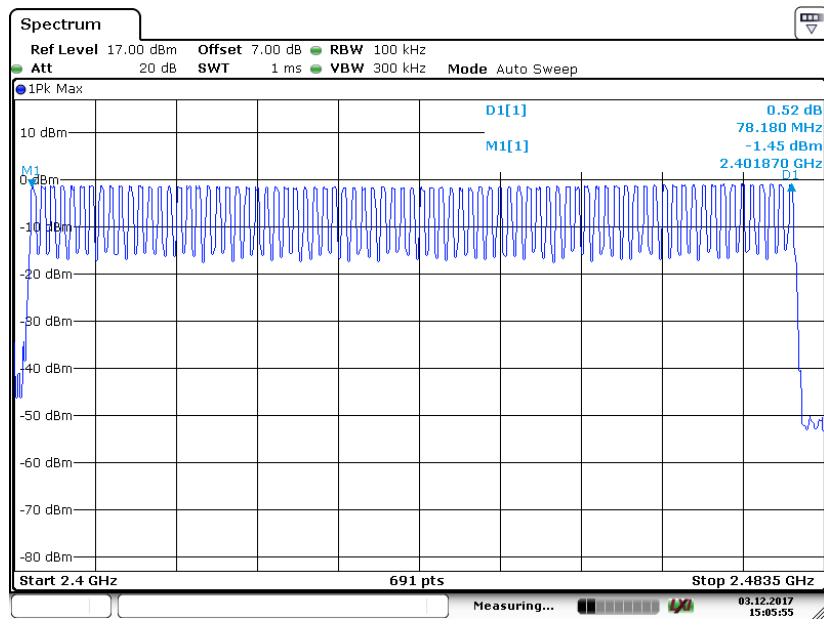
The testing was performed by Chris Wang on 2017-12-03.

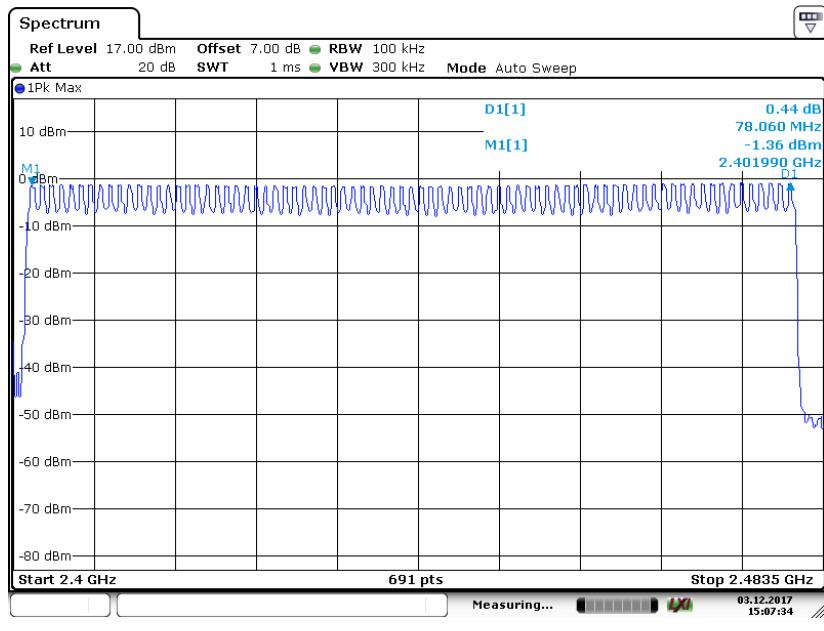
EUT operation mode: Hopping

Test Result: Compliance.

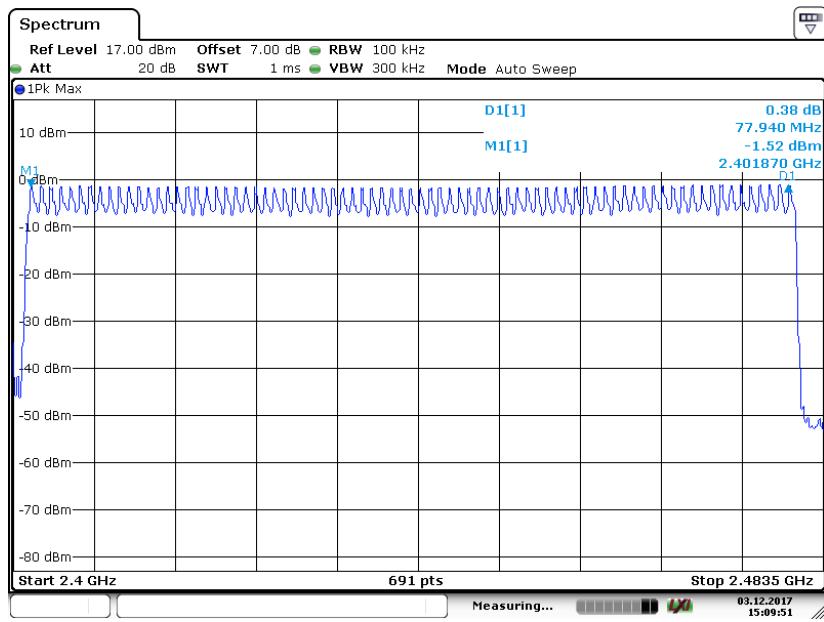
Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR ( $\pi/4$ -DQPSK)	2400-2483.5	79	≥15
EDR (8-DPSK)	2400-2483.5	79	≥15

### BDR (GFSK): Number of Hopping Channels



**EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels**

Date: 3 DEC 2017 15:07:34

**EDR (8-DPSK): Number of Hopping Channels**

Date: 3 DEC 2017 15:09:51

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

- 1 Span: Zero span, centered on a hopping channel.
- 2 RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
- 3 Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- 4 Detector function: Peak.
- 5 Trace: Max hold.

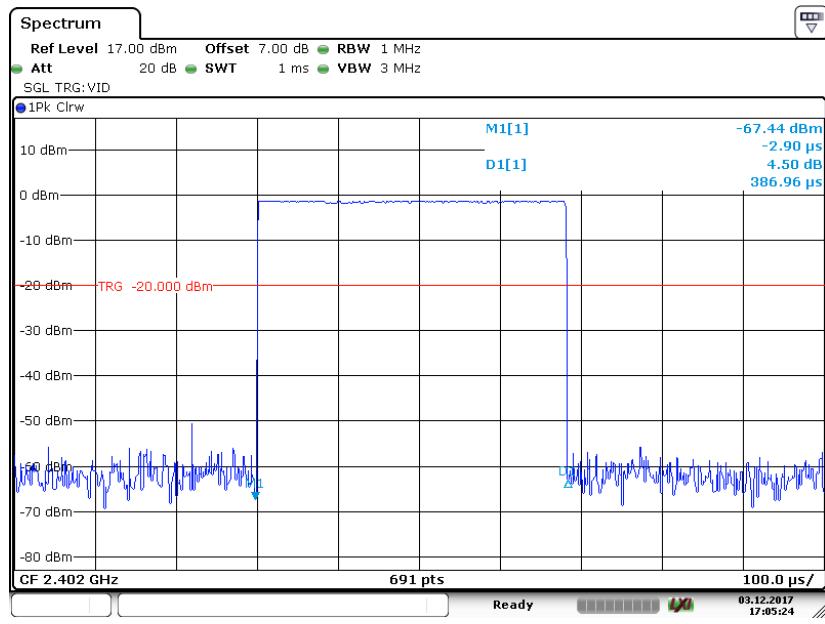
**Test Data****Environmental Conditions**

<b>Temperature:</b>	23.4 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.2 kPa

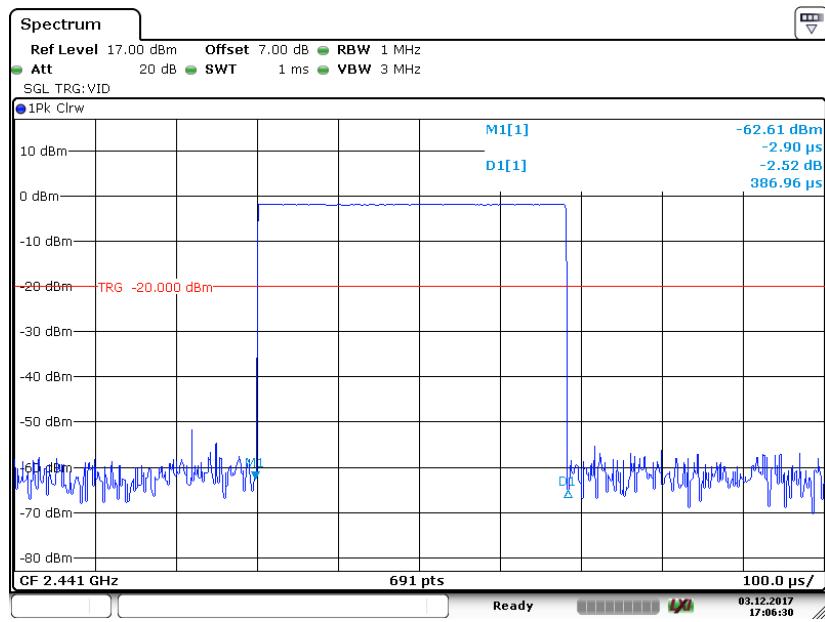
*The testing was performed by Chris Wang on 2017-12-03.*

*EUT operation mode: Hopping*

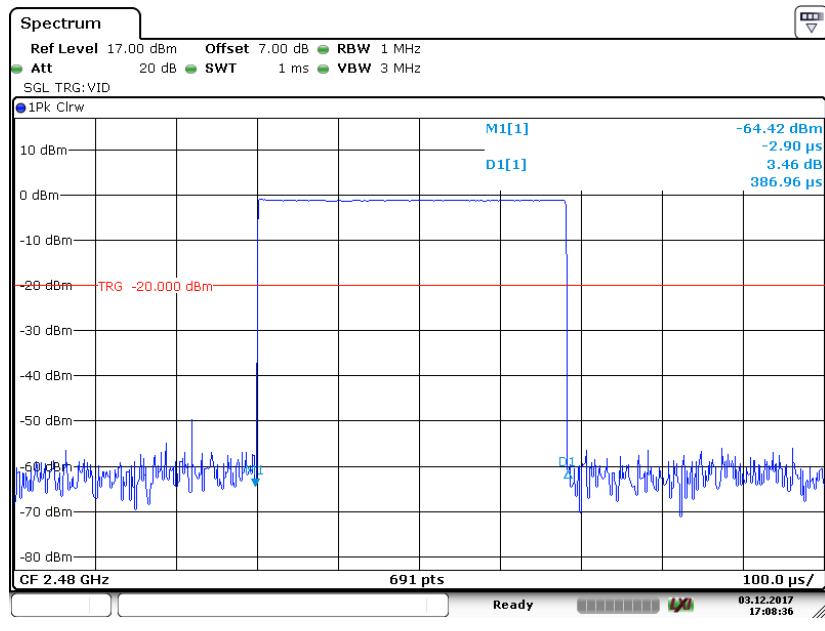
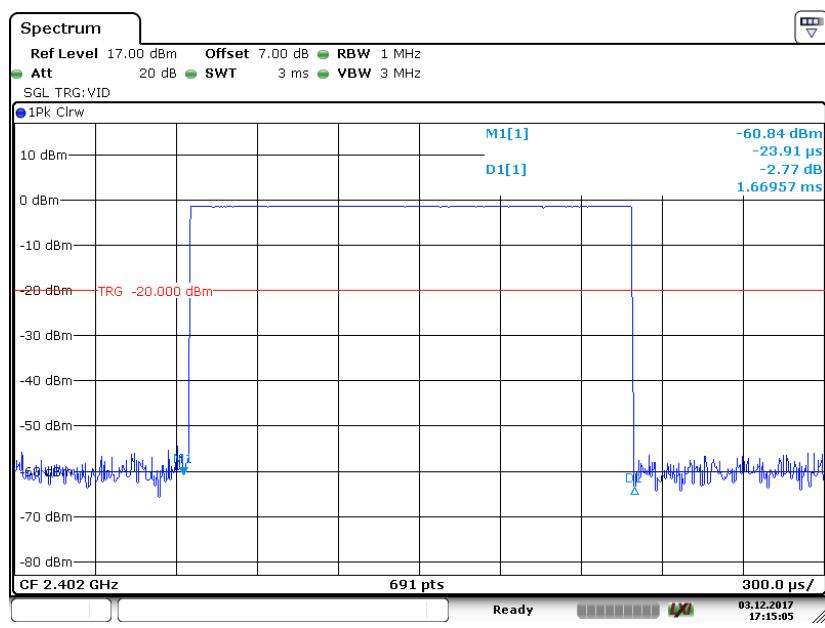
Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Low	0.387	0.124	0.4	Pass
		Middle	0.387	0.124	0.4	Pass
		High	0.387	0.124	0.4	Pass
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	DH3	Low	1.670	0.267	0.4	Pass
		Middle	1.664	0.266	0.4	Pass
		High	1.661	0.266	0.4	Pass
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S					
	DH5	Low	2.903	0.310	0.4	Pass
		Middle	2.903	0.310	0.4	Pass
		High	2.903	0.310	0.4	Pass
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S					
EDR (π/4-DQPSK)	2DH1	Low	0.401	0.128	0.4	Pass
		Middle	0.398	0.127	0.4	Pass
		High	0.402	0.129	0.4	Pass
	Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	2DH3	Low	1.666	0.267	0.4	Pass
		Middle	1.662	0.266	0.4	Pass
		High	1.657	0.265	0.4	Pass
	Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S					
	2DH5	Low	2.914	0.311	0.4	Pass
		Middle	2.914	0.311	0.4	Pass
		High	2.914	0.311	0.4	Pass
	Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S					
EDR (8-DPSK)	3DH1	Low	0.398	0.127	0.4	Pass
		Middle	0.399	0.128	0.4	Pass
		High	0.398	0.127	0.4	Pass
	Note: 3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	3DH3	Low	1.657	0.265	0.4	Pass
		Middle	1.666	0.267	0.4	Pass
		High	1.657	0.265	0.4	Pass
	Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S					
	3DH5	Low	2.926	0.312	0.4	Pass
		Middle	2.926	0.312	0.4	Pass
		High	2.920	0.311	0.4	Pass
	Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S					

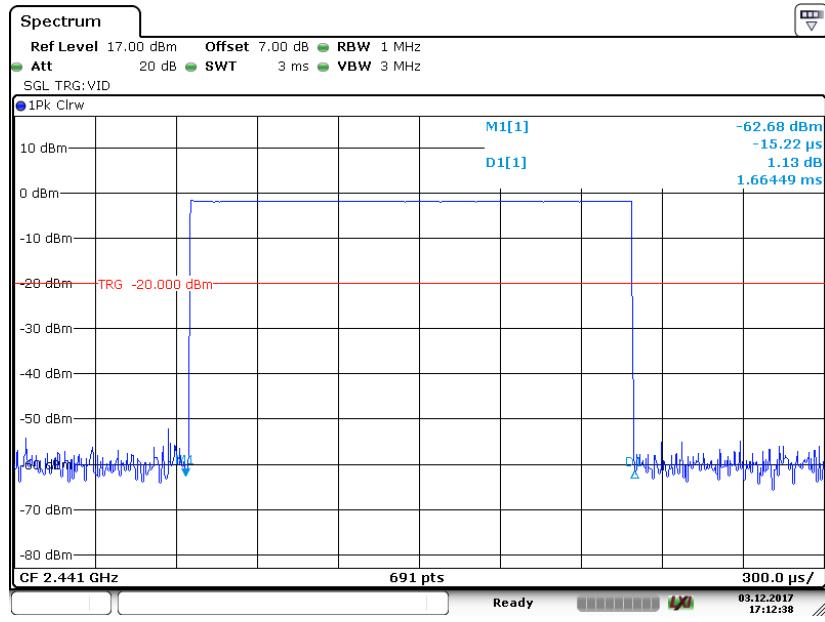
**BDR (GFSK): Pulse time, Low Channel, DH1**

Date: 3 DEC 2017 17:05:24

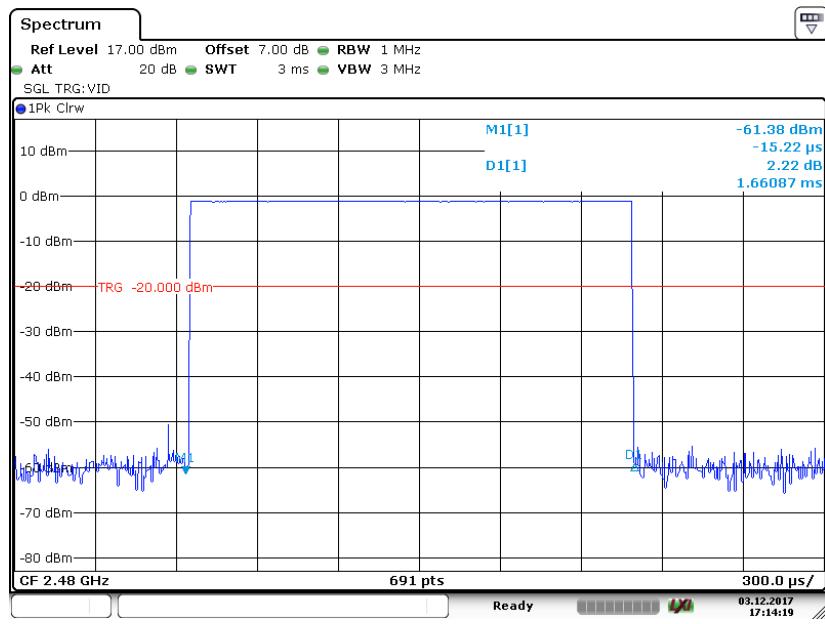
**BDR (GFSK): Pulse time, Middle Channel, DH1**

Date: 3 DEC 2017 17:06:31

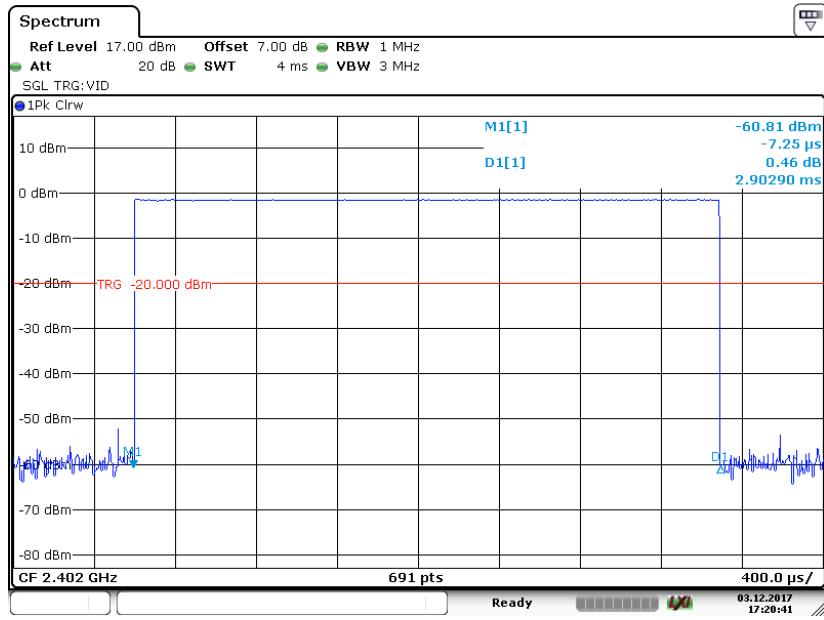
**BDR (GFSK): Pulse time, High Channel, DH1****BDR (GFSK): Pulse time, Low Channel, DH3**

**BDR (GFSK): Pulse time, Middle Channel, DH3**

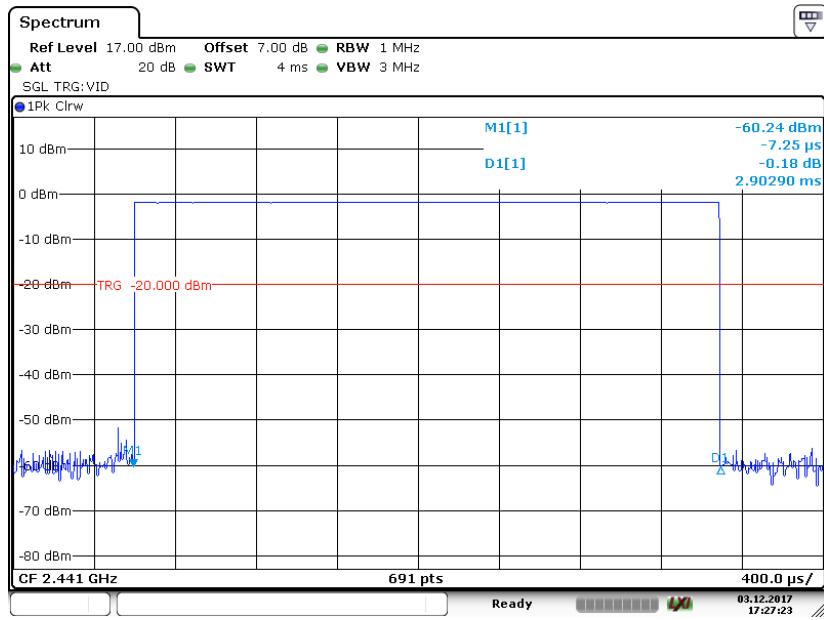
Date: 3 DEC 2017 17:12:39

**BDR (GFSK): Pulse time, High Channel, DH3**

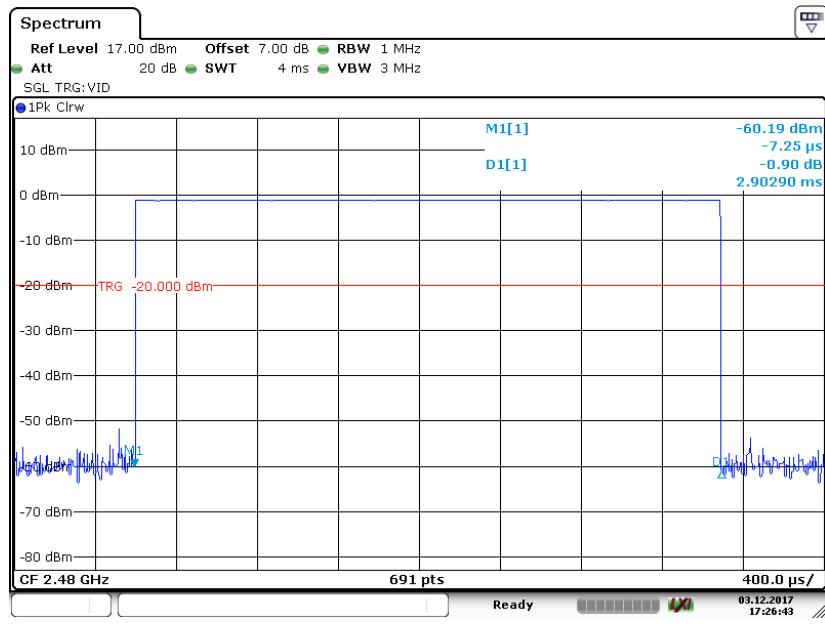
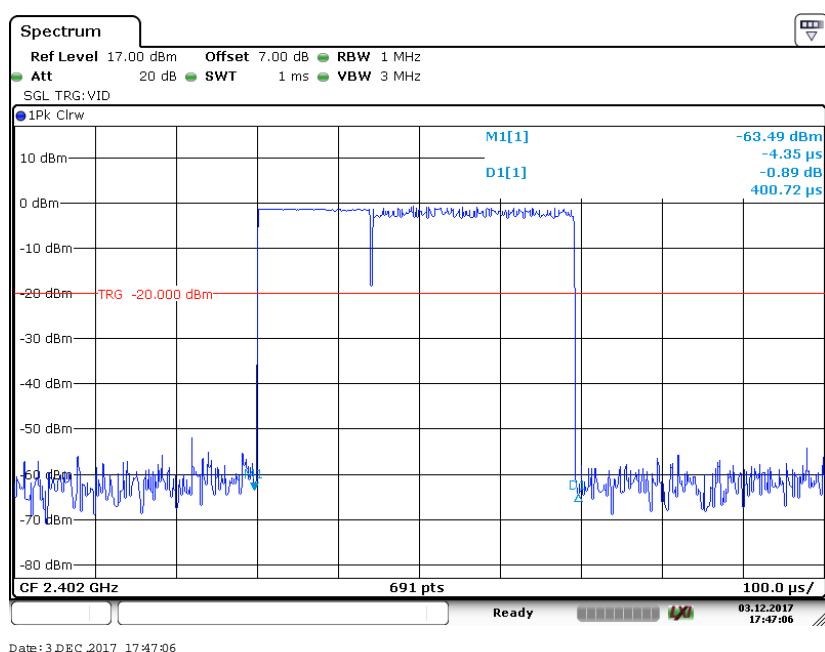
Date: 3 DEC 2017 17:14:19

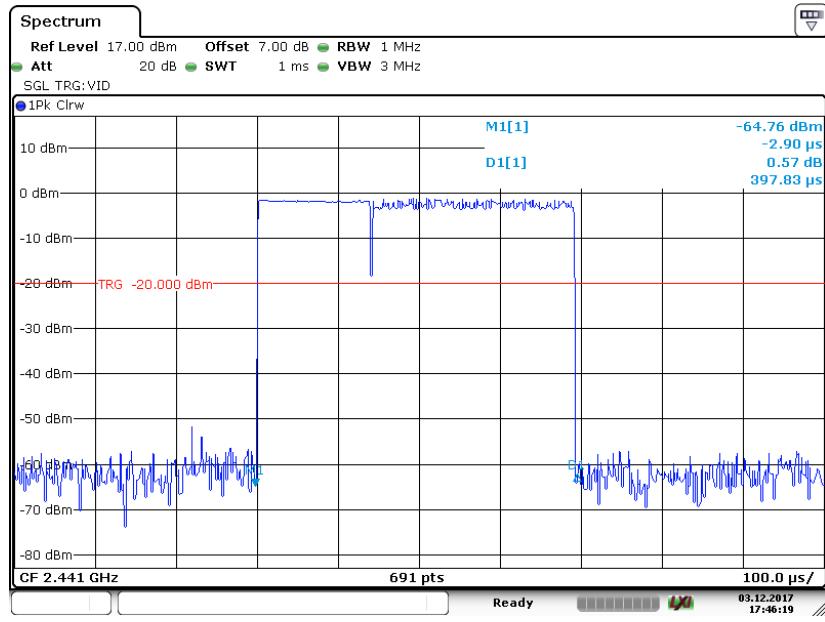
**BDR (GFSK): Pulse time, Low Channel, DH5**

Date: 3 DEC 2017 17:20:42

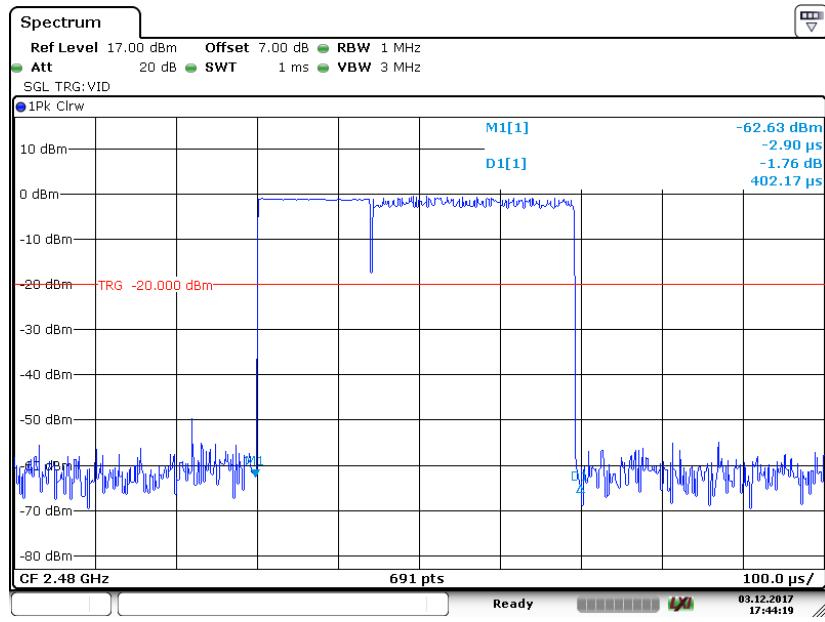
**BDR (GFSK): Pulse time, Middle Channel, DH5**

Date: 3 DEC 2017 17:27:23

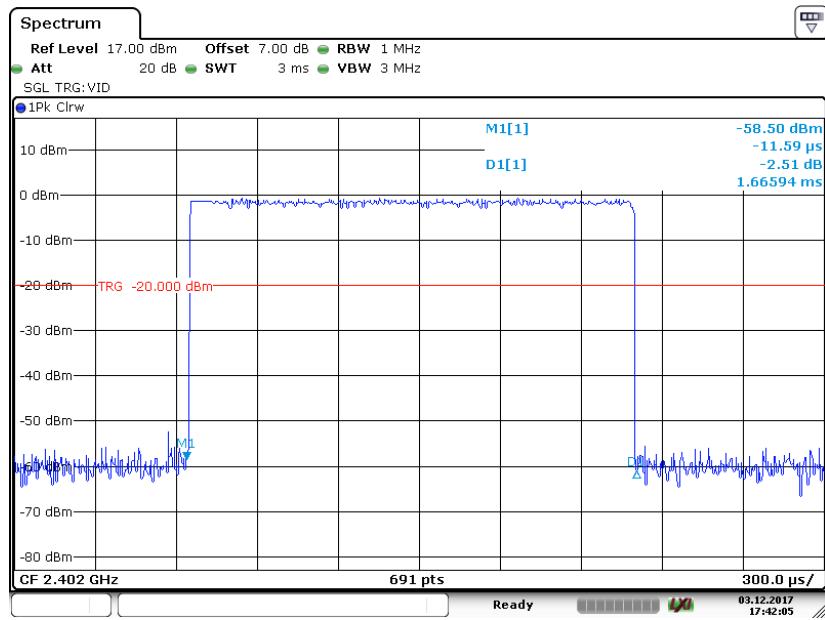
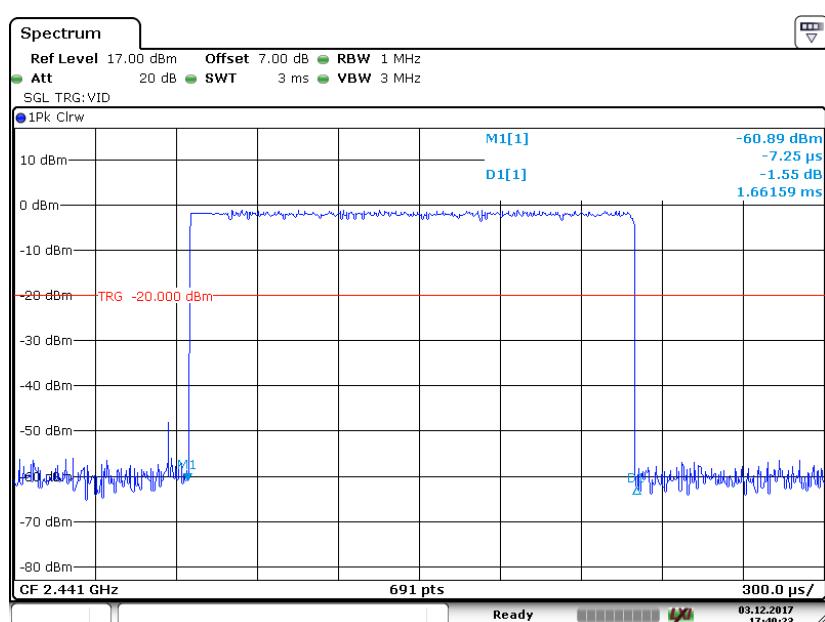
**BDR (GFSK): Pulse time, High Channel, DH5****EDR ( $\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1**

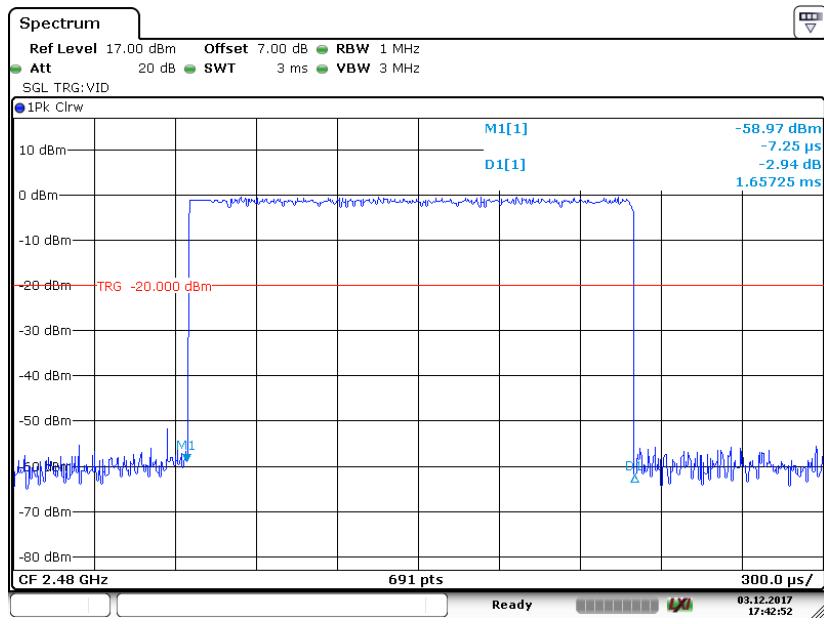
**EDR ( $\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH1**

Date: 3 DEC 2017 17:46:19

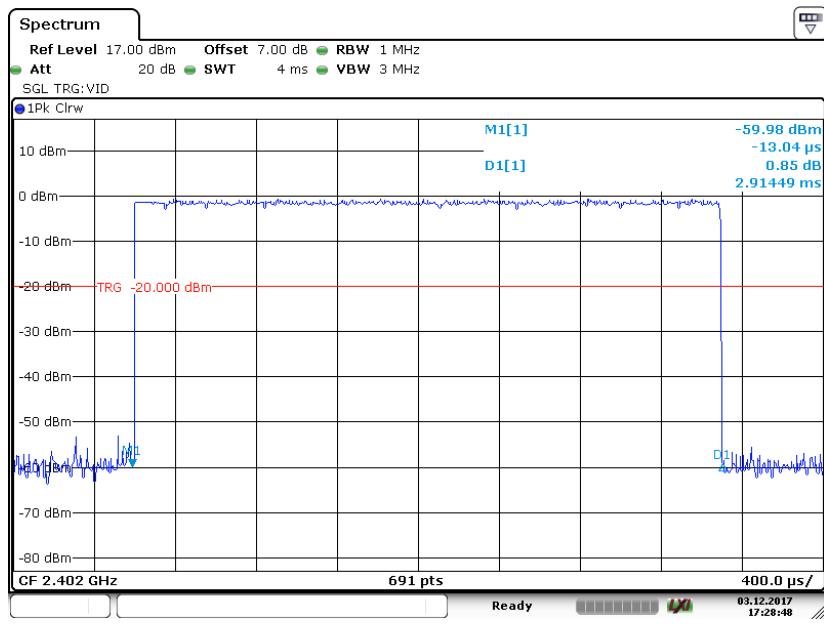
**EDR ( $\pi/4$ -DQPSK):Pulse time, High Channel, 2DH1**

Date: 3 DEC 2017 17:44:19

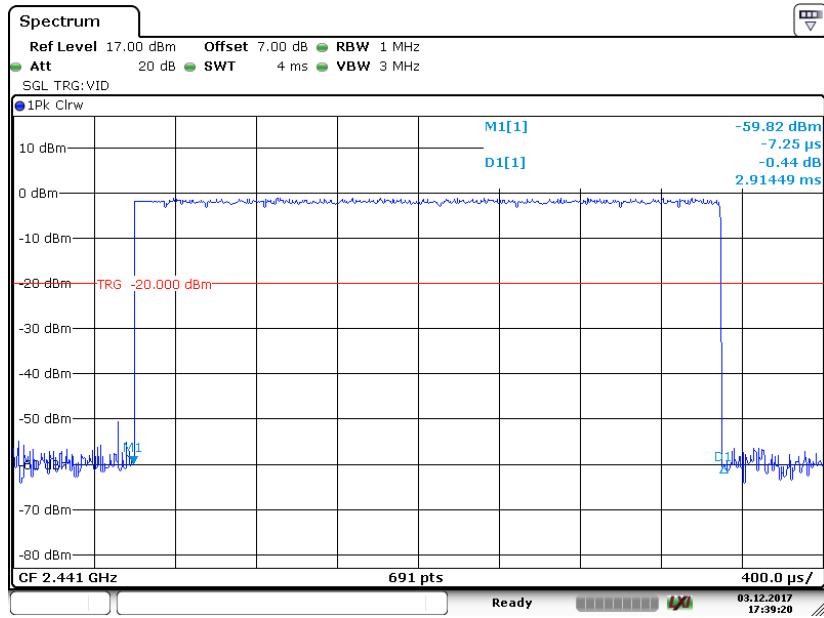
**EDR ( $\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH3****EDR ( $\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH3**

**EDR ( $\pi/4$ -DQPSK):Pulse time, High Channel, 2DH3**

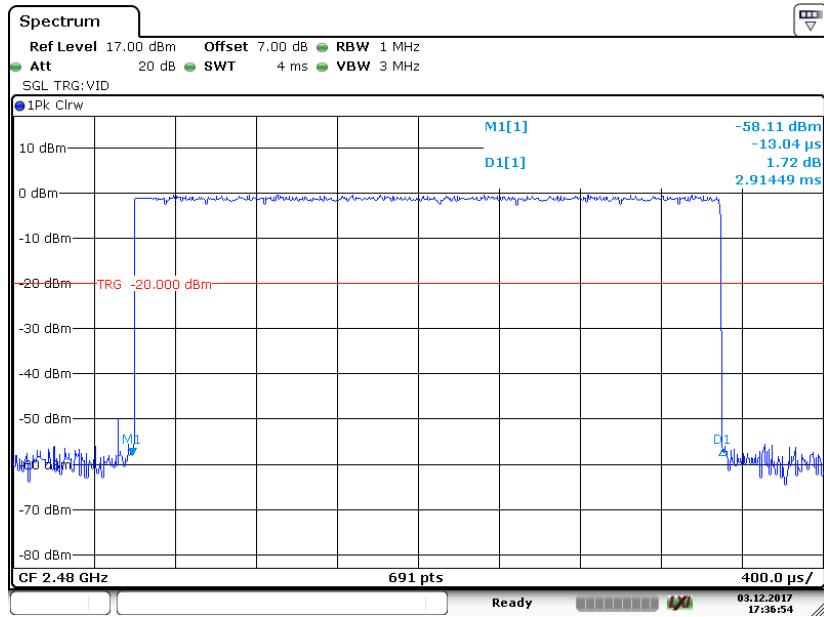
Date: 3 DEC 2017 17:42:52

**EDR ( $\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH5**

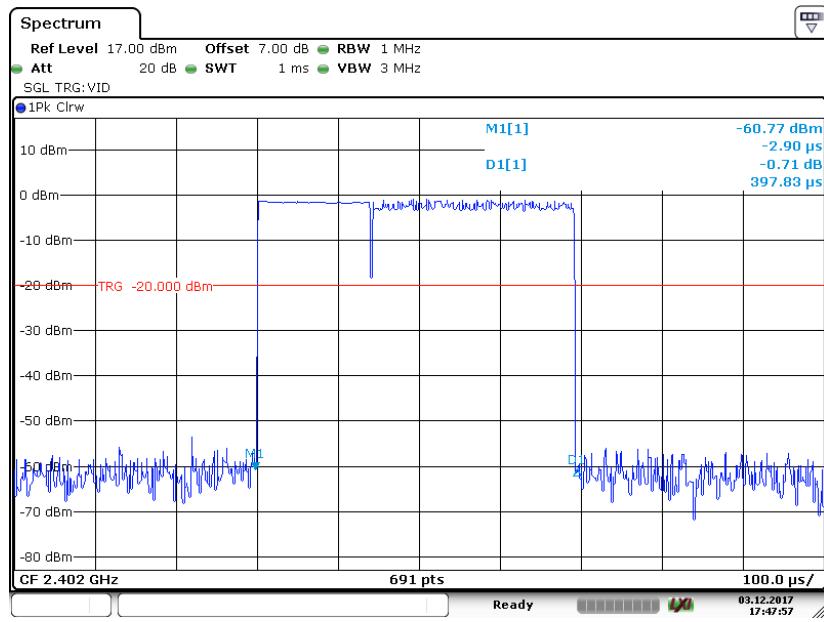
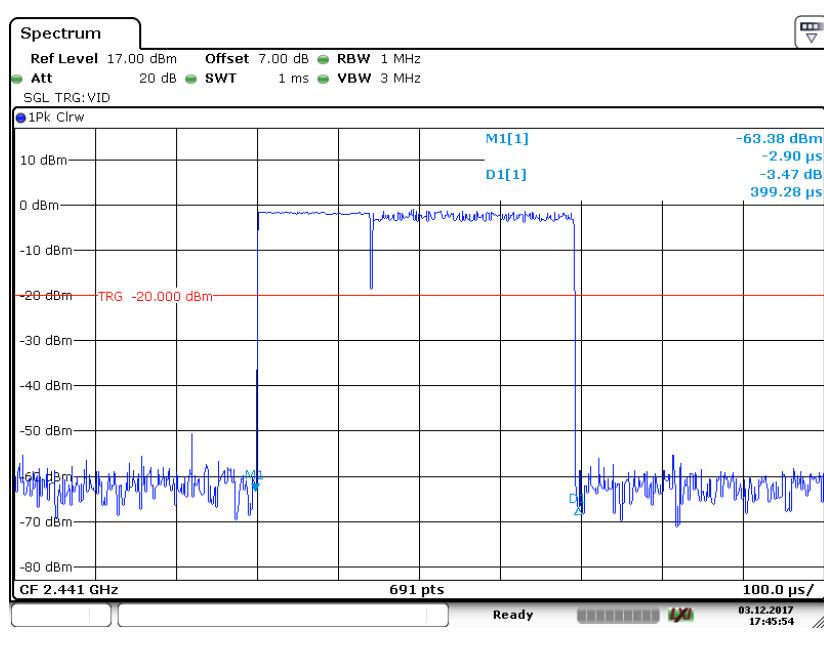
Date: 3 DEC 2017 17:28:48

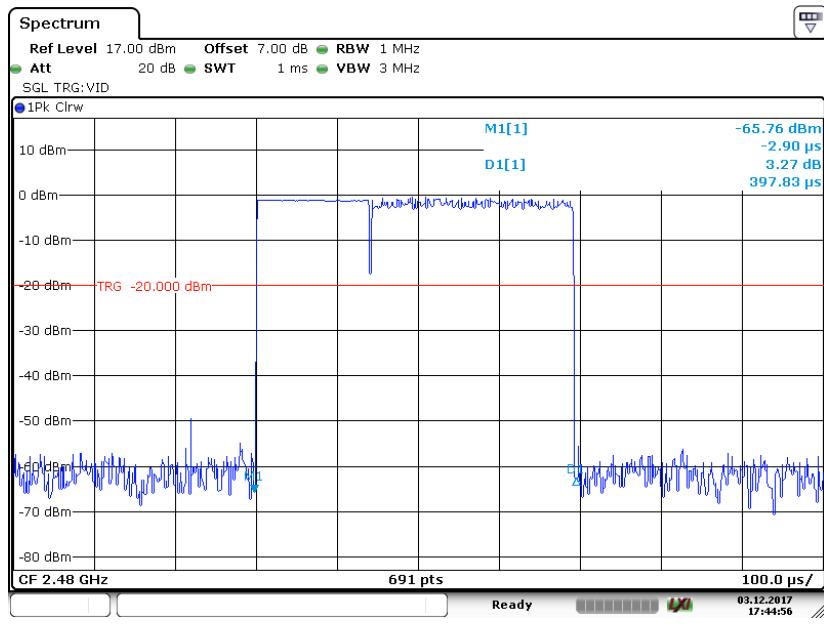
**EDR ( $\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH5**

Date: 3 DEC 2017 17:39:20

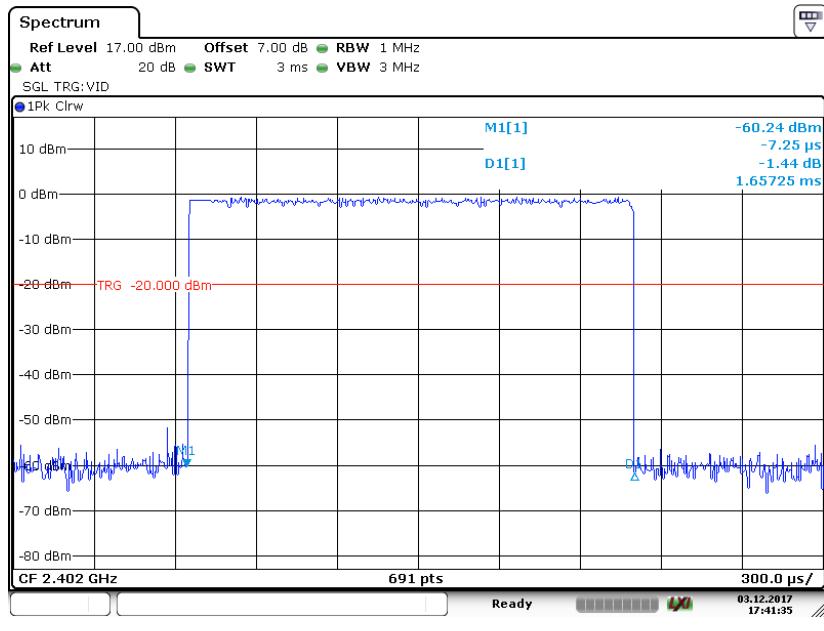
**EDR ( $\pi/4$ -DQPSK):Pulse time, High Channel, 2DH5**

Date: 3 DEC 2017 17:36:54

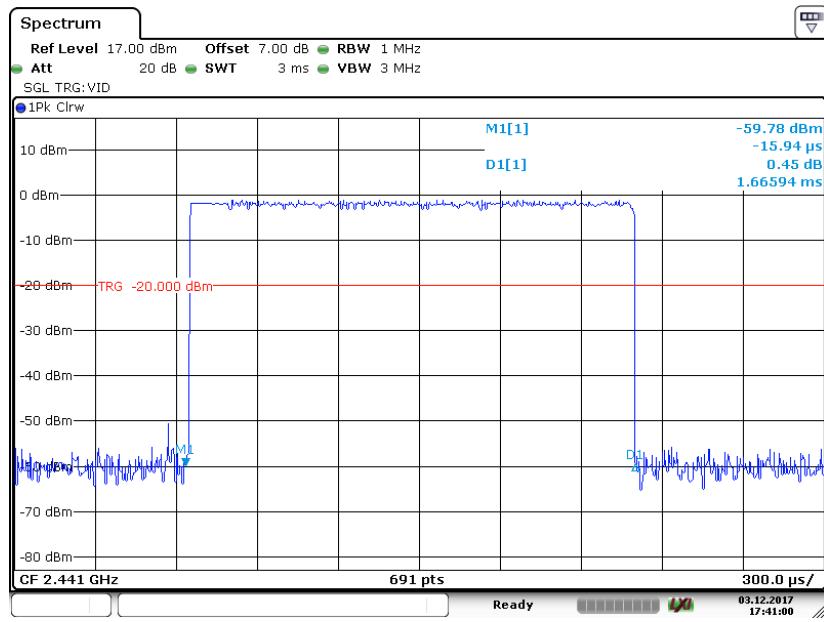
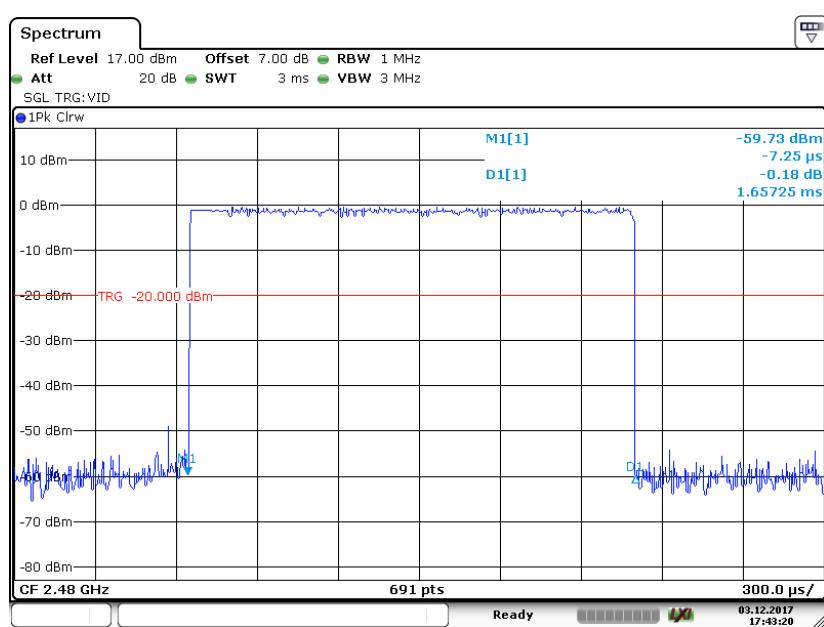
**EDR (8-DPSK): Pulse time, Low Channel, 3DH1****EDR (8-DPSK): Pulse time, Middle Channel, 3DH1**

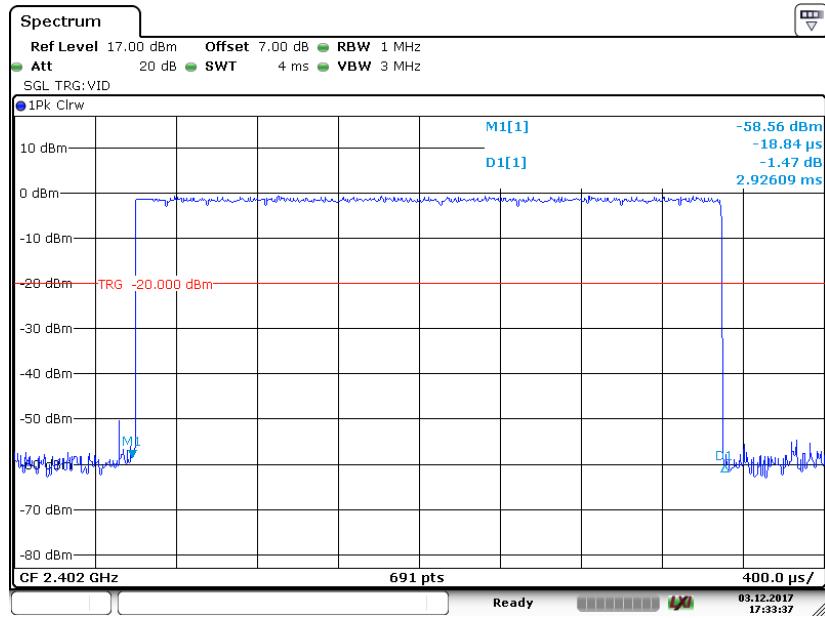
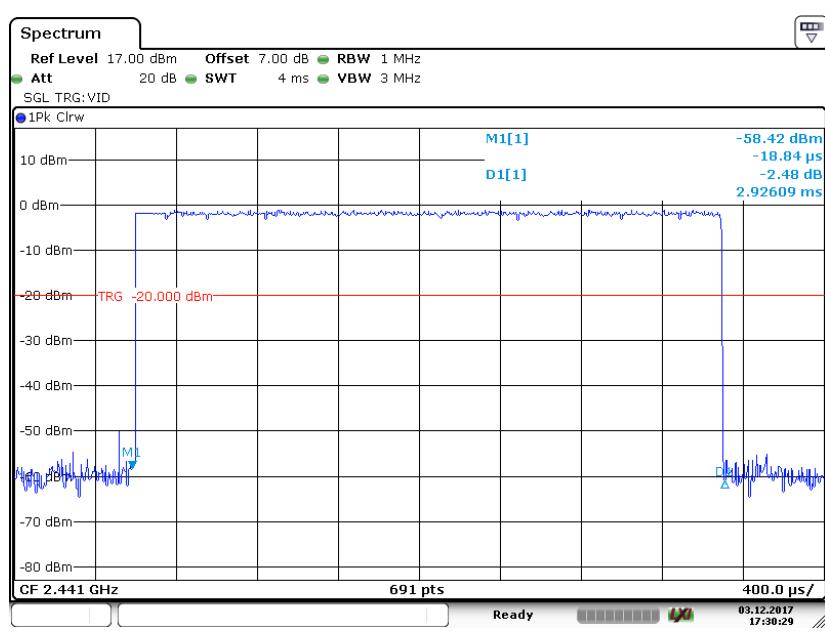
**EDR (8-DPSK): Pulse time, High Channel, 3DH1**

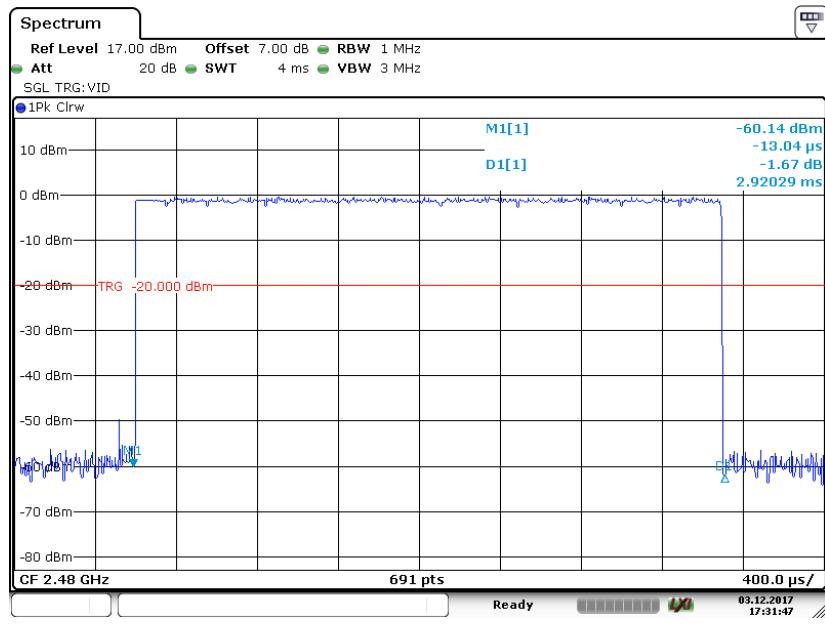
Date: 3 DEC 2017 17:44:56

**EDR (8-DPSK): Pulse time, Low Channel, 3DH3**

Date: 3 DEC 2017 17:41:35

**EDR (8-DPSK): Pulse time, Middle Channel, 3DH3****EDR (8-DPSK): Pulse time, High Channel, 3DH3**

**EDR (8-DPSK): Pulse time, Low Channel, 3DH5****EDR (8-DPSK): Pulse time, Middle Channel, 3DH5**

**EDR (8-DPSK): Pulse time, High Channel, 3DH5**

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. The customer provided a modified circuit board with a coaxial cable and the loss is 1.0dB, and VSWR=1
2. Place the EUT on a bench and set in transmitting mode
  - a) Use the following spectrum analyzer settings:
    - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
    - 2) RBW > 20 dB bandwidth of the emission being measured.
    - 3) VBW  $\geq$  RBW.
    - 4) Sweep: Auto.
    - 5) Detector function: Peak.
    - 6) Trace: Max hold.
  - b) Allow trace to stabilize.
  - c) Use the marker-to-peak function to set the marker to the peak of the emission.
  - d) The indicated level is the peak output power, after any corrections for external attenuators and cables.

### Test Data

#### Environmental Conditions

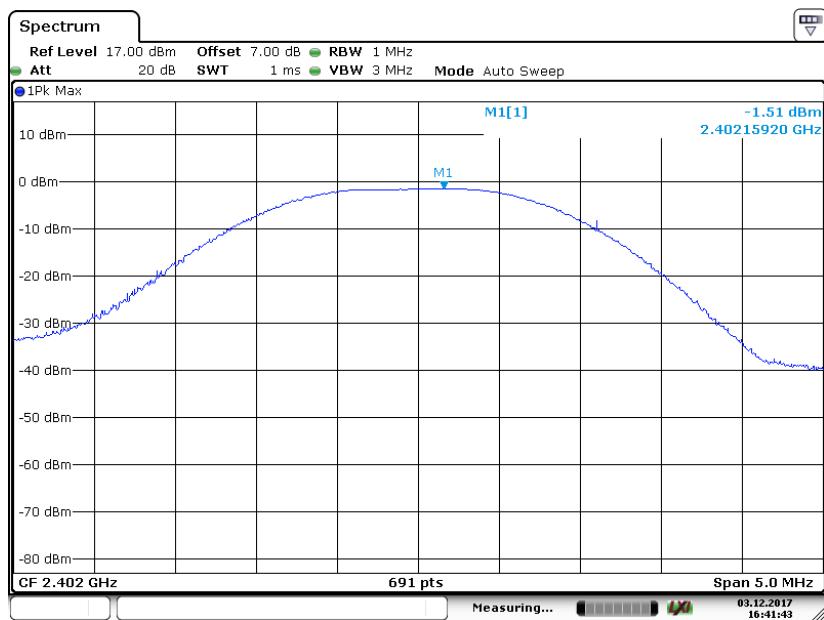
<b>Temperature:</b>	23.2 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.2 kPa

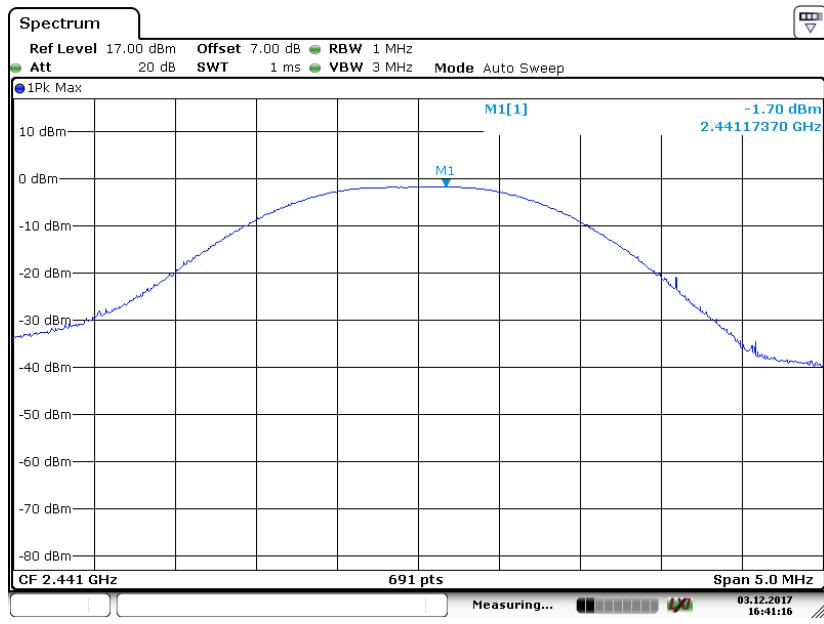
The testing was performed by Chris Wang on 2017-12-03.

EUT operation mode: Transmitting

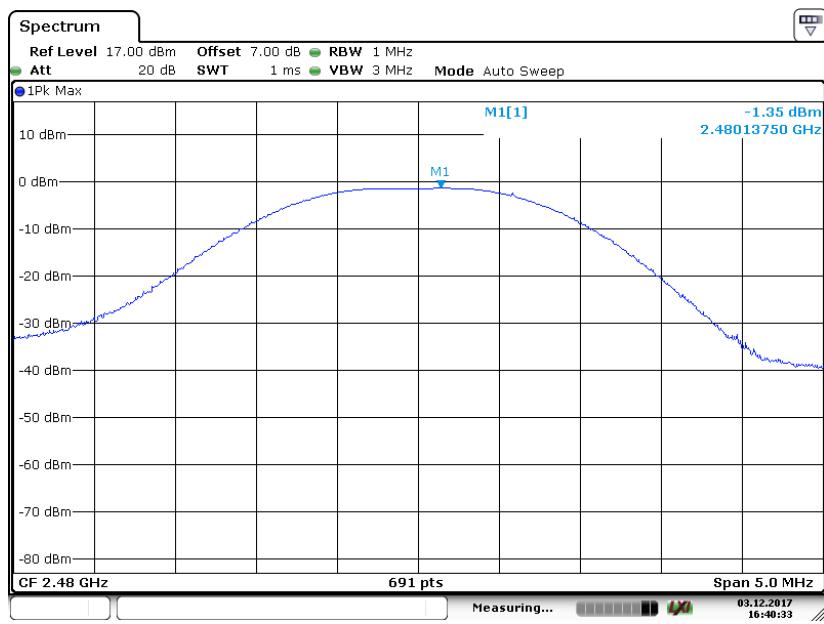
Test Result: Compliance.

Mode	Frequency (MHz)	Output Power		Limit (mW)
		(dBm)	(mW)	
BDR (GFSK)	2402	-1.51	0.71	1000
	2441	-1.70	0.68	1000
	2480	-1.35	0.73	1000
EDR ( $\pi/4$ -DQPSK)	2402	-0.18	0.96	125
	2441	-0.55	0.88	125
	2480	0.06	1.01	125
EDR (8-DPSK)	2402	-0.10	0.98	125
	2441	-0.52	0.89	125
	2480	0.14	1.03	125

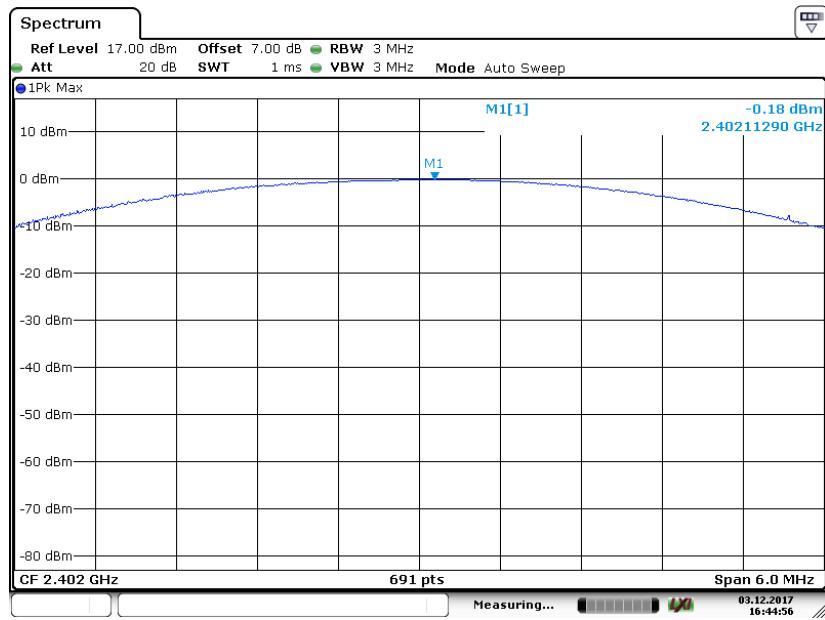
**BDR (GFSK): 2402MHz**

**BDR (GFSK): 2441MHz**

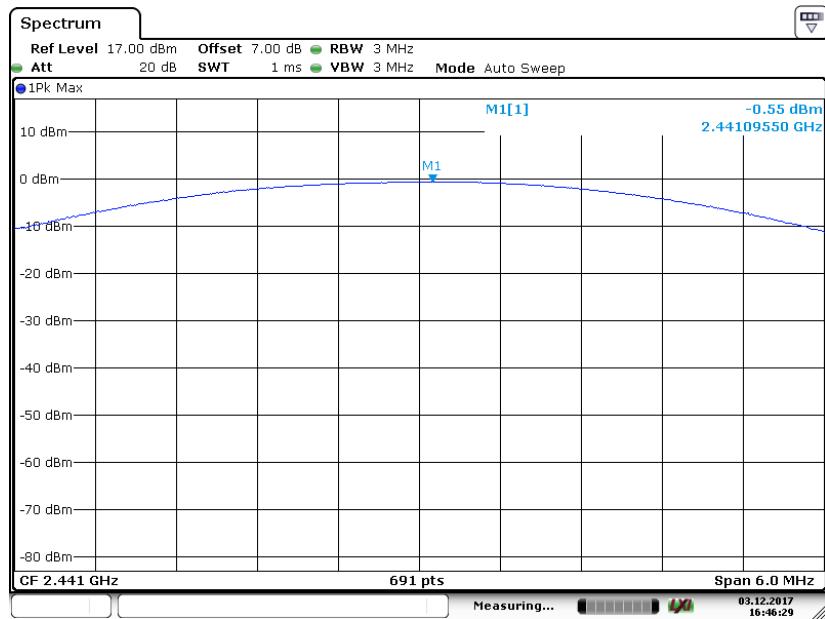
Date: 3 DEC 2017 16:41:16

**BDR (GFSK): 2480MHz**

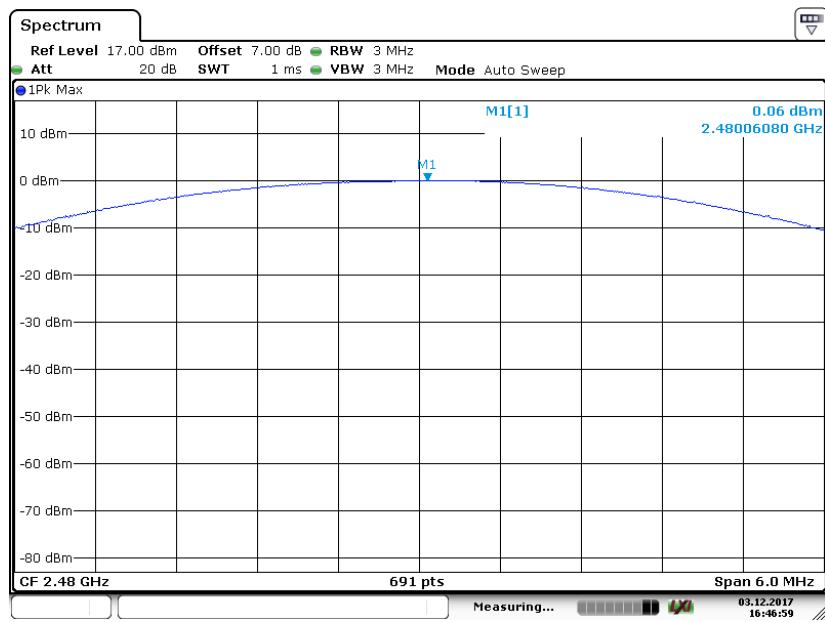
Date: 3 DEC 2017 16:40:33

**EDR( $\pi/4$ -DQPSK): 2402MHz**

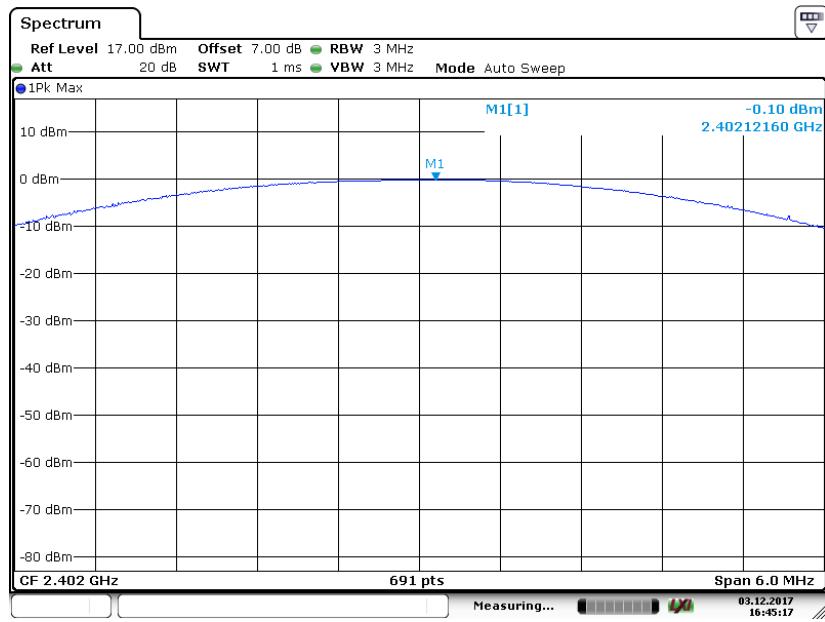
Date: 3 DEC 2017 16:44:57

**EDR( $\pi/4$ -DQPSK): 2441MHz**

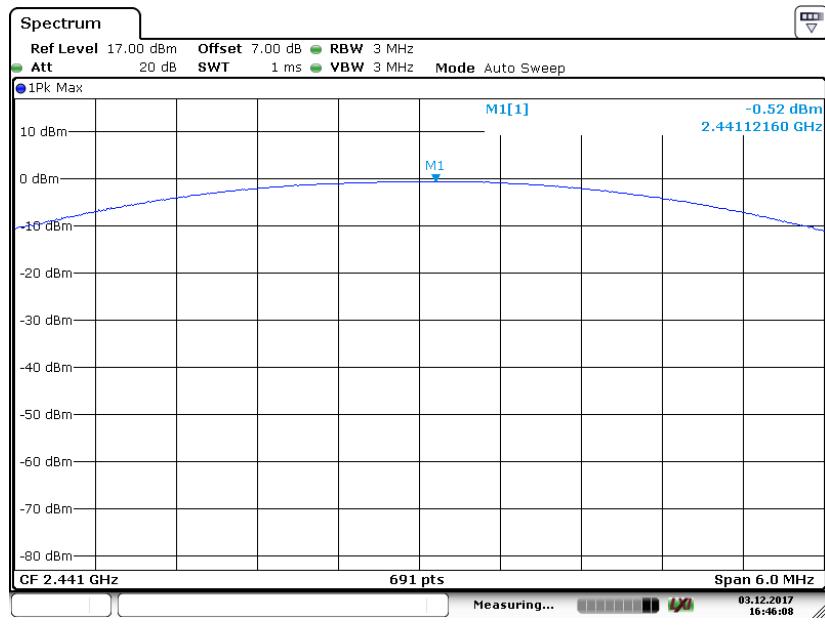
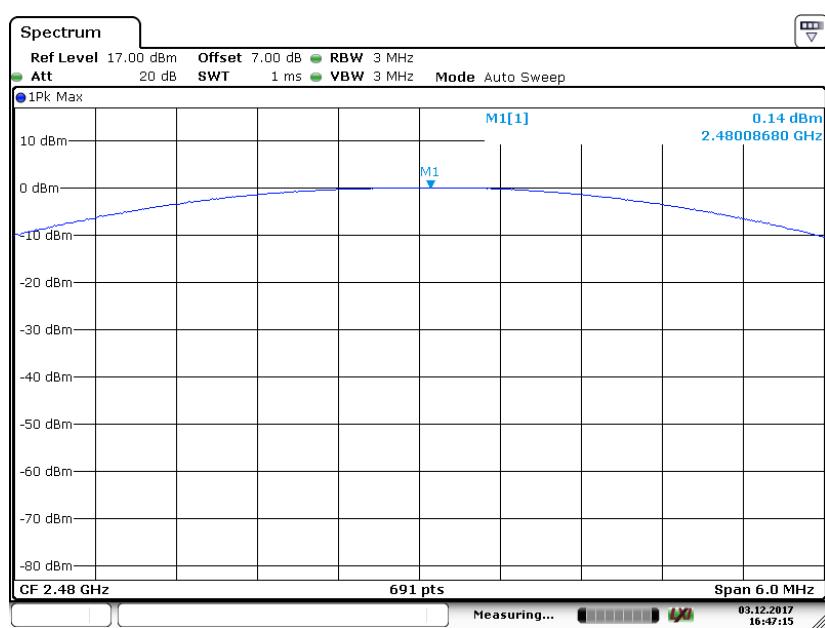
Date: 3 DEC 2017 16:46:29

**EDR( $\pi/4$ -DQPSK): 2480MHz**

Date: 3 DEC 2017 16:46:59

**EDR(8-DPSK): 2402MHz**

Date: 3 DEC 2017 16:45:17

**EDR(8-DPSK): 2441MHz****EDR(8-DPSK):2480MHz**

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Data

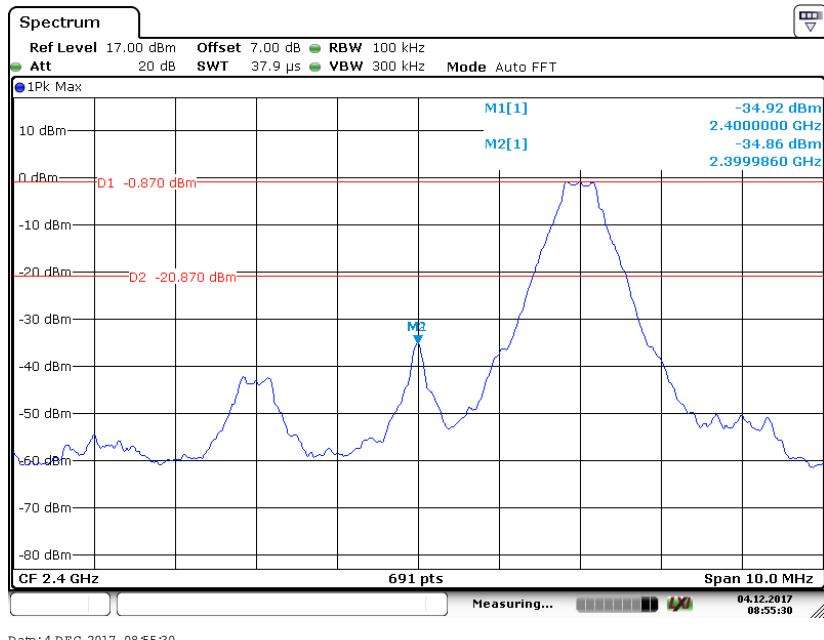
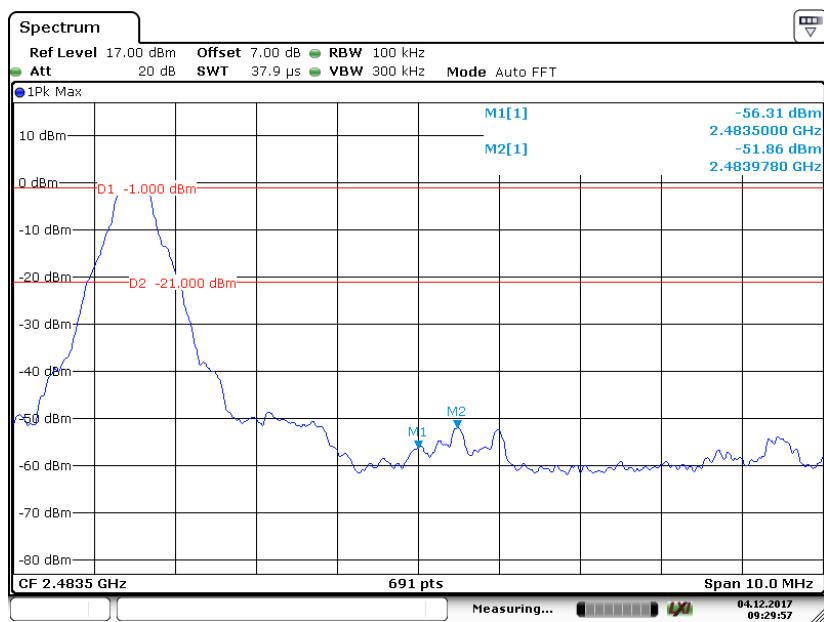
#### Environmental Conditions

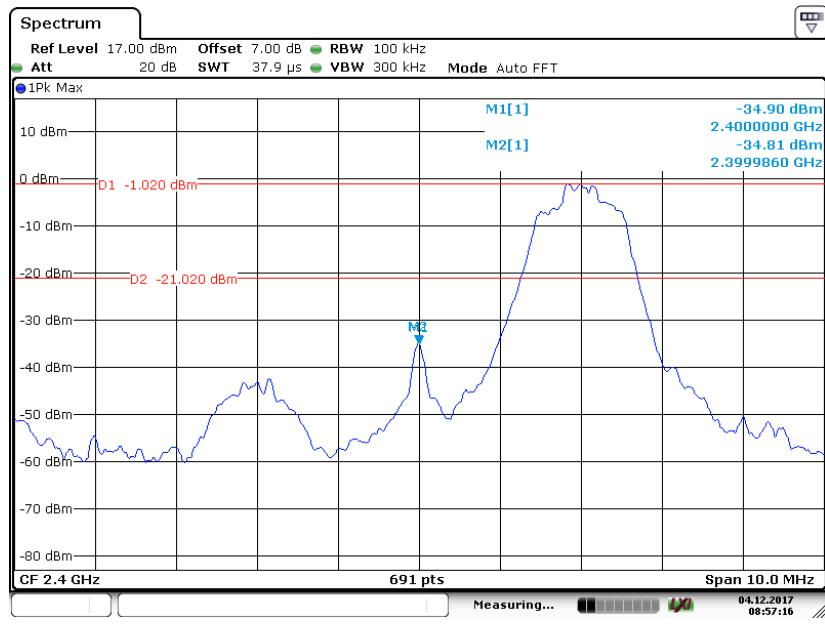
Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Chris Wang on 2017-12-04.

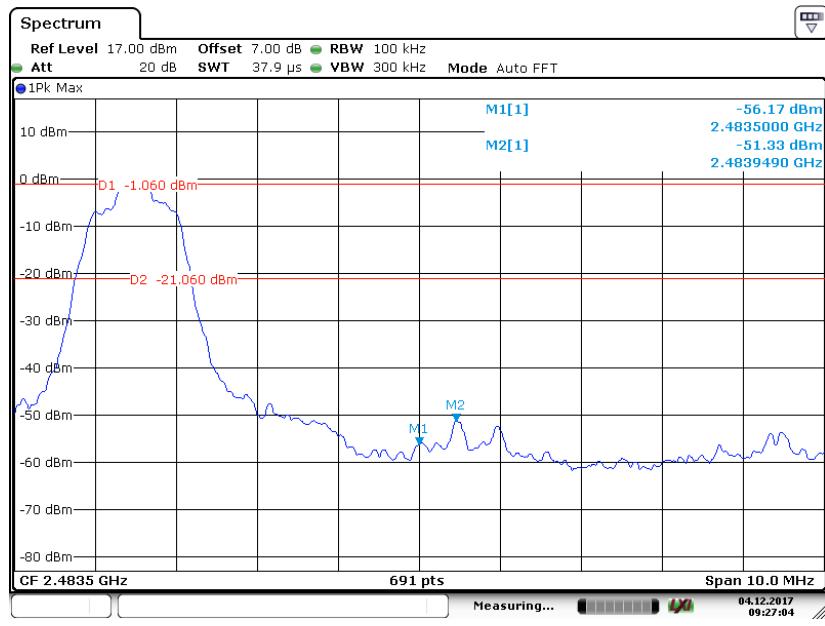
EUT operation mode: Transmitting

Test Result: Compliance.

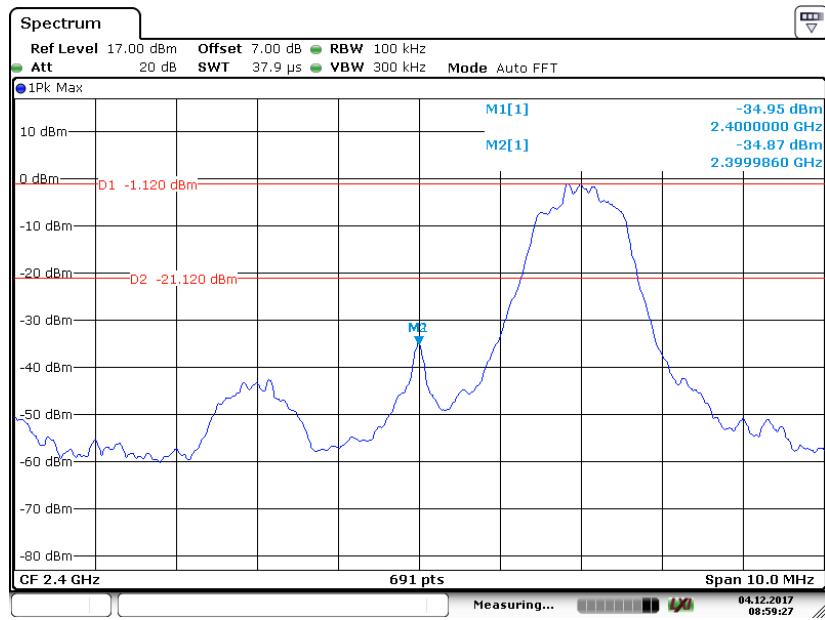
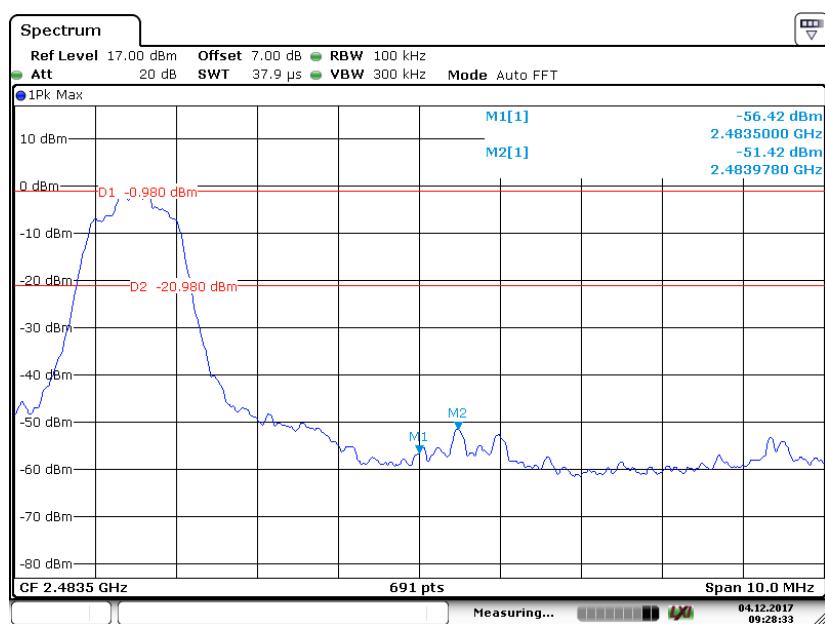
**Band Edge****BDR (GFSK): Left Side****BDR (GFSK): Right Side**

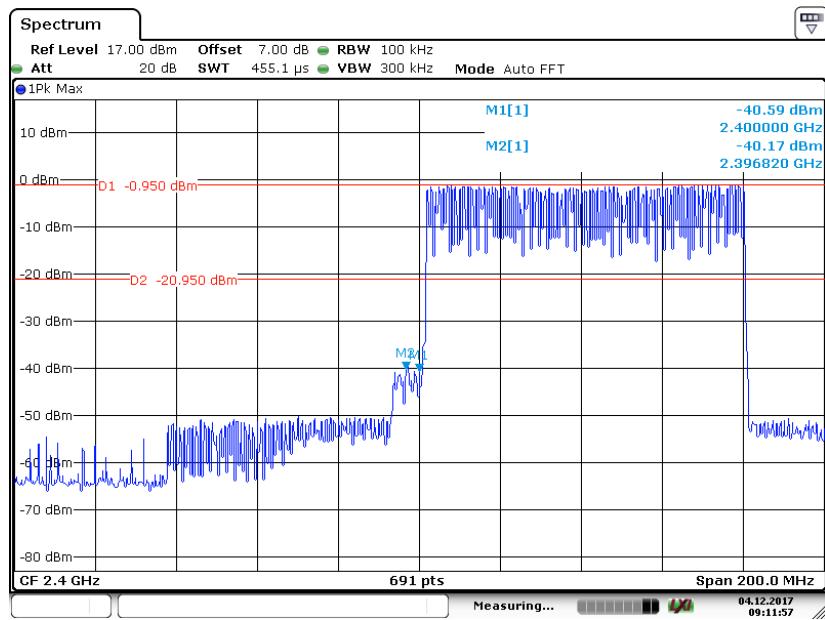
**EDR ( $\pi/4$ -DQPSK): Left Side**

Date: 4 DEC 2017 08:57:17

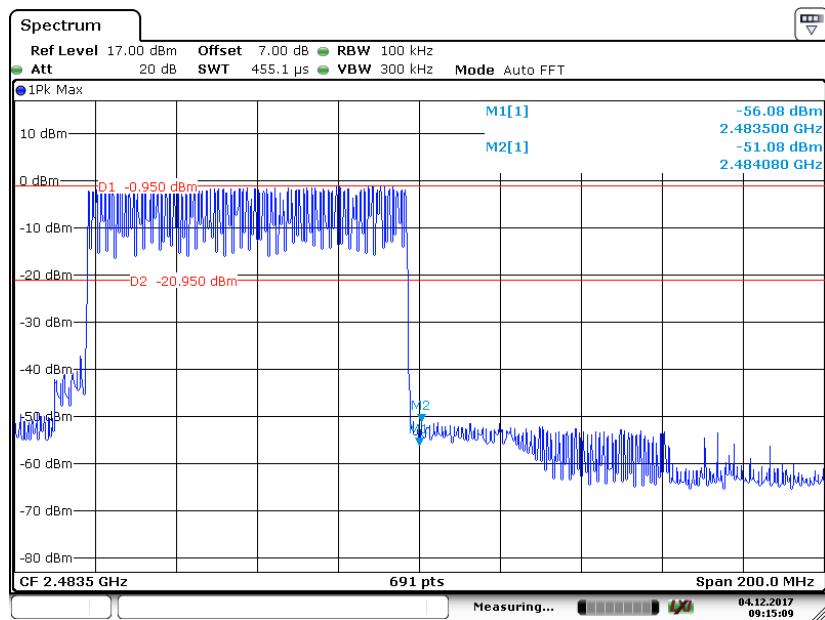
**EDR ( $\pi/4$ -DQPSK): Right Side**

Date: 4 DEC 2017 09:27:04

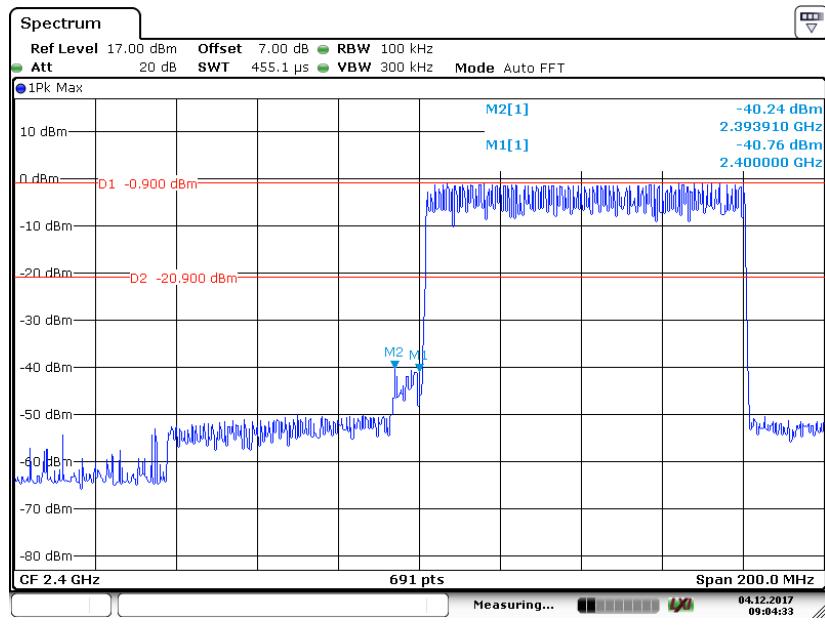
**EDR (8-DPSK): Left Side****EDR (8-DPSK): Right Side**

**BDR (GFSK): Left Side - Hopping**

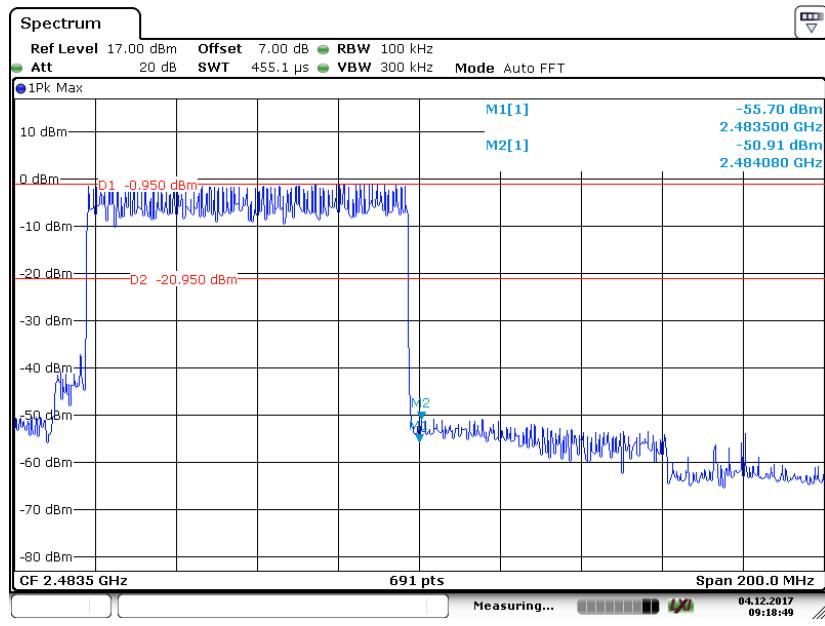
Date: 4 DEC 2017 09:11:57

**BDR (GFSK): Right Side- Hopping**

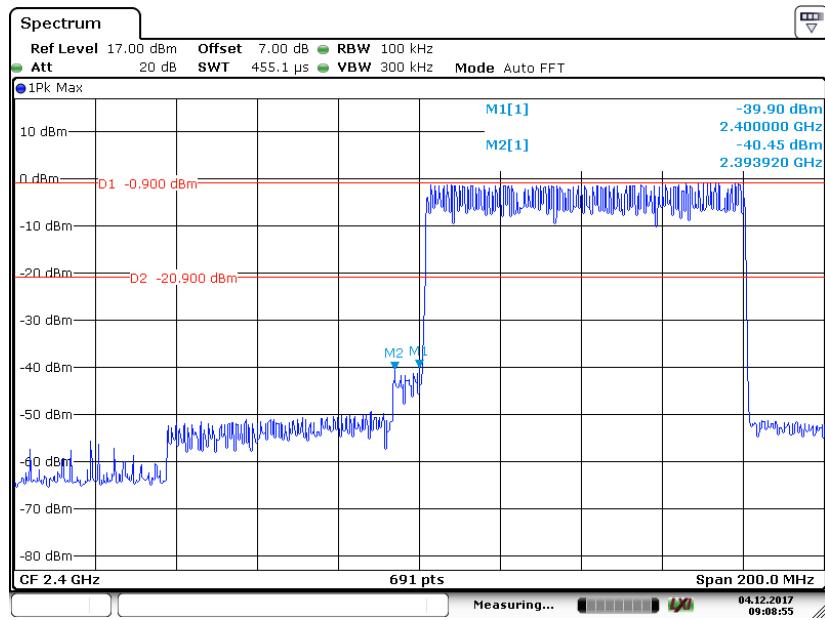
Date: 4 DEC 2017 09:15:09

**EDR ( $\pi/4$ -DQPSK): Left Side- Hopping**

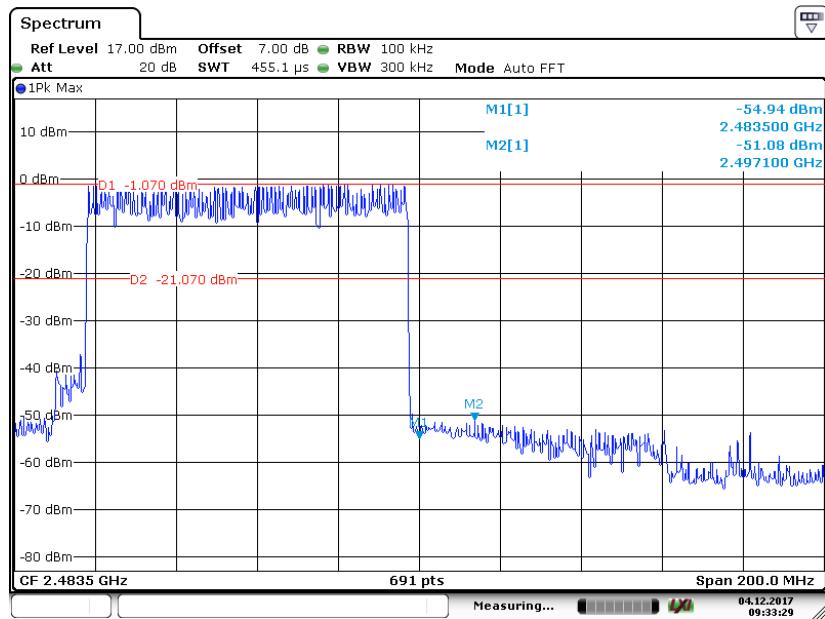
Date: 4 DEC 2017 09:04:33

**EDR ( $\pi/4$ -DQPSK): Right Side- Hopping**

Date: 4 DEC 2017 09:18:49

**EDR (8-DPSK): Left Side- Hopping**

Date: 4 DEC 2017 09:08:55

**EDR (8-DPSK): Right Side- Hopping**

Date: 4 DEC 2017 09:33:29

**\*\*\*\*\* END OF REPORT \*\*\*\*\***