

FCC RF Exposure Exemption report

for

Wireless Module

Model No.: 2ALHR012

FCC ID: 2ALHR012

of

Applicant: Fieldpiece Instruments, Inc.

Address: 1636 WEST COLLINS AVE ORANGE, CA 92867 USA

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A



Report No.: W6M22312-23129-EE

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



Registration number: W6M22312-23129-EE
FCC ID: 2ALHR012

TABLE OF CONTENTS

1 GENERAL INFORMATION.....2

1.1 NOTES2

1.2 TESTING LABORATORY3

 1.2.1 Location3

 1.2.2 Details of accreditation status3

1.3 APPLICATION DETAILS3

1.4 GENERAL INFORMATION OF TEST ITEM.....4

1.5 TEST STANDARDS6

2 TEST CONFIGURATION7

2.1 TEST ENVIRONMENT7

2.2 MEASUREMENT UNCERTAINTY7

2.3 TEST EQUIPMENT LIST.....7

3 EQUIVALENT ISOTROPIC RADIATED POWER (EIRP).....8

3.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION ACCORDING TO FCC KDB PUBLICATION.....8



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22312-23129-EE
FCC ID: 2ALHR012

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.
4. Antenna gain is provided by applicant and laboratory issue relevant data and results.

Tester:

March 01, 2024

Sora Kuo

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

March 01, 2024

Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22312-23129-EE

FCC ID: 2ALHR012

1.2 Testing laboratory

1.2.1 Location

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)

Tel: 886-2-6613-0228

Worldwide Testing Services (Taiwan) Co., Ltd.

6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)

Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited no.: ./.

Street: ./.

Town: ./.

Country: ./.

1.3 Application details

Approval holder

Name: Fieldpiece Instruments, Inc.
Street: 1636 WEST COLLINS AVE ORANGE,
City: CA 92867
Country: USA

Manufacturer: (if applicable)

Name: CHY FIREMATE CO., LTD.
Street: No.3 Sheng-Li 1st Street, Xintian Village, Rende District,
Town: Tainan City,
Country: Taiwan R.O.C.



Registration number: W6M22312-23129-EE
FCC ID: 2ALHR012

Date of receipt of test item: December 11, 2023

Date of test: from December 12, 2023 to December 18, 2023

1.4 General information of Test item

Type of test item: Wireless Module

Model no.: 2ALHR012

Multi-listing model no.: ./.

Brand name: Fieldpiece

Power supply: 3.6Vd.c.

Type of antenna: PCB antenna

Antenna gain: -0.38 dBi

Technical data

Mode	Channel	Conducted Power (dBm)
BLE	Ch 0 : 2402 MHz	5.54
	Ch 19 : 2440 MHz	5.45
	Ch 39 : 2480 MHz	5.59

Operation modes: Duplex

Modulation type: GFSK

Sample no.: #03

Classification:

Fixed Device	<input type="checkbox"/>
Mobile Device (Human Body distance > 20cm)	<input type="checkbox"/>
Portable Device (Human Body distance < 20cm)	<input type="checkbox"/>
Modular Radio Device	<input checked="" type="checkbox"/>

1.5 Duty cycle and factor

The duty factor is computed as $[10 \log (1 / D)]$, where D is the duty cycle.

Mode	T _{on} (ms)	T _{on} +T _{off} (ms)	Duty cycle (%)	1/T - VBW (kHz)
BLE	0.4407	0.625	70.51%	2.27




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22312-23129-EE


FCC ID: 2ALHR012

Duty cycle plot

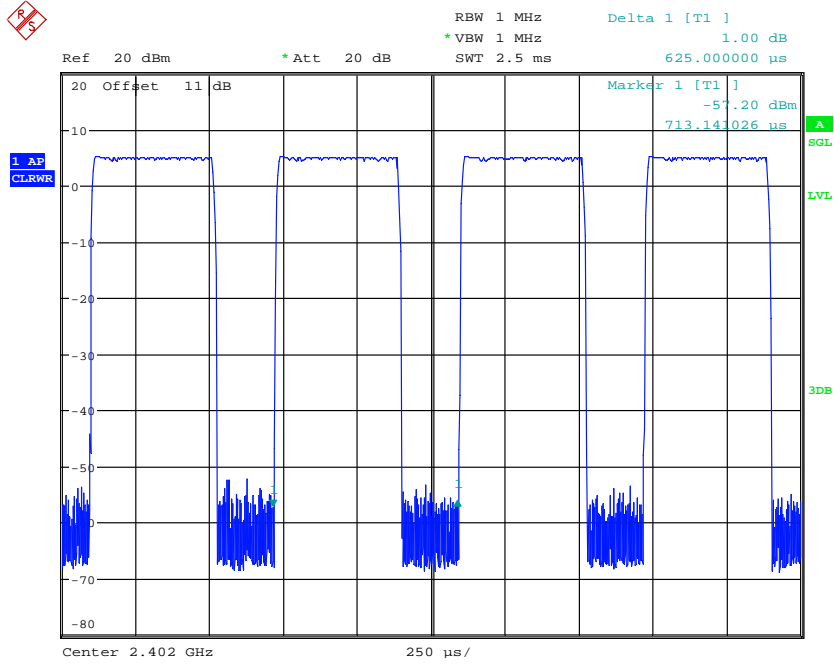


DUTY BLE 1M

Date: 12.DEC.2023 12:29:28

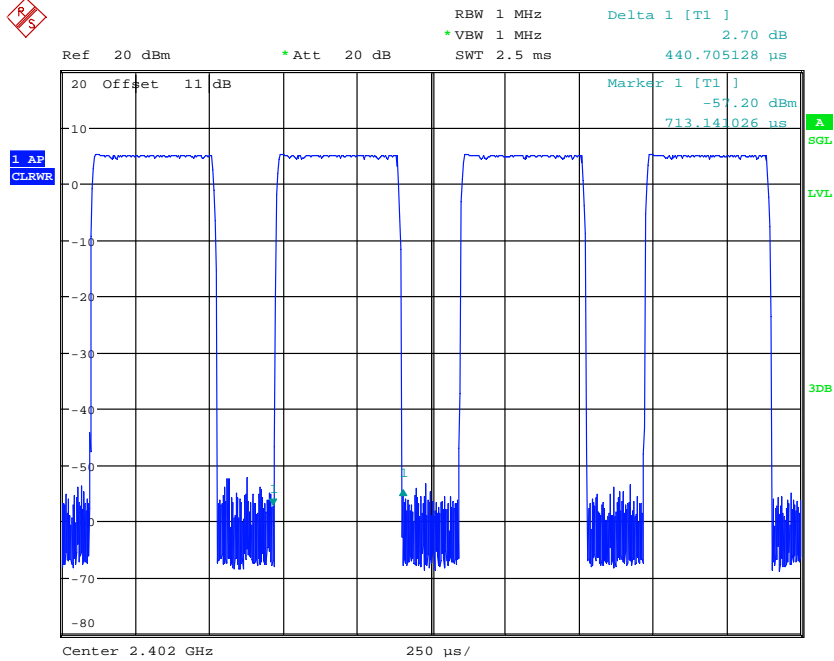

DUTY BLE 1M

Date: 12.DEC.2023 12:29:34




Registration number: W6M22312-23129-EE

FCC ID: 2ALHR012

1.6 Test standards

FCC KDB Publication

447498 D01 General RF Exposure Guidance v06



Registration number: W6M22312-23129-EE

FCC ID: 2ALHR012

2 Test configuration

2.1 Test environment

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Extreme conditions parameters: ./.

2.2 Measurement uncertainty

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Output Power Measurement (Peak Output Power (transmitter))	Expanded Uncertainty : 1.48 dB

The decision rule is: Measurement uncertainty is not included in the calculation of test results.

2.3 Test Equipment List

RF Conducted

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2023/7/24	2024/7/23
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2023/3/22	2024/3/21
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2023/2/17	2024/2/16
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2023/2/17	2024/2/16
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2023/9/20	2024/9/19
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2023/8/28	2024/8/27
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2023/4/27	2024/4/26
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2023/02/17	2024/2/16
ETSTW-Cable 045	Microwave Cable	SUCOFLEX 104	325536	HUBER+SUHNER	2023/10/20	2024/10/19
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2023/5/26	2024/5/25
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	



Registration number: W6M22312-23129-EE

FCC ID: 2ALHR012

3 Equivalent Isotropic Radiated Power (EIRP)

FCC Rule: 15.247

EIRP = max. conducted output power + antenna gain

EIRP = 5.59 dBm + (-0.38 dBi [antenna gain claimed by manufacturer]) = 5.21 dBm = 3.32 mW

3.1 Exemption Limits for Routine Evaluation according to FCC KDB Publication

RESULT:

Test standard : FCC KDB Publication
447498 D01 General RF Exposure Guidance v06

3.3.1 Exemption Limits for Routine Evaluation – SAR Evaluation

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table .

Table: SAR evaluation — Exemption limits for routine evaluation based on frequency and separation distance

MHz	5	10	15	20	25	mm
2480	9.95	18.92	28.87	37.84	47.79	SAR Test Exclusion Threshold (mW)

MHz	30	35	40	45	50	mm
2480	56.74	66.69	76.63	85.61	95.56	SAR Test Exclusion Threshold (mW)

Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power.

Established separation distance is 5 mm.

Operating frequency band : 2402-2480 MHz

Max. output power level at 5 mm separation distance at 2480 MHz according to table is: 9.95 mW

The product is exempt from SAR Evaluation/Testing because the output power of 3.32 mW is below the exemption limit of 9.95 mW.