



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Wuhan Tianyu Information Industry Co., Ltd.

Address: Huazhong University of Sci. & Tech., East Lake Dev. Zone, Wuhan
430223, Hubei, China

FCC ID: 2ALKI-S40

Product Name: Smart Mobile Terminal

Standard(s): 47 CFR Part 2, 47 CFR Part 22, Subpart H
47 CFR Part 24, Subpart E
47 CFR Part 27
ANSI C63.26-2015
KDB 971168 D01 Power Meas License Digital Systems
v03r01

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230952608-00E

Date Of Issue: 2023/11/13

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS


DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	6
1.2.1 EUT Operation Condition:.....	6
1.2.2 Support Equipment List and Details	10
1.2.3 Support Cable List and Details	10
1.2.4 Block Diagram of Test Setup.....	11
1.3 MEASUREMENT UNCERTAINTY	12
2. SUMMARY OF TEST RESULTS	13
3. REQUIREMENTS AND TEST PROCEDURES	14
3.1 Applicable Standard For Part 22 Subpart H:.....	14
3.2 Applicable Standard For Part 24 Subpart E:	16
3.3 Applicable Standard For Part 27:.....	17
3.5 Test Method:	20
4. Test DATA AND RESULTS	26
4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND:.....	26
4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND:.....	32
4.3 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 2:	38
4.4 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 4:	45
4.5 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 5:	52
4.6 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 2.....	59
4.7 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 4.....	80
4.8 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 5.....	101
4.9 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 7.....	117
4.10 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 38.....	133
4.11 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 40.....	149
4.12 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 41.....	173
4.13 RADIATED SPURIOUS EMISSIONS.....	189
5. EUT PHOTOGRAPHS	203
6. TEST SETUP PHOTOGRAPHS	204

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230952608-00E	Original Report	2023/11/13

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Smart Mobile Terminal
Trade Name:	
EUT Model:	S40
Operation Bands and modes:	GPRS/EDGE: 850/1900 WCDMA: Band 2/4/5 LTE: Band 2/4/5/7/38/40/41
Modulation Type:	GMSK, 8PSK, BPSK, QPSK, 16QAM
Rated Input Voltage:	DC 7.4V from battery or 5V from adapter
Serial Number:	RF: 2B0S-1 RE: 2B0S-2
EUT Received Date:	2023/9/10
EUT Received Status:	Good

Operation Voltage (V_{DC}) ▲:

Lowest:	6.8	Normal:	7.4	Highest:	8.4
---------	-----	---------	-----	----------	-----

Transmission Antenna Information ▲:

Antenna Type	Operation Bands	Antenna Frequency Range(MHz)	Antenna Gain (G_r)(dBi)	L_c (dB)
FPC	GSM850	824-849	-3.89	0.5
	PCS1900	1850-1910	1.29	0.8
	WCDMA B2	1850-1910	1.29	0.8
	WCDMA B4	1710-1755	1.01	0.8
	WCDMA B5	824-849	-3.89	0.5
	LTE B2	1850-1910	1.29	0.8
	LTE B4	1710-1755	1.01	0.8
	LTE B5	824-849	-3.89	0.5
	LTE B7	2500-2570	-1.81	0.8
	LTE B38	2570-2620	-0.8	0.8
	LTE B40 Lower	2305-2315	-1.14	0.8
	LTE B40 Upper	2350-2360	-1.6	0.8
	LTE B41	2535-2655	-0.79	0.8

Note: L_c = Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	SHENZHEN TIANYIN ELECTRONICS CO., LTD	TPA-46050200UU	Input: AC 100-240V~50/60Hz, 0.3A Output: DC 5.0V, 2000mA

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No
The maximum power was configured per 3GPP Standard for each operation modes as below setting:	
GSM/GPRS/EGPRS	
Function: Menu select > GSM Mobile Station > GSM 850/1900	
Press Connection control to choose the different menus	
Press RESET > choose all the reset all settings	
Connection Press Signal Off to turn off the signal and change settings	
Network Support > GSM + GPRS or GSM + EGSM	
Main Service > Packet Data	
Service selection > Test Mode A – Auto Slot Config. off	
MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting	
> Slot configuration > Uplink/Gamma	
> 33 dBm for GPRS 850	
> 30 dBm for GPRS 1900	
> 27 dBm for EGPRS 850	
> 26 dBm for EGPRS 1900	
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel	
Frequency Offset > + 0 Hz	
Mode > BCCH and TCH	
BCCH Level > -85 dBm (May need to adjust if link is not stable)	
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]	
Channel Type > Off	
P0 > 4 dB	
Slot Config > Unchanged (if already set under MS signal)	
TCH > choose desired test channel	
Hopping > Off	
Main Timeslot > 3	
Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)	
Bit Stream > 2E9-1 PSR Bit Stream	
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input	
Connection Press Signal on to turn on the signal and change settings	

WCDMA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2		4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/ 5	0
	β_{ec}	209/225	12/15	30 15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
CM(dB)	1.0	3.0	2.0	3.0	1.0	
PR(dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE(TDD):

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS		
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	
1	$19760 \cdot T_s$			$20480 \cdot T_s$			
2	$21952 \cdot T_s$			$23040 \cdot T_s$			
3	$24144 \cdot T_s$			$25600 \cdot T_s$			
4	$26336 \cdot T_s$			$7680 \cdot T_s$			
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	
6	$19760 \cdot T_s$			$23040 \cdot T_s$			
7	$21952 \cdot T_s$			$12800 \cdot T_s$			
8	$24144 \cdot T_s$			-			
9	$13168 \cdot T_s$			-			

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink x (T_s) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:
 Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$
 where
 T_s = 1/(15000 x 2048) seconds


1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	NO	NO	1.2	Adapter	EUT

1.2.4 Block Diagram of Test Setup

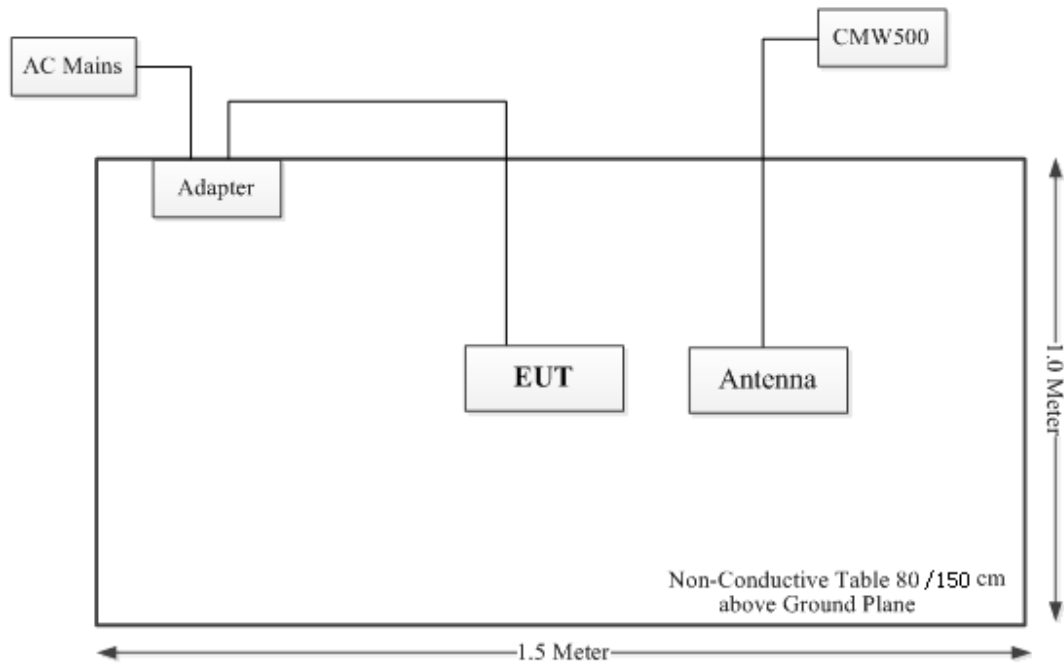

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 22.913; § 24.232; §27.50	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliant
FCC§ 2.1051; § 22.917; § 24.238; §27.53	Spurious Emissions at Antenna Terminal	Compliant
FCC§ 22.917; § 24.238; §27.53	Out of band emission, Band Edge	Compliant
FCC§ 2.1055; § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC§ 2.1053; § 22.917; § 24.238; §27.53	Field Strength of Spurious Radiation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Applicable Standard For Part 22 Subpart H:

3.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile \leq3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

3.2 Applicable Standard For Part 24 Subpart E:

3.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

3.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.3 Applicable Standard For Part 27:

3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and - 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.5 Test Method:

3.5.1 Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5 and KDB 971168 D01 Power Meas License Digital Systems v03r01:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:


ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:

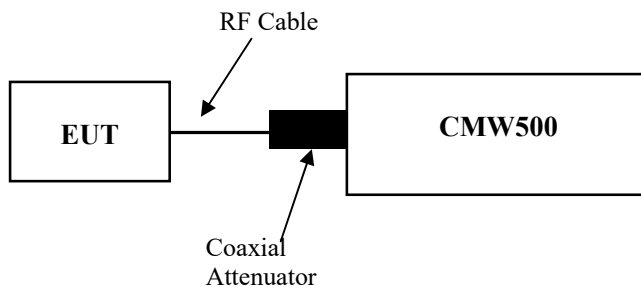

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

3.5.2 Occupied Bandwidth


According to ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Setup Block:

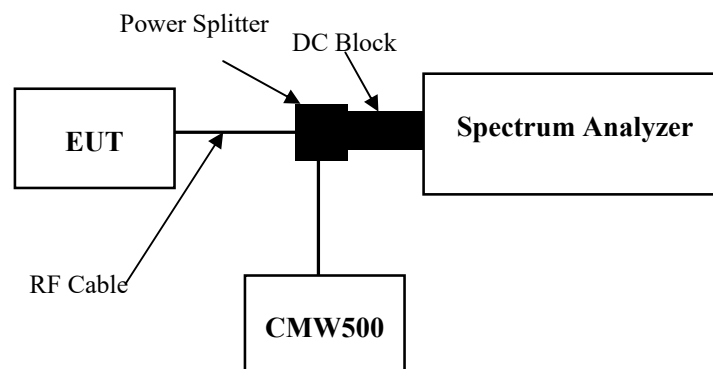


3.5.3 Transmitter unwanted emissions-at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4, KDB 971168 D01 Power Meas License Digital Systems v03r01:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),⁸ effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

Test Setup Block:

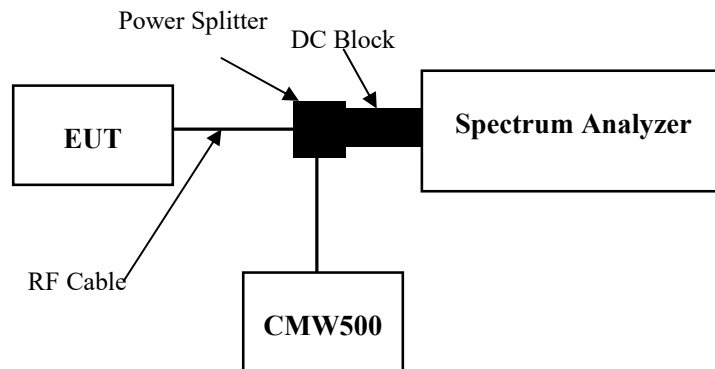


3.5.4 Transmitter unwanted emissions-Out of band emission

According to ANSI C63.26-2015 Section 5.7.3, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

Test Setup Block:

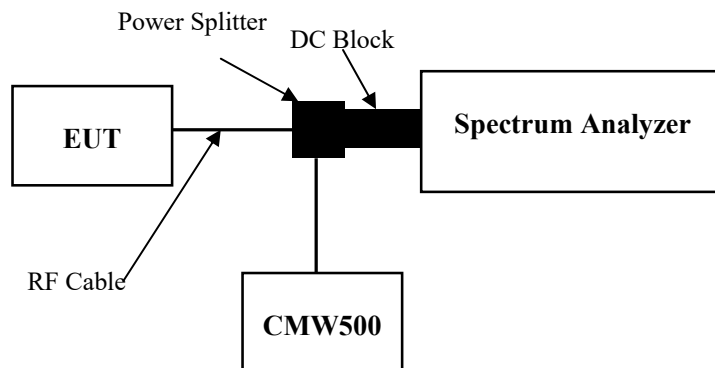

3.5.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

Test Setup Block:

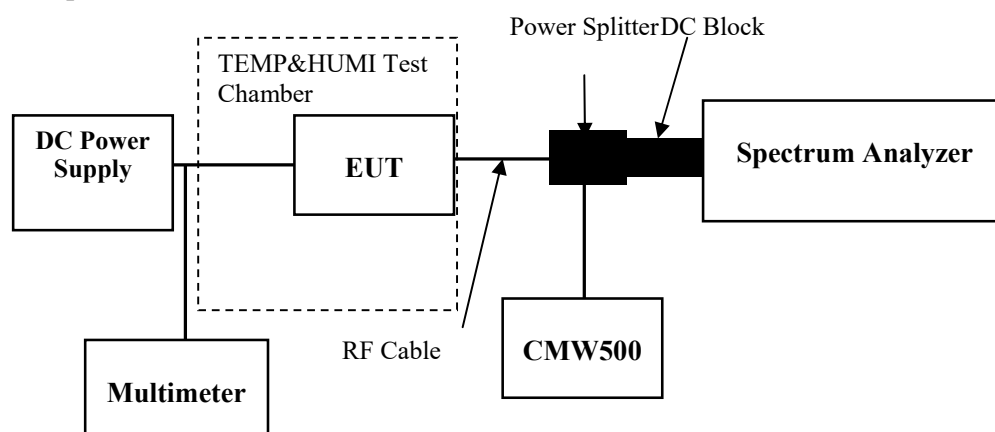

3.5.6 Transmitter unwanted emissions- Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

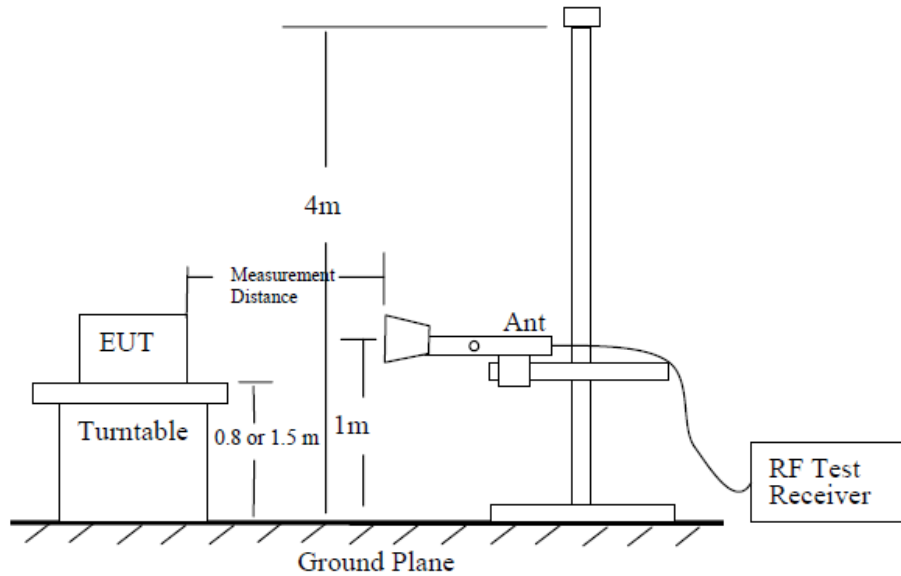


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

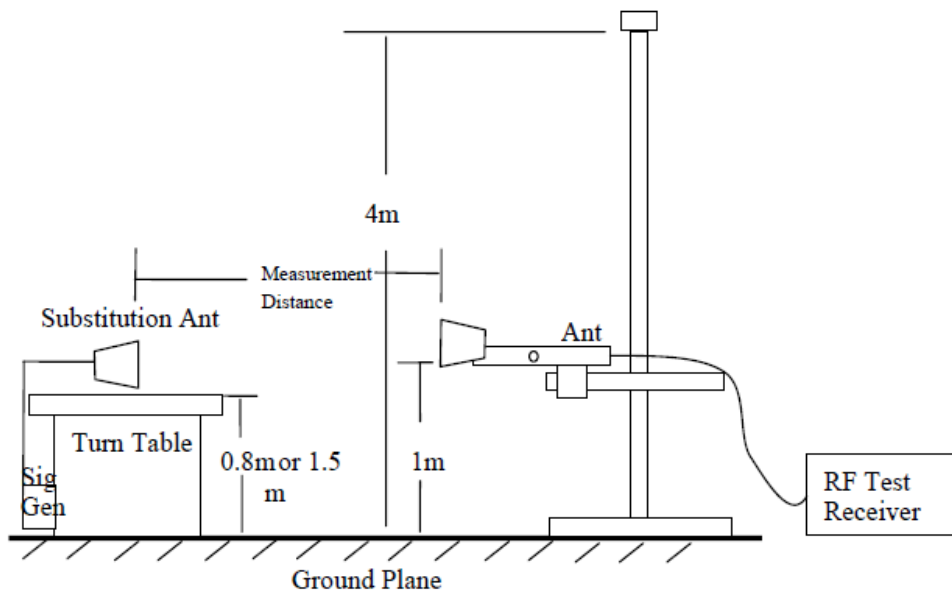


Figure 7—Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where
 - P_e = equivalent emission power in dBm
 - P_s = source (signal generator) power in dBm
 NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4. Test DATA AND RESULTS

4.1 Antenna Port Test Data and Results for GSM 850 band:

Serial Number:	2B0S-1	Test Date:	2023/9/23-2023/9/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5-25.8	Relative Humidity: (%)	46-57	ATM Pressure: (kPa)	101
-------------------	-----------	------------------------	-------	---------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	2292/10/8	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GPRS	824.2	836.6	848.8
EDGE	824.2	836.6	848.8

Test Data:

FCC§2.1046;§ 22.913 (a):RF Output Power					
Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GPRS 1 Slot	31.85	32.08	32	25.54	38.45
GPRS 2 Slots	31.1	31.31	31.2	24.77	38.45
GPRS 3 Slots	29.39	29.61	29.52	23.07	38.45
GPRS 4 Slots	28.19	28.44	28.41	21.90	38.45
EDGE 1 Slot	27.52	27.75	27.8	21.26	38.45
EDGE 2 Slots	26.17	26.45	26.53	19.99	38.45
EDGE 3 Slots	23.74	24.05	24.15	17.61	38.45
EDGE 4 Slots	22.48	22.69	22.9	16.36	38.45

Note:
 $ERP = \text{Conducted Power(dBm)} - L_c(\text{dB}) + G_T(\text{dBd})$
 $G_T(\text{dBd}) = G_T(\text{dBi}) - 2.15$

Result:	Pass
----------------	-------------

FCC §2.1049, §22.917, §22.905:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (kHz)			26 dB Occupied Bandwidth (kHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GPRS	0.244	0.244	0.244	0.318	0.317	0.316
EDGE	0.251	0.25	0.249	0.317	0.319	0.32

Note: The test plots please refer to the Plots of Occupied Bandwidth


FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, §22.917(a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §22.355: Frequency Stability					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	7.4	6	0.007	2.5
	-20	7.4	9	0.011	2.5
	-10	7.4	-7	-0.008	2.5
	0	7.4	4	0.005	2.5
	10	7.4	4	0.005	2.5
	20	7.4	-7	-0.008	2.5
	30	7.4	3	0.004	2.5
	40	7.4	6	0.007	2.5
	50	7.4	8	0.010	2.5
Frequency Stability vs. Voltage	20	6.8	-6	-0.007	2.5
	20	8.4	6	0.007	2.5
				Result:	Pass

Test Modulation:	8PSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	7.4	9	0.011	2.5
	-20	7.4	14	0.017	2.5
	-10	7.4	18	0.022	2.5
	0	7.4	9	0.011	2.5
	10	7.4	9	0.011	2.5
	20	7.4	3	0.004	2.5
	30	7.4	9	0.011	2.5
	40	7.4	8	0.010	2.5
	50	7.4	14	0.017	2.5
Frequency Stability vs. Voltage	20	6.8	4	0.005	2.5
	20	8.4	6	0.007	2.5
				Result:	Pass

Test Plots (Note: The 11.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

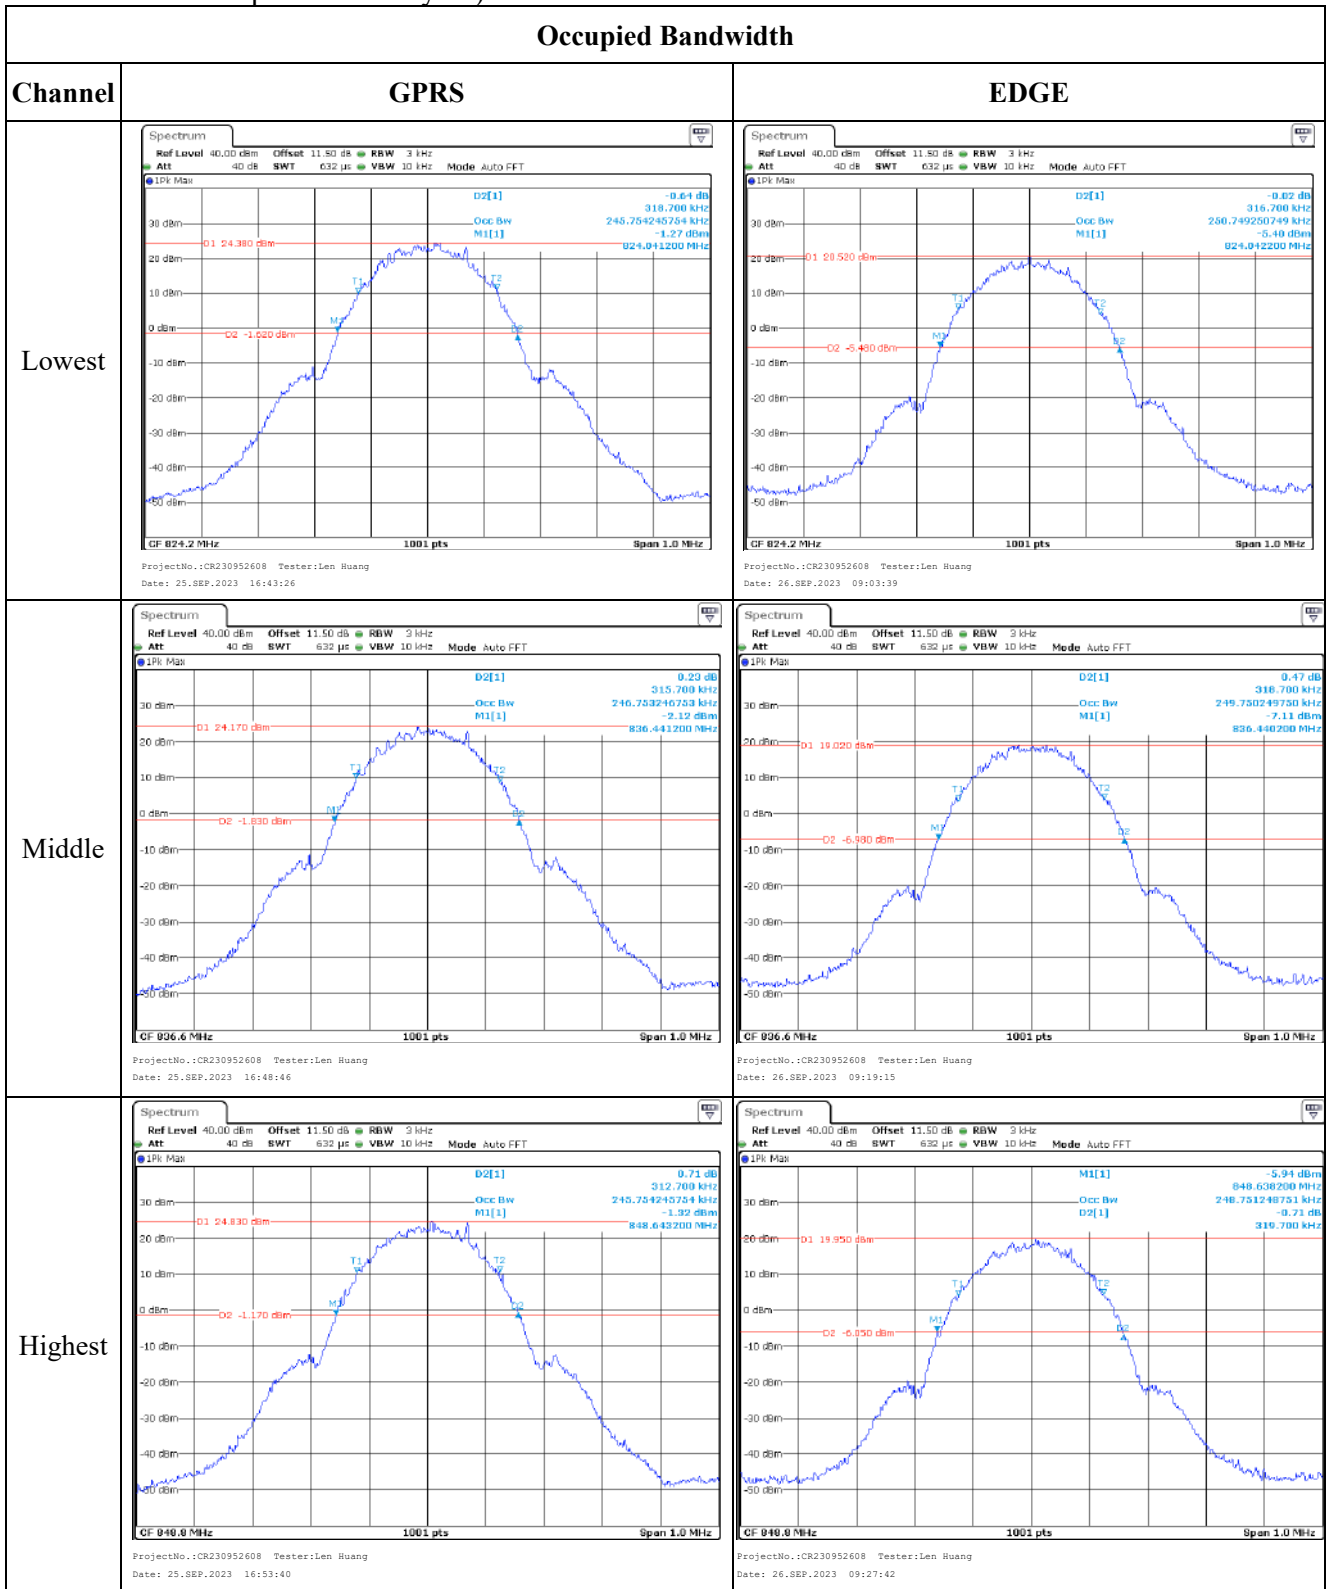

Spurious Emissions at Antenna Terminal

Channel	GPRS	
Lowest	<p> Spectrum Ref Level 40.00 dBm Offset 11.50 dB RBW 300 kHz Att 40 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep IPk Max M1[1] -36.12 dBm 361.890 MHz -13.000 dBm Start 30.0 MHz 1001 pts Stop 1.0 GHz ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 16:45:30 </p>	<p> Spectrum Ref Level 30.00 dBm Offset 11.50 dB RBW 1 MHz Att 30 dB SWT 55 ms VBW 3 MHz Mode Auto Sweep IPk Max M1[1] -26.36 dBm 1.65100 GHz -13.000 dBm Start 1.0 GHz 1001 pts Stop 10.0 GHz ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 16:45:50 </p>
Middle	<p> Spectrum Ref Level 35.00 dBm Offset 11.50 dB RBW 100 kHz Att 40 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep IPk Max M1[1] -36.30 dBm 668.110 MHz -13.000 dBm Start 30.0 MHz 1001 pts Stop 1.0 GHz ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 16:49:48 </p>	<p> Spectrum Ref Level 30.00 dBm Offset 11.50 dB RBW 1 MHz Att 30 dB SWT 55 ms VBW 3 MHz Mode Auto Sweep IPk Max M1[1] -25.99 dBm 1.69680 GHz -13.000 dBm Start 1.0 GHz 1001 pts Stop 10.0 GHz ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 16:50:20 </p>
Highest	<p> Spectrum Ref Level 36.50 dBm Offset 11.50 dB RBW 100 kHz Att 35 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep IPk Max M1[1] -40.65 dBm 291.150 MHz -13.000 dBm Start 30.0 MHz 1001 pts Stop 1.0 GHz ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 16:55:57 </p>	<p> Spectrum Ref Level 30.00 dBm Offset 11.50 dB RBW 1 MHz Att 30 dB SWT 55 ms VBW 3 MHz Mode Auto Sweep IPk Max M1[1] -25.32 dBm 1.69680 GHz -13.000 dBm Start 1.0 GHz 1001 pts Stop 10.0 GHz ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 16:56:18 </p>

Out of band emission, Band Edge

Mode	Lowest	Highest
GPRS	<p>ProjectNo.: CR230952608 Tester: Len Ruang Date: 25.SEP.2023 16:44:33</p>	<p>ProjectNo.: CR230952608 Tester: Len Ruang Date: 25.SEP.2023 16:54:52</p>
EDGE	<p>ProjectNo.: CR230952608 Tester: Len Ruang Date: 26.SEP.2023 09:05:40</p>	<p>ProjectNo.: CR230952608 Tester: Len Ruang Date: 26.SEP.2023 09:29:56</p>

4.2 Antenna Port Test Data and Results for GSM 1900 band:

Serial Number:	2B0S-1	Test Date:	2023/9/25-2023/11/07
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5-25.8	Relative Humidity: (%)	46-57	ATM Pressure: (kPa)	101
----------------------	-----------	---------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GPRS	1850.2	1880	1909.8
EDGE	1850.2	1880	1909.8

Test Data:

FCC§2.1046;§ 24.232 (c):RF Output Power					
Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GPRS 1 Slot	29.05	28.41	27.9	29.54	33
GPRS 2 Slots	28.14	27.41	26.88	28.63	33
GPRS 3 Slots	26.2	25.46	24.84	26.69	33
GPRS 4 Slots	25.07	24.33	23.74	25.56	33
EDGE 1 Slot	25.29	25.44	25.47	25.96	33
EDGE 2 Slots	24.09	24.18	24.09	24.67	33
EDGE 3 Slots	21.87	21.94	21.81	22.43	33
EDGE 4 Slots	20.56	20.59	20.65	21.14	33
Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)					
				Result:	Pass

FCC §2.1049, §24.238:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (kHz)			26 dB Occupied Bandwidth (kHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GPRS	0.244	0.244	0.244	0.31	0.316	0.316
EDGE	0.246	0.244	0.246	0.304	0.307	0.308
Note: The test plots please refer to the Plots of Occupied Bandwidth						


FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	GMSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	7.4	1850.03789	1850.00000	1909.98949	1910.00000
	-20	7.4	1850.03040	1850.00000	1909.99333	1910.00000
	-10	7.4	1850.03409	1850.00000	1909.98417	1910.00000
	0	7.4	1850.03336	1850.00000	1909.99719	1910.00000
	10	7.4	1850.03337	1850.00000	1909.94613	1910.00000
	20	7.4	1850.04047	1850.00000	1909.98974	1910.00000
	30	7.4	1850.00424	1850.00000	1909.99233	1910.00000
	40	7.4	1850.02918	1850.00000	1909.93609	1910.00000
	50	7.4	1850.06018	1850.00000	1909.97491	1910.00000
Frequency Stability vs. Voltage	20	6.8	1850.08184	1850.00000	1909.97848	1910.00000
	20	8.4	1850.01959	1850.00000	1909.91376	1910.00000
Result:					Pass	

Test Mode:	8PSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	7.4	1850.01449	1850.00000	1909.97647	1910.00000
	-20	7.4	1850.02650	1850.00000	1909.98781	1910.00000
	-10	7.4	1850.01613	1850.00000	1909.98462	1910.00000
	0	7.4	1850.02005	1850.00000	1909.99411	1910.00000
	10	7.4	1850.02454	1850.00000	1909.97789	1910.00000
	20	7.4	1850.02958	1850.00000	1909.98426	1910.00000
	30	7.4	1850.00965	1850.00000	1909.98670	1910.00000
	40	7.4	1850.00605	1850.00000	1909.96967	1910.00000
	50	7.4	1850.01478	1850.00000	1909.96920	1910.00000
Frequency Stability vs. Voltage	20	6.8	1850.00918	1850.00000	1909.98774	1910.00000
	20	8.4	1850.00504	1850.00000	1909.98125	1910.00000
Result:					Pass	

Test Plots (Note: The 11.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

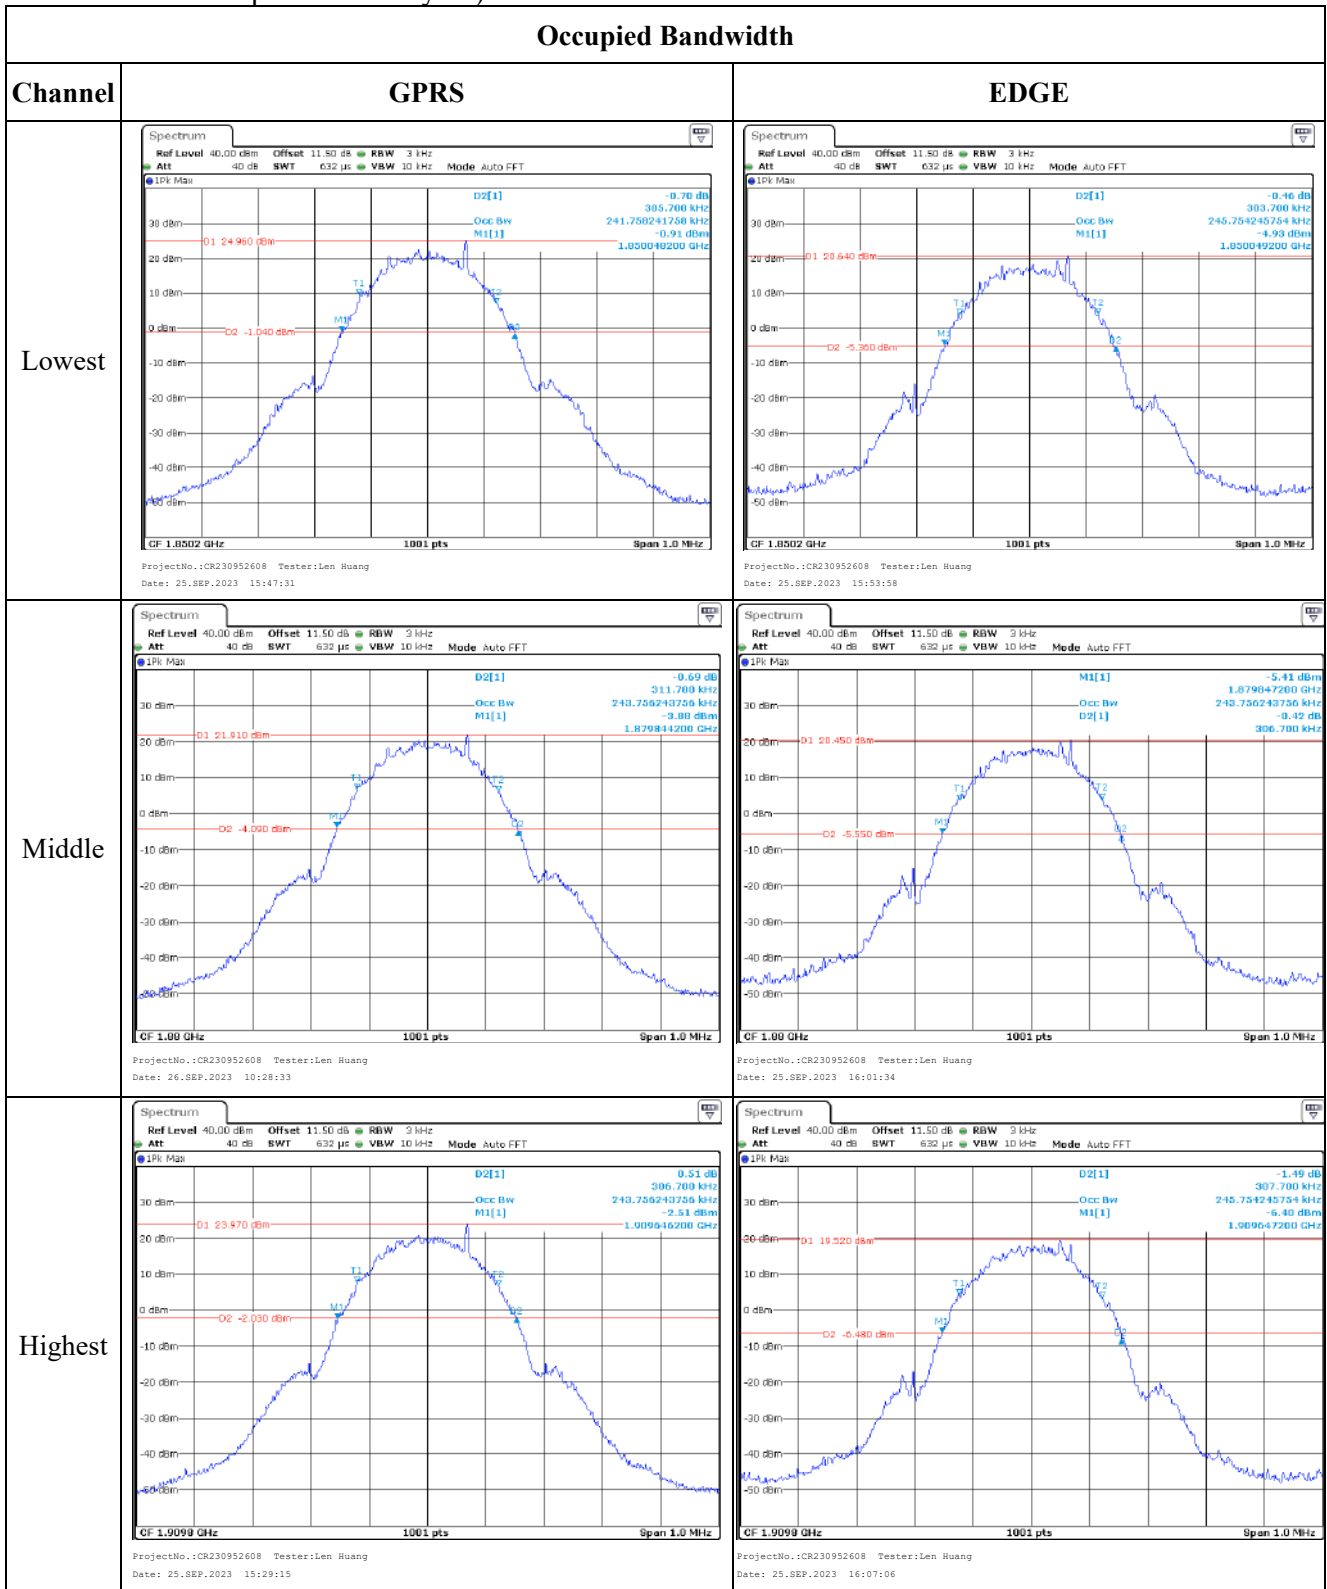

Spurious Emissions at Antenna Terminal

Channel	GPRS	
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 15:50:03</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 7.NOV.2023 11:27:55</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 15:43:35</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 7.NOV.2023 11:25:42</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 15:31:20</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 15:39:52</p>

Out of band emission, Band Edge

Channel	Lowest	Highest
GPRS	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 15:49:31</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 15:31:10</p>
EDGE	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 15:55:40</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 16:08:39</p>

4.3 Antenna Port Test Data and Results for WCDMA Band 2:

Serial Number:	2B0S-1	Test Date:	2023/9/23-2023/9/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5-25.8	Relative Humidity: (%)	46-57	ATM Pressure: (kPa)	101
----------------------	-----------	------------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA Band 2	1852.4	1880	1907.6

Test Data:**FCC§2.1046;§ 24.232****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	22.73	22.71	22.79	23.28	33
HSDPA Subtest 1	20.03	19.91	20.23	20.72	33
HSDPA Subtest 2	20.05	19.96	20.28	20.77	33
HSDPA Subtest 3	20.07	20.00	20.33	20.82	33
HSDPA Subtest 4	20.12	20.04	20.4	20.89	33
HSUPA Subtest 1	19.75	19.97	19.72	20.46	33
HSUPA Subtest 2	19.82	19.99	19.76	20.48	33
HSUPA Subtest 3	19.87	20.05	19.80	20.54	33
HSUPA Subtest 4	19.92	20.09	19.85	20.58	33
HSUPA Subtest 5	19.95	20.15	19.88	20.64	33
HSPA+ Subtest 1	19.99	20.19	20.00	20.68	33

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:**Pass****Peak-to-average Ratio(PAR)**

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	2.96	2.87	2.99	13
HSDPA	4.46	3.62	4.35	13
HSUPA	5.48	5.16	5.77	13

Result:**Pass****FCC §2.1049, §24.238:Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.17	4.17	4.18	4.74	4.75	4.75
HSDPA	4.18	4.21	4.18	4.73	5.07	4.72
HSUPA	4.22	4.19	4.21	5.18	4.73	5.01

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal**Result:****Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	7.4	1850.04685	1850.00000	1909.97502	1910.00000
	-20	7.4	1850.03515	1850.00000	1909.97493	1910.00000
	-10	7.4	1850.01592	1850.00000	1909.98919	1910.00000
	0	7.4	1850.02264	1850.00000	1909.98911	1910.00000
	10	7.4	1850.03281	1850.00000	1909.94842	1910.00000
	20	7.4	1850.05582	1850.00000	1909.97692	1910.00000
	30	7.4	1850.01024	1850.00000	1909.98683	1910.00000
	40	7.4	1850.03266	1850.00000	1909.94054	1910.00000
	50	7.4	1850.05147	1850.00000	1909.98193	1910.00000
Frequency Stability vs. Voltage	20	6.8	1850.08278	1850.00000	1909.97259	1910.00000
	20	8.4	1850.00779	1850.00000	1909.92254	1910.00000
					Result:	Pass

Test Plots (Note: The 11.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):


Occupied Bandwidth		
Channel	WCDMA R99	HSDPA
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 11:24:58</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 13:04:30</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 11:31:04</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 13:11:25</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 11:36:48</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 13:16:05</p>

Occupied Bandwidth


Channel

HSUPA


Lowest

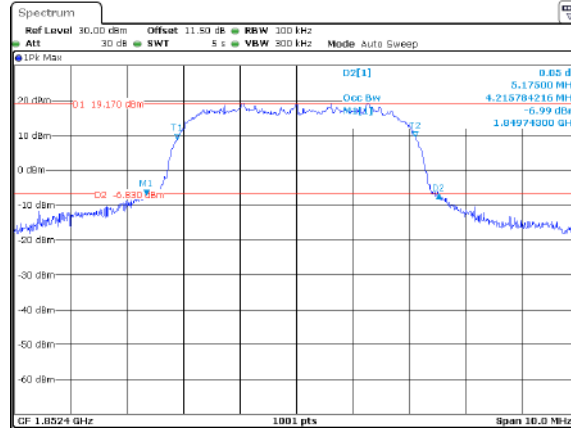

Middle

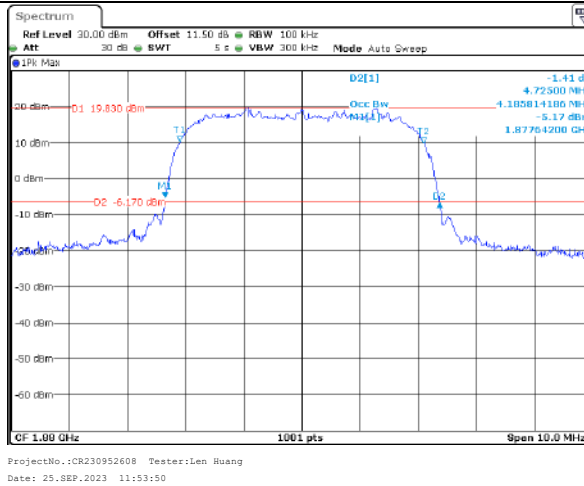

Highest

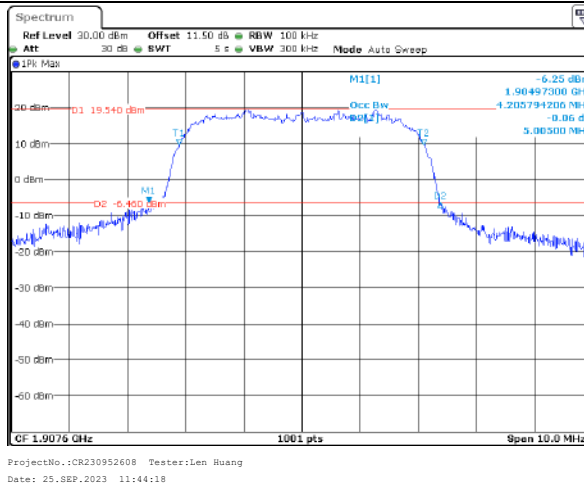

Spurious Emissions at Antenna Terminal

Channel	WCDMA R99	
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 11:25:34</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 11:26:45</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 11:31:25</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 11:31:52</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 11:37:25</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 11:38:39</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
R99	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 11:25:12</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 11:37:03</p>
HSUPA	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 12:00:04</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 11:44:32</p>
HSDPA	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 13:04:45</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 13:16:20</p>

4.4 Antenna Port Test Data and Results for WCDMA Band 4:

Serial Number:	2B0S-1	Test Date:	2023/9/23-2023/9/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5-25.8	Relative Humidity: (%)	46-57	ATM Pressure: (kPa)	101
----------------------	-----------	---------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA Band 4	1712.4	1732.6	1752.6

Test Data:**FCC§2.1046;§27.50(d)(4)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.16	23.04	22.99	23.37	30
HSDPA Subtest 1	20.54	20.36	20.42	20.75	30
HSDPA Subtest 2	20.61	20.44	20.44	20.82	30
HSDPA Subtest 3	20.67	20.46	20.47	20.88	30
HSDPA Subtest 4	20.69	20.54	20.54	20.90	30
HSUPA Subtest 1	20.38	20.17	20.13	20.59	30
HSUPA Subtest 2	20.42	20.23	20.2	20.63	30
HSUPA Subtest 3	20.49	20.26	20.23	20.70	30
HSUPA Subtest 4	20.57	20.31	20.29	20.78	30
HSUPA Subtest 5	20.64	20.34	20.31	20.85	30
HSPA+ Subtest 1	20.71	20.4	20.34	20.92	30

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:**Pass****Peak-to-average Ratio(PAR)**

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.04	2.87	3.04	13
HSDPA	4.99	4.49	3.33	13
HSUPA	5.54	5.16	5.39	13

Result:**Pass****FCC §2.1049, §27.53:Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.17	4.17	4.19	4.73	4.74	5.02
HSDPA	4.20	4.18	4.18	4.97	4.71	4.71
HSUPA	4.21	4.19	4.22	5.03	4.73	4.98

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal**Result:****Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

FCC §2.1051, § 27.53: Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §27.54: Frequency Stability

Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	7.4	1710.10575	1710.00000	1754.93106	1755.00000
	-20	7.4	1710.15068	1710.00000	1754.92062	1755.00000
	-10	7.4	1710.11731	1710.00000	1754.95845	1755.00000
	0	7.4	1710.12087	1710.00000	1754.91425	1755.00000
	10	7.4	1710.12297	1710.00000	1754.97724	1755.00000
	20	7.4	1710.16739	1710.00000	1754.94993	1755.00000
	30	7.4	1710.17280	1710.00000	1754.91086	1755.00000
	40	7.4	1710.15133	1710.00000	1754.96860	1755.00000
	50	7.4	1710.11386	1710.00000	1754.90735	1755.00000
Frequency Stability vs. Voltage	20	6.8	1710.16895	1710.00000	1754.93544	1755.00000
	20	8.4	1710.14839	1710.00000	1754.95317	1755.00000
					Result:	Pass

Test Plots (Note: The 11.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):


Occupied Bandwidth		
Channel	WCDMA R99	HSDPA
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:19:26</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 13:33:20</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:14:27</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 13:27:35</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:08:14</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 13:22:32</p>

Occupied Bandwidth


Channel

HSUPA


Lowest

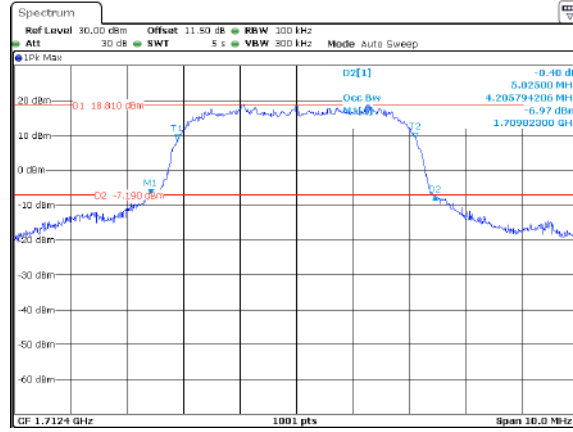

Middle

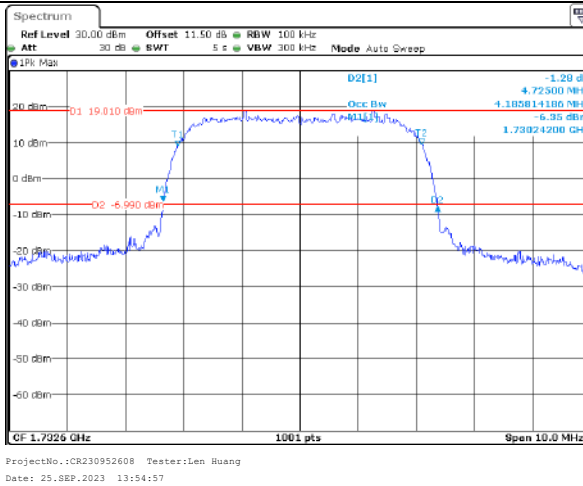

Highest

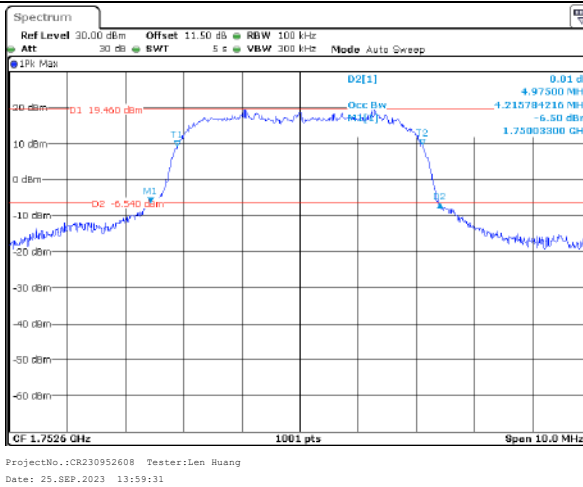

Spurious Emissions at Antenna Terminal

Channel	WCDMA R99	
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:19:59</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:20:33</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:14:49</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:16:08</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:09:30</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:12:06</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
R99	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:19:38</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:09:09</p>
HSUPA	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 13:51:08</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 13:59:43</p>
HSDPA	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 13:53:32</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 13:22:44</p>

4.5 Antenna Port Test Data and Results for WCDMA Band 5:

Serial Number:	2B0S-1	Test Date:	2023/9/23-2023/9/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5-25.8	Relative Humidity: (%)	46-57	ATM Pressure: (kPa)	101
----------------------	-----------	---------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA Band 5	826.4	836.6	846.6

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.32	23.38	23.4	16.86	38.45
HSDPA Subtest 1	20.65	20.58	20.63	14.11	38.45
HSDPA Subtest 2	20.68	20.62	20.68	14.14	38.45
HSDPA Subtest 3	20.74	20.69	20.73	14.20	38.45
HSDPA Subtest 4	20.8	20.76	20.76	14.26	38.45
HSUPA Subtest 1	19.75	19.97	19.72	13.43	38.45
HSUPA Subtest 2	19.82	20.03	19.77	13.49	38.45
HSUPA Subtest 3	19.87	20.09	19.85	13.55	38.45
HSUPA Subtest 4	19.9	20.12	19.92	13.58	38.45
HSUPA Subtest 5	19.94	20.18	19.95	13.64	38.45
HSPA+ Subtest 1	20.02	20.24	19.97	13.70	38.45

Note:
 $ERP = \text{Conducted Power(dBm)} - L_c(\text{dB}) + G_T(\text{dBd})$
 $G_T(\text{dBd}) = G_T(\text{dBi}) - 2.15$

Result:	Pass
----------------	-------------

Peak-to-average Ratio(PAR)

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.01	3.04	2.93	13
HSDPA	3.36	3.39	4.72	13
HSUPA	5.65	5.59	5.65	13

Result:	Pass
----------------	-------------

FCC §2.1049, §22.917, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.17	4.18	4.18	4.72	4.8	4.74
HSDPA	4.20	4.21	4.20	4.94	4.9	4.91
HSUPA	4.21	4.23	4.21	5.10	5.15	4.82

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, §22.917(a):Out of band emission, Band Edge**Result: Pass, Please refer to the test plots of Out of band emission, Band Edge.****FCC §2.1055, §22.355: Frequency Stability**

Test Modulation:	WCDMA R99		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	7.4	-18	-0.022	2.5
	-20	7.4	-11	-0.013	2.5
	-10	7.4	-14	-0.017	2.5
	0	7.4	-6	-0.007	2.5
	10	7.4	-7	-0.008	2.5
	20	7.4	-1	-0.001	2.5
	30	7.4	-13	-0.016	2.5
	40	7.4	-3	-0.004	2.5
Frequency Stability vs. Voltage	50	7.4	-3	-0.004	2.5
	20	6.8	-11	-0.013	2.5
	20	8.4	-16	-0.019	2.5
Result:				Pass	

Test Plots(Note: The 11.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):


Occupied Bandwidth		
Channel	WCDMA R99	HSDPA
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:38:32</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 15:19:40</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:32:11</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 15:15:16</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:26:02</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 15:09:44</p>

Occupied Bandwidth


Channel

HSUPA


Lowest

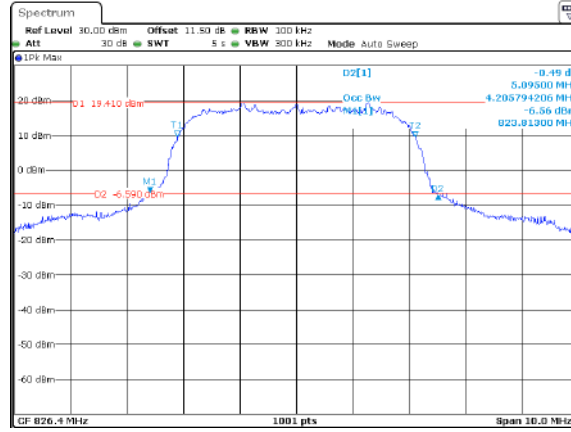

Middle

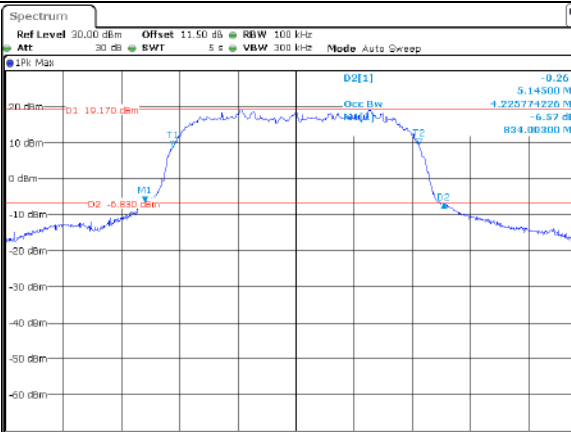

Highest

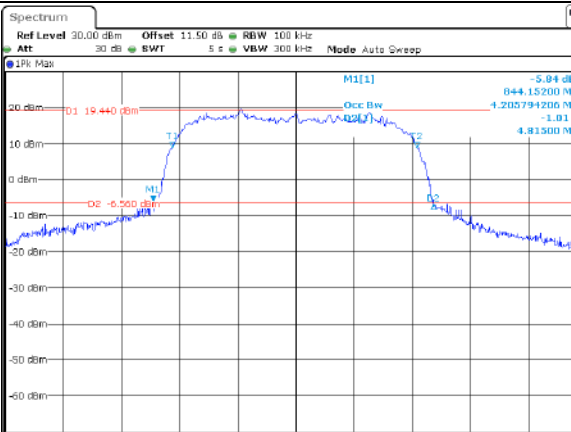

Spurious Emissions at Antenna Terminal

Channel	WCDMA R99	
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:41:49</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:42:10</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:34:30</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:34:39</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:28:07</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25_SEP.2023 14:28:17</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
R99	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 14:39:12</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 14:26:16</p>
HSUPA	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 14:47:31</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 15:01:00</p>
HSDPA	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 15:19:51</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 25.SEP.2023 15:09:55</p>

4.6 Antenna Port Test Data and Results for LTE Band 2

Serial Number:	2B0S-1	Test Date:	2023/9/23-2023/9/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5-25.8	Relative Humidity: (%)	46-57	ATM Pressure: (kPa)	101
----------------------	-----------	---------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1850.7	1880	1909.3
3MHz	1851.5	1880	1908.5
5MHz	1852.5	1880	1907.5
10MHz	1855	1880	1905
15MHz	1857.5	1880	1902.5
20MHz	1860	1880	1900

Test Data:**FCC§2.1046;§ 24.232****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP(dBm)	EIRP Limit(dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	21.87	21.82	21.78	22.54	33
	RB1#3	22	22.05	21.98		
	RB1#5	21.81	21.82	21.77		
	RB3#0	21.98	21.94	21.9		
	RB3#3	21.93	21.95	21.93		
	RB6#0	20.91	20.93	20.83		
1.4MHz 16QAM	RB1#0	20.85	20.98	20.78	21.66	33
	RB1#3	20.98	21.17	20.99		
	RB1#5	20.87	20.96	20.8		
	RB3#0	21.13	20.89	20.93		
	RB3#3	21.13	20.9	20.91		
	RB6#0	19.95	20	19.79		
3MHz QPSK	RB1#0	21.89	21.88	21.79	22.45	33
	RB1#8	21.86	21.85	21.71		
	RB1#14	21.96	21.84	21.71		
	RB6#0	20.88	20.85	20.79		
	RB6#9	20.82	20.82	20.75		
	RB15#0	20.88	20.88	20.78		
3MHz 16QAM	RB1#0	21.03	20.86	21.34	21.83	33
	RB1#8	20.99	20.89	21.3		
	RB1#14	21.02	20.85	21.31		
	RB6#0	19.88	19.81	19.85		
	RB6#9	19.87	19.8	19.81		
	RB15#0	19.82	19.94	19.88		
5MHz QPSK	RB1#0	21.79	21.74	21.64	22.4	33
	RB1#13	21.91	21.84	21.81		
	RB1#24	21.82	21.77	21.67		
	RB15#0	20.85	20.89	20.83		
	RB15#10	20.83	20.81	20.71		
	RB25#0	20.8	20.81	20.72		
5MHz 16QAM	RB1#0	21.05	20.8	20.58	21.74	33
	RB1#13	21.25	20.93	20.71		
	RB1#24	21.09	20.81	20.61		
	RB15#0	19.85	19.88	19.9		
	RB15#10	19.79	19.82	19.78		
	RB25#0	19.82	19.86	19.8		
10MHz QPSK	RB1#0	21.79	21.84	21.78	22.45	33

	RB1#25	21.96	21.92	21.89		
	RB1#49	21.78	21.8	21.6		
	RB25#0	20.81	20.87	20.9		
	RB25#25	20.85	20.76	20.68		
	RB50#0	20.88	20.84	20.8		
10MHz 16QAM	RB1#0	20.96	20.8	21.24	21.73	33
	RB1#25	21.1	20.94	21.24		
	RB1#49	20.95	20.83	20.91		
	RB25#0	19.9	19.98	19.93		
	RB25#25	19.94	19.89	19.75		
	RB50#0	19.89	19.87	19.78		
15MHz QPSK	RB1#0	21.71	21.78	21.44	22.37	33
	RB1#38	21.8	21.79	21.29		
	RB1#74	21.88	21.45	21.12		
	RB36#0	20.86	20.71	20.33		
	RB36#39	20.89	20.65	20.19		
	RB75#0	20.87	20.63	20.28		
15MHz 16QAM	RB1#0	21.34	20.65	20.63	21.89	33
	RB1#38	21.4	20.75	20.69		
	RB1#74	21.28	20.51	20.57		
	RB36#0	19.87	19.55	19.28		
	RB36#39	19.9	19.38	19.18		
	RB75#0	19.89	19.5	19.28		
20MHz QPSK	RB1#0	21.51	21.12	21.11	22.3	33
	RB1#50	21.81	21.43	21.46		
	RB1#99	21.53	21.07	21.06		
	RB50#0	20.81	20.36	20.27		
	RB50#50	20.94	20.21	20.15		
	RB100#0	20.87	20.32	20.22		
20MHz 16QAM	RB1#0	20.75	20.36	20.34	21.78	33
	RB1#50	21.29	20.72	20.64		
	RB1#99	20.65	20.38	20.27		
	RB50#0	19.74	19.41	19.32		
	RB50#50	19.61	19.24	19.13		
	RB100#0	19.52	19.37	19.23		
Note: EIRP=Conducted Power(dBm) - Lc(dB) + G _T (dBi)					Result:	Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	5.36	4.20	5.39	13
	RB100#0	5.28	5.04	5.13	13
20MHz 16QAM	RB1#0	6.12	5.25	5.91	13
	RB100#0	6.14	5.91	6.03	13
Result:					Pass

FCC §2.1049, §24.238:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.096	1.102	1.102	1.302	1.326	1.290
1.4MHz 16QAM	1.096	1.090	1.10	1.320	1.290	1.29
3MHz QPSK	2.683	2.683	2.683	2.880	2.880	2.868
3MHz 16QAM	2.683	2.683	2.683	2.880	2.892	2.880
5MHz QPSK	4.491	4.511	4.491	4.940	4.960	4.920
5MHz 16QAM	4.511	4.491	4.511	4.980	4.920	4.960
10MHz QPSK	8.942	8.942	8.942	9.640	9.720	9.560
10MHz 16QAM	8.942	8.942	8.942	9.560	9.560	9.600
15MHz QPSK	13.533	13.533	13.413	14.820	14.700	14.520
15MHz 16QAM	13.473	13.533	13.473	14.640	14.700	14.640
20MHz QPSK	17.964	17.964	17.884	19.360	19.200	19.280
20MHz 16QAM	17.964	17.964	17.884	19.200	19.280	19.200

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	7.4	1850.11709	1850.00000	1909.87880	1910.00000
	-20	7.4	1850.11543	1850.00000	1909.86642	1910.00000
	-10	7.4	1850.11334	1850.00000	1909.89139	1910.00000
	0	7.4	1850.11620	1850.00000	1909.85857	1910.00000
	10	7.4	1850.12295	1850.00000	1909.87536	1910.00000
	20	7.4	1850.11338	1850.00000	1909.84859	1910.00000
	30	7.4	1850.10655	1850.00000	1909.87373	1910.00000
	40	7.4	1850.11298	1850.00000	1909.86024	1910.00000
	50	7.4	1850.12578	1850.00000	1909.87051	1910.00000
Frequency Stability vs. Voltage	20	6.8	1850.13059	1850.00000	1909.84258	1910.00000
	20	8.4	1850.10746	1850.00000	1909.87316	1910.00000
					Result:	Pass
Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	7.4	1850.10383	1850.00000	1909.87019	1910.00000
	-20	7.4	1850.12485	1850.00000	1909.87487	1910.00000
	-10	7.4	1850.10644	1850.00000	1909.86828	1910.00000
	0	7.4	1850.12540	1850.00000	1909.88733	1910.00000
	10	7.4	1850.11082	1850.00000	1909.87960	1910.00000
	20	7.4	1850.11279	1850.00000	1909.87222	1910.00000
	30	7.4	1850.11472	1850.00000	1909.88586	1910.00000
	40	7.4	1850.10790	1850.00000	1909.87654	1910.00000
	50	7.4	1850.11320	1850.00000	1909.87058	1910.00000
Frequency Stability vs. Voltage	20	6.8	1850.12394	1850.00000	1909.87746	1910.00000
	20	8.4	1850.08740	1850.00000	1909.86651	1910.00000
					Result:	Pass

Test Plots (Note: The 11.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:10:38</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:10:56</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:11:17</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:11:38</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:11:56</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:12:17</p>

Occupied Bandwidth

Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:13:05</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:13:23</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:13:45</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:14:03</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:14:24</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:14:42</p>

Occupied Bandwidth

Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:15:47</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:16:09</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:16:34</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:16:52</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:17:11</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:17:33</p>

Occupied Bandwidth

Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:19:49</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:19:16</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:19:45</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:20:17</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:20:46</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:21:21</p>

Occupied Bandwidth

Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:22:24</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:22:52</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:23:23</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:23:54</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:24:29</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:25:06</p>

Occupied Bandwidth



Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:26:05</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:26:39</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:27:18</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:27:49</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:28:27</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:29:08</p>

Spurious Emissions at Antenna Terminal

Channel

1.4MHz Bandwidth QPSK



Lowest

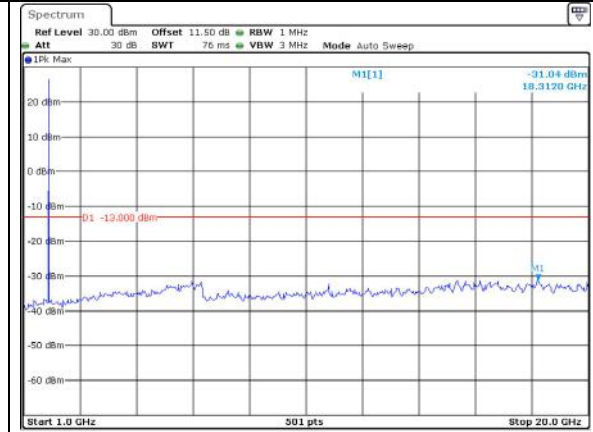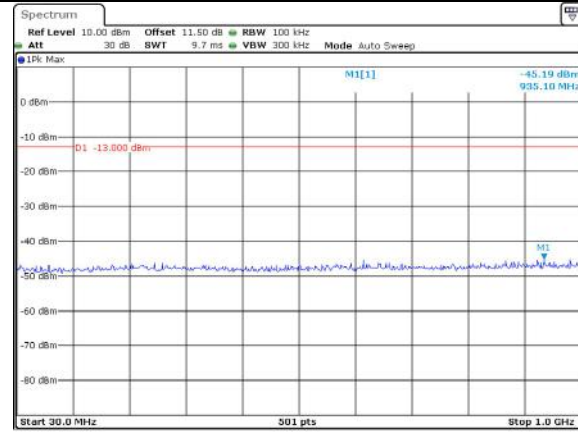

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:15:30

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:15:34



Middle

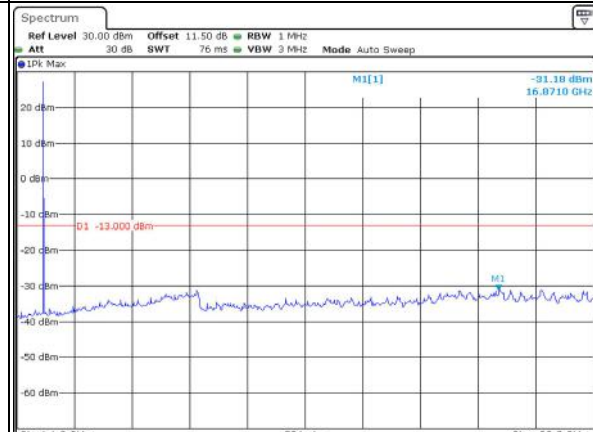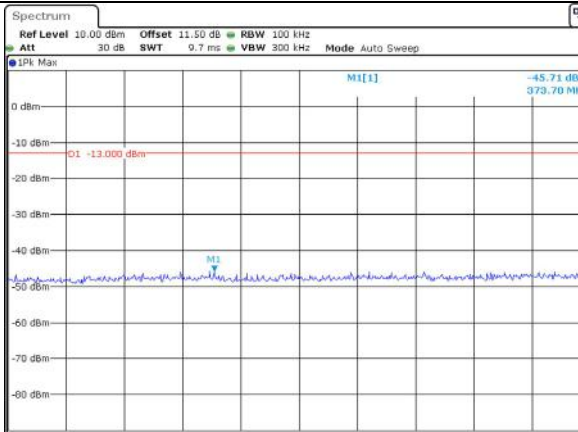

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:16:26

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:16:33

Highest

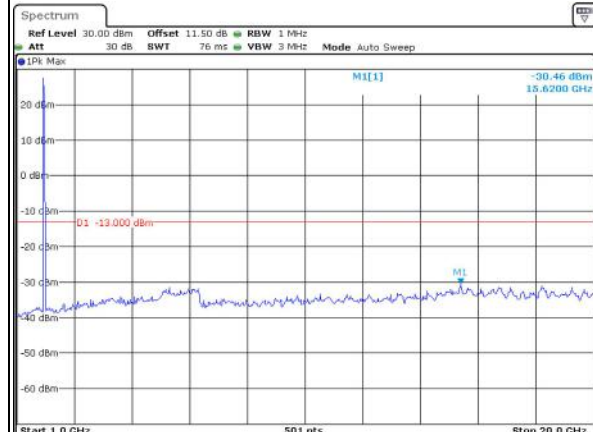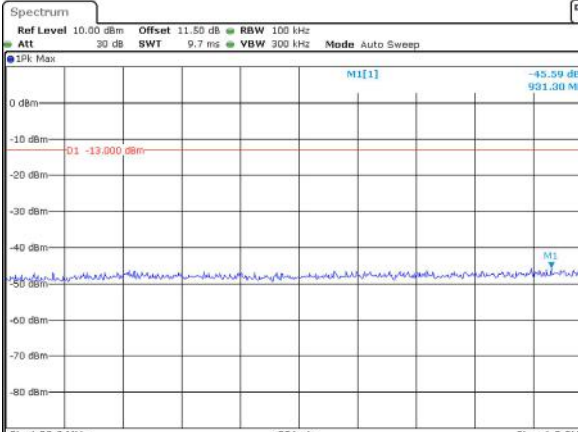

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:17:16



ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:17:36

Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

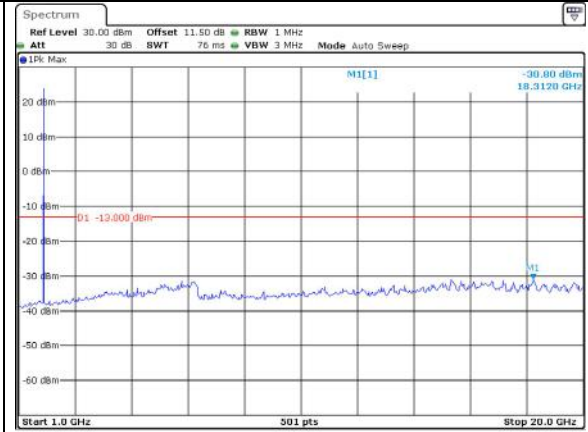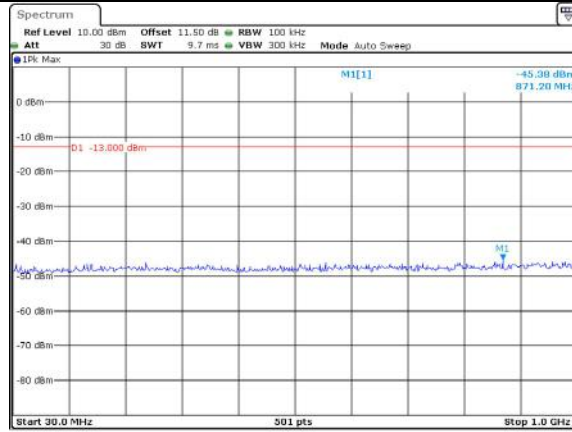

Middle

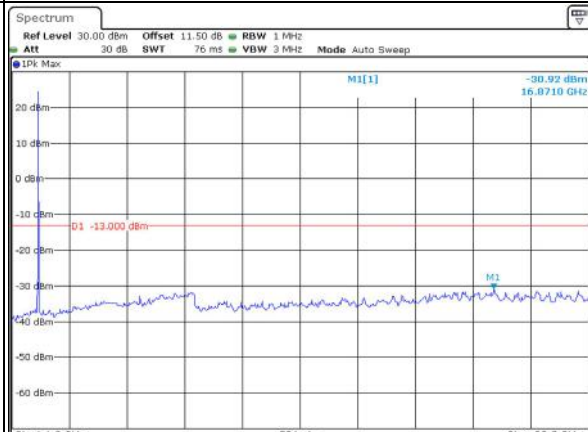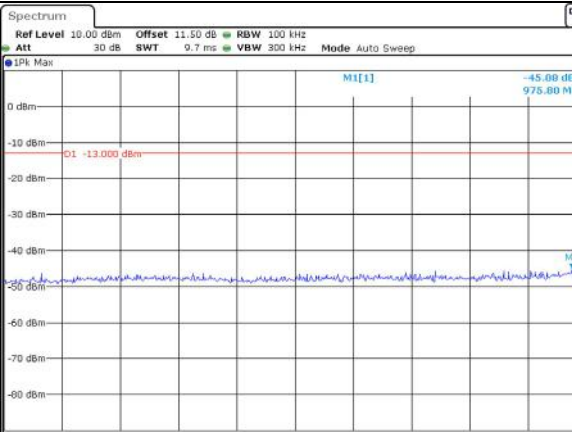

Highest

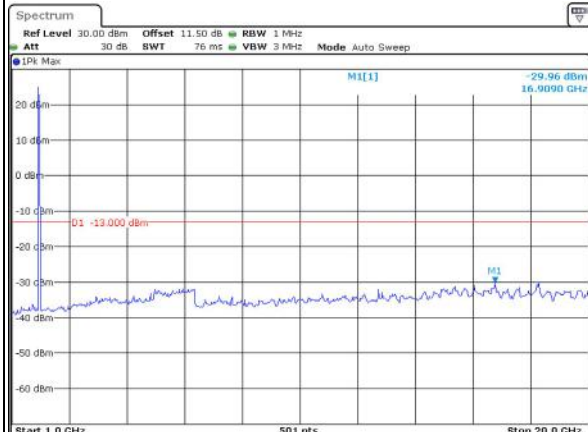
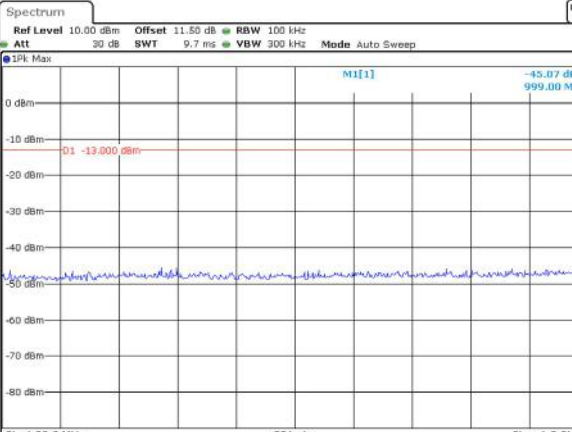


Spurious Emissions at Antenna Terminal

Channel

5MHz Bandwidth QPSK



Lowest

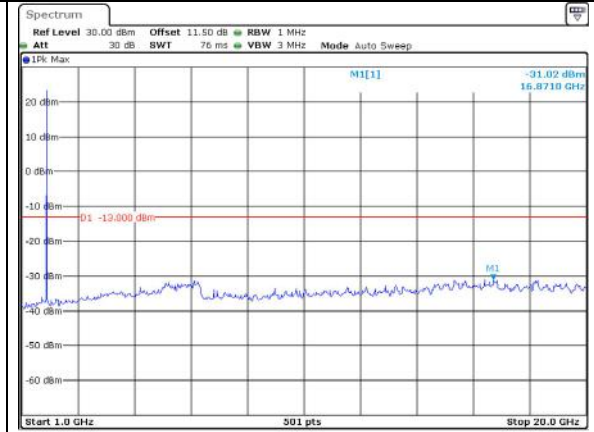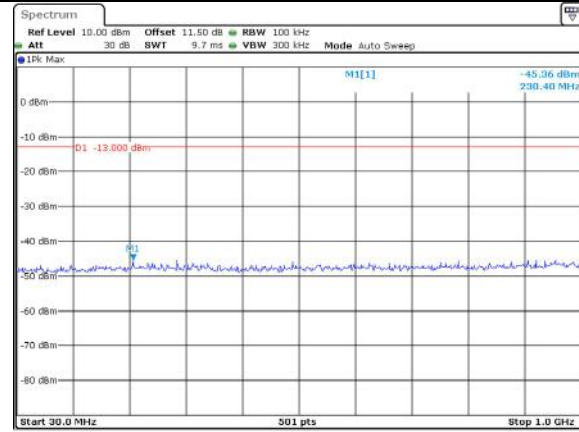

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:21:37

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:22:04



Middle

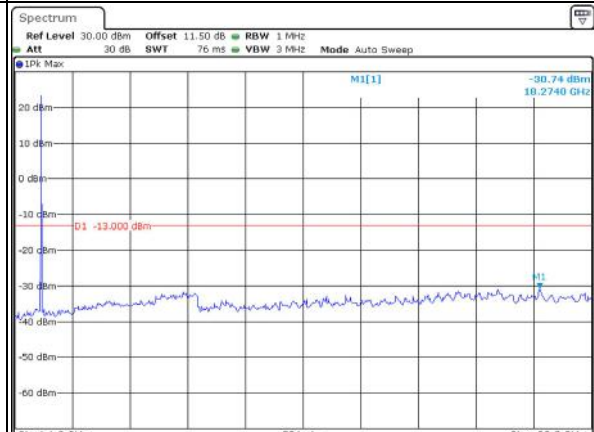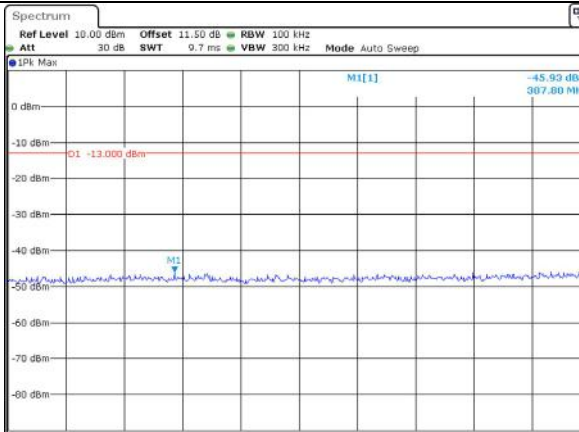

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:22:31

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:22:57

Highest

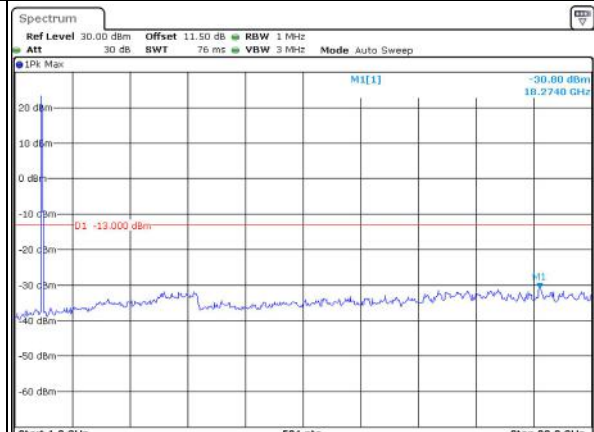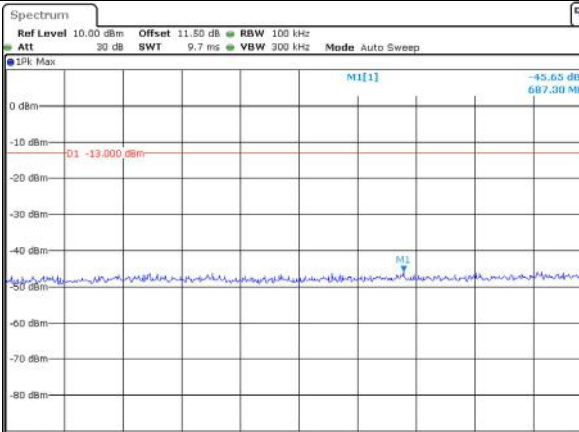

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:23:21

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:23:47

Spurious Emissions at Antenna Terminal



Channel	10MHz Bandwidth QPSK	
Lowest	<p>Ref Level 10.00 dBm Offset 11.50 dB RBW 100 kHz Att 30 dB SWT 9.7 ms VBW 300 kHz Mode Auto Sweep</p> <p>IPk Max M1[1] -45.17 dBm 263.50 MHz</p> <p>Start 30.0 MHz 501 pts Stop 1.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:24:52</p>	<p>Ref Level 30.00 dBm Offset 11.50 dB RBW 1 MHz Att 30 dB SWT 76 ms VBW 3 MHz Mode Auto Sweep</p> <p>IPk Max M1[1] -30.89 dBm 15.6200 GHz</p> <p>Start 1.0 GHz 501 pts Stop 20.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:25:12</p>
Middle	<p>Ref Level 10.00 dBm Offset 11.50 dB RBW 100 kHz Att 30 dB SWT 9.7 ms VBW 300 kHz Mode Auto Sweep</p> <p>IPk Max M1[1] -45.58 dBm 751.20 MHz</p> <p>Start 30.0 MHz 501 pts Stop 1.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:25:50</p>	<p>Ref Level 30.00 dBm Offset 11.50 dB RBW 1 MHz Att 30 dB SWT 76 ms VBW 3 MHz Mode Auto Sweep</p> <p>IPk Max M1[1] -31.13 dBm 15.5820 GHz</p> <p>Start 1.0 GHz 501 pts Stop 20.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:26:19</p>
Highest	<p>Ref Level 10.00 dBm Offset 11.50 dB RBW 100 kHz Att 30 dB SWT 9.7 ms VBW 300 kHz Mode Auto Sweep</p> <p>IPk Max M1[1] -45.04 dBm 991.30 MHz</p> <p>Start 30.0 MHz 501 pts Stop 1.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:26:56</p>	<p>Ref Level 30.00 dBm Offset 11.50 dB RBW 1 MHz Att 30 dB SWT 76 ms VBW 3 MHz Mode Auto Sweep</p> <p>IPk Max M1[1] -29.61 dBm 18.2740 GHz</p> <p>Start 1.0 GHz 501 pts Stop 20.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:27:19</p>

Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

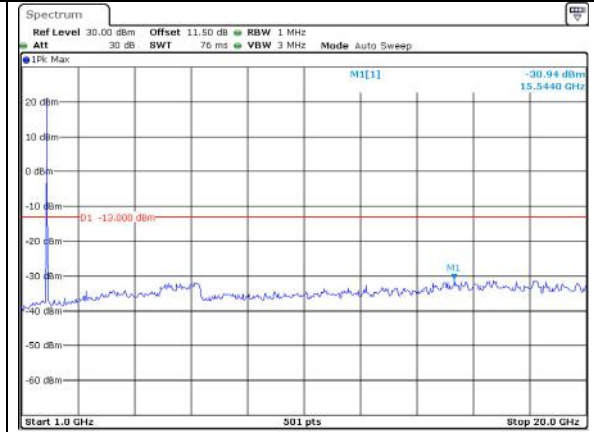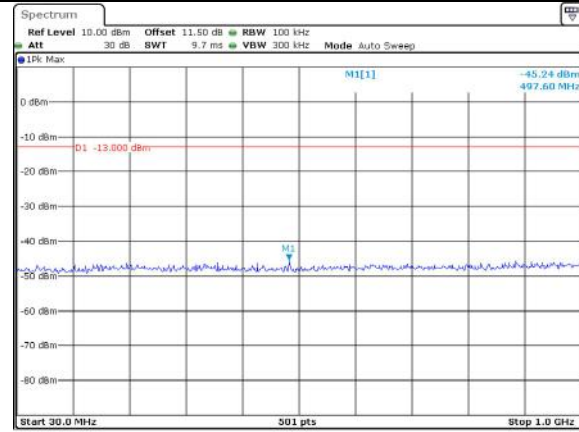

Middle

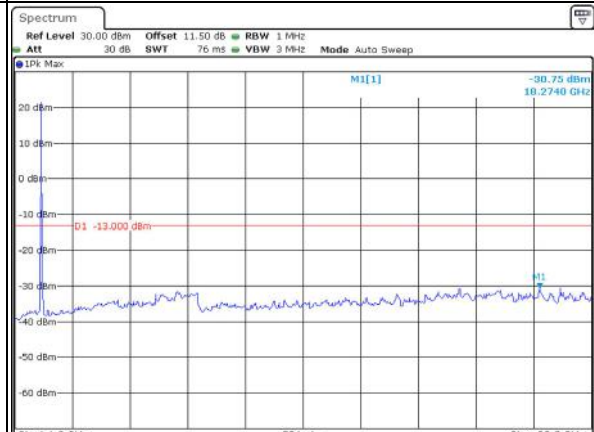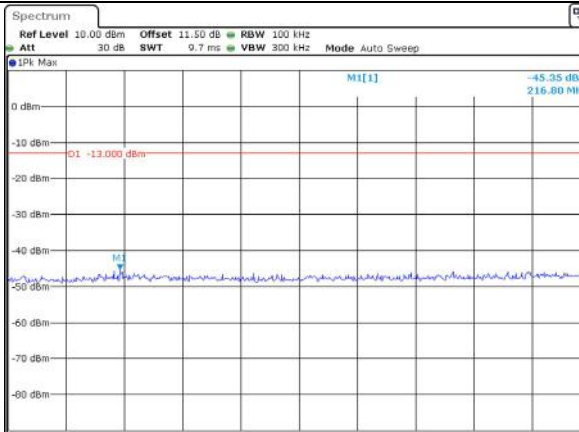

Highest

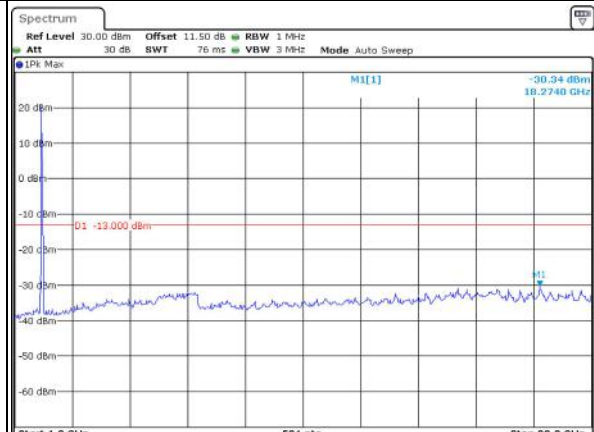
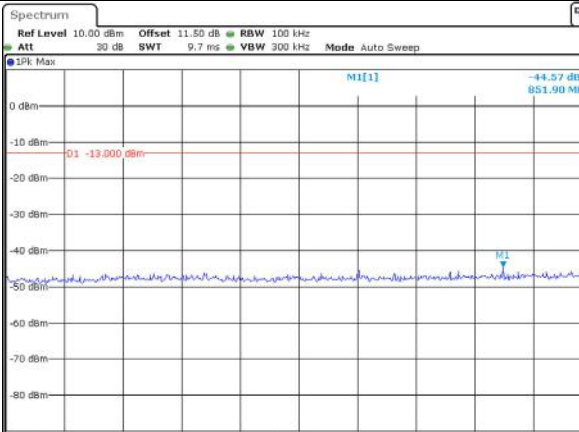


Spurious Emissions at Antenna Terminal



Channel

20MHz Bandwidth QPSK



Lowest

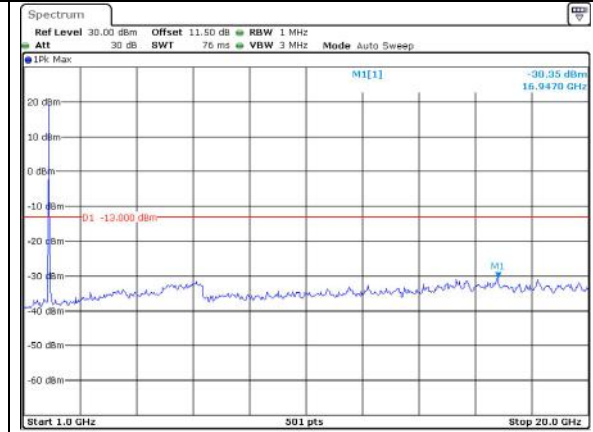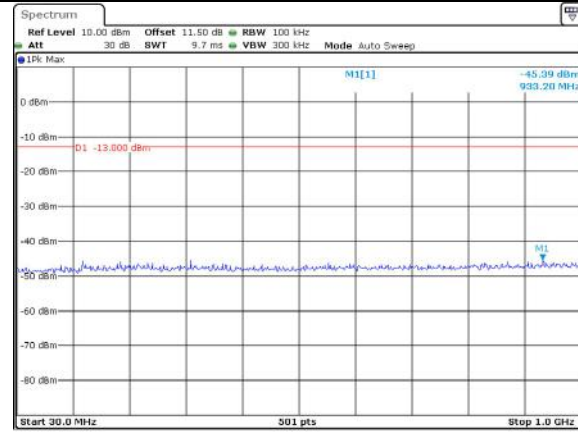

Middle

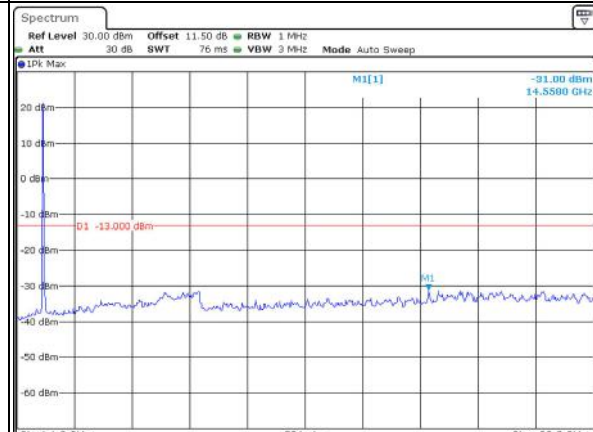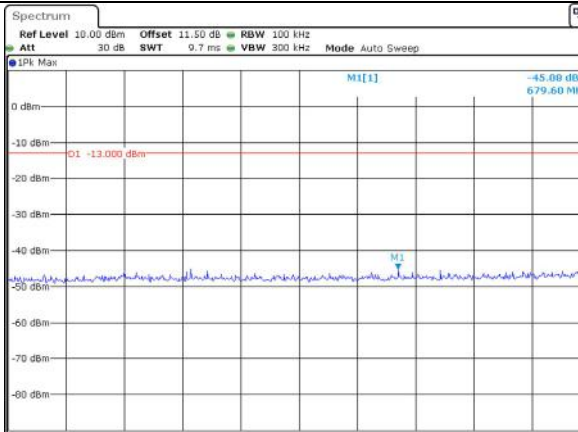

Highest

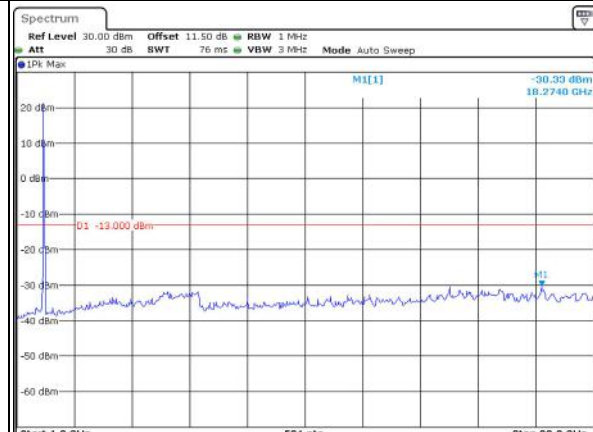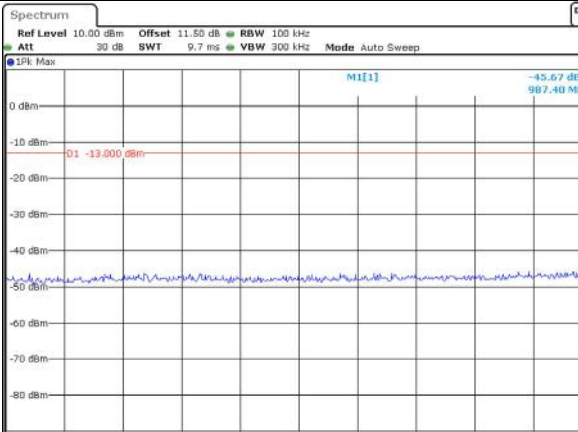

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 1.4MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:19:07</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:19:22</p>
QPSK 3MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:20:03</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:20:16</p>
QPSK 5MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:21:00</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:21:16</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 10MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:21:59</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:22:16</p>
QPSK 15MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:23:00</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:23:16</p>
QPSK 20MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:24:03</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:24:21</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 1.4MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:19:14</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:19:29</p>
16QAM 3MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:20:10</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:20:26</p>
16QAM 5MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:21:08</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:21:24</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 10MHz		
16QAM 15MHz		
16QAM 20MHz		

4.7 Antenna Port Test Data and Results for LTE Band 4

Serial Number:	2B0S-1	Test Date:	2023/9/23-2023/9/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5-25.8	Relative Humidity: (%)	46-57	ATM Pressure: (kPa)	101
----------------------	-----------	---------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1710.7	1732.5	1754.3
3MHz	1711.5	1732.5	1753.5
5MHz	1712.5	1732.5	1752.5
10MHz	1715	1732.5	1750
15MHz	1717.5	1732.5	1747.5
20MHz	1720	1732.5	1745

Test Data:**FCC§2.1046;§ 27.50(d)(4)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP(dBm)	EIRP Limit(dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	21.23	21.24	21.21	21.67	30
	RB1#3	21.45	21.46	21.4		
	RB1#5	21.26	21.22	21.22		
	RB3#0	21.4	21.29	21.38		
	RB3#3	21.36	21.28	21.32		
	RB6#0	20.42	20.34	20.32		
1.4MHz 16QAM	RB1#0	20.4	20.21	20.23	20.78	30
	RB1#3	20.57	20.42	20.43		
	RB1#5	20.4	20.28	20.28		
	RB3#0	20.35	20.35	20.56		
	RB3#3	20.36	20.32	20.56		
	RB6#0	19.39	19.26	19.4		
3MHz QPSK	RB1#0	21.81	21.24	21.22	22.02	30
	RB1#8	21.63	21.21	21.23		
	RB1#14	21.27	21.17	21.23		
	RB6#0	20.25	20.26	20.24		
	RB6#9	20.27	20.25	20.27		
	RB15#0	20.28	20.26	20.25		
3MHz 16QAM	RB1#0	20.35	20.77	20.39	20.98	30
	RB1#8	20.35	20.7	20.4		
	RB1#14	20.31	20.7	20.38		
	RB6#0	19.24	19.31	19.25		
	RB6#9	19.27	19.26	19.29		
	RB15#0	19.35	19.3	19.2		
5MHz QPSK	RB1#0	21.61	21.15	21.08	21.82	30
	RB1#13	21.33	21.25	21.3		
	RB1#24	21.23	21.1	21.17		
	RB15#0	20.25	20.26	20.25		
	RB15#10	20.32	20.25	20.29		
	RB25#0	20.25	20.2	20.24		
5MHz 16QAM	RB1#0	20.52	20.24	20.05	20.89	30
	RB1#13	20.68	20.33	20.19		
	RB1#24	20.54	20.18	20.11		
	RB15#0	19.28	19.27	19.31		
	RB15#10	19.32	19.25	19.31		
	RB25#0	19.29	19.23	19.31		
10MHz QPSK	RB1#0	21.31	21.22	21.18	21.69	30

	RB1#25	21.48	21.36	21.29			
	RB1#49	21.24	21.12	21.24			
	RB25#0	20.33	20.26	20.31			
	RB25#25	20.35	20.23	20.32			
	RB50#0	20.35	20.24	20.32			
10MHz 16QAM	RB1#0	20.33	20.84	20.33	21.11	30	
	RB1#25	20.46	20.9	20.47			
	RB1#49	20.31	20.77	20.41			
	RB25#0	19.41	19.27	19.35			
	RB25#25	19.43	19.27	19.36			
	RB50#0	19.37	19.23	19.35			
15MHz QPSK	RB1#0	21.3	21.17	21.14	21.58	30	
	RB1#38	21.37	21.23	21.16			
	RB1#74	21.21	21.2	21.18			
	RB36#0	20.37	20.32	20.38			
	RB36#39	20.42	20.31	20.32			
	RB75#0	20.36	20.33	20.37			
15MHz 16QAM	RB1#0	20.19	20.53	20.34	20.74	30	
	RB1#38	20.26	20.51	20.38			
	RB1#74	20.14	20.35	20.41			
	RB36#0	19.31	19.36	19.31			
	RB36#39	19.35	19.31	20.49			
	RB75#0	19.35	19.29	20.53			
20MHz QPSK	RB1#0	22.32	22.38	22.31	22.86	30	
	RB1#50	22.65	22.62	22.65			
	RB1#99	22.18	22.19	22.23			
	RB50#0	21.53	21.55	21.68			
	RB50#50	21.69	21.37	21.41			
	RB100#0	21.64	21.49	21.6			
20MHz 16QAM	RB1#0	21.92	21.72	21.49	22.5	30	
	RB1#50	22.29	21.96	21.83			
	RB1#99	21.76	21.48	21.45			
	RB50#0	20.55	20.57	20.68			
	RB50#50	20.67	20.38	20.44			
	RB100#0	20.63	20.5	20.59			
Note: EIRP=Conducted Power(dBm) - Lc(dB) + G _T (dBi)						Result:	Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	5.36	5.10	4.52	13
	RB100#0	5.25	5.01	5.04	13
20MHz 16QAM	RB1#0	6.38	6.38	5.13	13
	RB100#0	6.14	5.28	5.91	13
Result:					Pass

FCC §2.1049, §27.53:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.102	1.096	1.102	1.302	1.308	1.326
1.4MHz 16QAM	1.10	1.096	1.090	1.29	1.314	1.290
3MHz QPSK	2.683	2.683	2.683	2.880	2.868	2.880
3MHz 16QAM	2.683	2.683	2.683	2.880	2.892	2.868
5MHz QPSK	4.491	4.511	4.511	4.940	4.960	4.980
5MHz 16QAM	4.511	4.471	4.511	4.960	4.920	4.980
10MHz QPSK	8.942	8.942	8.942	9.640	9.640	9.640
10MHz 16QAM	8.942	8.942	8.982	9.640	9.520	9.600
15MHz QPSK	13.473	13.533	13.473	14.580	14.580	14.580
15MHz 16QAM	13.473	13.473	13.533	14.760	14.640	14.700
20MHz QPSK	17.964	17.964	17.964	19.200	19.120	19.280
20MHz 16QAM	17.964	17.884	17.964	19.120	19.280	19.200

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 27.53:Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §27.54: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	7.4	1710.29599	1710.00000	1754.77590	1755.00000
	-20	7.4	1710.29490	1710.00000	1754.75571	1755.00000
	-10	7.4	1710.28896	1710.00000	1754.77427	1755.00000
	0	7.4	1710.25181	1710.00000	1754.74158	1755.00000
	10	7.4	1710.28195	1710.00000	1754.73261	1755.00000
	20	7.4	1710.27401	1710.00000	1754.75829	1755.00000
	30	7.4	1710.26200	1710.00000	1754.76962	1755.00000
	40	7.4	1710.25848	1710.00000	1754.75995	1755.00000
	50	7.4	1710.25446	1710.00000	1754.76698	1755.00000
Frequency Stability vs. Voltage	20	6.8	1710.25123	1710.00000	1754.74508	1755.00000
	20	8.4	1710.25867	1710.00000	1754.74636	1755.00000
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	7.4	1710.12161	1710.00000	1754.86180	1755.00000
	-20	7.4	1710.12640	1710.00000	1754.85701	1755.00000
	-10	7.4	1710.12152	1710.00000	1754.87969	1755.00000
	0	7.4	1710.12303	1710.00000	1754.87281	1755.00000
	10	7.4	1710.11500	1710.00000	1754.88025	1755.00000
	20	7.4	1710.12686	1710.00000	1754.87206	1755.00000
	30	7.4	1710.11971	1710.00000	1754.87434	1755.00000
	40	7.4	1710.10727	1710.00000	1754.88144	1755.00000
	50	7.4	1710.11942	1710.00000	1754.86730	1755.00000
Frequency Stability vs. Voltage	20	6.8	1710.10225	1710.00000	1754.88803	1755.00000
	20	8.4	1710.08920	1710.00000	1754.87061	1755.00000
					Result:	Pass

Test Plots(Note: The 11.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest		
Middle		
Highest		

Occupied Bandwidth

Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:32:21</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:32:43</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:33:01</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:33:19</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:33:38</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 10:33:56</p>

Occupied Bandwidth

Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:34:52</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:35:14</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:35:45</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:36:07</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:36:33</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:36:54</p>



Occupied Bandwidth

Channel

10MHz Bandwidth QPSK

10MHz Bandwidth 16QAM



Lowest

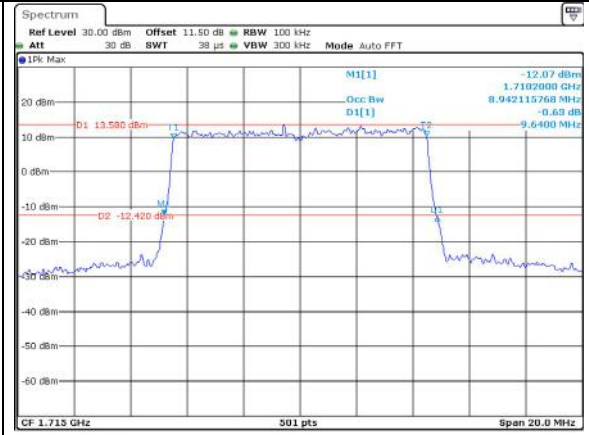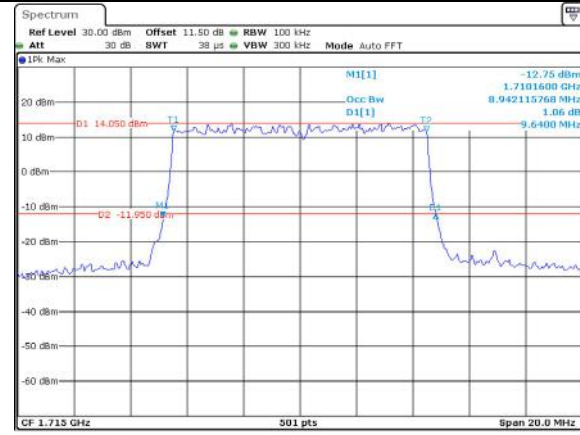

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 10:07:05

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 10:08:23



Middle

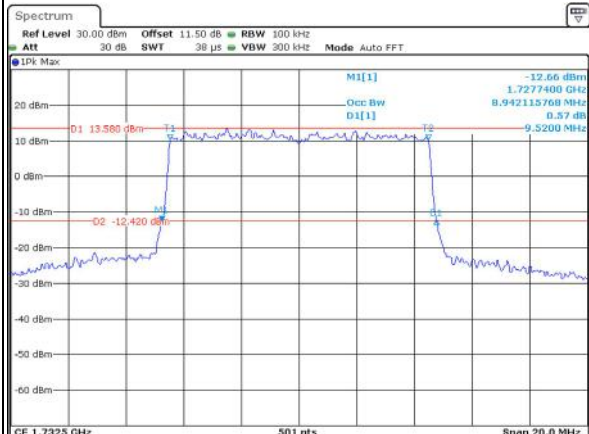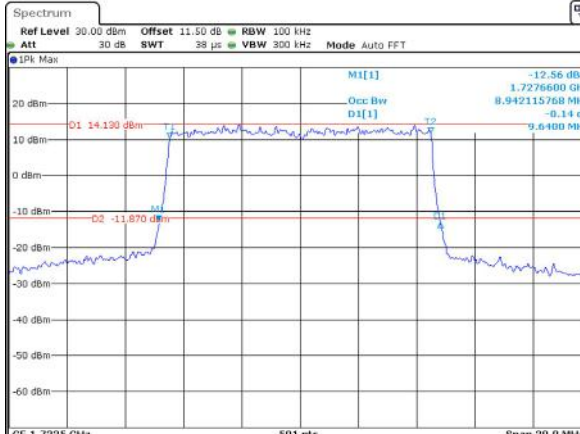

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 10:39:08

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 10:39:36

Highest

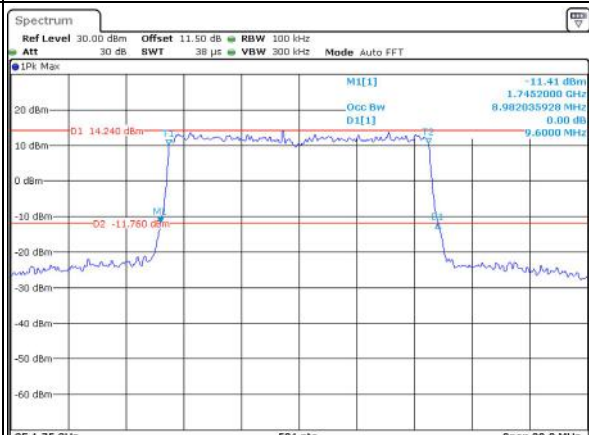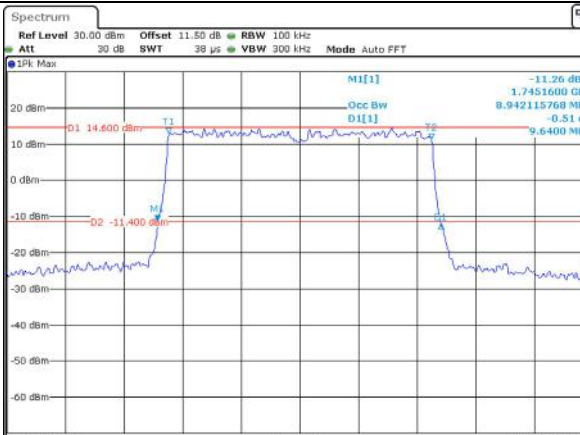

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 10:40:02

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 10:40:37

Occupied Bandwidth

Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:41:30</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:42:06</p>
Middle	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:42:40</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:43:11</p>
Highest	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:43:40</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23.SEP.2023 10:44:08</p>

Occupied Bandwidth



Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest		
Middle		
Highest		

Spurious Emissions at Antenna Terminal

Channel

1.4MHz Bandwidth QPSK



Lowest

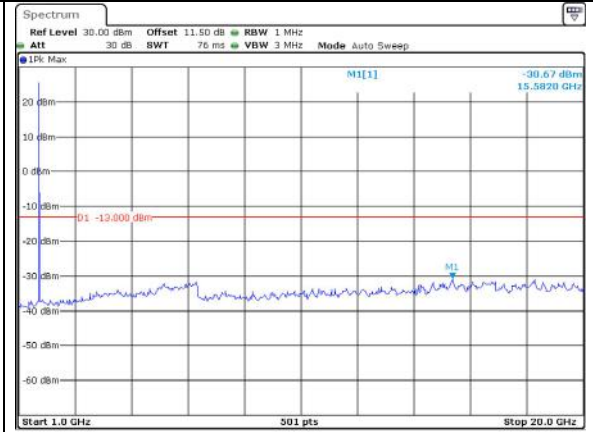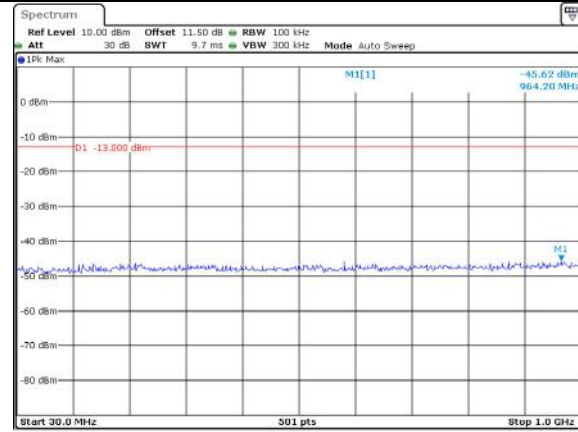

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:36:16

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:36:39



Middle

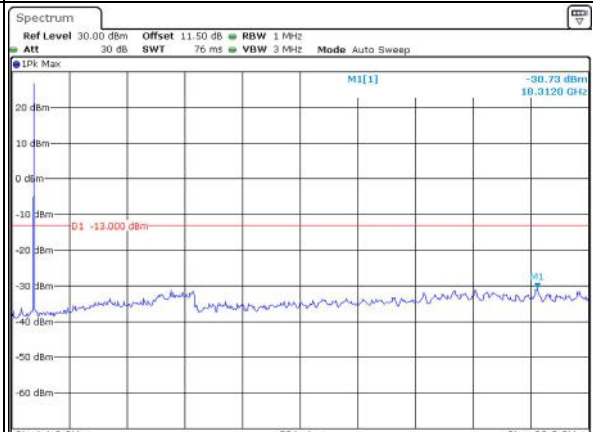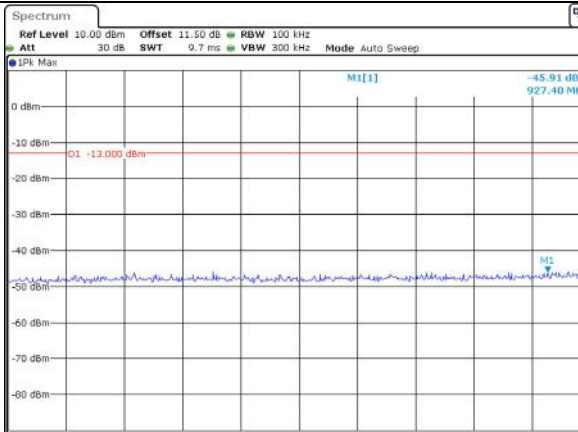

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:37:21

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:37:50

Highest

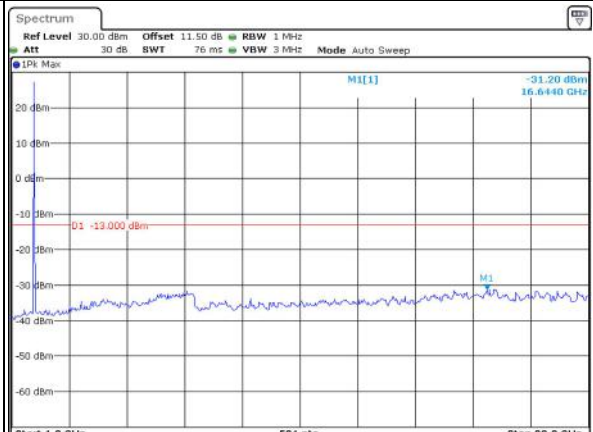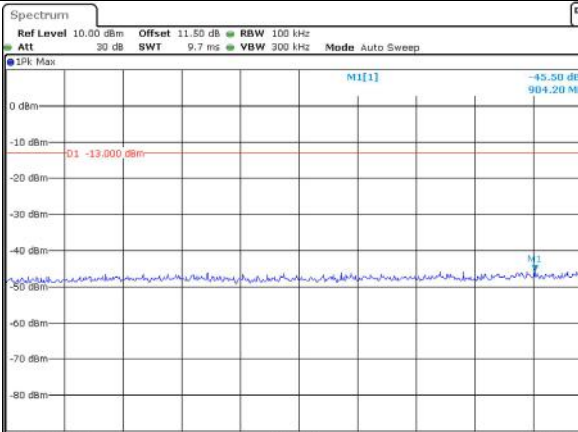

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:38:19



ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:38:46

Spurious Emissions at Antenna Terminal

Channel

3MHz Bandwidth QPSK



Lowest

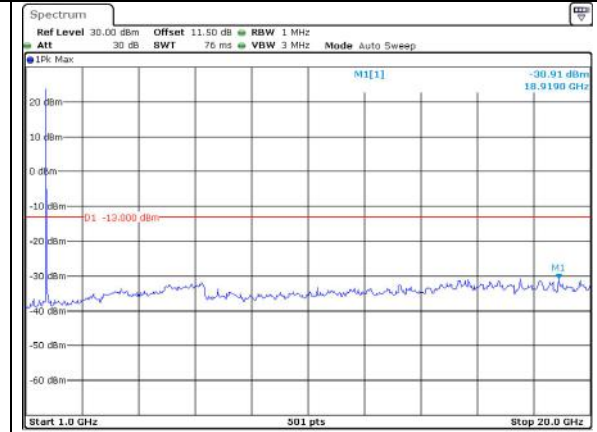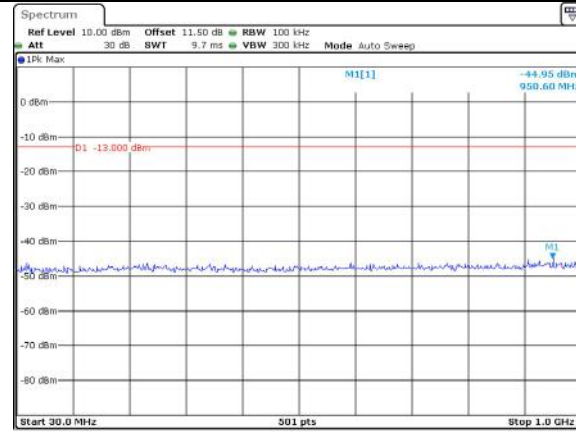

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:39:39

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:40:06



Middle

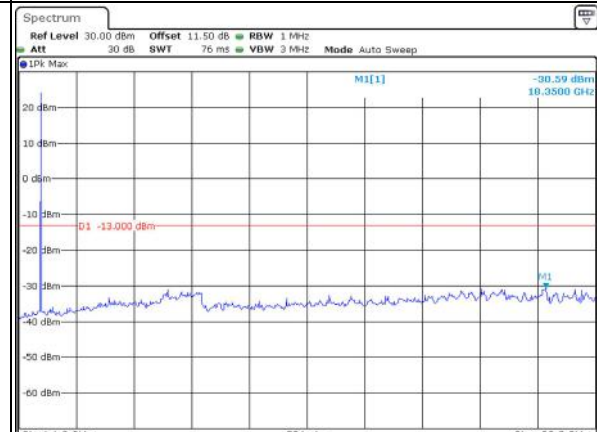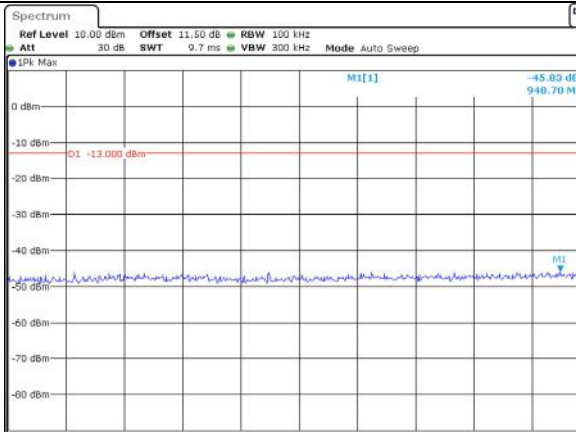

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:40:35

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:41:09

Highest

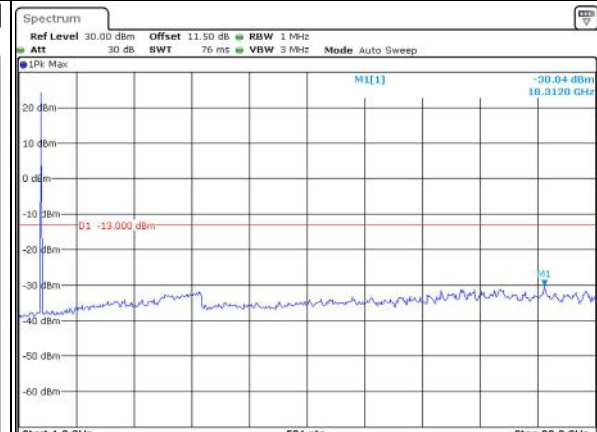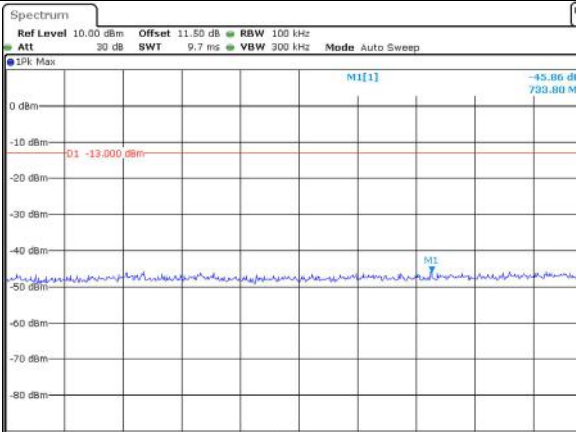

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:41:45



ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:42:12

Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

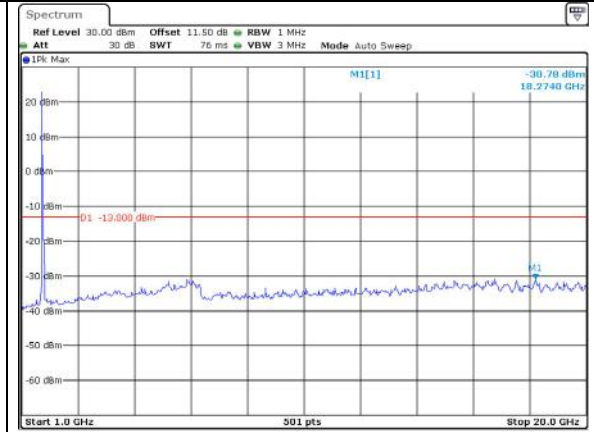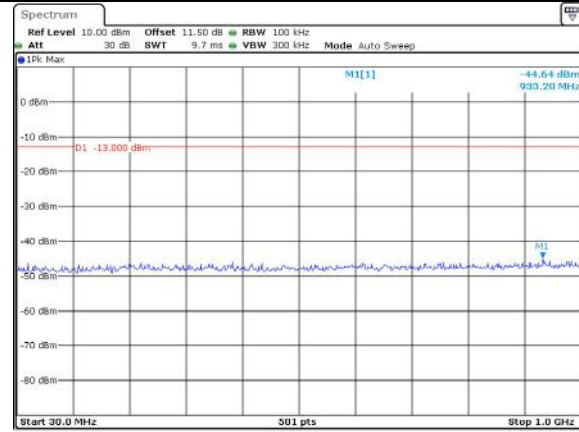

Middle

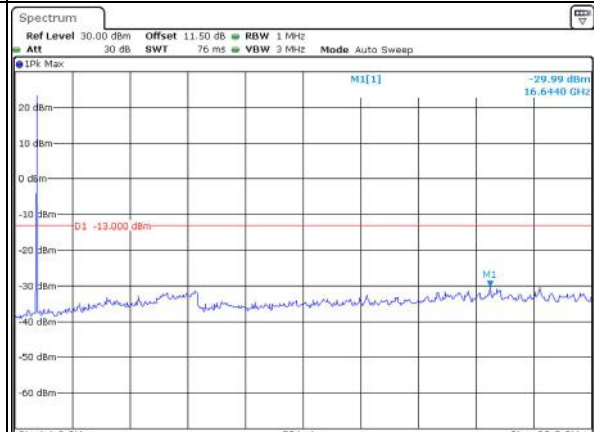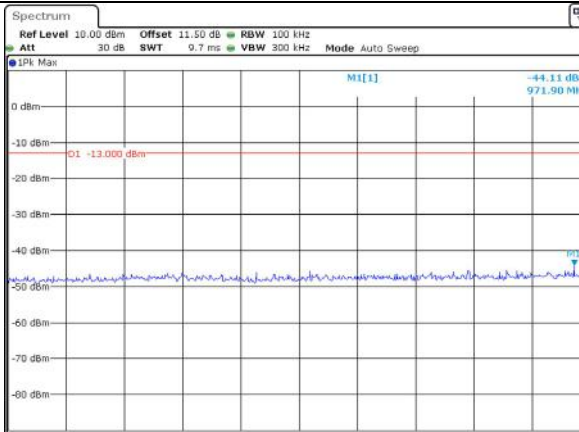

Highest

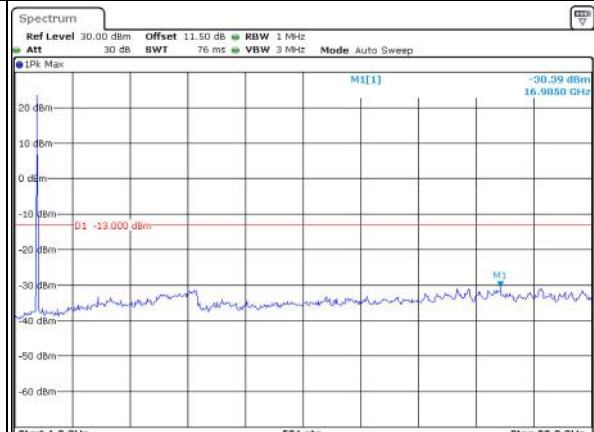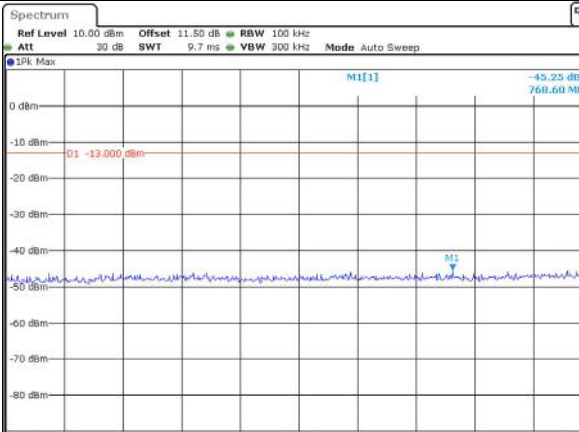

Spurious Emissions at Antenna Terminal



Channel	10MHz Bandwidth QPSK	
Lowest	<p>Ref Level 10.00 dBm Offset 11.50 dB RBW 100 kHz Att 30 dB SWT 9.7 ms VBW 300 kHz Mode Auto Sweep</p> <p>IPk Max M1[1] -45.00 dBm 911.90 MHz</p> <p>D1 -13.000 dBm</p> <p>Start 30.0 MHz 501 pts Stop 1.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:50:20</p>	<p>Ref Level 30.00 dBm Offset 11.50 dB RBW 1 MHz Att 30 dB SWT 76 ms VBW 3 MHz Mode Auto Sweep</p> <p>IPk Max M1[1] -30.60 dBm 18.2740 GHz</p> <p>D1 -13.000 dBm</p> <p>Start 1.0 GHz 501 pts Stop 20.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:50:43</p>
Middle	<p>Ref Level 10.00 dBm Offset 11.50 dB RBW 100 kHz Att 30 dB SWT 9.7 ms VBW 300 kHz Mode Auto Sweep</p> <p>IPk Max M1[1] -45.13 dBm 948.70 MHz</p> <p>D1 -13.000 dBm</p> <p>Start 30.0 MHz 501 pts Stop 1.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:51:18</p>	<p>Ref Level 30.00 dBm Offset 11.50 dB RBW 1 MHz Att 30 dB SWT 76 ms VBW 3 MHz Mode Auto Sweep</p> <p>IPk Max M1[1] -31.30 dBm 16.5680 GHz</p> <p>D1 -13.000 dBm</p> <p>Start 1.0 GHz 501 pts Stop 20.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:51:38</p>
Highest	<p>Ref Level 10.00 dBm Offset 11.50 dB RBW 100 kHz Att 30 dB SWT 9.7 ms VBW 300 kHz Mode Auto Sweep</p> <p>IPk Max M1[1] -45.13 dBm 869.30 MHz</p> <p>D1 -13.000 dBm</p> <p>Start 30.0 MHz 501 pts Stop 1.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:52:02</p>	<p>Ref Level 30.00 dBm Offset 11.50 dB RBW 1 MHz Att 30 dB SWT 76 ms VBW 3 MHz Mode Auto Sweep</p> <p>IPk Max M1[1] -30.08 dBm 15.5020 GHz</p> <p>D1 -13.000 dBm</p> <p>Start 1.0 GHz 501 pts Stop 20.0 GHz</p> <p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 11:52:35</p>

Spurious Emissions at Antenna Terminal

Channel

15MHz Bandwidth QPSK



Lowest

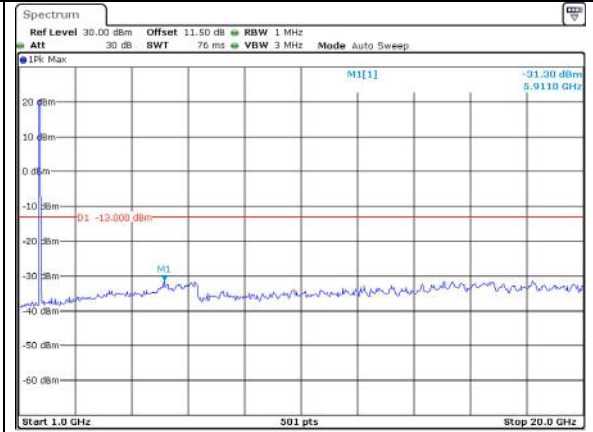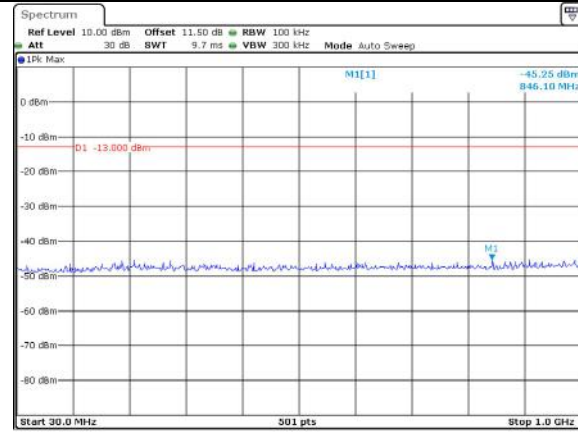

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 11:53:38

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 11:54:04



Middle

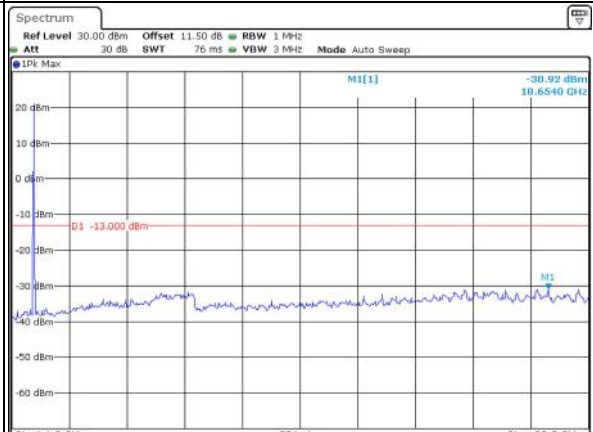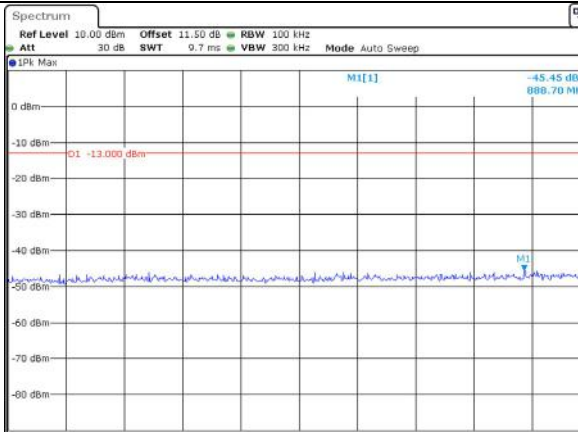

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 11:54:34

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 11:55:01

Highest

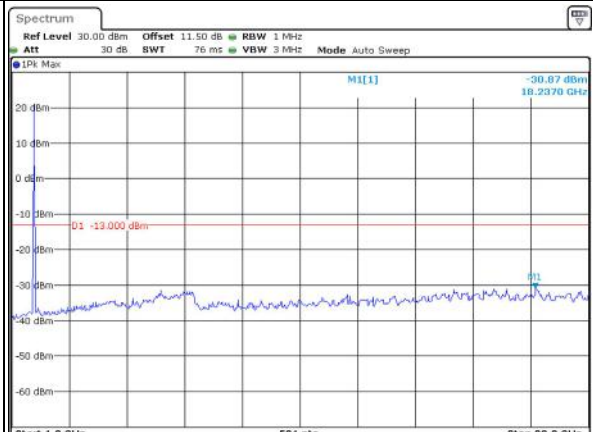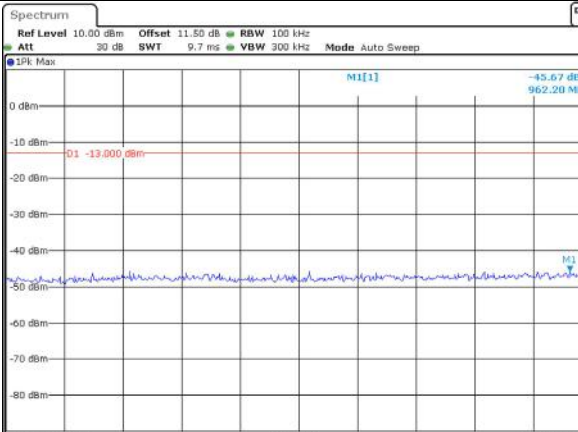

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 11:55:37



ProjectNo.:CR230952608 Tester:Len Huang
Date: 23_SEP.2023 11:56:04

Spurious Emissions at Antenna Terminal

Channel

20MHz Bandwidth QPSK



Lowest

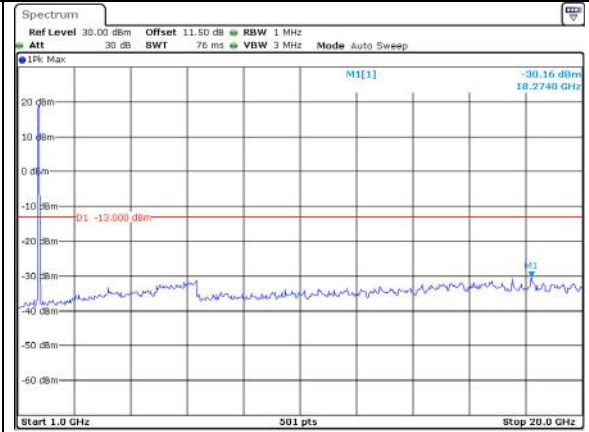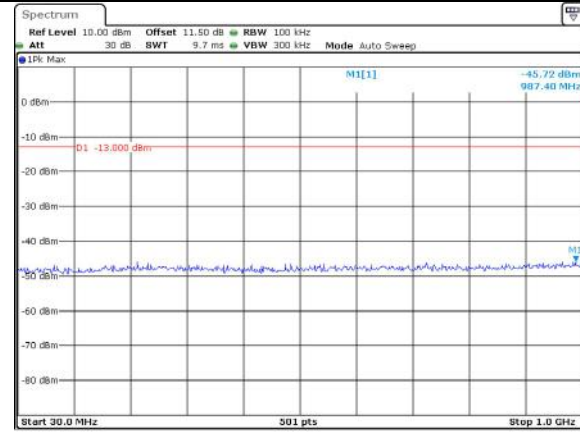

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:57:08

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:57:29



Middle

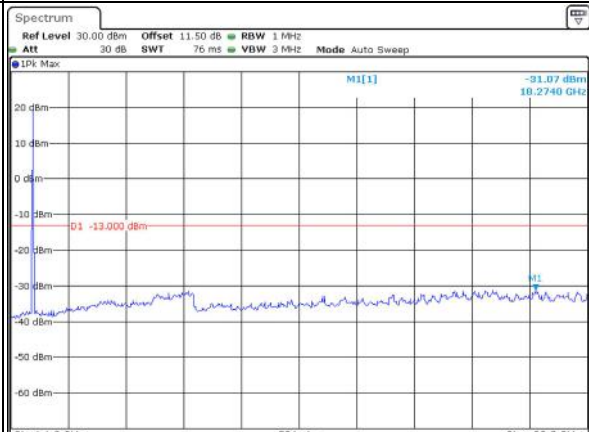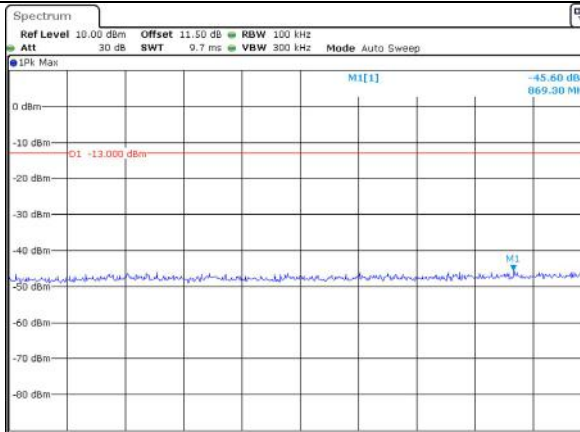

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:58:10

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:58:36

Highest

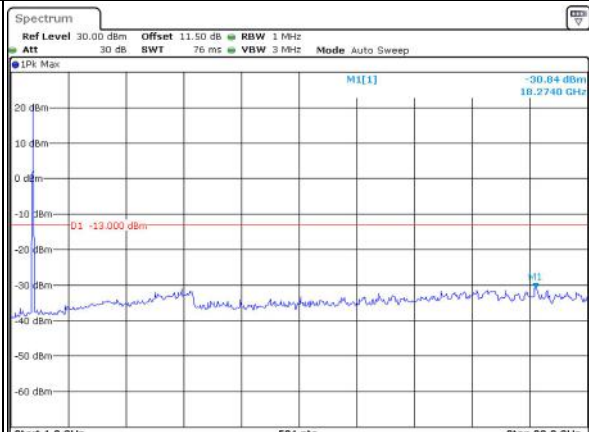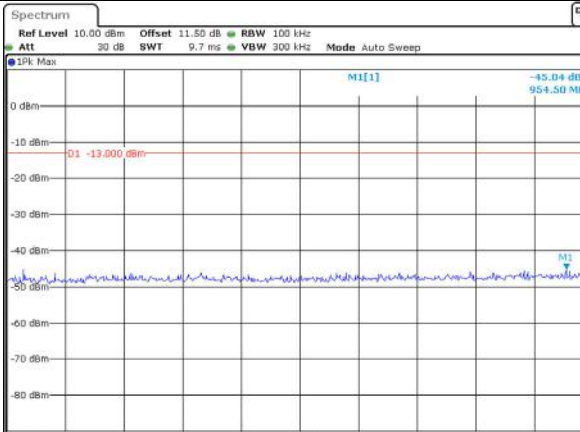

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:59:10

ProjectNo.:CR230952608 Tester:Len Huang
Date: 23.SEP.2023 11:59:36

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 1.4MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:25:56</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:26:11</p>
QPSK 3MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:26:53</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:27:06</p>
QPSK 5MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:27:49</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:28:05</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 10MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:29:47</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:29:04</p>
QPSK 15MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:29:56</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:30:15</p>
QPSK 20MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:31:16</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23_SEP.2023 13:31:35</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 1.4MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:26:04</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:26:19</p>
16QAM 3MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:27:00</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:27:15</p>
16QAM 5MHz	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:27:57</p>	<p>ProjectNo.:CR230952608 Tester:Len Huang Date: 23. SEP. 2023 13:28:13</p>

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 10MHz		
16QAM 15MHz		
16QAM 20MHz		

4.8 Antenna Port Test Data and Results for LTE Band 5

Serial Number:	2B0S-1	Test Date:	2023/9/23-2023/9/26
Test Site:	RF	Test Mode:	Transmitting
Tester:	Len Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5-25.8	Relative Humidity: (%)	46-57	ATM Pressure: (kPa)	101
----------------------	-----------	---------------------------	-------	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	102259	2023/4/18	2024/4/17
R&S	Wideband Radio	CMW500	143458	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	22.71	22.78	22.75	16.42	38.45
	RB1#3	22.96	22.94	22.94		
	RB1#5	22.78	22.76	22.81		
	RB3#0	22.85	22.86	22.88		
	RB3#3	22.92	22.87	22.84		
	RB6#0	21.88	21.88	21.87		
1.4MHz 16QAM	RB1#0	21.73	21.8	21.86	15.55	38.45
	RB1#3	22.08	21.97	22.09		
	RB1#5	21.85	21.75	21.88		
	RB3#0	21.9	22.03	21.83		
	RB3#3	21.87	22.04	21.85		
	RB6#0	20.8	20.93	20.83		
3MHz QPSK	RB1#0	23.21	22.84	22.82	16.67	38.45
	RB1#8	23	22.8	22.81		
	RB1#14	22.78	22.79	22.81		
	RB6#0	21.8	21.81	21.82		
	RB6#9	21.79	21.83	21.76		
	RB15#0	21.81	21.84	21.82		
3MHz 16QAM	RB1#0	21.81	22.41	21.94	15.87	38.45
	RB1#8	21.88	22.37	21.92		
	RB1#14	21.81	22.37	21.92		
	RB6#0	20.75	20.86	20.83		
	RB6#9	20.74	20.84	20.85		
	RB15#0	20.85	20.92	20.79		
5MHz QPSK	RB1#0	23.17	22.8	22.75	16.74	38.45
	RB1#13	23.28	22.89	22.83		
	RB1#24	23.05	22.77	22.69		
	RB15#0	21.98	21.89	21.89		
	RB15#10	21.92	21.83	21.79		
	RB25#0	21.95	21.87	21.81		
5MHz 16QAM	RB1#0	21.86	21.64	21.98	15.57	38.45
	RB1#13	21.92	21.76	22.11		
	RB1#24	21.77	21.73	21.97		
	RB15#0	20.99	20.91	20.91		
	RB15#10	20.86	20.91	20.71		
	RB25#0	20.86	20.94	20.8		
10MHz QPSK	RB1#0	23.34	22.95	23.01	16.95	38.45

	RB1#25	23.49	23.17	22.98		
	RB1#49	23.29	22.89	22.8		
	RB25#0	22.39	22.05	22.04		
	RB25#25	22.37	22.19	21.76		
	RB50#0	22.37	22.07	21.77		
10MHz 16QAM	RB1#0	22.24	22.48	22.04	16.16	38.45
	RB1#25	22.41	22.7	22.09		
	RB1#49	22.13	22.41	21.95		
	RB25#0	21.51	21.12	21.07		
	RB25#25	21.4	21.12	20.84		
	RB50#0	21.42	20.99	20.91		

Note: ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd)
Gr(dBd)=Gr(dBi)-2.15

Result:**Pass****Peak-to-average Ratio(PAR)**

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	5.10	5.16	5.22	13
	RB50#0	5.19	5.22	5.07	13
10MHz 16QAM	RB1#0	6.12	5.74	6.06	13
	RB50#0	6.12	6.20	5.97	13
				Result:	Pass

FCC §2.1049, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.102	1.096	1.102	1.284	1.296	1.302
1.4MHz 16QAM	1.090	1.096	1.090	1.290	1.31	1.28
3MHz QPSK	2.683	2.683	2.683	2.868	2.892	2.880
3MHz 16QAM	2.683	2.683	2.683	2.880	2.868	2.892
5MHz QPSK	4.511	4.491	4.511	4.980	4.940	4.960
5MHz 16QAM	4.511	4.511	4.491	4.960	4.980	4.940
10MHz QPSK	8.942	8.942	8.942	9.560	9.640	9.680
10MHz 16QAM	8.942	8.942	8.942	9.640	9.560	9.560

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, §22.917(a): Out of band emission, Band Edge**Result:** Pass, Please refer to the test plots of Out of band emission, Band Edge.**FCC §2.1055, §22.355: Frequency Stability**

Test Modulation:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	7.4	3.75	0.004	2.5
	-20	7.4	-10.76	-0.013	2.5
	-10	7.4	6.42	0.008	2.5
	0	7.4	-7.37	-0.009	2.5
	10	7.4	-10.13	-0.012	2.5
	20	7.4	6.37	0.008	2.5
	30	7.4	11.45	0.014	2.5
	40	7.4	-9.23	-0.011	2.5
Frequency Stability vs. Voltage	20	6.8	4.21	0.005	2.5
	20	8.4	9.01	0.011	2.5
				Result:	Pass

Test Modulation:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	7.4	-15.9	-0.019	2.5
	-20	7.4	7.42	0.009	2.5
	-10	7.4	6.12	0.007	2.5
	0	7.4	9.09	0.011	2.5
	10	7.4	-6.39	-0.008	2.5
	20	7.4	7.41	0.009	2.5
	30	7.4	-5.75	-0.007	2.5
	40	7.4	8.5	0.010	2.5
Frequency Stability vs. Voltage	20	6.8	10.72	0.013	2.5
	20	8.4	6.5	0.008	2.5
				Result:	Pass

Test Plots(Note: The 10.5 dB is the Insertion loss of the RF cable and Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth

Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest		
Middle		
Highest		