


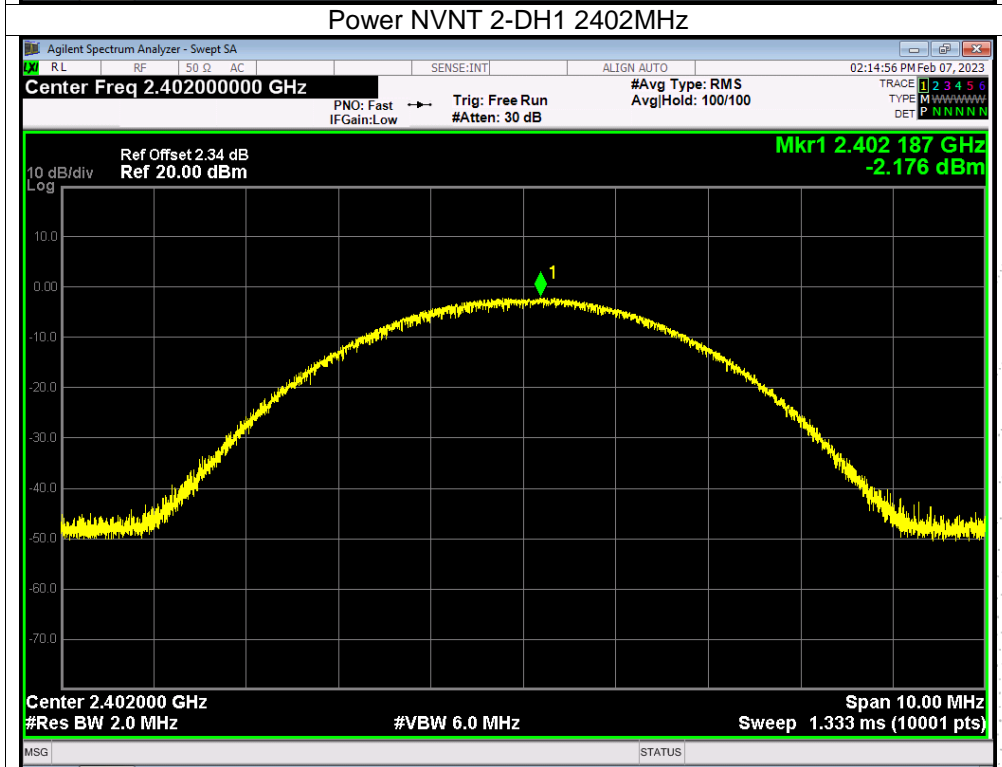
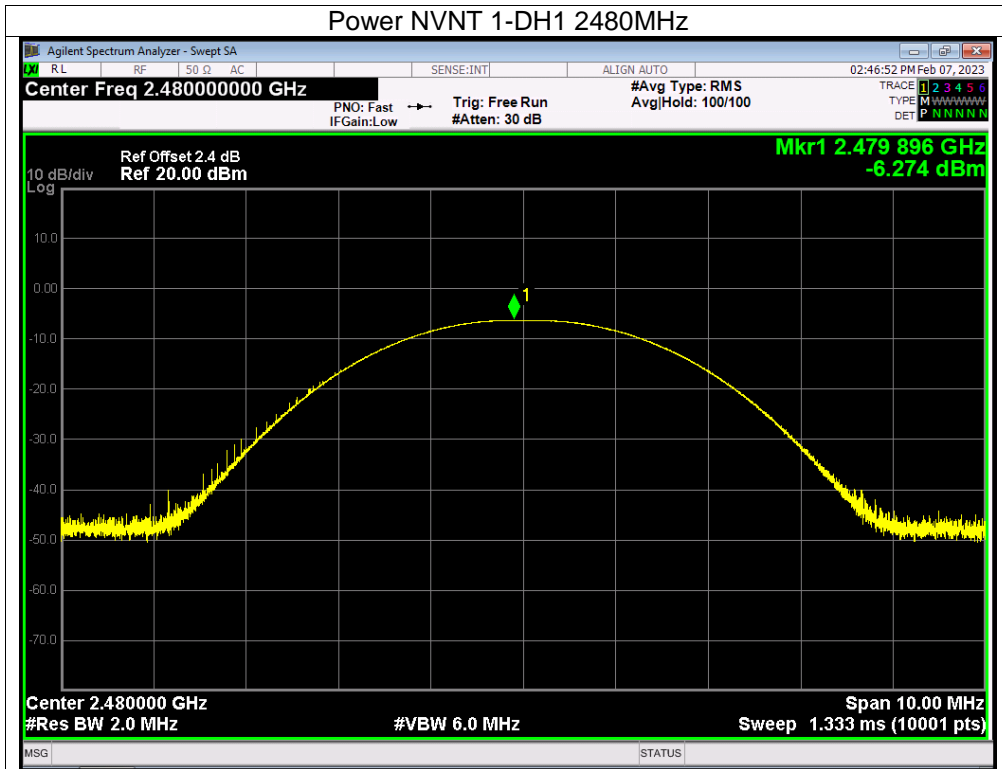
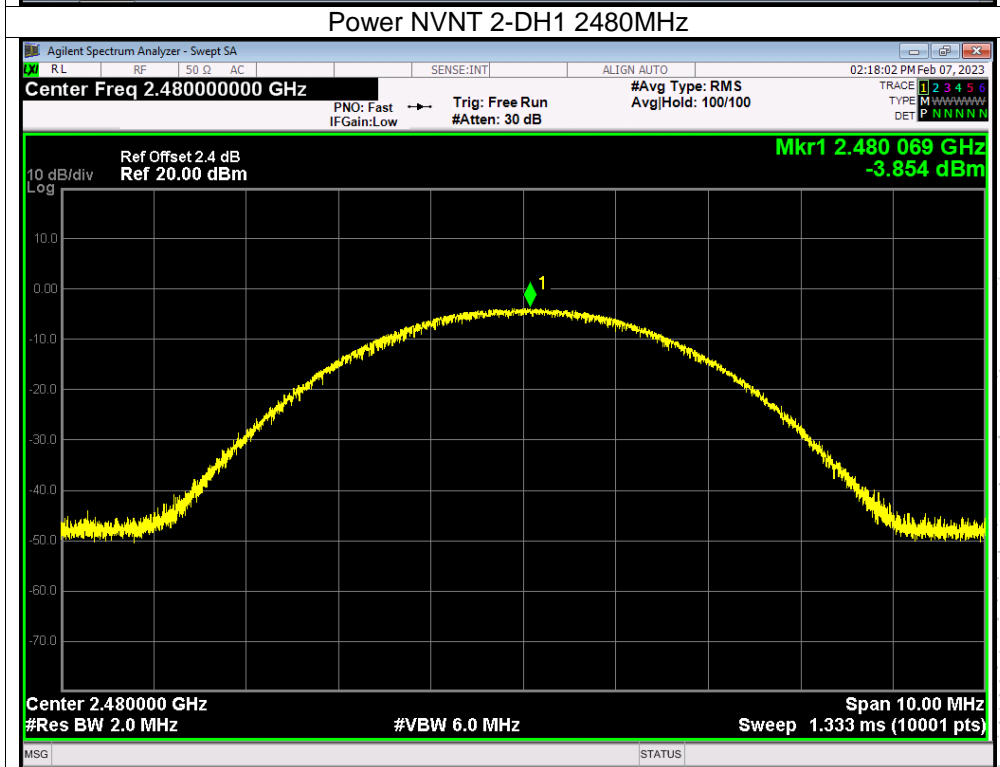




SHENZHEN

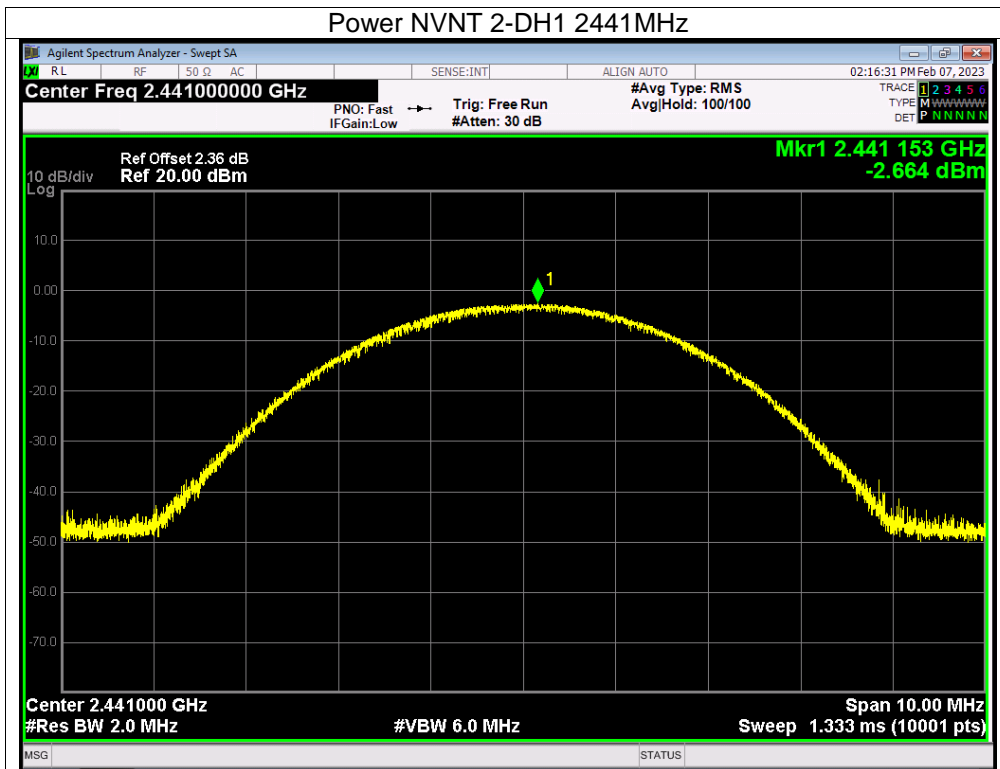

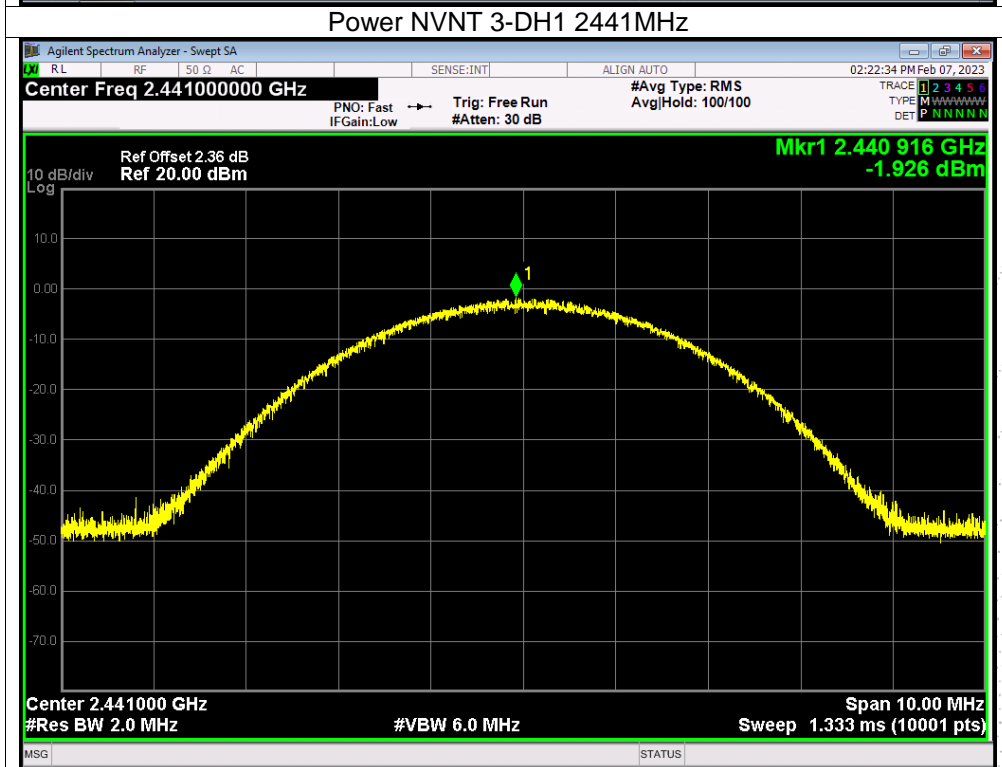


BCTC
 BCTC
 PPR
 检测

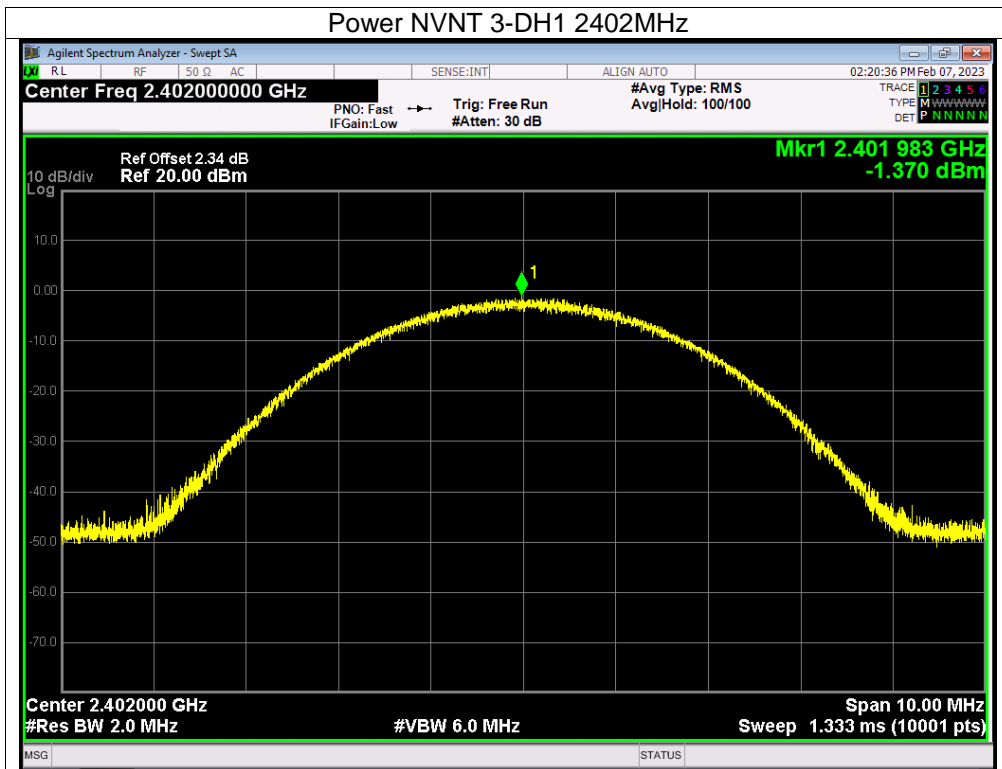

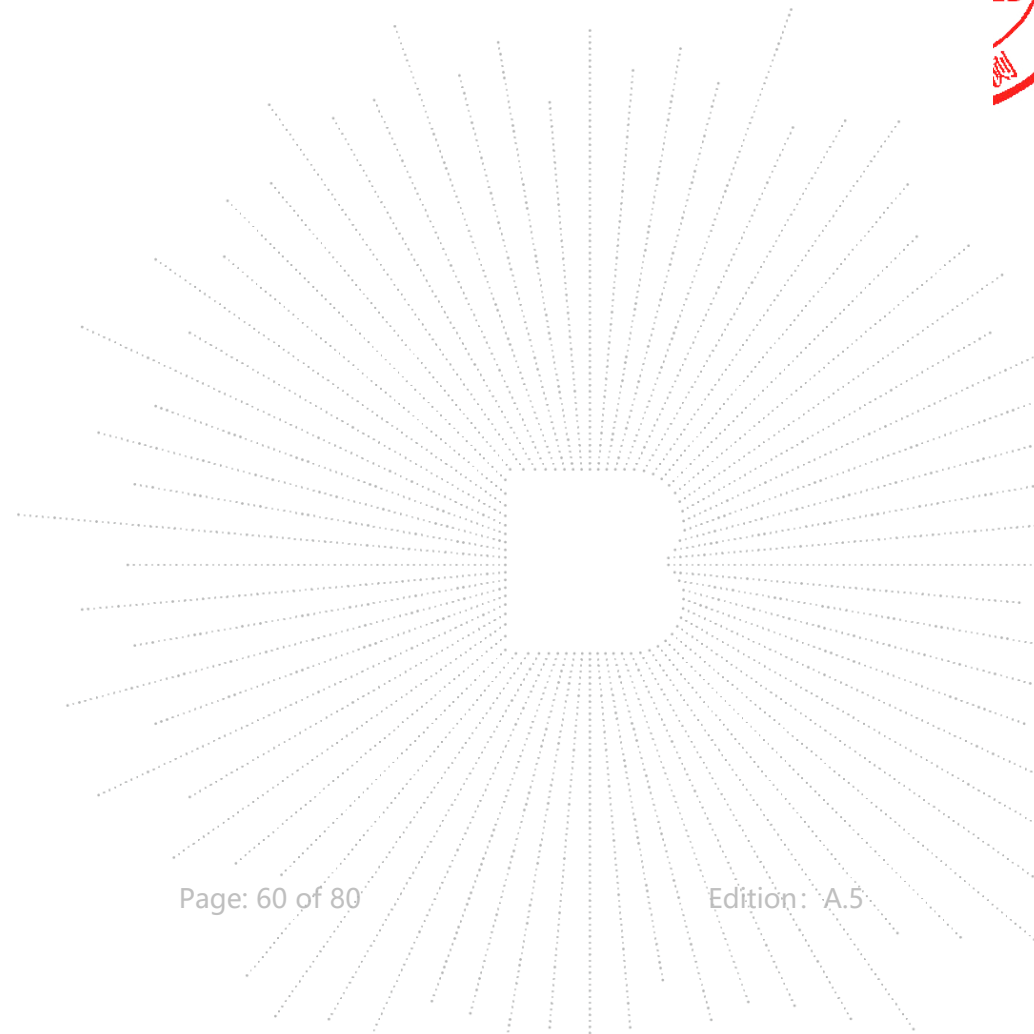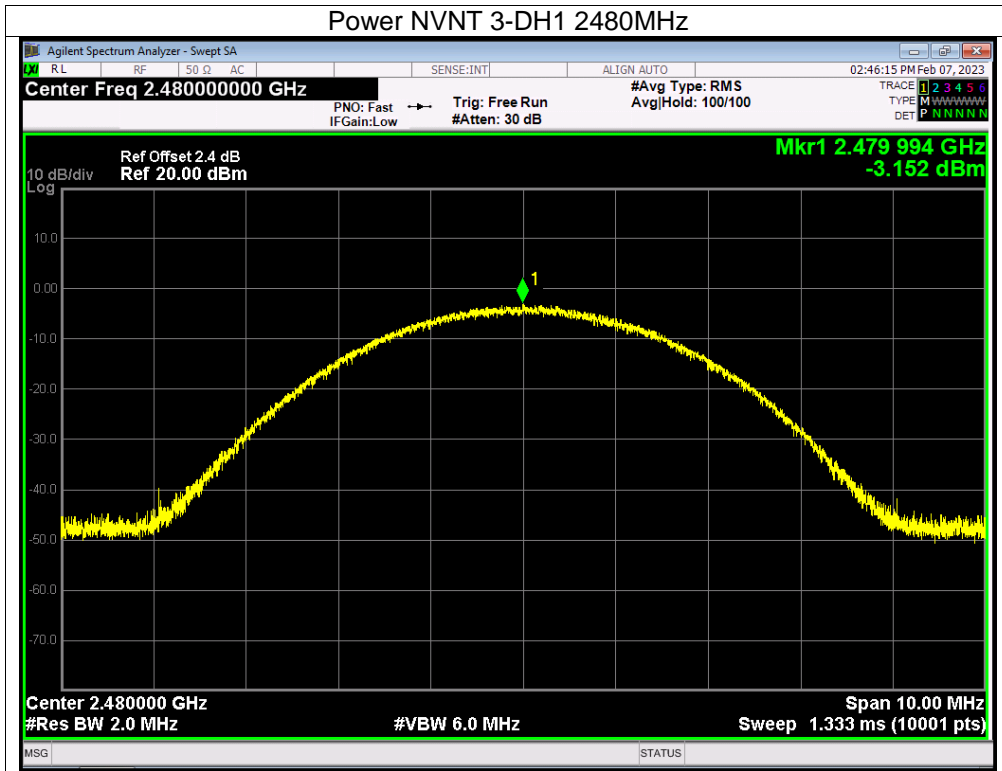

12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup

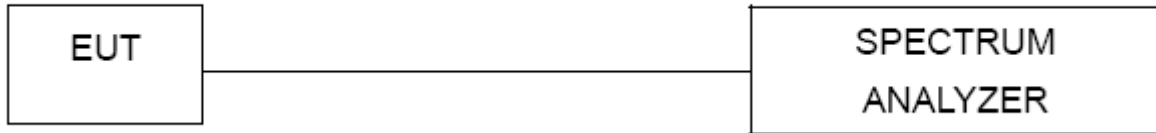

12.2 Limit



Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.



12.3 Test procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



12.4 Test Result



Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	2401.870	2402.872	1.002	0.879	Pass
NVNT	1-DH1	2440.872	2441.872	1.000	0.877	Pass
NVNT	1-DH1	2478.872	2479.872	1.000	0.871	Pass
NVNT	2-DH1	2401.870	2402.872	1.002	0.857	Pass
NVNT	2-DH1	2440.872	2441.870	0.998	0.841	Pass
NVNT	2-DH1	2478.872	2479.870	0.998	0.870	Pass
NVNT	3-DH1	2402.028	2403.028	1.000	0.835	Pass
NVNT	3-DH1	2441.030	2442.030	1.000	0.831	Pass
NVNT	3-DH1	2479.030	2480.030	1.000	0.828	Pass

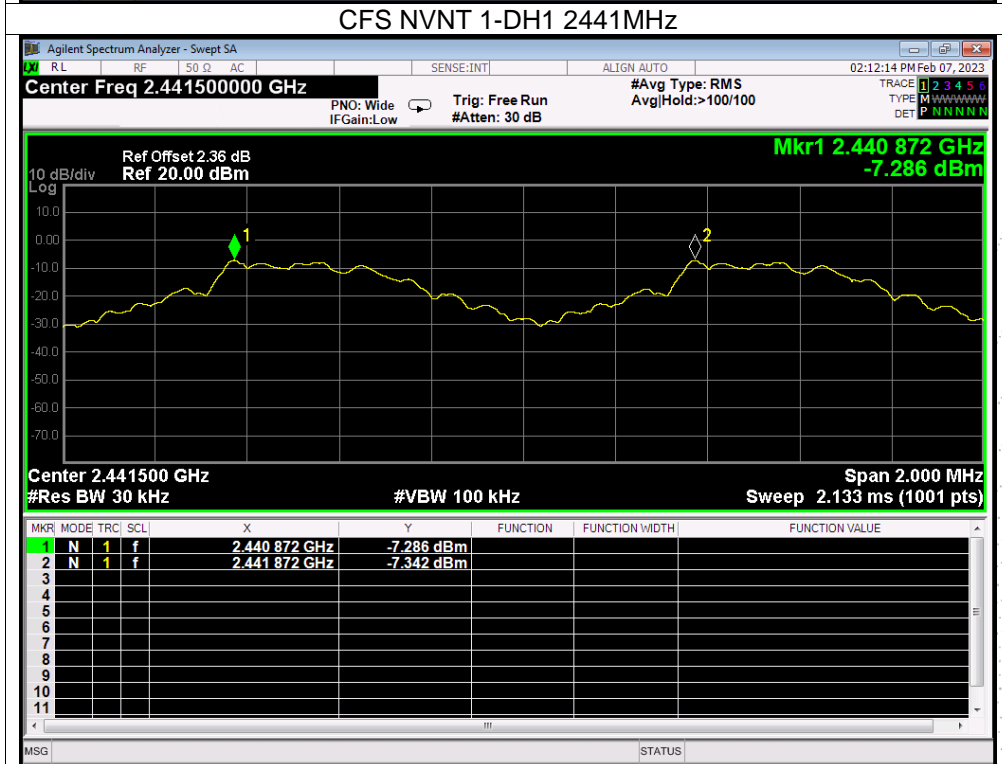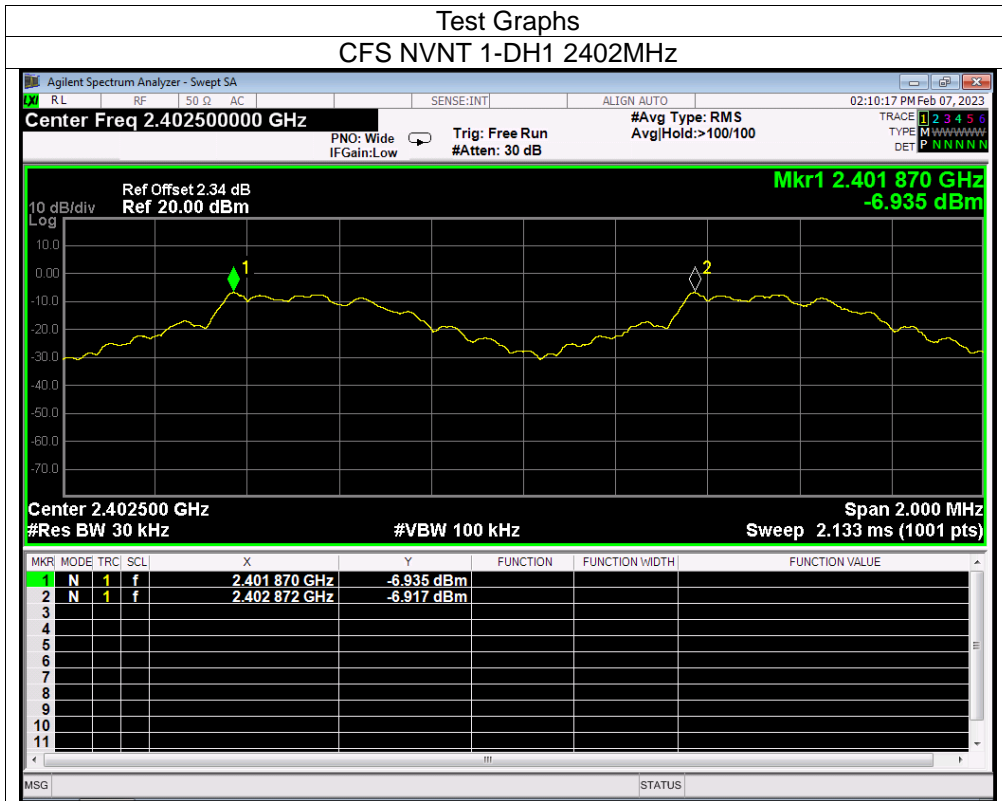

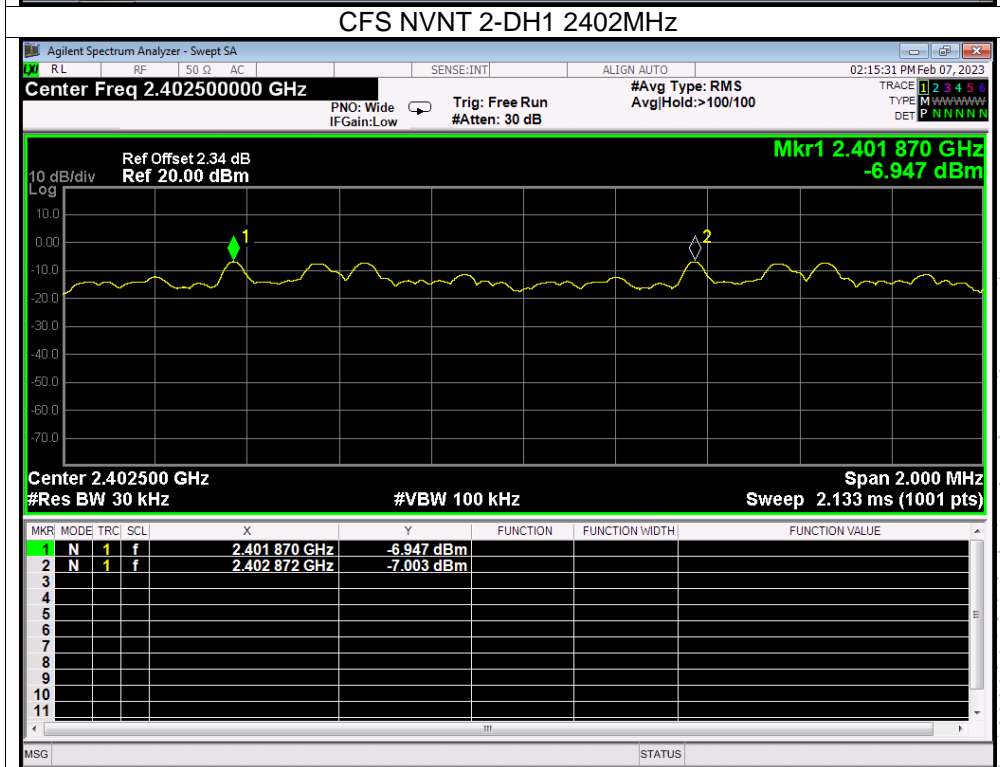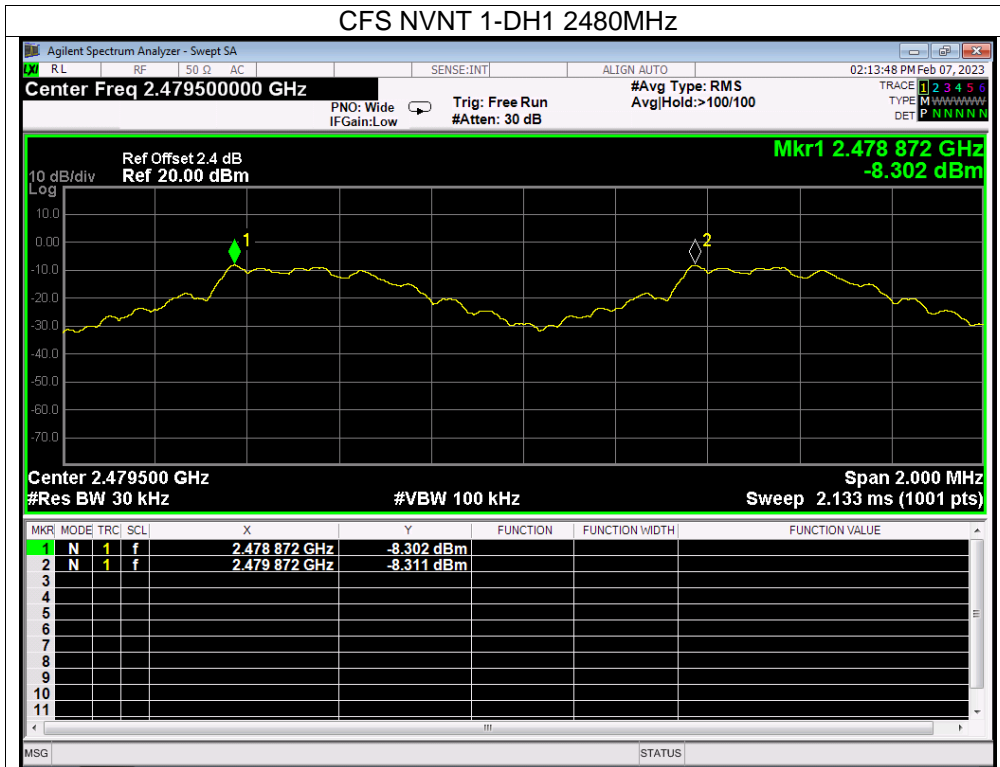

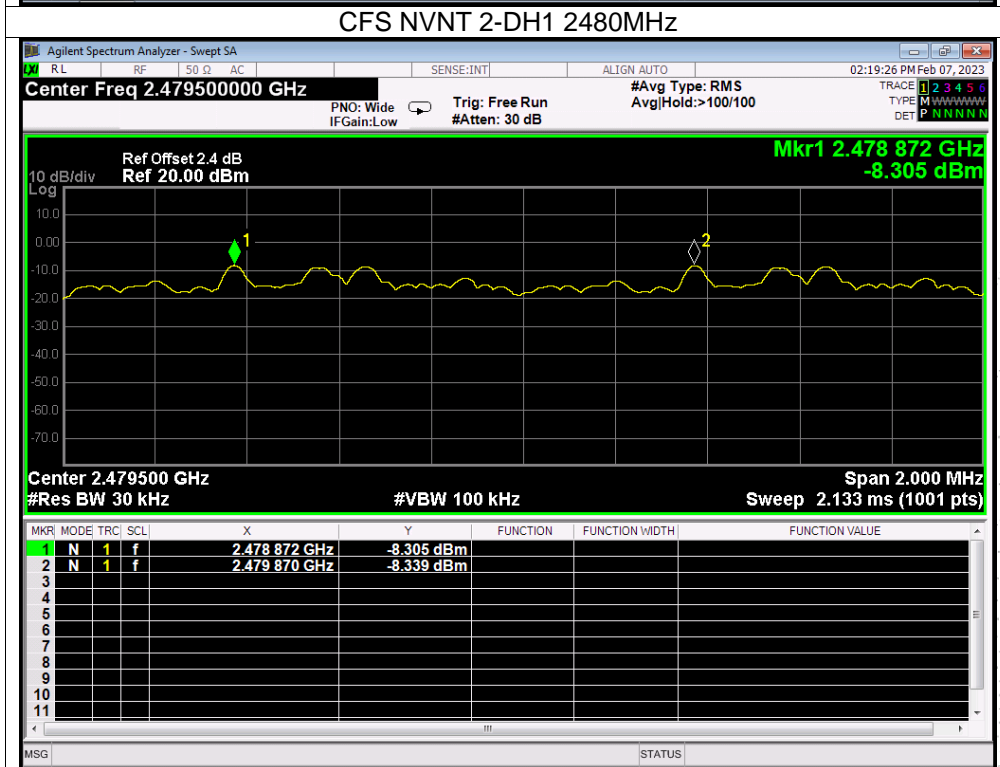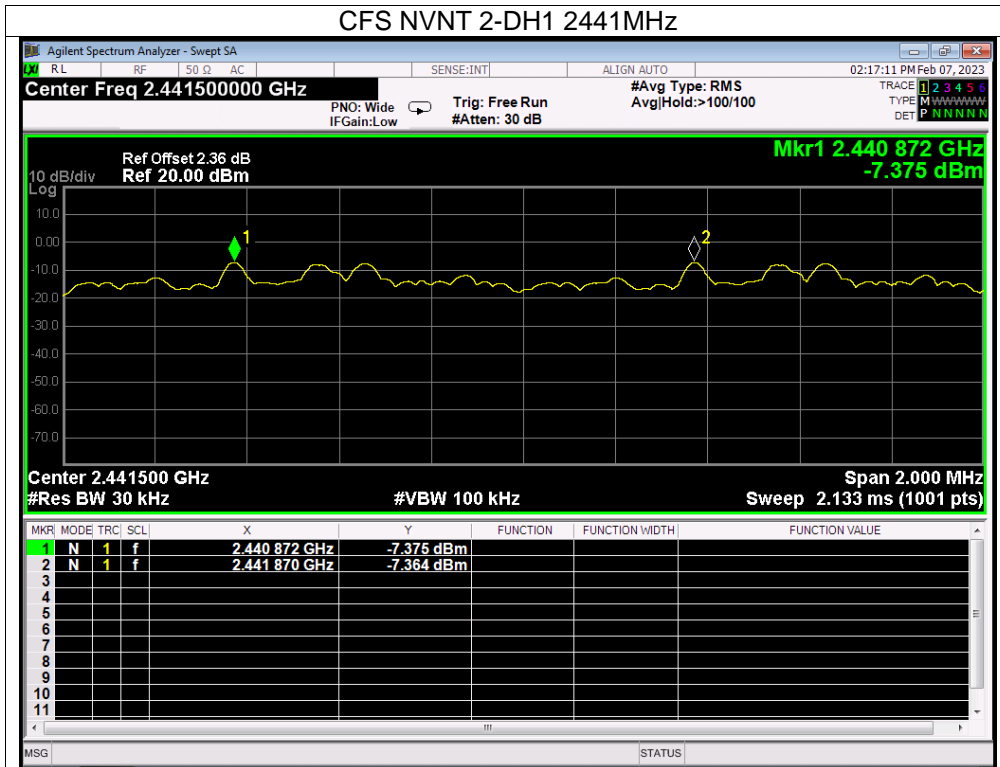


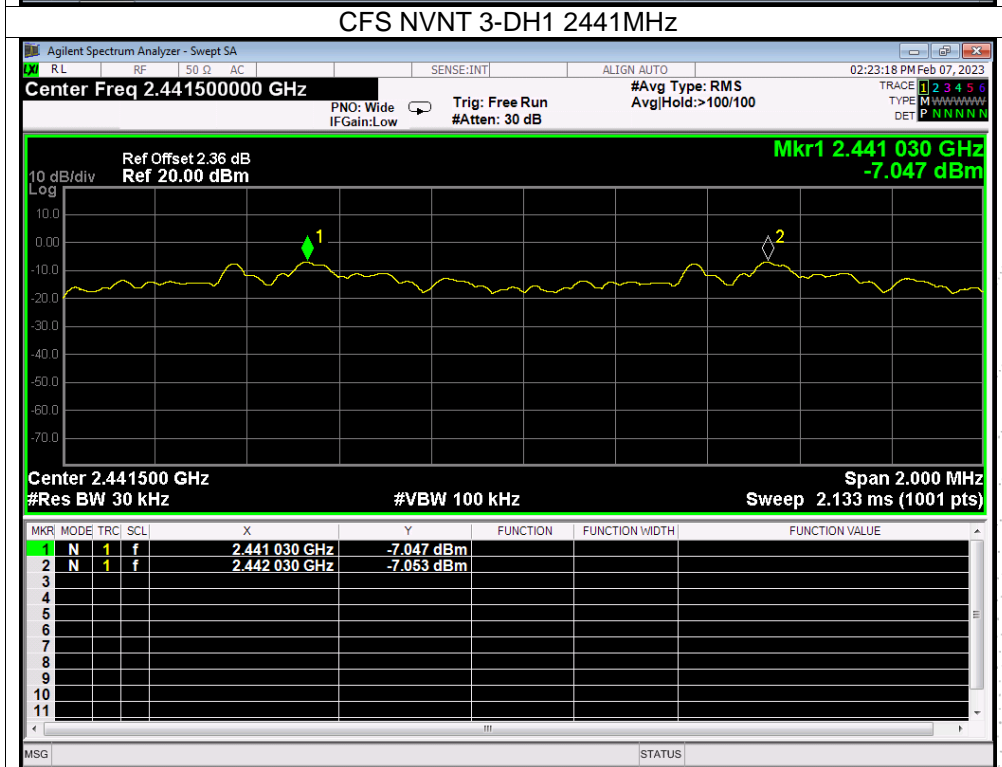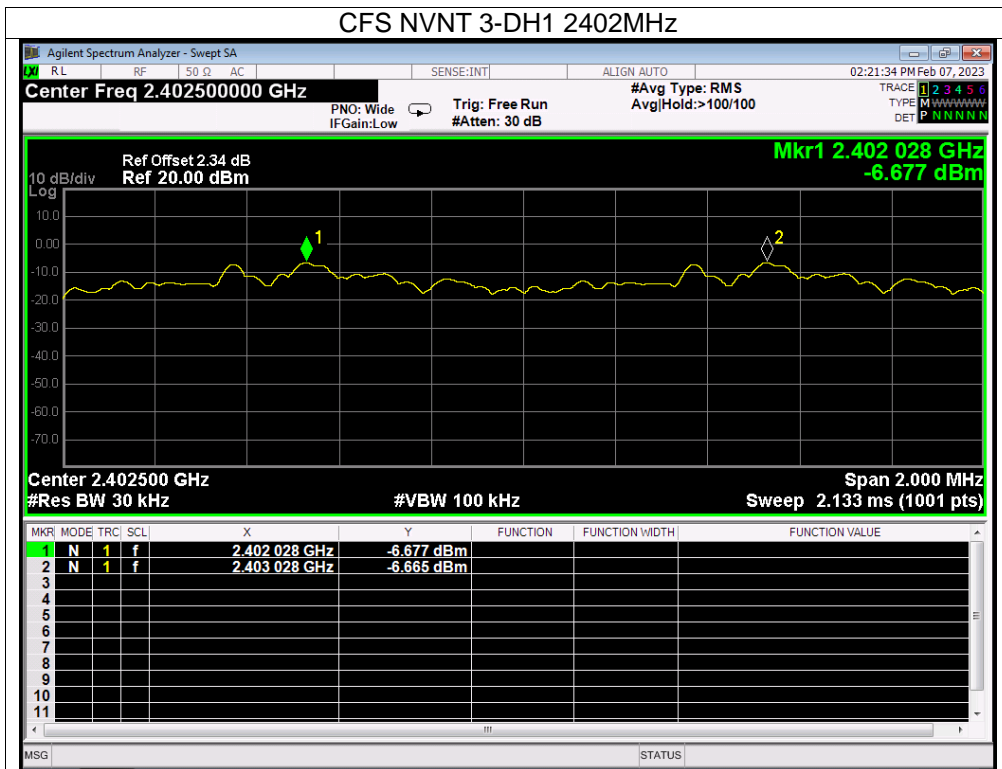

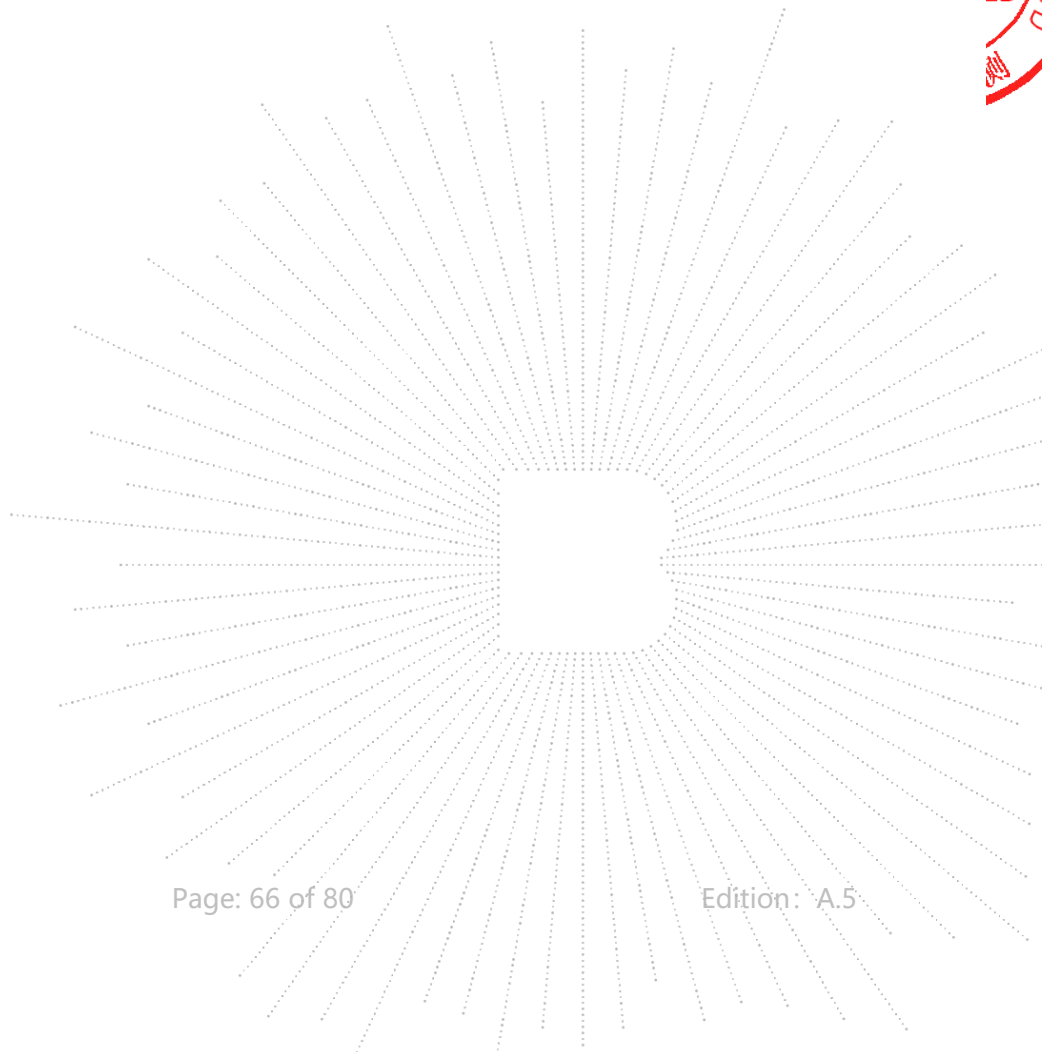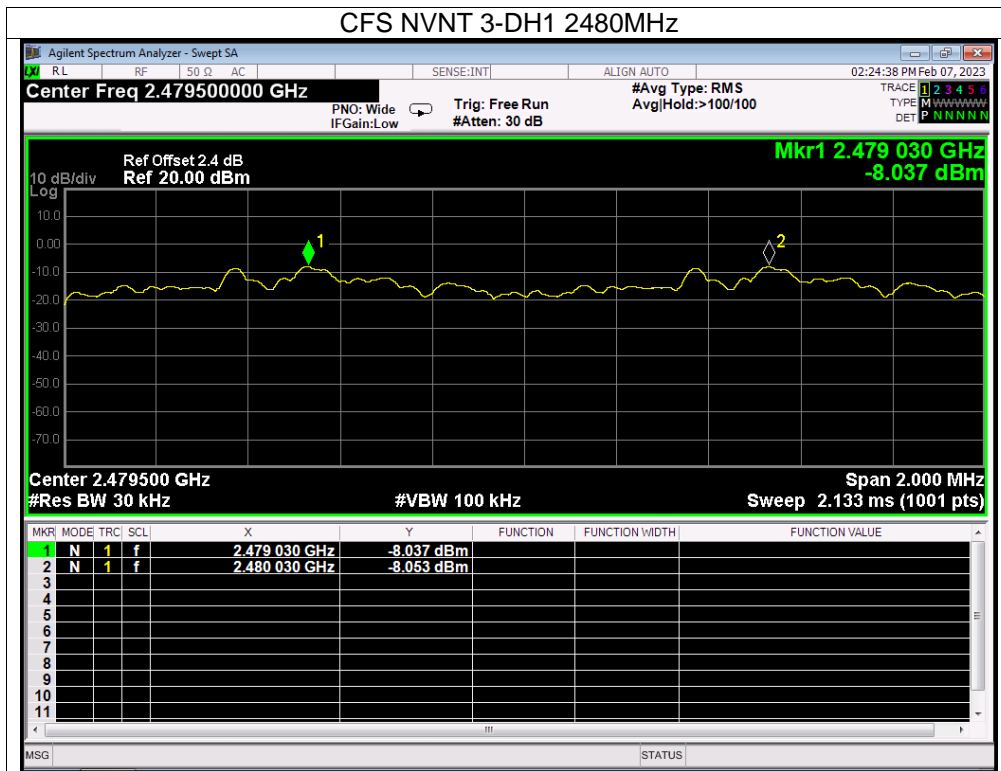

13. Number Of Hopping Frequency

13.1 Block Diagram Of Test Setup

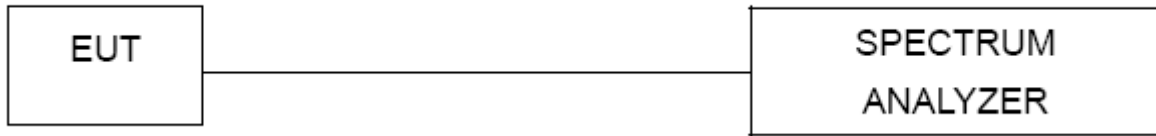

13.2 Limit


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.



13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

13.4 Test Result

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

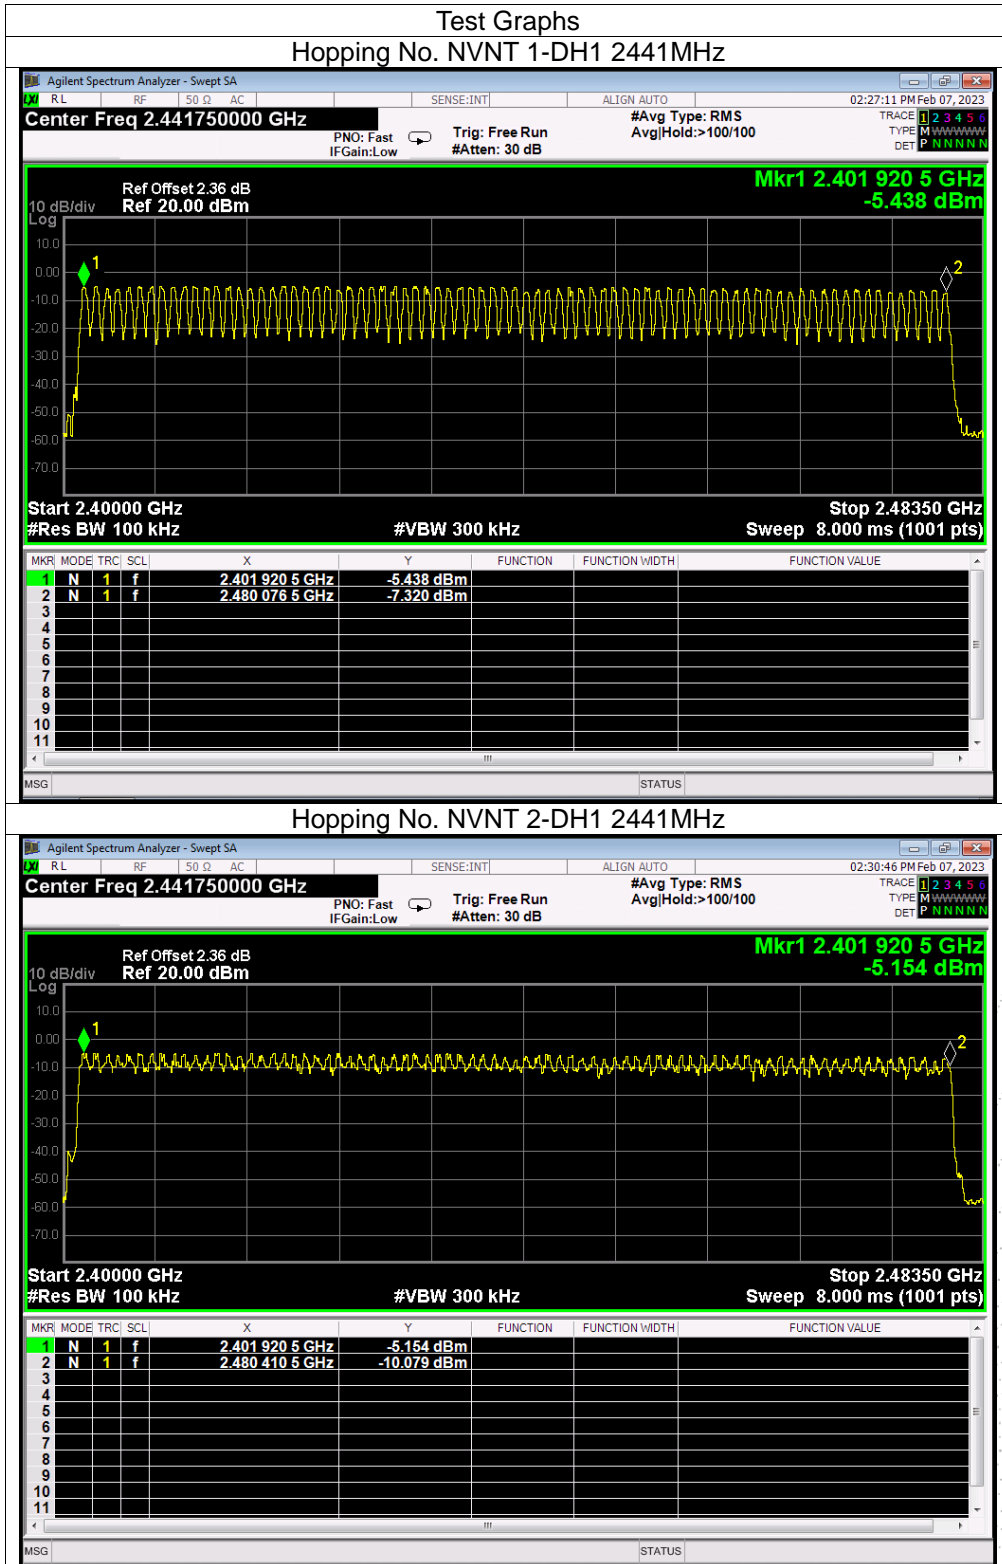

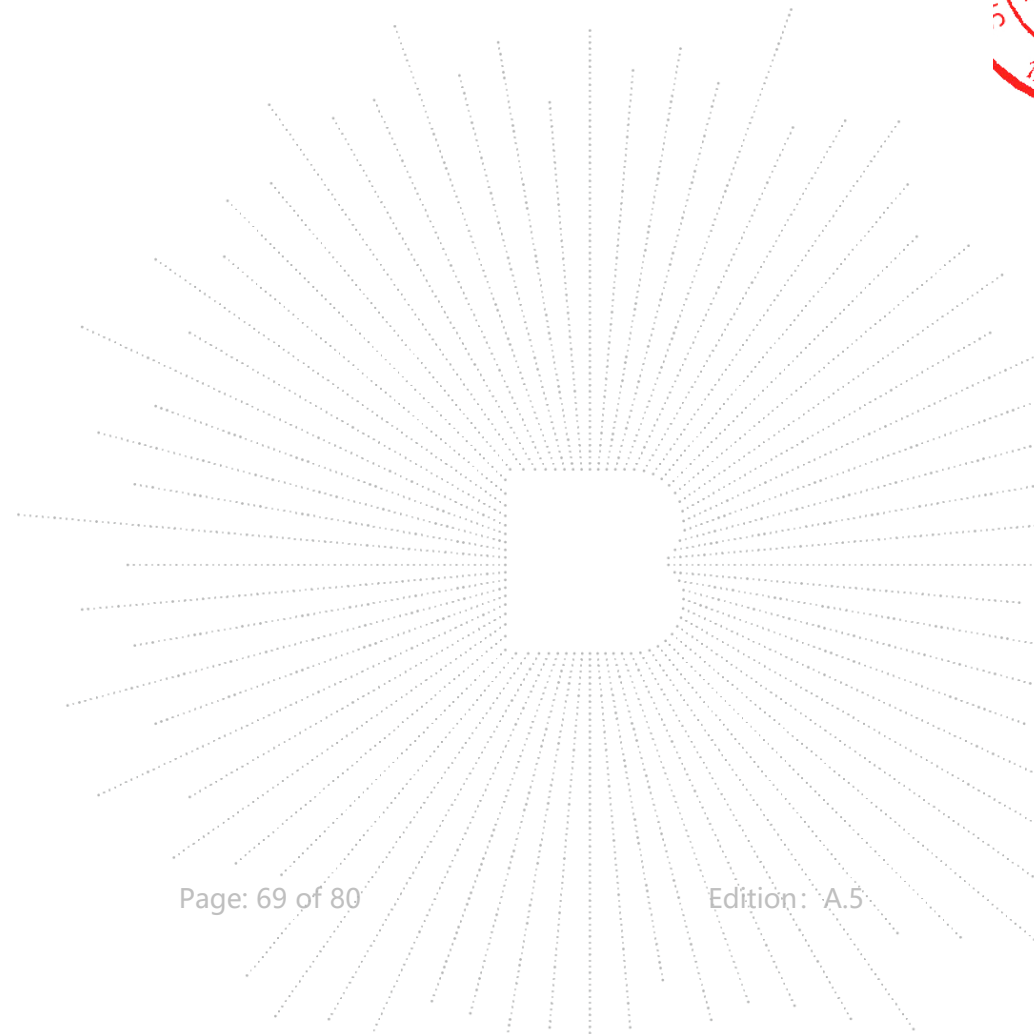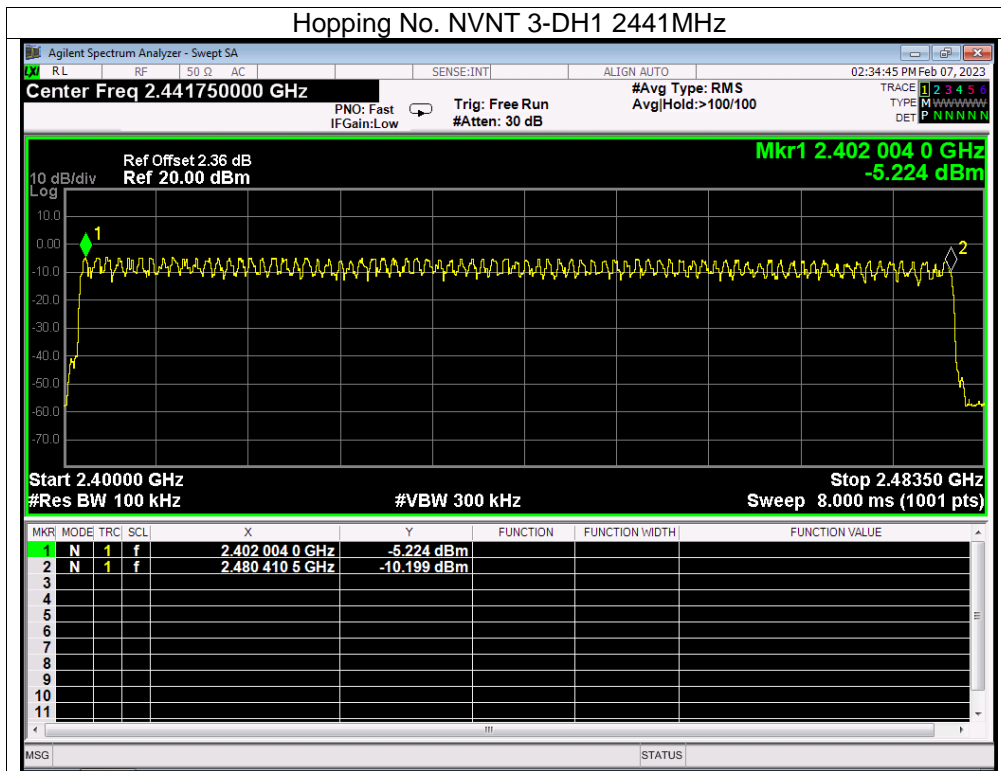

14. Dwell Time

14.1 Block Diagram Of Test Setup



14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

14.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.4 Test Result

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel
(5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel
(3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel
(1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$



DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$



DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.



Modulation	Channel Data	Packet	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	Middle	1DH1	0.388	0.124	0.4
		1DH3	1.642	0.263	0.4
		1DH5	2.892	0.308	0.4
$\pi/4$ DQPSK	Middle	2DH1	0.398	0.127	0.4
		2DH3	1.644	0.263	0.4
		2DH5	2.894	0.309	0.4
8DPSK	Middle	3DH1	0.396	0.127	0.4
		3DH3	1.646	0.263	0.4
		3DH5	2.900	0.309	0.4


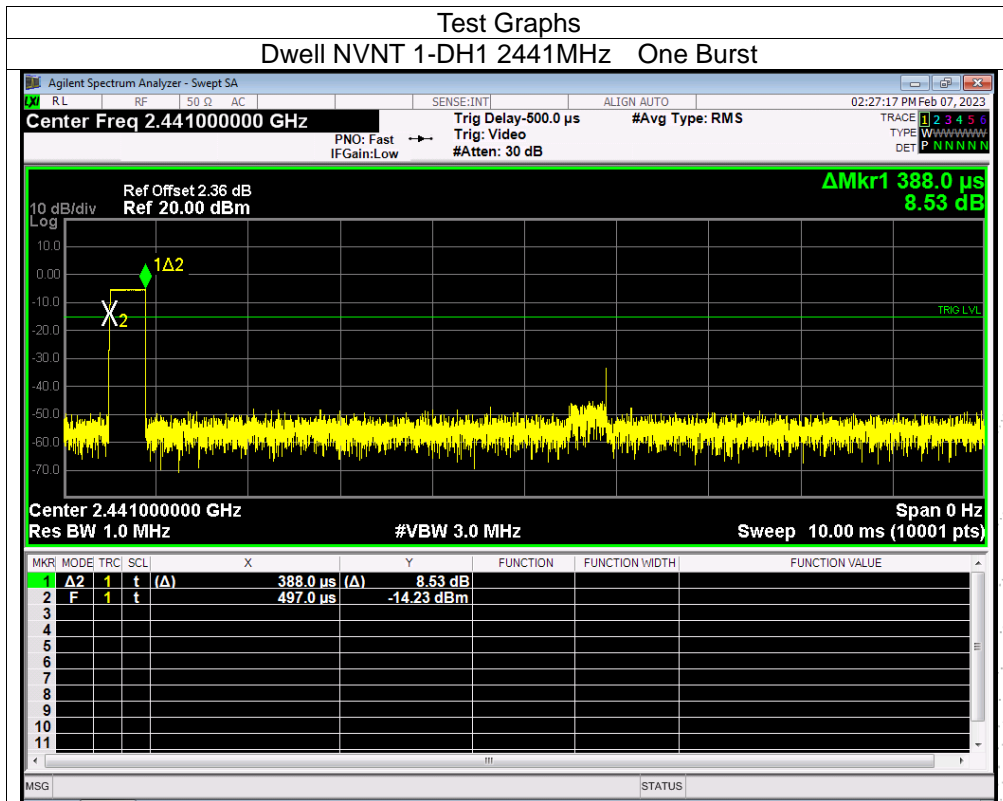


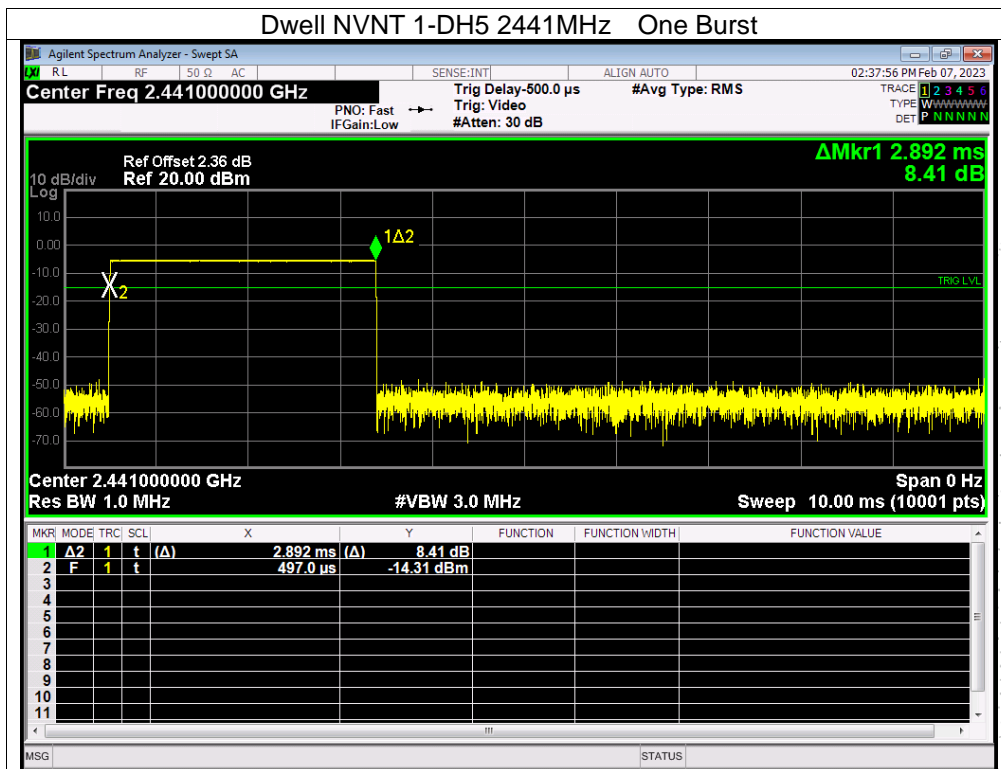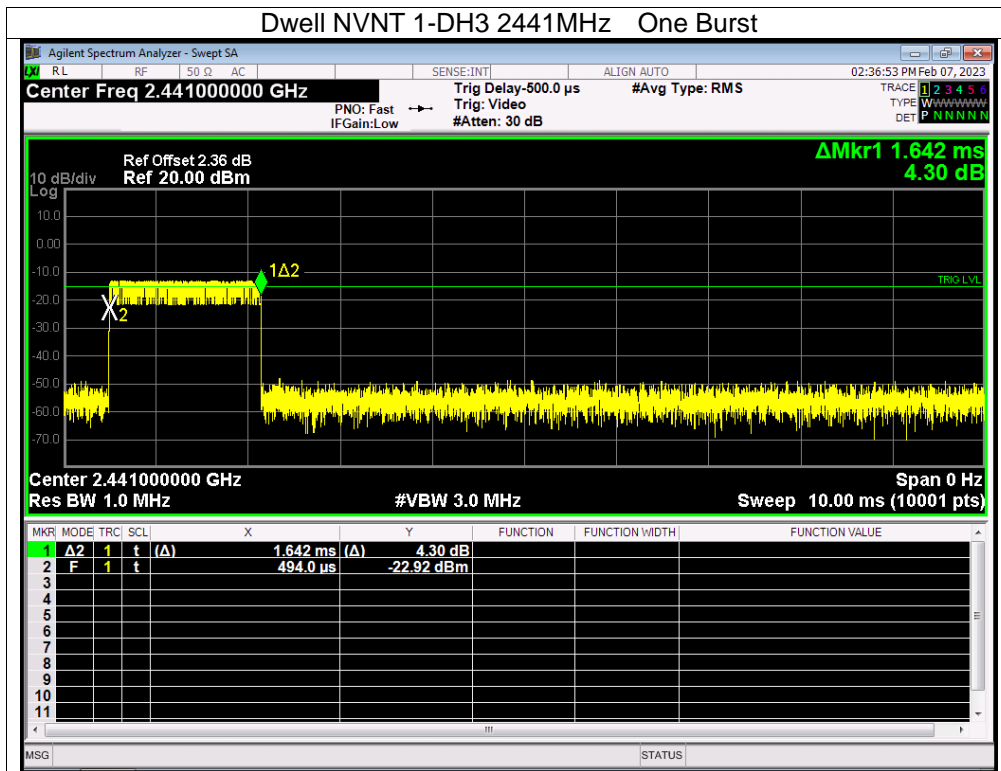

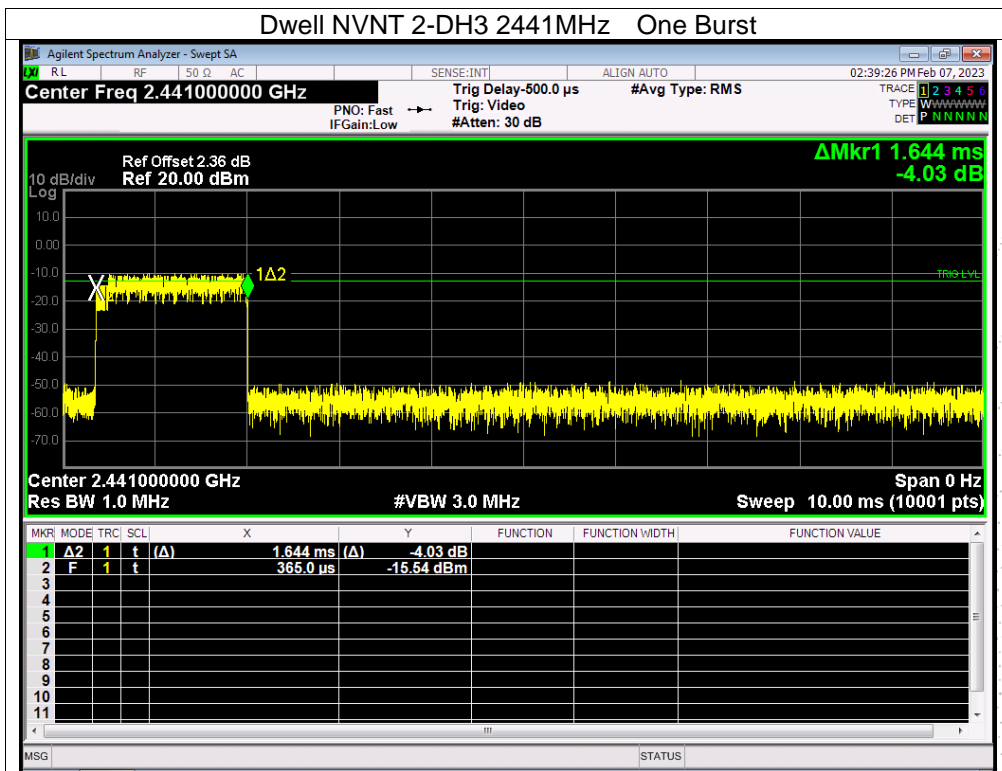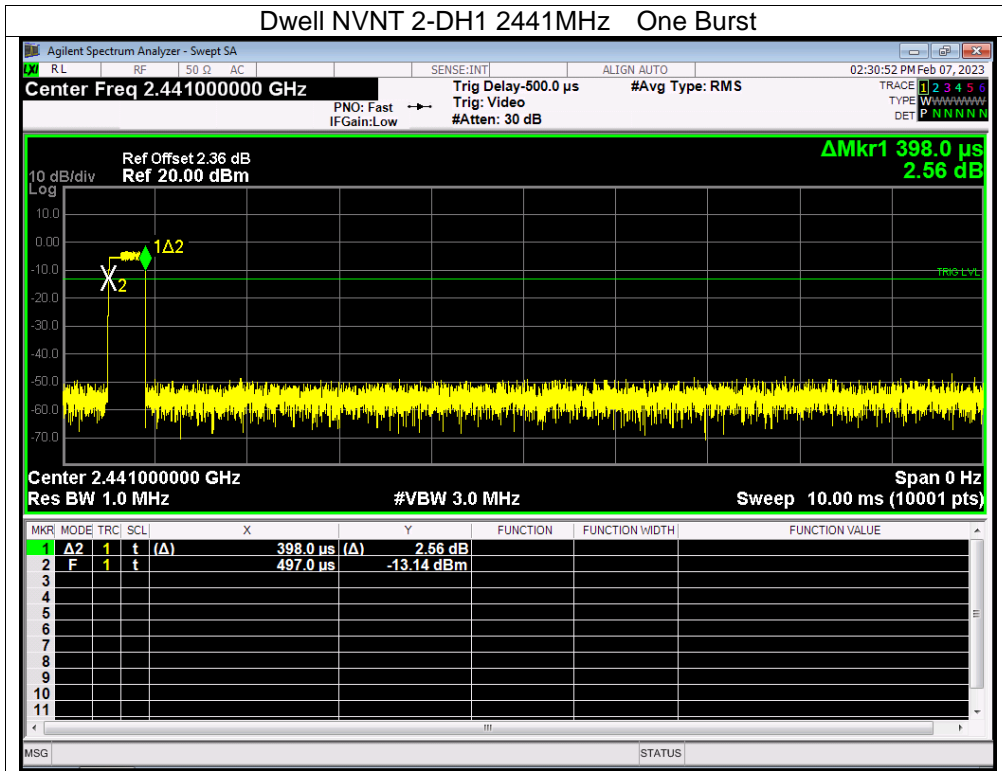

CO., LTD

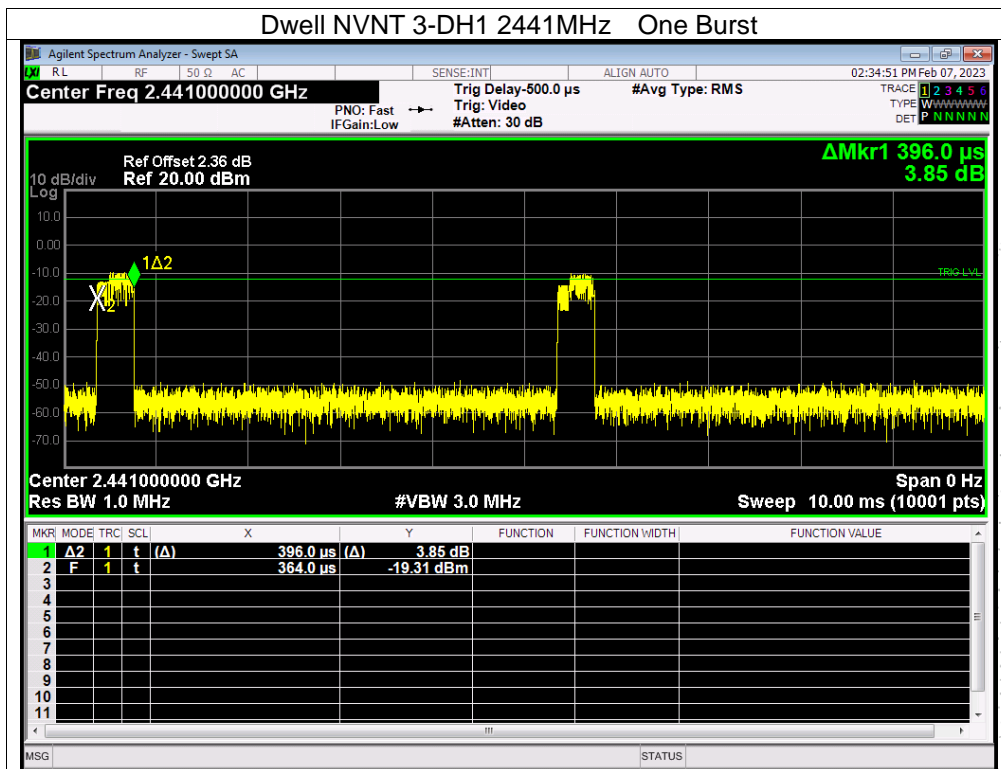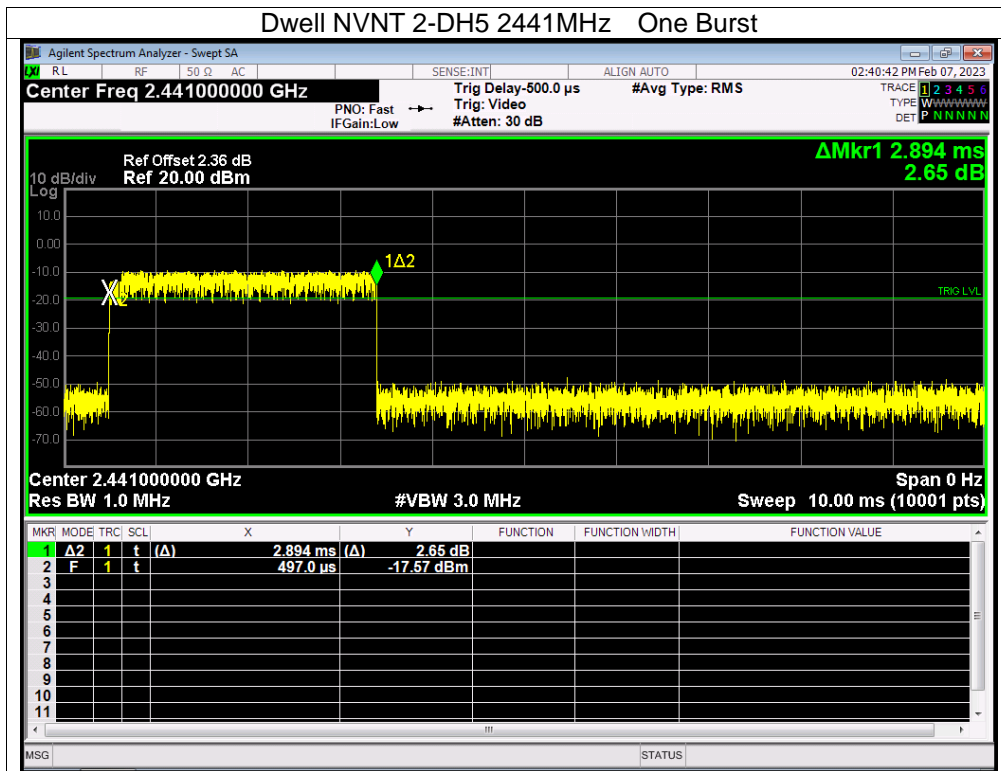

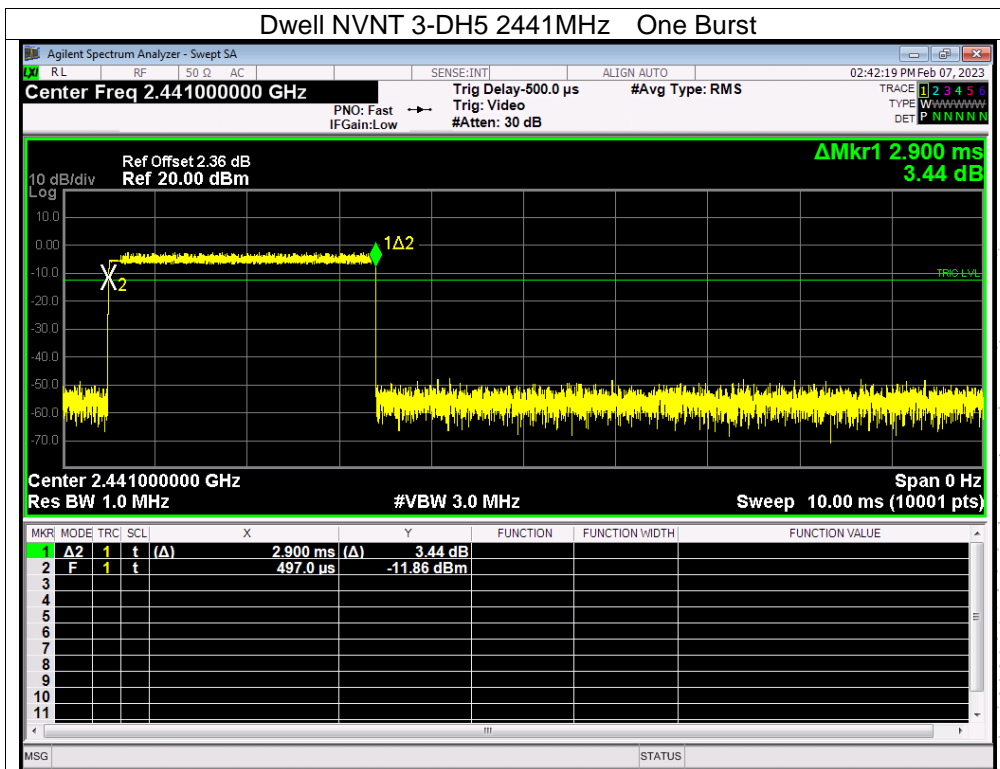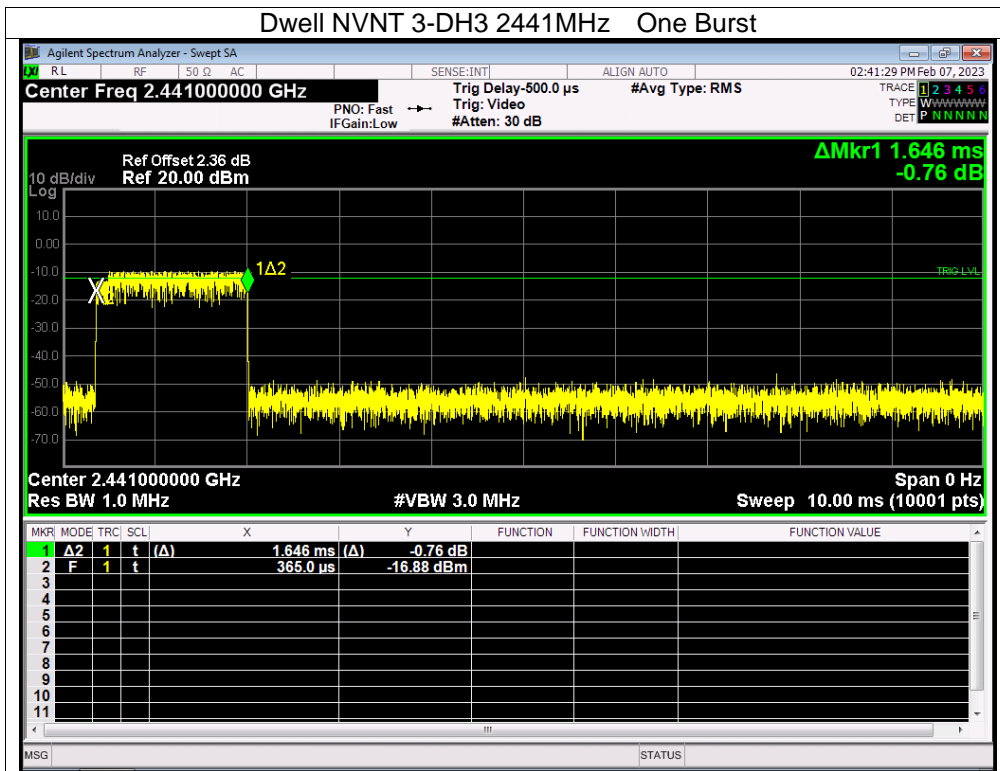

15. Antenna Requirement

15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.2 Test Result


The EUT antenna is PCB antenna, fulfill the requirement of this section.

16. EUT Photographs

EUT Photo




NOTE: Appendix-Photographs Of EUT Constructional Details

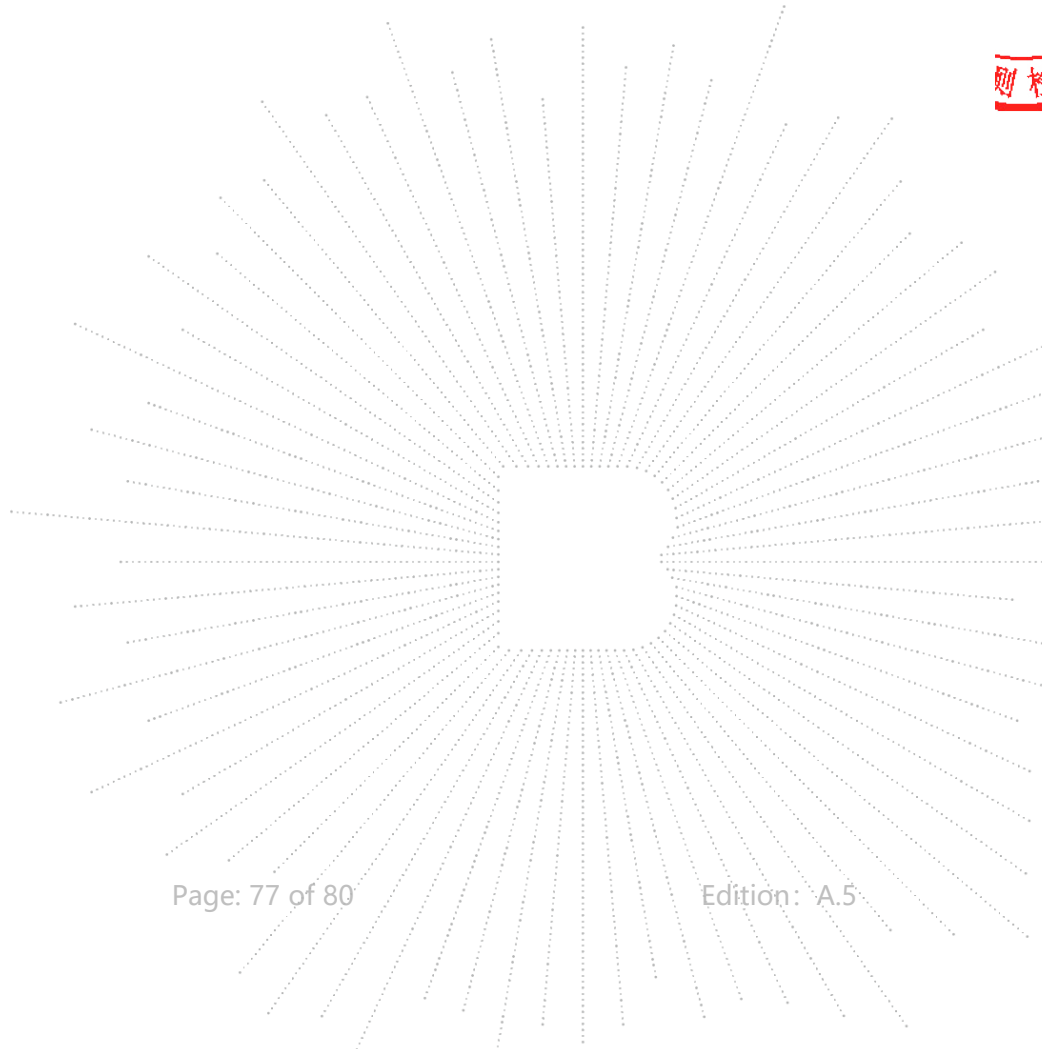

CT
CT
PRO
刚

17. EUT Test Setup Photographs


Conducted emissions

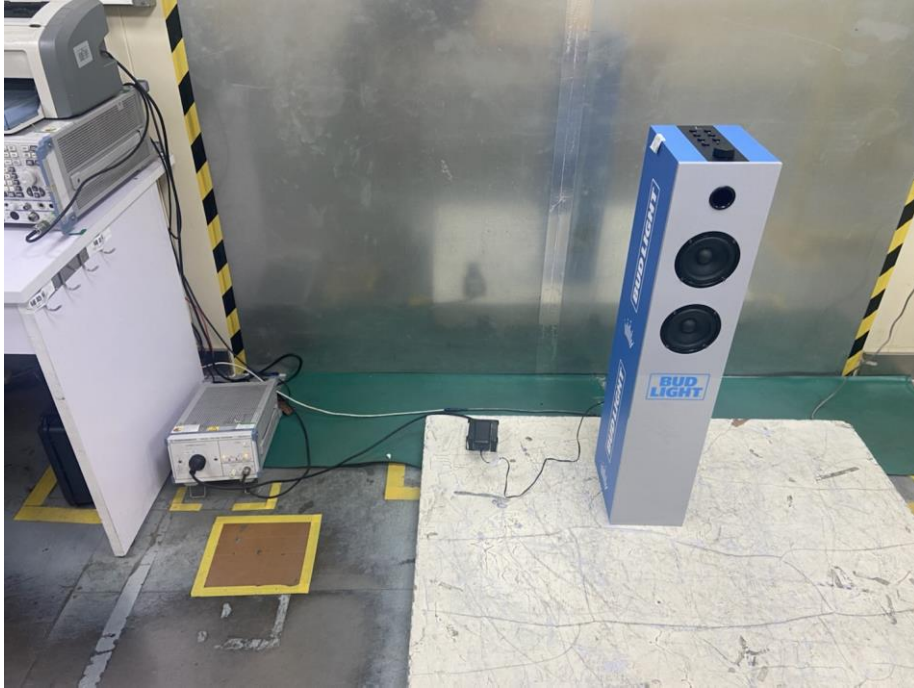


Radiated Measurement Photos



TEST
FOR
EUT
EUT

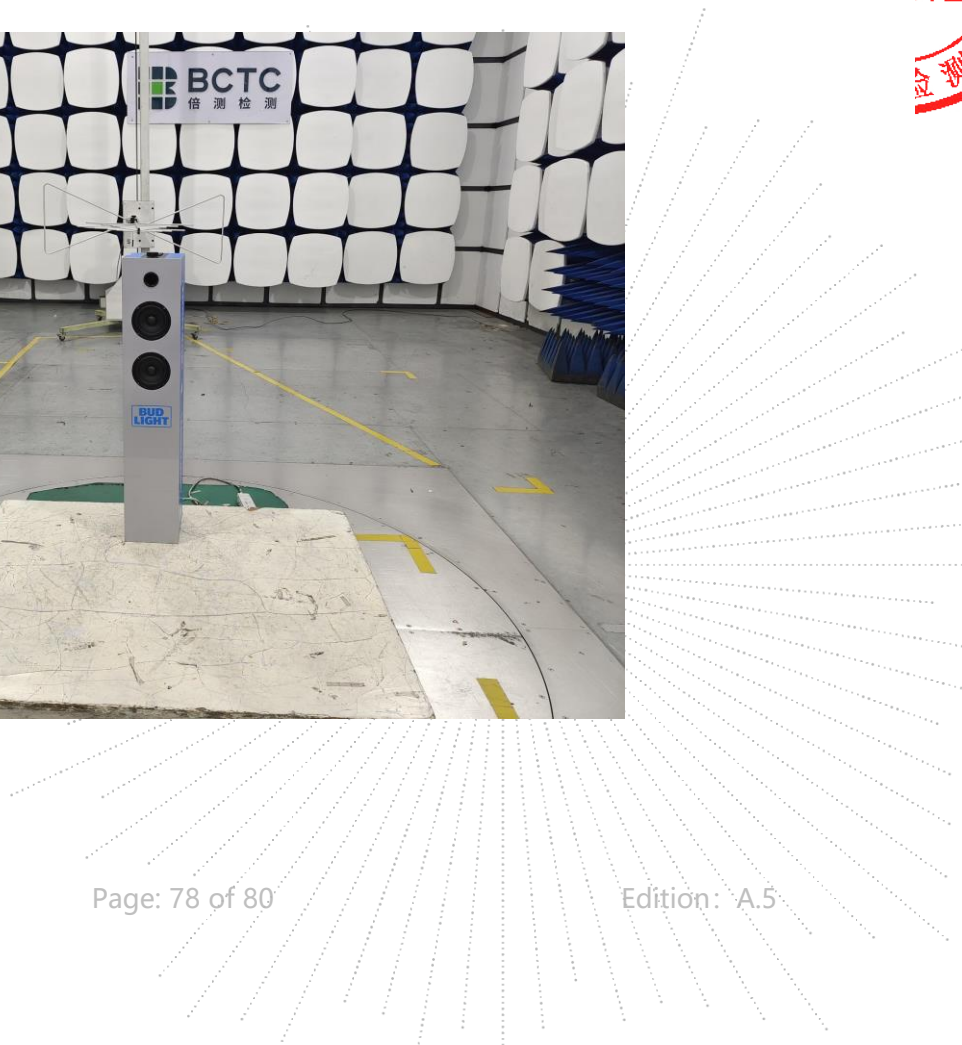

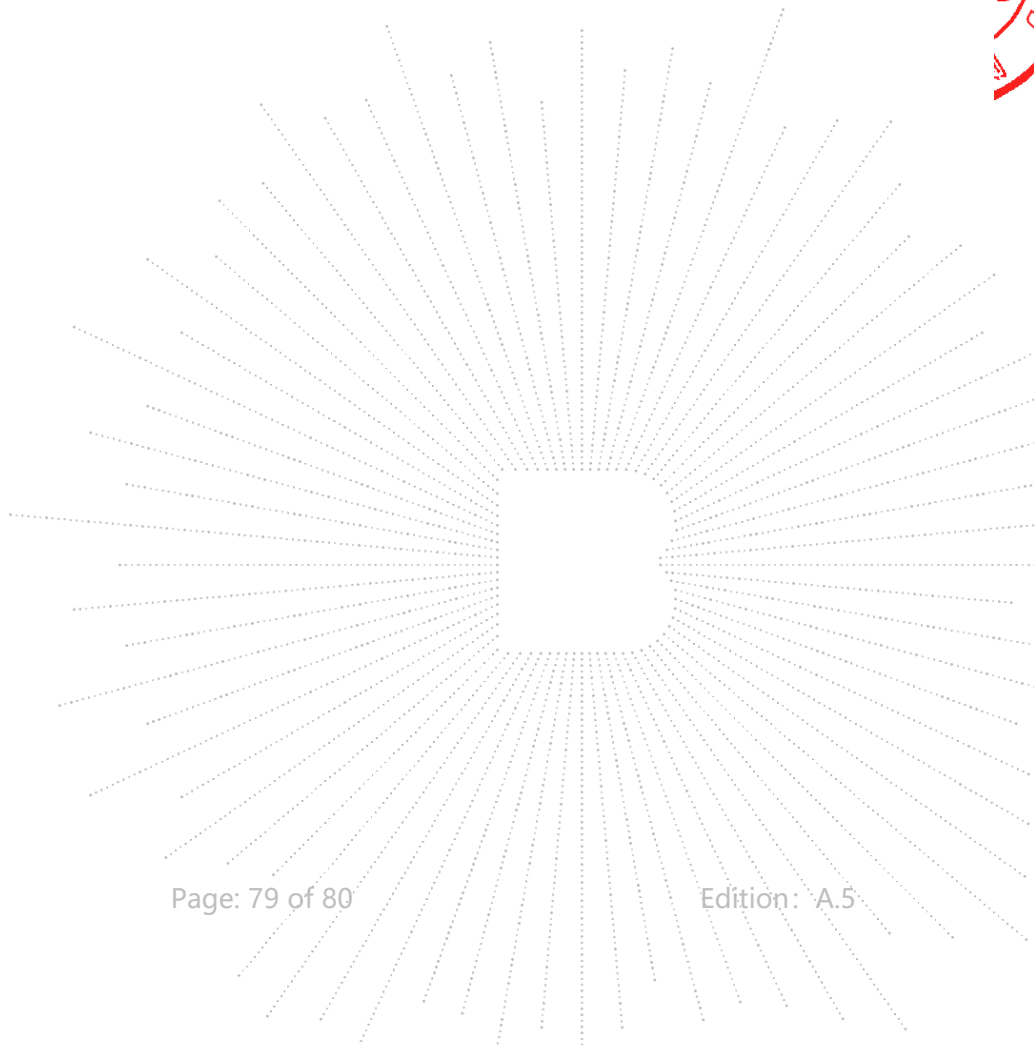

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The test report without CMA mark is only used for scientific research, teaching, enterprise product development and internal quality control purposes.
8. The quality system of our laboratory is in accordance with ISO/IEC17025.
9. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** **END** *****

CO., LTD.