


No. : BCTC/RF-EMC-005 Page: 60 of 85 / / / | Ldition : B.1



No.: BCTC/RF-EMC-005

Report No.: BCTC2403259050E



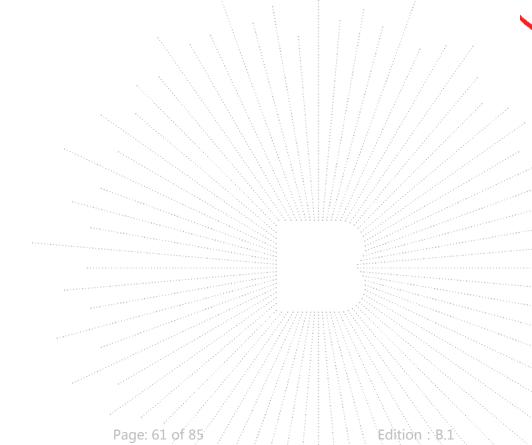



12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup

EUT	SPECTRUM		
	ANALYZER		

12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

12.3 Test procedure

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

12.4 Test Result

odulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.000	0.616	PASS
GFSK	Middle	1.002	0.619	PASS
GFSK	High •••••	0.998	0.617	PASS
π/4 DQPSK	Low	1.004	0.835	PASS
π/4 DQPSK	Middle	1.002	0.837	PASS
π/4 DQPSK	High	1.000	0.861	PASS
8DPSK	Low	0.996	0.809	PASS
8DPSK	Middle	1.000	0.819	PASS
8DPSK	High	1.002	0.819	PASS


No. : BCTC/RF-EMC-005 Page: 62 of 85 / / / / Edition : B.1

,TC

30






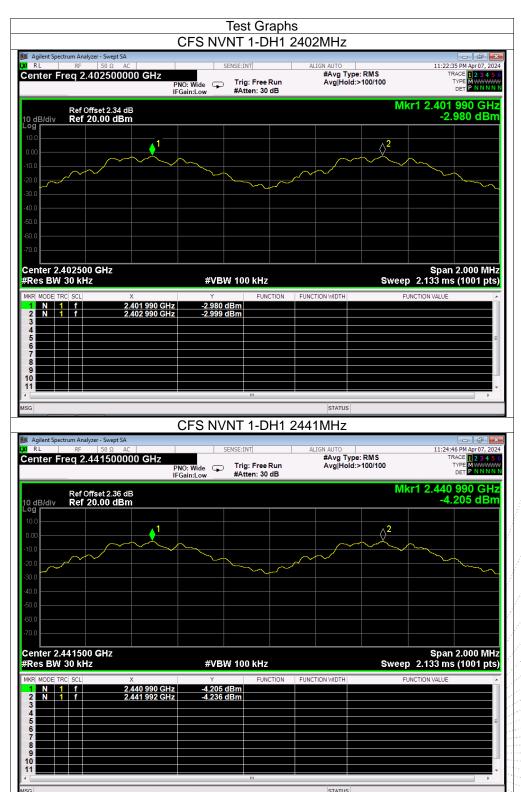


No.: BCTC/RF-EMC-005 Page: 63 of 85 / / / Edition: B.1



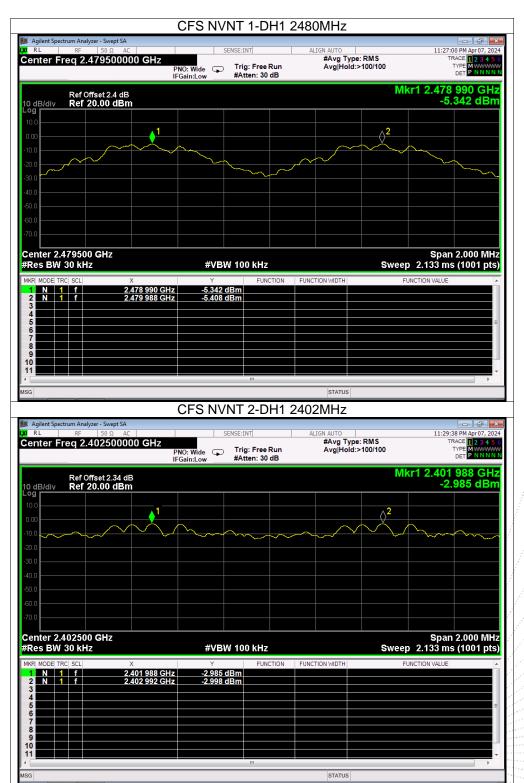


No. : BCTC/RF-EMC-005 Page: 64 of 85 / / / Edition : B.1




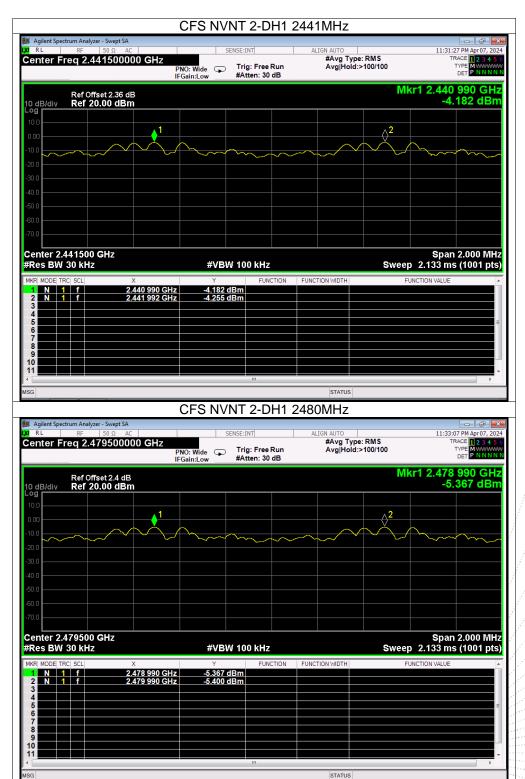




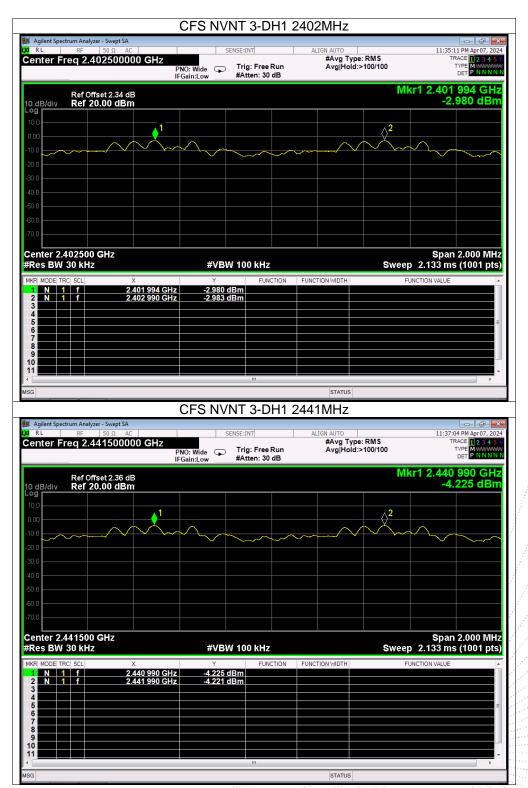



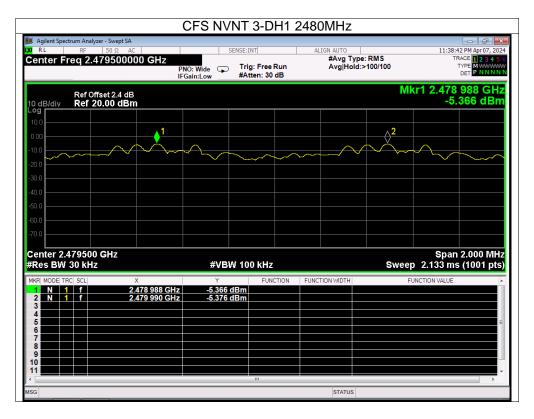

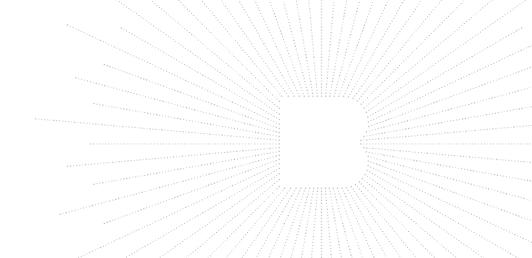

No. : BCTC/RF-EMC-005 Page: 67 of 85 / / / Ldition : B.1



13. Number Of Hopping Frequency

13.1 Block Diagram Of Test Setup

EUT	SPECTRUM		
	ANALYZER		

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

13.3 Test procedure

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
- 4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

13.4 Test Result


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH1	79	15	Pass
NVNT	2-DH1	79	15	Pass
NVNT	3-DH1	79	15	Pass

No.: BCTC/RF-EMC-005 Page: 68 of 85 / / / Edition : B.1


,TC

, (

t Sea

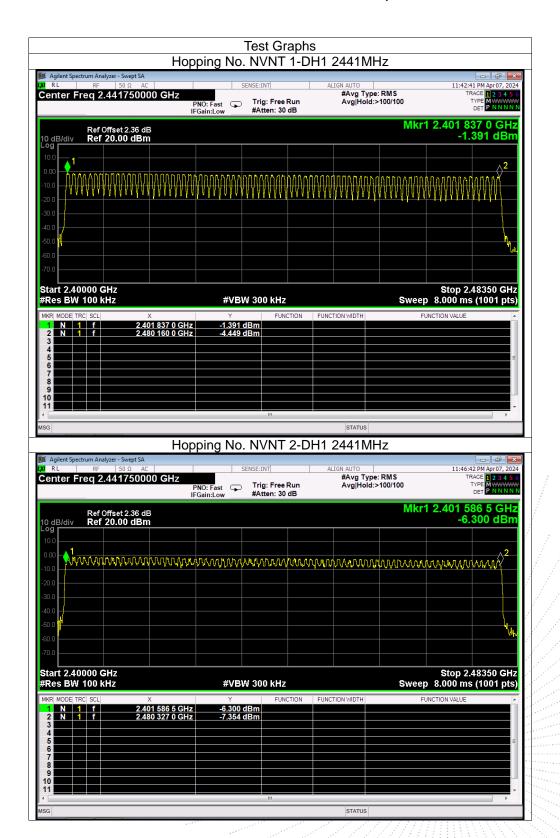



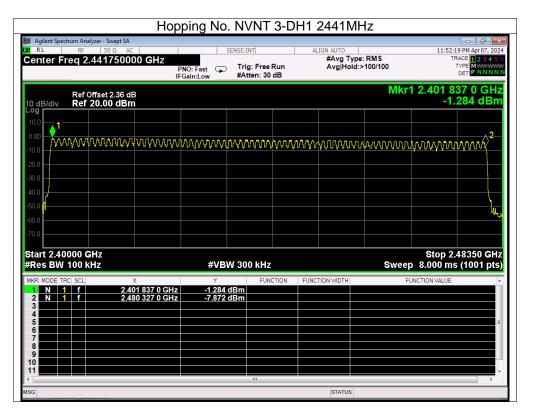





14. Dwell Time

14.1 Block Diagram Of Test Setup

EUT	SPECTRUM		
	ANALYZER		

Report No.: BCTC2403259050E

14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

14.3 Test procedure

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set spectrum analyzer span = 0. Centred on a hopping channel;
- 3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- 4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).


14.4 Test Result


Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	0.401	127.919	319	31600	400	Pass
1-DH3	2441	1.654	253.062	153	31600	400	Pass
1-DH5	2441	2.903	304.815	105	31600	400	Pass
2-DH1	2441	0.41	129.56	316	31600	400	Pass
2-DH3	2441	1.644	266.328	162	31600	400	Pass
2-DH5	2441	2.893	329.802	114	31600	400	Pass
3-DH1	2441	0.408	129.336	317	31600	400	Pass
3-DH3	2441	1.661	254.133	153	31600	400	Pass
3-DH5	2441	2.91	328.83	113	31600	400	Pass

Note: Total Dwell Time (ms) = Pulse Time (ms)*Burst Count

No. : BCTC/RF-EMC-005 Page: 71 of 85 / / / / Edition : B.1




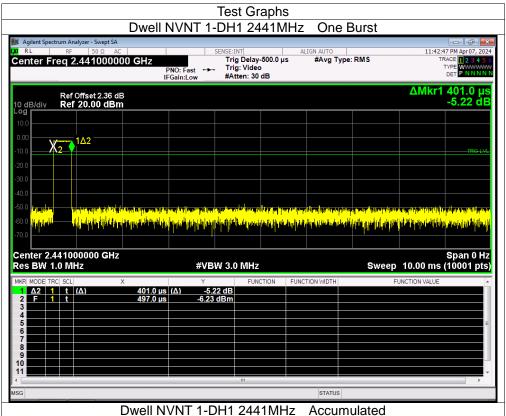

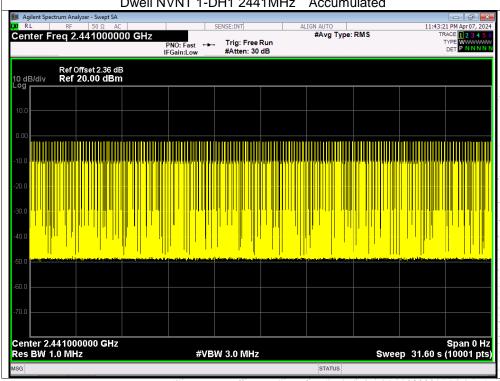

No. : BCTC/RF-EMC-005 Page: 72 of 85 / / / Edition : B.1




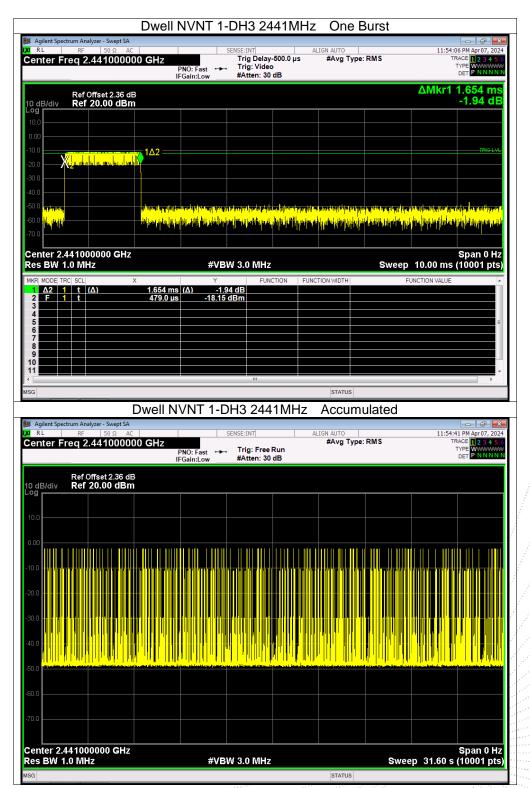

No. : BCTC/RF-EMC-005 Page: 73 of 85 / / / Edition : B.1




epor

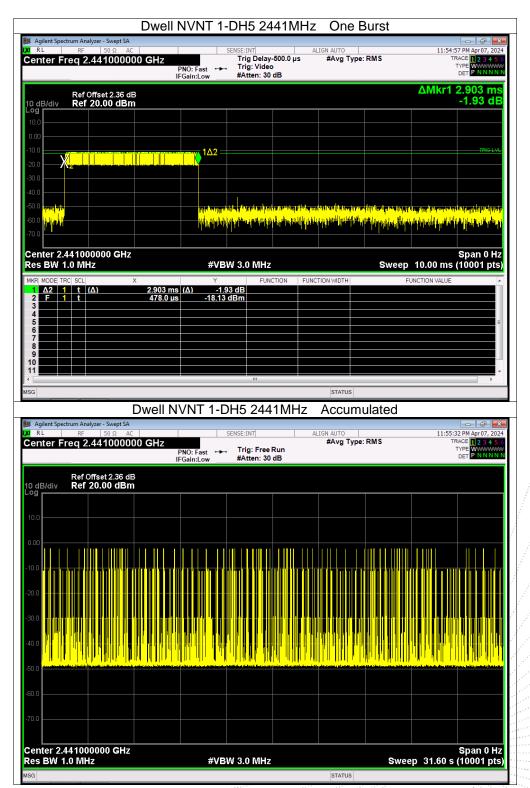

No. : BCTC/RF-EMC-005 Page: 74 of 85 / / / / Edition : B.1



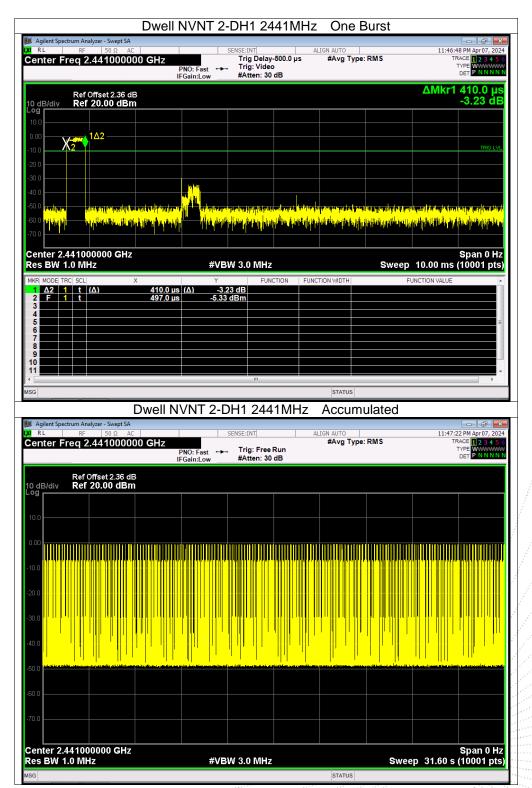


No. : BCTC/RF-EMC-005 Page: 75 of 85' / / / | Edition : B.1



Center 2.441000000 GHz Res BW 1.0 MHz Report No.: BCTC2403259050E


Span 0 Hz Sweep 31.60 s (10001 pts)

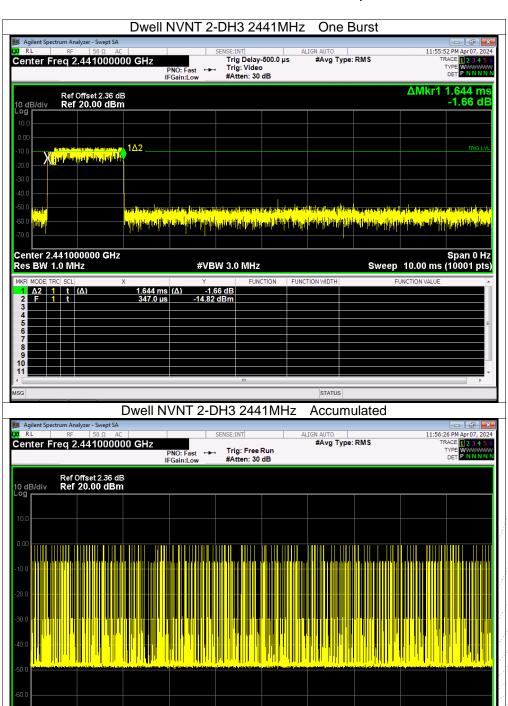

No. : BCTC/RF-EMC-005 Page: 76 of 85 / / / Edition : B.1


#VBW 3.0 MHz



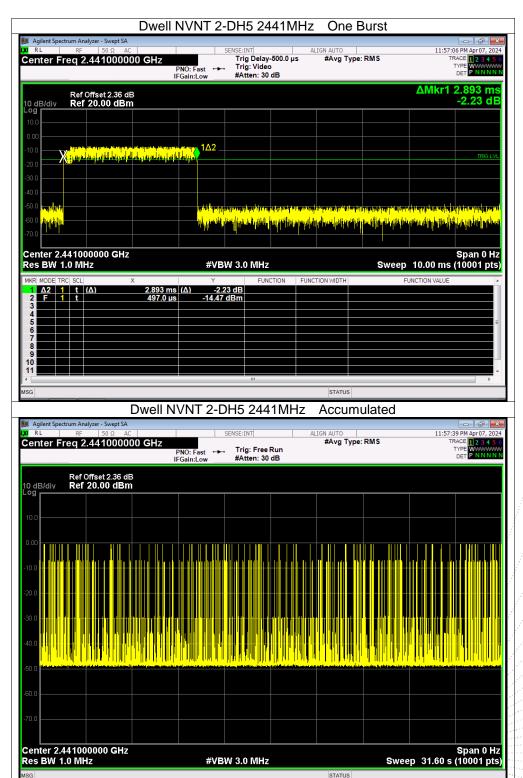


No. : BCTC/RF-EMC-005 Page: 77 of 85 / / / | Ldition : B.1



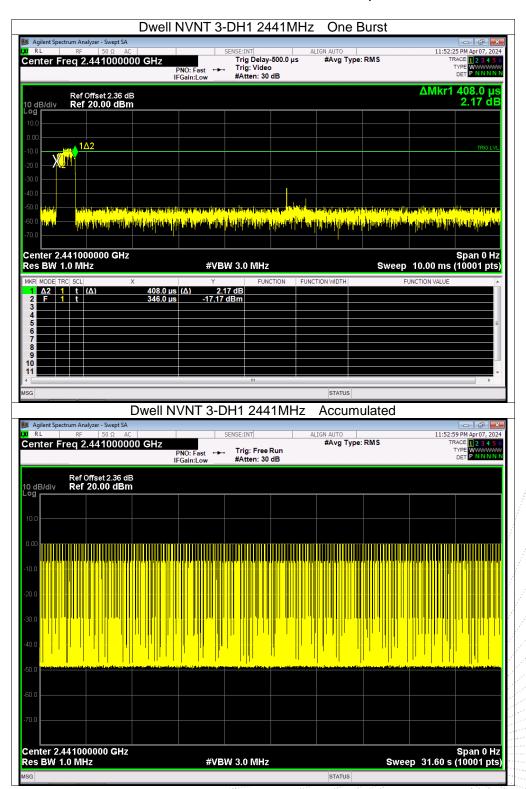




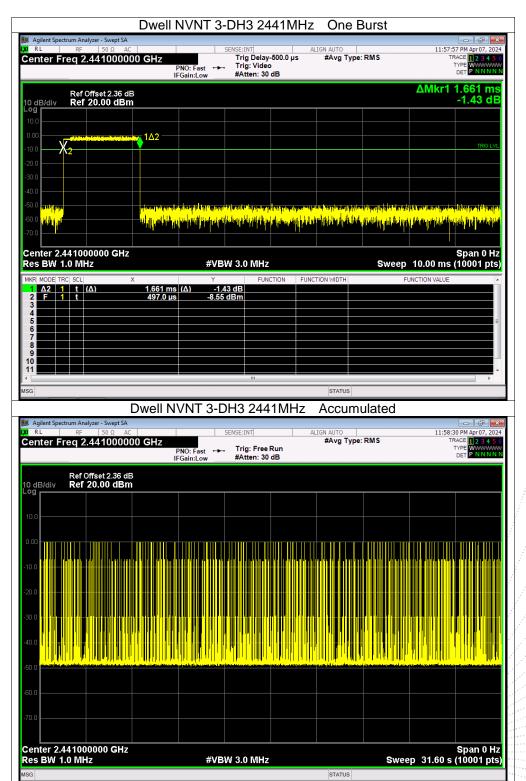

No.: BCTC/RF-EMC-005 Page: 79 of 85 / / / Edition: B.1



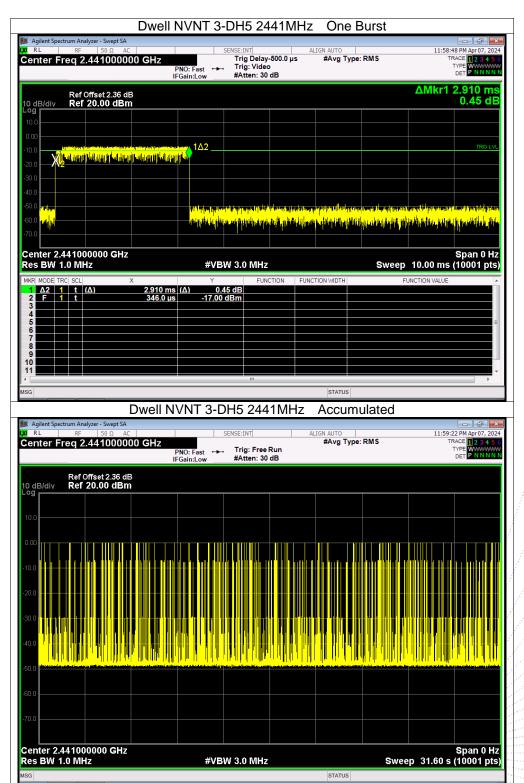

No. : BCTC/RF-EMC-005 Page: 80 of 85 / / / | Ldition : B.1




15. Antenna Requirement

15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.2 Test Result

The EUT antenna is Ceramic antenna, fulfill the requirement of this section.

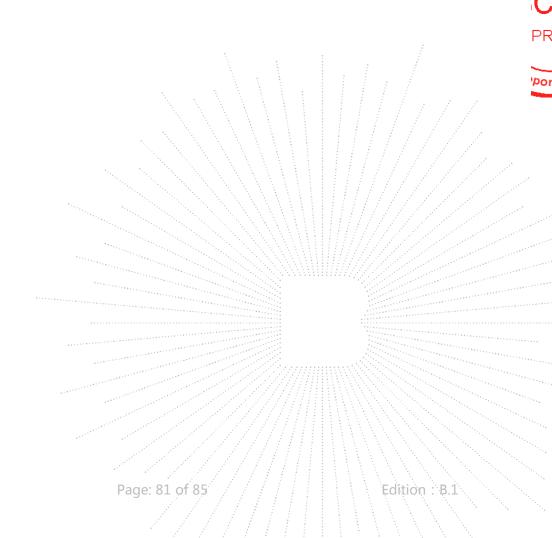



No.: BCTC/RF-EMC-005



16. EUT Photographs

EUT Photo

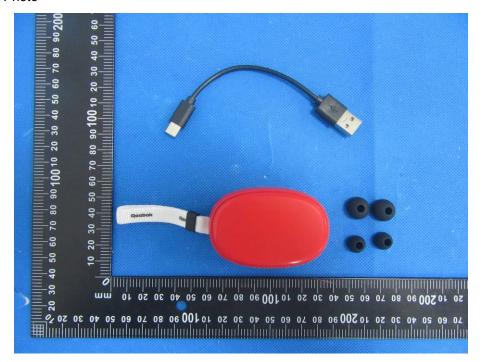

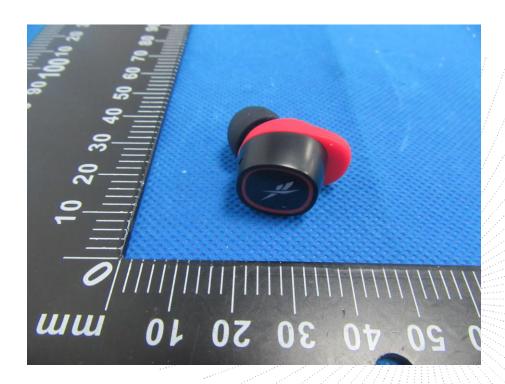


NOTE: Appendix-Photographs Of EUT Constructional Details

No. : BCTC/RF-EMC-005 Page: 82 of 85' / / / / Edițion : B.1




17. EUT Test Setup Photographs

Conducted emissions

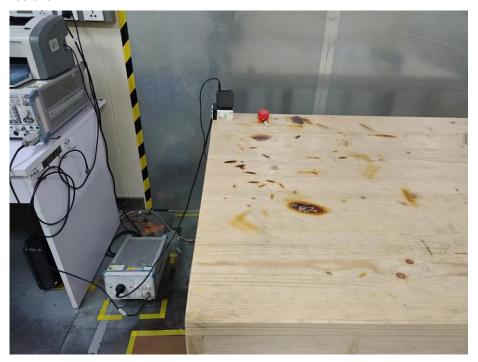

Radiated Measurement Photos

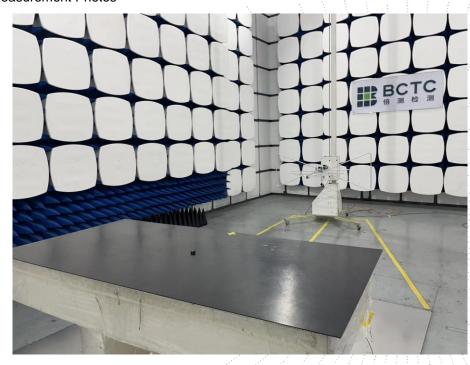


No.: BCTC/RF-EMC-005 Page: 83 of 85 / / / Edition: B.1







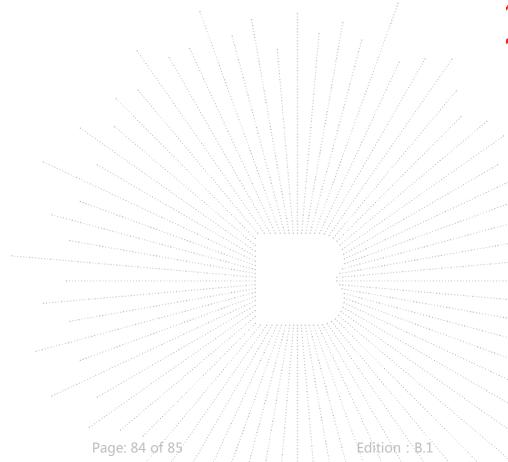

No.: BCTC/RF-EMC-005 Pag





STATEMENT

- 1. The equipment lists are traceable to the national reference standards.
- 2. The test report can not be partially copied unless prior written approval is issued from our lab.
- 3. The test report is invalid without the "special seal for inspection and testing".
- 4. The test report is invalid without the signature of the approver.
- 5. The test process and test result is only related to the Unit Under Test.
- 6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
- 7. The quality system of our laboratory is in accordance with ISO/IEC17025.
- 8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: http://www.chnbctc.com

E-Mail: bctc@bctc-lab.com.cn

**** END ****

No. : BCTC/RF-EMC-005 Page: 85 of 85 / / / / Edition : B.1