

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

**Test Report No.** : W174R-D058  
**AGR No.** : A150A-148  
**Applicant** : AIRO Co.,LTD.  
**Address** : 203, Hanulteo Bldg, 464-2, Sangsam-ri, Haeryong-myeon, Suncheon-si, Jeollanam-do, South Korea, 58005  
**Manufacturer** : AIRO Co.,LTD.  
**Address** : 203, Hanulteo Bldg, 464-2, Sangsam-ri, Haeryong-myeon, Suncheon-si, Jeollanam-do, South Korea, 58005  
**Type of Equipment** : Aquarium Fish Robot  
**FCC ID** : 2ALUA-MIRO-9  
**Model No.** : MIRO-9  
**Serial number** : N/A  
**Total page of Report** : 24 pages (including this page)  
**Date of Incoming** : January 29, 2016  
**Date of issuing** : April 19, 2017

## SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.231**

This test report contains only the result of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Reviewed by:

  
Jae-Ho Lee / Chief Engineer  
ONETECH Corp.

Approved by:

  
Keun-Young, Choi / Vice President  
ONETECH Corp.

## CONTENTS

	Page
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION.....</b>	<b>5</b>
<b>2.1 PRODUCT DESCRIPTION.....</b>	<b>5</b>
<b>2.2 MODEL DIFFERENCES:.....</b>	<b>5</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S).....</b>	<b>5</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>5</b>
<b>2.5 TEST METHODOLOGY.....</b>	<b>5</b>
<b>2.6 TEST FACILITY .....</b>	<b>6</b>
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
<b>3.1 JUSTIFICATION .....</b>	<b>7</b>
<b>3.2 PERIPHERAL EQUIPMENT.....</b>	<b>7</b>
<b>3.3 MODE OF OPERATION DURING THE TEST .....</b>	<b>7</b>
<b>3.4 EQUIPMENT MODIFICATIONS .....</b>	<b>7</b>
<b>3.5 CONFIGURATION OF TEST SYSTEM .....</b>	<b>8</b>
<b>3.6 ANTENNA REQUIREMENT .....</b>	<b>9</b>
<b>4. PRELIMINARY TEST .....</b>	<b>9</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....</b>	<b>9</b>
<b>4.2 RADIATED EMISSIONS TESTS.....</b>	<b>9</b>
<b>5. FINAL RESULT OF MEASURMENT .....</b>	<b>10</b>
<b>5.1 FIELD STRENGTH OF THE CARRIER TEST .....</b>	<b>10</b>
<b>5.2 TRANSMITTER TRANSMISSION DURATION.....</b>	<b>11</b>
<b>5.3 SPURIOUS EMISSION TEST .....</b>	<b>12</b>
<i>5.3.1 Test data for Blow 30 MHz.....</i>	<i>12</i>
<i>5.3.2 Test data for 30 MHz to 1 000 MHz.....</i>	<i>13</i>
<i>5.3.3 Test data for above 1 GHz.....</i>	<i>15</i>
<i>5.3.4 Limit .....</i>	<i>16</i>
<b>5.4 BANDWIDTH OF THE OPERATING FREQUENCY .....</b>	<b>17</b>
<i>5.4.1 Test Data .....</i>	<i>17</i>
<i>5.4.2 Limit .....</i>	<i>19</i>
<b>5.5 CONDUCTED EMISSION TEST.....</b>	<b>20</b>
<b>6. FIELD STRENGTH CALCULATION .....</b>	<b>23</b>
<b>7. LIST OF TEST EQUIPMENT .....</b>	<b>24</b>

**Revision History**

Issued Report No.	Issued Date	Revisions	Effect Section
W174R-D058	April 19, 2017	Initial Issue	All

**DOCUMENT HISTORY**

Revision No.	Issued Date	Revisions	Effect Section
Original	April 19, 2017	Initial Issue	-
Revision 01	April 28, 2017	Add limit	5.4 Bandwidth of operating frequency
Revision 02	May 08, 2017	Add Test Plot	5.3.2 Test data for 30 MHz to 1 000 MHz
Revision 03	May 10, 2017	Revised Limits and Margin.	5.3.3 Test data for above 1 GHz

**1. VERIFICATION OF COMPLIANCE**

APPLICANT : AIRO Co.,LTD.  
ADDRESS : 203, Hanulteo Bldg, 464-2, Sangsam-ri, Haeryong-myeon, Suncheon-si, Jeollanam-do, South Korea, 58005  
CONTACT PERSON : Ji-hoon Kim / Manager  
TELEPHONE NO : +82-61-727-6760  
FCC ID : 2ALUA-MIRO-9  
MODEL NAME : MIRO-9  
BRAND NAME :   
DATE : April 19, 2017

EQUIPMENT CLASS	DSR- Part 15 Remote Control/Security Device Transceiver
E.U.T. DESCRIPTION	Aquarium Fish Robot
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.231
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m, Semi Anechoic Chamber

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. GENERAL INFORMATION

### 2.1 Product Description

The AIRO Co.,LTD., Model MIRO-9 (referred to as the EUT in this report) is an Aquarium Fish Robot. The product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
OPERATING FREQUENCY	447.862 5 MHz ~ 447.987 5 MHz
MODULATION	GFSK
NUMBER OF CHANNEL	11
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>= 1 MHz)	16 MHz
ANTENNA TYPE	Helical Antenna
RATED SUPPLY VOLTAGE	DC 12 V
NUMBER OF LAYERS	2 Layers

### 2.2 Model Differences:

- None

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.231

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

## 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

- Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

- Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	AIRO Co.,LTD.	MIRO9 Main V1.1	N/A
Module	N/A	N/A	N/A
Antenna	N/A	N/A	N/A
Battery	SAMSUNG SDI	N/A	N/A
Battery Board 1	AIRO CO.,LTD.	MIRO9 Battery V1.0	N/A
Battery Board 2	N/A	EJ209A	N/A
Sensor Board	AIRO CO.,LTD.	MIRO-9 Sensor	N/A
Sensor 1	Pololu	N/A	N/A
Sensor 2	Pololu	N/A	N/A
Sensor 3	Pololu	N/A	N/A
Sensor 4	Pololu	N/A	N/A

#### 3.2 Peripheral equipment

Model	Manufacturer	Description	Connected to
BPL910S08N01	BridgePower Corp.	Adapter	EUT

#### 3.3 Mode of operation during the test

- To get a maximum radiated emission from the EUT, the button on the EUT was continuously pressed to transmit the signal. To activate continuous transmission, place a small plastic block between rubber band and the push button on the EUT. To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes. The worst case data is XY axis.

#### 3.4 Equipment Modifications

- None

### 3.5 Configuration of Test System

**Line Conducted Test:**

The EUT was tested in a Charging & Transmitting Mode. The EUT was connected to Adapter. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

**Radiated Emission Test:**

The EUT was tested in a charging mode and Transmitter mode. Preliminary radiated emissions test were conducted using the procedure in ANSI C63. 10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

**Occupied Bandwidth Measurement:**

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 20 kHz/division frequency span, 10 kHz resolution bandwidth and 10 dB/division logarithmic display from the spectrum analyzer.

### 3.6 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### Antenna Construction:

The transmitter antenna of the EUT is a Helical Antenna inside the EUT, so no consideration of replacement by the user.

## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Charging & Transmitting Mode	X

### 4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Charging & Transmitting Mode	X

## 5. FINAL RESULT OF MEASUREMENT

Radiated emission electric field intensity, 30 MHz ~ 300 MHz :  $\pm 4.43$  dB

Radiated emission electric field intensity, 300 MHz ~ 1 000 MHz :  $\pm 3.80$  dB

Measurement uncertainty is calculated in accordance with CISPR 16-4-2. The measurement uncertainty is given with a confidence of 95 % with the coverage factor,  $k = 2$ .

### 5.1 Field Strength of the Carrier Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: 44 % R.H.	Temperature: 23 °C
Limits apply to	: FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)	
Result	: PASSED	

EUT	: Aquarium Fish Robot	Date: April 16, 2017
Operating Condition	: Charging & Transmitting Mode	
Distance	: 3 m	

Frequency (GHz)	Reading (dB $\mu$ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
447.862 5	84.94	Peak	H	16.20	5.70	33.22	73.62	101.27	27.65
	84.93	Average	H				73.61	81.27	7.66
<b>Test Data for Middle Channel</b>									
447.925 0	84.73	Peak	H	16.20	5.70	33.22	73.41	101.27	27.86
	84.63	Average	H				73.31	81.27	7.96
<b>Test Data for High Channel</b>									
447.987 5	84.47	Peak	H	16.20	5.70	33.22	73.15	101.28	28.13
	84.31	Average	H				72.99	81.28	8.29

Tested by: Min-Gu Ji / Assistant Manager


## 5.2 Transmitter Transmission Duration

Humidity Level : 44 % R.H. Temperature: 23 °C  
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(a)  
Result : PASSED

---

EUT : Aquarium Fish Robot Date: April 16, 2017  
Operating Condition : Charging & Transmitting Mode  
Distance : 3 m

Manually Activated Duration (s)	Limit (s)	Margin (s)	Result
0.07	5.00	4.93	Pass

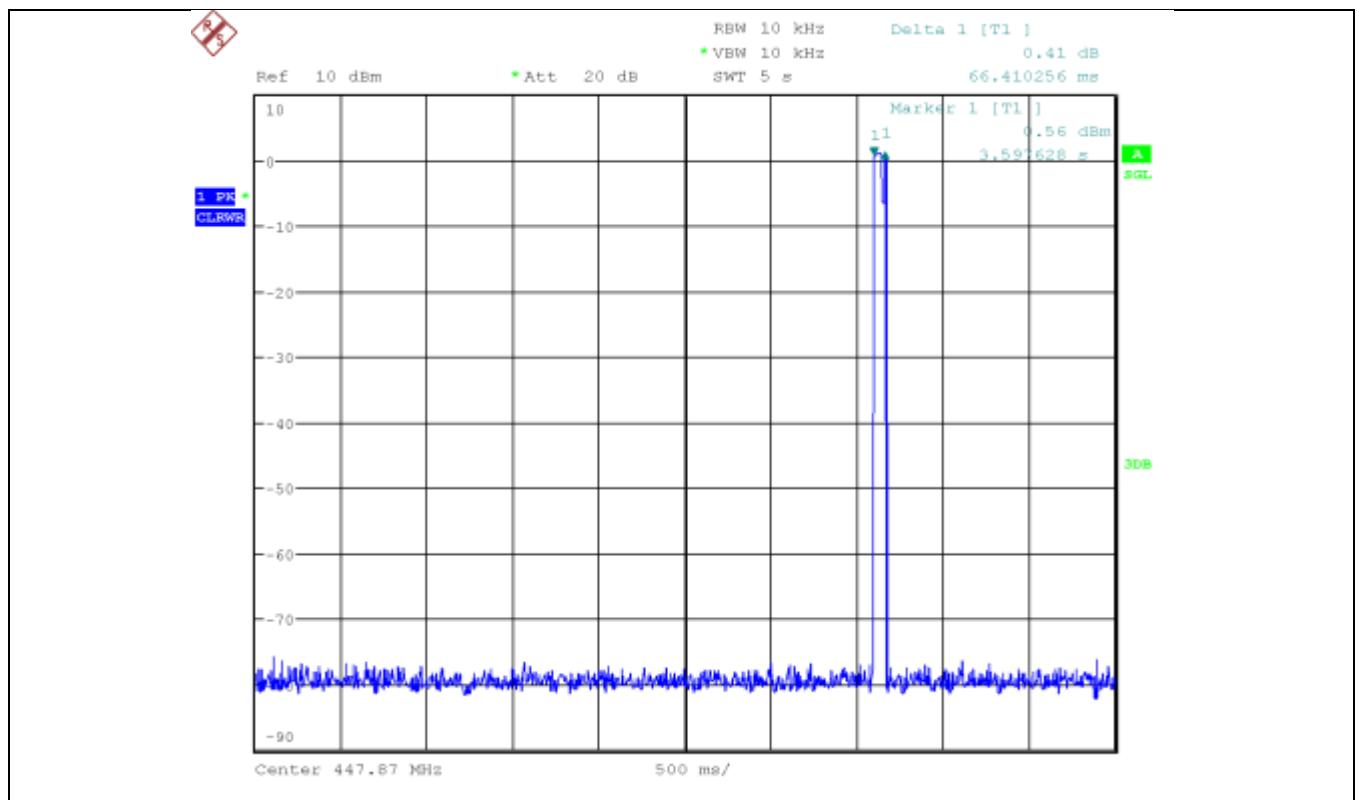

  
Tested by: Min-Gu Ji / Assistant Manager

### 5.3 Spurious Emission Test

Radiated emission electric field intensity, 30 MHz ~ 300 MHz :  $\pm 4.43$  dB

Radiated emission electric field intensity, 300 MHz ~ 1 000 MHz :  $\pm 3.80$  dB

Measurement uncertainty is calculated in accordance with CISPR 16-4-2. The measurement uncertainty is given with a confidence of 95 % with the coverage factor,  $k = 2$ .

#### 5.3.1 Test data for Blow 30 MHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 44 % R.H. Temperature: 23 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)

Measurement Freq. Range : 9 kHz ~ 30 MHz

Result : PASSED

EUT : Aquarium Fish Robot Date: April 16, 2017

Operating Condition : Charging & Transmitting Mode

Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
Any emissions less than 20 dB below the limit were not observed.									

**5.3.2 Test data for 30 MHz to 1 000 MHz**

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 44 % R.H. Temperature: 23 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)


Measurement Freq. Range : 30 MHz ~ 1 000 MHz

Result : PASSED

<b>EUT</b>	: Aquarium Fish Robot							Date: April 16, 2017	
Operating Condition	: Charging & Transmitting Mode								
Distance	: 3 m								
<b>Test Data for Low Channel</b>									
895.725	52.68	Peak	H	22.00	8.30	32.50	50.48	81.27	30.79
	39.91	Average	H				37.71	61.27	23.56
<b>Test Data for Middle Channel</b>									
895.850	53.46	Peak	H	22.00	8.30	32.50	51.26	81.27	30.01
	40.10	Average	H				37.90	61.27	23.37
<b>Test Data for High Channel</b>									
895.975	52.61	Peak	H	22.00	8.30	32.50	50.41	81.28	30.87
	39.95	Average	H				37.75	61.28	23.53

  
Tested by: Min-Gu Ji / Assistant Manager

## - Test Plot (Worst Case)

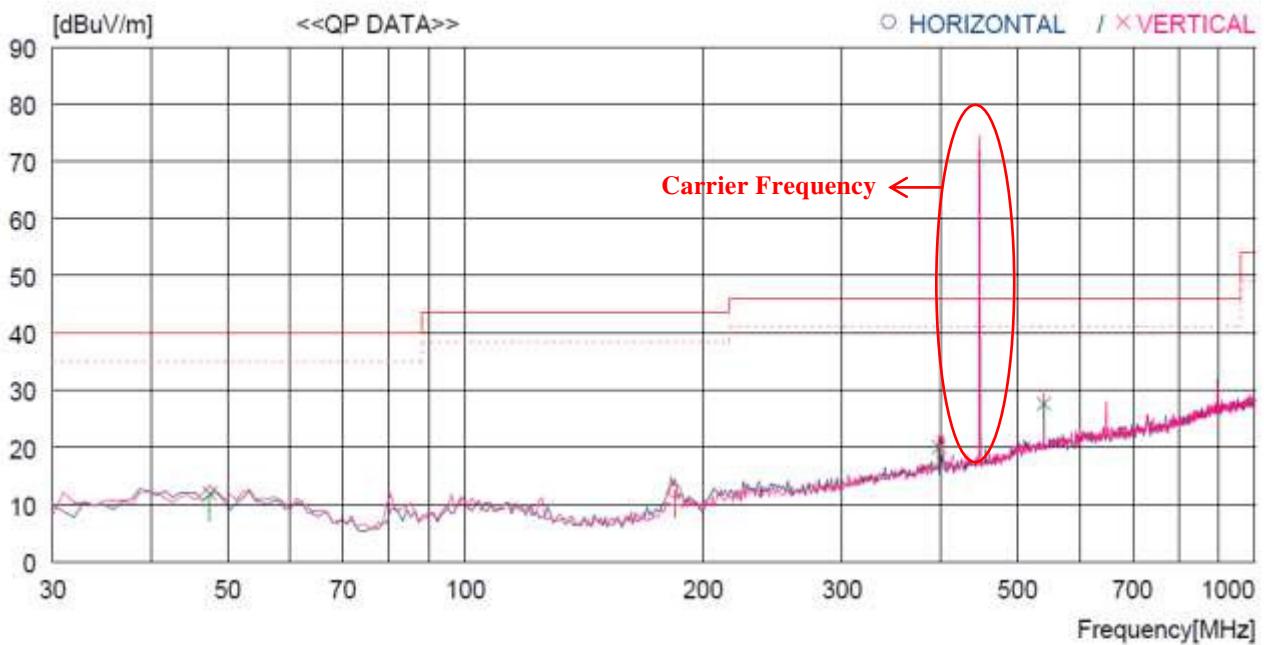

No.	FREQ [MHz]	READING QP	ANT FACTOR	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA TABLE	
									[dBuV]	[cm]
<b>----- Horizontal -----</b>										
1	184.230	31.6	10.2	3.6	33.0	12.4	43.5	31.1	300	0
<b>----- Vertical -----</b>										
2	47.460	28.6	14.3	2.0	33.0	11.9	40.0	28.1	100	359
3	397.630	32.1	15.8	5.3	33.2	20.0	46.0	26.0	300	359
4	540.220	36.2	17.9	6.8	33.3	27.6	46.0	18.4	300	224

Tested by: Min-Gu Ji / Assistant Manager

### 5.3.3 Test data for above 1 GHz

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 44 % R.H. Temperature: 23 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209  
 Measurement Freq. Range : 1 GHz ~ 4 GHza  
 Result : PASSED

EUT : Aquarium Fish Robot Date: April 16, 2017

Operating Condition : Charging & Transmitting Mode

Distance : 3 m

Frequency (GHz)	Reading (dB $\mu$ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
<hr/>									
1 343.587 5	36.36	Peak	H	25.05	7.20	40.03	28.58	74.00	45.42
	33.57	Average	H				25.79	54.00	28.21
1 791.450 0	42.77	Peak	H	25.50	8.70	40.22	36.75	74.00	37.25
	41.08	Average	H				35.06	54.00	18.94
<hr/>									
1 343.775 0	36.31	Peak	H	25.05	7.20	40.03	28.53	74.00	45.47
	33.75	Average	H				25.97	54.00	28.03
1 791.700 0	42.79	Peak	H	25.50	8.70	40.22	36.77	74.00	37.23
	41.32	Average	H				35.30	54.00	18.70
<hr/>									
1 343.962 5	36.26	Peak	H	25.05	7.20	40.03	28.48	74.00	45.52
	33.92	Average	H				26.14	54.00	27.86
1791.950 0	42.85	Peak	H	25.50	8.70	40.22	36.83	74.00	37.17
	41.14	Average	H				35.12	54.00	18.88

Tabulated test data for Restricted Band

Remark : "H": Horizontal, "V": Vertical

**5.3.4 Limit**

Frequency Range (MHz)	Limit @ 3 m
447.862 5	$41.6667(447.862 5) - 7083.3333 = 11577.6 \text{ uV/m} = 81.27 \text{ dBuV/m (Average)}$ 101.27 dBuV/m (Peak)
Harmonics	61.27 dBuV/m (The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.)



---

**Tested by: Min-Gu Ji / Assistant Manager**

## 5.4 Bandwidth of the operating frequency

### 5.4.1 Test Data

Humidity Level : 44 % R.H. Temperature: 23 °C  
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(c)  
 Result : PASSED


---


EUT : Aquarium Fish Robot Date: April 16, 2017  
 Operating Condition : Charging & Transmitting Mode  
 Minimum Resolution  
 Bandwidth : 10 kHz

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)	Limit
Low	447.862 5	6.70	111.97
Middle	447.925 0	7.15	111.98
High	447.987 5	6.75	112.00

Remark: Please refer to photo data for bandwidth for test data.

Tested by: Min-Gu Ji / Assistant Manager

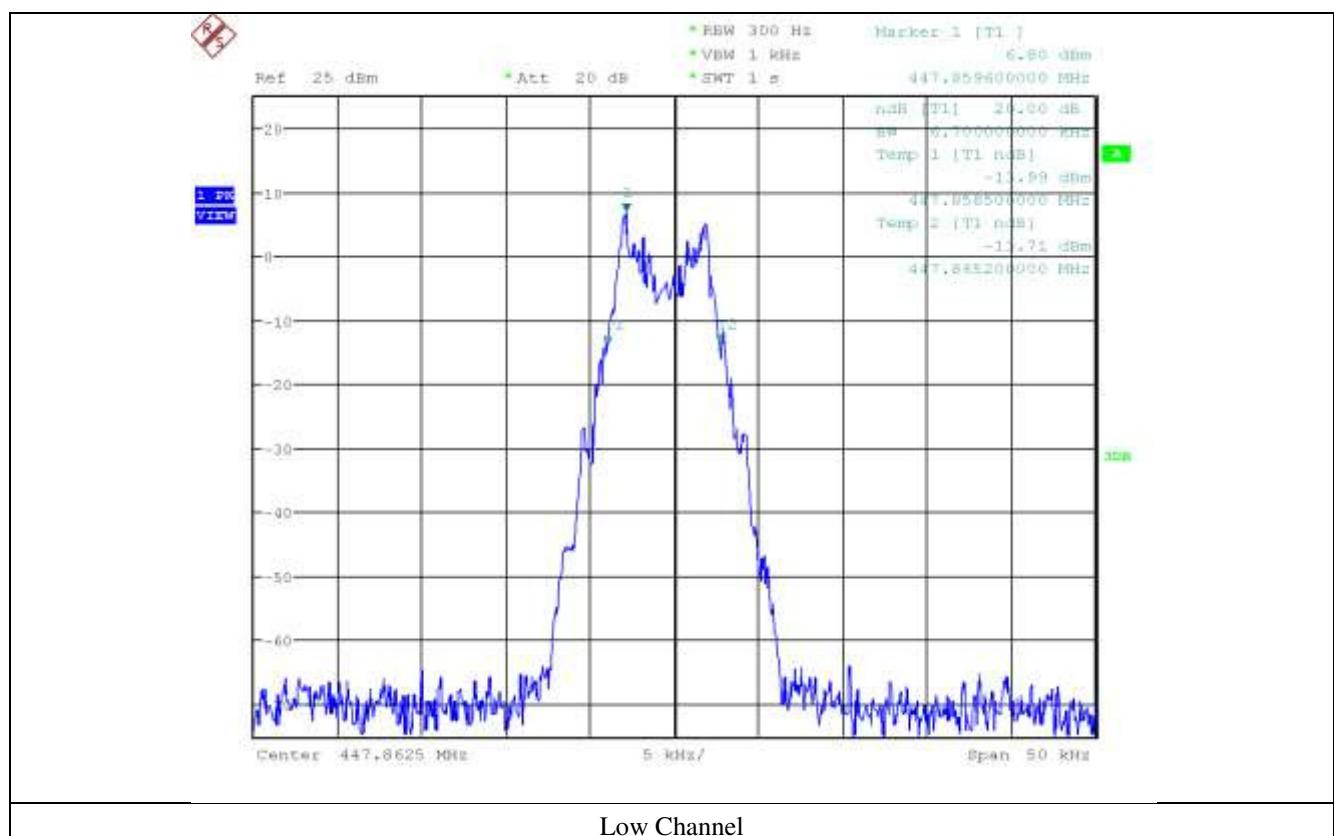

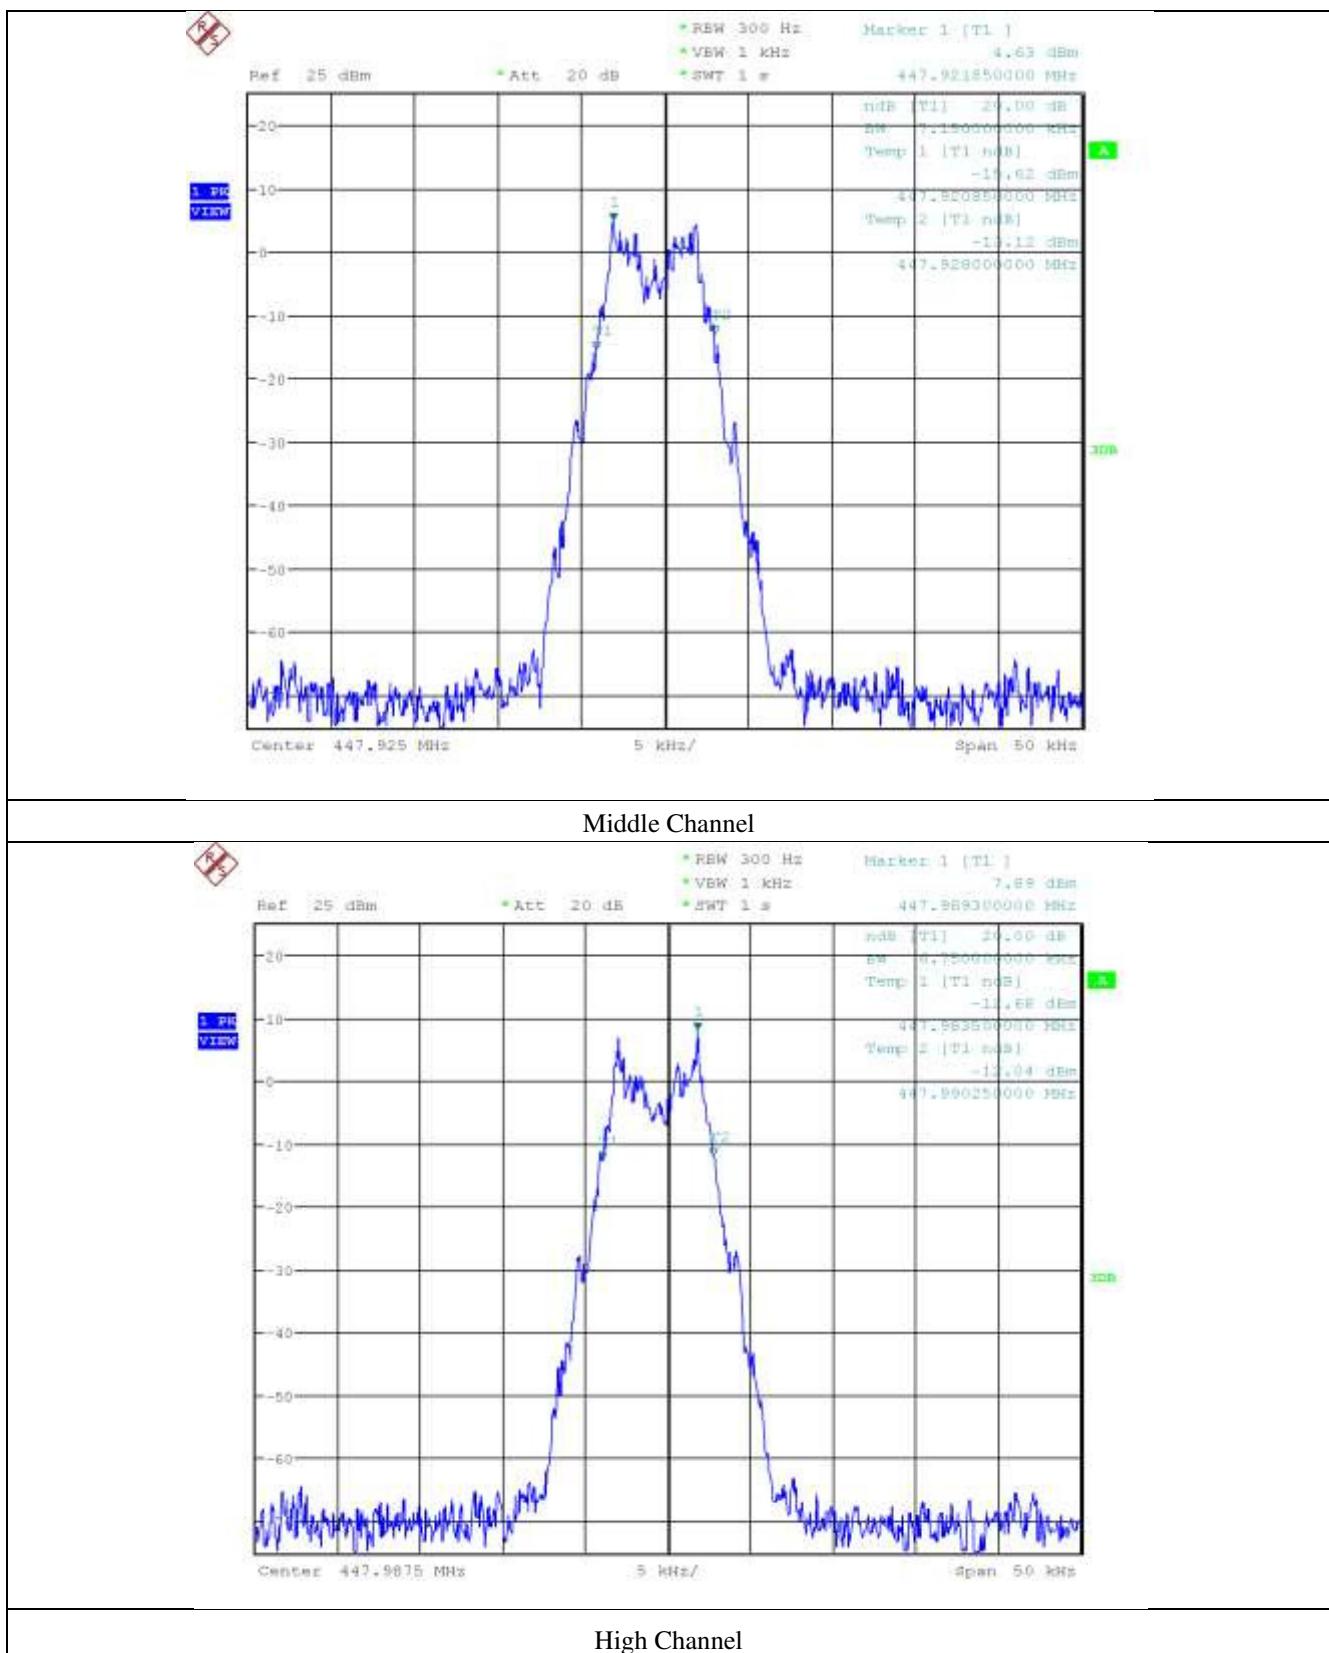

**5.4.2 Limit**

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.



---

**Tested by: Min-Gu Ji / Assistant Manager**

## 5.5 Conducted Emission Test

### 5.5.1 Operating environment


Temperature : 23 °C  
Relative humidity : 44 % R.H.

### 5.5.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a  $50 \Omega$  /  $50 \mu\text{H}$  +  $5 \Omega$  Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


### 5.5.3 Test data

- Test Date : April 16, 2017
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

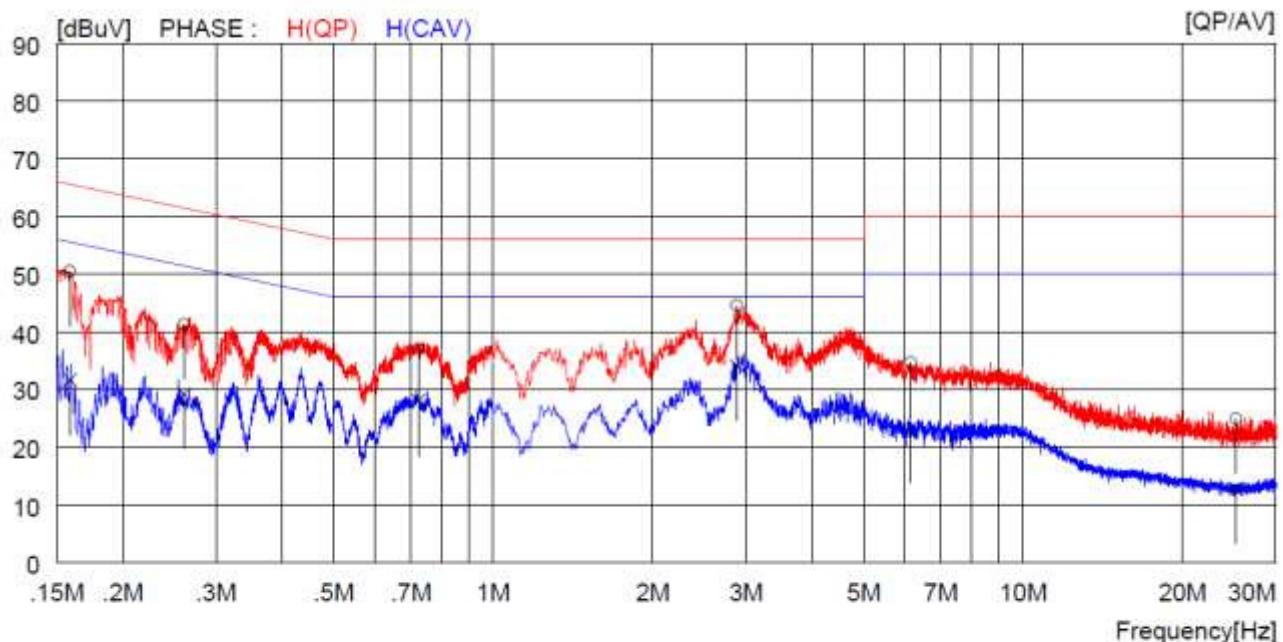

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15900	40.3	----	10.2	50.5	----	65.5	----	15.0	----	H(QP)
2	0.26100	31.2	----	10.1	41.3	----	61.4	----	20.1	----	H(QP)
3	0.72300	27.0	----	10.0	37.0	----	56.0	----	19.0	----	H(QP)
4	2.88800	34.5	----	10.1	44.6	----	56.0	----	11.4	----	H(QP)
5	6.15500	24.6	----	10.1	34.7	----	60.0	----	25.3	----	H(QP)
6	25.24000	14.5	----	10.4	24.9	----	60.0	----	35.1	----	H(QP)
7	0.15900	21.5	10.2	----	31.7	----	55.5	----	23.8	----	H(CAV)
8	0.26100	19.1	10.1	----	29.2	----	51.4	----	22.2	----	H(CAV)
9	0.72300	18.0	10.0	----	28.0	----	46.0	----	18.0	----	H(CAV)
10	2.88800	24.0	10.1	----	34.1	----	46.0	----	11.9	----	H(CAV)
11	6.15500	13.3	10.1	----	23.4	----	50.0	----	26.6	----	H(CAV)
12	25.24000	2.4	10.4	----	12.8	----	50.0	----	37.2	----	H(CAV)

- Tested Line : NEUTRAL LINE

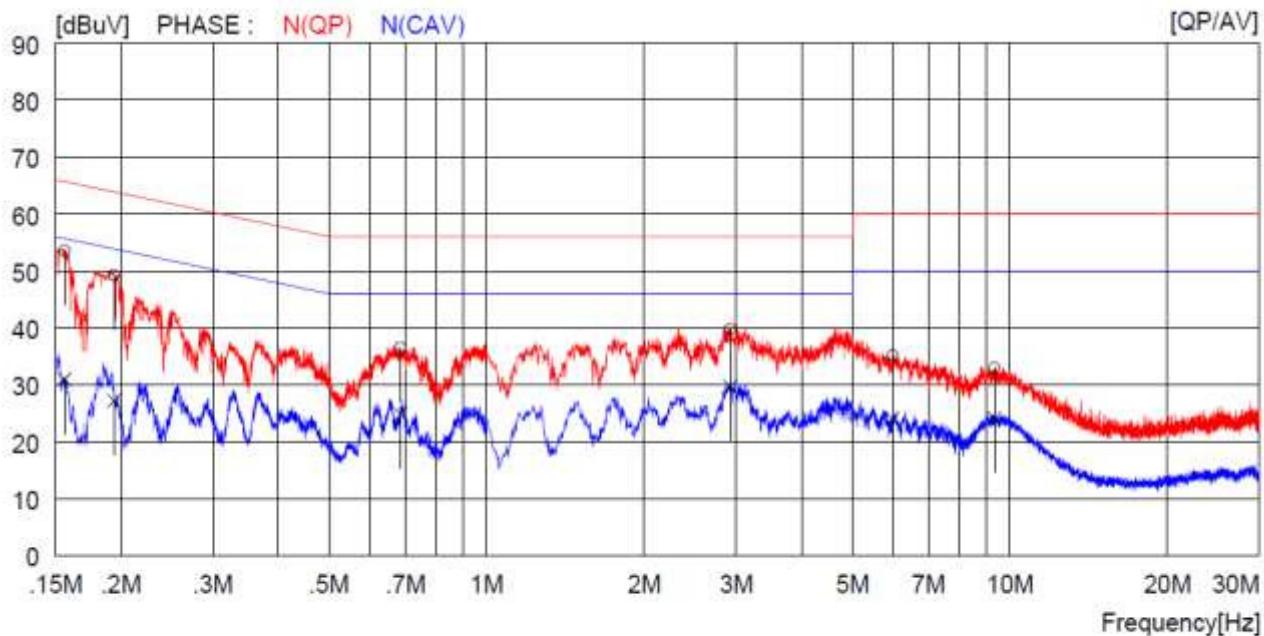

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15600	43.3	----	10.2	53.5	----	65.7	----	12.2	----	N (QP)
2	0.19400	39.1	----	10.1	49.2	----	63.9	----	14.7	----	N (QP)
3	0.68400	26.5	----	10.0	36.5	----	56.0	----	19.5	----	N (QP)
4	2.92400	29.7	----	10.1	39.8	----	56.0	----	16.2	----	N (QP)
5	5.97500	25.0	----	10.1	35.1	----	60.0	----	24.9	----	N (QP)
6	9.35000	22.9	----	10.1	33.0	----	60.0	----	27.0	----	N (QP)
7	0.15600	----	20.8	10.2	----	31.0	----	55.7	----	24.7	N (CAV)
8	0.19400	----	17.1	10.1	----	27.2	----	53.9	----	26.7	N (CAV)
9	0.68400	----	14.8	10.0	----	24.8	----	46.0	----	21.2	N (CAV)
10	2.92400	----	19.6	10.1	----	29.7	----	46.0	----	16.3	N (CAV)
11	5.97500	----	13.9	10.1	----	24.0	----	50.0	----	26.0	N (CAV)
12	9.35000	----	14.0	10.1	----	24.1	----	50.0	----	25.9	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN),  
cable loss and attenuator.

  
Tested by: Min-Gu Ji / Assistant Manager

## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading	(dB $\mu$ V)
+ Cable Loss	(dB)
+ Antenna Factor (Loss)	(dB/m)
- Amplifier Gain	(dB)
= Corrected Reading	(dB $\mu$ V/m)
- Specification Limit	(dB $\mu$ V/m)
= dB Relative to Spec	( $\pm$ dB)

## 7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESCI	101013	Apr. 04, 2017	12MONTH	■
2.	Test Receiver	R/S	ESR	101470	Feb. 08, 2017	12MONTH	■
3.	SPECTRUM ANALYZER	R/S	FSU26	200319	Apr. 04. 2017	12MONTH	■
4.	Amplifier	Sonoma Instrument	310N	312544	Apr. 04, 2017	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-419	Aug. 05, 2016	24MONTH	■
8.	Controller	Innco System	CO3000	CO3000/904/ 37211215/L	N/A	N/A	■
9.	Turn Table	Innco System	DT3000	930611	N/A	N/A	■
10.	Antenna Master	Innco System	MA- 4000XPET	MA4000/509/ 37211215/L	N/A	N/A	■
12.	Pre-Amplifier	R/S	SCU-18	102209	May 31, 2016	12MONTH	■
13.	Horn Antenna	Schwarzbeck	BBHA9120D	BBHA9120D295	Aug. 31, 2015	24MONTH	■
14.	LOOP ANTENNA	Schwarzbeck	FMZB 1513	1513-235	Jun. 10, 2016	24MONTH	■