

# FCC TEST REPORT

**Product Name:** Wireless Sport Earbuds  
**Trade Mark:** INSIGNIA  
**Model No.:** NS-AHBTSPORT2  
**HVIN:** NSAHBT2  
**Report Number:** 180207001RFC-1  
**Test Standards:** FCC 47 CFR Part 15 Subpart C  
 RSS-247 Issue 2  
 RSS-Gen Issue 4  
**FCC ID:** 2ALVK-NSAHBT2  
**IC:** 11136A-NSAHBT2  
**Test Result:** PASS  
**Date of Issue:** March 6, 2018

Prepared for:

**Cosonic Intelligent Technologies Co.,Ltd.**  
**5th Floor,1st Building,No.6 South Industry Road Songshan Lake Hi-tech Industrial Development Zone**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**16/F, Block A, Building 6, Baoneng Science and Technology Park,**  
**Qingxiang Road No.1, Longhua New District, Shenzhen, China**  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Tested by: Henry Lu  
 Henry Lu  
 Engineer

Reviewed by: Kevin Liang  
 Kevin Liang  
 Team Leader

Approved by: Jim Long  
 Jim Long  
 Assistant Manager

Date: March 6, 2018



**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

**Version**

Version No.	Date	Description
V1.0	March 6, 2018	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

## CONTENTS

<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
<b>1.1 CLIENT INFORMATION</b> .....	<b>4</b>
<b>1.2 EUT INFORMATION</b> .....	<b>4</b>
1.2.1 GENERAL DESCRIPTION OF EUT .....	4
1.2.2 DESCRIPTION OF ACCESSORIES.....	4
<b>1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD</b> .....	<b>4</b>
<b>1.4 OTHER INFORMATION</b> .....	<b>5</b>
<b>1.5 DESCRIPTION OF SUPPORT UNITS</b> .....	<b>5</b>
<b>1.6 TEST LOCATION</b> .....	<b>5</b>
<b>1.7 TEST FACILITY</b> .....	<b>6</b>
<b>1.8 DEVIATION FROM STANDARDS</b> .....	<b>6</b>
<b>1.9 ABNORMALITIES FROM STANDARD CONDITIONS</b> .....	<b>6</b>
<b>1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER</b> .....	<b>6</b>
<b>1.11 MEASUREMENT UNCERTAINTY</b> .....	<b>6</b>
<b>2. TEST SUMMARY</b> .....	<b>7</b>
<b>3. EQUIPMENT LIST</b> .....	<b>8</b>
<b>4. TEST CONFIGURATION</b> .....	<b>9</b>
<b>4.1 ENVIRONMENTAL CONDITIONS FOR TESTING</b> .....	<b>9</b>
4.1.1 NORMAL OR EXTREME TEST CONDITIONS .....	9
4.1.2 RECORD OF NORMAL ENVIRONMENT.....	9
<b>4.2 TEST CHANNELS</b> .....	<b>9</b>
<b>4.3 EUT TEST STATUS</b> .....	<b>9</b>
<b>4.4 PRE-SCAN</b> .....	<b>10</b>
4.4.1 PRE-SCAN UNDER ALL PACKETS AT MIDDLE CHANNEL.....	10
4.4.2 WORST-CASE DATA PACKETS .....	10
4.4.3 TESTED CHANNEL DETAIL.....	10
<b>4.5 TEST SETUP</b> .....	<b>11</b>
4.5.1 FOR RADIATED EMISSIONS TEST SETUP .....	11
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP .....	11
4.5.3 FOR CONDUCTED RF TEST SETUP .....	12
<b>4.6 SYSTEM TEST CONFIGURATION</b> .....	<b>12</b>
<b>4.7 DUTY CYCLE</b> .....	<b>13</b>
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	<b>14</b>
<b>5.1 REFERENCE DOCUMENTS FOR TESTING</b> .....	<b>14</b>
<b>5.2 ANTENNA REQUIREMENT</b> .....	<b>14</b>
<b>5.3 CONDUCTED PEAK OUTPUT POWER</b> .....	<b>15</b>
<b>5.4 20 dB BANDWIDTH &amp; OCCUPIED BANDWIDTH</b> .....	<b>18</b>
<b>5.5 CARRIER FREQUENCIES SEPARATION</b> .....	<b>21</b>
<b>5.6 NUMBER OF HOPPING CHANNEL</b> .....	<b>23</b>
<b>5.7 DWELL TIME</b> .....	<b>27</b>
<b>5.8 CONDUCTED OUT OF BAND EMISSION</b> .....	<b>31</b>
<b>5.9 RADIATED SPURIOUS EMISSIONS</b> .....	<b>36</b>
<b>5.10 BAND EDGE MEASUREMENTS (RADIATED)</b> .....	<b>40</b>
<b>APPENDIX 1 PHOTOS OF TEST SETUP</b> .....	<b>43</b>
<b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS</b> .....	<b>44</b>

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

<b>Applicant:</b>	Cosonic Intelligent Technologies Co.,Ltd.
<b>Address of Applicant:</b>	5th Floor,1st Building,No.6 South Industry Road Songshan Lake Hi-tech Industrial Development Zone
<b>Manufacturer:</b>	Cosonic Intelligent Technologies Co.,Ltd.
<b>Address of Manufacturer:</b>	5th Floor,1st Building,No.6 South Industry Road Songshan Lake Hi-tech Industrial Development Zone

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

<b>Product Name:</b>	Wireless Sport Earbuds	
<b>Model No.:</b>	NS-AHBTSPORT2	
<b>Trade Mark:</b>	INSIGNIA	
<b>DUT Stage:</b>	Identical Prototype	
<b>EUT Supports Function:</b>	2.4 GHz ISM Band:	Bluetooth V4.1+EDR
<b>Software Version:</b>	V1.1	
<b>Hardware Version:</b>	V0.16	
<b>Sample Received Date:</b>	February 27, 2018	
<b>Sample Tested Date:</b>	February 27, 2018 to March 1, 2018	

#### 1.2.2 Description of Accessories

Battery	
<b>Trade Mark:</b>	VDL
<b>Model No.:</b>	551419
<b>Battery Type:</b>	Lithium-ion Polymer Rechargeable Battery
<b>Rated Voltage:</b>	3.7 Vdc
<b>Rated Capacity:</b>	100 mAh

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

<b>Frequency Range:</b>	2400 MHz to 2483.5 MHz
<b>Bluetooth Version:</b>	Bluetooth V4.1+EDR
<b>Modulation Technique:</b>	Frequency Hopping Spread Spectrum(FHSS)
<b>Type of Modulation:</b>	GFSK, $\pi/4$ DQPSK, 8DPSK
<b>Number of Channels:</b>	79
<b>Channel Separation:</b>	1 MHz
<b>Hopping Channel Type:</b>	Adaptive Frequency Hopping Systems
<b>Antenna Type:</b>	Ceramic Antenna
<b>Antenna Gain:</b>	2.5 dBi
<b>Maximum Peak Power:</b>	4.53 dBm
<b>Normal Test Voltage:</b>	3.7 Vdc

### 1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
$f = 2402 + k \text{ MHz}, k = 0, \dots, 78$	
Note:	
f	is the operating frequency (MHz);
k	is the operating channel.

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	1-DH1	4	27
	1-DH3	11	183
	1-DH5	15	339
$\pi/4$ DQPSK	2-DH1	20	54
	2-DH3	26	367
	2-DH5	30	679
8DPSK	3-DH1	24	83
	3-DH3	27	552
	3-DH5	31	1021

### 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	Lenovo	E450	SL10G10780	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	UnionTrust
2	USB Cable	USB	0.5 Meter	UnionTrust

### 1.6 TEST LOCATION

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109  
 Telephone: +86 (0) 755 2823 0888  
 Fax: +86 (0) 755 2823 0886

## 1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

**CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

**IC-Registration No.: 21600-1**

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

**A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**FCC Accredited Lab.**

Designation Number: CN1194  
Test Firm Registration Number: 259480

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

## 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

## 2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) RSS-Gen Issue 4, Section 8.3	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 4, Section 8.8	ANSI C63.10-2013	N/A(See Note 1, 2)
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) RSS-247 Issue 2, Section 5.4(b)	ANSI C63.10-2013	PASS
20 dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 2, Section 5.1(a)	ANSI C63.10-2013	PASS
Occupied Bandwidth	RSS-Gen section 6.6	RSS-Gen section 6.6	PASS
Carrier Frequencies Separation	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 2, Section 5.1(b)	ANSI C63.10-2013	PASS
Number of Hopping Channel	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1) RSS-247 Issue 2, Section 5.1(d)	ANSI C63.10-2013	PASS
Dwell Time	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1) RSS-247 Issue 2, Section 5.1(d)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	FCC 47 CFR Part 15 Subpart C Section 15.247(a)(1)(g)(h) RSS-247 Issue 2, Section 5.1	ANSI C63.10-2013	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5	ANSI C63.10-2013	PASS
Radiated Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-Gen Issue 4, Section 6.13/8.9/8.10	ANSI C63.10-2013	PASS
Band Edge Measurement	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-247 Issue 2, Section 5.5	ANSI C63.10-2013	PASS
<b>Note:</b>			
1) N/A: In this whole report not application.			
2) Bluetooth does not work in charging mode.			

### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 20, 2015	Dec. 19, 2018
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Dec. 10, 2017	Dec. 10, 2018
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Dec.17, 2017	Dec. 17, 2018
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Dec.10, 2017	Dec. 10, 2018
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	Dec. 17, 2017	Dec. 17, 2018
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Band Rejection Filter (2400MHz~2500MHz)	Micro-Tronics	BRM50702	G248	Jun. 21, 2017	Jun. 20, 2018
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Dec. 10, 2017	Dec. 10, 2018
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Dec. 10, 2017	Dec. 10, 2018
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	Dec. 10, 2017	Dec. 10, 2018
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Dec. 10, 2017	Dec. 10, 2018
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Dec. 10, 2017	Dec. 10, 2018
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	Dec. 10, 2017	Dec. 10, 2018



## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	3.7	20 to 75
<b>Remark:</b>			
1) NV: Normal Voltage; NT: Normal Temperature			

#### 4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (Kpa)	Tested by
AC Power Line Conducted Emission	23	47	101.2	Fire huo
Conducted Peak Output Power	23	47	101.2	Fire huo
20 dB Bandwidth	23	47	101.2	Fire huo
Carrier Frequencies Separation	23	47	101.2	Fire huo
Number of Hopping Channel	23	47	101.2	Fire huo
Dwell Time	23	47	101.2	Fire huo
Conducted Out of Band Emission	23	47	101.2	Fire huo
Radiated Emissions	23	47	101.2	Fire huo
Band Edge Measurement	23	47	101.2	Fire huo

### 4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
GFSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
$\pi$ /4DQPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
8DPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz

### 4.3 EUT TEST STATUS

Type of Modulation	Tx Function	Description
GFSK/ $\pi$ /4DQPSK/ 8DPSK	1Tx	<ol style="list-style-type: none"> <li>Keep the EUT in continuously transmitting with Modulation test single</li> <li>Keep the EUT in continuously transmitting with Modulation test Hopping Frequency.</li> </ol>

### 4.4 PRE-SCAN

#### 4.4.1 Pre-scan under all packets at middle channel

Conducted Average Power (dBm) for packets									
Type of Modulation	GFSK			$\pi/4$ DQPSK			8DPSK		
Packets	1-DH1	1-DH3	1-DH5	2-DH1	2-DH3	2-DH5	3-DH1	3-DH3	3-DH5
Power (dBm)	-1.65	-1.23	<b>1.22</b>	-1.61	-0.68	<b>1.17</b>	-1.55	-0.71	<b>1.57</b>

#### 4.4.2 Worst-case data packets

Type of Modulation	Worst-case data rates
GFSK	1-DH5
$\pi/4$ DQPSK	2-DH5
8DPSK	3-DH5




#### 4.4.3 Tested channel detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data packets and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.


Type of Modulation	GFSK			$\pi/4$ DQPSK			8DPSK		
Data Packets	1-DH1	1-DH3	1-DH5	2-DH1	2-DH3	2-DH5	3-DH1	3-DH3	3-DH5
Available Channel	0 to 78								
Test Item	Test channel and choose of data packets								
AC Power Line Conducted Emission	N/A								
Conducted Peak Output Power	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
20 dB Bandwidth	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Carrier Frequencies Separation	Frequency Hopping Channel 0 to 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Number of Hopping Channel	Frequency Hopping Channel 0 to 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Dwell Time	Channel 39								
	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Conducted Out of Band Emission	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Radiated Emissions	Channel 0 & 39 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Band Edge Measurements (Radiated)	Channel 0 & 78								
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Remark:									
1. The mark " <input checked="" type="checkbox"/> " means is chosen for testing;									
2. The mark " <input type="checkbox"/> " means is not chosen for testing.									

### 4.5 TEST SETUP


#### 4.5.1 For Radiated Emissions test setup

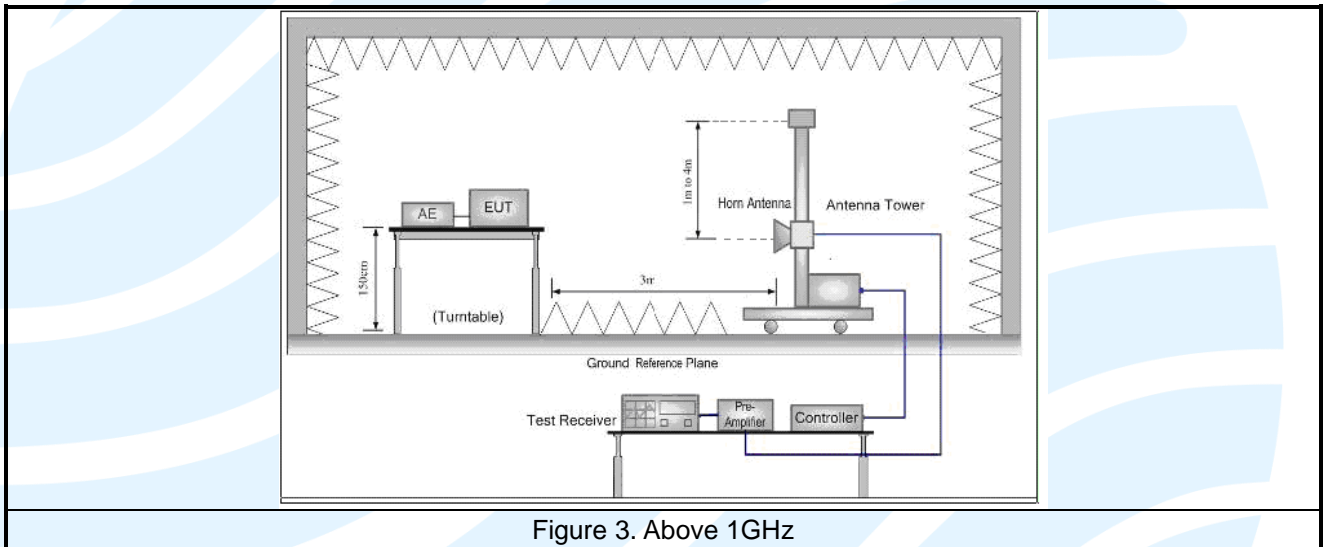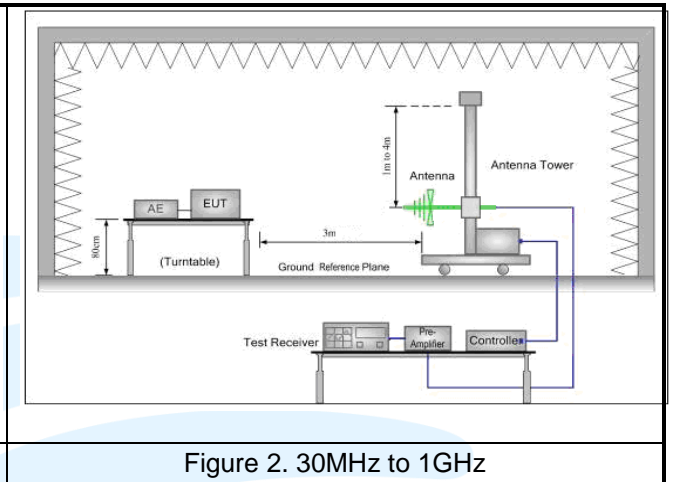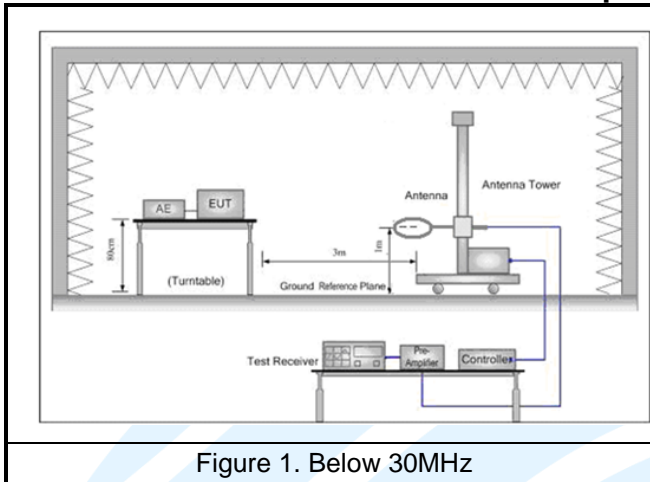

#### 4.5.2 For Conducted Emissions test setup

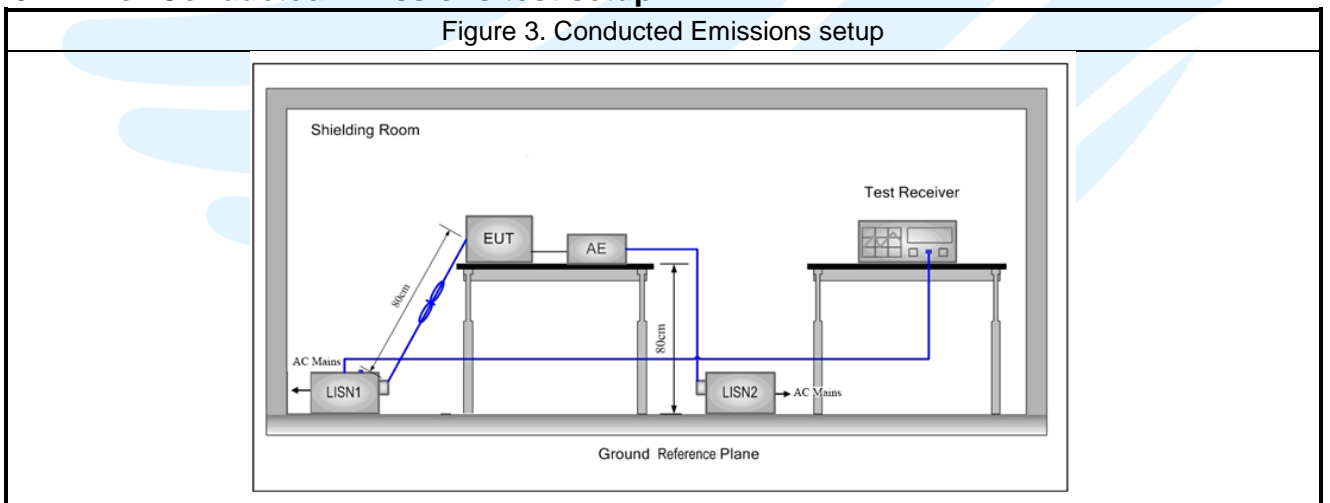

4.5.3 For Conducted RF test setup

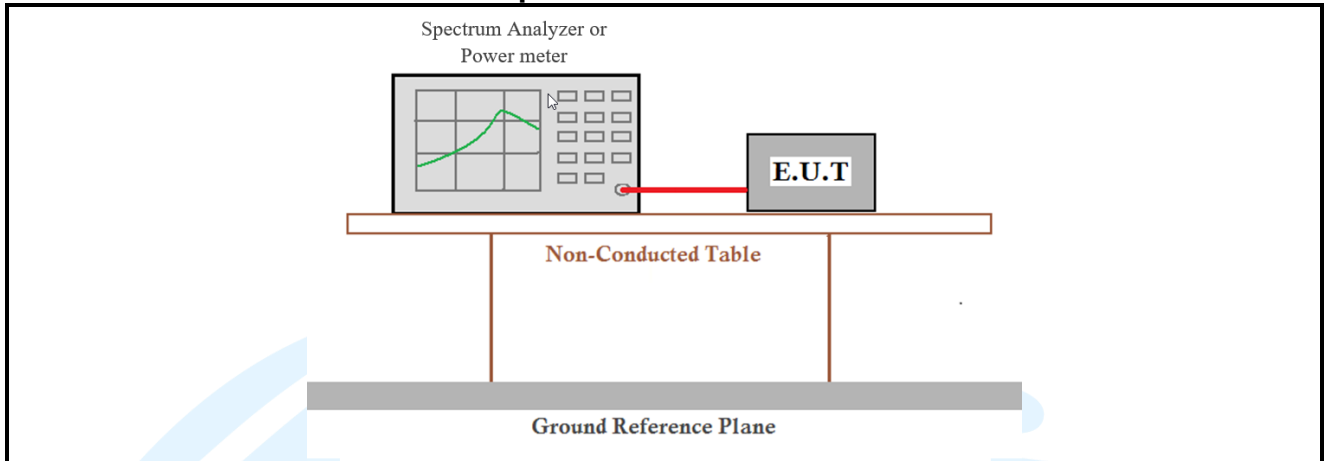

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.7Vdc rechargeable Li-on battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	1TX	Chain 0	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.


### 4.7 DUTY CYCLE

Type of Modulation	Packets	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
GFSK	3-DH5	2.887	3.751	0.77	76.97	1.14	0.35	-2.27

**Remark:**

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = 10 \* log(1/ Duty cycle);
- 3) Average factor = 20 log<sub>10</sub> Duty Cycle.

The test plot as follows

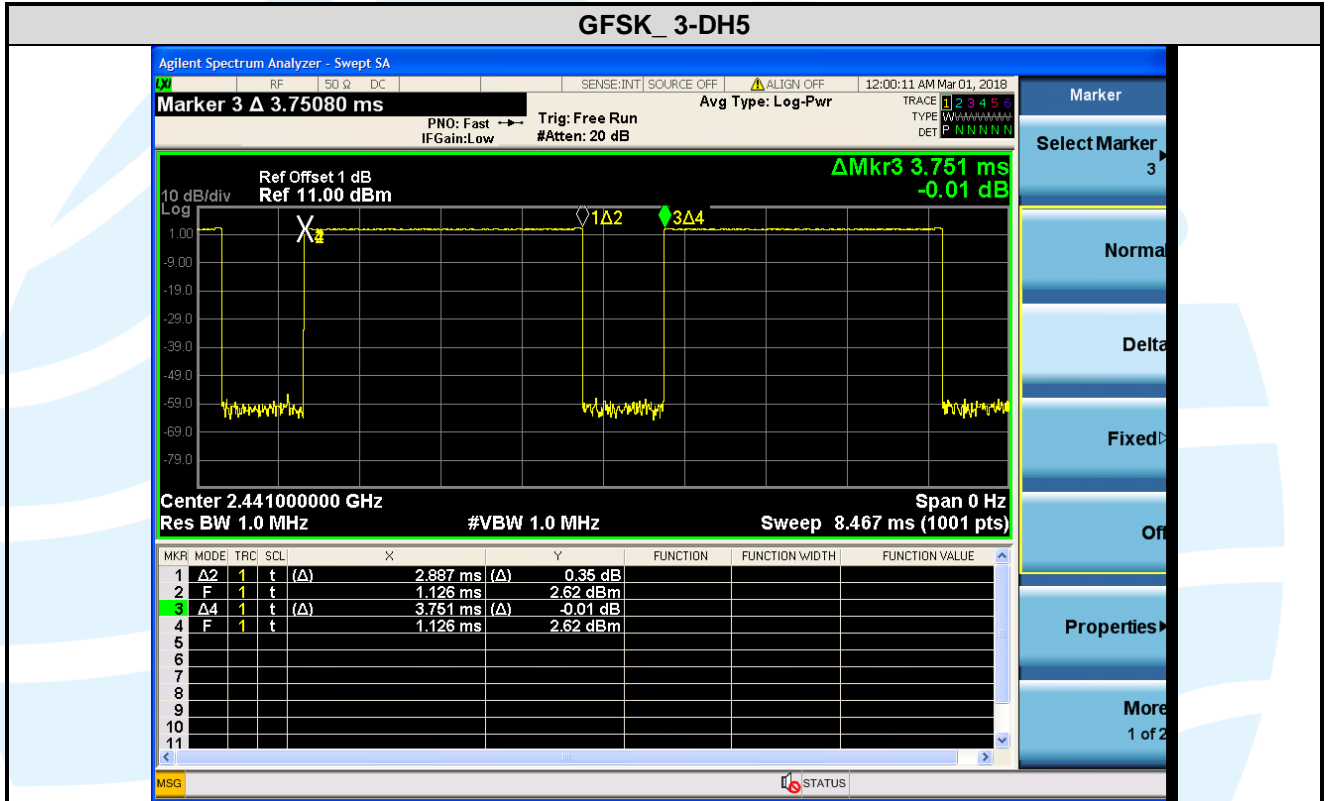

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
4	RSS-Gen Issue 4	General Requirements for Compliance of Radio Apparatus
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### 5.2 ANTENNA REQUIREMENT

Standard Requirement
<p><b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(b) (4) requirement:</b> The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p><b>RSS-Gen Issue 4, Section 8.3 requirement:</b> According to RSS-Gen Issue 4, section 8.3, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns.</p>
<p><b>EUT Antenna:</b> Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 2.5 dBi.</p>

### 5.3 CONDUCTED PEAK OUTPUT POWER

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)  
 RSS-247 Issue 2, Section 5.4(b)

**Test Method:** ANSI C63.10-2013 Section 7.8.5

**Limit:** For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.  
 Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

- a) Use the following spectrum analyzer settings:
  - 1) Span: Approximately 5 x 20 dB bandwidth, centered on a hopping channel.
  - 2) RBW > 20 dB bandwidth of the emission being measured.
  - 3) VBW ≥ RBW.
  - 4) Sweep: Auto.
  - 5) Detector function: Peak.
  - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Transmitter mode

**Test Results:** Pass

**Test Data:**

Type of Modulation	Peak Output Power (dBm)			Peak Output Power (mW)		
	Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78
GFSK	3.38	3.315	3.865	2.18	2.15	2.44
π/4 DQPSK	3.958	3.583	4.308	2.49	2.28	2.70
8DPSK	3.974	3.459	<b>4.531</b>	2.50	2.22	<b>2.84</b>




Note: The antenna gain of 2.5 dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.

For maximum e.i.r.p.



Type of Modulation	e.i.r.p (dBm)			e.i.r.p (mW)		
	Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78
GFSK	5.88	5.82	6.37	3.87	3.82	4.33
π/4 DQPSK	6.46	6.08	6.81	4.42	4.06	4.80
8DPSK	6.47	5.96	<b>7.03</b>	4.44	3.94	<b>5.05</b>
<b>Limit (mW)</b>	4000					
<b>Pass/Fail</b>	Pass					

Note: e.i.r.p = maximum peak conducted output power + antenna gain

The test plot as follows:

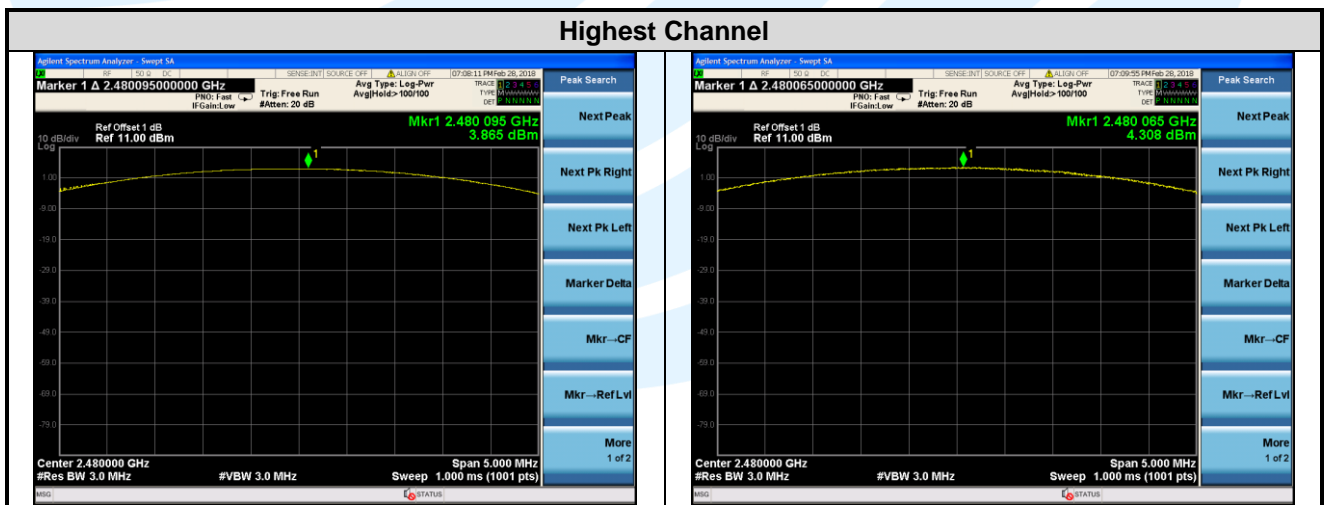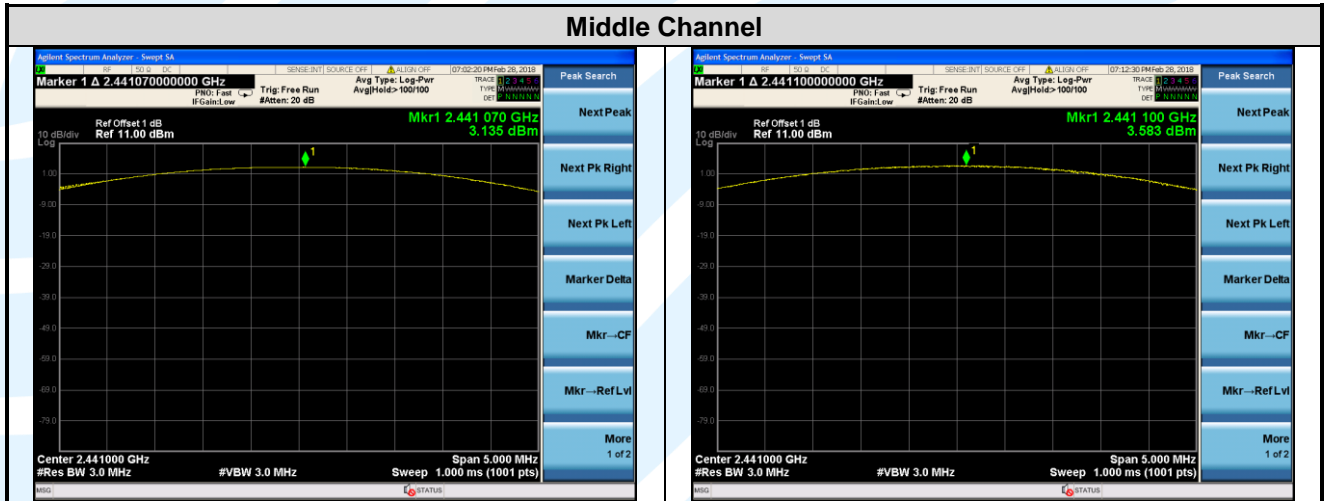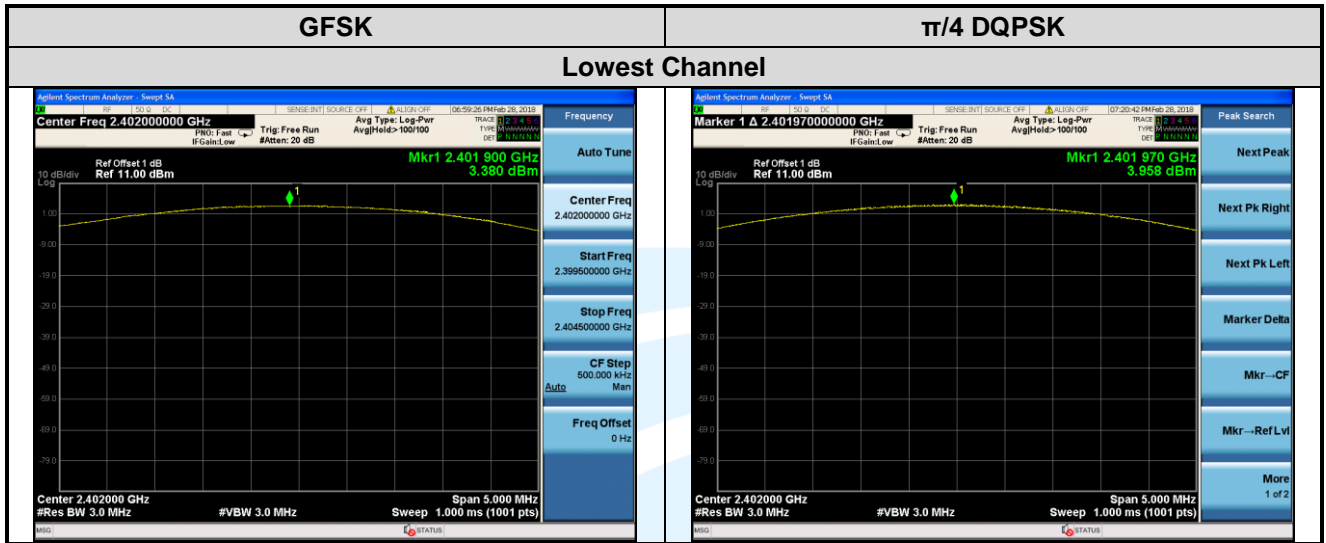



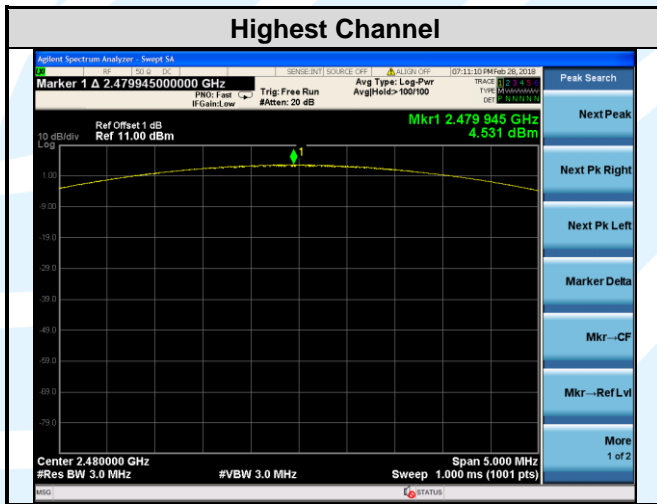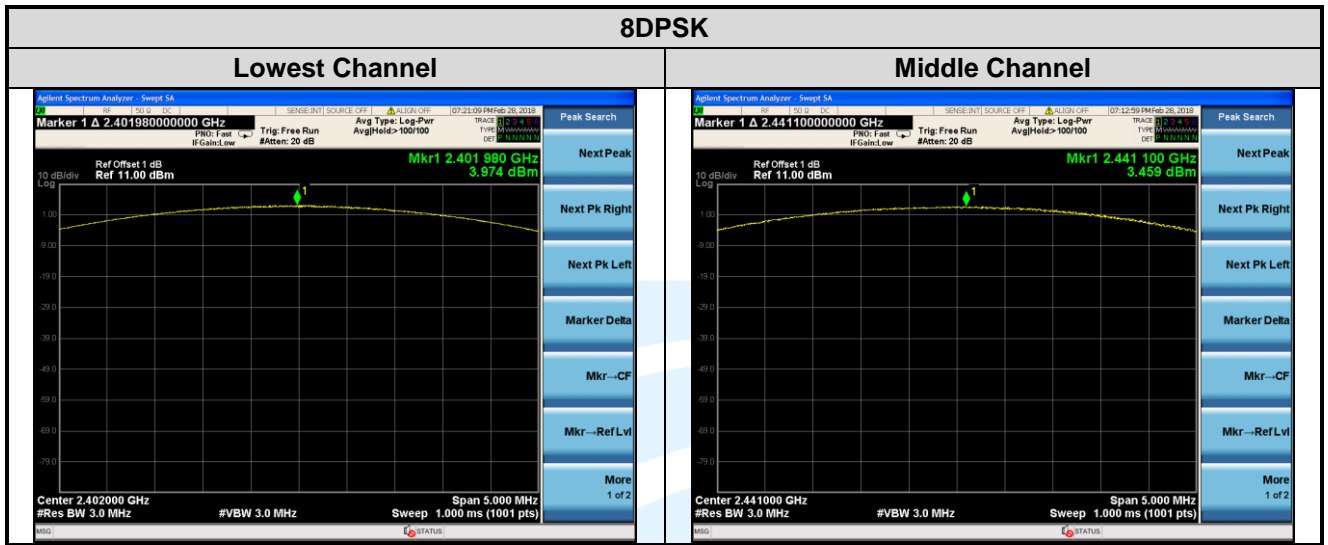

### 5.420 DB BANDWIDTH & OCCUPIED BANDWIDTH

FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)

- Test Requirement:** RSS-247 Issue 2, Section 5.1(a)  
RSS-Gen section 6.6
- Test Method:** ANSI C63.10-2013 Section 6.9.2
- Limit:** None; for reporting purposes only.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.  
Use the following spectrum analyzer settings:


- a) Span = approximately 2 to 5 times the OBW, centered on a hopping channel.
- b) RBW = 1% to 5% of the OBW.
- c) VBW ≥ 3 x RBW
- d) Sweep = auto;
- e) Detector function = peak
- f) Trace = max hold
- g) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.



Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Mode:** Transmitter mode
- Test Results:** Pass
- Test Data:**

Type of Modulation	20 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
	Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78
GFSK	1.033	1.038	1.034	0.89916	0.90122	0.90115
π/4 DQPSK	1.287	1.290	1.288	1.1661	1.1694	1.1678
8DPSK	1.288	1.307	1.291	1.1732	1.1841	1.1746

The test plot as follows:

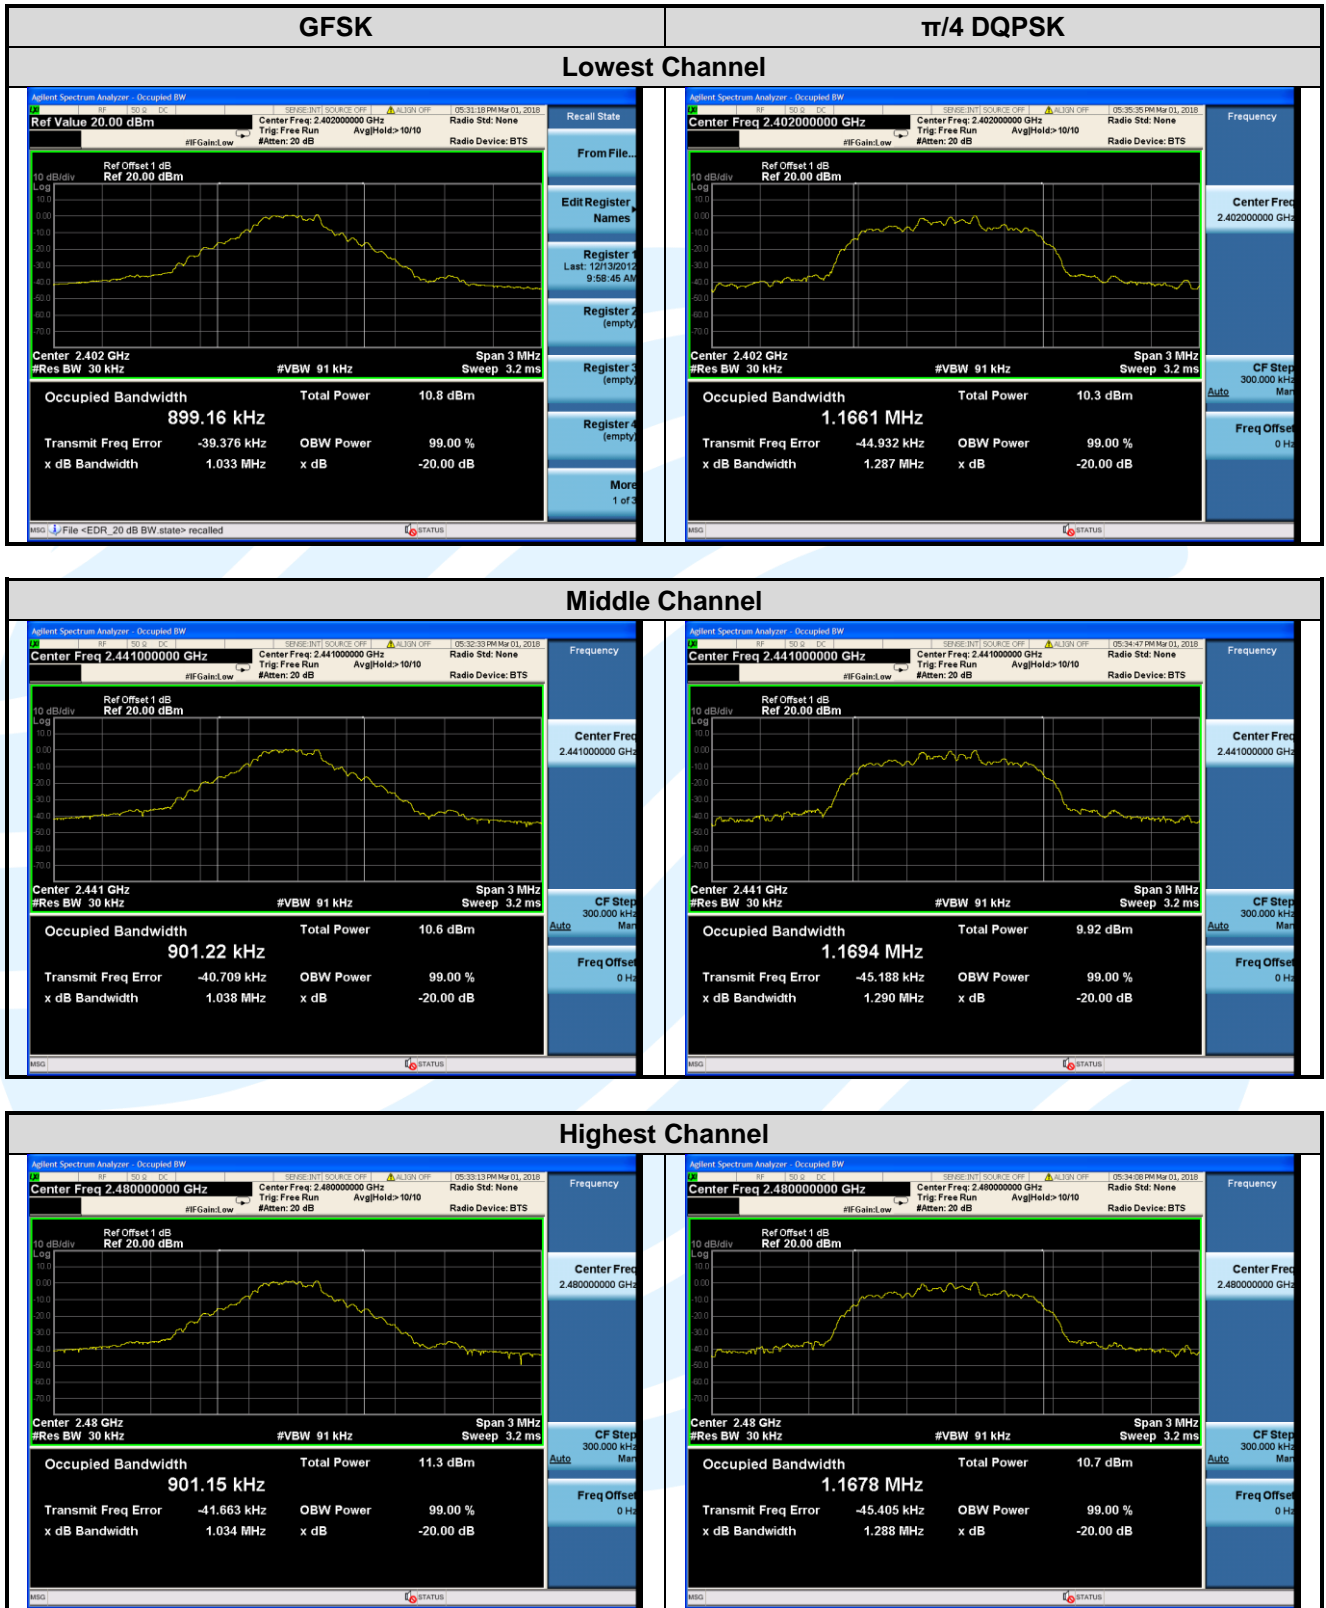

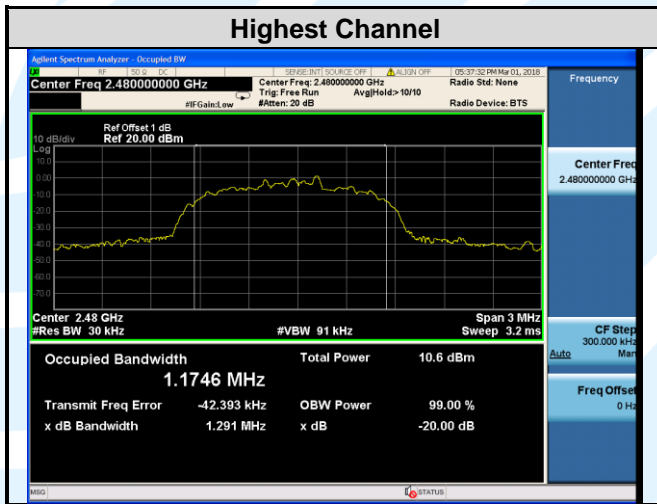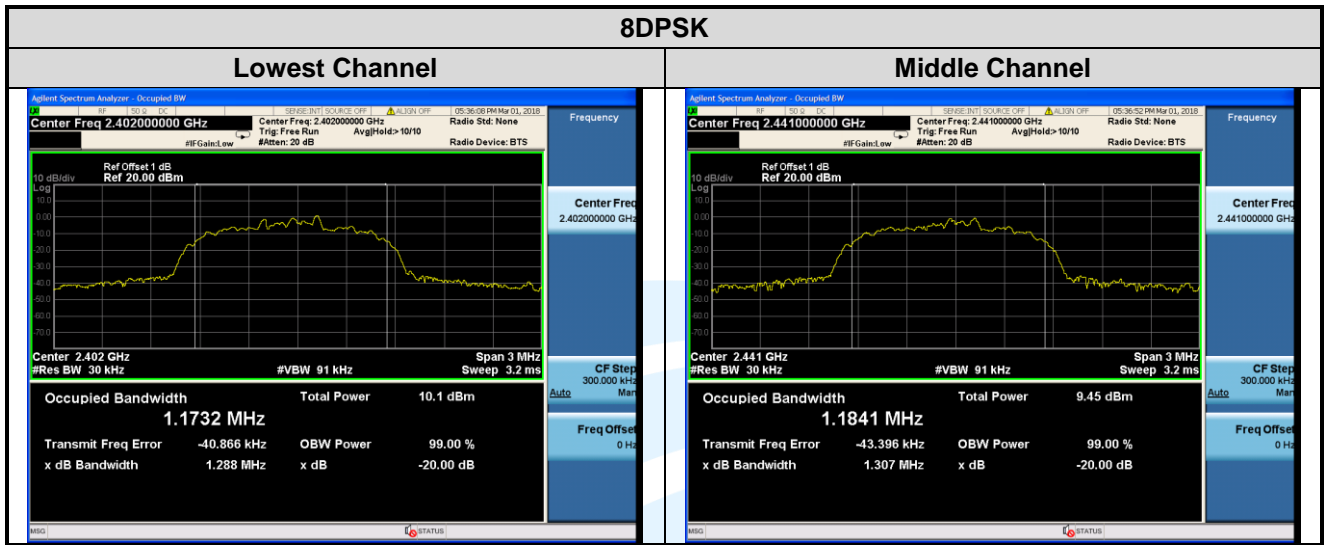

## 5.5 CARRIER FREQUENCIES SEPARATION

- Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)  
RSS-247 Issue 2, Section 5.1(b)
- Test Method:** ANSI C63.10-2013 Section 7.8.2
- Limit:** Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.  
Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
- Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.  
Use the following spectrum analyzer settings:
- a) Span: Wide enough to capture the peaks of two adjacent channels.
  - b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
  - c) Video (or average) bandwidth (VBW)  $\geq$  RBW.
  - d) Sweep: Auto.
  - e) Detector function: Peak.
  - f) Trace: Max hold.
  - g) Allow the trace to stabilize.
  - h) Use the marker-delta function to determine the separation between the peaks of the adjacent channels.
- Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
- Test Setup:** Refer to section 4.5.3 for details.
- Instruments Used:** Refer to section 3 for details
- Test Mode:** Hopping Frequencies Transmitter mode
- Test Results:** Pass
- Test Data:**

Type of Modulation	Adjacent Channel Separation (MHz)		Minimum Limit (MHz)
	Channel 39	Channel 0	Channel 0
GFSK	1.000		0.689
$\pi/4$ DQPSK	1.000		0.858
8DPSK	1.000		0.859

Note: The minimum limit is two-third 20 dB bandwidth.

The test plot as follows:

