

Material Approval

Acknowledgement number: _____

supplier: Shenzhen Feimin Technology Co., Ltd.Project : FM-S855-MW-P6Material specifications: FPC antenna +40mm coaxial cable, IPEX-1Antenna type: FPC antennaAntenna model : MW-P6

Remark:

Supplier material production confirmation: (Must be stamped)

Formulate	Audit	approve	stamp
YangXuan	Xia Xingxi	Ma Dongdong	

Yundong Creative Approval:

Take charge of	Audit	Approved	QC	stamp

Table of contents

1. Project Information.....	4
1.1. Appearance and Dimensions.....	4
2. Electrical Characteristics	5
2.1. Test Environment Conditions	5
2.2. Measurement method.....	5
2.2.1. VSWR.....	5
2.2.2. Log Mag	6
2.3. Efficiency and Gain.....	6
2.3.1. Test system	6
2.3.2. No-source test data	7
2.3.3. Antenna Radiation Pattern	7
3. Notes	9
4. Product packaging specification.....	9

Revision history

Version	date	state
A1	2022-10-11	First edition

change content:

First change:

Before the change: (If necessary, please add the corresponding picture, the change details should be clearly described here)

After the change: (If necessary, please add the corresponding picture, the change details should be clearly described here)

1. Project Information

1		2		3		4		5		6	
环保要求: ☒ ROHS ☒ REACH ☐ 无											

2. Electrical Characteristics


2.1. Test Environment Conditions

Temperature	Ordinary Temperature (5 to 35℃)
Humidity	Ordinary Humidity (25 to 85% RH)

2.2. Measurement method




2.2.1. VSWR

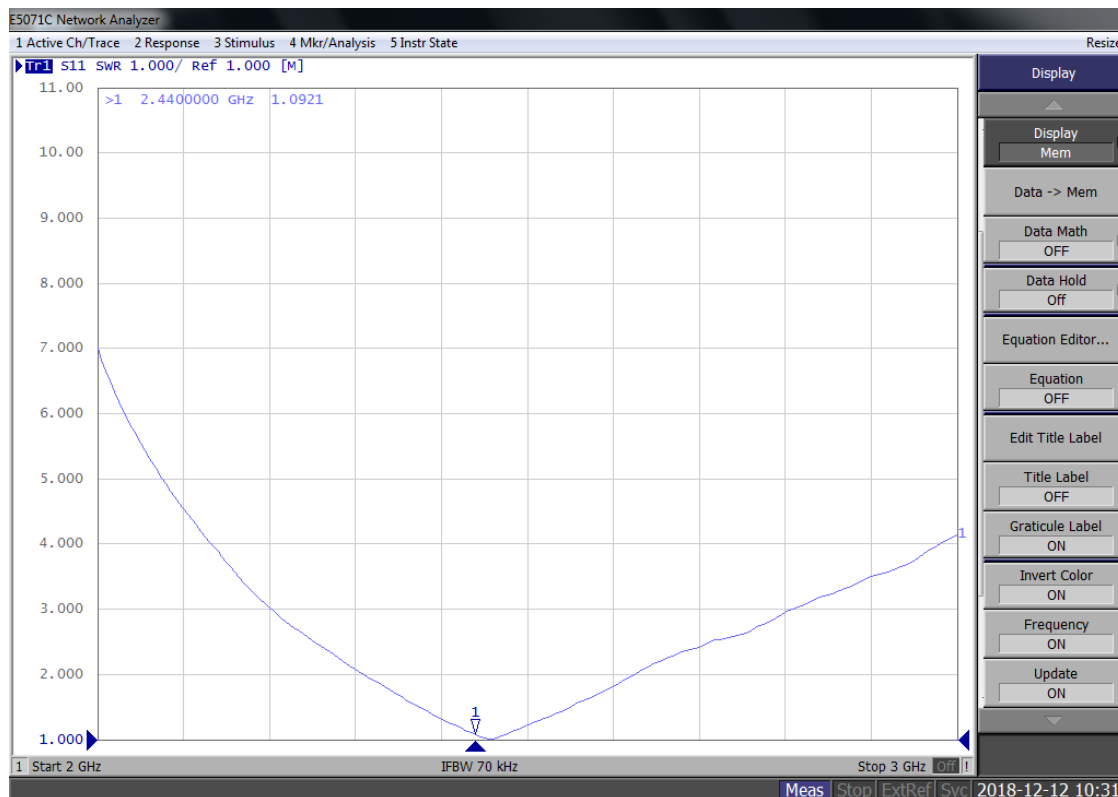


ANTENNA SPECIFICATION

2.2.2. Log Mag

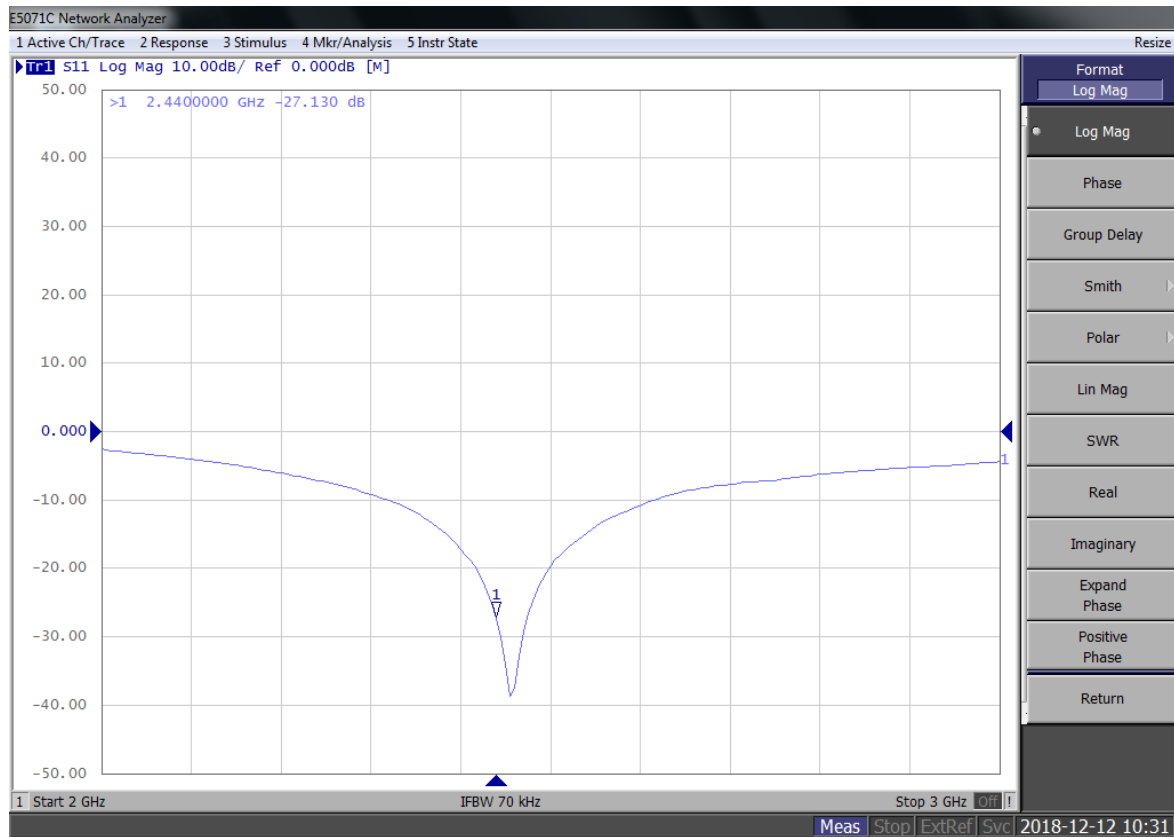

2.3. Efficiency and Gain

2.3.1. Test system

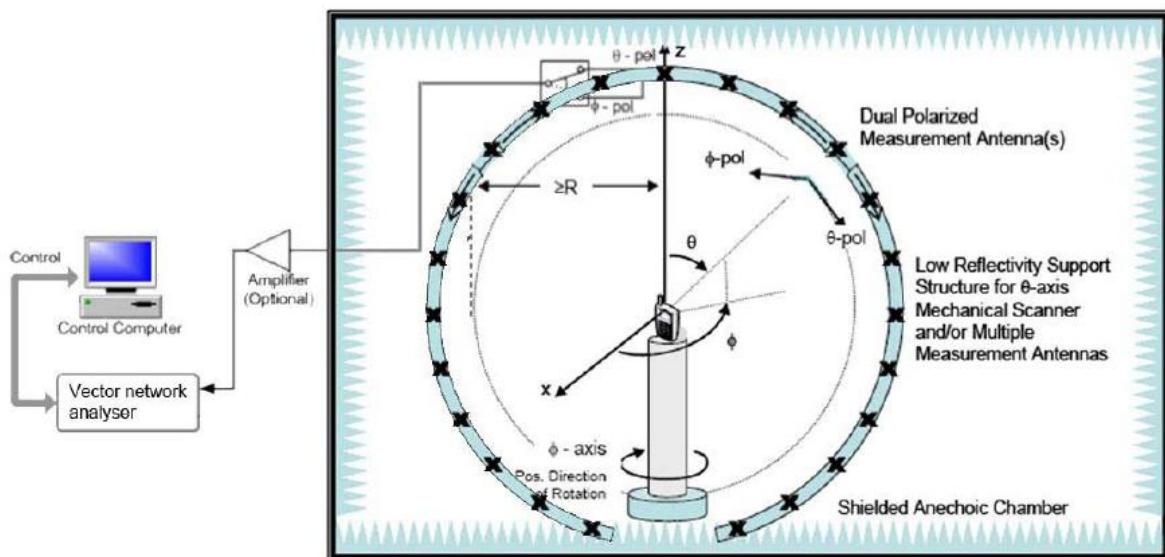


ANTENNA SPECIFICATION


2.3.2. No-source test data

Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400 MHz	0.51	23.7
2410 MHz	0.36	24.07
2420 MHz	0.73	25.68
2430 MHz	0.88	29.12
2440 MHz	1.42	33.38
2450 MHz	1.51	31.81
2460 MHz	1.27	29.32
2470 MHz	1.05	25.79
2480 MHz	0.51	21.18
2490 MHz	0.49	20.26
2500 MHz	0.32	19.32


2.3.3. Antenna Radiation Pattern

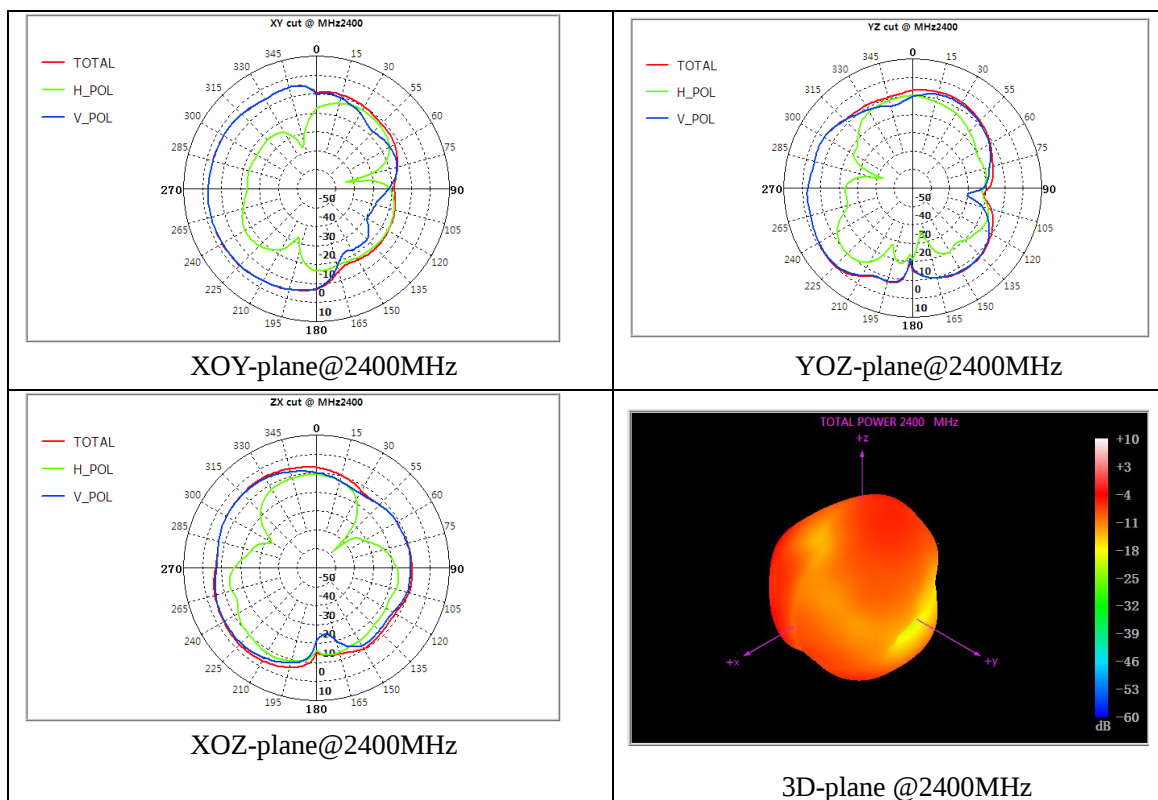


ANTENNA SPECIFICATION

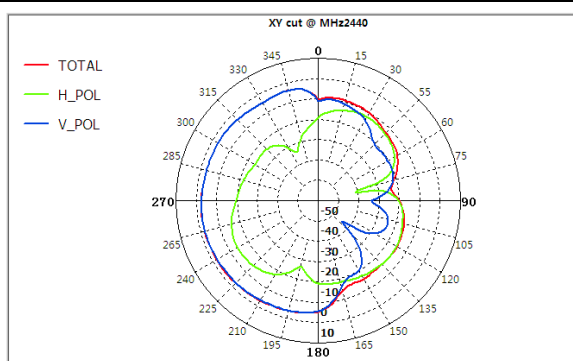


XOY-plane@2440MHz

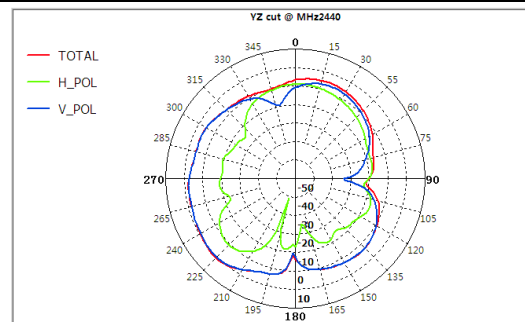


YOZ-plane@2440MHz

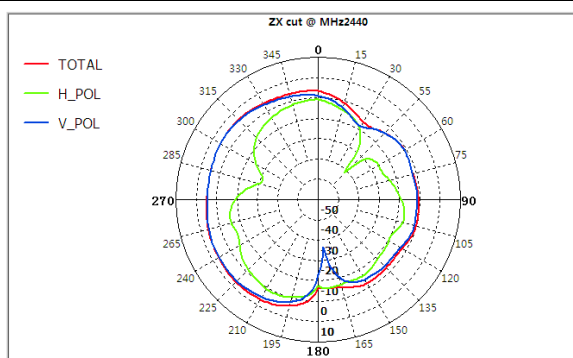


XOZ-plane@2440MHz

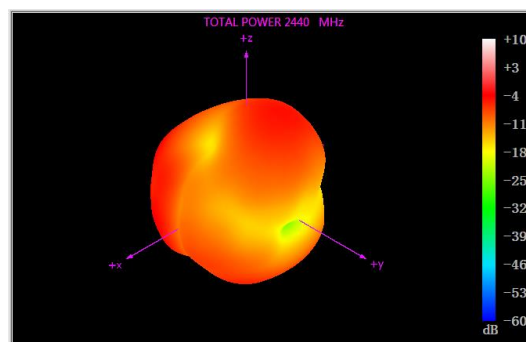


3D-plane @2440MHz

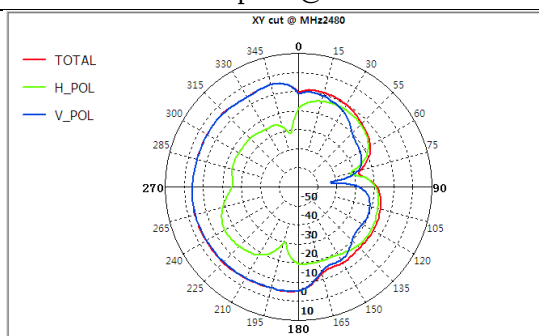


XOY-plane@2480MHz

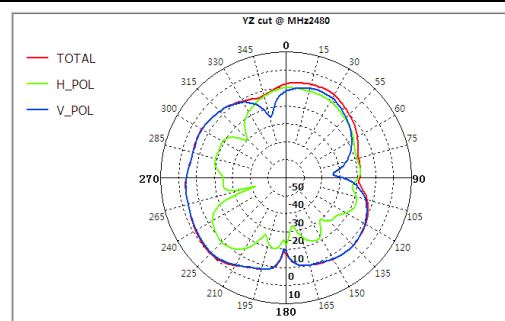

YOZ-plane@2480MHz

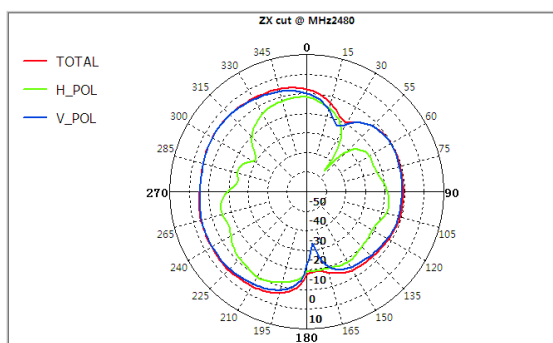

XOZ-plane@2480MHz

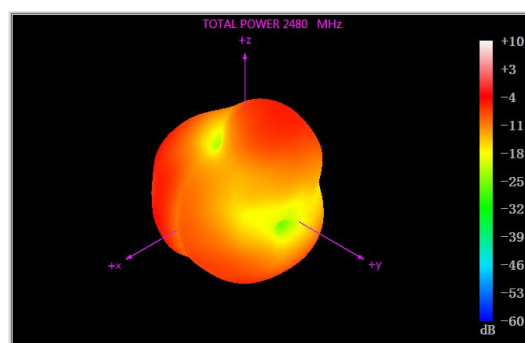

3D-plane @2480MHz



ANTENNA SPECIFICATION

3. Notes

1、Be careful not to be too close to the metal part during installation to avoid affecting the antenna performance.

2、This antenna is only suitable for this model. The position of the antenna cannot be changed at will. If it is used on other machines, the effect will deteriorate, which has nothing to do with our company.

4. Product packaging specification

Antenna type: FPC antenna

Antenna form: FPC+coaxial cable

1、Labeling requirements

The inner label is 7CM long and 4CM wide

The outer label is 7CM long, about 5CM

supplier	Shenzhen Feimin Technology Co., Ltd.
product name	MW-P6
Material coding	FM-S855-MW-P6
Specifications	*****
quantity	***PCS

client's name			
supplier	Shenzhen Feimin Technology Co., Ltd.		
Order number	*****		
Material coding	*****		
Specification model	*****	product name	*****
quantity	*****PCS	QC:	
spare parts	***PCS	Notes	

2、Packing process

Job description:

1. The product __PCS is packed in PE open pockets, and the inner label is affixed to each pouch; Put the __ small bag into the big PE sealing tape bag, except the tail number and spare parts.
2. Each box contains __ large bags of products, and the boxes are sealed with adhesive tape in the shape of "I".
3. Paste the outer label on the upper right corner of the box, and there must be no missing or wrong filling.

3、Precautions

When packing the box, please pay attention to lay the antenna flat and avoid serious shaking after sealing. If the whole box is not filled, it needs to be filled with foam to avoid transportation Circumstances that caused product defects in the process.

