

TEST REPORT

Applicant: Shenzhen HighGreat Innovation Technology Development Co., Ltd.

Address of Applicant: 2/F, Building 6, Yuanlingzi Industrial Zone Hengping Road, Yuanshan Street, Longgang District, Shenzhen, China

Manufacturer/Factory: Shenzhen HighGreat Innovation Technology Development Co., Ltd.

Address of Manufacturer/Factory: 2/F, Building 6, Yuanlingzi Industrial Zone Hengping Road, Yuanshan Street, Longgang District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: RID Module

Model No.: RID-BC-001, RID-BC-001A

Trade Mark: N/A

FCC ID: 2ALYR-RIDBC001

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: May 07, 2024

Date of Test: May 08, 2024-June 24, 2024

Date of report issued: June 24, 2024

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Luo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	June 24, 2024	Original

Prepared By:



Project Engineer

Date:

June 24, 2024

Check By:



Reviewer

Date:

June 24, 2024

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	7
5.7 TEST LOCATION	7
5.8 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED OUTPUT POWER	11
7.3 CHANNEL BANDWIDTH	12
7.4 POWER SPECTRAL DENSITY	13
7.5 SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS	14
7.5.1 Conducted Emission Method	14
7.5.2 Radiated Emission Method	15
8 TEST SETUP PHOTO	28
9 EUT CONSTRUCTIONAL DETAILS	28

4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	FCC part 15.207	N/A
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass
Channel Bandwidth & 99% OCB	FCC part 15.247 (a)(2)	Pass
Power Spectral Density	FCC part 15.247 (e)	Pass
Band Edge	FCC part 15.247(d)	Pass
Spurious Emission	FCC part 15.205/15.209	Pass

Remark: Test according to ANSI C63.10:2013

Pass: The EUT complies with the essential requirements in the standard.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)
RF Conducted Measurement	9KHz~26.5GHz	1.2dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	RID Module
Model No.:	RID-BC-001, RID-BC-001A
Test Model No.:	RID-BC-001
Remark: hardware supply circuit is different, more detail please refer to Different letter	
Test sample(s) ID:	GTSL2024050036-1
Sample(s) Status	Engineer sample
S/N:	cdshEBT502405310001
Operation Frequency:	802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(HT20): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	FPC Antenna
Antenna gain:	ANT 1: 3.97dBi ANT 2: 4.01dBi
Power supply:	Model RID-BC-001: DC 3.8-5.5V Model RID-BC-001A: DC 3.3V

Remark:

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.
3. All antennas have test, only the worst case ANT 2 report.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	--

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)
Data rate	1Mbps	6Mbps	6.5Mbps

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
Lenovo	Notebook PC	E40-80	N/A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **ISED—Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	June 22, 2024	June 21, 2027
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 11, 2024	April 10, 2025
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 19, 2023	March 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	April 17, 2023	April 16, 2025
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 11, 2024	April 10, 2025
8	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 13, 2023	Nov.12, 2024
9	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 11, 2024	April 10, 2025
10	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 11, 2024	April 10, 2025
11	Horn Antenna (18-26.5GHz)	/	UG-598A/U	GTS664	Oct. 29, 2023	Oct. 28, 2024
12	Horn Antenna (26.5-40GHz)	A.H Systems	SAS-573	GTS665	Oct. 29, 2023	Oct. 28, 2024
13	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	March 12, 2024	March 11, 2025
14	Amplifier	/	LNA-1000-30S	GTS650	April 11, 2024	April 10, 2025
15	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 08, 2023	Nov.07, 2024
16	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	April 11, 2024	April 10, 2025
17	Thermo meter	JINCHUANG	GSP-8A	GTS643	April 18, 2024	April 17, 2025
18	RE cable 1	GTS	N/A	GTS675	July 31. 2023	July 30. 2024
19	RE cable 2	GTS	N/A	GTS676	July 31. 2023	July 30. 2024
20	RE cable 3	GTS	N/A	GTS677	July 31. 2023	July 30. 2024
21	RE cable 4	GTS	N/A	GTS678	July 31. 2023	July 30. 2024
22	RE cable 5	GTS	N/A	GTS679	July 31. 2023	July 30. 2024
23	RE cable 6	GTS	N/A	GTS680	July 31. 2023	July 30. 2024
24	RE cable 7	GTS	N/A	GTS681	July 31. 2023	July 30. 2024
25	RE cable 8	GTS	N/A	GTS682	July 31. 2023	July 30. 2024

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 11, 2024	April 10, 2025
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 11, 2024	April 10, 2025
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	April 11, 2024	April 10, 2025
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 11, 2024	April 10, 2025
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 11, 2024	April 10, 2025
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 11, 2024	April 10, 2025
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 11, 2024	April 10, 2025
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 11, 2024	April 10, 2025
9	Thermo meter	JINCHUANG	GSP-8A	GTS641	April 18, 2024	April 17, 2025


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	April 18, 2024	April 17, 2025

7 Test results and Measurement Data

7.1 Antenna requirement


Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is FPC antenna, reference to the appendix II for details	

7.2 Conducted Output Power

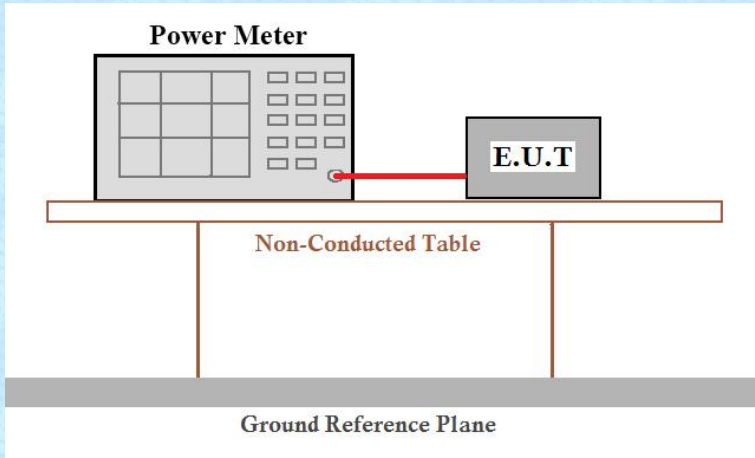Test Requirement :	FCC Part15 C Section 15.247 (b)(3)
Test Method :	KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	30dBm The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Test setup:	 The diagram illustrates the test setup. A 'Power Meter' is connected to an 'E.U.T' (Equipment Under Test) via a red cable. Both the Power Meter and the E.U.T are placed on a 'Non-Conducted Table'. This table is supported by two vertical legs and sits on a 'Ground Reference Plane'.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for WIFI 2.4G.

7.3 Channel Bandwidth

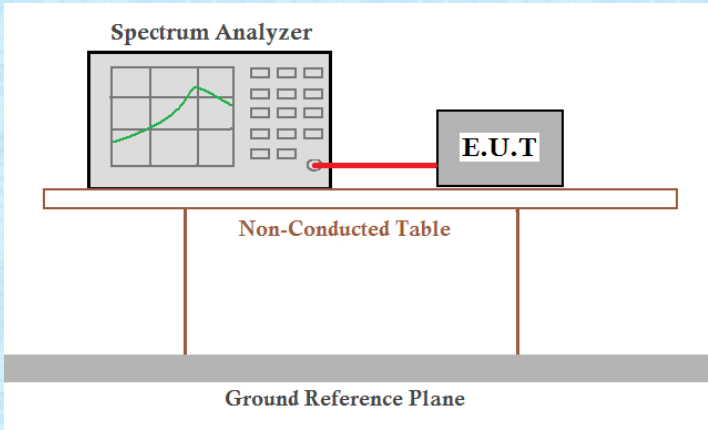Test Requirement :	FCC Part15 C Section 15.247 (a)(2)
Test Method :	KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	>500KHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green signal curve, is connected by a red cable to a device labeled 'E.U.T'. Both the analyzer and the device are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs and rests on a 'Ground Reference Plane', which is represented by a thick grey horizontal bar at the bottom of the setup area.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 2.4G.


7.4 Power Spectral Density

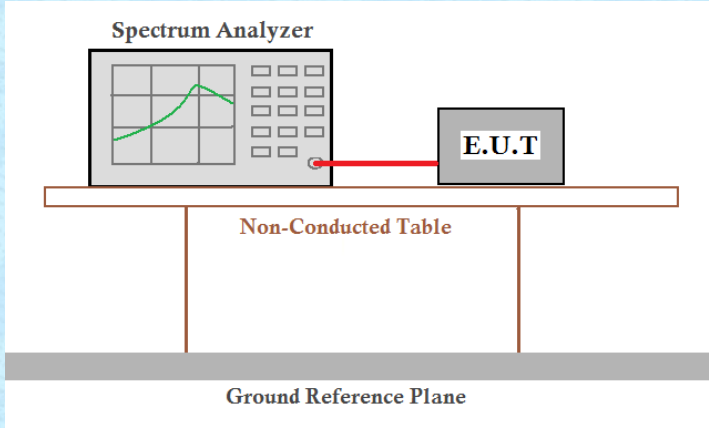Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	8dBm/3kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve, is connected to an E.U.T. (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a table labeled 'Non-Conducted Table'. This table is supported by two vertical legs and sits on a thick grey horizontal bar labeled 'Ground Reference Plane'.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI 2.4G.


7.5 Spurious Emission in Non-restricted & restricted Bands


7.5.1 Conducted Emission Method

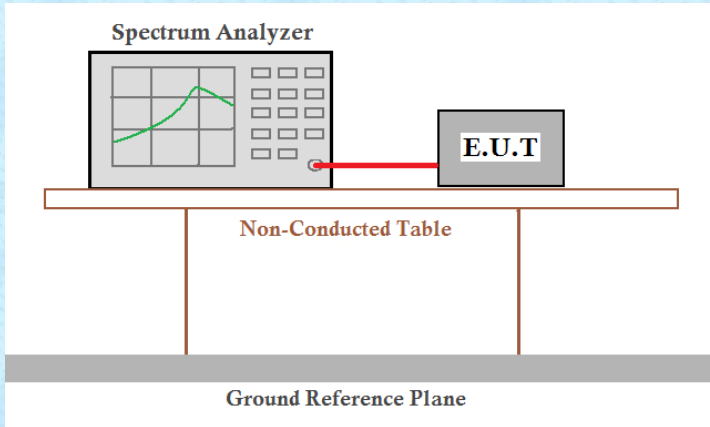Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for WIFI 2.4G.

7.5.2 Radiated Emission Method

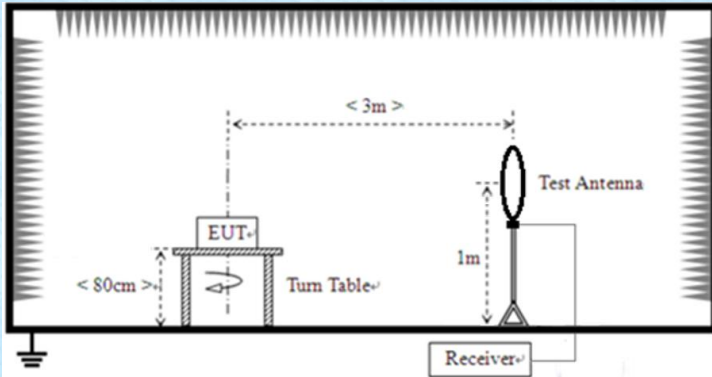Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
	Note: For Duty cycle ≥ 98%, average detector set as above For Duty cycle < 98%, average detector set as below: VBW ≥ 1 / T				
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	PK/QP/A V	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
For radiated emissions from 30MHz to1GHz					

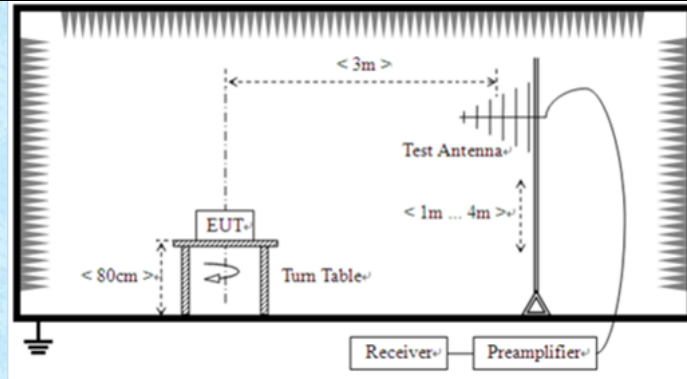

For radiated emissions above 1GHz

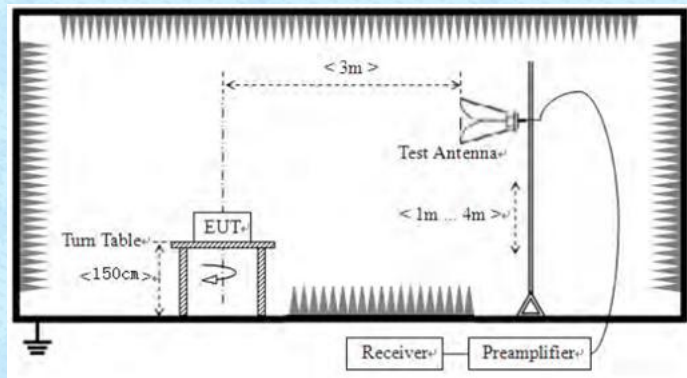

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:

Refer to section 6.0 for details

Test mode:

Refer to section 5.2 for details

Test environment:

Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
--------	-------	---------	-----	---------	----------

Test voltage:

DC 5V

Test results:

Pass

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement data:**■ 9kHz~30MHz**


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

■ Below 1GHz


Pre-scan all test modes, found worst case at 802.11g 2462MHz, and so only show the test result of it.

Below 1GHz

Test mode:	Transmitting mode	Antenna Polarity:	Horizontal
------------	-------------------	-------------------	------------

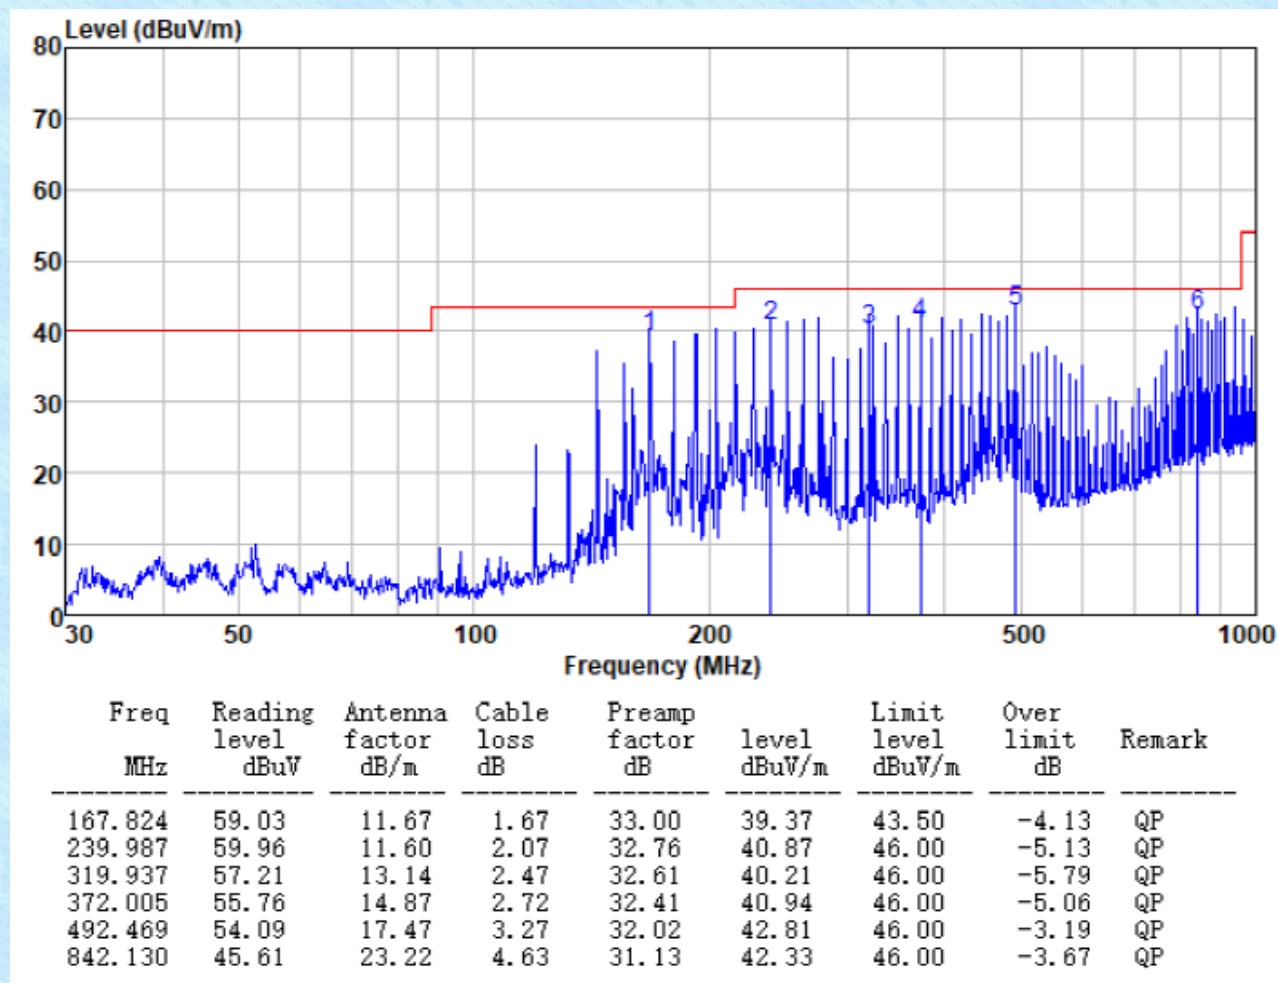

Test mode:	Transmitting mode	Antenna Polarity:	Vertical
------------	-------------------	-------------------	----------

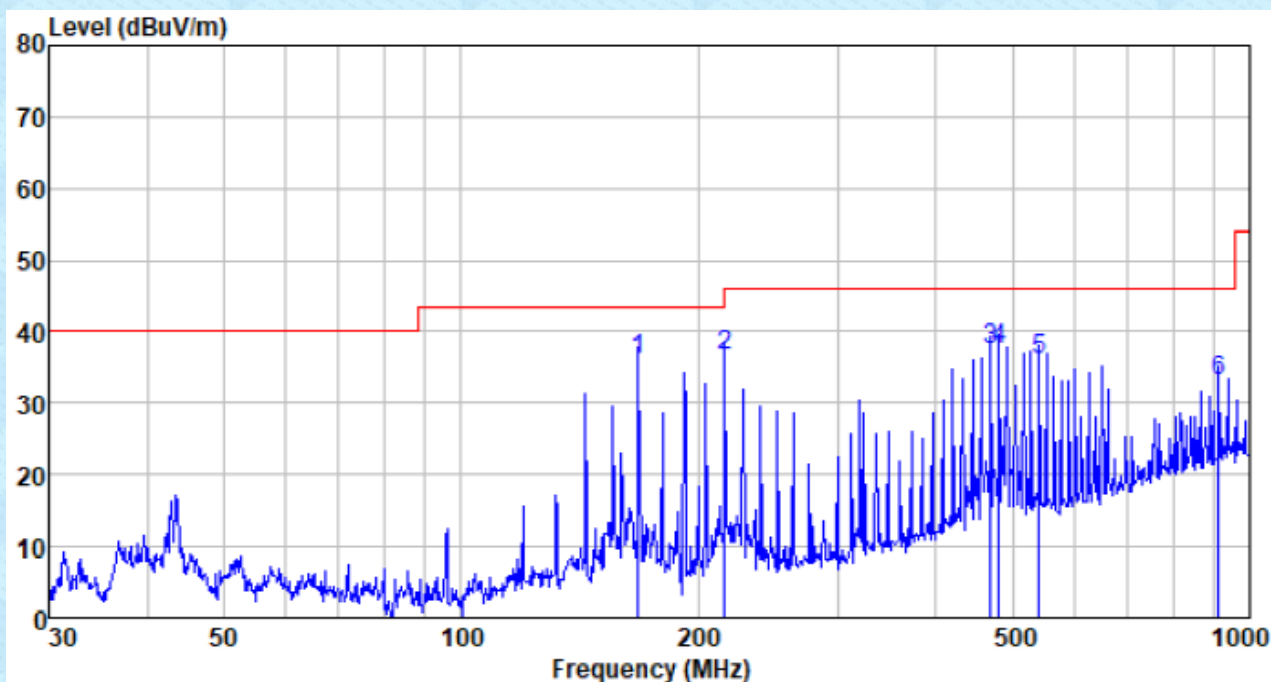

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
167.824	55.54	11.67	1.67	33.00	35.88	43.50	-7.62	QP
216.024	57.44	10.09	1.93	32.78	36.68	46.00	-9.32	QP
468.876	49.22	17.05	3.18	32.09	37.36	46.00	-8.64	QP
480.528	49.08	17.26	3.22	32.05	37.51	46.00	-8.49	QP
541.373	46.05	18.34	3.49	31.91	35.97	46.00	-10.03	QP
912.862	35.01	24.01	4.90	30.93	32.99	46.00	-13.01	QP

■ Above 1GHz

■ Unwanted Emissions in non-restricted Frequency Bands

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	62.96	31.22	4.63	37.68	61.13	74.00	-12.87	Vertical
7236.00	48.55	36.25	6.52	37.81	53.51	74.00	-20.49	Vertical
9648.00	42.96	37.97	7.99	37.93	50.99	74.00	-23.01	Vertical
4824.00	58.10	31.22	4.63	37.68	56.27	74.00	-17.73	Horizontal
7236.00	46.50	36.25	6.52	37.81	51.46	74.00	-22.54	Horizontal
9648.00	41.75	37.97	7.99	37.93	49.78	74.00	-24.22	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	50.27	31.22	4.63	37.68	48.44	54.00	-5.56	Vertical
7236.00	36.92	36.25	6.52	37.81	41.88	54.00	-12.12	Vertical
9648.00	32.90	37.97	7.99	37.93	40.93	54.00	-13.07	Vertical
4824.00	46.46	31.22	4.63	37.68	44.63	54.00	-9.37	Horizontal
7236.00	34.70	36.25	6.52	37.81	39.66	54.00	-14.34	Horizontal
9648.00	31.15	37.97	7.99	37.93	39.18	54.00	-14.82	Horizontal

Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	58.10	31.31	4.69	37.63	56.47	74.00	-17.53	Vertical
7311.00	46.15	36.39	6.61	37.78	51.37	74.00	-22.63	Vertical
9748.00	42.21	38.10	8.03	37.95	50.39	74.00	-23.61	Vertical
4874.00	55.66	31.31	4.69	37.63	54.03	74.00	-19.97	Horizontal
7311.00	43.30	36.39	6.61	37.78	48.52	74.00	-25.48	Horizontal
9748.00	41.44	38.10	8.03	37.95	49.62	74.00	-24.38	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	47.48	31.31	4.69	37.63	45.85	54.00	-8.15	Vertical
7311.00	34.05	36.39	6.61	37.78	39.27	54.00	-14.73	Vertical
9748.00	31.12	38.10	8.03	37.95	39.30	54.00	-14.70	Vertical
4874.00	44.80	31.31	4.69	37.63	43.17	54.00	-10.83	Horizontal
7311.00	32.07	36.39	6.61	37.78	37.29	54.00	-16.71	Horizontal
9748.00	30.87	38.10	8.03	37.95	39.05	54.00	-14.95	Horizontal

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	77.20	31.37	4.75	37.58	75.74	74.00	1.74	Vertical
7386.00	55.40	36.57	6.71	37.74	60.94	74.00	-13.06	Vertical
9848.00	51.63	38.20	8.07	37.58	60.32	74.00	-13.68	Vertical
4924.00	71.47	31.37	4.75	37.58	70.01	74.00	-3.99	Horizontal
7386.00	51.74	36.57	6.71	37.74	57.28	74.00	-16.72	Horizontal
9848.00	46.68	38.20	8.07	37.58	55.37	74.00	-18.63	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	65.58	31.37	4.75	37.58	64.12	54.00	10.12	Vertical
7386.00	44.61	36.57	6.71	37.74	50.15	54.00	-3.85	Vertical
9848.00	39.55	38.20	8.07	37.58	48.24	54.00	-5.76	Vertical
4924.00	60.15	31.37	4.75	37.58	58.69	54.00	4.69	Horizontal
7386.00	40.58	36.57	6.71	37.74	46.12	54.00	-7.88	Horizontal
9848.00	35.44	38.20	8.07	37.58	44.13	54.00	-9.87	Horizontal

Test mode:	802.11g	Test channel:	lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	52.38	31.24	4.63	37.68	50.57	74.00	-23.43	Vertical
7236.00	41.86	36.25	6.52	37.80	46.83	74.00	-27.17	Vertical
9648.00	38.18	37.97	7.98	37.93	46.20	74.00	-27.80	Vertical
4824.00	49.17	31.24	4.63	37.68	47.36	74.00	-26.64	Horizontal
7236.00	40.65	36.25	6.52	37.80	45.62	74.00	-28.38	Horizontal
9648.00	37.33	37.97	7.98	37.93	45.35	74.00	-28.65	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	40.51	31.24	4.63	37.68	38.70	54.00	-15.30	Vertical
7236.00	30.46	36.25	6.52	37.80	35.43	54.00	-18.57	Vertical
9648.00	28.30	37.97	7.98	37.93	36.32	54.00	-17.68	Vertical
4824.00	38.07	31.24	4.63	37.68	36.26	54.00	-17.74	Horizontal
7236.00	29.03	36.25	6.52	37.80	34.00	54.00	-20.00	Horizontal
9648.00	26.89	37.97	7.98	37.93	34.91	54.00	-19.09	Horizontal

Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	49.35	31.31	4.69	37.62	47.73	74.00	-26.27	Vertical
7311.00	40.61	36.39	6.61	37.78	45.83	74.00	-28.17	Vertical
9748.00	38.25	38.10	8.02	37.95	46.42	74.00	-27.58	Vertical
4874.00	48.27	31.31	4.69	37.62	46.65	74.00	-27.35	Horizontal
7311.00	38.46	36.39	6.61	37.78	43.68	74.00	-30.32	Horizontal
9748.00	37.79	38.10	8.02	37.95	45.96	74.00	-28.04	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	39.42	31.31	4.69	37.62	37.80	54.00	-16.20	Vertical
7311.00	28.71	36.39	6.61	37.78	33.93	54.00	-20.07	Vertical
9748.00	27.32	38.10	8.02	37.95	35.49	54.00	-18.51	Vertical
4874.00	37.86	31.31	4.69	37.62	36.24	54.00	-17.76	Horizontal
7311.00	27.38	36.39	6.61	37.78	32.60	54.00	-21.40	Horizontal
9748.00	27.35	38.10	8.02	37.95	35.52	54.00	-18.48	Horizontal

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	62.11	31.37	4.75	37.58	60.65	74.00	-13.35	Vertical
7386.00	45.86	36.57	6.71	37.74	51.40	74.00	-22.60	Vertical
9848.00	44.81	38.20	8.07	37.58	53.50	74.00	-20.50	Vertical
4924.00	58.73	31.37	4.75	37.58	57.27	74.00	-16.73	Horizontal
7386.00	43.39	36.57	6.71	37.74	48.93	74.00	-25.07	Horizontal
9848.00	40.39	38.20	8.07	37.58	49.08	74.00	-24.92	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	51.67	31.37	4.75	37.58	50.21	54.00	-3.79	Vertical
7386.00	35.40	36.57	6.71	37.74	40.94	54.00	-13.06	Vertical
9848.00	33.00	38.20	8.07	37.58	41.69	54.00	-12.31	Vertical
4924.00	48.20	31.37	4.75	37.58	46.74	54.00	-7.26	Horizontal
7386.00	32.49	36.57	6.71	37.74	38.03	54.00	-15.97	Horizontal
9848.00	29.38	38.20	8.07	37.58	38.07	54.00	-15.93	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4824.00	51.05	31.24	4.63	37.68	49.24	74.00	-24.76	Vertical
7236.00	41.02	36.25	6.52	37.80	45.99	74.00	-28.01	Vertical
9648.00	37.58	37.97	7.98	37.93	45.60	74.00	-28.40	Vertical
4824.00	48.05	31.24	4.63	37.68	46.24	74.00	-27.76	Horizontal
7236.00	39.92	36.25	6.52	37.80	44.89	74.00	-29.11	Horizontal
9648.00	36.78	37.97	7.98	37.93	44.80	74.00	-29.20	Horizontal

Average value:

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4824.00	39.29	31.24	4.63	37.68	37.48	54.00	-16.52	Vertical
7236.00	29.65	36.25	6.52	37.80	34.62	54.00	-19.38	Vertical
9648.00	27.73	37.97	7.98	37.93	35.75	54.00	-18.25	Vertical
4824.00	37.03	31.24	4.63	37.68	35.22	54.00	-18.78	Horizontal
7236.00	28.32	36.25	6.52	37.80	33.29	54.00	-20.71	Horizontal
9648.00	26.36	37.97	7.98	37.93	34.38	54.00	-19.62	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4874.00	48.25	31.31	4.69	37.62	46.63	74.00	-27.37	Vertical
7311.00	39.92	36.39	6.61	37.78	45.14	74.00	-28.86	Vertical
9748.00	37.76	38.10	8.02	37.95	45.93	74.00	-28.07	Vertical
4874.00	47.34	31.31	4.69	37.62	45.72	74.00	-28.28	Horizontal
7311.00	37.85	36.39	6.61	37.78	43.07	74.00	-30.93	Horizontal
9748.00	37.34	38.10	8.02	37.95	45.51	74.00	-28.49	Horizontal

Average value:

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4874.00	38.41	31.31	4.69	37.62	36.79	54.00	-17.21	Vertical
7311.00	28.04	36.39	6.61	37.78	33.26	54.00	-20.74	Vertical
9748.00	26.85	38.10	8.02	37.95	35.02	54.00	-18.98	Vertical
4874.00	36.99	31.31	4.69	37.62	35.37	54.00	-18.63	Horizontal
7311.00	26.79	36.39	6.61	37.78	32.01	54.00	-21.99	Horizontal
9748.00	26.91	38.10	8.02	37.95	35.08	54.00	-18.92	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	60.22	31.37	4.75	37.58	58.76	74.00	-15.24	Vertical
7386.00	44.66	36.57	6.71	37.74	50.20	74.00	-23.80	Vertical
9848.00	43.96	38.20	8.07	37.58	52.65	74.00	-21.35	Vertical
4924.00	57.14	31.37	4.75	37.58	55.68	74.00	-18.32	Horizontal
7386.00	42.35	36.57	6.71	37.74	47.89	74.00	-26.11	Horizontal
9848.00	39.60	38.20	8.07	37.58	48.29	74.00	-25.71	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	49.93	31.37	4.75	37.58	48.47	54.00	-5.53	Vertical
7386.00	34.24	36.57	6.71	37.74	39.78	54.00	-14.22	Vertical
9848.00	32.19	38.20	8.07	37.58	40.88	54.00	-13.12	Vertical
4924.00	46.70	31.37	4.75	37.58	45.24	54.00	-8.76	Horizontal
7386.00	31.48	36.57	6.71	37.74	37.02	54.00	-16.98	Horizontal
9848.00	28.62	38.20	8.07	37.58	37.31	54.00	-16.69	Horizontal

Notes:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

■ Unwanted Emissions in restricted Frequency Bands

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	57.14	27.14	2.81	38.64	48.45	74.00	-25.55	Horizontal
2390.00	71.35	27.37	2.91	38.84	62.79	74.00	-11.21	Horizontal
2310.00	56.91	27.14	2.81	38.64	48.22	74.00	-25.78	Vertical
2390.00	77.32	27.37	2.91	38.84	68.76	74.00	-5.24	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	42.44	27.14	2.81	38.64	33.75	54.00	-20.25	Horizontal
2390.00	51.41	27.37	2.91	38.84	42.85	54.00	-11.15	Horizontal
2310.00	42.50	27.14	2.81	38.64	33.81	54.00	-20.19	Vertical
2390.00	54.72	27.37	2.91	38.84	46.16	54.00	-7.84	Vertical

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	73.45	27.82	2.99	39.05	65.21	74.00	-8.79	Horizontal
2500.00	60.31	27.70	3.01	39.10	51.92	74.00	-22.08	Horizontal
2483.50	76.87	27.82	2.99	39.05	68.63	74.00	-5.37	Vertical
2500.00	64.77	27.70	3.01	39.10	56.38	74.00	-17.62	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	52.14	27.82	2.99	39.05	43.90	54.00	-10.10	Horizontal
2500.00	45.30	27.70	3.01	39.10	36.91	54.00	-17.09	Horizontal
2483.50	54.48	27.82	2.99	39.05	46.24	54.00	-7.76	Vertical
2500.00	44.79	27.70	3.01	39.10	36.40	54.00	-17.60	Vertical

Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	48.43	27.14	2.81	38.64	39.74	74.00	-34.26	Horizontal
2390.00	59.72	27.37	2.91	38.84	51.16	74.00	-22.84	Horizontal
2310.00	47.58	27.14	2.81	38.64	38.89	74.00	-35.11	Vertical
2390.00	63.34	27.37	2.91	38.84	54.78	74.00	-19.22	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	36.24	27.14	2.81	38.64	27.55	54.00	-26.45	Horizontal
2390.00	44.27	27.37	2.91	38.84	35.71	54.00	-18.29	Horizontal
2310.00	35.60	27.14	2.81	38.64	26.91	54.00	-27.09	Vertical
2390.00	46.91	27.37	2.91	38.84	38.35	54.00	-15.65	Vertical

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	61.00	27.82	2.99	39.05	52.76	74.00	-21.24	Horizontal
2500.00	50.65	27.70	3.01	39.10	42.26	74.00	-31.74	Horizontal
2483.50	62.64	27.82	2.99	39.05	54.40	74.00	-19.60	Vertical
2500.00	53.47	27.70	3.01	39.10	45.08	74.00	-28.92	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	44.63	27.82	2.99	39.05	36.39	54.00	-17.61	Horizontal
2500.00	39.44	27.70	3.01	39.10	31.05	54.00	-22.95	Horizontal
2483.50	46.18	27.82	2.99	39.05	37.94	54.00	-16.06	Vertical
2500.00	38.58	27.70	3.01	39.10	30.19	54.00	-23.81	Vertical

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	47.74	27.14	2.81	38.64	39.05	74.00	-34.95	Horizontal
2390.00	58.80	27.37	2.91	38.84	50.24	74.00	-23.76	Horizontal
2310.00	46.85	27.14	2.81	38.64	38.16	74.00	-35.84	Vertical
2390.00	62.24	27.37	2.91	38.84	53.68	74.00	-20.32	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	35.75	27.14	2.81	38.64	27.06	54.00	-26.94	Horizontal
2390.00	43.70	27.37	2.91	38.84	35.14	54.00	-18.86	Horizontal
2310.00	35.06	27.14	2.81	38.64	26.37	54.00	-27.63	Vertical
2390.00	46.29	27.37	2.91	38.84	37.73	54.00	-16.27	Vertical

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	60.02	27.82	2.99	39.05	51.78	74.00	-22.22	Horizontal
2500.00	49.89	27.70	3.01	39.10	41.50	74.00	-32.50	Horizontal
2483.50	61.52	27.82	2.99	39.05	53.28	74.00	-20.72	Vertical
2500.00	52.58	27.70	3.01	39.10	44.19	74.00	-29.81	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	44.03	27.82	2.99	39.05	35.79	54.00	-18.21	Horizontal
2500.00	38.98	27.70	3.01	39.10	30.59	54.00	-23.41	Horizontal
2483.50	45.53	27.82	2.99	39.05	37.29	54.00	-16.71	Vertical
2500.00	38.10	27.70	3.01	39.10	29.71	54.00	-24.29	Vertical

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----