

## TEST REPORT

### FCC Rules Part 15.249

**Report Reference No.....: MTEB23050163-R2**

**FCC ID..... : 2ALZG-22**

Compiled by  
( position+printed name+signature)..: File administrators Alisa Luo



Supervised by  
( position+printed name+signature)..: Test Engineer Sunny Deng



Approved by  
( position+printed name+signature)..: Manager Yvette Zhou



Date of issue.....: **May 15,2023**

**Representative Laboratory Name.: Shenzhen Most Technology Service Co., Ltd.**

Address .....: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,  
Nanshan, Shenzhen, Guangdong, China.

**Applicant's name.....: Qingdao Magene Intelligence Technology Co., Ltd.**

Address .....: Room 302, Building 3, No.328A Chengkang Road, Xiazhuang  
Subdistrict, Chengyang District, Qingdao, Shandong, China.

**Test specification/ Standard .....: FCC Part15 Subpart C, Section 15.249**

TRF Originator.....: Shenzhen Most Technology Service Co., Ltd.

**Shenzhen Most Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description .....: SMART TRAINER**

Trade Mark .....: Magene

Model/Type reference.....: P0102005

Listed Models .....: N/A

Modulation Type .....: GFSK

Operation Frequency.....: 2457MHz

Hardware version .....: 1.0

Software version .....: 1.0

DC 12V by Adapter

(Input: 100-240V~50/60Hz 2.0A)

Rating .....: Output: 12V=4.0A)

Result.....: **PASS**

**TEST REPORT**

Equipment under Test : SMART TRAINER

Model /Type : P0102005

Listed Models : N/A

Remark : N/A

Applicant : Qingdao Magene Intelligence Technology Co., Ltd.

Address : Room 302, Building 3, No.328A Chengkang Road, Xiazhuang Subdistrict, Chengyang District, Qingdao, Shandong, China.

Manufacturer : Qingdao Magene Intelligence Technology Co., Ltd.

Address : Room 302, Building 3, No.328A Chengkang Road, Xiazhuang Subdistrict, Chengyang District, Qingdao, Shandong, China.

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1.</b>	<b><u>REVISION HISTORY .....</u></b>	<b>4</b>
<b>2.</b>	<b><u>TEST STANDARDS .....</u></b>	<b>5</b>
<b>3.</b>	<b><u>SUMMARY .....</u></b>	<b>6</b>
3.1.	General Remarks	6
3.2.	Product Description	错
	误! 未定义书签。	
3.3.	Equipment Under Test	6
3.4.	Short description of the Equipment under Test (EUT)	6
3.5.	EUT operation mode	6
3.6.	Block Diagram of Test Setup	7
3.7.	Test Item (Equipment Under Test) Description*	7
3.8.	Auxiliary Equipment (AE) Description	7
3.9.	Antenna Information*	7
3.10.	EUT configuration	7
3.11.	Modifications	7
<b>4.</b>	<b><u>TEST ENVIRONMENT .....</u></b>	<b>8</b>
4.1.	Address of the test laboratory	8
4.2.	Environmental conditions	8
4.3.	Test Description	9
4.4.	Statement of the measurement uncertainty	9
4.5.	Equipments Used during the Test	10
<b>5.</b>	<b><u>TEST CONDITIONS AND RESULTS .....</u></b>	<b>11</b>
5.1.	AC Power Conducted Emission .....	11
5.2.	Radiated Spurious Emissions and Bandedge Emission .....	14
5.3.	20dB Bandwidth .....	20
5.4.	Radiated field strength of the fundamental signal .....	22
5.5.	Antenna Requirement.....	25
<b>6.</b>	<b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b>26</b>
<b>7.</b>	<b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</u></b>	<b>26</b>

## 1. Revision History

Revision	Issue Date	Revisions	Revised By
00	2023.05.15	Initial Issue	Alisa Luo

## **2. TEST STANDARDS**

The tests were performed according to following standards:

The tests were performed according to following standards:

[FCC Rules Part 15.249](#): Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

[RSS-210](#): Licence-Exempt Radio Apparatus: Category I Equipment

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

### 3. SUMMARY

#### 3.1. General Remarks

Date of receipt of test sample	:	2023.05.05
Testing commenced on	:	2023.05.06
Testing concluded on	:	2023.05.15

#### 3.2. Product Description

Product Name:	SMART TRAINER
Model/Type reference:	P0102005
Power Supply:	DC 12V by Adapter (Input: 100-240V~50/60Hz 2.0A Output: 12V=4.0A)
Testing sample ID:	MTYP01367-9
<b>Bluetooth :</b>	
Supported Type:	ANT+
Modulation:	GFSK
Operation frequency:	2457MHz
Channel number:	1
Antenna type:	PCB antenna
Antenna gain:	1.55dBi

#### 3.3. Equipment Under Test

##### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 12V by Adapter(Input: 100-240V~50/60Hz 2.0A  
Output: 12V=4.0A)

#### 3.4. Short description of the Equipment under Test (EUT)

This is a SMART TRAINER For more details, refer to the user's manual of the EUT.

#### 3.5. EUT operation mode

Channel	Freq.(MHz)	Note(Modulation Type)
01	2457	GFSK

For RF test items

The engineering test program was provided and enabled to make EUT continuous transmit. (duty cycle>98%).


For AC power line conducted emissions:

The EUT was set to connect with large package sizes transmission.

For Radiated spurious emissions test item:

The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

**3.6. Block Diagram of Test Setup**

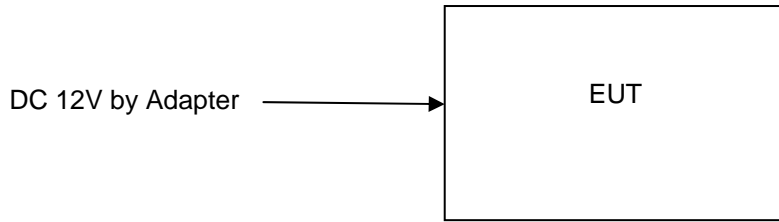

**3.7. Test Item (Equipment Under Test) Description\***

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A	/	/	/	/	/
EUT B	/	/	/	/	/

\*: declared by the applicant. According to customers information EUTs A and B are the same devices.

**3.8. Auxiliary Equipment (AE) Description**

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1	/	/	/	/
AE 2	-	/	/	/

**3.9. Antenna Information\***

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	/	2457	---	1.55dBi
Antenna 2	/	/	/	/	/

\*: declared by the applicant.

**3.10. EUT configuration**

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- Supplied by the lab

<input type="radio"/>	ADAPTER	M/N:	
		Manufacturer:	

**3.11. Modifications**

No modifications were implemented to meet testing criteria.

## 4. TEST ENVIRONMENT

### 4.1. Address of the test laboratory

#### **Shenzhen Most Technology Service Co., Ltd.**

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.  
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### **Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC-Registration No.: 0031192610**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### **A2LA-Lab Cert. No.: 6343.01**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 4.2. Environmental conditions

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar



### 4.3. Test Description

FCC and IC Requirements		
FCC Part 15.203	Antenna Requirement	PASS
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15. 15.249(a)	Field strength of the Fundamental signal	PASS
FCC Part 15.209/15.249(a)	Spurious Emissions	PASS
FCC Part 15.205/15.249(d)	Band edge Emissions	PASS
FCC Part 15.215/15.249	20dB Occupied Bandwidth	PASS

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed

### 4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

**4.5. Equipments Used during the Test**


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	100093	2023/03/17	1 Year
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	2023/03/17	1 Year
3.	Receiver	R&S	ESCI	100492	2023/03/17	1 Year
4	Receiver	R&S	ESPI	101202	2023/03/17	1 Year
5	Spectrum analyzer	Agilent	9020A	MT-E306	2023/03/17	1 Year
6	Bilong Antenna	Sunol Sciences	JB3	A121206	2023/03/17	1 Year
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	2023/03/17	1 Year
8	Loop antenna	Beijing Daze	ZN30900B	/	2023/03/17	1 Year
9	Horn antenna	R&S	OBH100400	26999002	2023/03/17	1 Year
10	Wireless Communication Test Set	R&S	CMW500	/	2023/03/17	1 Year
11	Spectrum analyzer	R&S	FSP	100019	2023/03/17	1 Year
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	2023/03/17	1 Year
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	2023/03/17	1 Year
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	2023/03/17	1 Year
15	Pre-amplifier	Agilent	83051A	MT-E392	2023/03/17	1 Year
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	2023/03/17	1 Year
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	2023/03/17	1 Year
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	2023/03/17	1 Year
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	2023/03/17	1 Year

Note: 1. The Cal.Interval was one year.

## 5. TEST CONDITIONS AND RESULTS

### 5.1. AC Power Conducted Emission

#### TEST CONFIGURATION

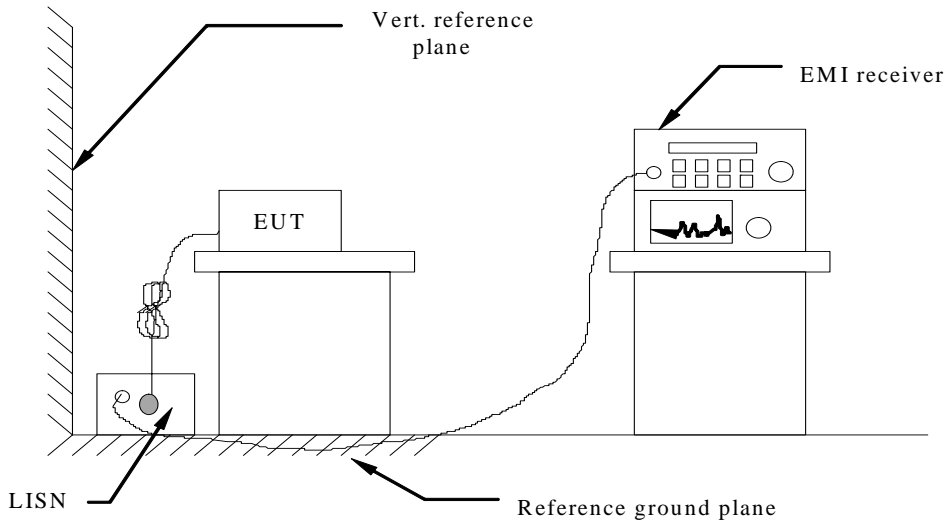

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC5V power, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit


For unintentional device, according to RSS Gen 8.8 and § 15.207(a) Line Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### TEST RESULTS


Pass

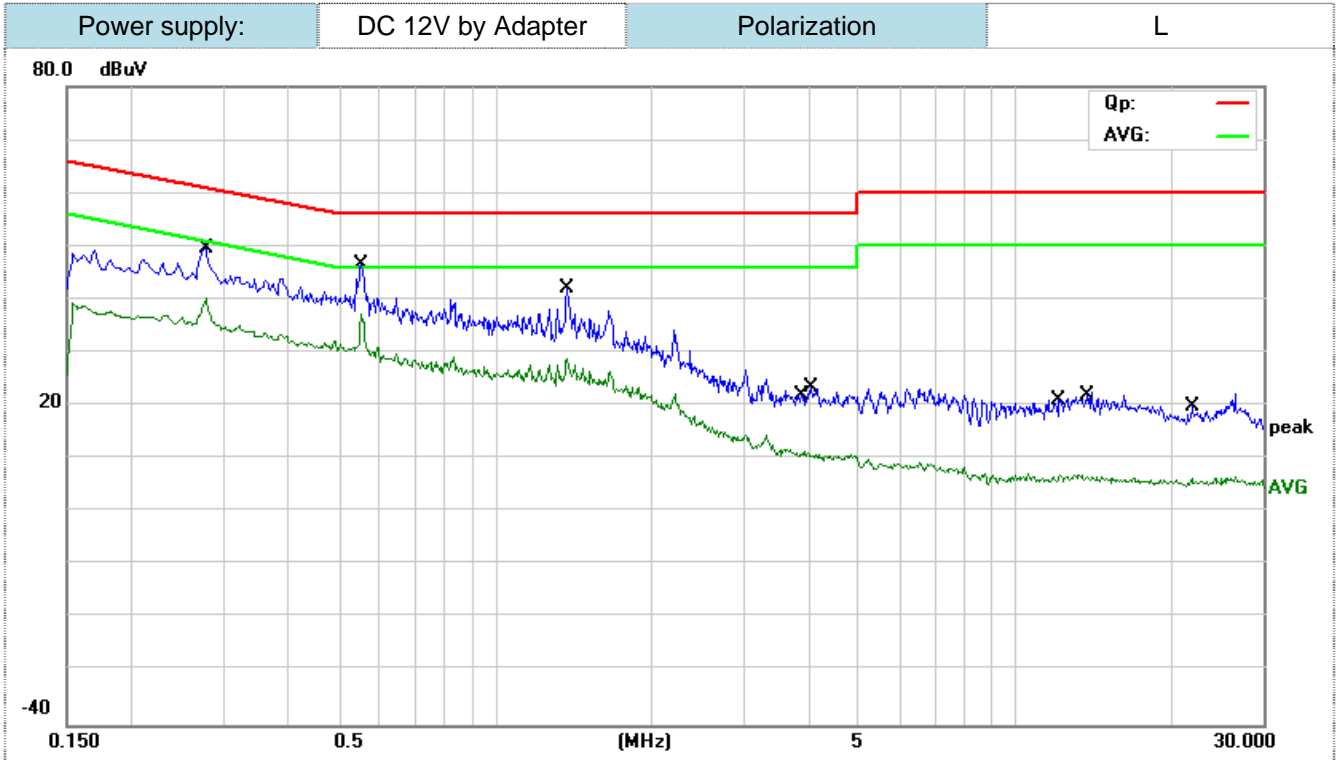

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2780	39.94	9.59	49.53	60.88	-11.35	QP	
2		0.2780	30.53	9.59	40.12	50.88	-10.76	AVG	
3		0.5540	36.92	9.59	46.51	56.00	-9.49	QP	
4	*	0.5540	27.58	9.59	37.17	46.00	-8.83	AVG	
5		1.3740	32.38	9.60	41.98	56.00	-14.02	QP	
6		1.3740	19.30	9.60	28.90	46.00	-17.10	AVG	
7		3.9380	1.77	9.62	11.39	46.00	-34.61	AVG	
8		4.0540	13.75	9.62	23.37	56.00	-32.63	QP	
9		12.2340	-2.63	9.69	7.06	50.00	-42.94	AVG	
10		13.7300	12.27	9.70	21.97	60.00	-38.03	QP	
11		21.8940	10.15	9.74	19.89	60.00	-40.11	QP	
12		21.8940	-3.34	9.74	6.40	50.00	-43.60	AVG	

\*:Maximum data    x:Over limit    !:over margin

Power supply: DC 12V by Adapter      Polarization: N

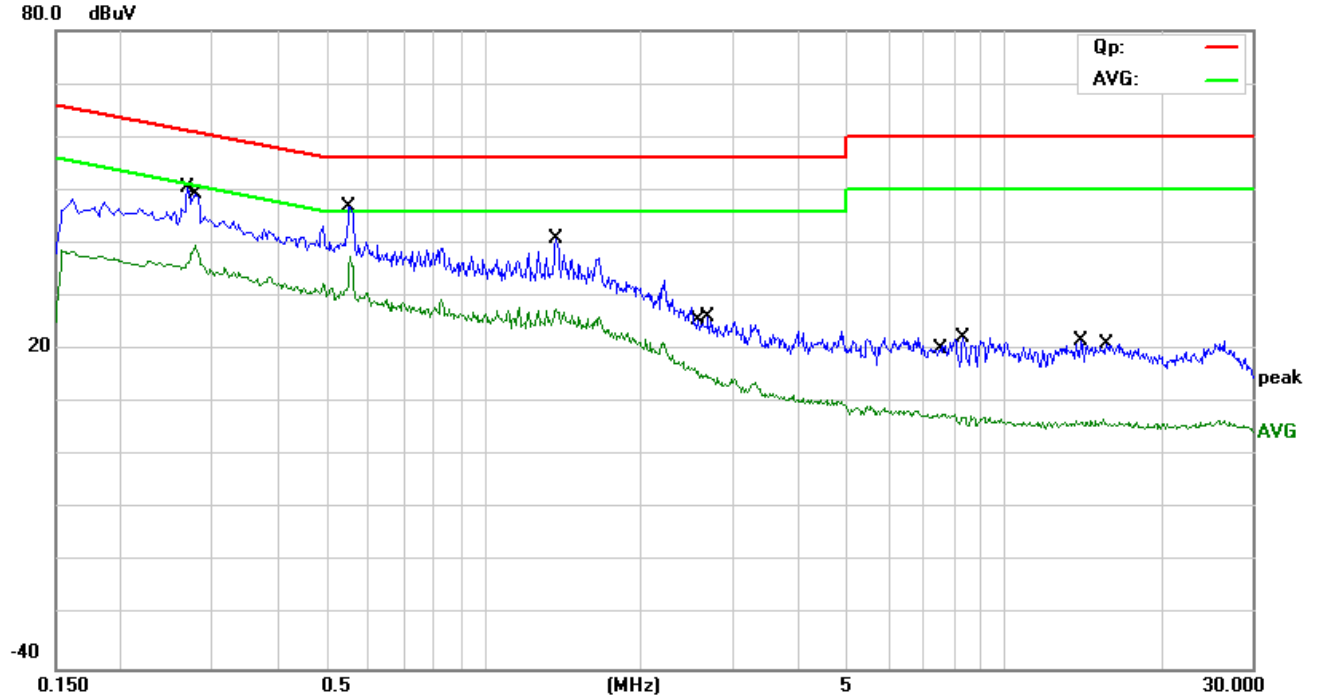


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2700	40.77	9.60	50.37	61.12	-10.75	QP	
2		0.2780	30.12	9.59	39.71	50.88	-11.17	AVG	
3		0.5500	37.25	9.59	46.84	56.00	-9.16	QP	
4	*	0.5540	27.99	9.59	37.58	46.00	-8.42	AVG	
5		1.3740	31.22	9.60	40.82	56.00	-15.18	QP	
6		1.3740	18.14	9.60	27.74	46.00	-18.26	AVG	
7		2.5460	6.85	9.61	16.46	46.00	-29.54	AVG	
8		2.6940	16.43	9.61	26.04	56.00	-29.96	QP	
9		7.4620	-1.66	9.66	8.00	50.00	-42.00	AVG	
10		8.3620	12.62	9.67	22.29	60.00	-37.71	QP	
11		14.0940	11.83	9.70	21.53	60.00	-38.47	QP	
12		15.5420	-2.87	9.70	6.83	50.00	-43.17	AVG	

\*:Maximum data    x:Over limit    !:over margin


## 5.2. Radiated Spurious Emissions and Bandedge Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

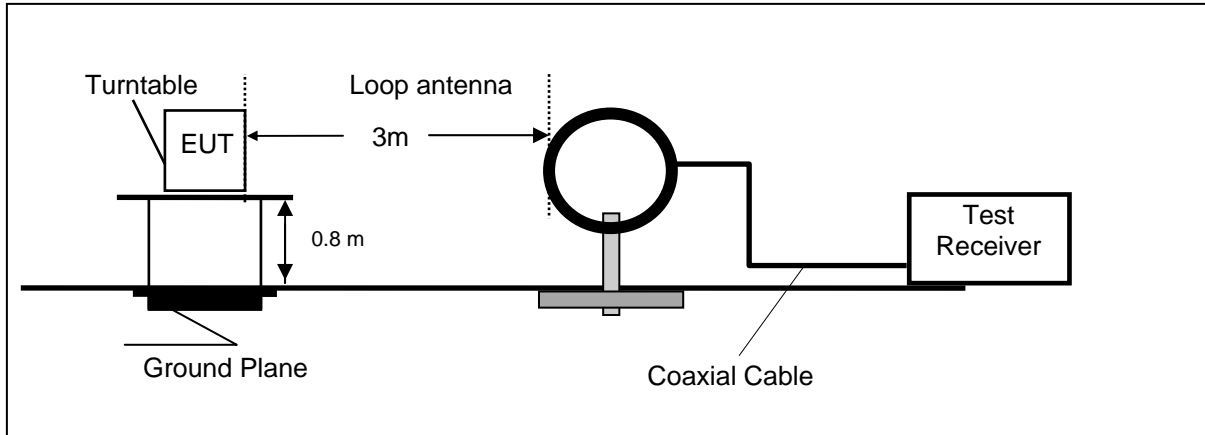

Frequency range 30MHz – 1000MHz

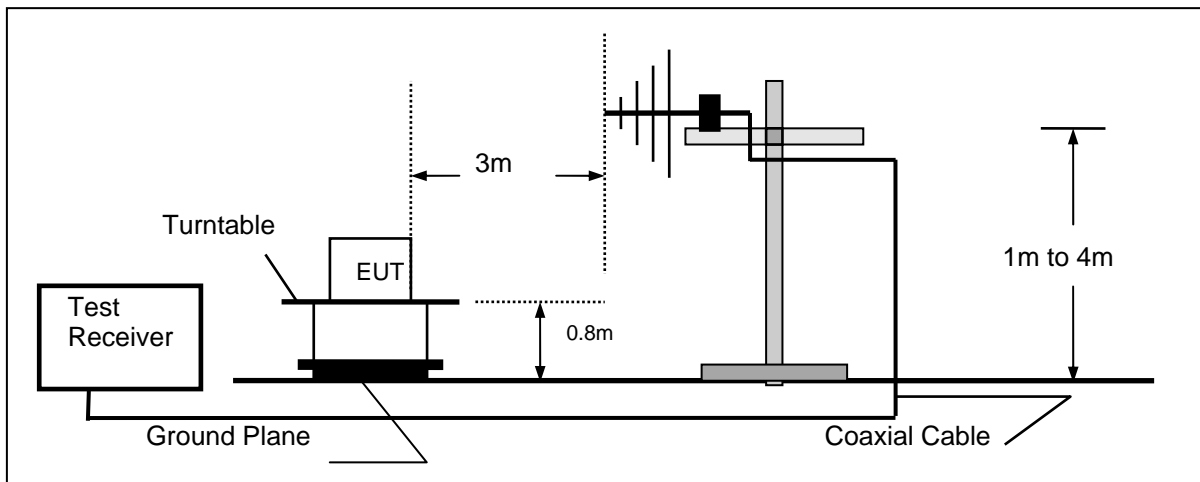

Frequency range above 1GHz-25GHz

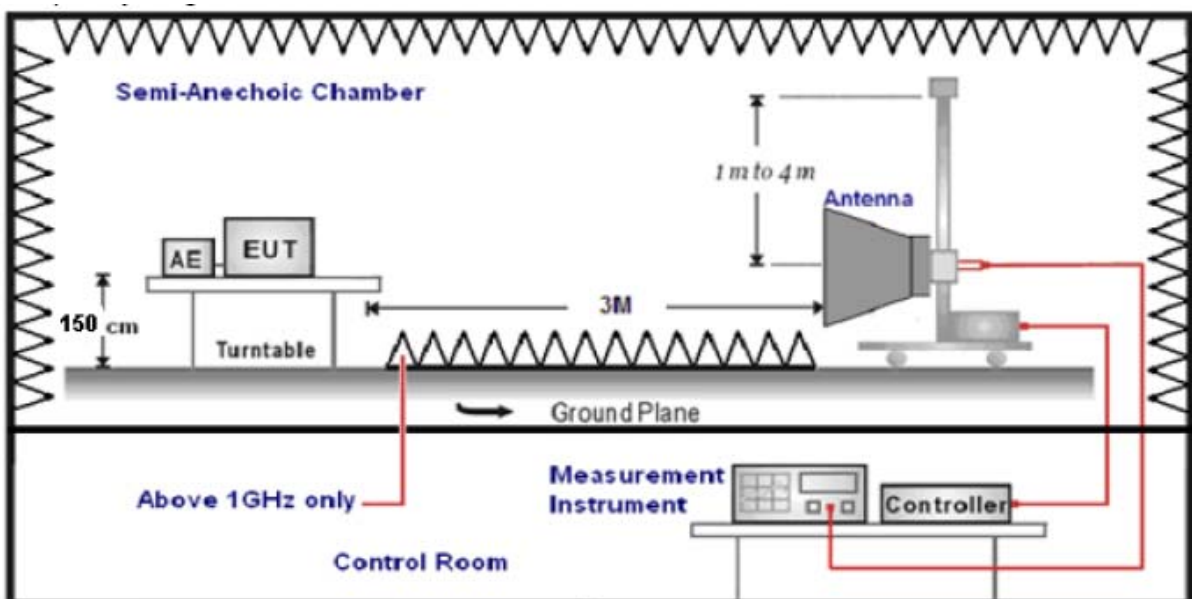

**TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 0.1 meter above ground for below 1 GHz, and 0.1 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings  
Span shall wide enough to fully capture the emission being measured;  
(1)Below 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.  
(2)From 1 GHz to 10th harmonic:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW=3MHz RMS detector for Average value.

**RADIATION LIMIT****FCC CFR Title 47 Part 15 Subpart C Section 15.209**

Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak


**Test Results**

**Radiated Spurious Emissions**

For 9 kHz ~ 30 MHz

The EUT was pre-scanned the frequency band (9 kHz ~ 30 MHz), found the radiated level lower than the limit, so don't show on the report.

**For 30MHz-1GHz**

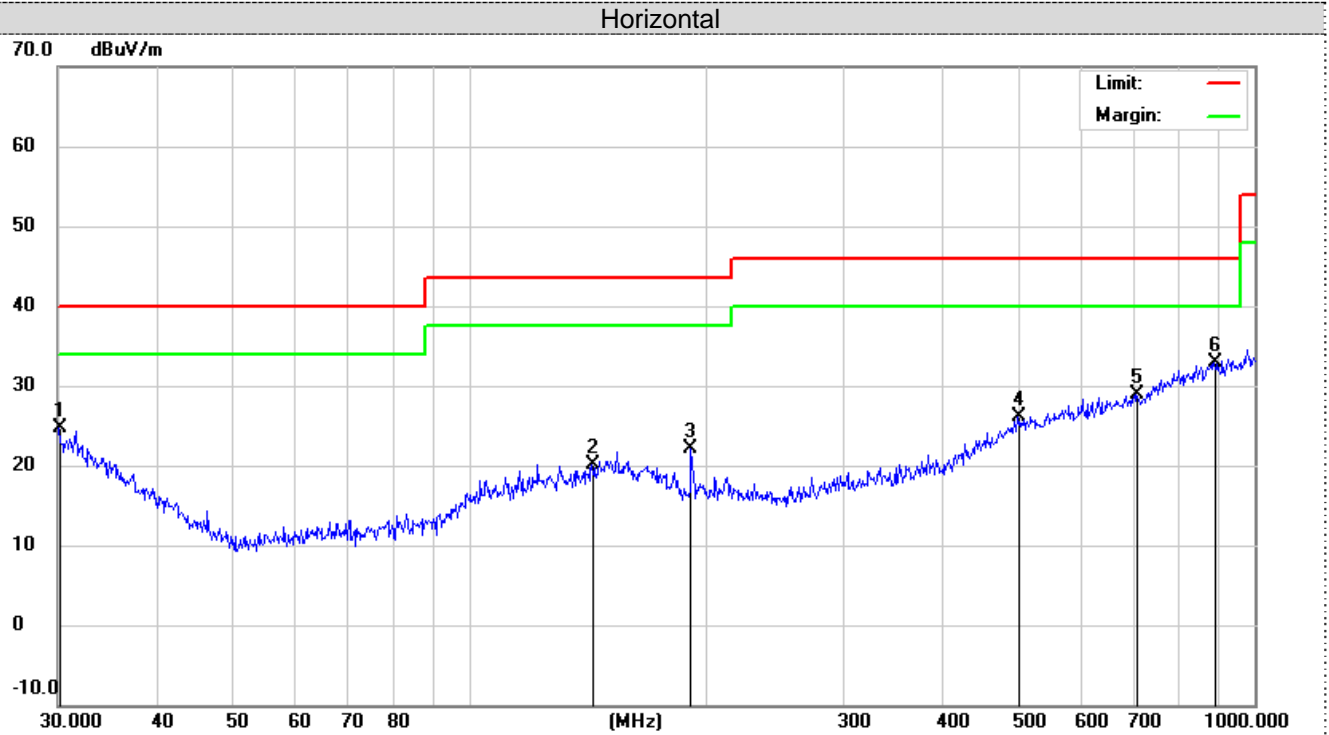


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		30.1054	3.87	20.83	24.70	40.00	-15.30	QP	100	246	
2		143.3261	3.33	16.83	20.16	43.50	-23.34	QP	100	205	
3		191.7450	7.17	14.95	22.12	43.50	-21.38	QP	100	125	
4		499.4247	3.42	22.67	26.09	46.00	-19.91	QP	100	269	
5		706.6999	3.66	25.29	28.95	46.00	-17.05	QP	100	308	
6	*	887.6099	4.12	28.86	32.98	46.00	-13.02	QP	100	284	

\*:Maximum data    x:Over limit    !:over margin



Vertical

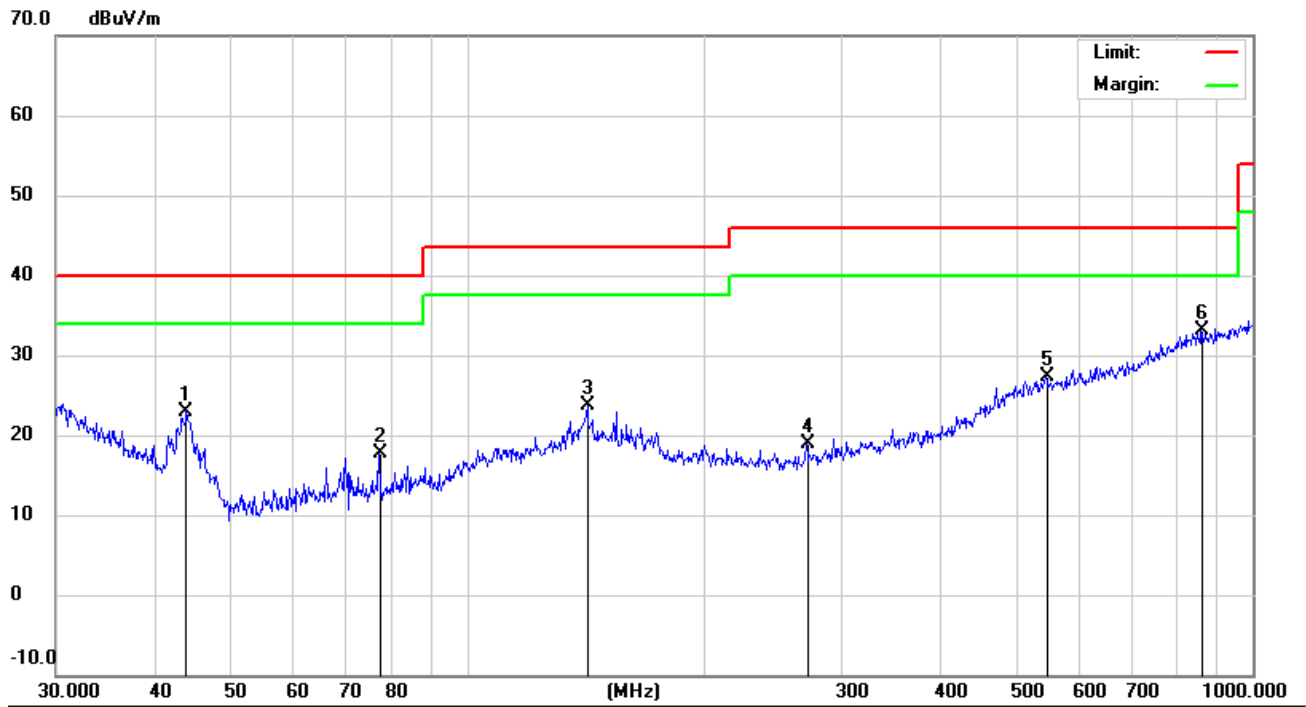

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		43.9658	11.82	11.18	23.00	40.00	-17.00	QP	100	232
2		77.3212	7.75	9.89	17.64	40.00	-22.36	QP	100	220
3		142.3243	7.07	16.70	23.77	43.50	-19.73	QP	100	201
4		270.3748	4.40	14.49	18.89	46.00	-27.11	QP	100	216
5		545.1826	4.02	23.20	27.22	46.00	-18.78	QP	100	268
6	*	860.0352	4.47	28.56	33.03	46.00	-12.97	QP	100	215

\*:Maximum data    x:Over limit    !:over margin

For Above 1 GHz

Frequency(MHz):			2457		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4914.00	56.97	PK	74	17.03	55.07	31.42	6.98	36.5	1.9
4914.00	44.12	AV	54	9.88	42.22	31.42	6.98	36.5	1.9
7371.00	52.43	PK	74	21.57	41.83	37.03	8.87	35.3	10.6
7371.00	42.36	AV	54	11.64	31.76	37.03	8.87	35.3	10.6

Frequency(MHz):			2457		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4914.00	52.26	PK	74	21.74	50.36	31.42	6.98	36.5	1.9
4914.00	44.31	AV	54	9.69	42.41	31.42	6.98	36.5	1.9
7371.00	52.18	PK	74	21.82	41.58	37.03	8.87	35.3	10.6
7371.00	42.38	AV	54	11.62	31.78	37.03	8.87	35.3	10.6

## REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

**Bandedge Emission****GFSK**

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	57.15	PK	74	16.85	62.56	27.49	3.32	36.22	-5.41
2390.00	42.27	AV	54	11.73	47.68	27.49	3.32	36.22	-5.41
Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	56.03	PK	74	17.97	61.44	27.49	3.32	36.22	-5.41
2390.00	42.27	AV	54	11.73	47.68	27.49	3.32	36.22	-5.41
Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	54.63	PK	74	19.37	60.14	27.45	3.38	36.34	-5.51
2483.50	41.91	AV	54	12.09	47.42	27.45	3.38	36.34	-5.51
Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	59.19	PK	74	14.81	64.7	27.45	3.38	36.34	-5.51
2483.50	40.78	AV	54	13.22	46.29	27.45	3.38	36.34	-5.51

### 5.3. 20dB Bandwidth

#### TEST CONFIGURATION




#### TEST PROCEDURE

- 1: The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
- 2: Set to the maximum power setting and enable the EUT transmit continuously.
- 3: Use the following spectrum analyzer settings:  
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a test channel RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW  
 Sweep = auto, Detector function = peak, Trace = max hold
- 4: Measure and record the results in the test report.

#### TEST RESULTS


Modulation	Channel Frequency (MHz)	99% OBW (KHz)	20dB bandwidth (KHz)	Result
GFSK	2457	1071.3	1214	Pass

Test plot as follows:  
99%

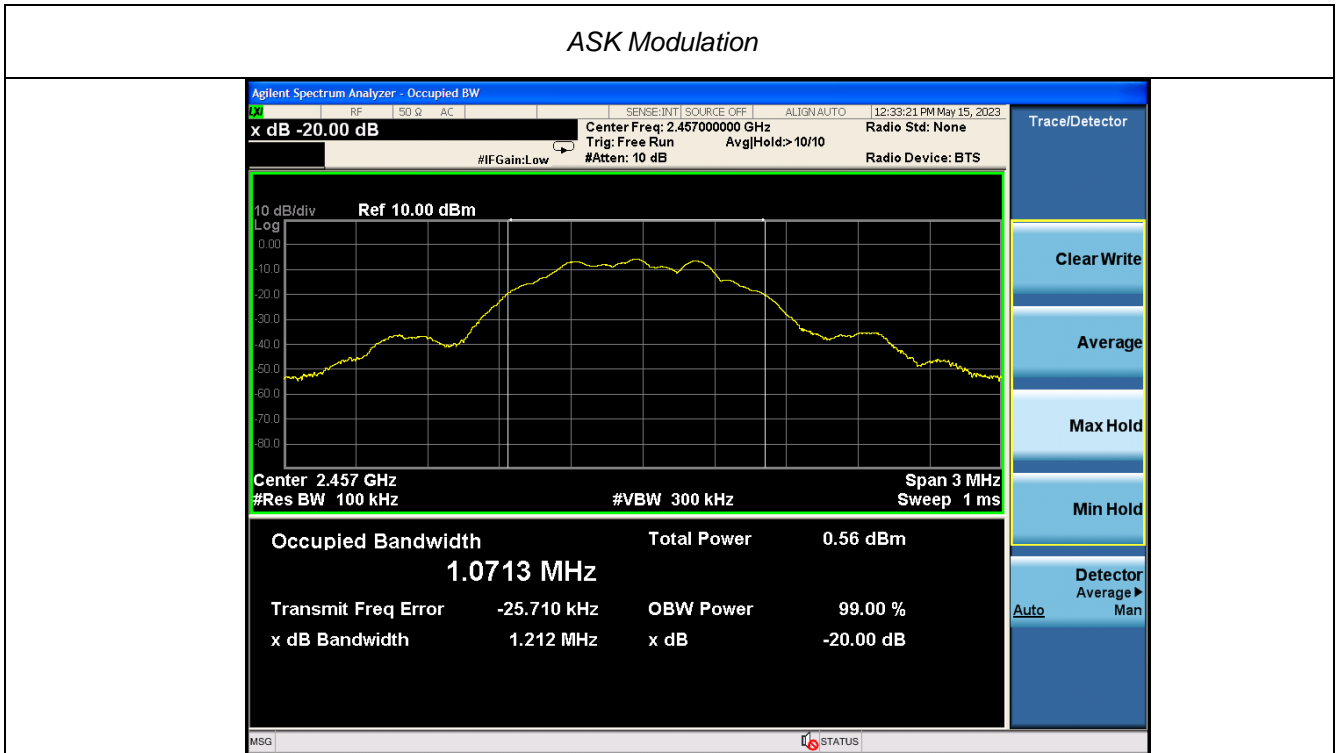

20dB:

ASK Modulation

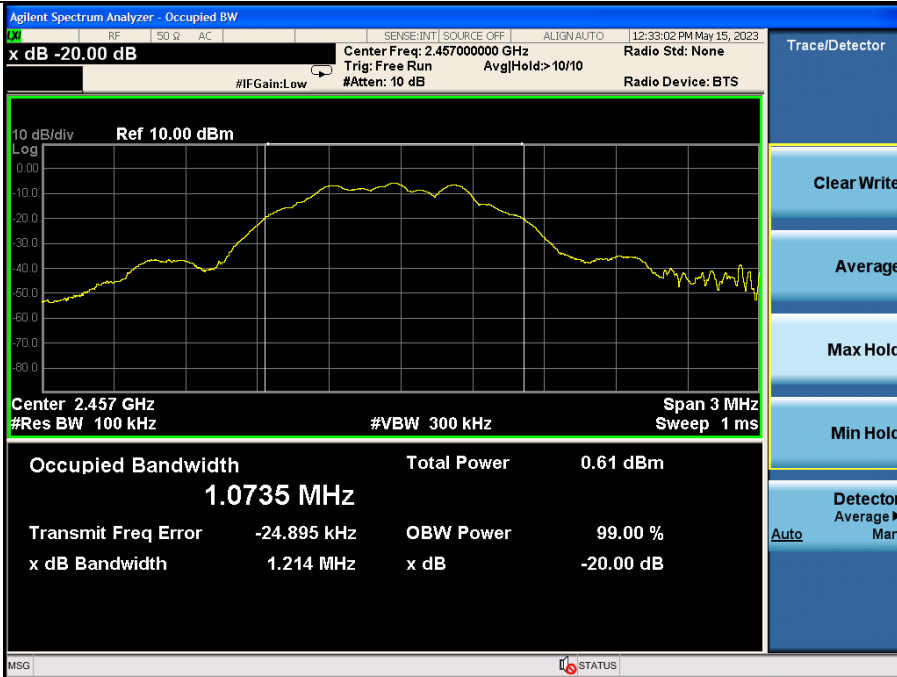


## 5.4. Radiated field strength of the fundamental signal

### Limit

Fundamental frequency	Field strength of fundamental (millivolts/meter/ AVG)	Field strength of harmonics (microvolts/meter/ AVG)
902-928 MHz	50 (94dBuV/m @3m)	500 (54dBuV/m @3m)
2400-2483.5 MHz	50 (94dBuV/m @3m)	500 (54dBuV/m @3m)
5725-5875 MHz	50 (94dBuV/m @3m)	500 (54dBuV/m @3m)
24.0-24.25 GHz	250 (108dBuV/m @3m)	2500 (68dBuV/m @3m)

Frequencies above 1000 MHz, the field strength limits are based on average limits


### Test Configuration

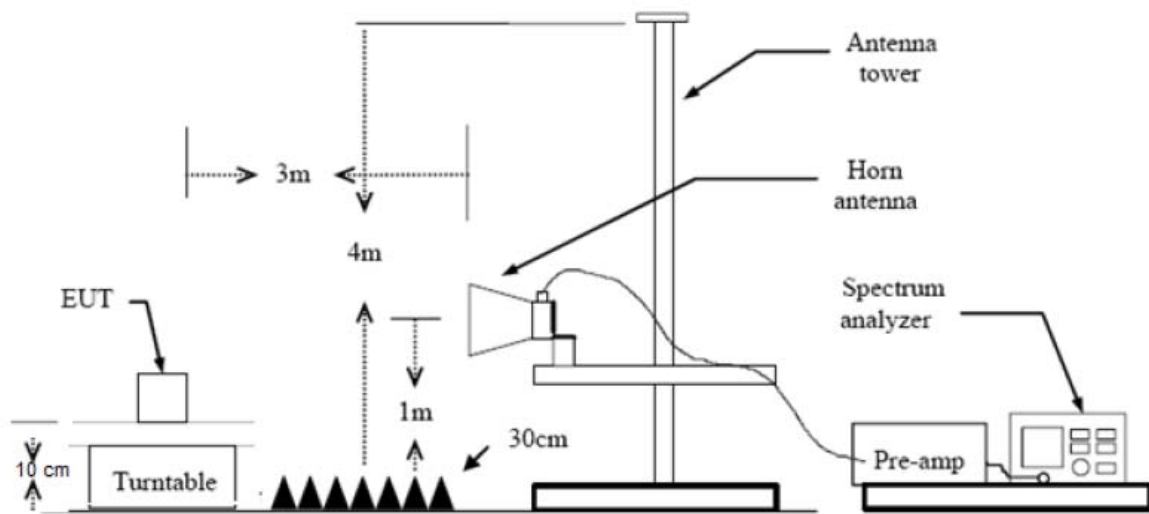

### TEST PROCEDURE


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 0.1 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow: RBW=1MHz, VBW=3MHz Peak detector for Peak value.

**TEST RESULTS**

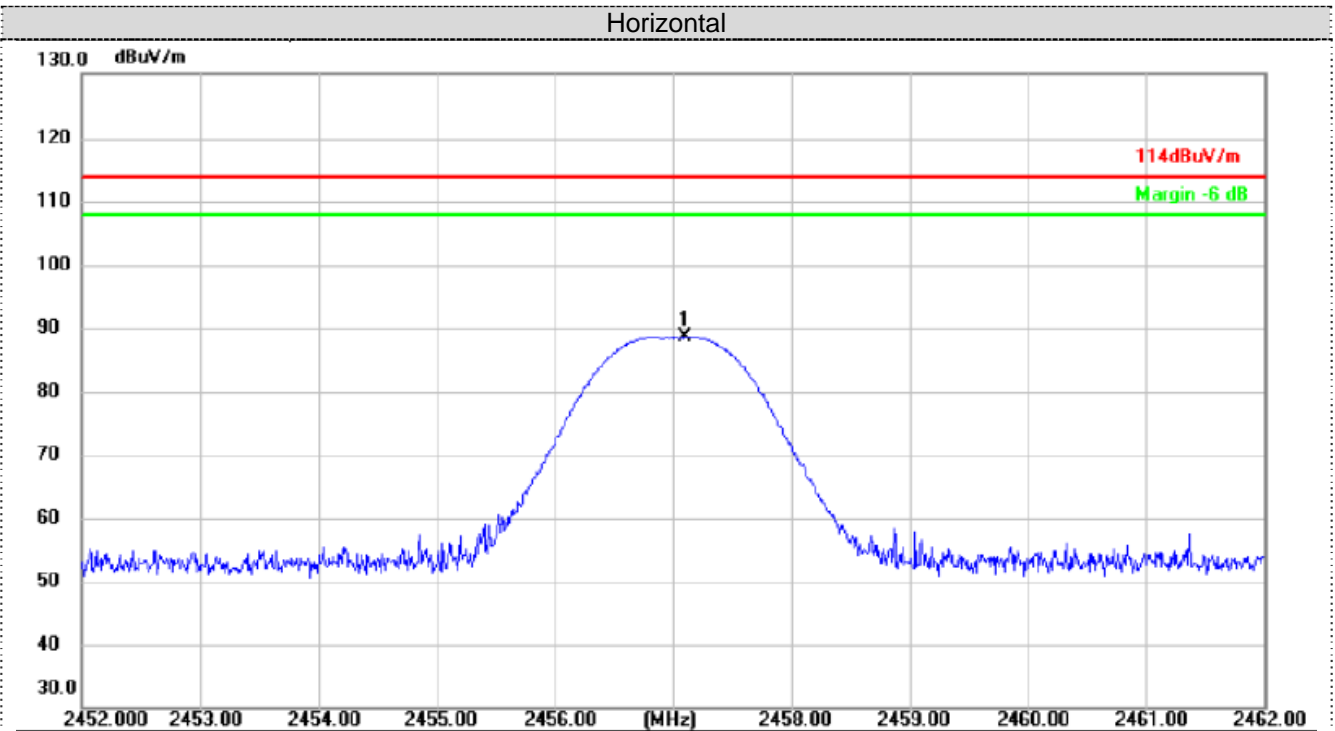

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	2457.100	57.48	31.12	88.60	114.00	-25.40	peak

Vertical

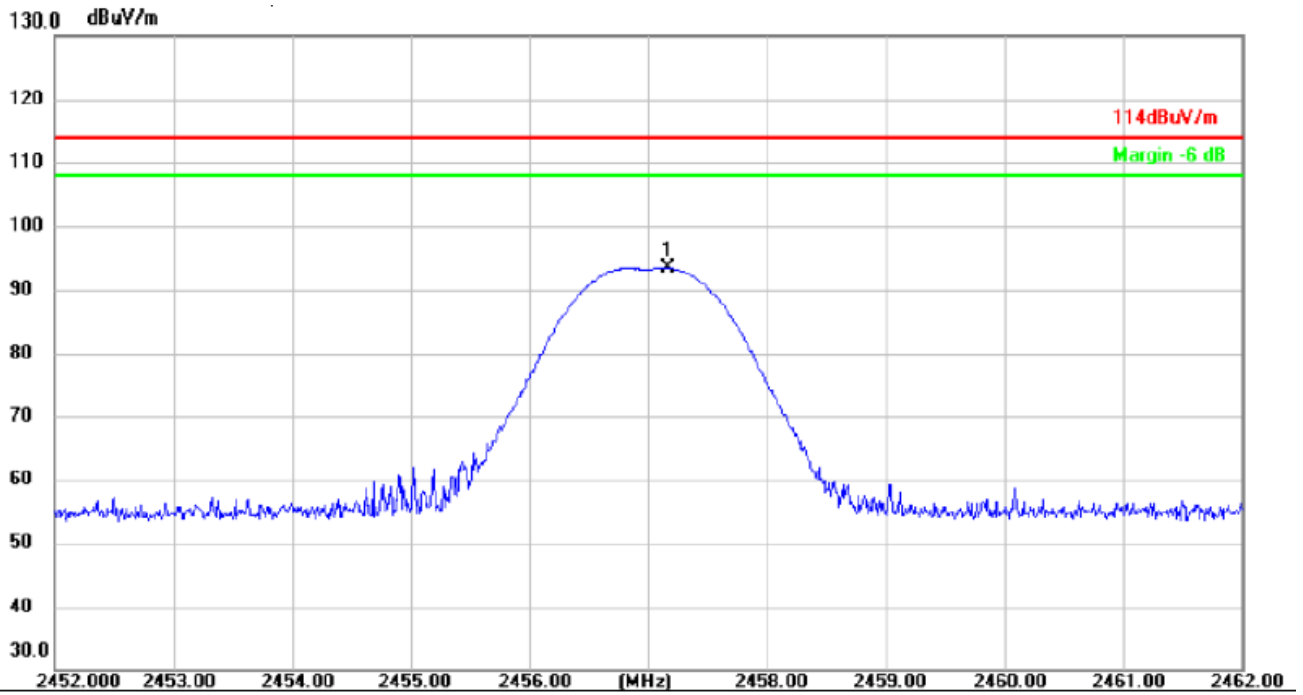

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	2457.160	62.25	31.12	93.37	114.00	-20.63	peak



## 5.5. Antenna Requirement

### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **Refer to statement below for compliance**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **Antenna Connected Construction**

The directional gains of antenna used for transmitting is 1.55 dBi, and the antenna is a spring antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

Results: Compliance.

## 6. Test Setup Photos of the EUT



## **7. External and Internal Photos of the EUT**

See related photo report.

.....**End of Report**.....