



FCC RADIO TEST REPORT

Applicant : Qingdao Magene Intelligence Technology Co., Ltd.
Address : Room 302, Building 3, No.328A Chengkang Road,
Xiazhuang Subdistrict, Chengyang District, Qingdao,
Shandong, China.
Equipment : Radar Tail Light
Model No. : P0108001, SEEMEE 508
Trade Name : Magene, MAGICSHINE
FCC ID. : 2ALZG-320
Standard : FCC part 15 Subpart C §15.249

I HEREBY CERTIFY THAT :

The sample was received on Jul. 14, 2022 and the testing was completed on Jul. 27, 2022 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Leevin Li /Supervisor



Contents

1. Summary of Test Procedure and Test Results	4
1.1 Applicable Standards	4
2. Test Configuration of Equipment under Test	5
2.1 Feature of Equipment under Test	5
2.2 Carrier Frequency of Channels	5
2.3 Test Mode and Test Software	6
2.4 Description of Test System	7
2.5 General Information of Test	8
2.6 Measurement Uncertainty	8
3. Equipment and Ancillaries Used for Tests	9
4. Antenna Requirements	11
4.1 Standard Applicable	11
4.2 Antenna Construction and Directional Gain	11
5. Test of AC Power Line Conducted Emission	12
5.1 Test Limit	12
5.2 Test Procedures	12
5.3 Typical Test Setup	13
5.4 Test Result and Data	14
6. Test of Spurious Emission (Radiated)	16
6.1 Test Limit	16
6.2 Test Procedures	16
6.3 Typical Test Setup	18
6.4 Test Result and Data (9kHz ~ 30MHz)	19
6.5 Test Result and Data (30MHz ~ 1GHz)	19
6.6 Test Result and Data (1GHz ~ 25GHz)	21
6.7 Test Result of Fundamental Emission	23
6.8 Restricted Bands of Operation	27
7. 20dB Bandwidth Measurement Data	28
7.1 Test Limit	28
7.2 Test Procedure	28
7.3 Test Setup Layout	28
7.4 Test Result and Data	28



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10: 2013

FCC Rules and Regulations Part 15 Subpart C §15.249

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.249(a)	Radiated Spurious Emission	PASS
15.215	20dB Bandwidth Measurement	PASS

Note: Deviations Yes No

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Equipment	Radar Tail Light
Model Name	P0108001, SEEMEE 508
Model Discrepancy	All models are identical except for the name and trade mark.
Frequency Range	BLE: 2400MHz-2483.5MHz ANT+: 2457MHz
Modulation Type	BLE: GFSK ANT+: GFSK
Antenna Type	BLE/ ANT+: PCB Antenna
Temperature Range	-10°C~50°C
EUT Power Rating	DC 5V, 750mA

Note: For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.

2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)
*00	2457

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software


- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Notebook and EUT for RF test.
- c. Run the test software “nrfgostudio.exe(1.21.2)” , under WIN 7 System was executed to transmit and receive data via ANT+.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
Mode 1	ANT+(2457MHz) for 120V
Mode 2	ANT+(2457MHz) for 240V
caused “Test Mode 1” generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
Mode 1	ANT+(2457MHz)
caused “Test Mode 1” generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
Mode 1	ANT+(2457MHz)
caused “Test Mode 1” generated the worst case, it was reported as the final data.	



2.4 Description of Test System

Product	Manufacturer	Model No.	Power Cord
1 Notebook	SONY	PCG-71811P	Non-Shielded, 1.8m

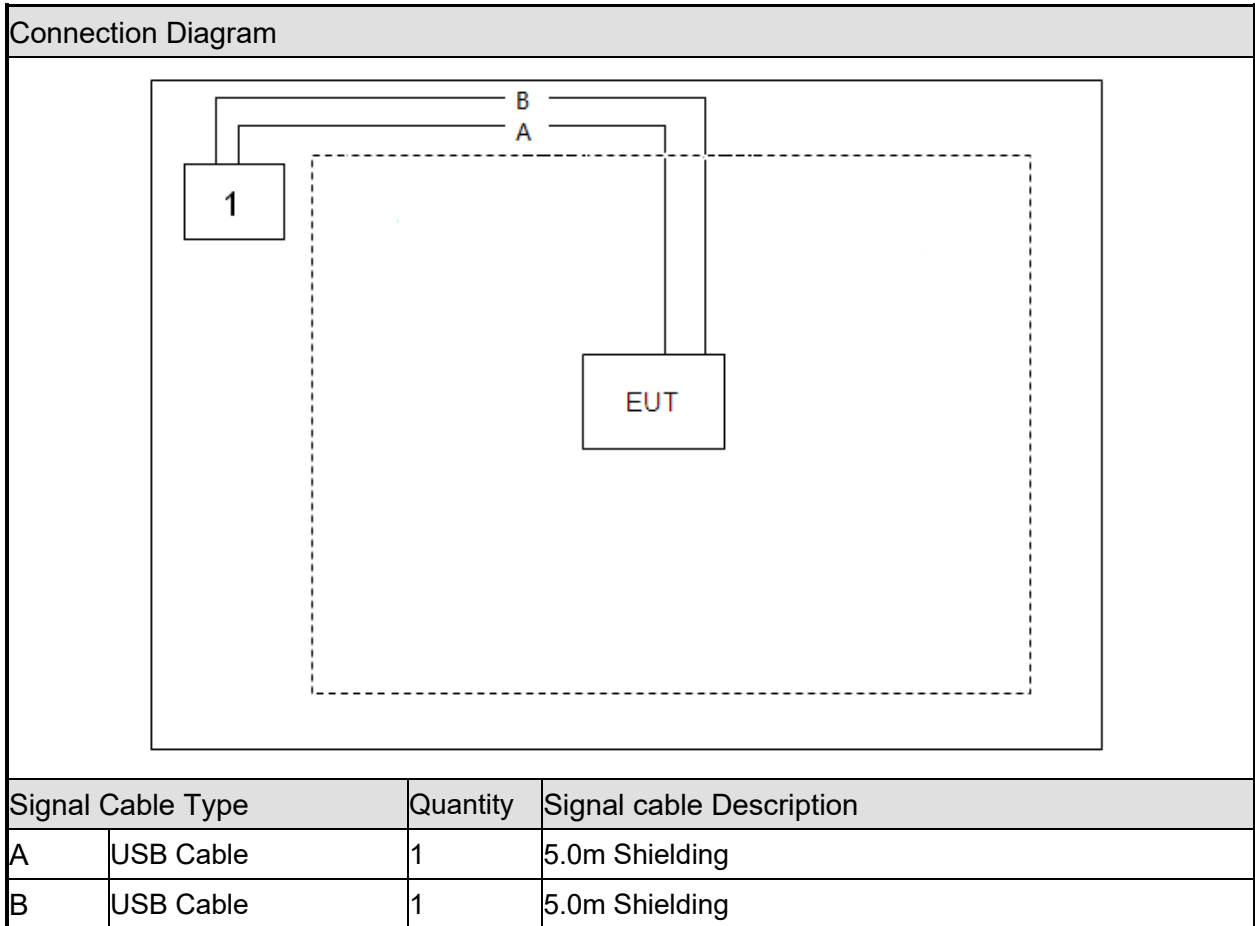



2.5 General Information of Test

Test Site	CerpPASS Technology Corporation(CerpPASS Laboratory) Address: Room 102, No. 5, Xing'an Road, Chang'an Town, Dongguan City, Guangdong Province Tel: +86-769-8547-1212 Fax: +86-769-8547-1912
FCC Designation No.:	CN1288
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

Test Item	Test Site	Test period	Environmental Conditions	Tested By
RF Conducted	RFCON01-DG	2022/07/25	23°C / 54%	Amos Zhang
Radiated Emissions	3M01-DG	2022/07/26	24°C / 56%	Amos Zhang
AC Power Line Conducted Emission	CON01-DG	2022/07/27	23°C / 54%	Amos Zhang

2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.17dB
Radiated Spurious Emission(9KHz~30MHz)	±4.99dB
Radiated Spurious Emission(30MHz~1GHz)	±4.39dB
Radiated Spurious Emission(1GHz~18GHz)	±5.36dB
Radiated Spurious Emission(18GHz~40GHz)	±5.43dB
6dB Bandwidth&20dB Bandwidth	±4.4%



3. Equipment and Ancillaries Used for Tests

AC Power Line Conducted Emission					
Test Site	Cond-01				
Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100564	2022.01.08	2023.01.07
LISN	SCHWARZBECK	NSLK 8127	8127748	2022.01.08	2023.01.07
LISN	R&S	ENV216	100024	2022.01.08	2023.01.07
ISN	TESEQ	ISN T800	42809	2022.05.07	2023.05.06
Pulse Limiter with 10dB Attenuation	SCHWARZBECK	VTSD 9561-F	9561-F106	2022.01.08	2023.01.07
Temperature/ Humidity Meter	GEMLEAD	STH200A	N/A	2021.08.17	2022.08.16

Radiated Emissions					
Test Site	3M01-DG				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Test Receiver	R&S	ESCI	100565	2022.05.07	2023.05.06
Amplifier	EMCI	EMC330	980082	2022.05.07	2023.05.06
Loop Antenna	R&S	HFH2-Z2	100150	2022.05.11	2024.05.10
Bilog Antenna	Sunol Science	JB1	A072414-2	2022.05.25	2024.05.24
Preamplifier	Agilent	8449B	3008A02342	2022.01.08	2023.01.07
Preamplifier	COM-POWER	PA-840	711885	2022.05.07	2023.05.06
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2022.05.22	2024.05.21
Standard Gain Horn Antenna	TRC	HA-2640	18050	2022.05.09	2024.05.08
Standard Gain Horn Antenna	TRC	HA-1726	18051	2022.05.09	2024.05.08
FSQ Signal Analyzer	R&S	FSQ40	200012	2022.05.07	2023.05.06
Temperature/ Humidity Meter	GEMLEAD	STH200A	N/A	2021.08.17	2022.08.16



RF Conducted					
Test Site	RFCON01-DG				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
MXA Signal Analyzer	KEYSIGHT	N9020A	US46220290	2022.05.07	2023.05.06
EXA Signal Analyzer	KEYSIGHT	N9010A	MY53400169	2022.05.07	2023.05.06
ESG VECTOR SIGNAL GENERATOR	Agilent	E4438C	MY45092582	2022.05.07	2023.05.06
MXG VECTOR SIGNAL GENERATOR	Agilent	N5182B	MY53050127	2022.05.07	2023.05.06
USB Wideband Power Sensor	Boonton	55006	9778	2022.01.08	2023.01.07
Temperature/ Humidity Meter	mingle	ETH529	N/A	2022.01.08	2023.01.07



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

ANT+

Antenna Type	PCB Antenna
Antenna Gain	0dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 6.2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

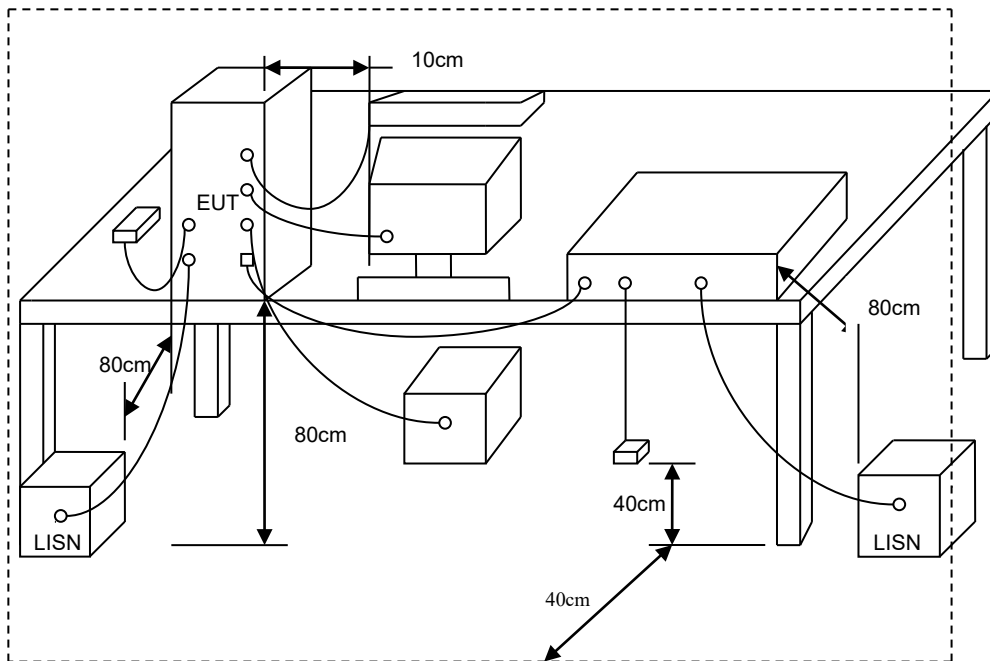




5.4 Test Result and Data

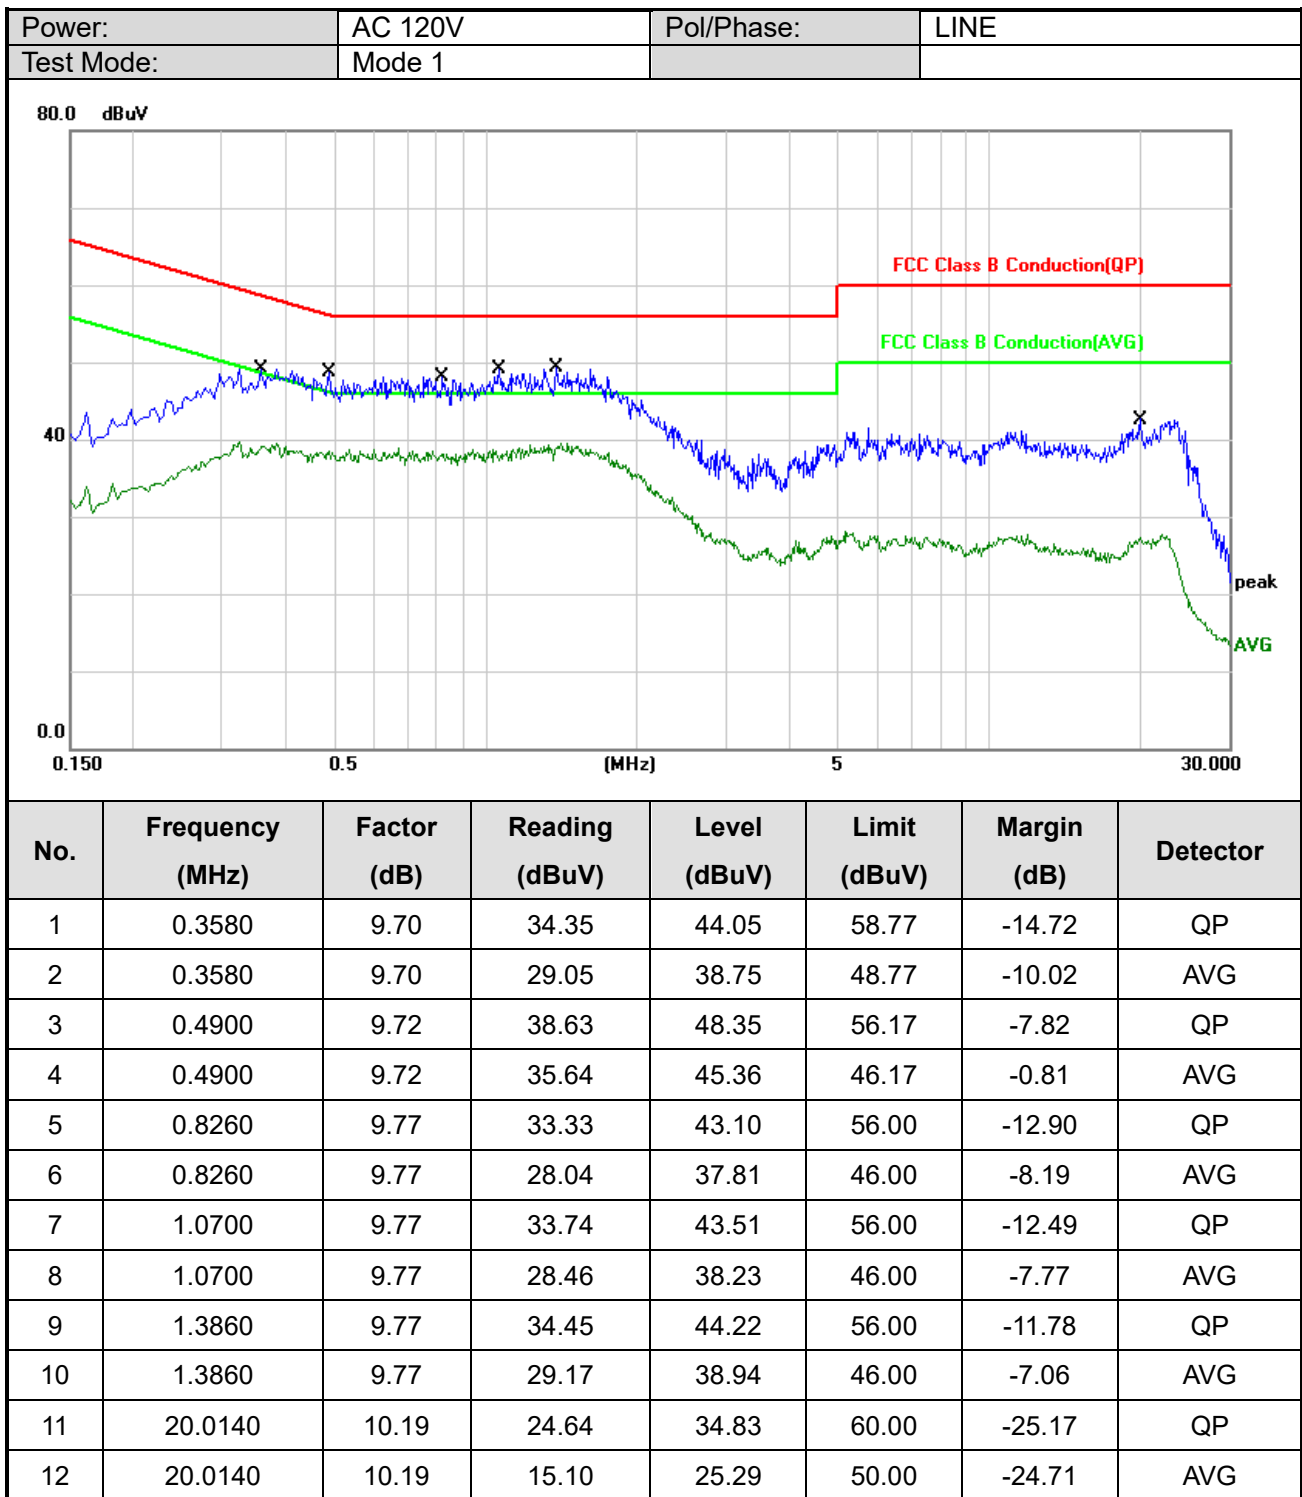

Note: Level = Reading + Factor
 Margin = Level – Limit

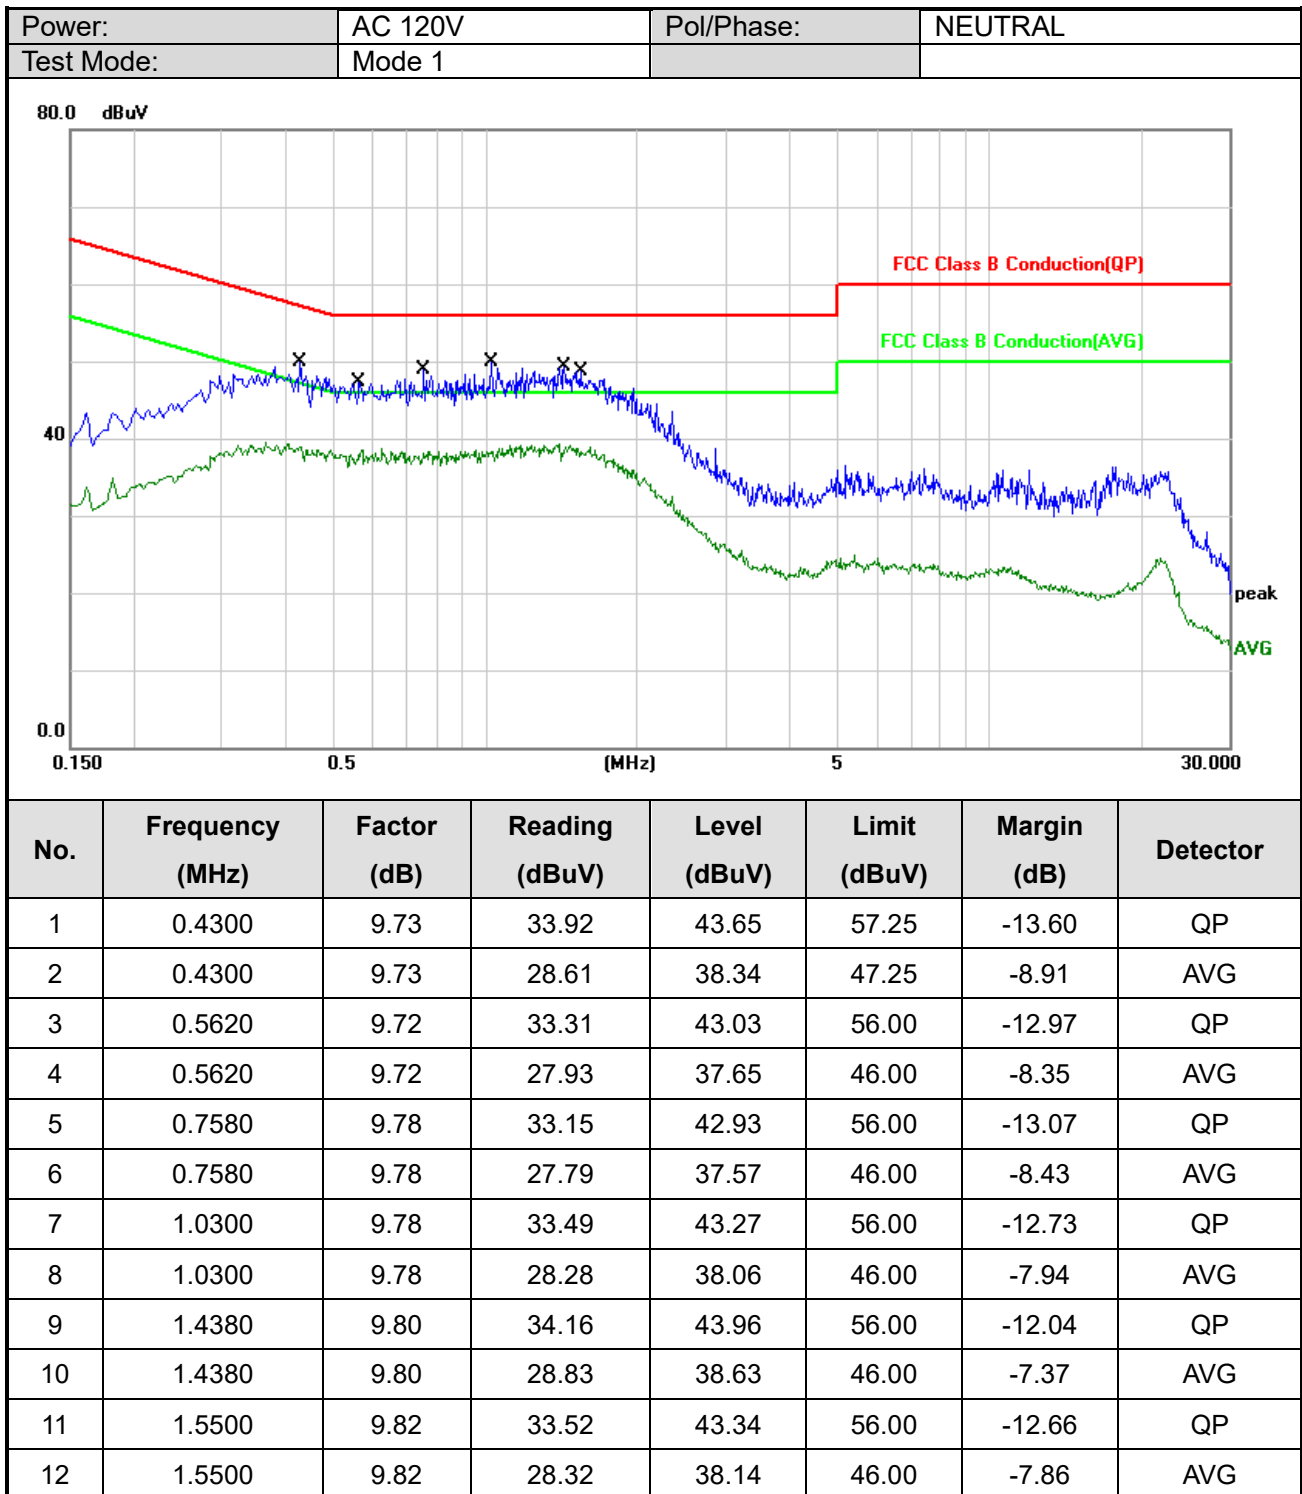

Note: Level = Reading + Factor
 Margin = Level – Limit



6. Test of Spurious Emission (Radiated)

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)	Measurement Distance (meters)
902-928 MHz	50	500	3
2400-2483.5 MHz	50	500	3
5725-5875 MHz	50	500	3
24.0-24.25 GHz	250	2500	3

6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not



have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.

(X-AXIS is the worst.)




6.3 Typical Test Setup


Below 30MHz test setup

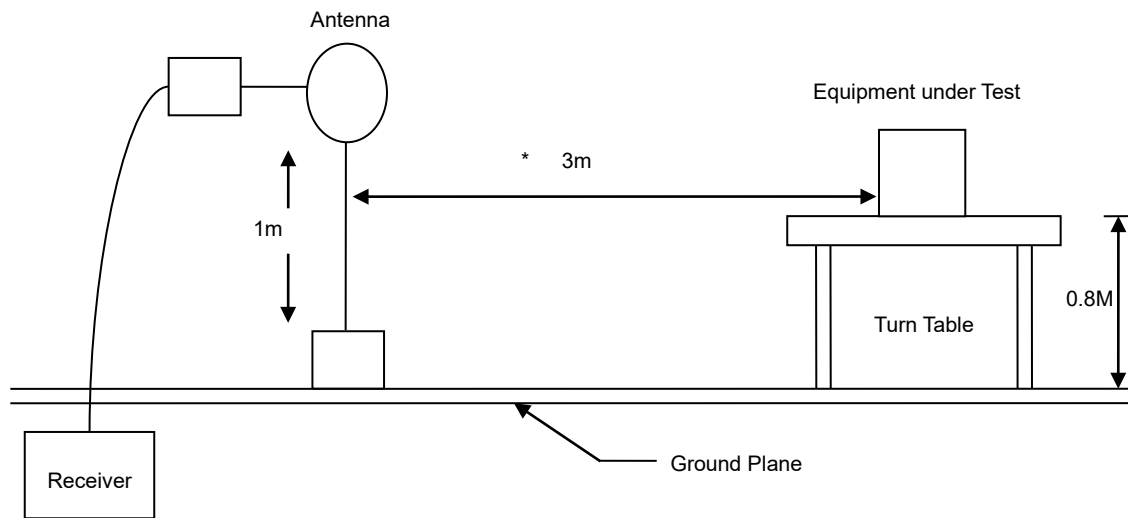

30MHz- 1GHz Test Setup

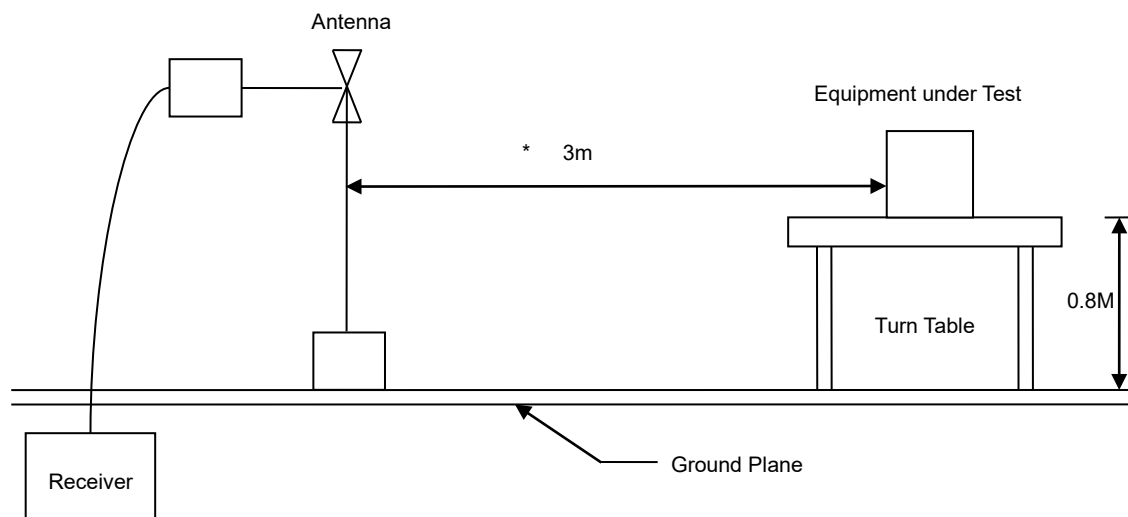

Above 1GHz Test Setup

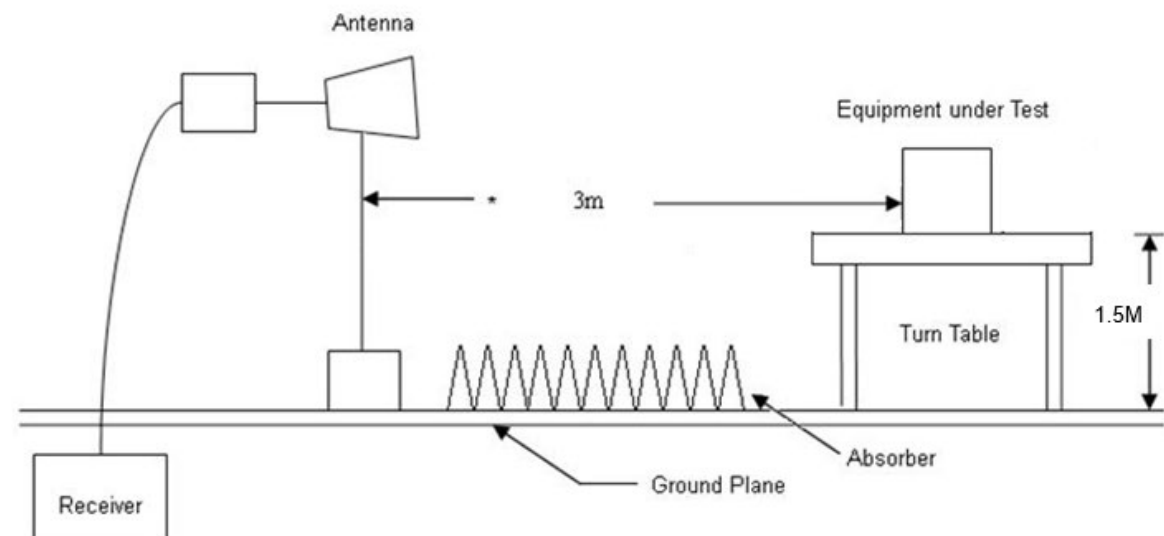




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz-30MHz spurious emission is under limit 20dB more.


6.5 Test Result and Data (30MHz ~ 1GHz)

Power	DC 5V from System	Pol/Phase	VERTICAL
Test Mode	Mode 1		

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor
 The 9KHz -30MHz spurious emission is under limit 20dB more

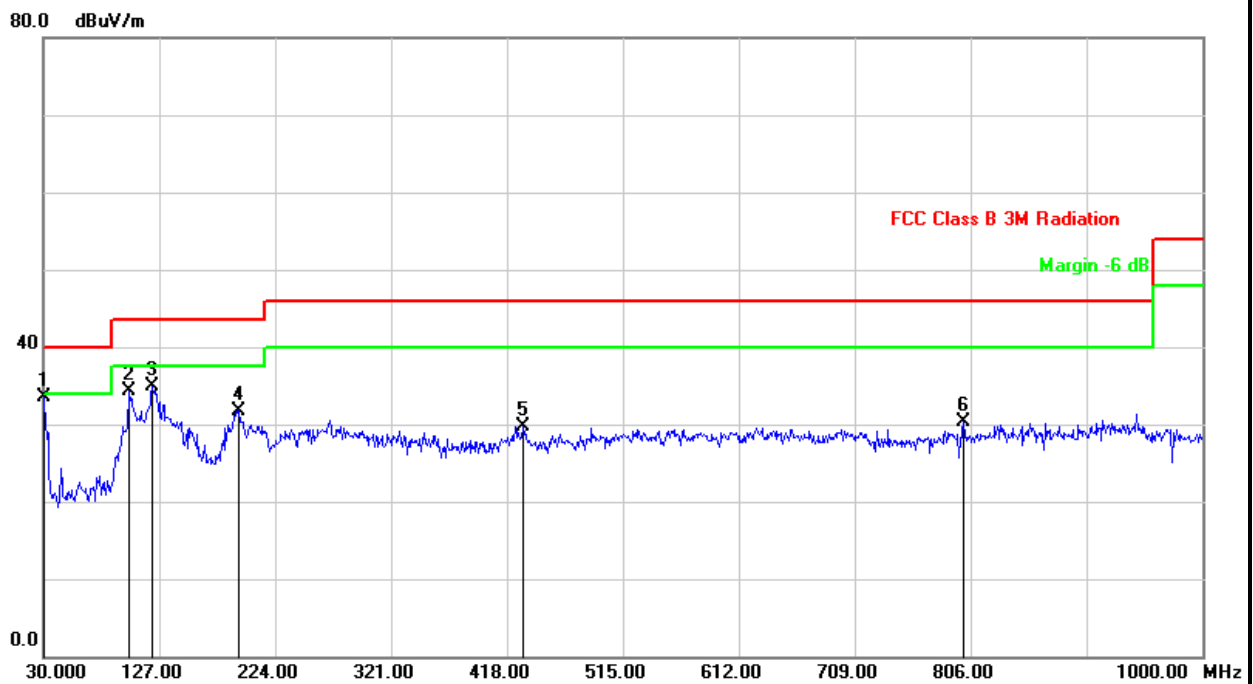


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	30.0000	-4.21	37.68	33.47	40.00	-6.53	peak	100	195
2	101.7800	-13.37	47.76	34.39	43.50	-9.11	peak	100	316
3	121.1800	-10.05	44.86	34.81	43.50	-8.69	peak	100	334
4	193.9299	-11.90	43.70	31.80	43.50	-11.70	peak	200	284
5	431.5799	-6.20	35.98	29.78	46.00	-16.22	peak	100	142
6	800.1798	0.35	30.05	30.40	46.00	-15.60	peak	200	215

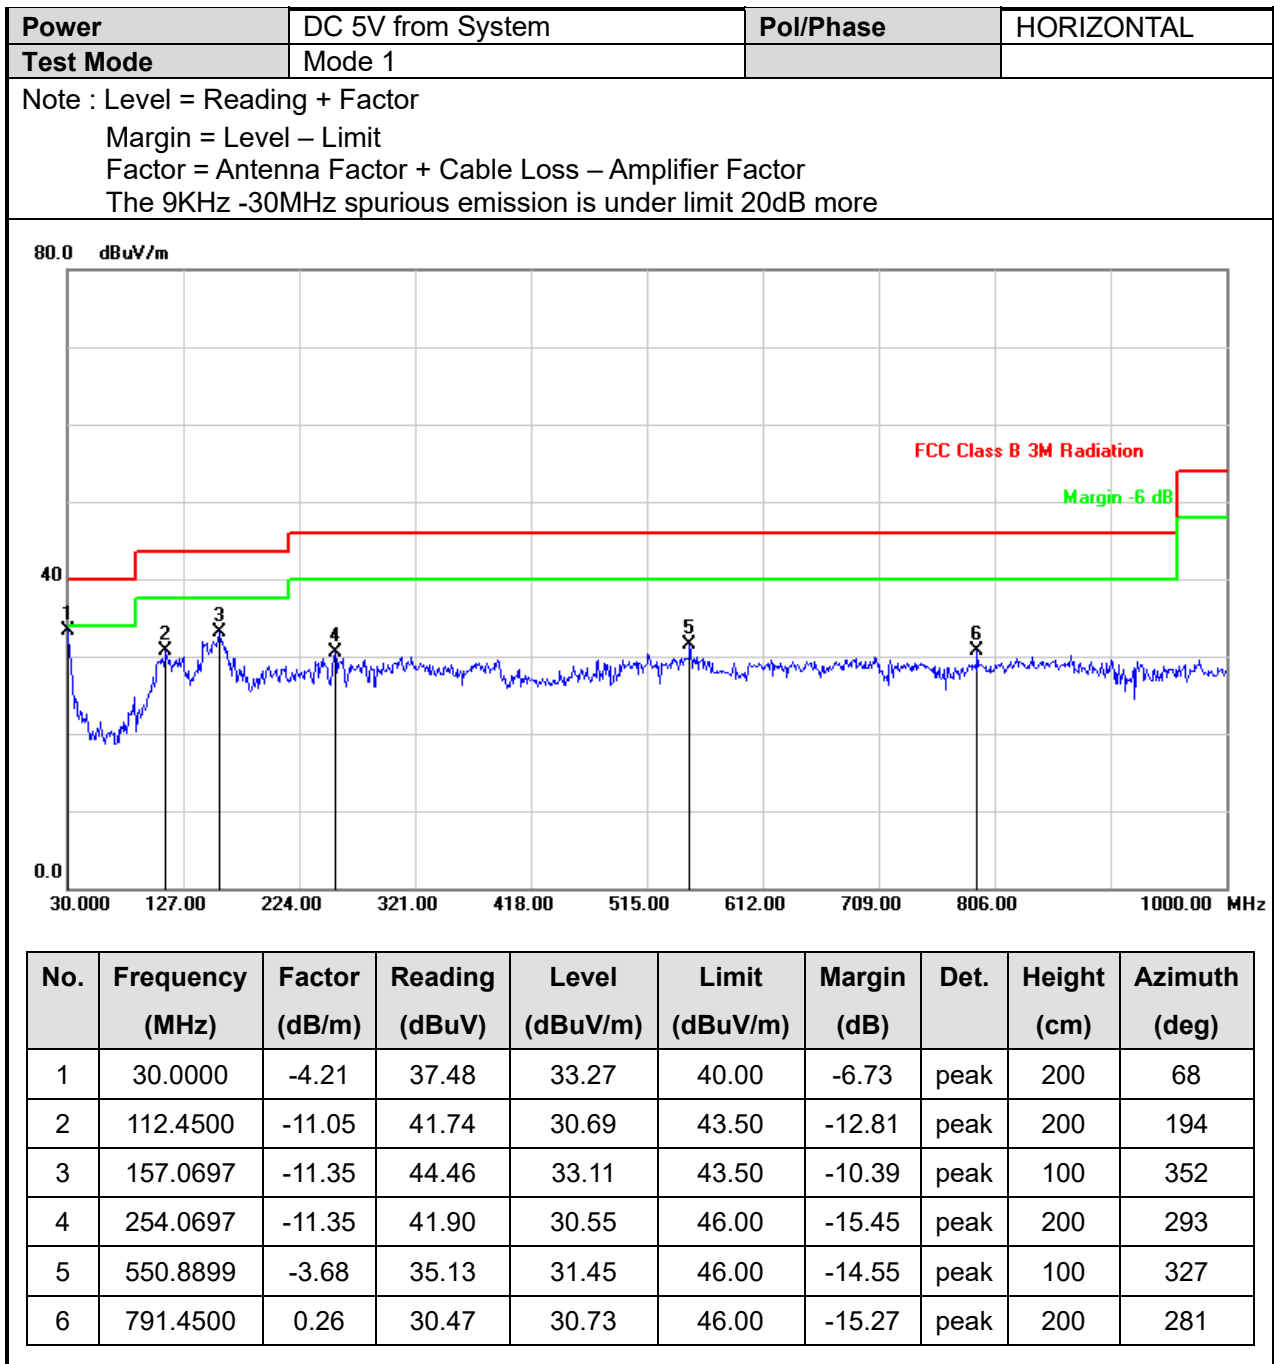




6.6 Test Result and Data (1GHz ~ 25GHz)

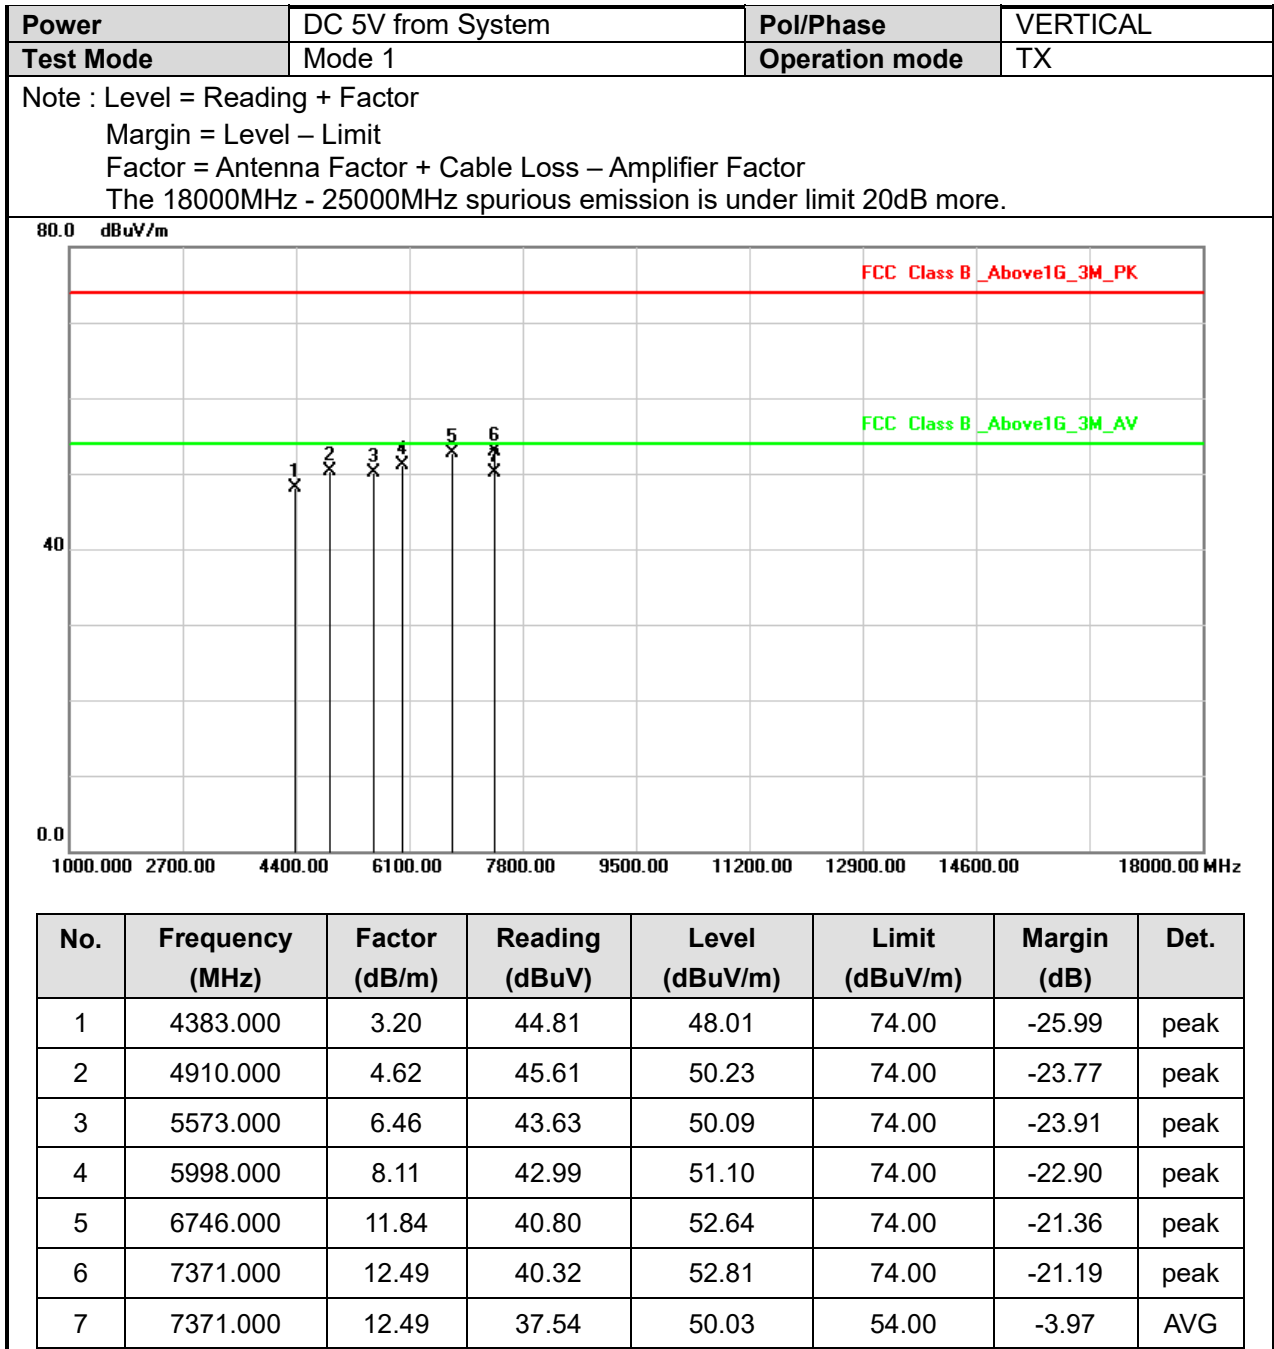



Power	DC 5V from System	Pol/Phase	HORIZONTAL
Test Mode	Mode 1, CH10	Operation mode	TX

Note : Level = Reading + Factor
 Margin = Level – Limit
 Factor = Antenna Factor + Cable Loss – Amplifier Factor
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

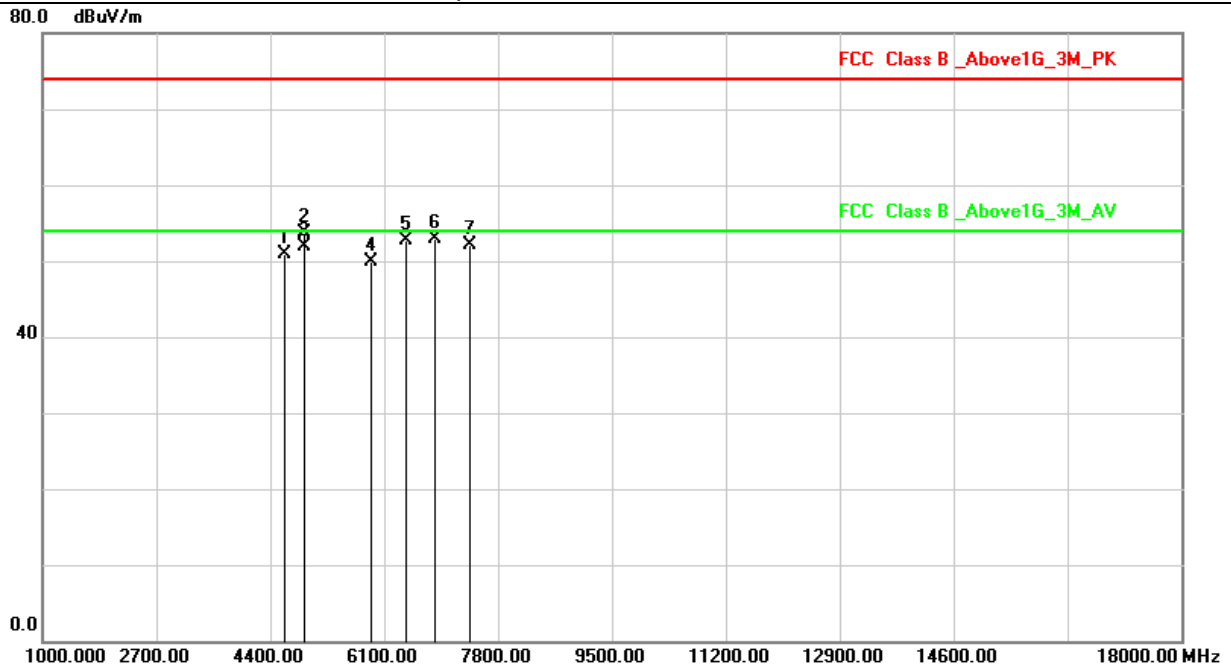


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	4604.000	3.86	46.99	50.85	74.00	-23.15	peak
2	4914.000	4.63	48.99	53.62	74.00	-20.38	peak
3	4914.000	4.63	47.29	51.92	54.00	-2.08	AVG
4	5913.000	7.77	42.06	49.83	74.00	-24.17	peak
5	6423.000	10.57	42.20	52.77	74.00	-21.23	peak
6	6865.000	12.25	40.64	52.89	74.00	-21.11	peak
7	7371.000	12.49	39.64	52.13	74.00	-21.87	peak



6.7 Test Result of Fundamental Emission

Power	: AC 120V/60Hz	Pol/Phase	: VERTICAL
Test Mode	: ANT+(2457MHz)		

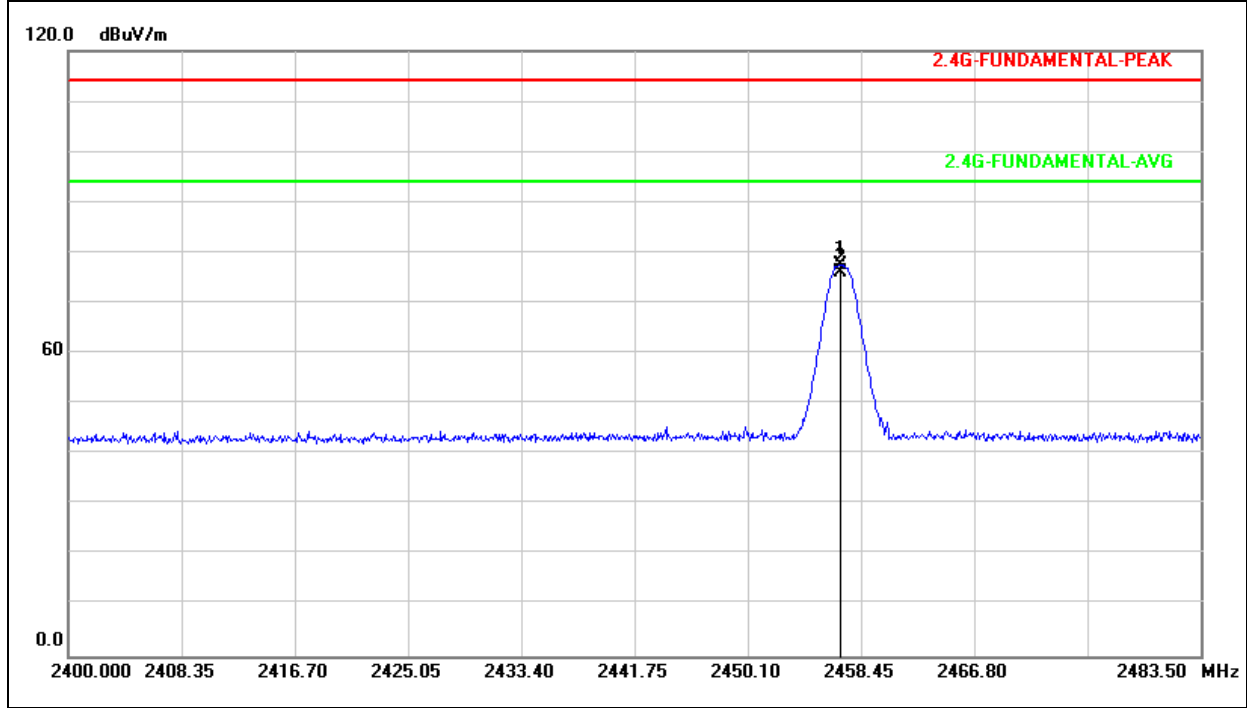


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2457.000	-2.83	80.23	77.40	114.00	-36.60	peak
2	2457.000	-2.83	78.77	75.94	94.00	-18.06	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: ANT+(2457MHz)		

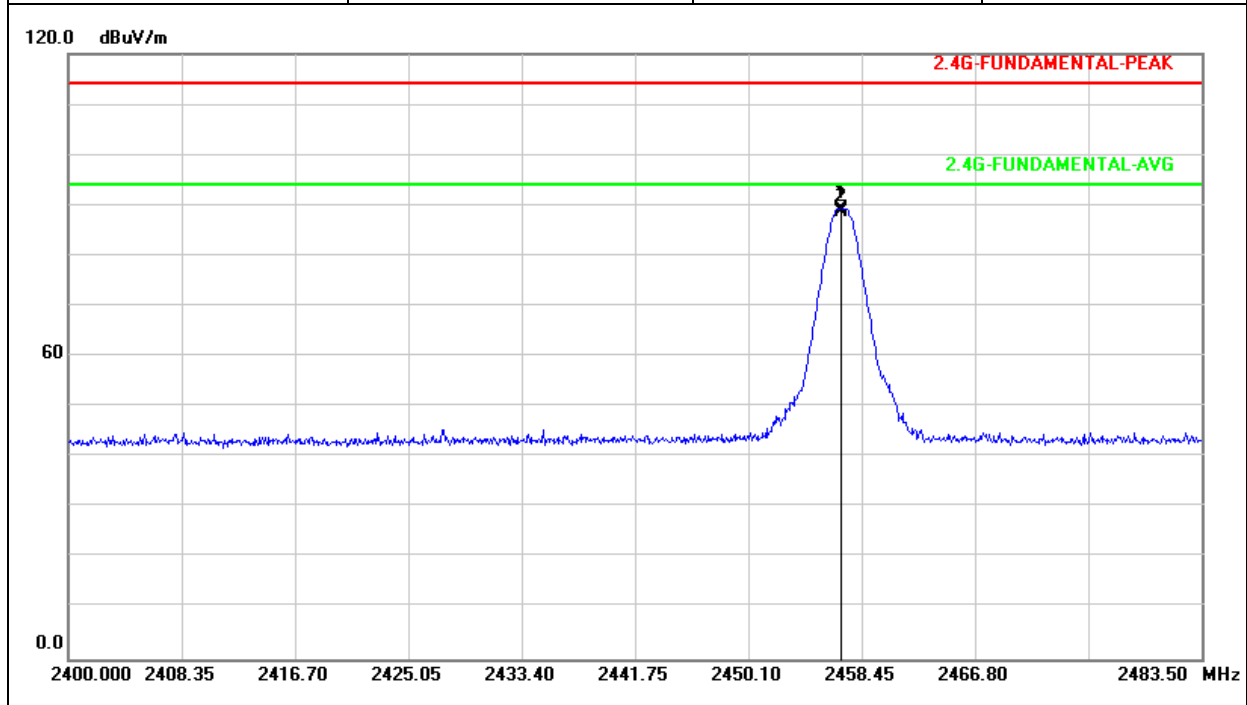


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2457.000	-2.83	92.14	89.31	114.00	-24.69	peak
2	2457.000	-2.83	91.62	88.79	94.00	-5.21	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: VERTICAL
Test Mode	: ANT+(2457MHz)		

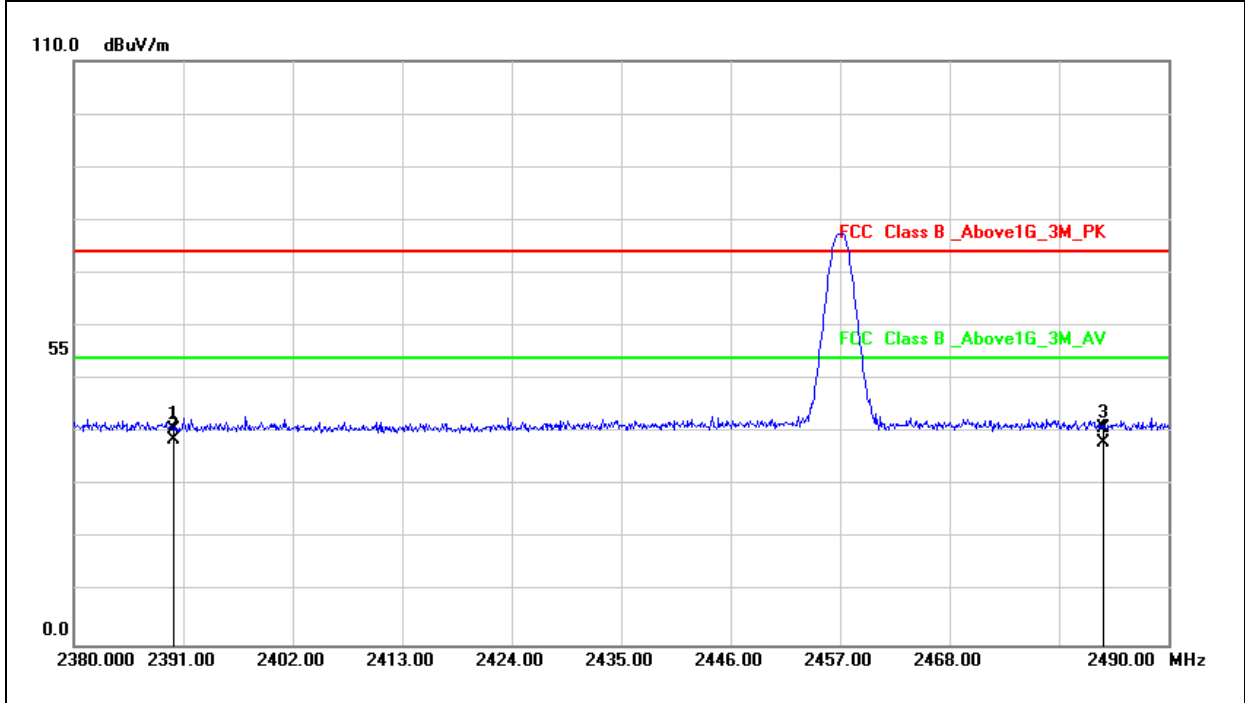


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	-3.13	43.71	40.58	74.00	-33.42	peak
2	2390.000	-3.13	41.88	38.75	54.00	-15.25	AVG
3	2483.500	-2.71	43.54	40.83	74.00	-33.17	peak
4	2483.500	-2.71	40.75	38.04	54.00	-15.96	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Power	: AC 120V/60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: ANT+(2457MHz)		

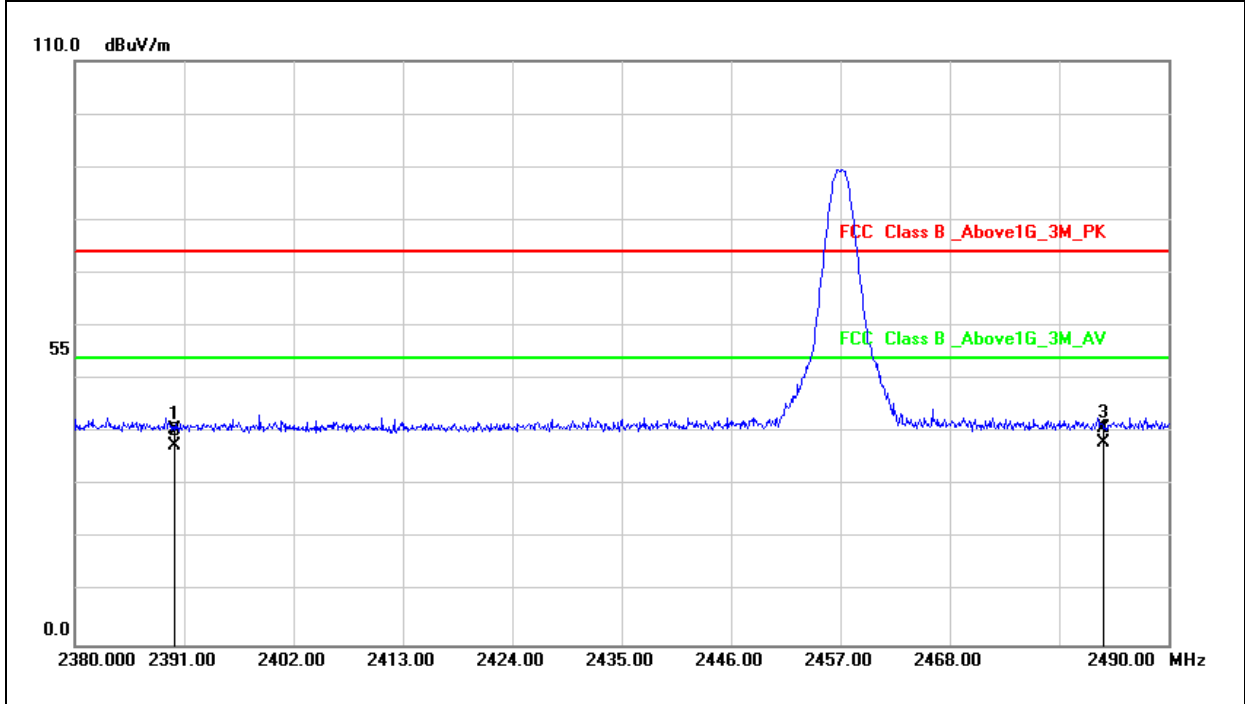

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	-3.13	43.66	40.53	74.00	-33.47	peak
2	2390.000	-3.13	40.78	37.65	54.00	-16.35	AVG
3	2483.500	-2.71	43.57	40.86	74.00	-33.14	peak
4	2483.500	-2.71	40.75	38.04	54.00	-15.96	AVG

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



6.8 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. 20dB Bandwidth Measurement Data


7.1 Test Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 30 KHz and VBW to 100KHz.
- c. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

7.3 Test Setup Layout

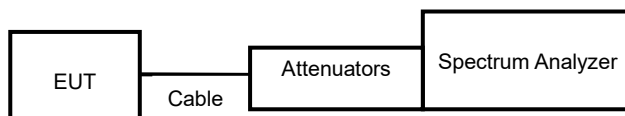


7.4 Test Result and Data

Frequency (MHz)	20dB Bandwidth (KHz)
2457	1112.00



ANT+:2457MHz

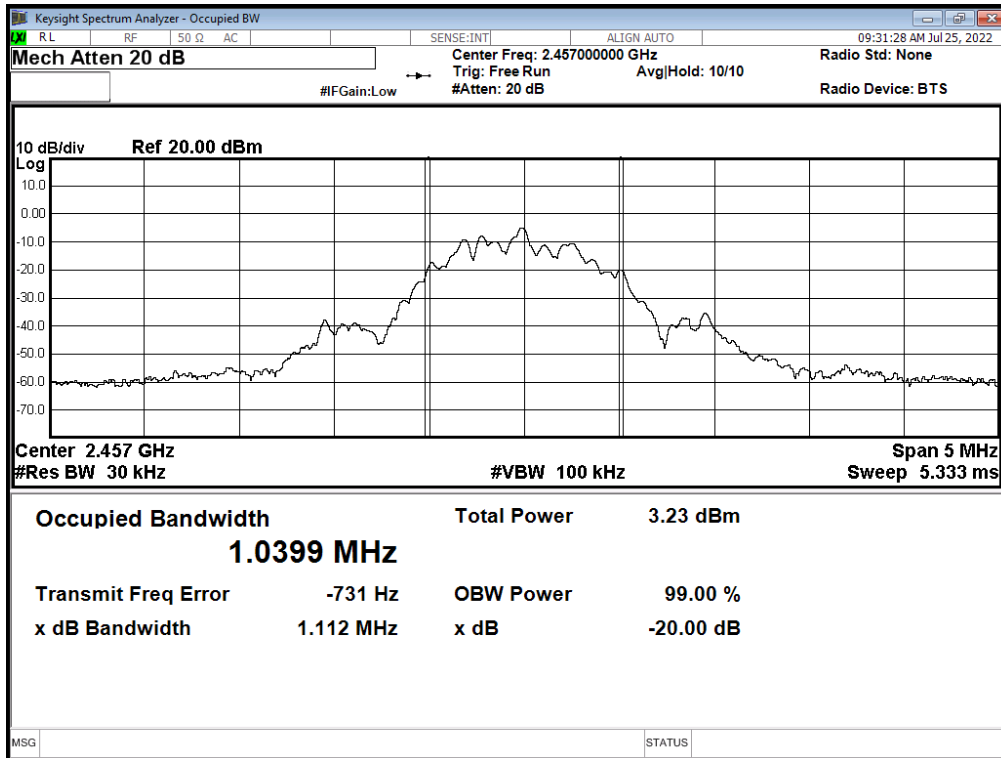

----- End of the report -----