



# TEST REPORT

**APPLICANT** : Great Talent Technology Limited

**PRODUCT NAME** : SC3218

**MODEL NAME** : SC3218

**BRAND NAME** : SCHOCK

**FCC ID** : 2ALZM-SC3218

**STANDARD(S)** : 47 CFR Part 22 Subpart H  
47 CFR Part 24 Subpart E  
47 CFR Part 27 Subpart L

**RECEIPT DATE** : 2019-10-08

**TEST DATE** : 2019-10-08 to 2019-10-23

**ISSUE DATE** : 2019-10-26

Edited by: Zhao Zetian  
ZhaoZetian (Rapporteur)

Approved by: Peng Huarui  
Peng Huarui ( Supervisor )

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information ..... 4
  - 1.1. Applicant and Manufacturer Information ..... 4
  - 1.2. Equipment Under Test (EUT) Description ..... 4
  - 1.3. Maximum ERP/EIRP and Emission Designator ..... 7
  - 1.4. Test Standards and Results ..... 8
  - 1.5. Environmental Conditions ..... 9
- 2. 47 CFR Part 2, Part 22H , 24E&27L Requirements ..... 10
  - 2.1. Conducted RF Output Power ..... 10
  - 2.2. Peak to Average Ratio ..... 14
  - 2.3. 99% Occupied Bandwidth ..... 24
  - 2.4. Frequency Stability ..... 30
  - 2.5. Conducted Out of Band Emissions ..... 35
  - 2.6. Band Edge ..... 41
  - 2.7. Transmitter Radiated Power (EIRP/ERP) ..... 46
  - 2.8. Radiated Out of Band Emissions ..... 52
- Annex A Test Uncertainty ..... 76
- Annex B Testing Laboratory Information ..... 77



<b>Change History</b>		
<b>Version</b>	<b>Date</b>	<b>Reason for change</b>
1.0	2019-10-26	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Great Talent Technology Limited
<b>Applicant Address:</b>	RM602,T3 Software Park,Nanshan,Shenzhen,China
<b>Manufacturer:</b>	Great Talent Technology Limited
<b>ManufacturerAddress:</b>	RM602,T3 Software Park,Nanshan,Shenzhen,China

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	SC3218
<b>Hardware Version:</b>	SC3218-V1.1
<b>Software Version:</b>	SC3218_V1.0.4
<b>Modulation Type:</b>	GSM/GPRS Mode with GMSK Modulation EDGE Mode with 8PSK Modulation WCDMA Mode with QPSK Modulation HSDPA Mode with QPSK Modulation HSUPA Mode with QPSK Modulation HSPA+ Mode with QPSK Modulation
<b>Operating Frequency Range:</b>	<b>GSM 850MHz:</b> Tx: 824.20 - 848.80MHz Rx: 869.20 - 893.80MHz <b>GSM 1900MHz:</b> Tx: 1850.20 - 1909.80MHz Rx: 1930.20 - 1989.80MHz <b>WCDMA Band V</b> Tx: 826.4 - 846.6MHz Rx: 871.4 - 891.6MHz <b>WCDMA Band II</b> Tx: 1852.4 - 1907.6MHz Rx: 1932.4 - 1987.6MHz



<b>Operating Frequency Range:</b>	<b>WCDMA Band IV</b>	
	Tx: 1712.4 – 1752.6MHz Rx: 2112.4 - 2152.6MHz	
<b>Antenna Type:</b>	Fixed Internal	
<b>Antenna Gain:</b>	GSM 850:	-2.03 dBi
	GSM1900:	-0.01 dBi
	WCDMA Band V:	-2.03 dBi
	WCDMA Band II:	-0.01 dBi
	WCDMA Band IV:	-0.30 dBi
<b>Accessory Information:</b>	Battery	
	Brand Name:	SCHOCK
	Model No.:	SB165
	Capacity:	1650mAh
	Rated Voltage:	3.80V
	Charge Limit:	4.35V
	AC Adapter 1	
	Brand Name:	SCHOCK
	Model No.:	KFL-C050100
	Rated Input:	100-240V~50/60Hz 0.2A
	Rated Output:	5V=1.0A
	Charging Base	
	Brand Name:	SCHOCK
	Model No.:	SC3218
	Rated Input:	5V=1.0A
Rated Output:	5V=1.0A	

**Note 1:** The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula  $F(n)=824.2+0.2*(n-128)$ ,  $128 \leq n \leq 251$ ; the lowest, middle, highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 190(836.6MHz) and 251 (848.8MHz).

**Note 2:** The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula  $F(n)=1850.2+0.2*(n-512)$ ,  $512 \leq n \leq 810$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

**Note 3:** The transmitter (Tx) frequency arrangement of the WCDMA Band V used by the EUT can be represented with the formula  $F(n)=826.4+0.2*(n-4132)$ ,  $4132 \leq n \leq 4233$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are



separately 4132 (826.4MHz), 4182(836.4MHz) and 4233 (846.6MHz).

**Note 4:** The transmitter (Tx) frequency arrangement of the WCDMA Band II used by the EUT can be represented with the formula  $F(n)=1852.4+0.2*(n-9262)$ ,  $9262 \leq n \leq 9538$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

**Note 5:** The transmitter (Tx) frequency arrangement of the WCDMA 1700MHz band used by the EUT can be represented with the formula  $F(n)=1712.4+0.2*(n-1312)$ ,  $1312 \leq n \leq 1513$ ; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 1312 (1712.4MHz), 1413 (1732.6MHz) and 1513 (1752.6MHz).

**Note 6:** All modes and data rates were considered and evaluated respectively by performing full test. Test modes are chosen to be reported as the worst case below:

GPRS mode and EDGE mode for GSM 850;

GPRS mode and EDGE mode for GSM 1900;

WCDMA mode for WCDMA band V;

WCDMA mode for WCDMA band II;

WCDMA mode for WCDMA band IV;

**Note 7:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



### 1.3. Maximum ERP/EIRP and Emission Designator

System	Maximum ERP/EIRP (W)	Emission Designator
GSM850	0.863	244KGXW
EDGE850	0.229	245KG7W
GSM1900	0.881	248KGXW
EDGE1900	0.463	247KG7W
WCDMA Band V	0.127	4M15F9W
WCDMA Band II	0.056	4M16F9W
WCDMA Band IV	0.085	4M16F9W



## 1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22, Part 24 and Part 27 for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 2(10-1-12 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22(10-1-12 Edition)	Public Mobile Services
3	47 CFR Part 24(10-1-12 Edition)	Personal Communications Services
4	47 CFR Part 27(10-1-12 Edition)	Miscellaneous Wireless Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	2.1046	Conducted RF Output Power	Oct 23, 2019	Gao Mingzhou	PASS
2	24.232(d),27.50(d)	Peak -Average Ratio	Oct 11& 12, 2019	Gao Mingzhou	PASS
3	2.1049	99% Occupied Bandwidth	Oct11& 12, 2019	Gao Mingzhou	PASS
4	2.1055,22.355, 24.235, 27.54	Frequency Stability	Oct 15&16, 2019	Gao Mingzhou	PASS
5	2.1051,22.917(a),2 4.238(a), 27.53(h)	Conducted Out of Band Emissions	Oct11& 12, 2019	Gao Mingzhou	PASS
6	2.1051,22.917(a),2 4.238(a), 27.53(h)	Band Edge	Oct 10 ,11 & 12, 2019	Gao Mingzhou	PASS
7	22.913(a),24.232(a )	Transmitter Radiated Power (EIPR/ERP)	Oct 23, 2019	Wang Dalong	PASS
8	2.1051,22.917(a),2 4.238(a), 27.53(h)	Radiated Out of Band Emissions	Oct 10&15, 2019	Wang Dalong	PASS

**Note 1:** The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03 (Oct 27, 2017)and ANSI/TIA-603-E-2016.

**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 26.5dB contains two parts that cable loss 16.5dB and Attenuator 10dB.





## 1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

## 2. 47 CFR Part 2, Part 22H , 24E&27L Requirements


### 2.1. Conducted RF Output Power

#### 2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

#### 2.1.2. Test Description

Test Setup:

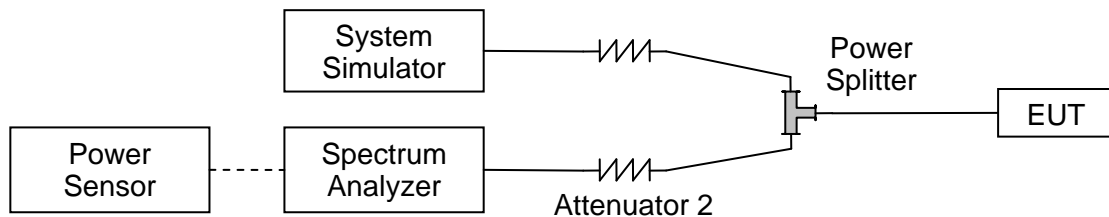

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

**2.1.3. Test Results**

<b>GSM850</b>	<b>Average Power (dBm)</b>		
<b>TX Channel</b>	<b>128</b>	<b>190</b>	<b>251</b>
<b>Frequency (MHz)</b>	<b>824.2</b>	<b>836.6</b>	<b>848.8</b>
GSM 1 Tx slot	33.53	33.54	33.52
GPRS 1 Tx slot	33.61	33.51	33.62
GPRS 2 Tx slots	31.53	31.41	31.55
GPRS 3 Tx slots	29.44	29.36	29.41
GPRS 4 Tx slots	27.35	27.42	27.31
EDGE 1 Tx slot	27.75	27.77	27.72
EDGE 2 Tx slots	25.68	25.52	25.71
EDGE 3 Tx slots	23.66	23.51	23.81
EDGE 4 Tx slots	21.63	21.75	21.76

<b>GSM1900</b>	<b>Average Power (dBm)</b>		
<b>TX Channel</b>	<b>512</b>	<b>661</b>	<b>810</b>
<b>Frequency (MHz)</b>	<b>1850.2</b>	<b>1880</b>	<b>1909.8</b>
GSM 1 Tx slot	29.46	29.45	29.43
GPRS 1 Tx slot	29.41	29.61	29.52
GPRS 2 Tx slots	28.15	28.01	27.95
GPRS 3 Tx slots	26.35	26.52	26.53
GPRS 4 Tx slots	24.92	25.10	25.05
EDGE 1 Tx slot	26.59	26.67	26.61
EDGE 2 Tx slots	24.15	24.16	23.91
EDGE 3 Tx slots	22.94	22.91	22.71
EDGE 4 Tx slots	21.52	21.65	21.76



<b>WCDMA Band V</b>	<b>Average Power (dBm)</b>		
<b>TX Channel</b>	<b>4132</b>	<b>4182</b>	<b>4233</b>
<b>Frequency (MHz)</b>	<b>826.4</b>	<b>836.4</b>	<b>846.6</b>
AMR 12.2Kbps	23.01	22.99	23.04
RMC 12.2Kbps	23.02	23.03	23.01
HSDPA Subtest-1	22.56	22.17	22.03
HSDPA Subtest-2	21.99	21.87	21.76
HSDPA Subtest-3	21.66	21.49	21.41
HSDPA Subtest-4	21.31	21.28	21.19
HSUPA Subtest-1	22.09	22.11	22.06
HSUPA Subtest-2	21.76	21.55	21.76
HSUPA Subtest-3	21.39	21.52	21.43
HSUPA Subtest-4	21.41	21.31	21.12
HSUPA Subtest-5	20.87	20.62	20.76
HSPA+ (16QAM) Subtest-1	21.19	21.11	21.08

<b>WCDMA Band II</b>	<b>Average Power (dBm)</b>		
<b>TX Channel</b>	<b>9262</b>	<b>9400</b>	<b>9538</b>
<b>Frequency (MHz)</b>	<b>1852.4</b>	<b>1880.0</b>	<b>1907.6</b>
AMR 12.2Kbps	21.33	21.27	21.17
RMC 12.2Kbps	21.35	21.24	21.19
HSDPA Subtest-1	20.41	20.35	20.29
HSDPA Subtest-2	19.89	19.75	19.78
HSDPA Subtest-3	19.77	19.68	19.71
HSDPA Subtest-4	19.81	19.79	19.76
HSUPA Subtest-1	20.38	20.29	20.17
HSUPA Subtest-2	19.89	19.81	19.73
HSUPA Subtest-3	19.76	19.71	19.69
HSUPA Subtest-4	19.21	19.11	19.06
HSUPA Subtest-5	19.17	19.13	19.03
HSPA+ (16QAM) Subtest-1	20.18	20.09	20.01



WCDMA Band IV	Average Power (dBm)		
	1312	1413	1513
<b>TX Channel</b>	<b>1712.4</b>	<b>1732.6</b>	<b>1752.6</b>
<b>Frequency (MHz)</b>	<b>1712.4</b>	<b>1732.6</b>	<b>1752.6</b>
AMR 12.2Kbps	21.03	21.13	21.25
RMC 12.2Kbps	21.01	21.12	21.23
HSDPA Subtest-1	20.39	20.36	20.26
HSDPA Subtest-2	19.87	19.76	19.75
HSDPA Subtest-3	19.75	19.69	19.68
HSDPA Subtest-4	19.79	19.80	19.73
HSUPA Subtest-1	20.36	20.3	20.14
HSUPA Subtest-2	19.87	19.82	19.70
HSUPA Subtest-3	19.74	19.72	19.66
HSUPA Subtest-4	19.19	19.12	19.03
HSUPA Subtest-5	19.15	19.14	19.09
HSPA+ (16QAM) Subtest-1	20.11	20.10	19.98


## 2.2. Peak to Average Ratio

### 2.2.1. Requirement

According to FCC 24.232(d) the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 2.2.2. Test Description

Test Setup:

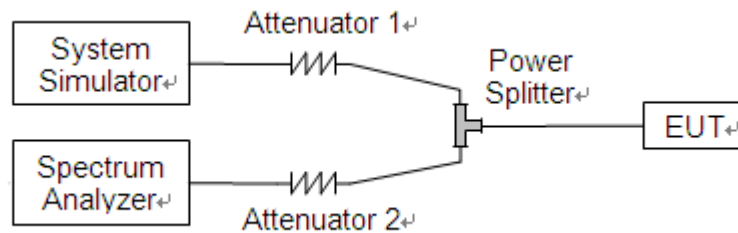

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

### 2.2.3. Test procedure

1. For GSM/EDGE operating mode:

- a. Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
- b. Set EUT in maximum output power, and triggered the burst signal.
- c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.

2. For UMTS operating mode:

- a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.



**2.2.4. Test Result**

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.



**A. Test Verdict:**

Band	Channel	Frequency (MHz)	Peak to Average ratio	Limit	Verdict
			dB	dB	
GSM850M Hz	128	824.2	0.058	13	PASS
	190	836.6	0.036		PASS
	251	848.8	0.016		PASS
GSM 1900MHz	512	1850.2	0.023		PASS
	661	1880.0	0.014		PASS
	810	1909.8	0.032		PASS
EDGE850 MHz	128	824.2	0.039		PASS
	190	836.6	0.005		PASS
	251	848.8	0.023		PASS
EDGE 1900MHz	512	1850.2	0.062	PASS	
	661	1880.0	0.033	PASS	
	810	1909.8	0.002	PASS	



Band	Channel	Frequency (MHz)	Peak to Average ratio	Limit	Verdict
			dB	dB	
WCDMA Band V	4132	826.4	3.16	13	PASS
	4183	836.4	3.14		PASS
	4233	846.6	3.12		PASS
WCDMA Band II	9262	1852.4	3.05		PASS
	9400	1880.0	2.97		PASS
	9538	1907.6	3.03		PASS
WCDMA Band IV	1312	1712.4	3.09		PASS
	1413	1732.6	3.03		PASS
	1513	1752.6	3.03		PASS



### GSM 850MHz CH128 824.2MHz

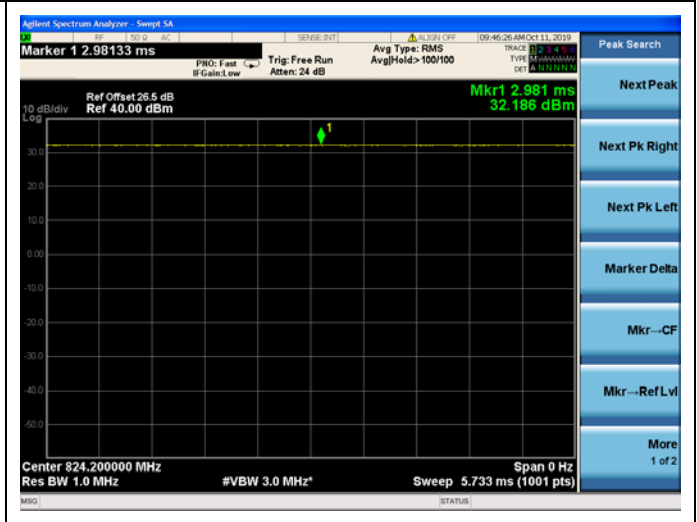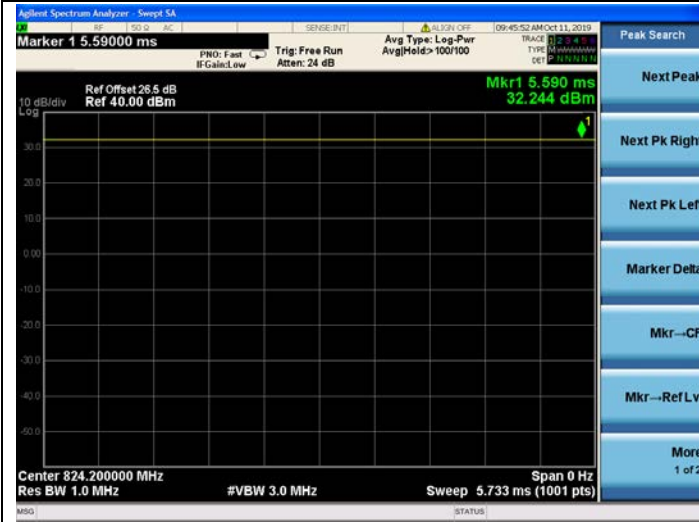


### GSM 850MHz CH190 836.6MHz

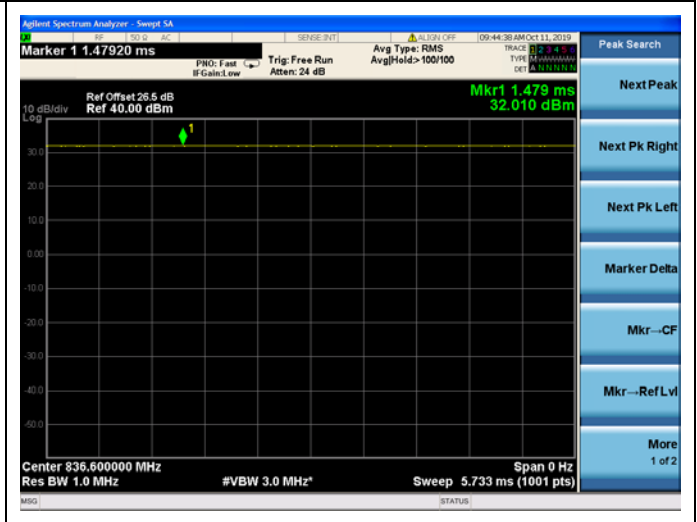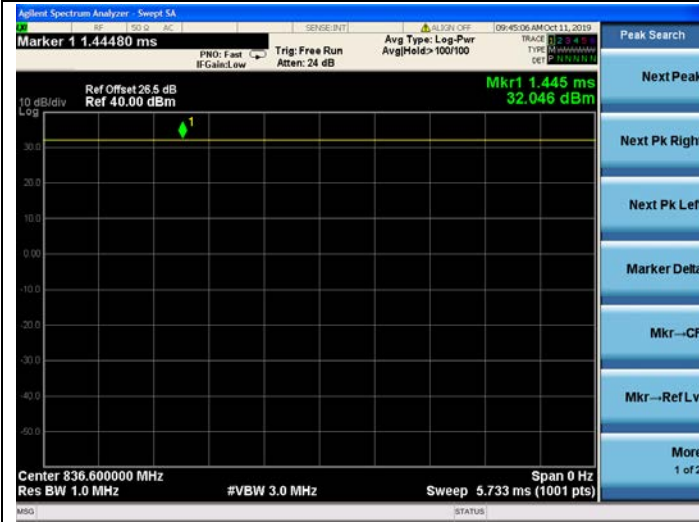







**GSM 850MHz CH251 848.8MHz**

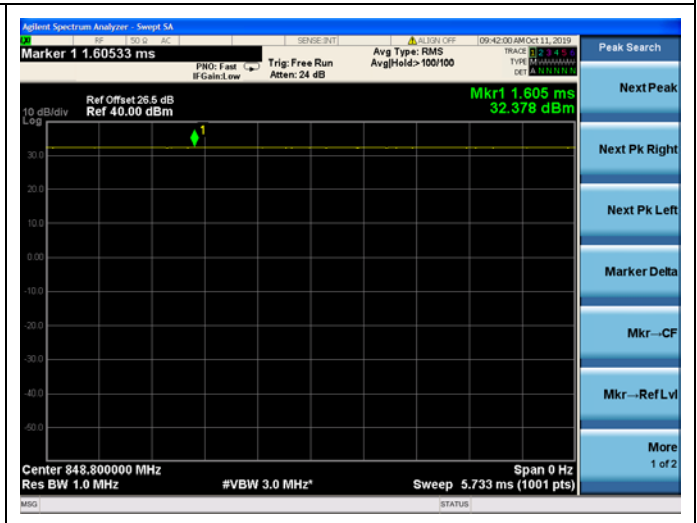

**GSM 1900MHz CH512 1850.2MHz**

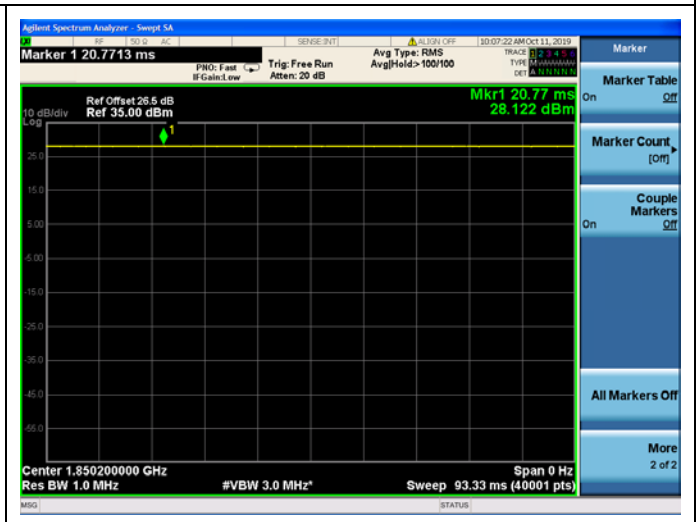


**GSM 1900MHz CH661 1880.0MHz**

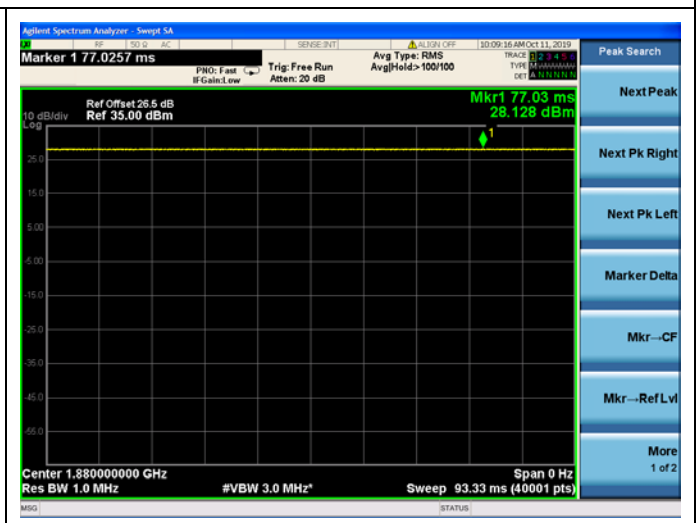





### GSM 1900MHz CH810 1909.8MHz

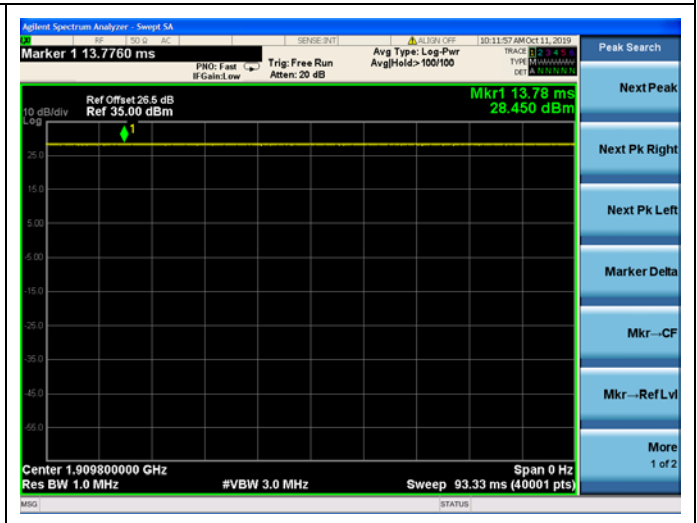

### EDGE 850MHz CH128 824.2MHz

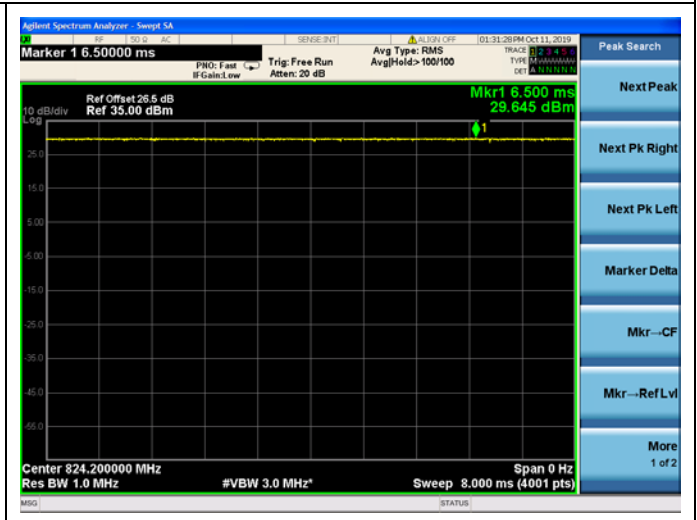


### EDGE 850MHz CH190 836.6MHz

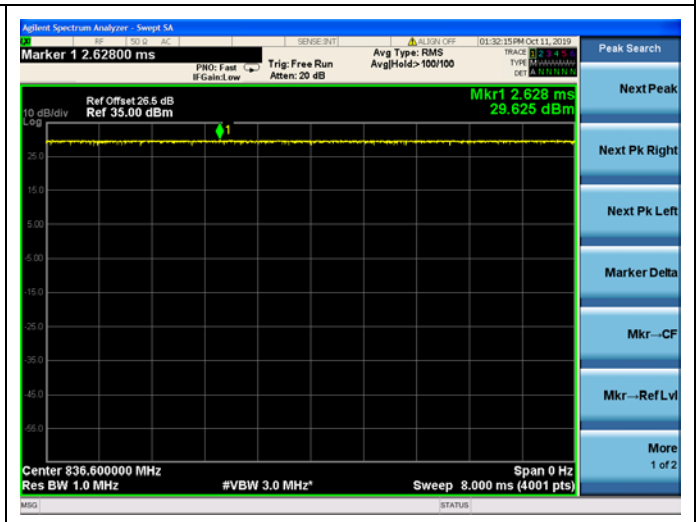





**EDGE 850MHz CH251 848.8MHz**

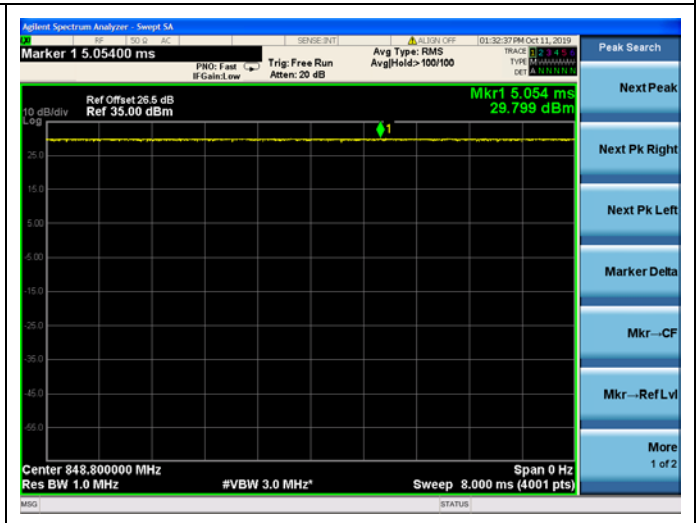

**EDGE 1900MHz CH512 1850.2MHz**

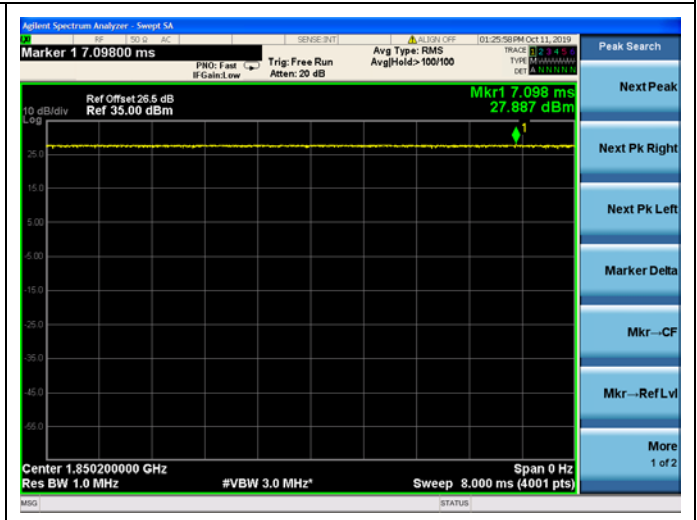



**EDGE 1900MHz CH661 1880.0MHz**

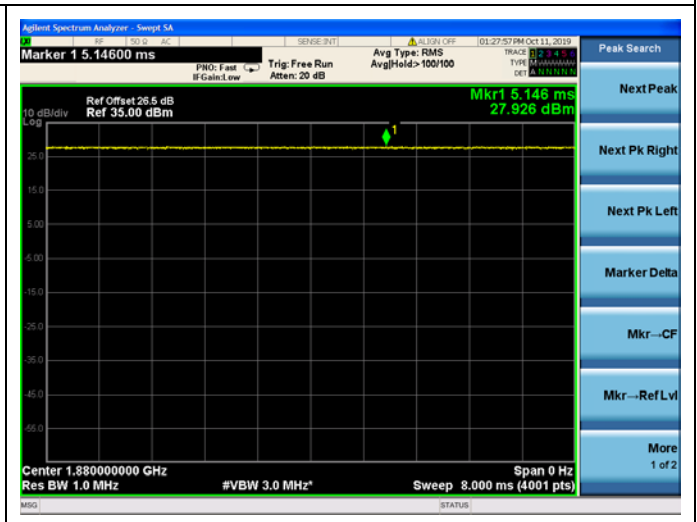





EDGE 1900MHz CH810 1909.8MHz



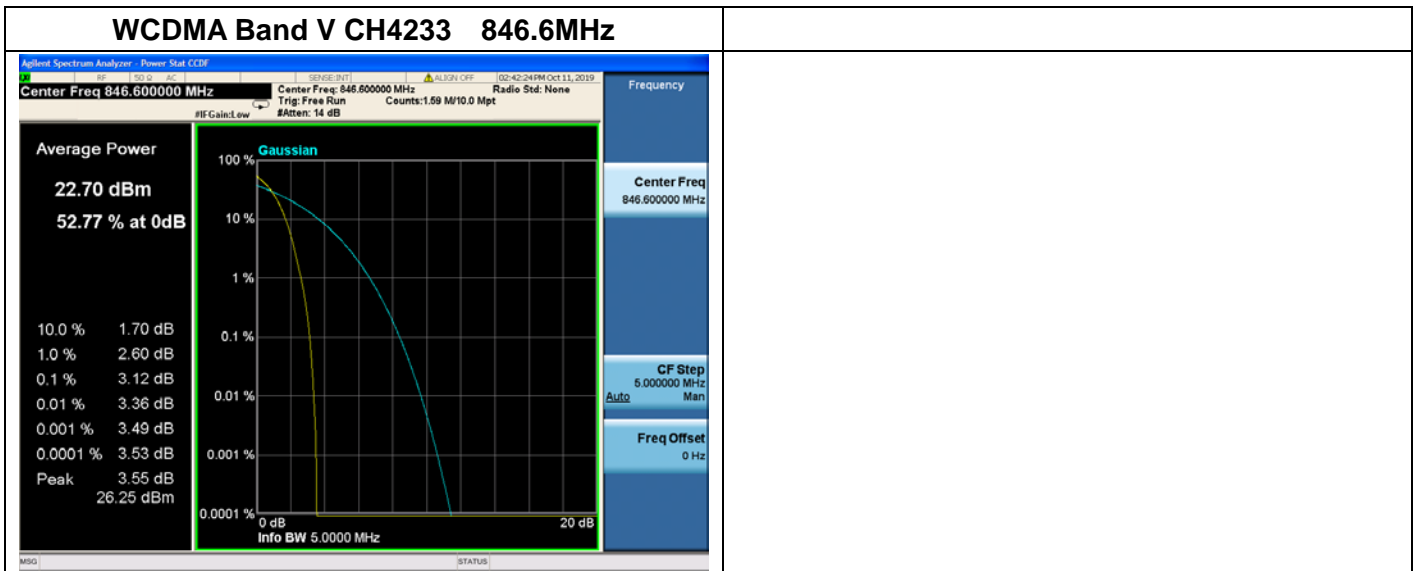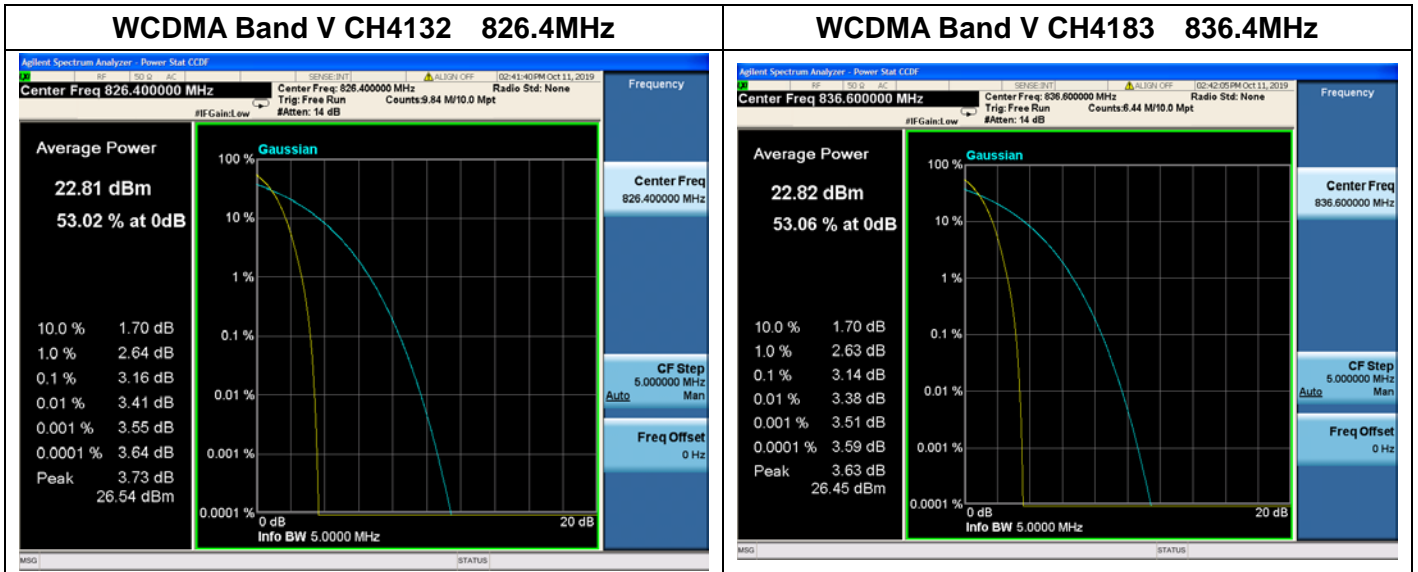

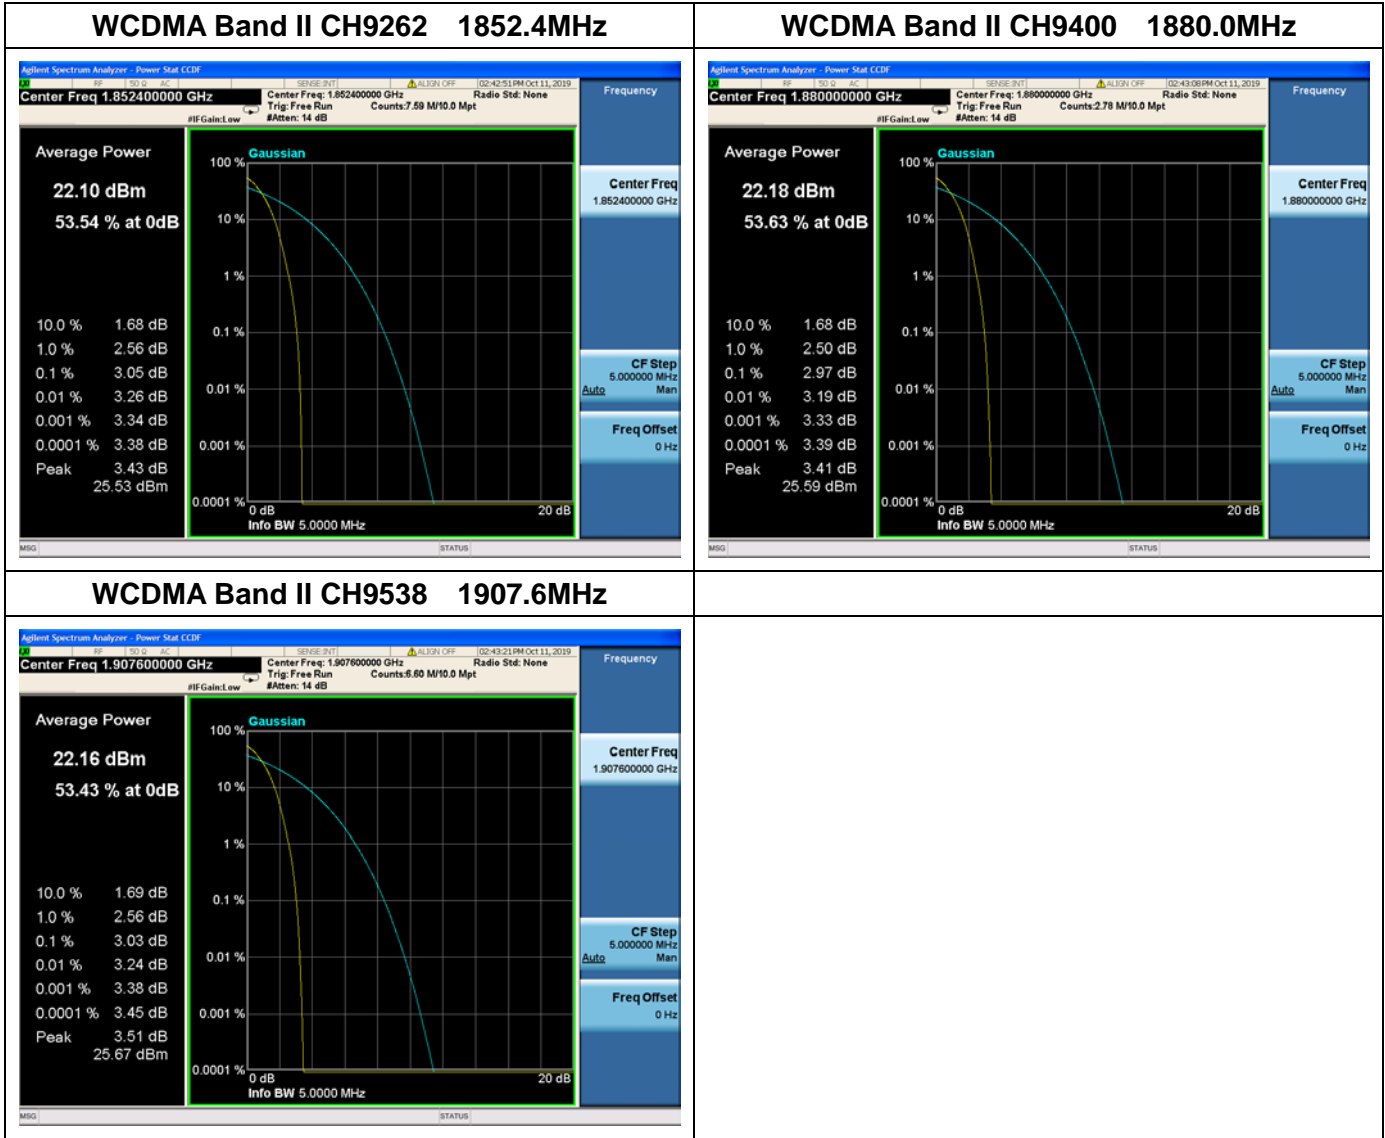

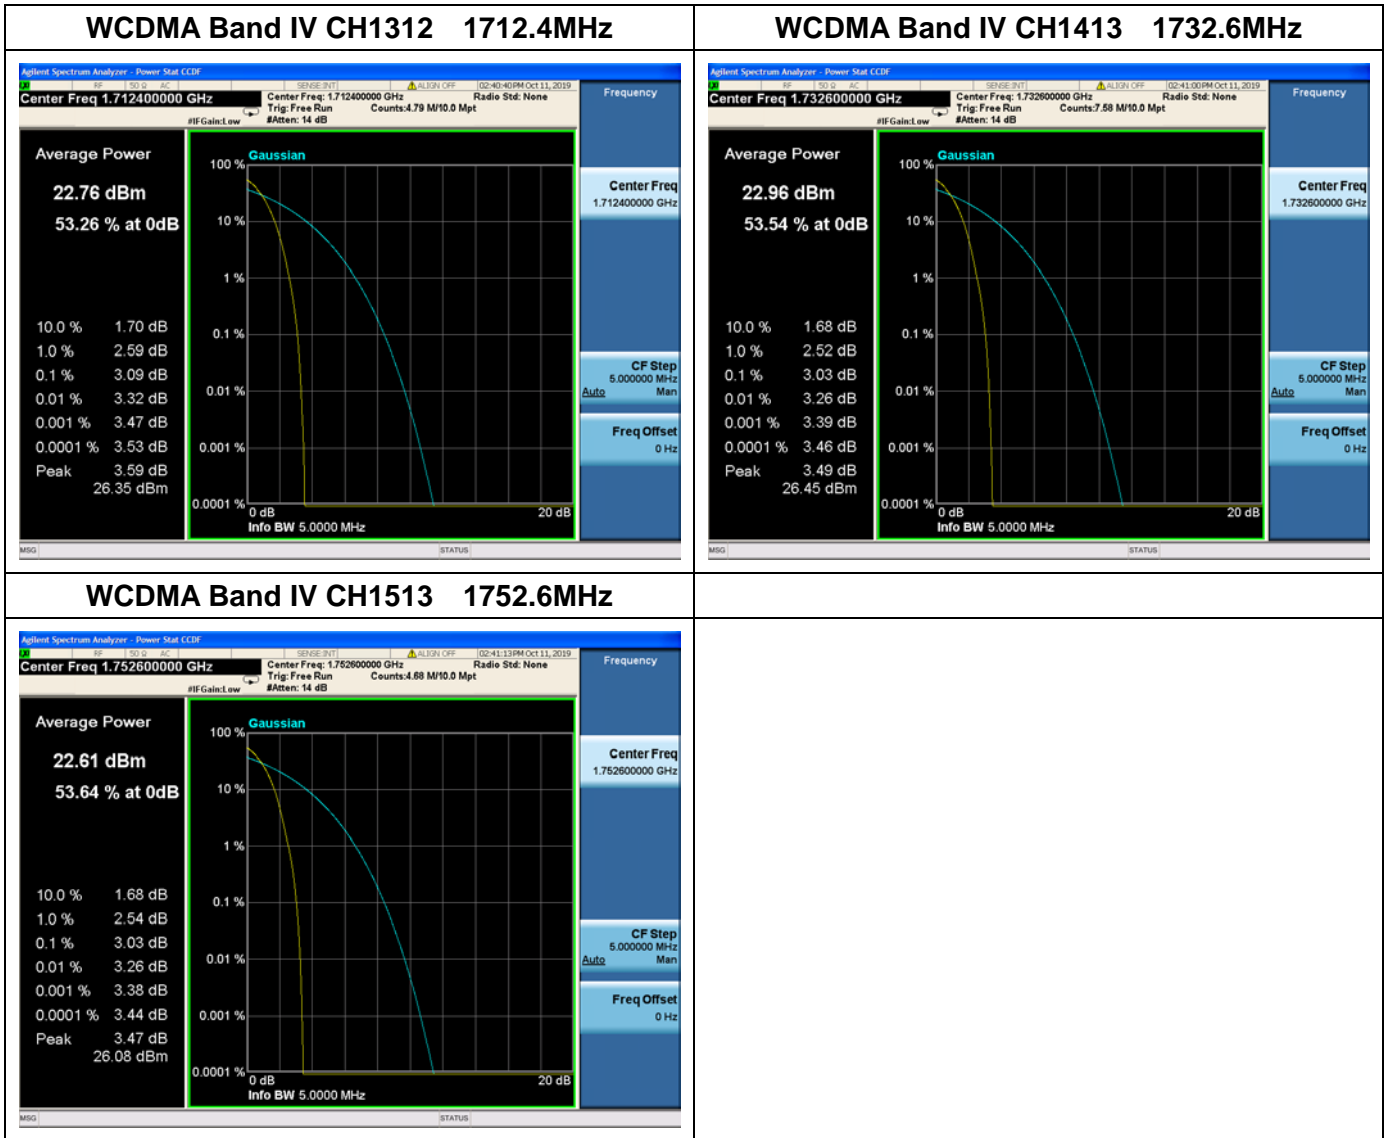


## 2.3. 99% Occupied Bandwidth

### 2.3.1. Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

### 2.3.2. Test Description

Test Setup:

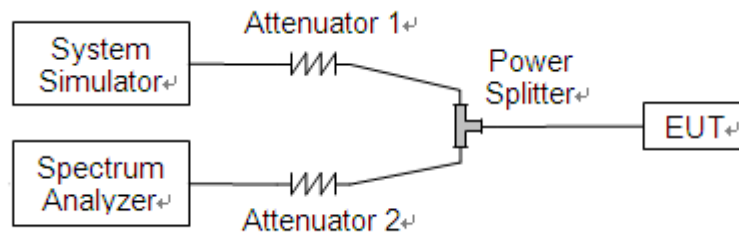

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.





### 2.3.3. Test Result

The lowest, middle and highest channels are selected to perform testing to record the 99% occupied bandwidth.

#### GSM Test Verdict:


Band	Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26dB Bandwidth (kHz)
GSM 850MHz	128	824.2	242.21	312.0
	190	836.6	244.05	315.6
	251	848.8	242.93	311.7
GSM 1900MHz	512	1850.2	240.14	312.3
	661	1880.0	248.41	320.3
	810	1909.8	239.90	313.7
EDGE 850MHz	128	824.2	242.72	316.5
	190	836.6	244.78	306.6
	251	848.8	244.79	304.6
EDGE 1900MHz	512	1850.2	240.16	310.5
	661	1880.0	239.53	307.1
	810	1909.8	247.07	305.9

#### WCDMA Test Verdict:


Band	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
WCDMA Band V	4132	826.4	4.133	4.702
	4183	836.4	4.134	4.707
	4233	846.6	4.148	4.721
WCDMA Band II	9262	1852.4	4.148	4.72
	9400	1880.0	4.156	4.721
	9538	1907.6	4.143	4.713
WCDMA Band IV	1312	1712.4	4.143	4.735
	1413	1732.6	4.151	4.712
	1513	1752.6	4.158	4.721




**GSM 850MHz CH128 824.2MHz**

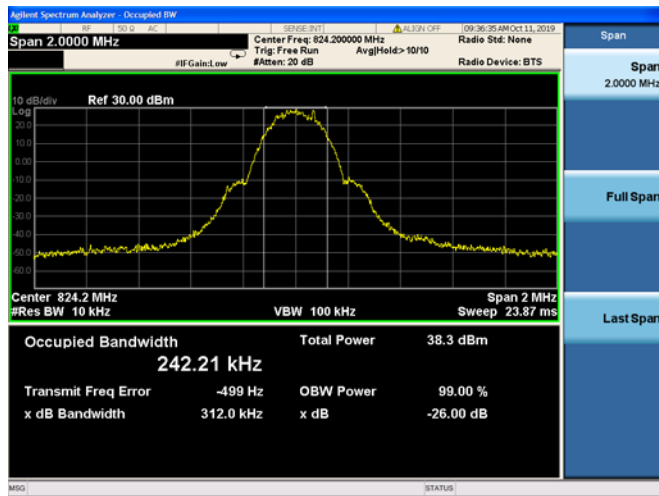


**GSM 850MHz CH190 836.6MHz**

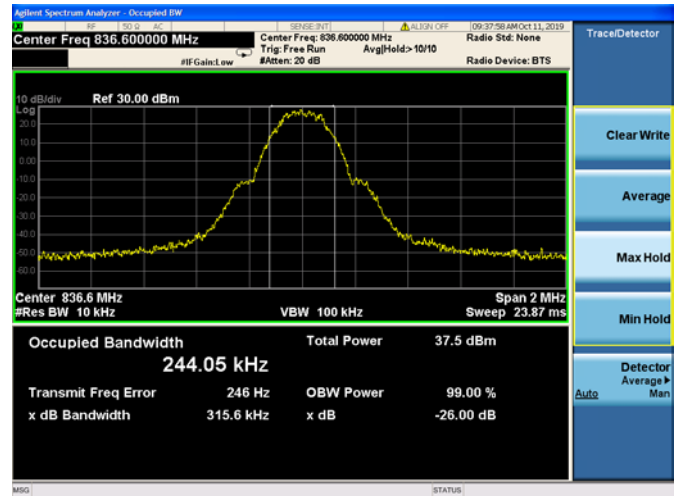


**GSM 850MHz CH251 848.8MHz**

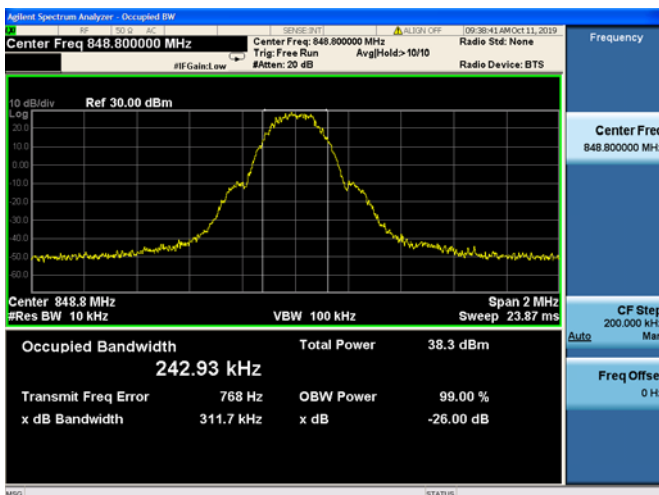


**GSM 1900MHz CH512 1850.2MHz**

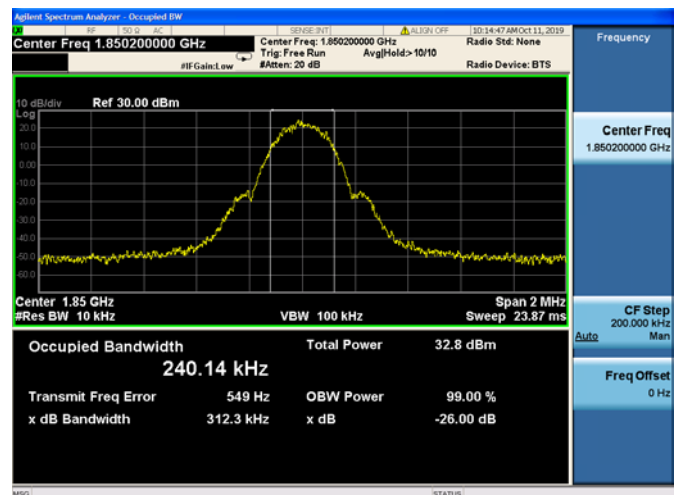

**GSM 1900MHz CH661 1880.0MHz**

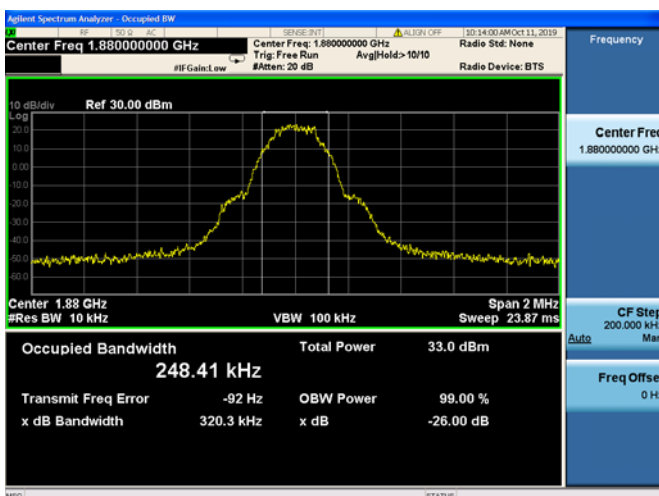


**GSM 1900MHz CH810 1909.8MHz**

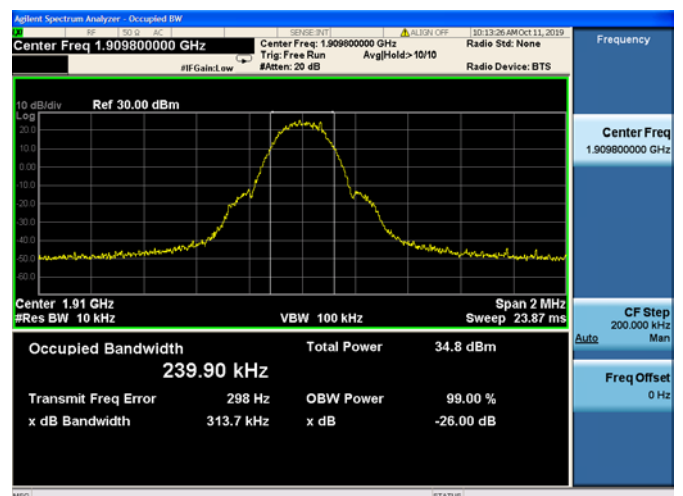





**EDGE 850MHz CH128 824.2MHz**

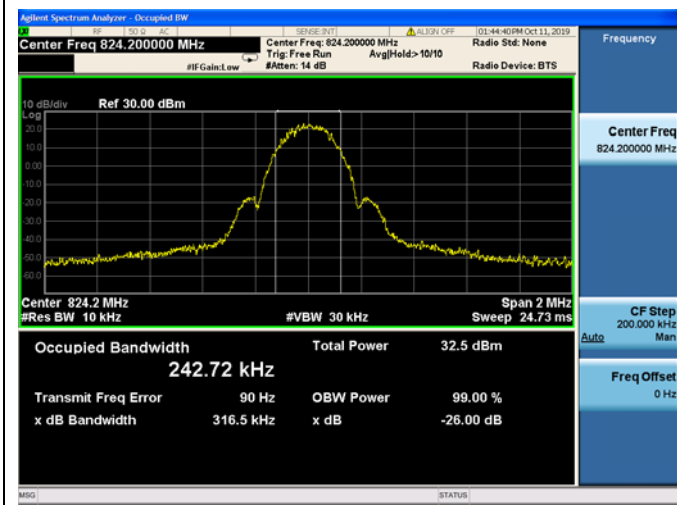


**EDGE 850MHz CH190 836.6MHz**

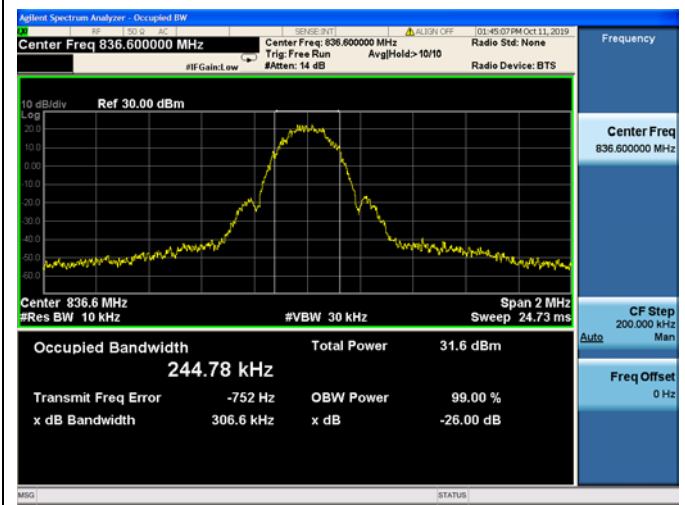


**EDGE 850MHz CH251 848.8MHz**

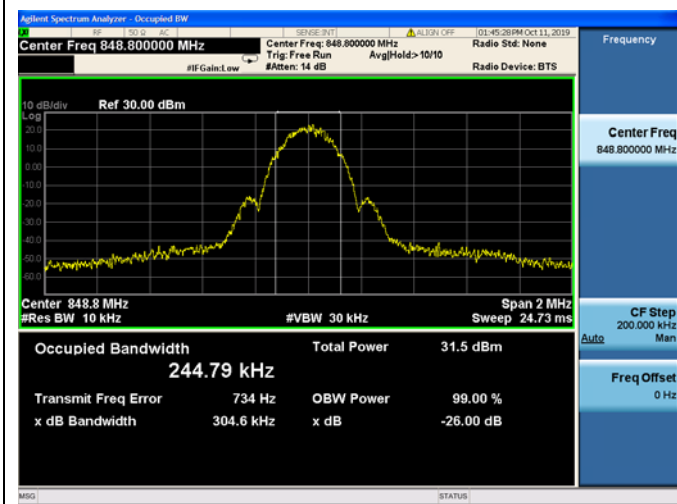


**EDGE 1900MHz CH512 1850.2MHz**

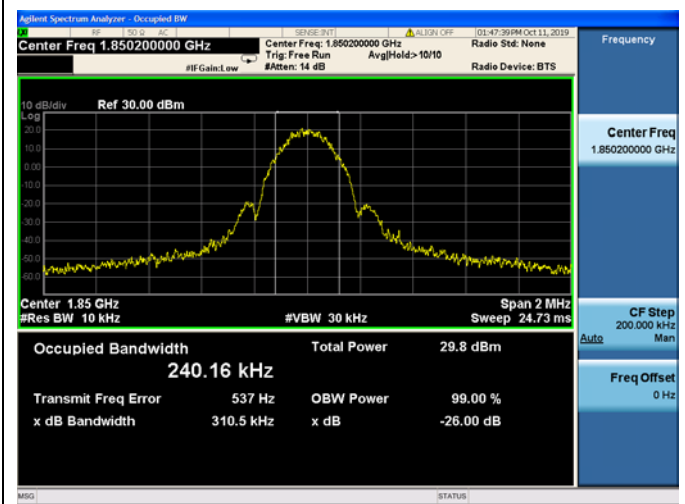

**EDGE 1900MHzCH661 1880.0MHz**

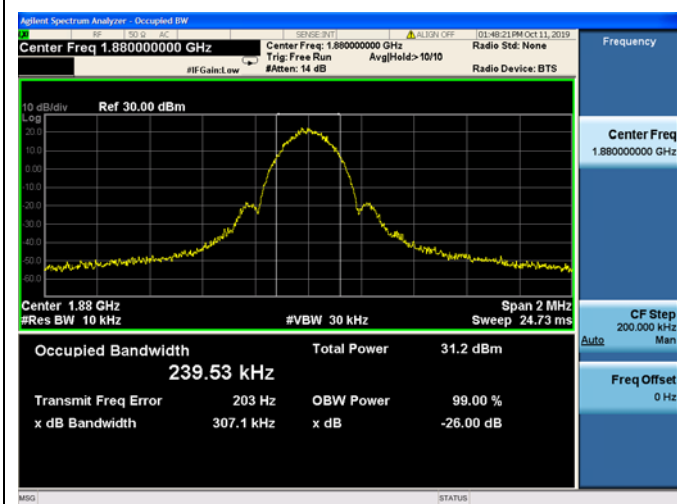


**EDGE 1900MHzCH810 1909.8MHz**

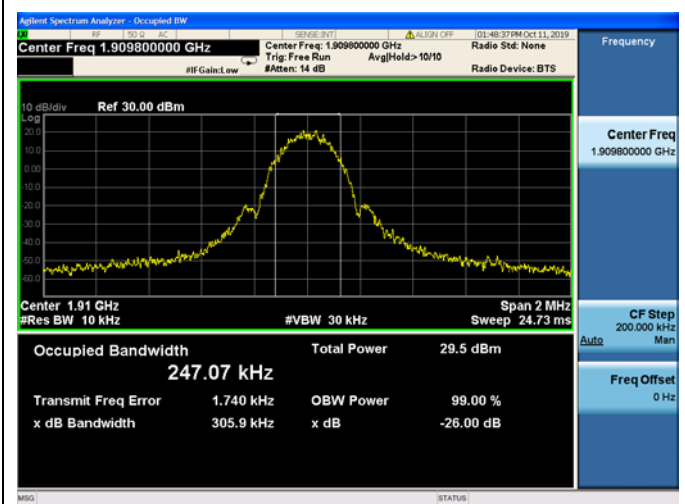




### WCDMA Band VCH4132 826.4MHz

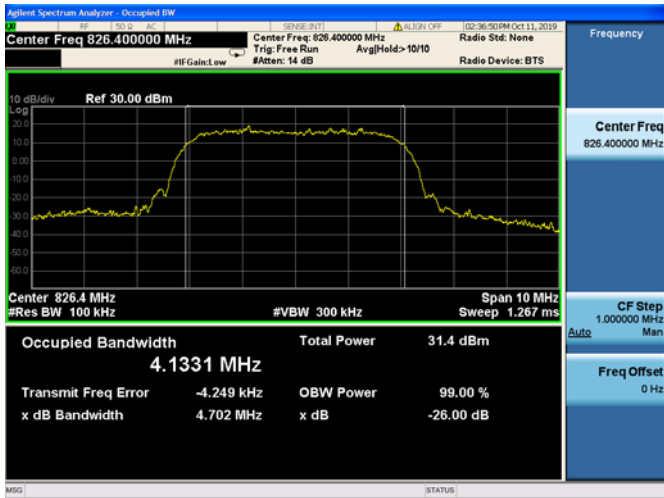


### WCDMA Band VCH4183 836.4MHz

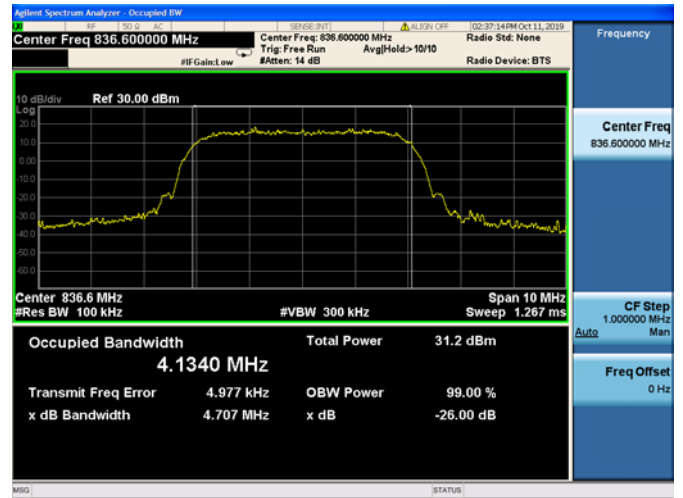


### WCDMA Band VCH4233 846.6MHz




### WCDMA Band II CH9262 1852.4MHz

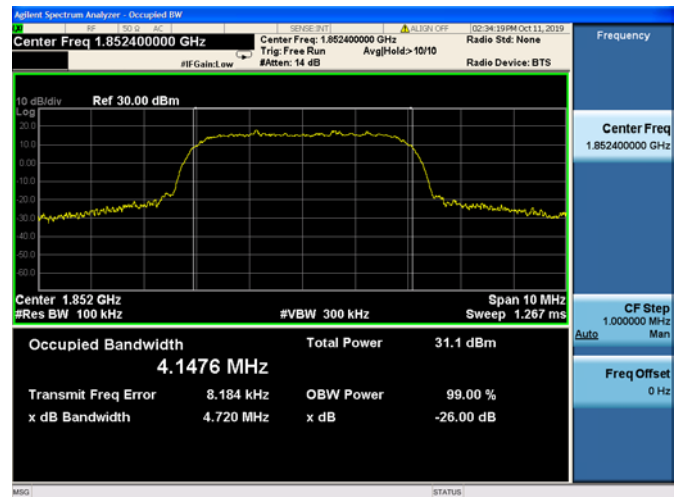


### WCDMA Band II CH9400 1880.0MHz

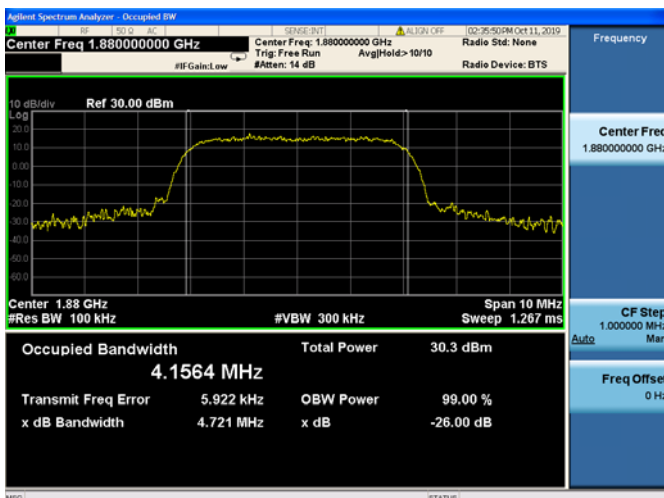

### WCDMA Band II CH9538 1907.6MHz

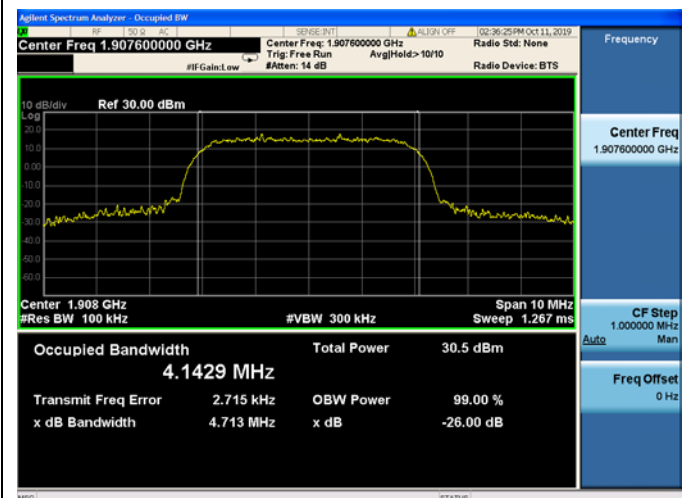

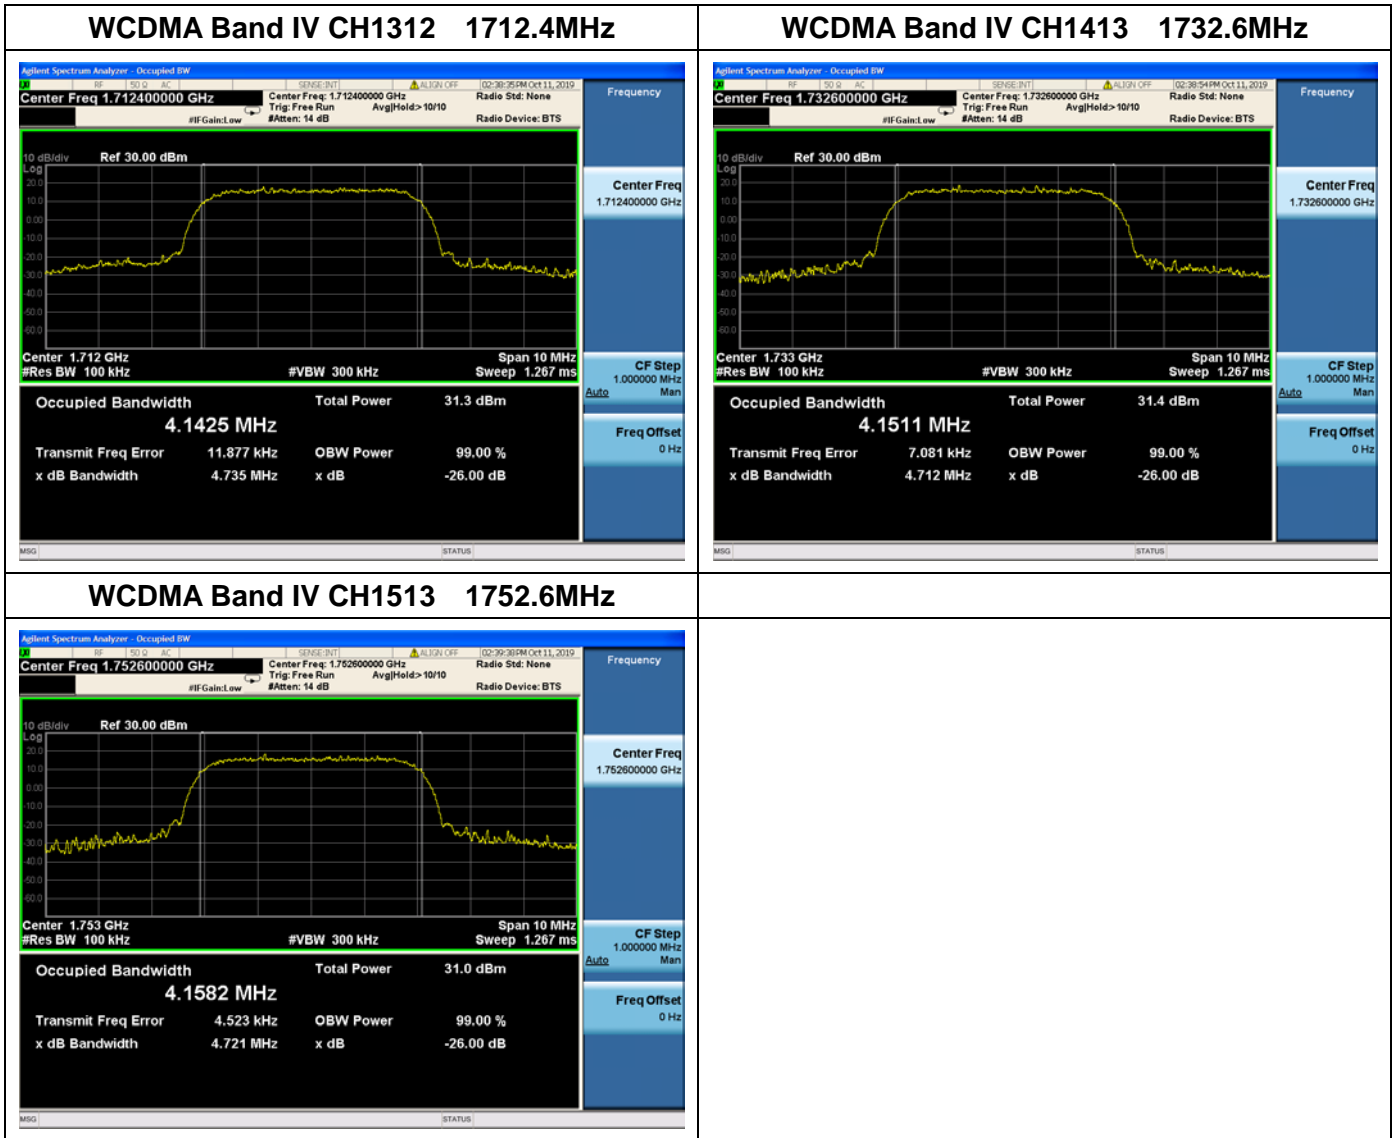

## 2.4. Frequency Stability


### 2.4.1. Requirement

According to FCC section 22.355, 24.235 and 27.54 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at intervals of not more than  $10^{\circ}\text{C}$ .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

### 2.4.2. Test Description

Test Setup:

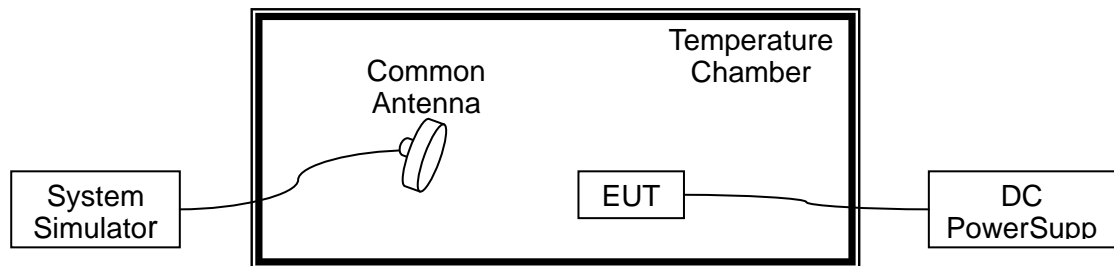

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.



2.4.3. Test Result

A. Test Verdict:

GSM 850MHz, Channel 190, Frequency 836.6MHz					
Limit =±2.5ppm					
Voltage(%)	Power(V DC)	Temp(°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
100	3.85	+20(Ref)	-86	-0.103	PASS
100		-10	-49	-0.059	
100		0	-88	-0.105	
100		+10	44	0.053	
100		+20	74	0.088	
100		+30	23	0.027	
100		+40	54	0.065	
100		+50	18	0.022	
100		+55	-59	-0.071	
115	4.2	+20	-65	-0.078	
85	3.6	+20	-86	-0.103	

GSM 1900MHz, Channel 661, Frequency 1880.0MHz					
Limit =Within Authorized Band					
Voltage(%)	Power(V DC)	Temp(°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
100	3.85	+20(Ref)	-63	-0.034	PASS
100		-10	53	0.028	
100		0	-86	-0.046	
100		+10	-48	-0.026	
100		+20	31	0.016	
100		+30	81	0.043	
100		+40	42	0.022	
100		+50	62	0.033	
100		+55	-36	-0.019	
115	4.2	+20	15	0.008	
85	3.6	+20	-63	-0.034	



EDGE 850MHz, Channel 190, Frequency 836.6MHz					
Limit =±2.5ppm					
Voltage(%)	Power(V DC)	Temp(°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
100	3.85	+20(Ref)	-85	-0.102	PASS
100		-10	-63	-0.075	
100		0	-38	-0.045	
100		+10	44	0.053	
100		+20	41	0.049	
100		+30	56	0.067	
100		+40	54	0.065	
100		+50	12	0.014	
100		+55	-76	-0.091	
115		4.2	+20	-28	
85	3.6	+20	-85	-0.102	

EDGE 1900MHz, Channel 661, Frequency 1880.0MHz					
Limit =Within Authorized Band					
Voltage(%)	Power(V DC)	Temp(°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
100	3.85	+20(Ref)	-83	-0.044	PASS
100		-10	53	0.028	
100		0	-73	-0.039	
100		+10	-68	-0.036	
100		+20	24	0.013	
100		+30	58	0.031	
100		+40	61	0.032	
100		+50	74	0.039	
100		+55	-87	-0.046	
115		4.2	+20	36	
85	3.6	+20	-83	-0.044	





WCDMA Band V, Channel 4183, Frequency 836.4MHz					
Limit =±2.5ppm					
Voltage(%)	Power(V DC)	Temp(°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
100	3.85	+20(Ref)	-53	-0.063	PASS
100		-10	-75	-0.090	
100		0	-59	-0.071	
100		+10	54	0.065	
100		+20	25	0.030	
100		+30	26	0.031	
100		+40	82	0.098	
100		+50	21	0.025	
100		+55	-58	-0.069	
115		4.2	+20	-88	
85	3.6	+20	-53	-0.063	

WCDMA Band II, Channel 9400, Frequency 1880.0MHz					
Limit =Within Authorized Band					
Voltage(%)	Power(V DC)	Temp(°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
100	3.85	+20(Ref)	-75	-0.043	PASS
100		-10	-22	-0.013	
100		0	-88	-0.051	
100		+10	64	0.037	
100		+20	63	0.036	
100		+30	31	0.018	
100		+40	43	0.025	
100		+50	15	0.009	
100		+55	-58	-0.033	
115		4.2	+20	-74	
85	3.6	+20	-75	-0.043	



WCDMA Band IV, Channel 1413, Frequency 1732.6MHz					
Limit =Within Authorized Band					
Voltage(%)	Power(V DC)	Temp(°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
100	3.85	+20(Ref)	-65	-0.038	PASS
100		-10	-35	-0.020	
100		0	-29	-0.017	
100		+10	-65	-0.038	
100		+20	52	0.030	
100		+30	35	0.020	
100		+40	22	0.013	
100		+50	35	0.020	
100		+55	23	0.013	
115		4.2	+20	-72	
85	3.6	+20	-65	-0.038	


## 2.5. Conducted Out of Band Emissions

### 2.5.1. Requirement

According to FCC section 22.917(a), 24.238(a) and 27.53(h) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm.

### 2.5.2. Test Description

Test Setup:

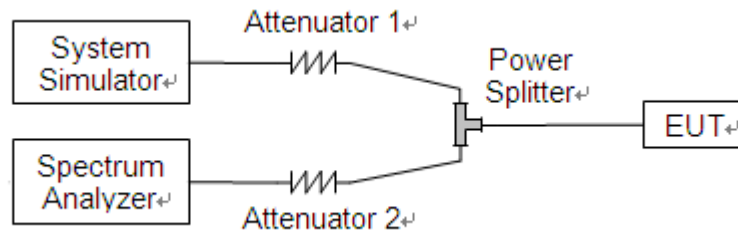


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

### 2.5.3. Test Result


The measurement frequency range is from 30MHz to the 10<sup>th</sup> harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.




**GSM 850MHz CH128 824.2MHz**

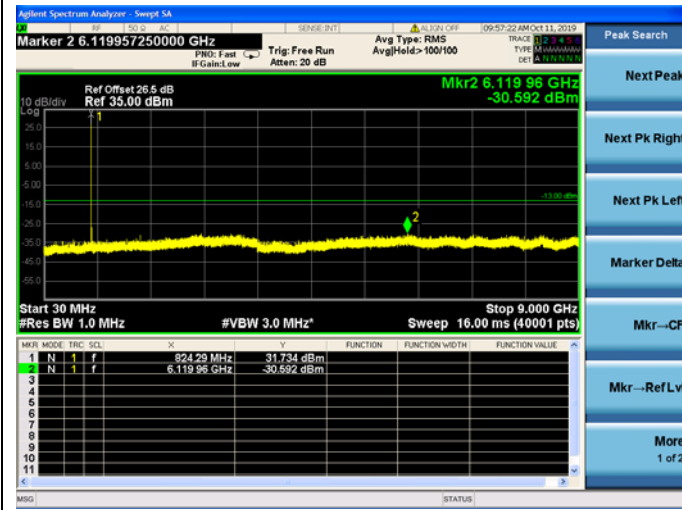


**GSM 850MHz CH190 836.6MHz**

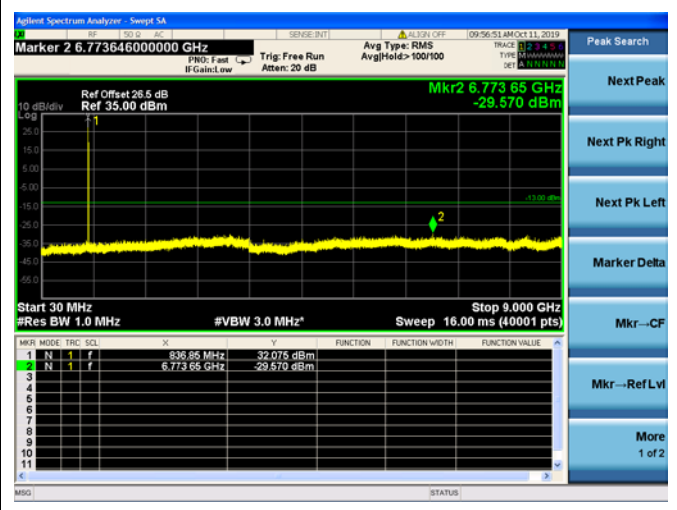


**GSM 850MHz CH251 848.8MHz**

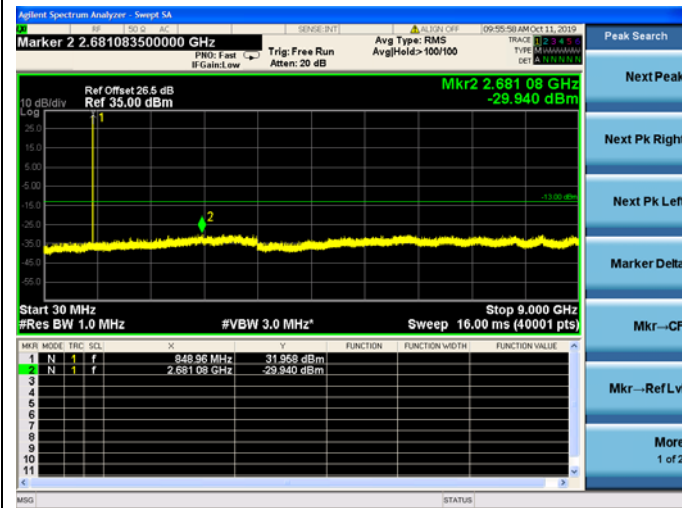


**GSM 1900MHz CH512 1850.2MHz**



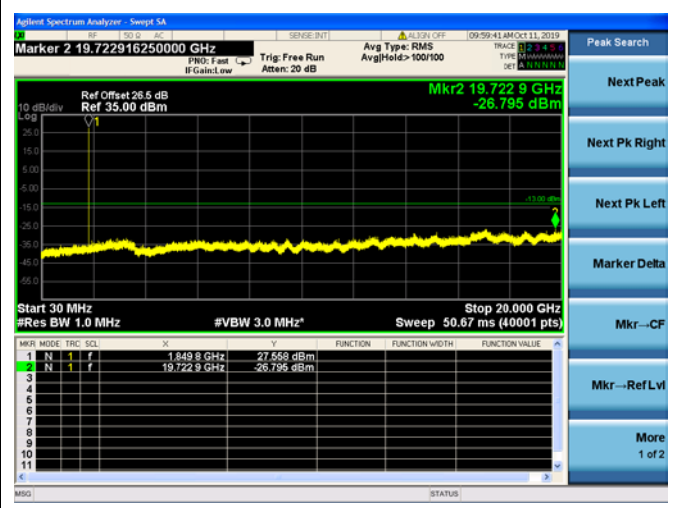


**GSM 1900MHz CH661 1880.0MHz**

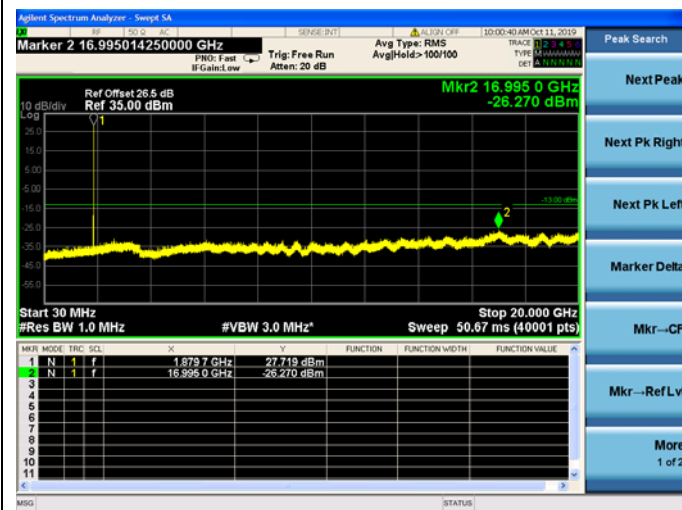


**GSM 1900MHz CH810 1909.8MHz**

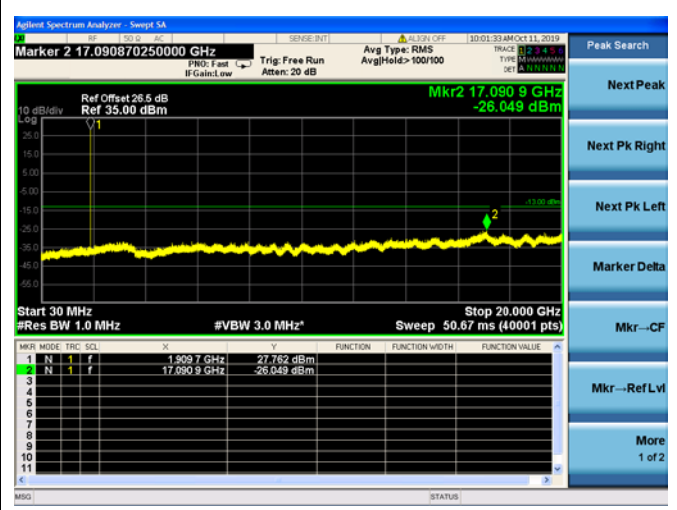

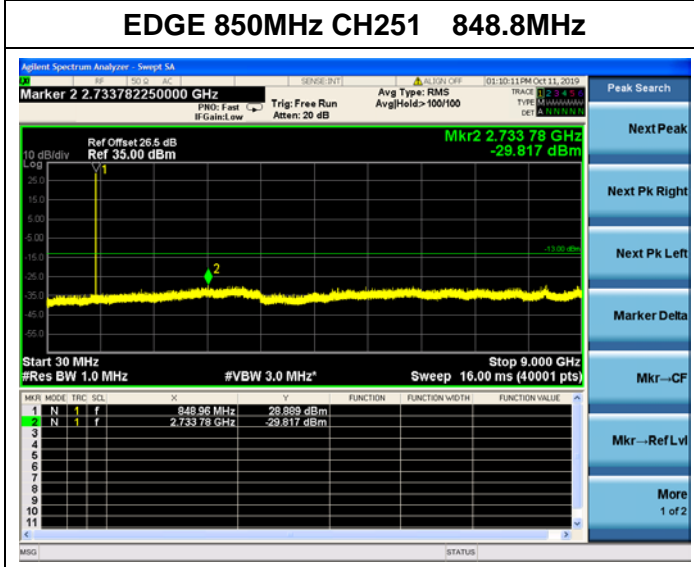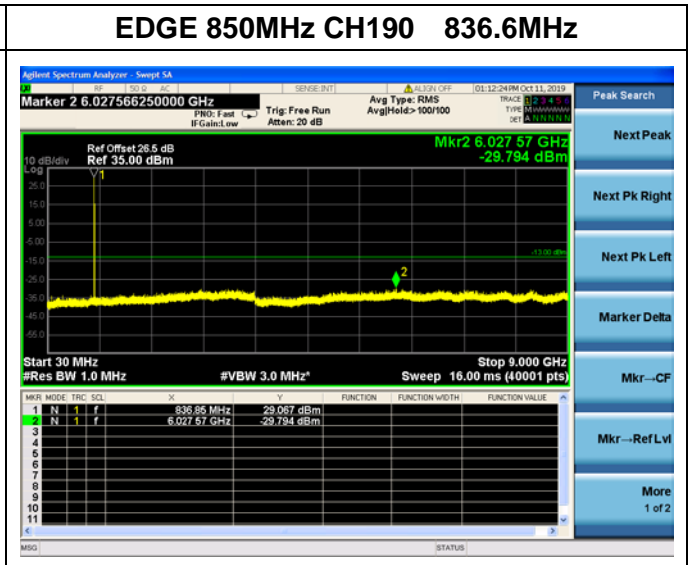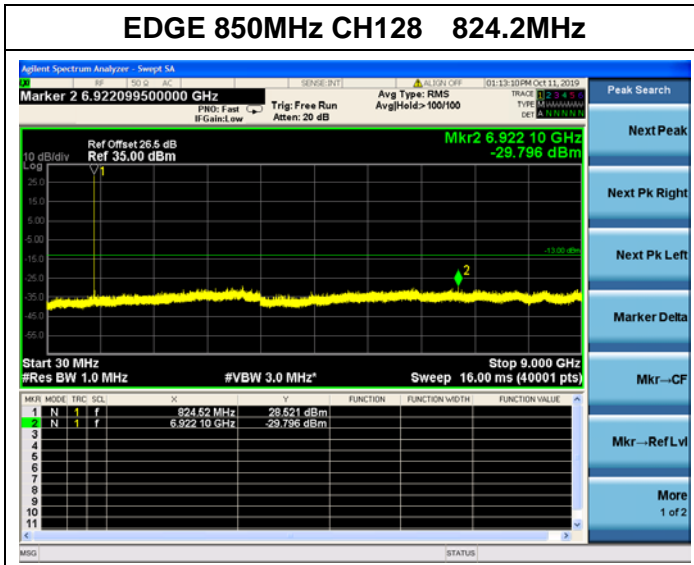





**EDGE 1900MHz CH512 1850.2MHz**






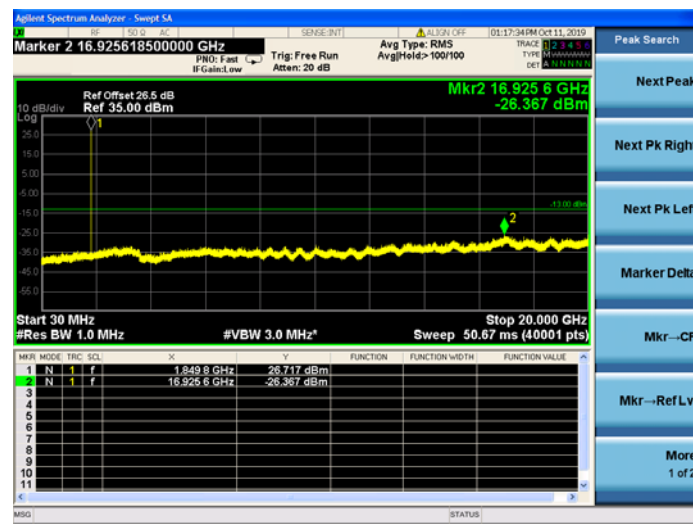






**EDGE 1900MHz CH661 1880.0MHz**

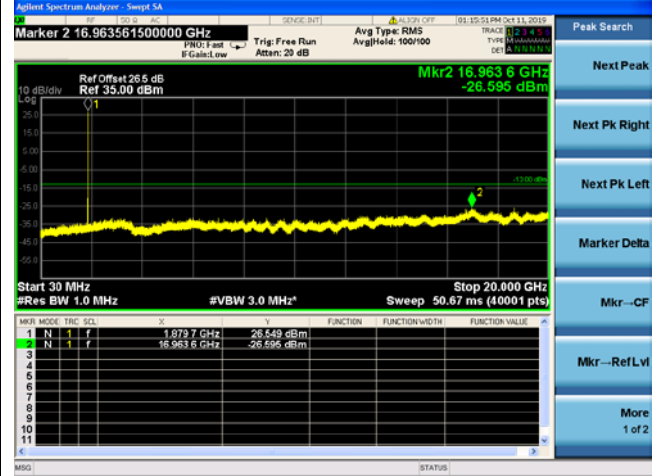

**EDGE 1900MHz CH810 1909.8MHz**

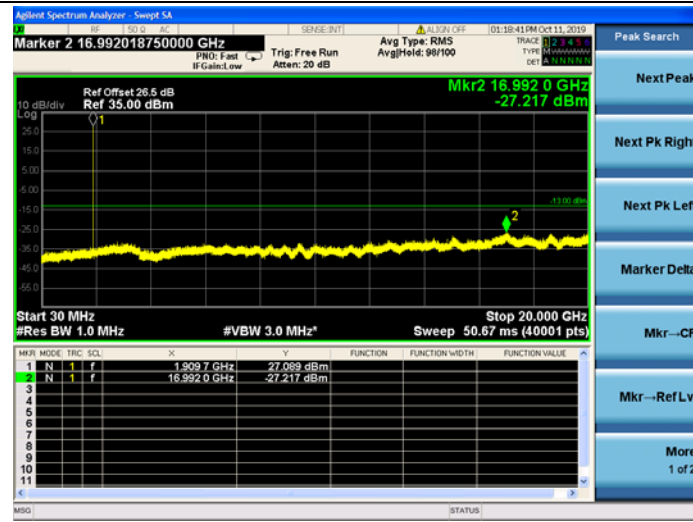

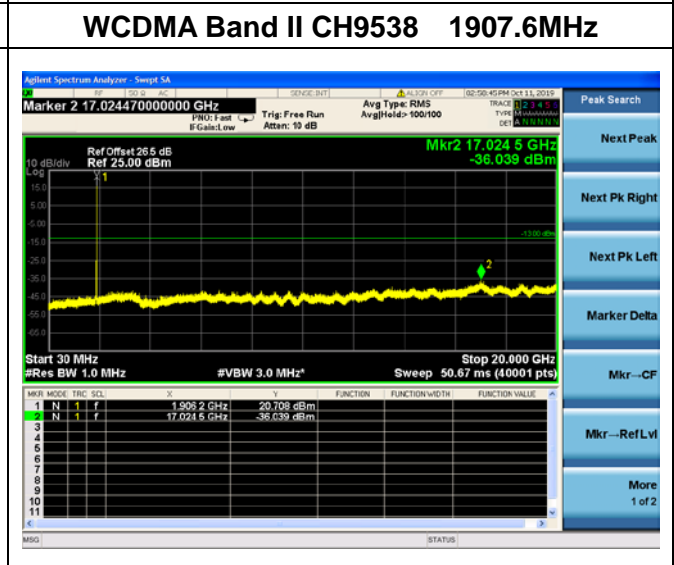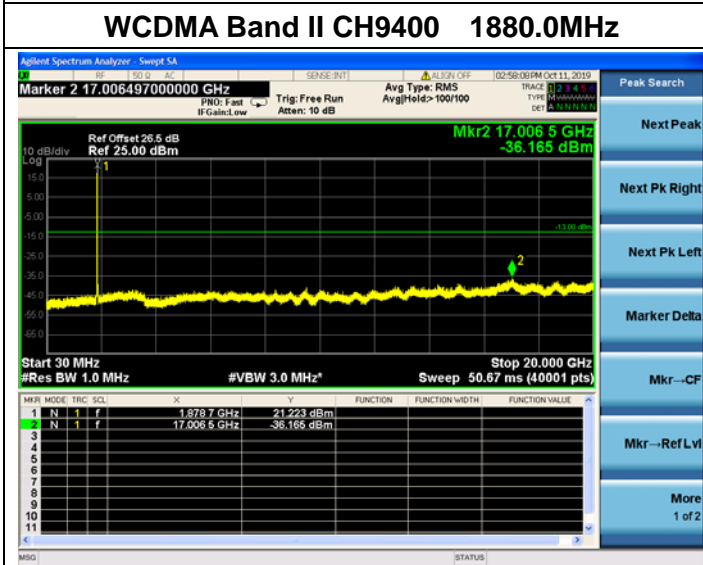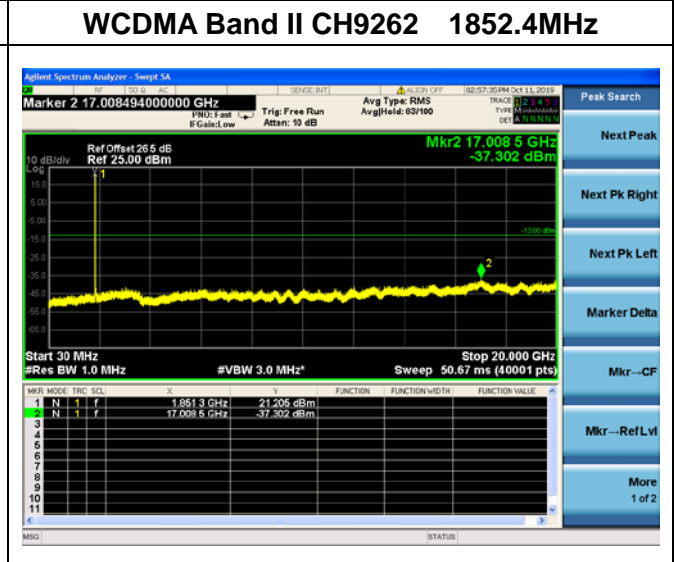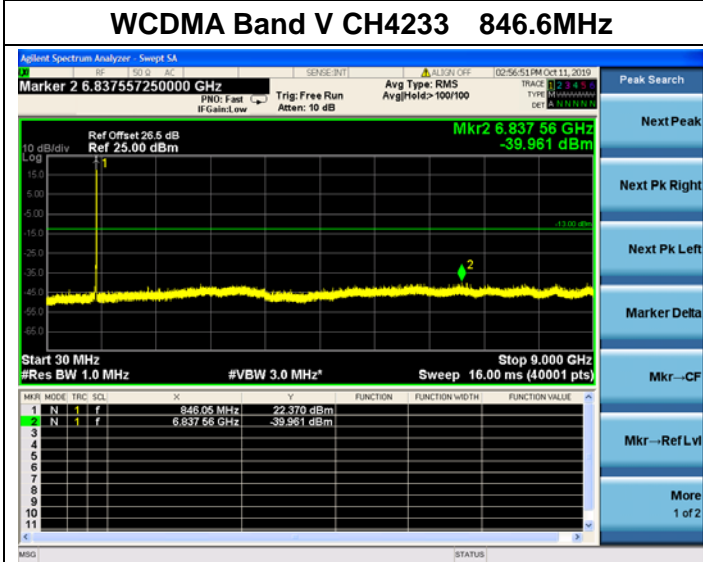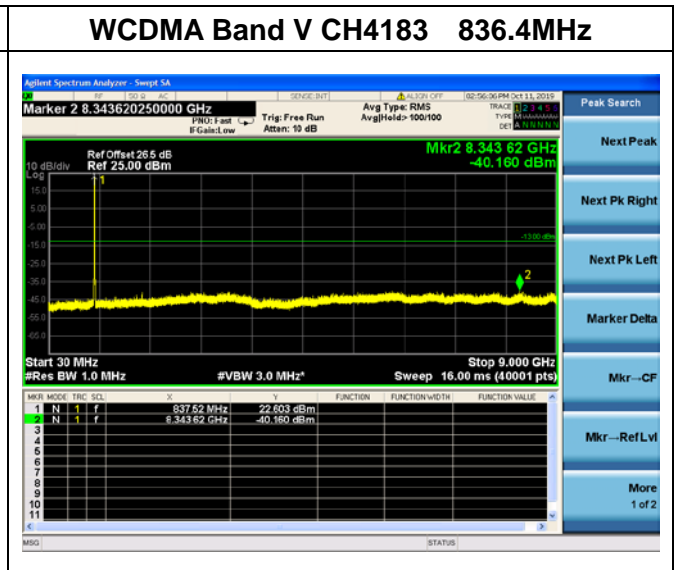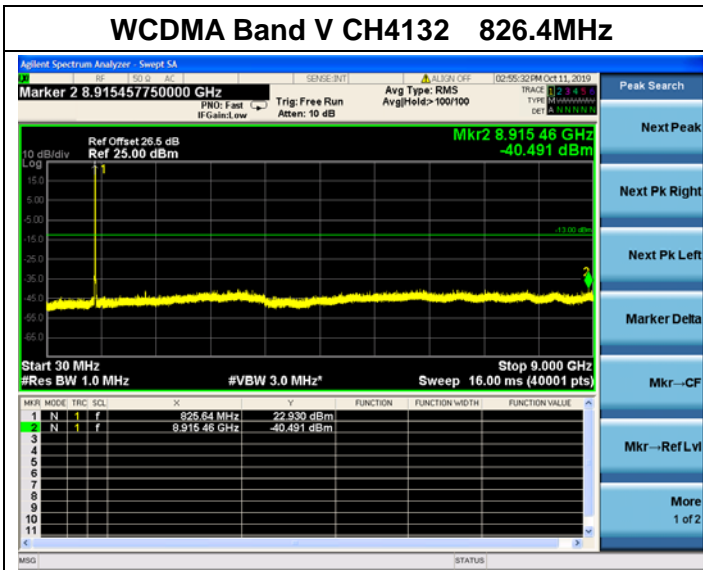

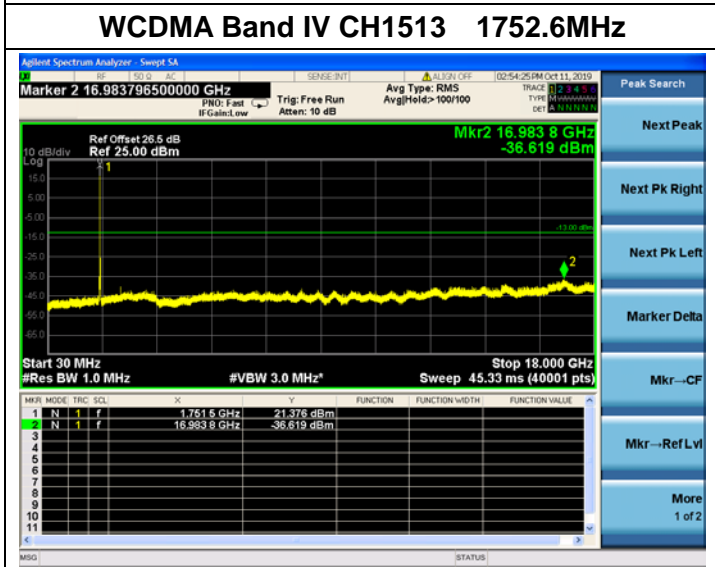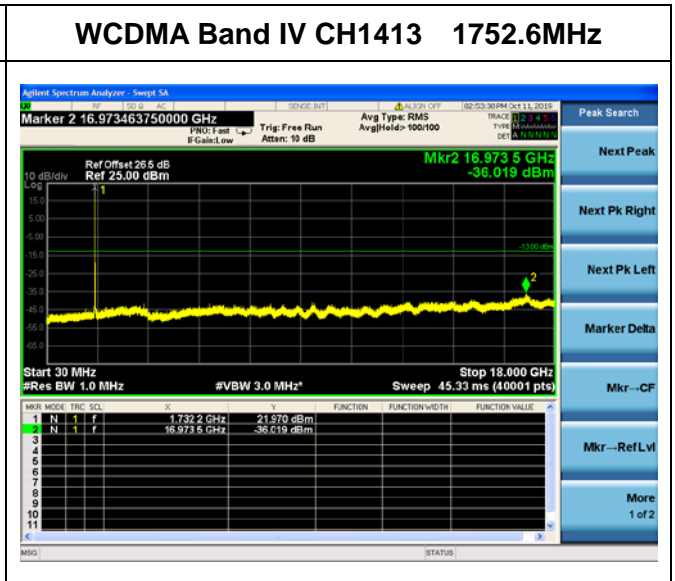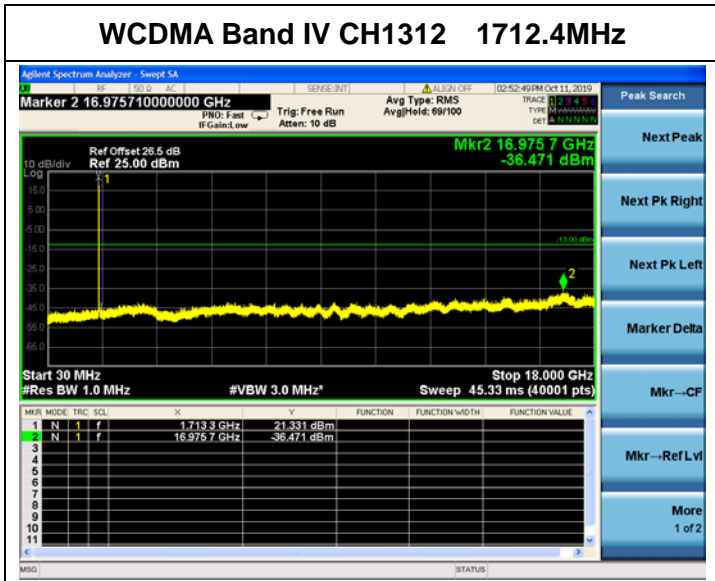




## 2.6. Band Edge

### 2.6.1. Requirement

According to FCC section 22.917(b), 24.238(b) and 27.53(h) in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

### 2.6.2. Test Description

Test Setup:

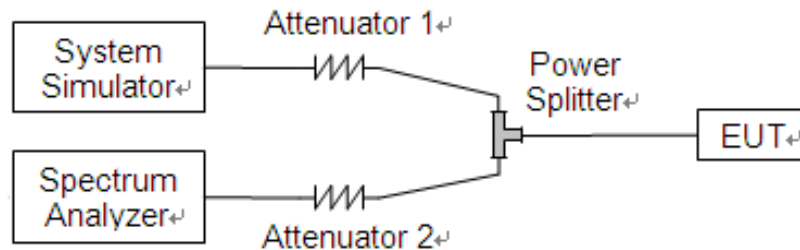

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.