

# FCC EMC Test Report

**Report No.:** JYTSZ-R01-2400504  
**Applicant:** Avenir Telecom  
**Address of Applicant:** 208 Boulevard de Plombieres 13014 Marseille-FRANCE

**Equipment Under Test (EUT)**  
Product Name: 4G Smart Phone  
Model No.: U652S  
Trade Mark: ***Energizer***<sup>®</sup>

**FCC ID:** 2AM4J-U652S  
**Applicable Standards:** FCC CFR Title 47 Part 15B  
**Date of Sample Receipt:** 10 Oct., 2024  
**Date of Test:** 11 Oct., to 29 Oct., 2024  
**Date of report Issued:** 30 Oct., 2024  
**Test Result:** PASS

<b>Project by:</b>	<u>Liwei Ding</u> Project Engineer	<b>Date:</b>	<u>30 Oct., 2024</u>
<b>Reviewed by:</b>	<u>Wenbin Han</u> Senior Engineer	<b>Date:</b>	<u>30 Oct., 2024</u>
<b>Approved by:</b>	<u>Janet Wei</u> Manager	<b>Date:</b>	<u>30 Oct., 2024</u>

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

**1 Version**

Version No.	Date	Description
00	30 Oct., 2024	Original

## 2 Contents

Page

<b>Cover Page</b> .....	<b>1</b>
<b>1 Version</b> .....	<b>2</b>
<b>2 Contents</b> .....	<b>3</b>
<b>3 General Information</b> .....	<b>4</b>
3.1 Client Information .....	4
3.2 General Description of E.U.T. ....	4
3.3 Test Mode .....	4
3.4 Description of Test Auxiliary Equipment .....	5
3.5 Description of Cable Used.....	5
3.6 Measurement Uncertainty .....	5
3.7 Additions to, Deviations, or Exclusions from the Method .....	5
3.8 Laboratory Facility .....	5
3.9 Laboratory Location.....	6
3.10 Test Instruments List .....	6
<b>4 Measurement Setup and Procedure</b> .....	<b>7</b>
4.1 Test Setup .....	7
4.2 Test Procedure .....	9
<b>5 Test Results</b> .....	<b>10</b>
5.1 Summary .....	10
5.1.1 Clause and data summary .....	10
5.1.2 Test Limit.....	10
5.2 Conducted Emission .....	11
5.3 Radiated Emission .....	13

## 3 General Information

### 3.1 Client Information

Applicant:	Avenir Telecom
Address:	208 Boulevard de Plombieres 13014 Marseille-FRANCE
Manufacturer:	Avenir Telecom
Address:	208 Boulevard de Plombieres 13014 Marseille-FRANCE

### 3.2 General Description of E.U.T.

Product Name:	4G Smart Phone
Model No.:	U652S
Power Supply:	Rechargeable Li-ion Polymer Battery DC3.85V, 4000mAh
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

### 3.3 Test Mode

Operating Mode	Detail Description
PC mode	Keep the EUT in Downloading mode(Worst case)
Charging+Recording mode	Keep the EUT in Charging+Recording mode
Charging+Playing mode	Keep the EUT in Charging+Playing mode
FM mode	Keep the EUT in FM receiver mode
GPS mode	Keep the EUT in GPS receiver mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

### 3.4 Description of Test Auxiliary Equipment

Manufacturer	Description	Model	S/N	FCC ID/DoC
Lenovo	Laptop	ThinkPad T14 Gen 1	SL10Z47277	DoC
HP	Printer	HP LaserJet P1007	VNFP409729	DoC
TECNO	Adapter	U330XSA	/	DoC

### 3.5 Description of Cable Used

Cable Type	Description	Length	From	To
Detached USB Cable	Shielding	1.0m	EUT	PC/Adapter
Detached headset cable	Unshielded	1.2m	EUT	Headset

### 3.6 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	3.57 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	3.14 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m SAC)	4.5 dB
Radiated Emission (6GHz ~ 18GHz) (3m SAC)	4.7 dB

**Note:** All the measurement uncertainty value were shown with a coverage  $k=2$  to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### 3.7 Additions to, Deviations, or Exclusions from the Method

No

### 3.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

### 3.9 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.  
 Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.  
 Tel: +86-755-23118282, Fax: +86-755-23116366  
 Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

### 3.10 Test Instruments List


Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	01-09-2024	01-08-2025
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	01-05-2024	01-04-2025
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-27-2023	12-26-2024
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-27-2023	12-26-2024
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-27-2023	12-26-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-27-2023	12-26-2024
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-17-2024	01-16-2025
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-17-2024	01-16-2025
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	06-11-2024	06-10-2025
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	12-27-2023	12-26-2024
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	12-27-2023	12-26-2024
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	01-17-2024	01-16-2025
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

## 4 Measurement Setup and Procedure

### 4.1 Test Setup


#### 1) Conducted emission measurement:

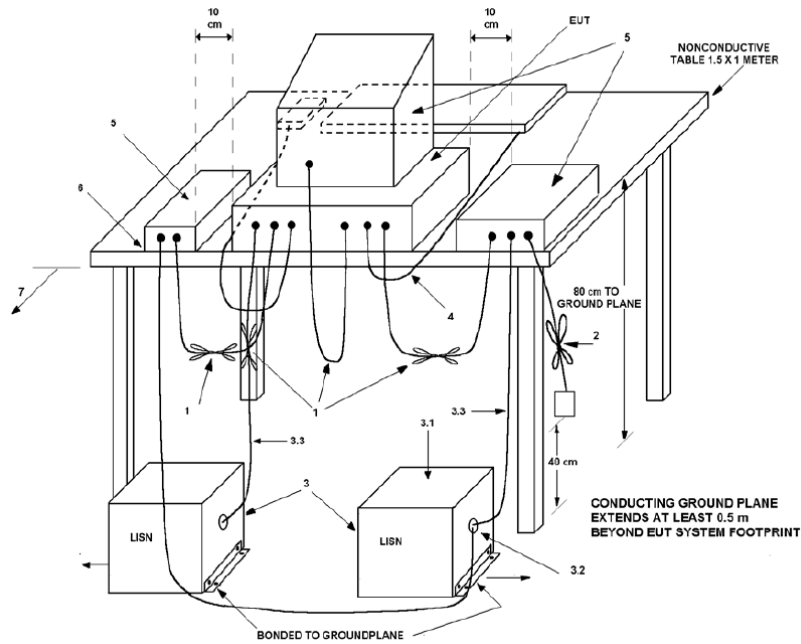


**Note:** The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

#### 2) Radiated emission measurement:

Below 1GHz (3m SAC)

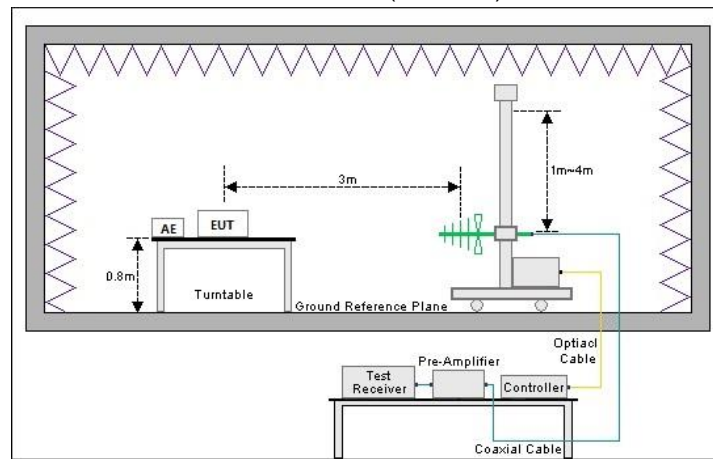

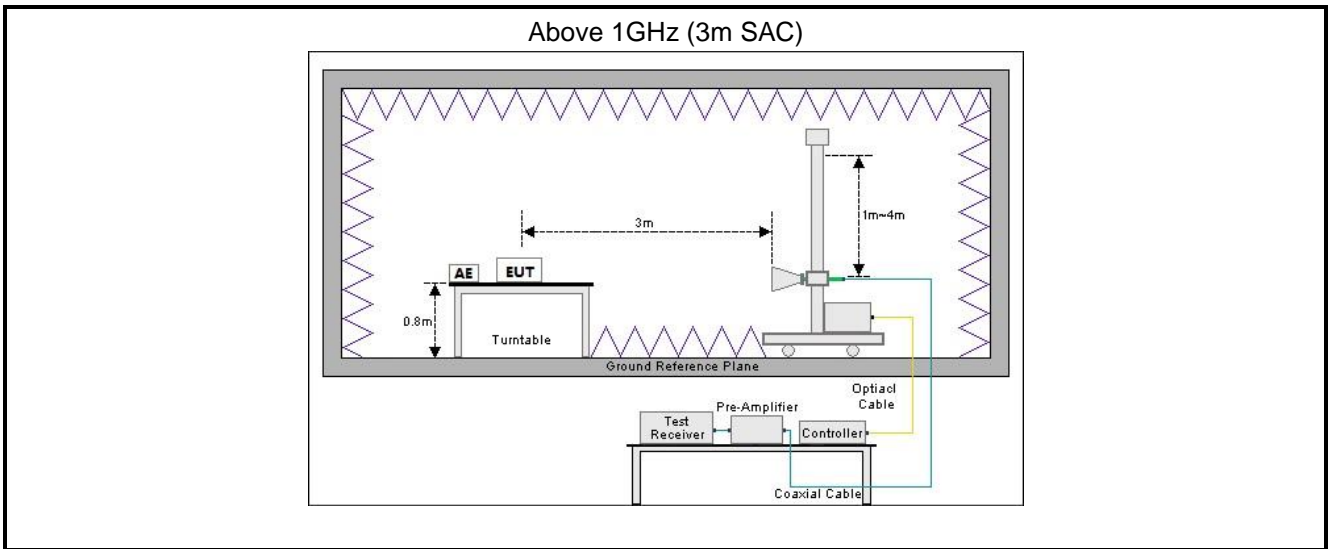



## 4.2 Test Procedure

Test method	Test step
Conducted emission	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.</li> </ol>
Radiated emission	<p><b>For below 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.</li> <li>2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.</li> <li>3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.</li> </ol> <p><b>For above 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m.</li> <li>2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.</li> <li>3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.</li> </ol>

## 5 Test Results

### 5.1 Summary

#### 5.1.1 Clause and data summary


Test items	Standard clause	Test data	Result
Conducted Emission	Part 15.107	See Section 5.2	Pass
Radiated Emission	Part 15.109	See Section 5.3	Pass
<b>Remark:</b> 1. The EUT is a <b>Class B</b> digital device. 2. Pass: The EUT complies with the essential requirements in the standard. 3. N/A: Not Applicable.			
<b>Test Method:</b>	ANSI C63.4:2014		

#### 5.1.2 Test Limit

Test items	Limit					
Conducted Emission	Frequency (MHz)	Class A Limit (dB $\mu$ V)		Class B Limit (dB $\mu$ V)		
		Quasi-Peak	Average	Quasi-Peak	Average	
	0.15 – 0.5	79	66	66 to 56 <small>Note 1</small>	56 to 46 <small>Note 1</small>	
	0.5 – 5	73	60	56	46	
	5 – 30	73	60	60	50	
<b>Note 1:</b> The limit level in dB $\mu$ V decreases linearly with the logarithm of frequency. <b>Note 2:</b> The more stringent limit applies at transition frequencies.						
Radiated Emission	Frequency (MHz)	Class A Limit (dB $\mu$ V/m)		Class B Limit (dB $\mu$ V/m)		
		Quasi-Peak @ 3m	Quasi-Peak @ 10m	Quasi-Peak @ 3m	Quasi-Peak @ 10m	
	30 – 88	49.0	39.0	40.0	30.0	
	88 – 216	53.5	43.5	43.5	33.5	
	216 – 960	56.0	46.0	46.0	36.0	
	960 – 1000	60.0	50.0	54.0	44.0	
	<b>Note:</b> The more stringent limit applies at transition frequencies.					
	Frequency	Class A Limit (dB $\mu$ V/m) @ 3m		Class B Limit (dB $\mu$ V/m) @ 3m		
		Average	Peake	Average	Peake	
	Above 1 GHz	60.0	80.0	54.0	74.0	
<b>Note:</b> The measurement bandwidth shall be 1 MHz or greater.						

## 5.2 Conducted Emission

Product name:	4G Smart Phone	Product model:	U652S
Test by:	Kiran Zeng	Test mode:	PC mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

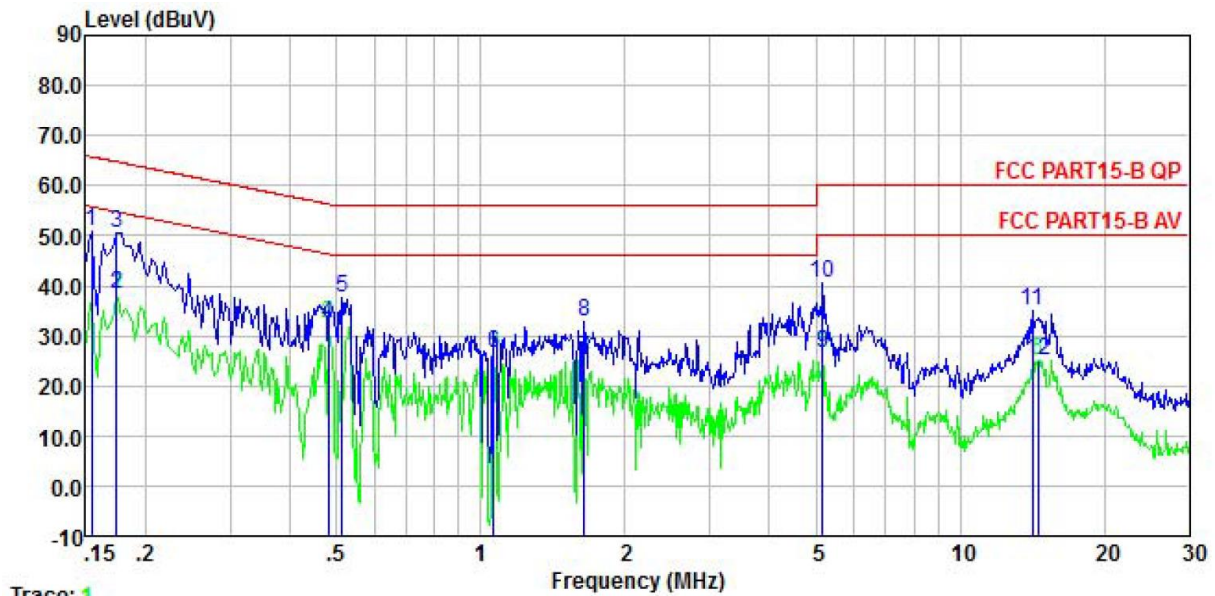


Trace: 1

	Read Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.154	40.95	0.20	0.00	9.88	0.01	51.04	65.78	-14.74	QP
2	0.174	28.31	0.20	0.00	9.88	0.01	38.40	54.77	-16.37	Average
3	0.174	40.37	0.20	0.00	9.88	0.01	50.46	64.77	-14.31	QP
4	0.481	22.34	0.20	0.00	9.88	0.03	32.45	46.32	-13.87	Average
5	0.513	27.53	0.20	0.00	9.88	0.03	37.64	56.00	-18.36	QP
6	1.065	16.26	0.20	0.00	9.88	0.07	26.41	46.00	-19.59	Average
7	1.645	15.29	0.20	0.00	9.88	0.16	25.53	46.00	-20.47	Average
8	1.645	22.71	0.20	0.00	9.88	0.16	32.95	56.00	-23.05	QP
9	5.166	16.21	0.20	0.00	9.89	0.09	26.39	50.00	-23.61	Average
10	5.166	30.41	0.20	0.00	9.89	0.09	40.59	60.00	-19.41	QP
11	14.138	24.60	0.28	0.00	9.93	0.12	34.93	60.00	-25.07	QP
12	14.517	14.88	0.29	0.00	9.93	0.13	25.23	50.00	-24.77	Average

**Remark:**

1. Level = Read level + LISN Factor + Cable Loss.

<b>Product name:</b>	4G Smart Phone	<b>Product model:</b>	U652S
<b>Test by:</b>	Kiran Zeng	<b>Test mode:</b>	PC mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Neutral
<b>Test voltage:</b>	AC 120 V/60 Hz		

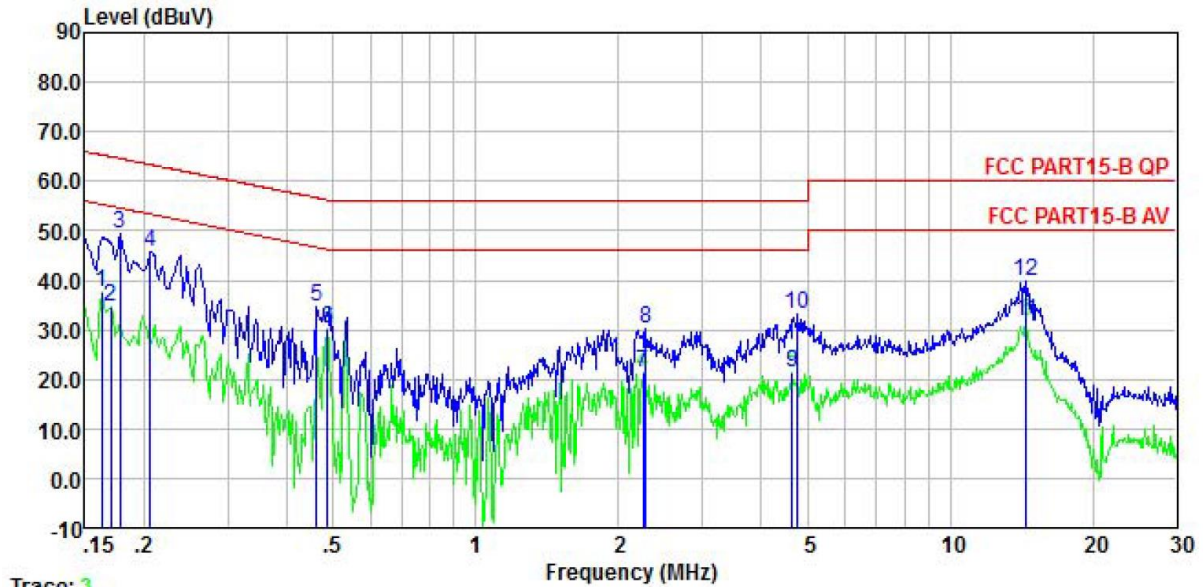

Trace: 3

	Read Freq	Read Level	LISN Factor	Aux Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB	
1	0.162	27.57	0.20	0.00	9.88	0.01	37.66	55.34	-17.68	Average
2	0.170	24.55	0.20	0.00	9.88	0.01	34.64	54.94	-20.30	Average
3	0.178	39.49	0.20	0.00	9.88	0.01	49.58	64.59	-15.01	QP
4	0.206	35.69	0.20	0.00	9.88	0.04	45.81	63.36	-17.55	QP
5	0.461	24.36	0.20	0.00	9.88	0.03	34.47	56.67	-22.20	QP
6	0.486	20.03	0.20	0.00	9.88	0.03	30.14	46.23	-16.09	Average
7	2.249	11.09	0.30	0.00	9.88	0.17	21.44	46.00	-24.56	Average
8	2.285	19.71	0.30	0.00	9.88	0.16	30.05	56.00	-25.95	QP
9	4.647	11.19	0.30	0.00	9.89	0.09	21.47	46.00	-24.53	Average
10	4.772	22.74	0.30	0.00	9.89	0.09	33.02	56.00	-22.98	QP
11	14.440	21.25	0.40	0.00	9.93	0.13	31.71	50.00	-18.29	Average
12	14.440	29.37	0.40	0.00	9.93	0.13	39.83	60.00	-20.17	QP


**Remark:**

1. Level = Read level + LISN Factor + Cable Loss.

## 5.3 Radiated Emission

Below 1GHz:

<b>Product Name:</b>	4G Smart Phone	<b>Product Model:</b>	U652S
<b>Test By:</b>	Kiran Zeng	<b>Test mode:</b>	PC mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz		

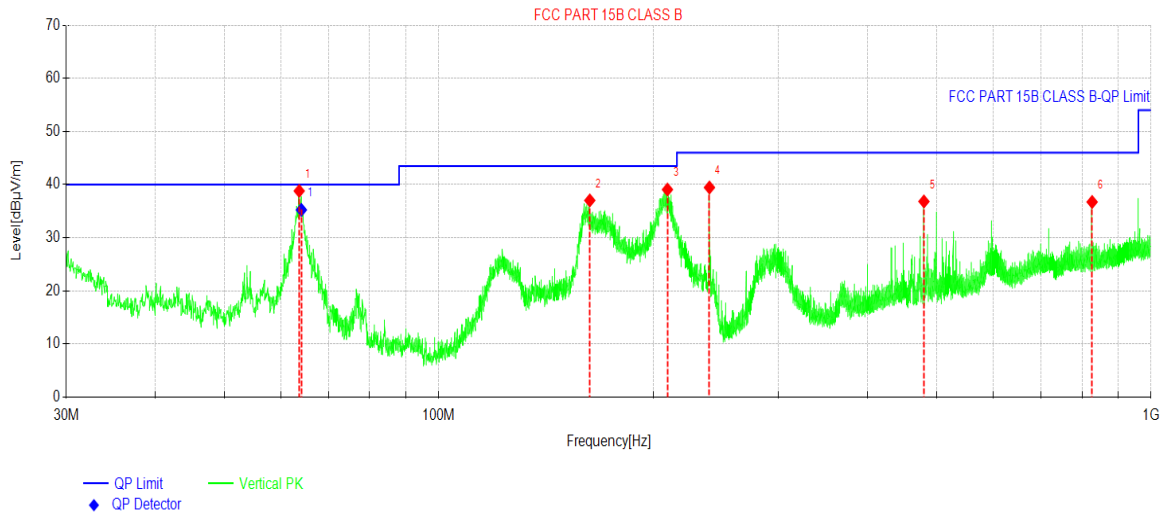

### Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	63.7092	54.27	-15.47	38.80	40.00	1.20	PK	Vertical
2	162.9937	50.61	-13.59	37.02	43.50	6.48	PK	Vertical
3	209.5075	55.76	-16.70	39.06	43.50	4.44	PK	Vertical
4	239.9670	55.21	-15.76	39.45	46.00	6.55	PK	Vertical
5	480.0055	45.27	-8.45	36.82	46.00	9.18	PK	Vertical
6	826.7493	37.80	-1.07	36.73	46.00	9.27	PK	Vertical


### Final Data List

NO.	Freq. [MHz]	QP Reading [dBµV/m]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Angle [°]	Verdict
1	64.1520	50.72	-15.48	35.24	40.00	4.76	280.7	PASS

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

<b>Product Name:</b>	4G Smart Phone	<b>Product Model:</b>	U652S
<b>Test By:</b>	Kiran Zeng	<b>Test mode:</b>	PC mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz		

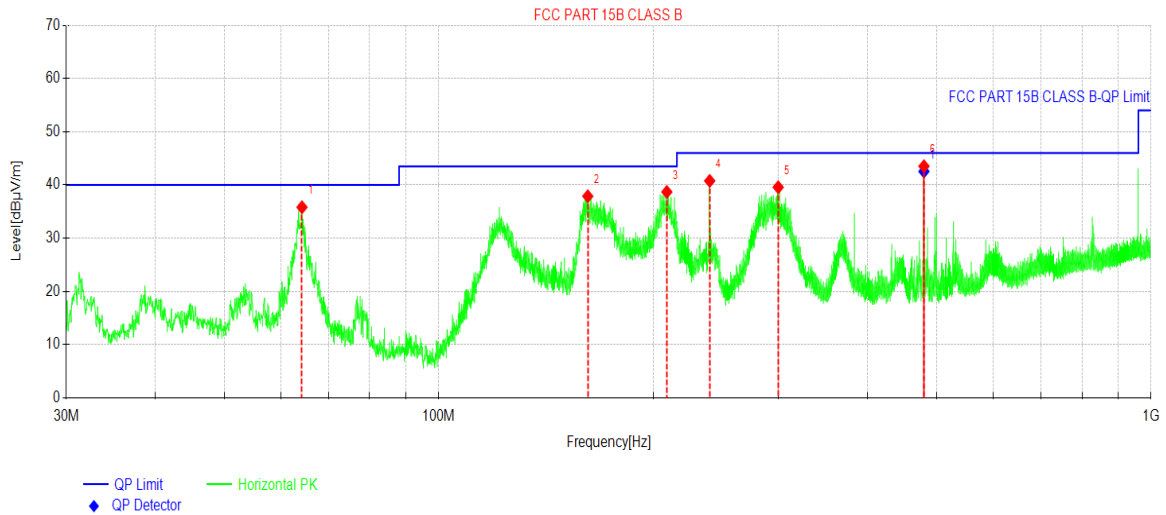

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	64.2912	51.35	-15.54	35.81	40.00	4.19	PK	Horizontal
2	161.9266	51.51	-13.63	37.88	43.50	5.62	PK	Horizontal
3	209.0710	55.40	-16.71	38.69	43.50	4.81	PK	Horizontal
4	240.1610	56.53	-15.76	40.77	46.00	5.23	PK	Horizontal
5	299.6735	52.89	-13.32	39.57	46.00	6.43	PK	Horizontal
6	480.0055	51.96	-8.45	43.51	46.00	2.49	PK	Horizontal


Final Data List								
NO.	Freq. [MHz]	QP Reading [dBµV/m]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Angle [°]	Verdict
1	480.0041	50.98	-8.45	42.53	46.00	3.47	135.5	PASS

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

**Above 1GHz:**

<b>Product Name:</b>	4G Smart Phone	<b>Product Model:</b>	U652S
<b>Test By:</b>	Alan Chen	<b>Test mode:</b>	PC mode
<b>Test Frequency:</b>	1000 MHz ~ 6000 MHz	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz		

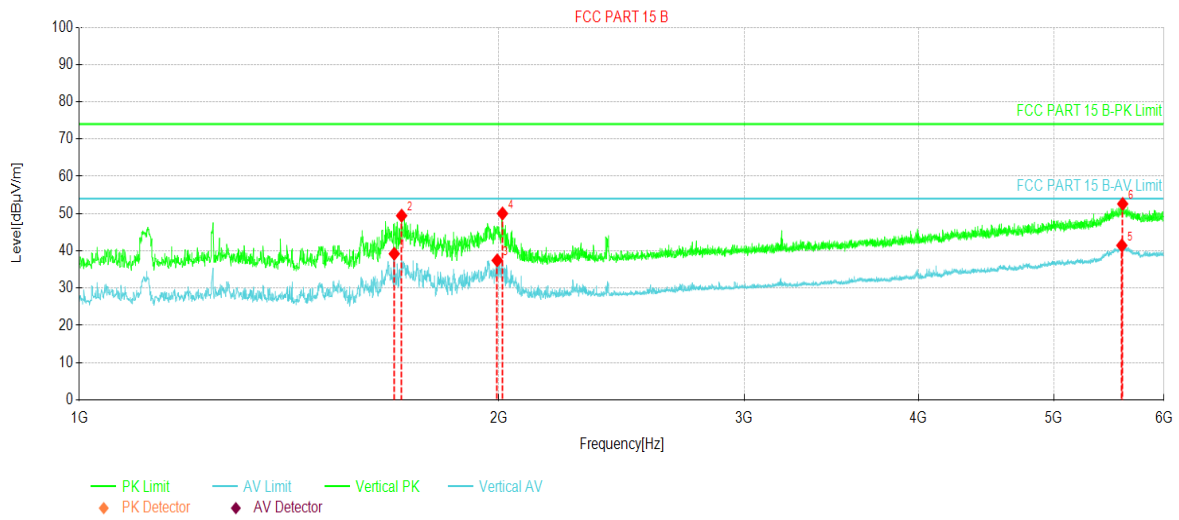


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1682.5853	61.75	39.20	-22.55	54.00	14.80	AV	Vertical
2	1703.2129	71.92	49.42	-22.50	74.00	24.58	PK	Vertical
3	1994.4993	58.21	37.44	-20.77	54.00	16.56	AV	Vertical
4	2012.0015	70.73	50.02	-20.71	74.00	23.98	PK	Vertical
5	5596.1995	45.86	41.44	-4.42	54.00	12.56	AV	Vertical
6	5604.3255	56.98	52.59	-4.39	74.00	21.41	PK	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

<b>Product Name:</b>	4G Smart Phone	<b>Product Model:</b>	U652S
<b>Test By:</b>	Alan Chen	<b>Test mode:</b>	PC mode
<b>Test Frequency:</b>	1000 MHz ~ 6000 MHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz		

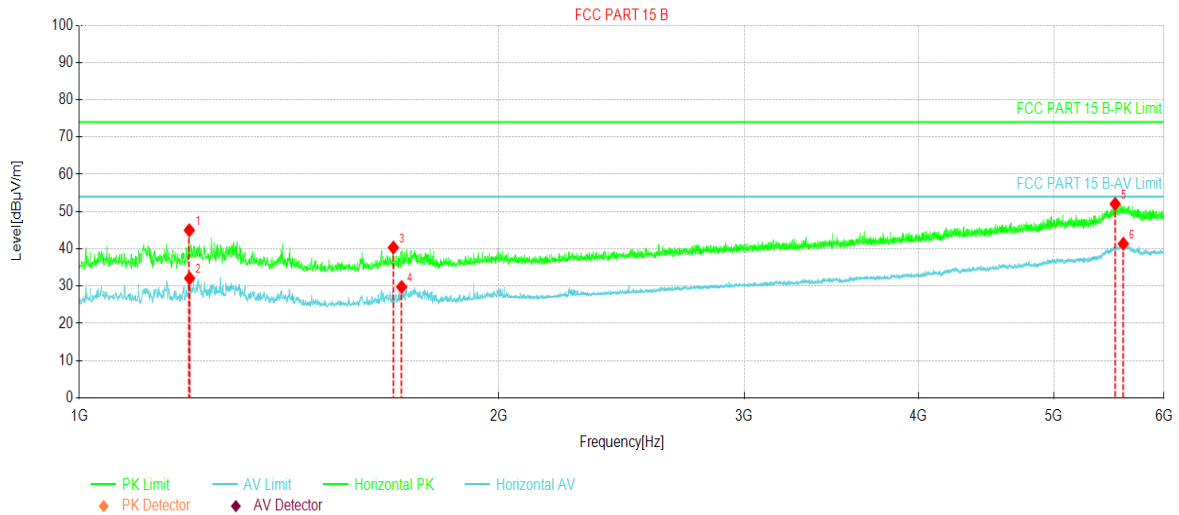

### Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1199.3999	68.27	44.99	-23.28	74.00	29.01	PK	Horizontal
2	1200.0250	55.37	32.09	-23.28	54.00	21.91	AV	Horizontal
3	1680.0850	62.91	40.35	-22.56	74.00	33.65	PK	Horizontal
4	1703.2129	52.28	29.78	-22.50	54.00	24.22	AV	Horizontal
5	5534.9419	57.53	52.04	-5.49	74.00	21.96	PK	Horizontal
6	5609.9512	45.80	41.36	-4.44	54.00	12.64	AV	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

-----End of report-----