

FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

For

WIFI MODULE

MODEL No.: CDW-N37632U-A0, LT-43E770, LT-49E770, LT-55E770,
LT-65E770, LT-75E770

FCC ID: 2AM4L1

Trade Mark: JVC

REPORT NO.: ES170724014E4

ISSUE DATE: September 09, 2017

Prepared for

ShenZhen Cultraview Digital Technology CO.,LTD
Bldg. M-6,6th Floor #4,Maqueling Industry Park,Gaoxin
Zhongqu,Nanshan,Shenzhen

Prepared by

EMTEK(SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282

1 TEST RESULT CERTIFICATION

Applicant:	ShenZhen Cultraview Digital Technology CO.,LTD Bldg. M-6, 6th Floor #4, Maqueling Industry Park, Gaoxin Zhongqu, Nanshan, Shenzhen
Manufacturer:	ShenZhen Cultraview Digital Technology CO.,LTD Bldg. M-6, 6th Floor #4, Maqueling Industry Park, Gaoxin Zhongqu, Nanshan, Shenzhen
Product Description:	WIFI MODULE
Model Number:	CDW-N37632U-A0, LT-43E770, LT-49E770, LT-55E770, LT-65E770, LT-75E770 These models are identical in circuitry and electrical, mechanical and physical construction; the only difference is model no. We prepare CDW-N37632U-A0 for test, and the worst result recorded in the report.
File Number:	ES170724014E4
Date of Test:	July 31, 2017 to September 09, 2017


Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD.. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.407

The test results of this report relate only to the tested sample identified in this report.

Date of Test : July 31, 2017 to September 09, 2017

Prepared by : 
Yaping Shen/Editor

Reviewer : 
Joe Xia/Supervisor


Approve & Authorized Signer : 
Lisa Wang/Manager

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION.....2

2 EUT TECHNICAL DESCRIPTION4

3 SUMMARY OF TEST RESULT6

4 TEST METHODOLOGY7

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS7

4.2 MEASUREMENT EQUIPMENT USED7

4.3 DESCRIPTION OF TEST MODES.....8

5 FACILITIES AND ACCREDITATIONS 11

5.1 FACILITIES 11

5.2 LABORATORY ACCREDITATIONS AND LISTINGS 11

6 TEST SYSTEM UNCERTAINTY12

7 SETUP OF EQUIPMENT UNDER TEST13

7.1 RADIO FREQUENCY TEST SETUP.....13

7.2 RADIO FREQUENCY TEST SETUP.....13

7.3 CONDUCTED EMISSION TEST SETUP15

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....16

7.5 SUPPORT EQUIPMENT.....16

8 TEST REQUIREMENTS.....17

8.1 BANDWIDTH MEASUREMENT17

8.2 MAXIMUM CONDUCTED OUTPUT POWER.....33

8.3 MAXIMUM PEAK POWER DENSITY36

8.4 FREQUENCY STABILITY54

8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION.....61

8.6 POWER LINE CONDUCTED EMISSIONS84

8.7 ANTENNA APPLICATION87

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description			
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11b(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11g(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth)			
Data Rate	WIFI: 802.11 b:1,2,5.5,11Mbps; 802.11 g/a:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20): MCS0-MCS15; 802.11n(HT40): MCS0-MCS15; Bluetooth DSS: 1Mbps for GFSK modulation 2Mbps for pi/4-DQPSK modulation 3Mbps for 8DPSK modulation Bluetooth DTS: 1Mbps for GFSK modulation			
Modulation	WIFI: OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/g/n; DSSS with DBPSK/DQPSK/CCK for 802.11b; BT DSS: GFSK modulation (1Mbps) pi/4-DQPSK modulation (2Mbps) 8DPSK modulation (3Mbps) BT DTS: GFSK modulation (1Mbps)			
Operating Frequency Range	WIFI 5G Band	Mode	Frequency Range(MHz)	Number of channels
	UNII Band I	802.11a/n(HT20)	5180-5240	4
		802.11n(HT40)	5190-5230	2
	UNII Band III	802.11a/n(HT20)	5745-5825	5
		802.11n(HT40)	5755-5795	2
2.4G WIFI: 2412-2462MHz for 802.11b/g; 2412-2462MHz for 802.11n(HT20); 2422-2452MHz for 802.11n(HT40); Bluetooth: 2402-2480MHz				
Transmit Power Max	21.92 dBm for WIFI 2.4G Band; 1.354 dBm for BT DSS; 6.461 dBm for BT DTS; 16.72 dBm for UNII Band I; 14.27 dBm for UNII Band III			
Antenna Type	Three Antenna port Two antenna port for WIFI One antenna port for BT			
Auxiliary Antenna Gain	2dBi			
Directional gain	5.01dBi			

Power supply	DC 3.3V by external power
---------------------	---------------------------

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.407 (a) 15.407 (e)	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (a)	Peak Power Spectral Density	PASS	
15.407 (b)	Radiated Spurious Emission	PASS	
15.407(g)	Frequency Stability	PASS	
15.407 (b)(6) 15.207	Power Line Conducted Emission	PASS	
15.407(a) 15.203	Antenna Application	PASS	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 789033 D2 General UNII Test Procedures New Rules v01r03, In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AM4L1 filing to comply with Section 15.247 of the FCC Part 15, Subpart E Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart E

FCC KDB 789003 D2 General UNII Test Procedures New Rules v01r03

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCI	26115-010-0027	May 20, 2017	May 19, 2018
L.I.S.N.	Rohde & Schwarz	ENV216	101161	May 20, 2017	May 19, 2018
50Ω Coaxial Switch	Anritsu	MP59B	6100175589	May 21, 2017	May 20, 2018
Voltage Probe	Rohde & Schwarz	ESH2-Z3	100122	May 21, 2017	May 20, 2018

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 21, 2017	May 20, 2018
Pre-Amplifier	HP	8447F	2944A07999	May 20, 2017	May 19, 2018
Bilog Antenna	Schwarzbeck	VULB9163	142	May 20, 2017	May 19, 2018
Cable	Schwarzbeck	AK9513	ACRX1	May 21, 2017	May 20, 2018
Cable	Rosenberger	N/A	FP2RX2	May 21, 2017	May 20, 2018
Cable	Schwarzbeck	AK9513	CRPX1	May 21, 2017	May 20, 2018
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 21, 2017	May 20, 2018
Pre-Amplifier	A.H.	PAM-0126	1415261	May 20, 2017	May 19, 2018
Horn Antenna	Schwarzbeck	BBHA 9120	707	May 20, 2017	May 19, 2018
Loop Antenna	Laplace Instrument Ltd	RF300	8006	May 21, 2017	May 20, 2018
Cable	H+B	0.5M SF104-26.5	289147/4	May 21, 2017	May 20, 2018
Cable	H+B	3M SF104-26.5	295838/4	May 21, 2017	May 20, 2018
Cable	H+B	6M SF104-26.5	295840/4	May 21, 2017	May 20, 2018

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	May 21, 2017	May 20, 2018
Signal Analyzer	Agilent	N9010A	My53470879	May 21, 2017	May 20, 2018
Power meter	Anritsu	ML2495A	0824006	May 21, 2017	May 20, 2018
Power sensor	Anritsu	MA2411B	0738172	May 21, 2017	May 20, 2018
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	May 21, 2017	May 20, 2018

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11a: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT20): MCS15; 802.11n (HT40): MCS0; 802.11n (HT40): MCS15; 802.11ac (HT20): MCS0; 802.11ac (HT20): MCS15; 802.11ac (HT40): MCS0; 802.11ac (HT40): MCS19; 802.11ac (HT80): MCS0; 802.11ac (HT80): MCS19;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Wifi 5G with UNII Band I

Frequency and Channel list for 802.11a/n(HT20)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

Frequency and Channel list for 802.11n(HT40)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190				
46	5230				

Test Frequency and Channel for 802.11a/n(HT20)

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	48	5240

Test Frequency and channel for 802.11n(VHT40)

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	N/A	N/A	46	5230

Wifi 5G with UNII Band III

Frequency and Channel list for 802.11a/n(HT20)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825
153	5765	161	5805		

Frequency and Channel list for 802.11n(HT40)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755				
159	5795				

Test Frequency and Channel for 802.11a/n(HT20)

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825

Test Frequency and channel for 802.11n(HT40)

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	N/A	N/A	159	5795

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS,2016.10.24

The certificate is valid until 2022.10.28

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2015.4

The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC

The Certificate Registration Number is 882943

Accredited by Industry Canada, November 29, 2012

The Certificate Registration Number is 4480A.

Name of Firm

: EMTEK(SHENZHEN) CO., LTD.

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	± 0.5
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz :

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz :


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz :


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

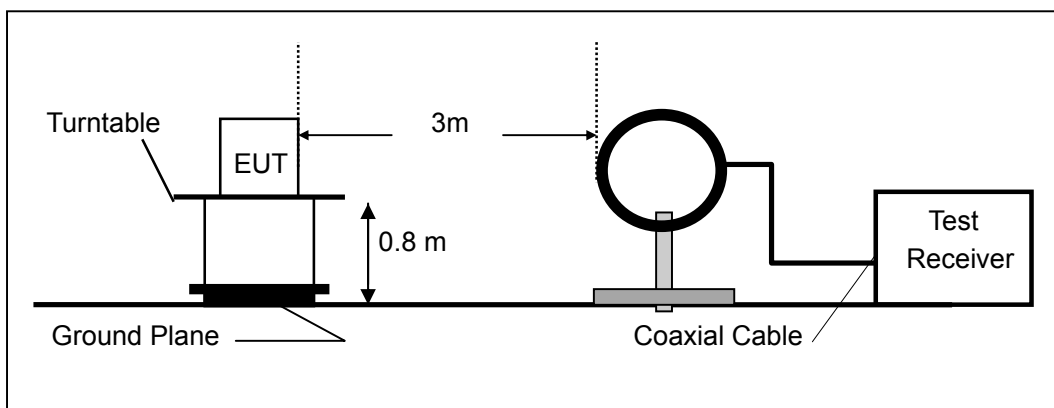

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

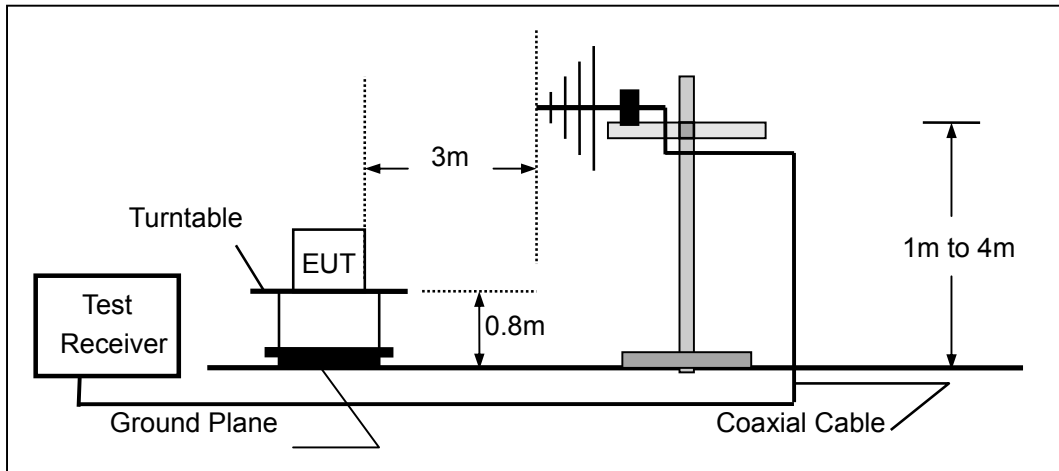

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

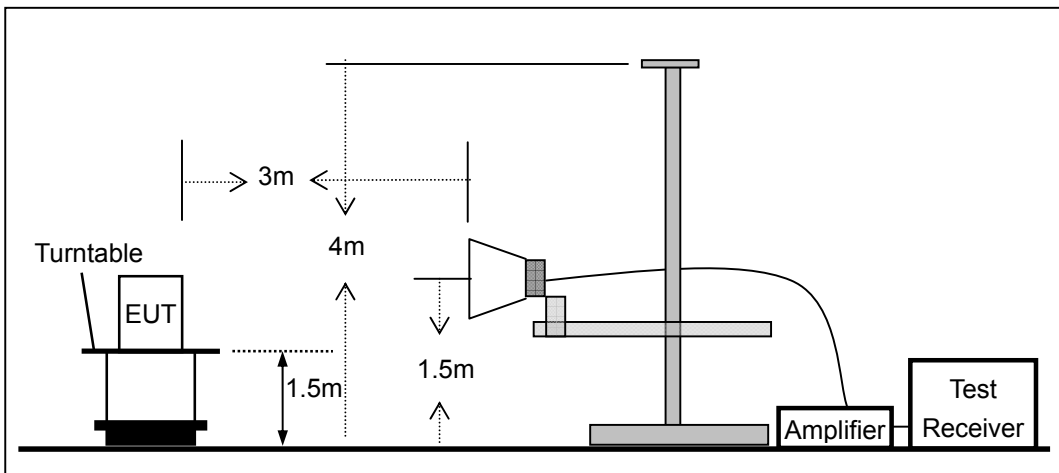


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

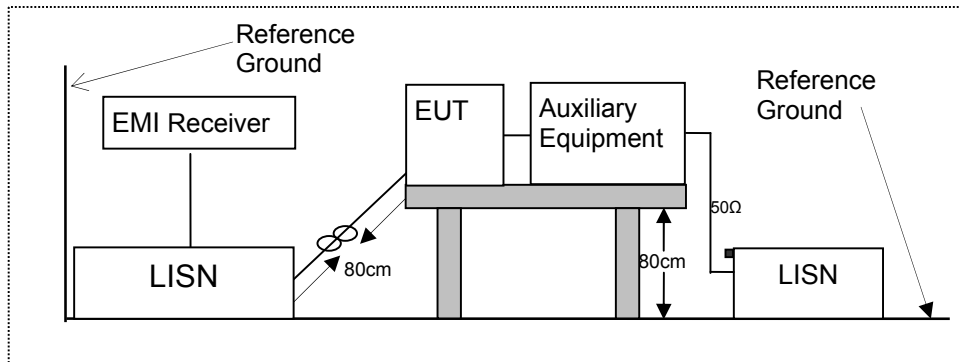

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

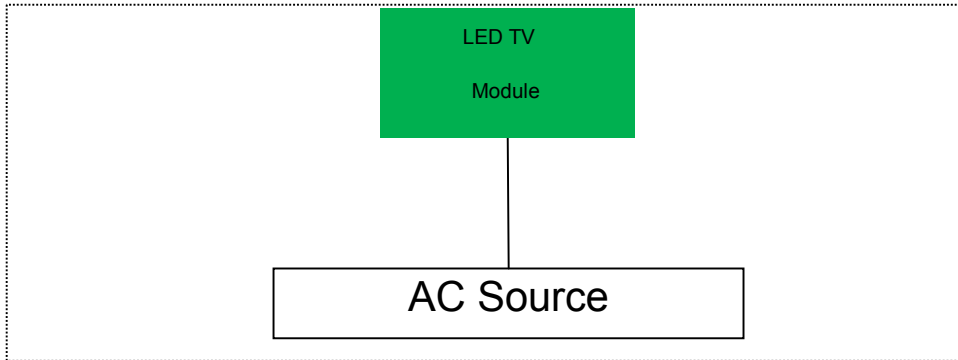

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
1.	LED TV	N/A	LE-43GUK-A1	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 BANDWIDTH MEASUREMENT

8.1.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(e) for UNII Band III

8.1.2 Conformance Limit

No limit requirement.

The minimum 6 dB emission bandwidth of at least 500 KHz for the UNII Band III.

8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.1.4 Test Procedure

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below

■ The following procedure shall be used for measuring (26 dB) power bandwidth:

Center Frequency: test Frequency

Set RBW = approximately 1% of the emission bandwidth.

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

X dB Bandwidth: 26 dB

Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.

Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

■ Minimum Emission Bandwidth for the UNII Band III

Center Frequency: test Frequency

Set RBW = 100 kHz

Set VBW $\geq 3 \cdot$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

X dB Bandwidth: 6 dB

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

■ The following procedure shall be used for measuring (99 %) power bandwidth:

Set center frequency to the nominal EUT channel center frequency.

Set span = 1.5 times to 5.0 times the OBW.

Set RBW = 1 % to 5 % of the OBW

Set VBW $\geq 3 \cdot$ RBW

Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

Use the 99 % power bandwidth function of the instrument (if available).

If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

8.1.5 Test Results

All antenna have been tested, and the worst result(antenna A) have been recorded in the report.


<input checked="" type="checkbox"/> 802.11a mode						
Temperature :	28	Test Date :	August 22, 2017			
Humidity :	65 %	Test By:	King Kong			
Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH36	5180	21.36	16.721	N/A	N/A
	CH40	5200	21.38	16.728	N/A	N/A
	CH48	5240	21.33	16.736	N/A	N/A
UNII Band III	CH149	5745	21.28	16.703	N/A	N/A
	CH157	5785	21.46	16.741	N/A	N/A
	CH165	5825	21.37	16.719	N/A	N/A
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11n(VHT20) mode						
Temperature :	28	Test Date :	August 22, 2017			
Humidity :	65 %	Test By:	King Kong			
Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH36	5180	21.48	17.892	N/A	N/A
	CH40	5200	21.56	17.845	N/A	N/A
	CH48	5240	21.75	17.844	N/A	N/A
UNII Band III	CH149	5745	21.53	17.875	N/A	N/A
	CH157	5785	21.52	17.864	N/A	N/A
	CH165	5825	21.50	17.880	N/A	N/A
Note: N/A (Not Applicable)						


<input checked="" type="checkbox"/> 802.11n(VHT40) mode						
Temperature :	28	Test Date :	August 22, 2017			
Humidity :	65 %	Test By:	King Kong			
Band	Channel Number	Channel Freq. (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
UNII Band I	CH38	5190	39.98	36.380	N/A	N/A
	CH46	5230	39.90	36.362	N/A	N/A
UNII Band III	CH151	5755	39.80	36.360	N/A	N/A
	CH159	5795	39.91	36.425	N/A	N/A
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> UNII Band III						
Temperature :	28	Test Date :	August 22, 2017			
Humidity :	65 %	Test By:	King Kong			
Operation Mode	Channel Number	Channel Freq. (MHz)	6dB EBW		Limit (MHz)	Verdict
802.11a	CH149	5745	16.37		500	PASS
	CH157	5785	16.42		500	PASS
	CH165	5825	16.38		500	PASS
802.11n (VHT20)	CH149	5745	17.60		500	PASS
	CH157	5785	17.60		500	PASS
	CH165	5825	17.62		500	PASS
802.11n (VHT40)	CH151	5755	36.35		500	PASS
	CH159	5795	36.41		500	PASS
Note: N/A (Not Applicable)						


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11a Frequency(MHz) 5180

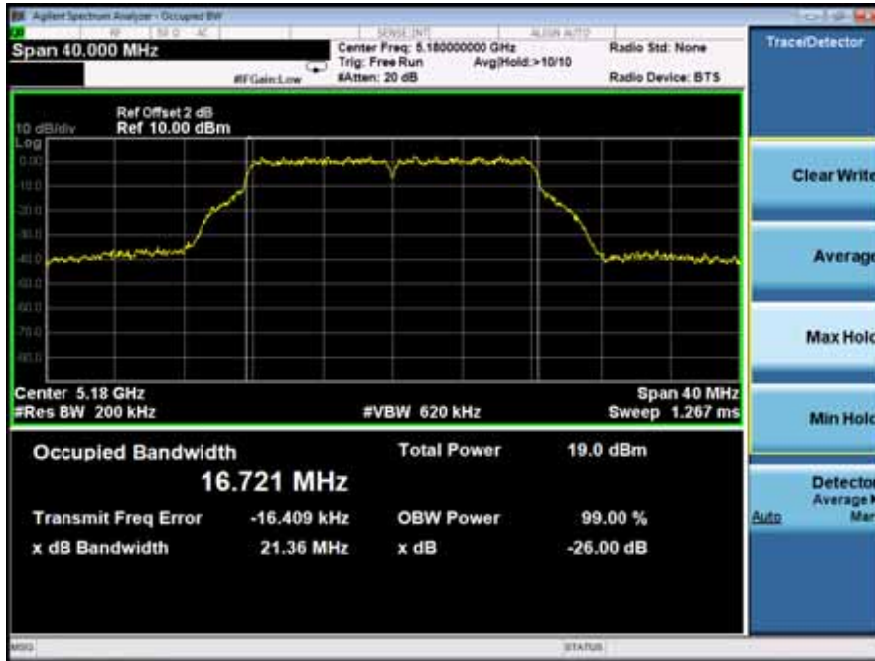


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11a Frequency(MHz) 5200

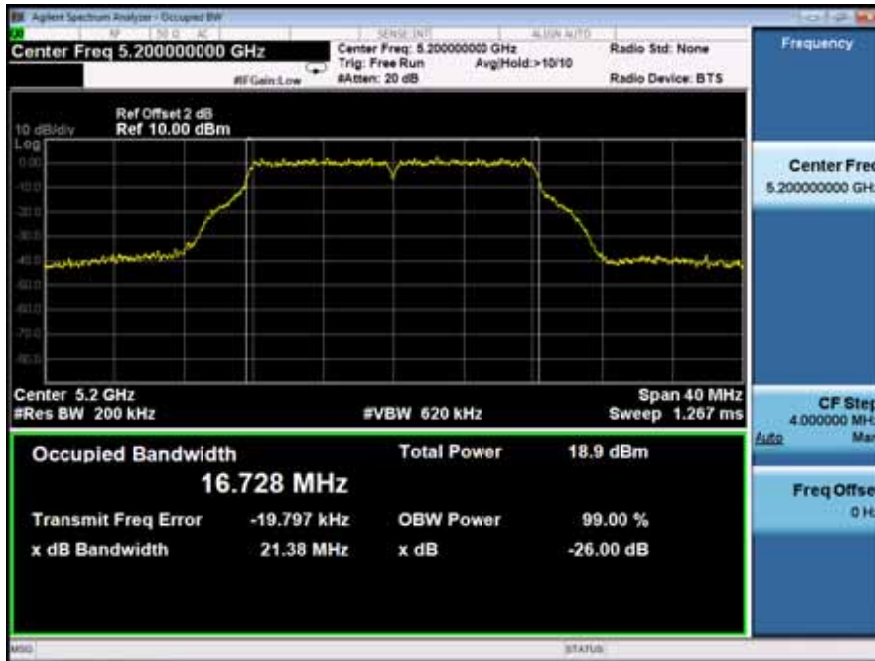


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11a Frequency(MHz) 5240

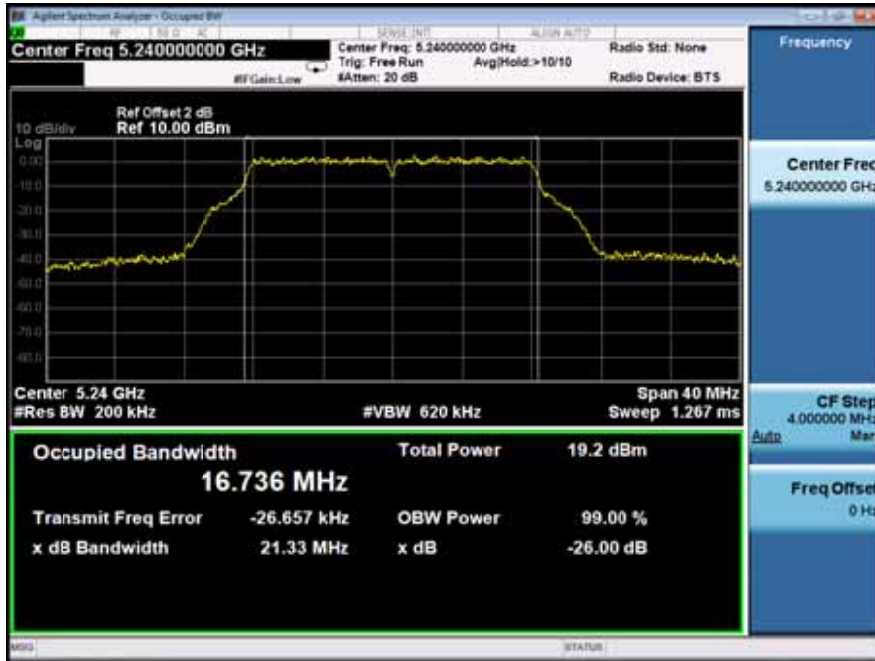


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11a Frequency(MHz) 5745

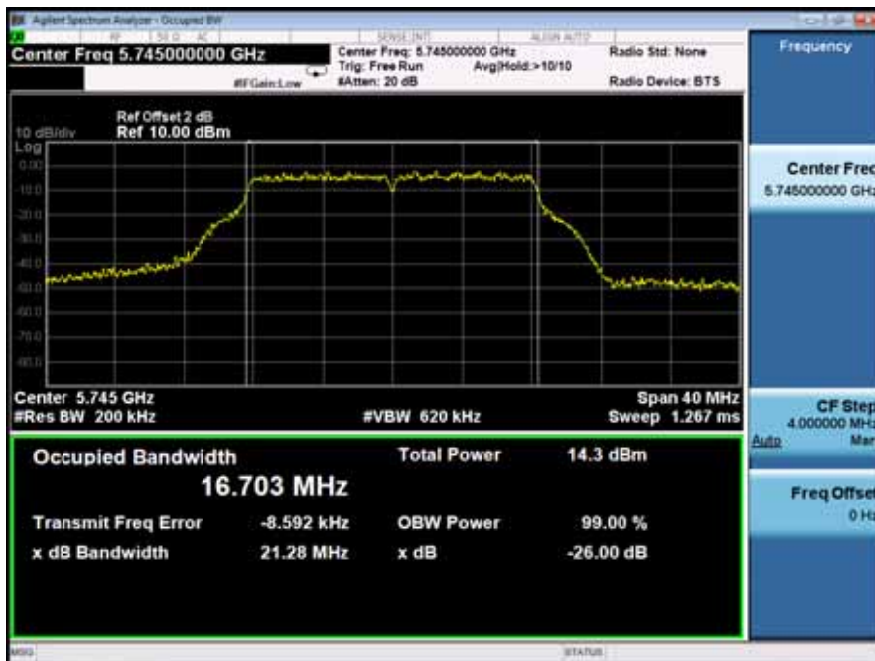


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11a Frequency(MHz) 5785

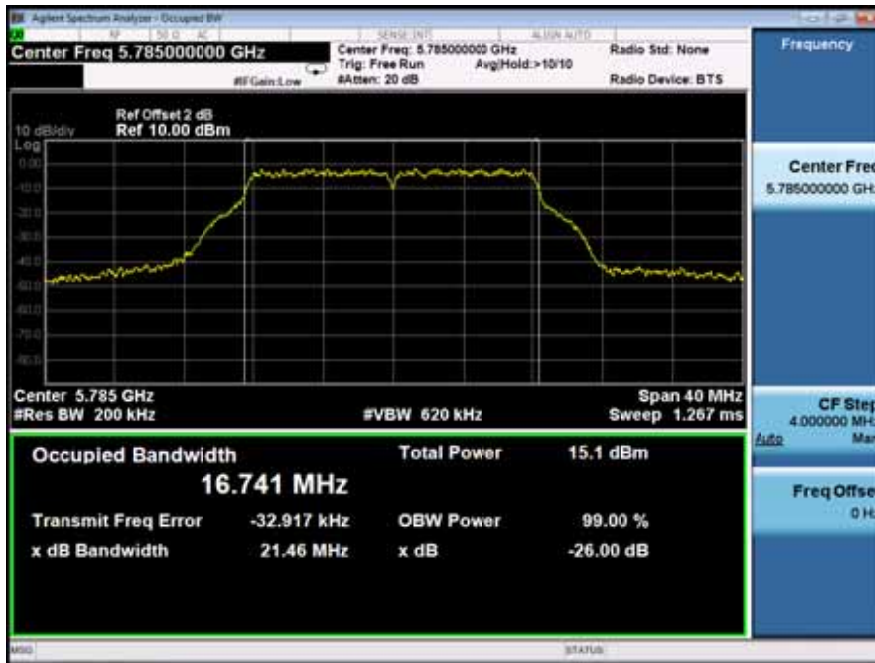


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11a Frequency(MHz) 5825

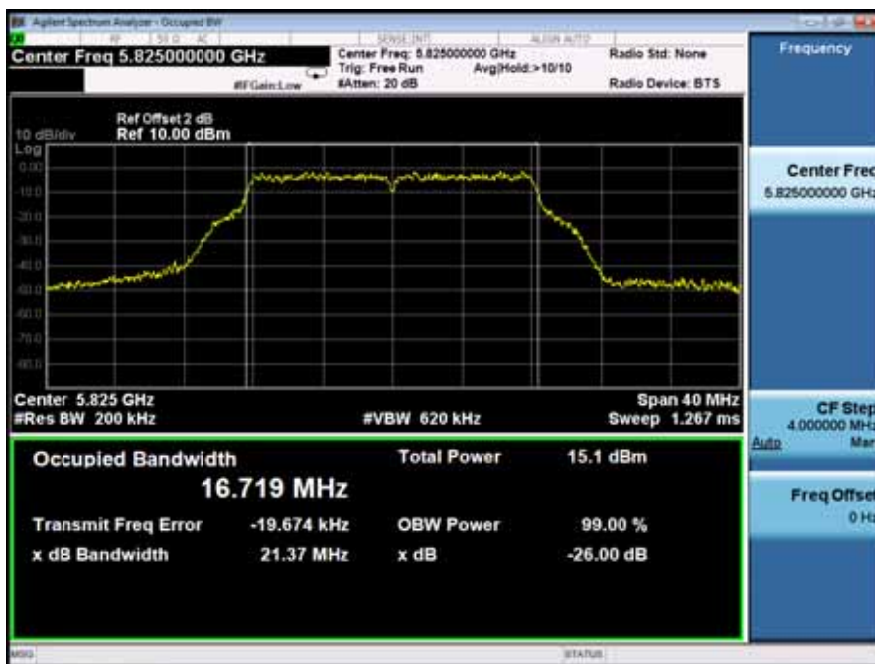


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5180

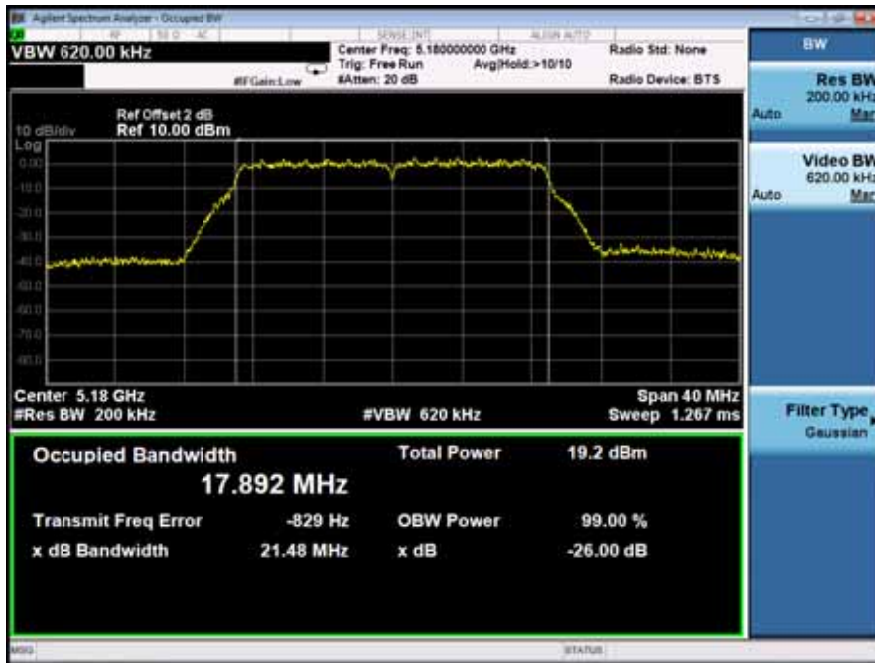


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5200

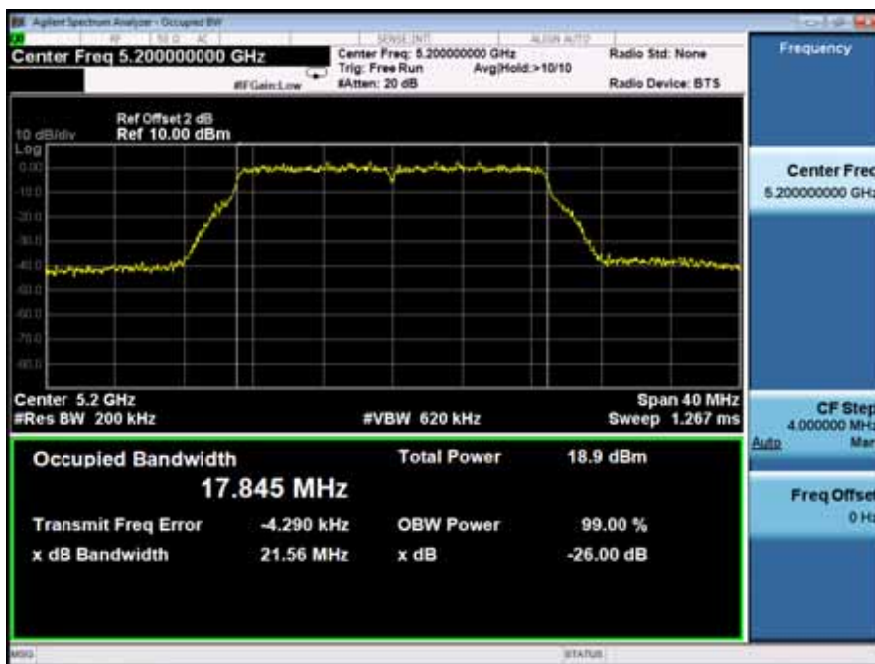


Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5240

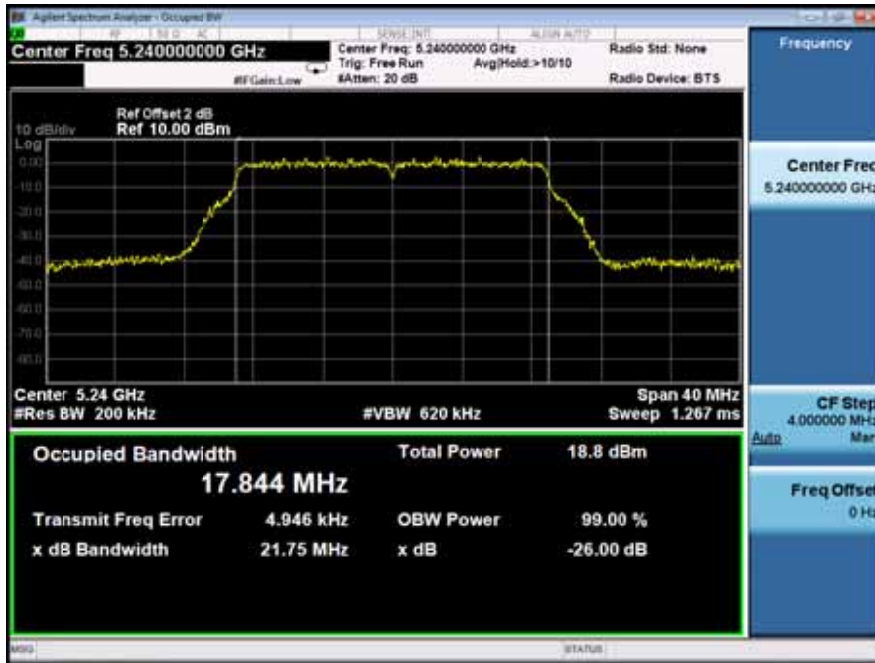


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5745

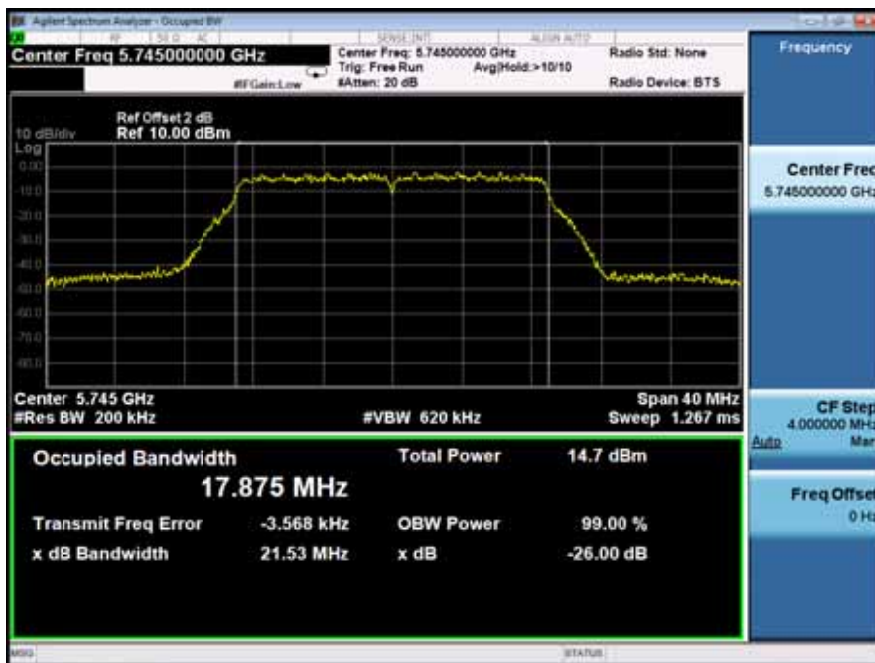

Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5785

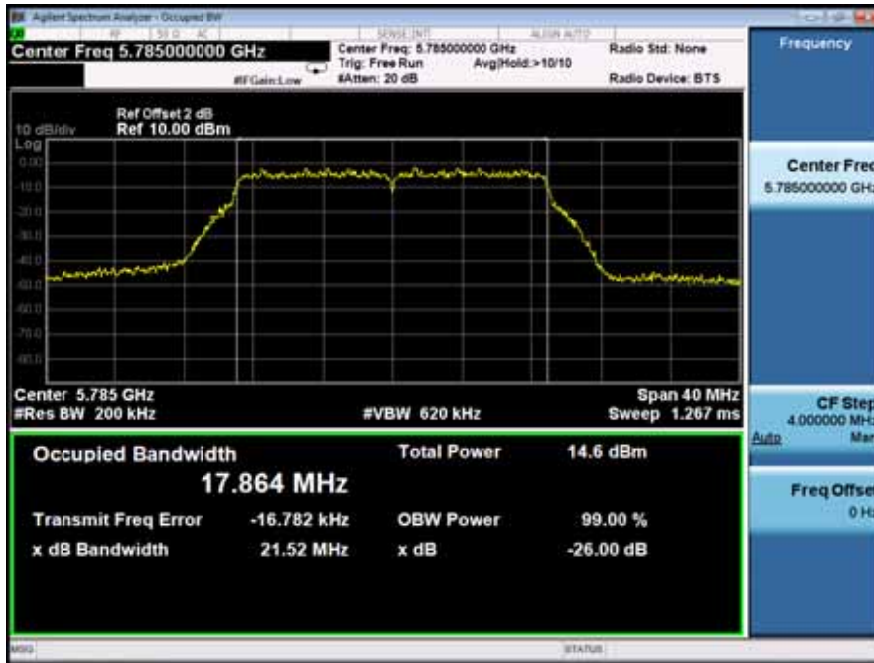


Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT20) mode Frequency(MHz) 5825

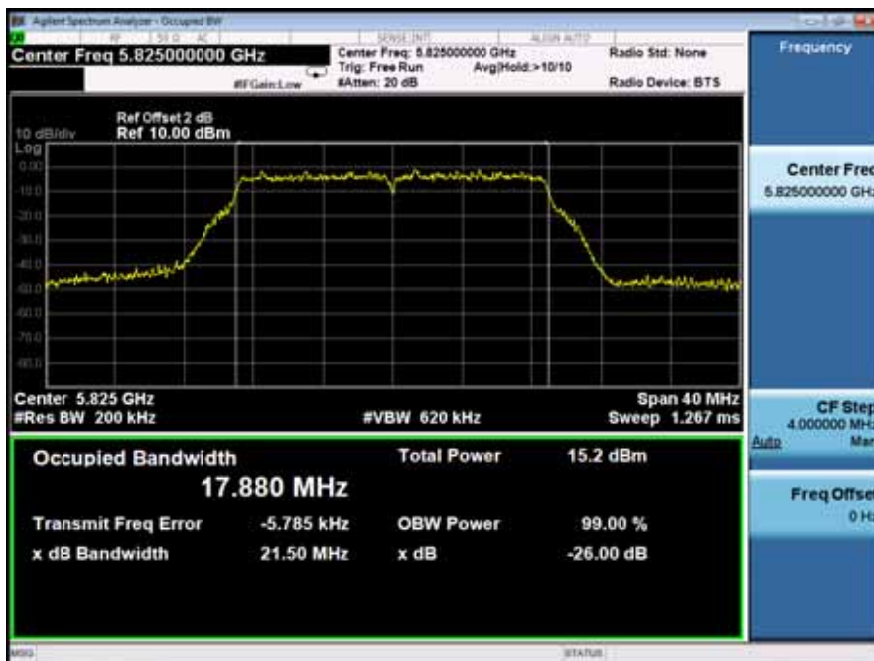

Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5190




Emission Bandwidth&99% Occupied Bandwidth UNII Band I
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5230

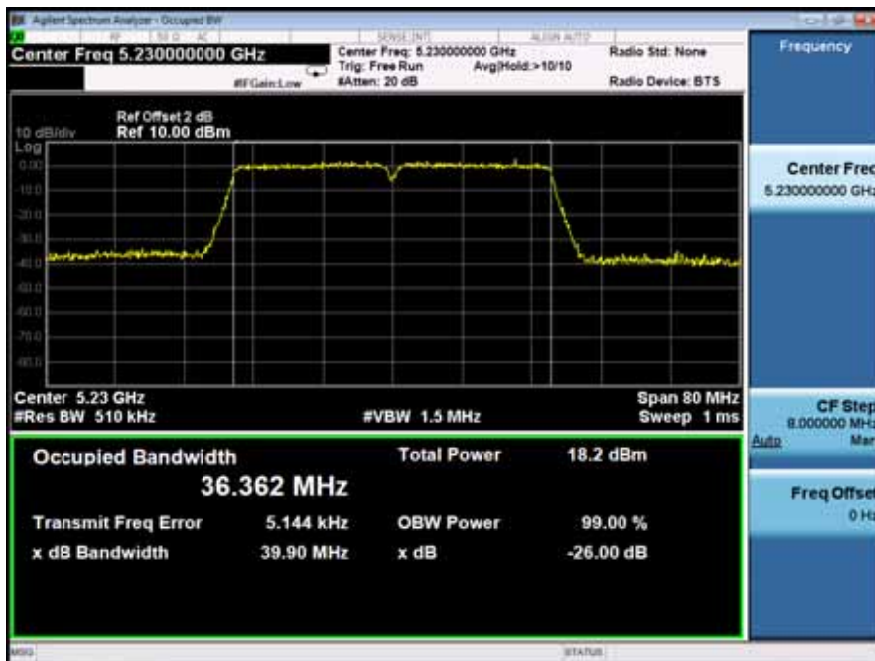

Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5755




Emission Bandwidth&99% Occupied Bandwidth UNII Band III
 Test Model 802.11n(VHT40) mode Frequency(MHz) 5795

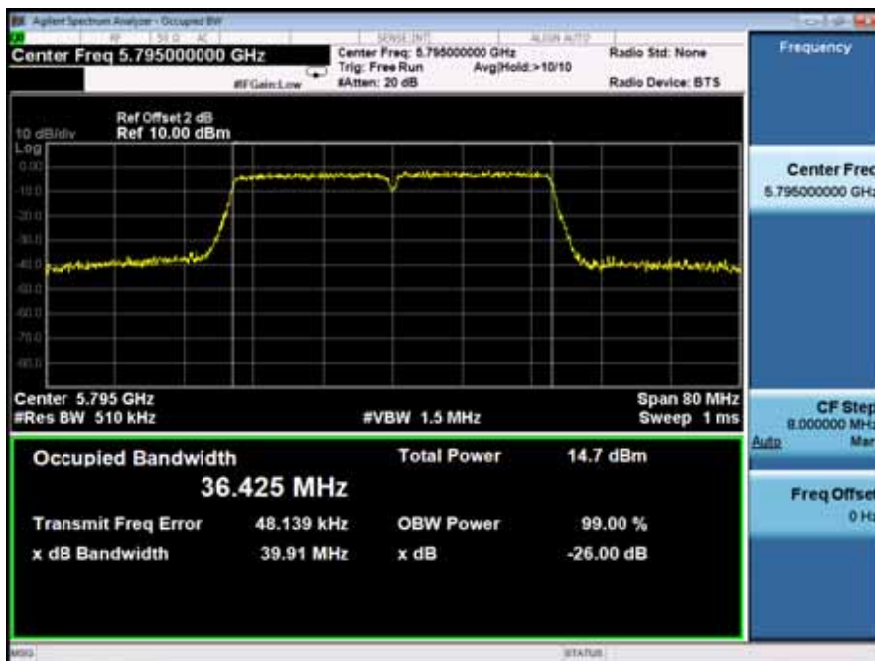

Minimum Emission Bandwidth
Test Model 802.11a mode

UNII Band III
Frequency(MHz)


5745

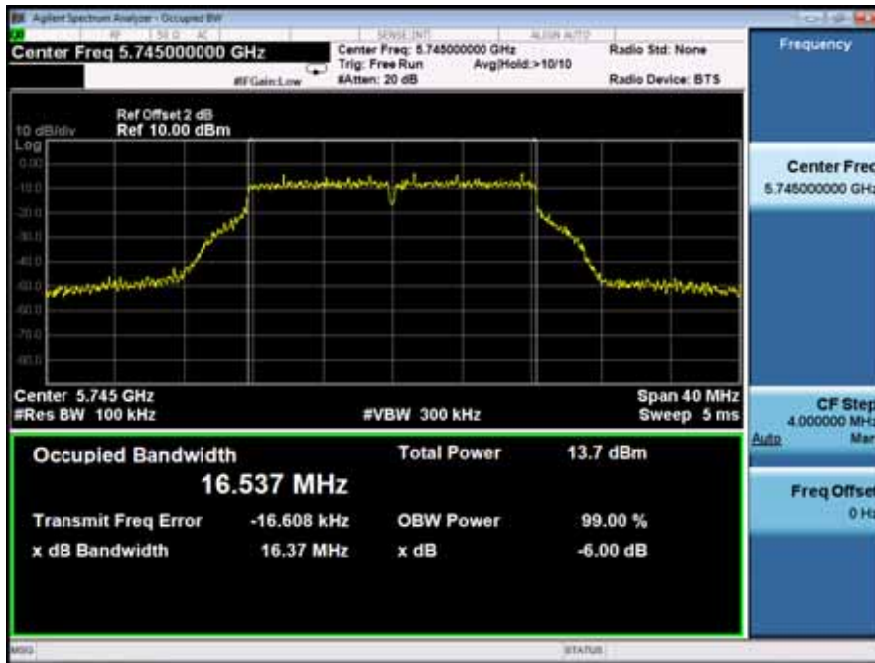


Minimum Emission Bandwidth
Test Model 802.11a mode

UNII Band III
Frequency(MHz)


5785

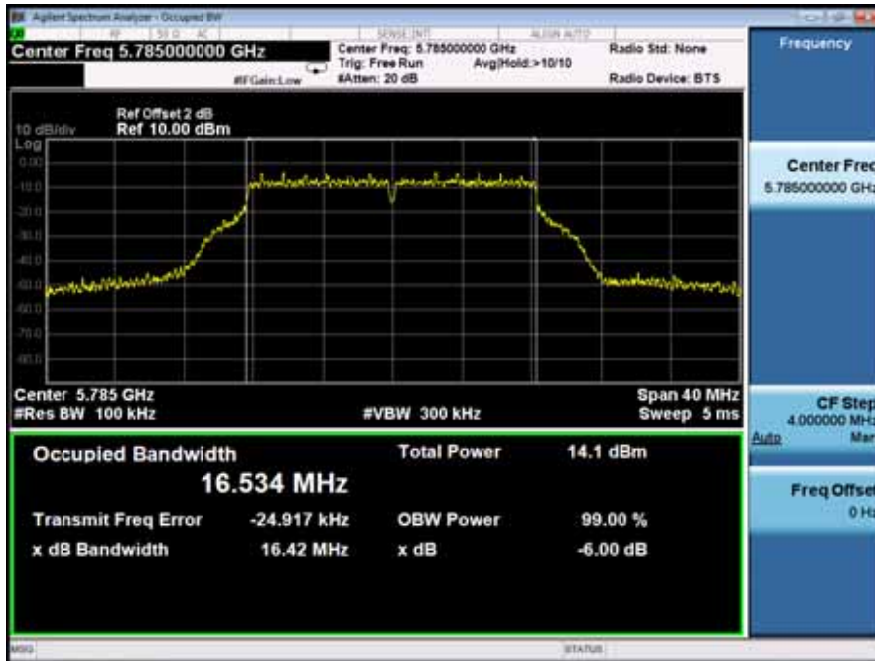


Minimum Emission Bandwidth	UNII Band III
Test Model 802.11a mode	Frequency(MHz) 5825

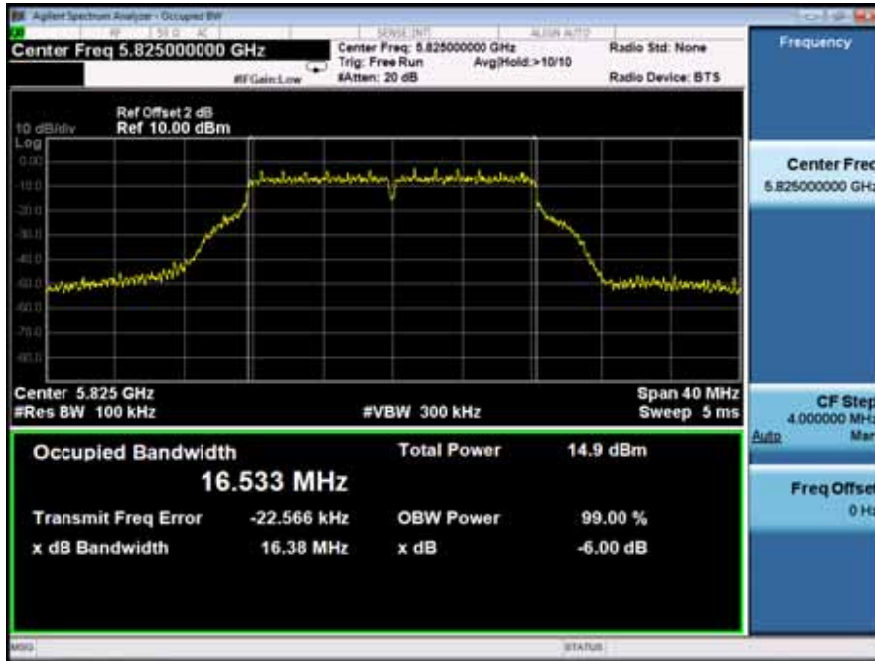


Minimum Emission Bandwidth	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5745

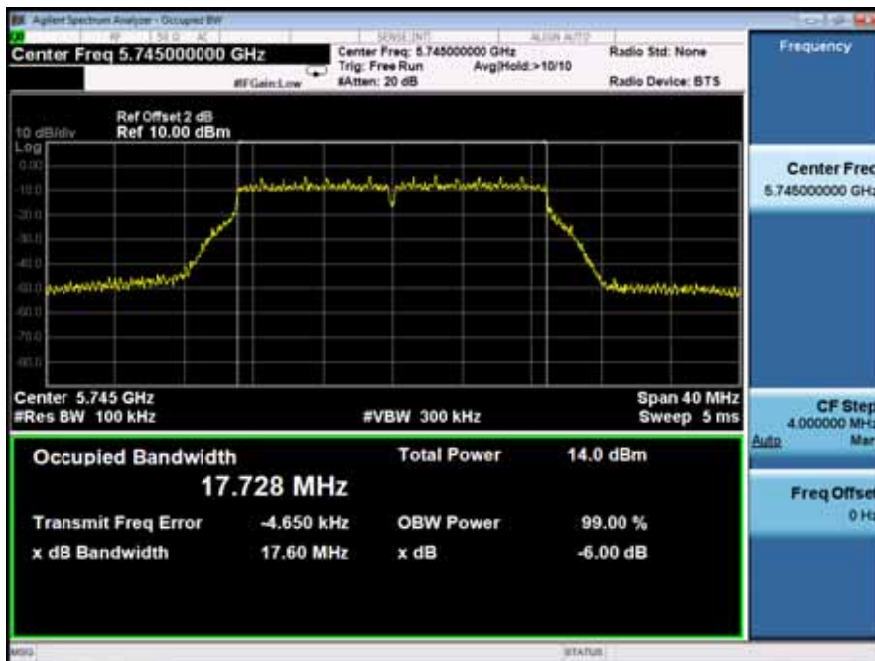


Minimum Emission Bandwidth	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5785

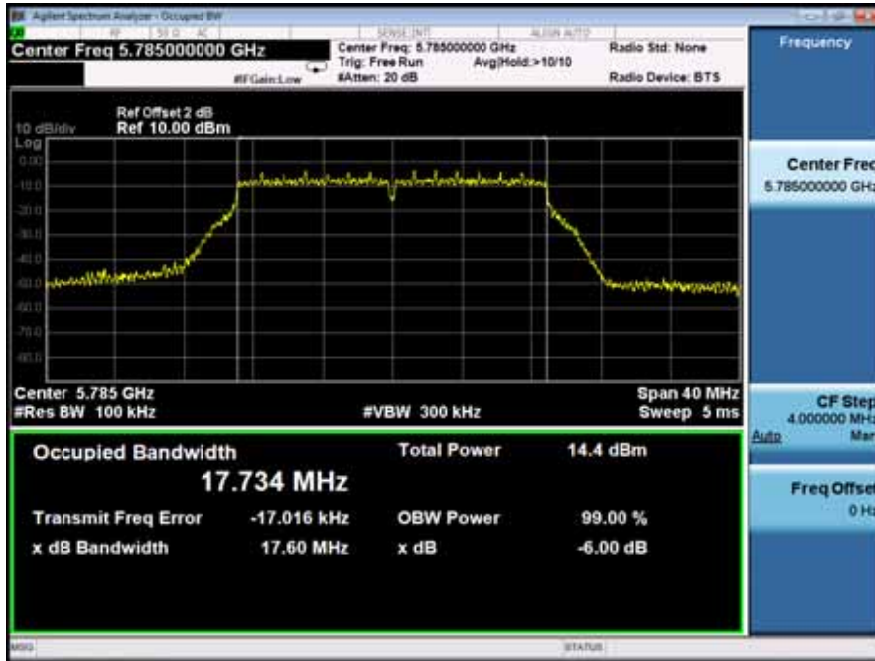


Minimum Emission Bandwidth	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5825

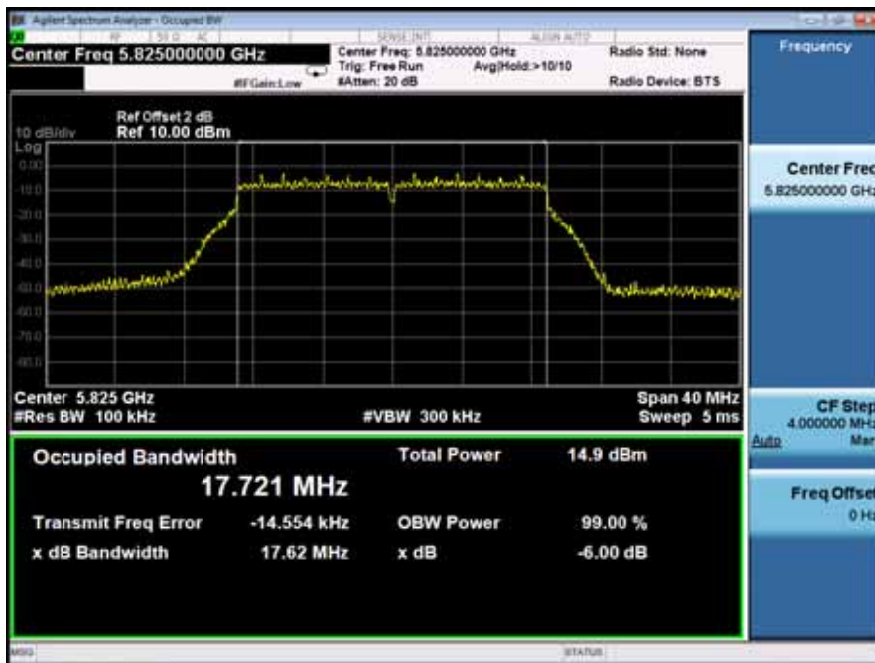

Minimum Emission Bandwidth	UNII Band III
Test Model 802.11n(VHT40) mode	Frequency(MHz) 5755

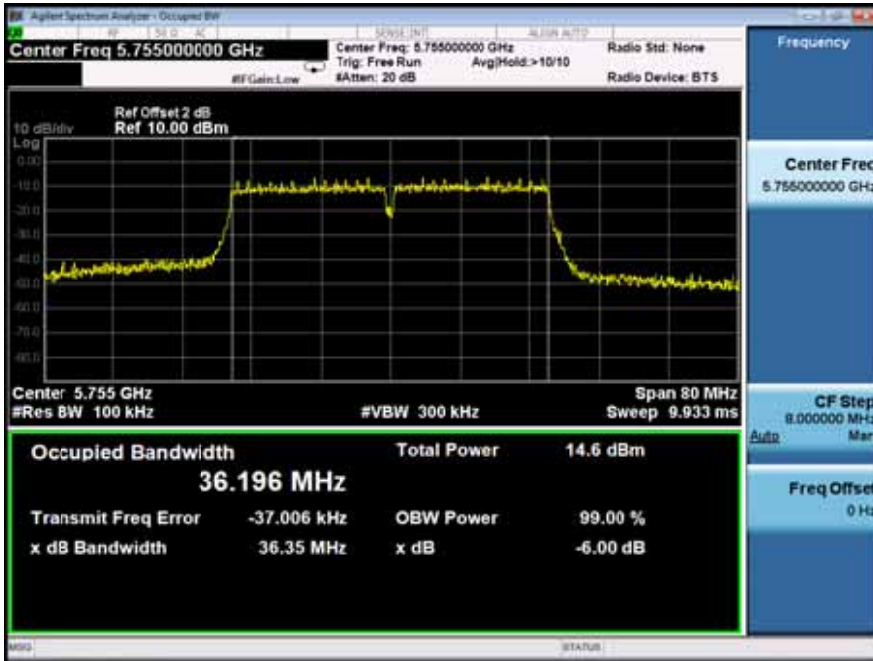

Minimum Emission Bandwidth	UNII Band III
Test Model 802.11n(VHT40) mode	Frequency(MHz) 5795

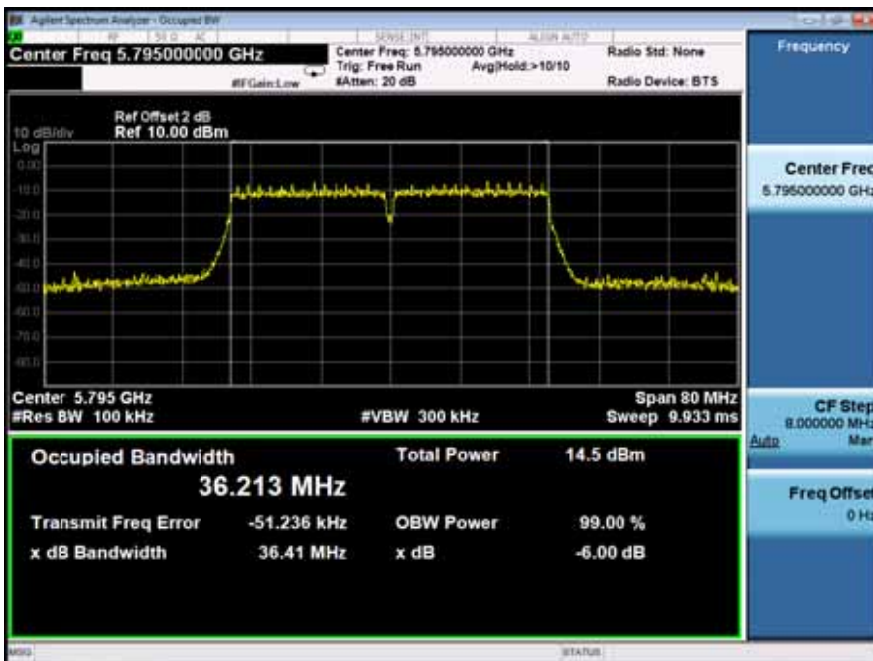

8.2 MAXIMUM CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(3) for UNII Band III
According to 789033 D02 Section II(E)

8.2.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.2.4 Test Procedure

The maximum average conducted output power can be measured using Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- a. The Transmitter output (antenna port) was connected to the power meter.
- b. Turn on the EUT and power meter and then record the power value.
- c. Repeat above procedures on all channels needed to be tested.

8.2.5 Test Results

<input checked="" type="checkbox"/> 802.11a mode						
Temperature :	28	Test Date :	August 22, 2017			
Humidity :	65 %	Test By:	King Kong			
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)		Limit (dBm)	Verdict
			Ant0	Ant1		
UNII Band I	CH36	5180	13.79	13.71	24	Pass
	CH40	5200	13.66	13.70	24	Pass
	CH48	5240	13.65	13.55	24	Pass
UNII Band III	CH149	5745	10.96	10.98	30	Pass
	CH157	5785	11.24	11.10	30	Pass
	CH165	5825	10.06	10.20	30	Pass
Note: N/A (Not Applicable)						

<input checked="" type="checkbox"/> 802.11n(VHT20) mode							
Temperature :	28	Test Date :	August 22, 2017				
Humidity :	65 %	Test By:	King Kong				
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	13.26	13.18	16.23	24	Pass
	CH40	5200	13.29	13.18	16.25	24	Pass
	CH48	5240	13.25	13.35	16.31	24	Pass
UNII Band III	CH149	5745	10.77	10.96	13.88	30	Pass
	CH157	5785	11.15	11.36	14.27	30	Pass
	CH165	5825	9.89	10.12	13.02	30	Pass
Note: N/A (Not Applicable)							

<input checked="" type="checkbox"/> 802.11n(VHT40) mode							
Temperature :	28	Test Date :	August 22, 2017				
Humidity :	65 %	Test By:	King Kong				
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	13.70	13.71	16.72	24	Pass
	CH46	5230	13.47	13.44	16.47	24	Pass
UNII Band III	CH151	5755	9.88	9.86	12.88	30	Pass
	CH159	5795	10.81	10.91	13.87	30	Pass
Note: N/A (Not Applicable)							

8.3 MAXIMUM PEAK POWER DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(3) for UNII Band III
According to 789033 D02 Section II(F)

8.3.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.3.4 Test Procedure

Methods refer to FCC KDB 789033

1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...".

2) Use the peak search function on the instrument to find the peak of the spectrum.

3) The result is the PPSD.

4) The above procedures make use of 500kHz resolution bandwidth to satisfy the 500kHz measurement bandwidth specified in the 15.407(a)(5). That rule section also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 500kHz bandwidth.

8.3.5 Test Results

		<input checked="" type="checkbox"/> 802.11a mode	
Temperature :	28	Test Date :	August 22, 2017
Humidity :	65 %	Test By:	King Kong

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density		Limit	Verdict
			Ant0	Ant1		
UNII Band I	CH36	5180	-1.108	-1.138	≤11dBm/1MHz	Pass
	CH40	5200	-0.950	-1.057	≤11dBm/1MHz	Pass
	CH48	5240	-0.843	-0.868	≤11dBm/1MHz	Pass
UNII Band III	CH149	5745	1.548	1.718	≤30dBm/500KHz	Pass
	CH157	5785	1.691	1.309	≤30dBm/500KHz	Pass
	CH165	5825	2.820	2.449	≤30dBm/500KHz	Pass

Note:
N/A (Not Applicable)

		<input checked="" type="checkbox"/> 802.11n(VHT20) mode	
Temperature :	28	Test Date :	August 22, 2017
Humidity :	65 %	Test By:	King Kong

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	-3.428	-3.544	-0.48	≤11dBm/1MHz	Pass
	CH40	5200	-3.699	-3.834	-0.76	≤11dBm/1MHz	Pass
	CH48	5240	-3.307	-3.053	-0.17	≤11dBm/1MHz	Pass
UNII Band III	CH149	5745	1.532	1.756	4.66	≤30dBm/500KHz	Pass
	CH157	5785	1.962	1.800	4.89	≤30dBm/500KHz	Pass
	CH165	5825	2.499	2.645	5.58	≤30dBm/500KHz	Pass


Note:
N/A (Not Applicable)

		<input checked="" type="checkbox"/> 802.11n(VHT40) mode	
Temperature :	28	Test Date :	August 22, 2017
Humidity :	65 %	Test By:	King Kong


Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	-4.696	-4.343	-1.51	≤11dBm/1MHz	Pass
	CH46	5230	-4.073	-4.699	-1.36	≤11dBm/1MHz	Pass
UNII Band III	CH151	5755	-0.263	0.217	2.99	≤30dBm/500KHz	Pass
	CH159	5795	-0.516	-0.463	2.52	≤30dBm/500KHz	Pass

Note:
N/A (Not Applicable)


Power Spectral Density	UNII Band I
Test Model 802.11a	Frequency(MHz) 5180
Ant0	

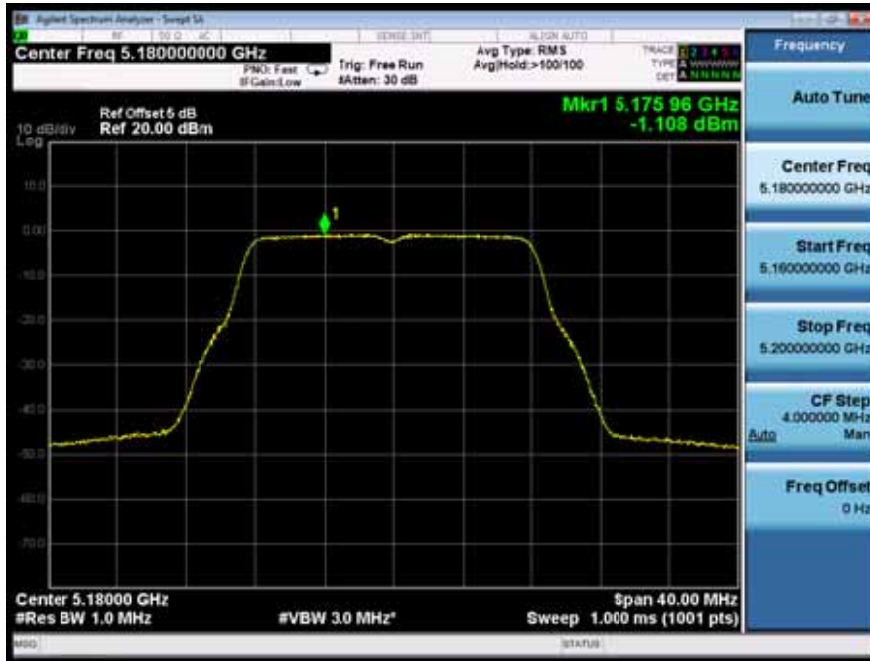


Ant1

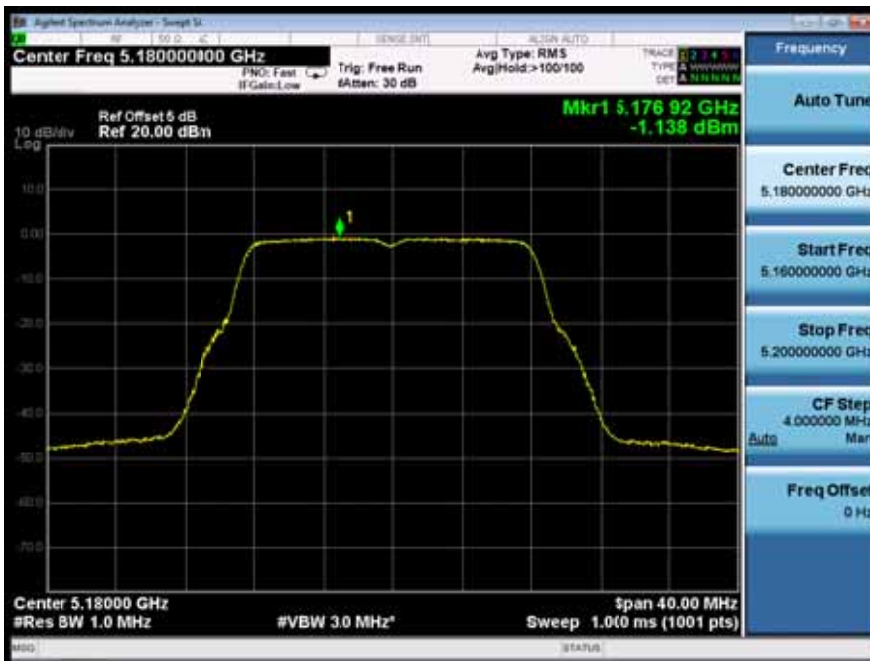


Power Spectral Density	UNII Band I
Test Model 802.11a	Frequency(MHz) 5200
Ant0	

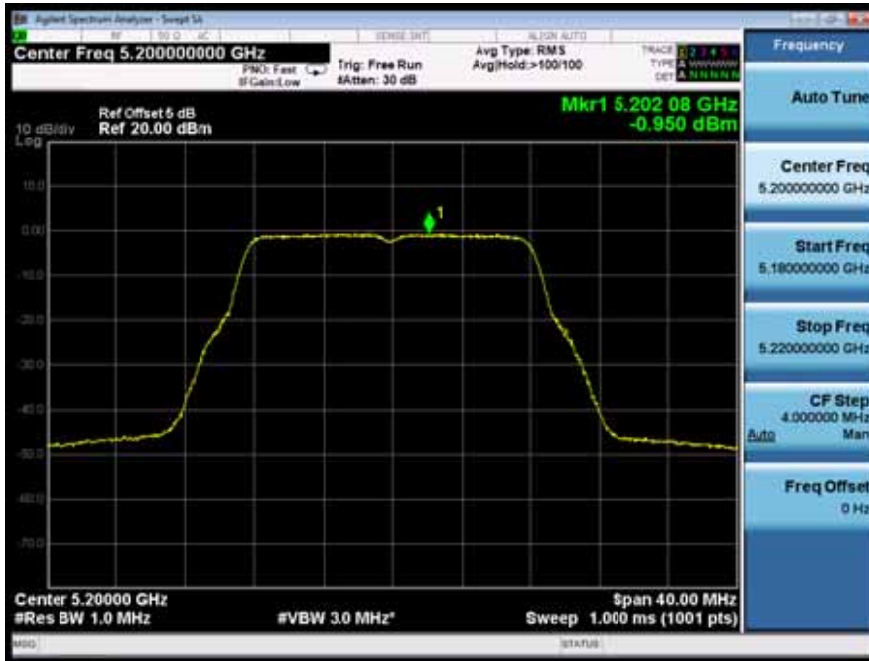


Ant1

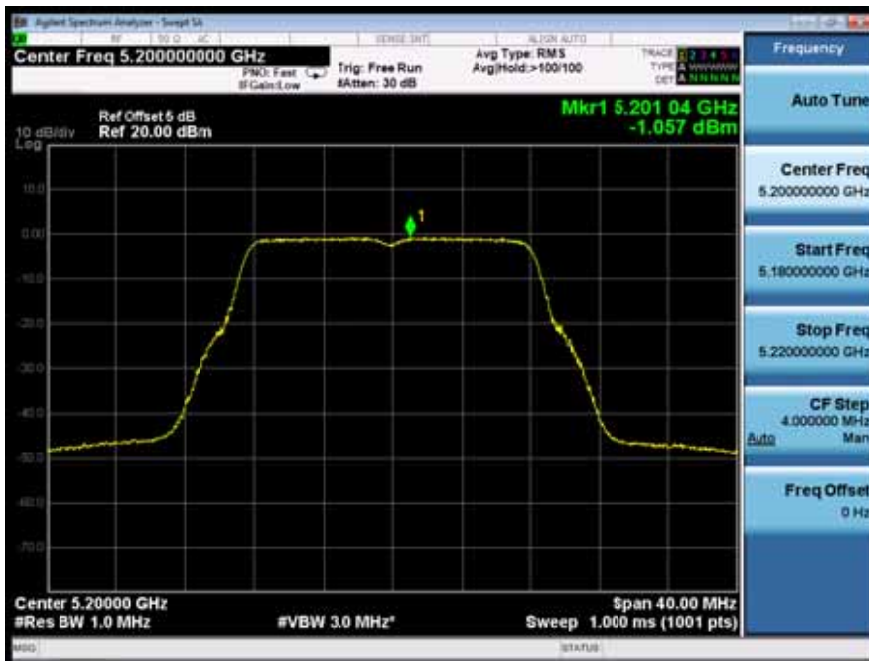

Power Spectral Density	UNII Band I
Test Model 802.11a	Frequency(MHz) 5240
Ant0	

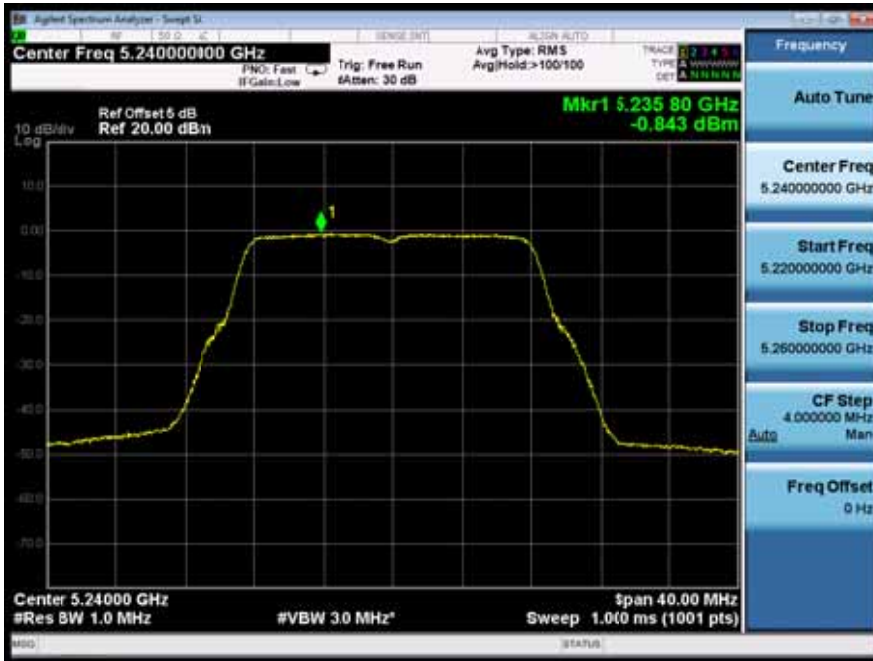

Ant1

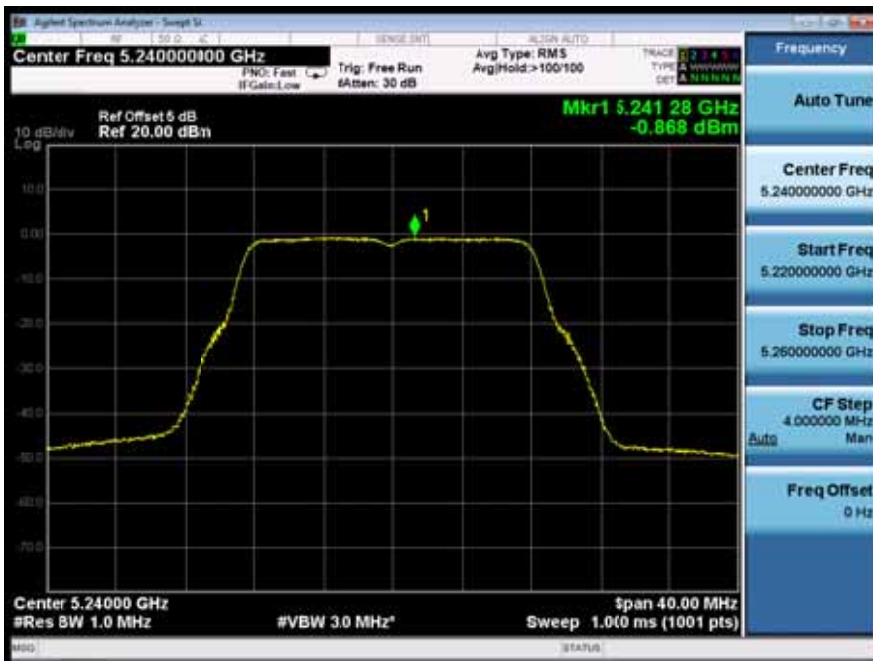

Power Spectral Density	UNII Band III
Test Model 802.11a	Frequency(MHz) 5745
Ant0	




Ant1



Power Spectral Density	UNII Band III
Test Model 802.11a	Frequency(MHz) 5785
Ant0	



Ant1

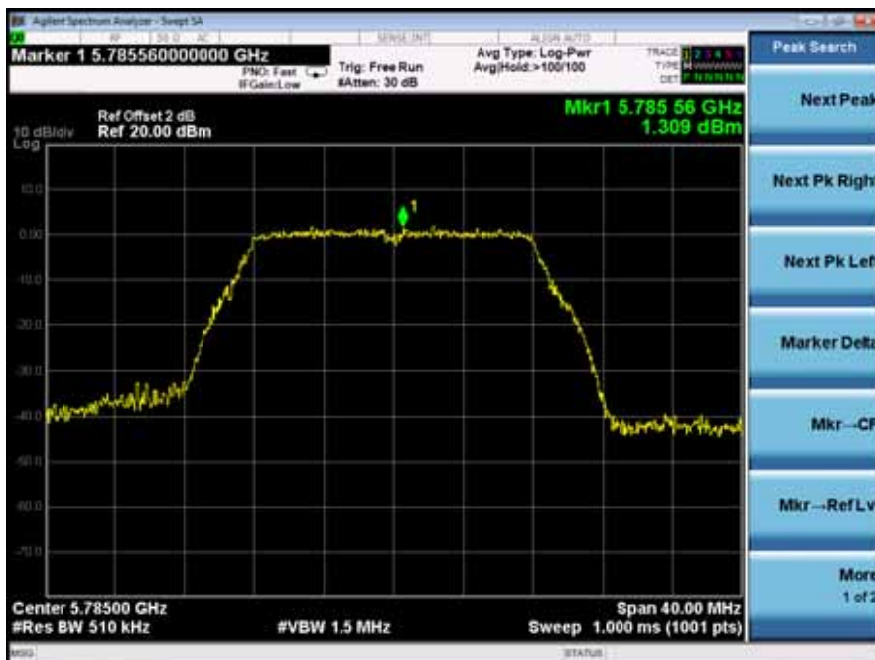


Power Spectral Density
Test Model 802.11a

UNII Band III
Frequency(MHz)

5825


Ant0

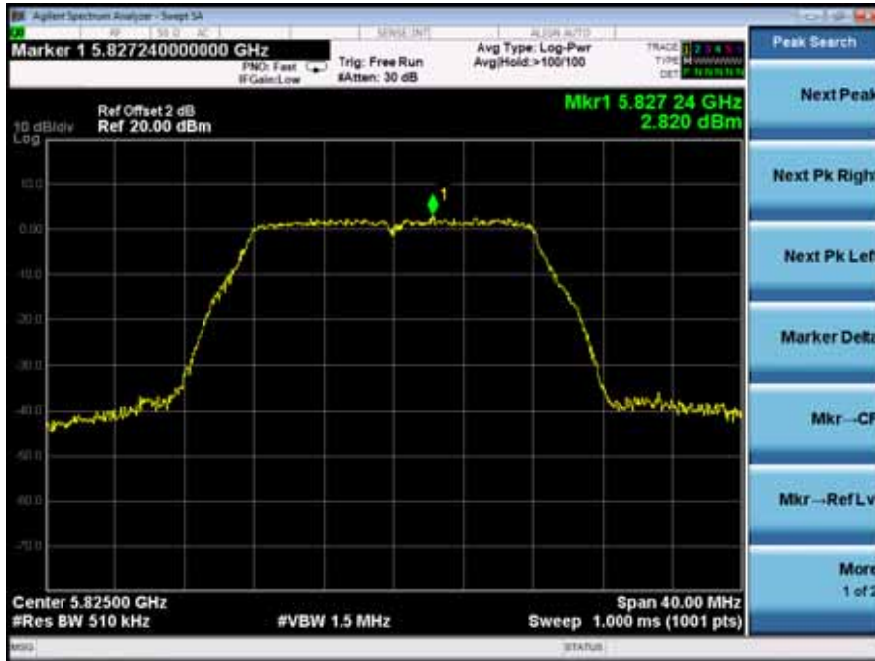

Ant1



Power Spectral Density	UNII Band I
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5180
Ant0	

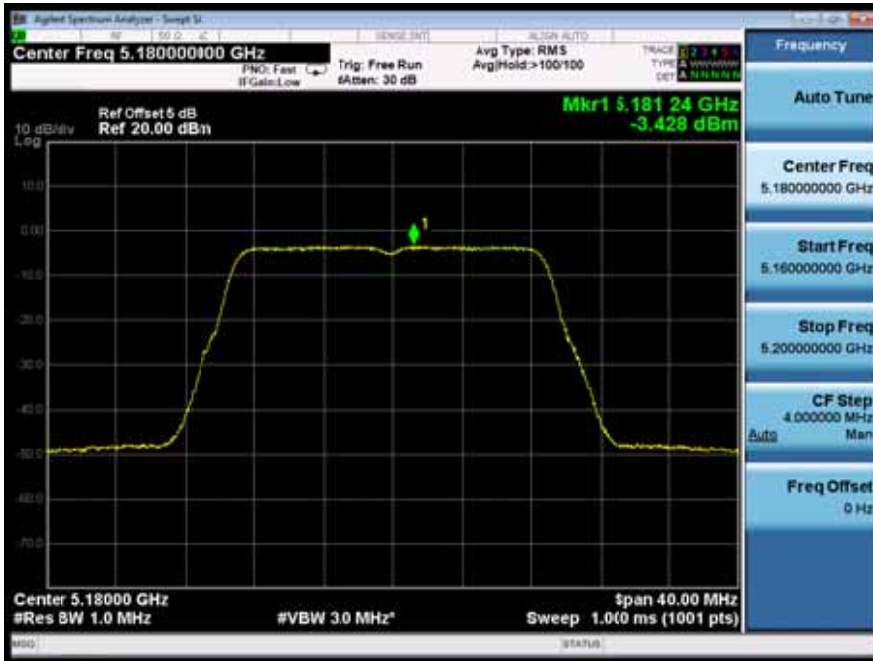


Ant1




Power Spectral Density	UNII Band I
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5200
Ant0	




Ant1

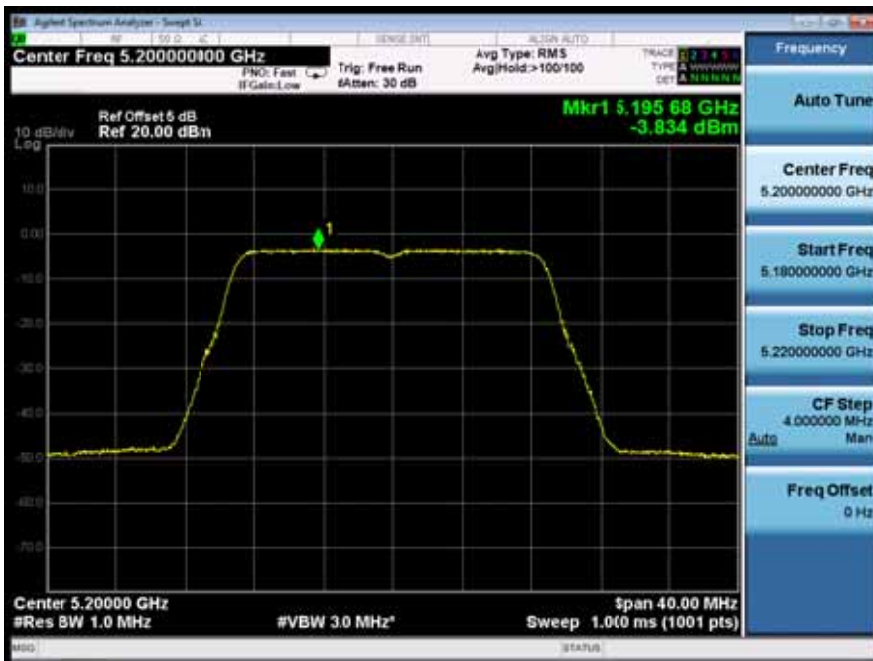


Power Spectral Density	UNII Band I
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5240
Ant0	

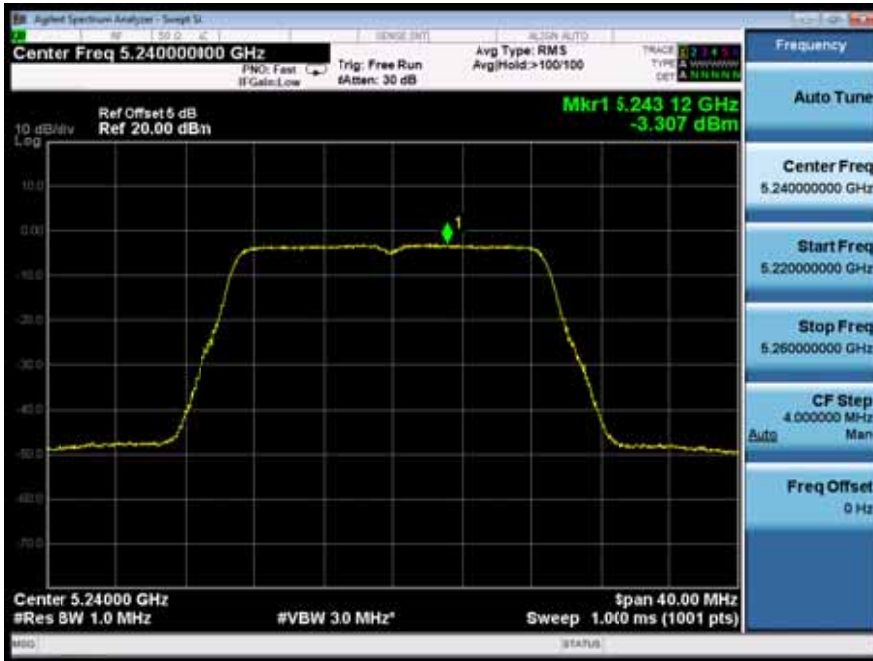

Ant1

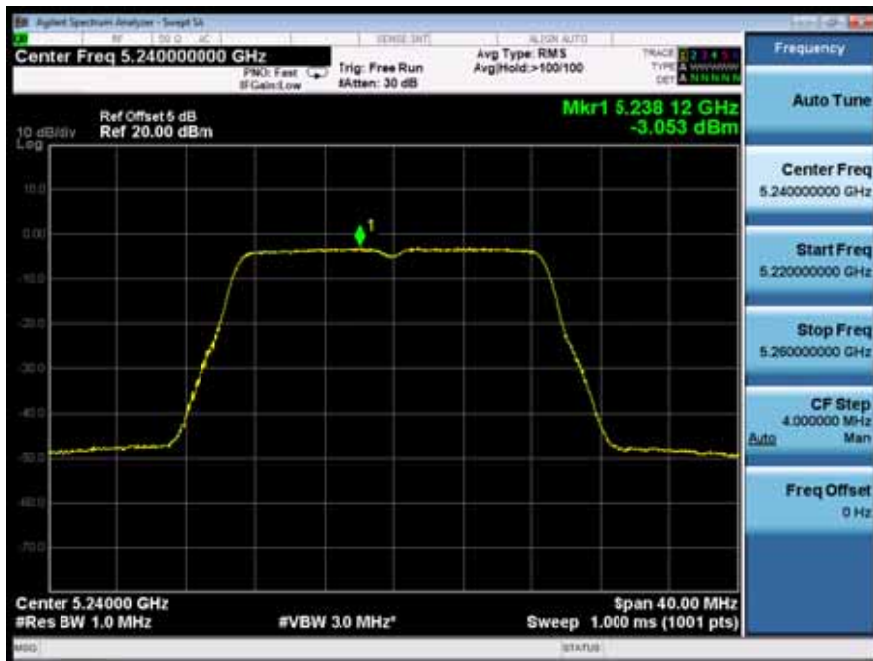

Power Spectral Density	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5745
Ant0	

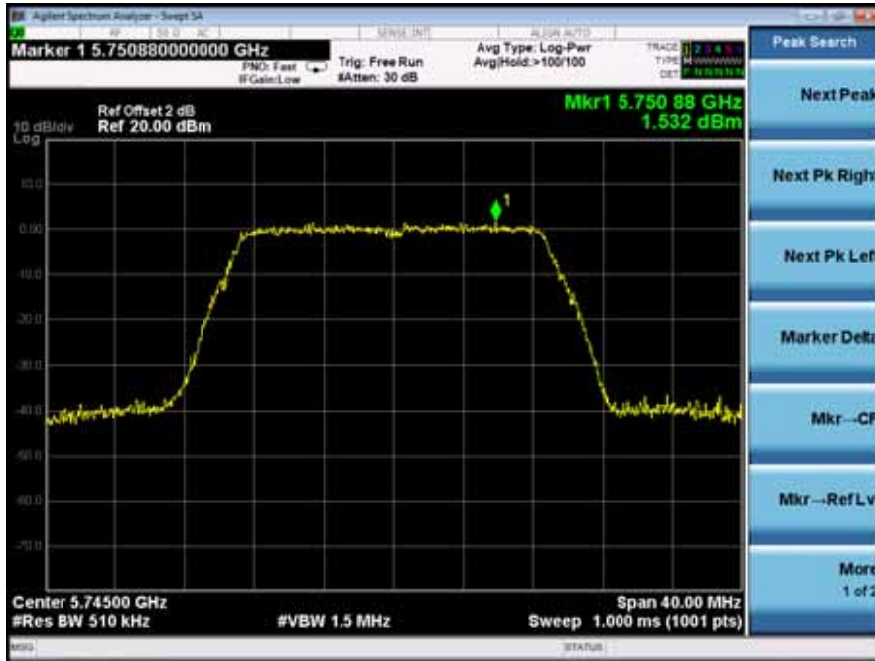


Ant1



Power Spectral Density	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5785
Ant0	



Ant1

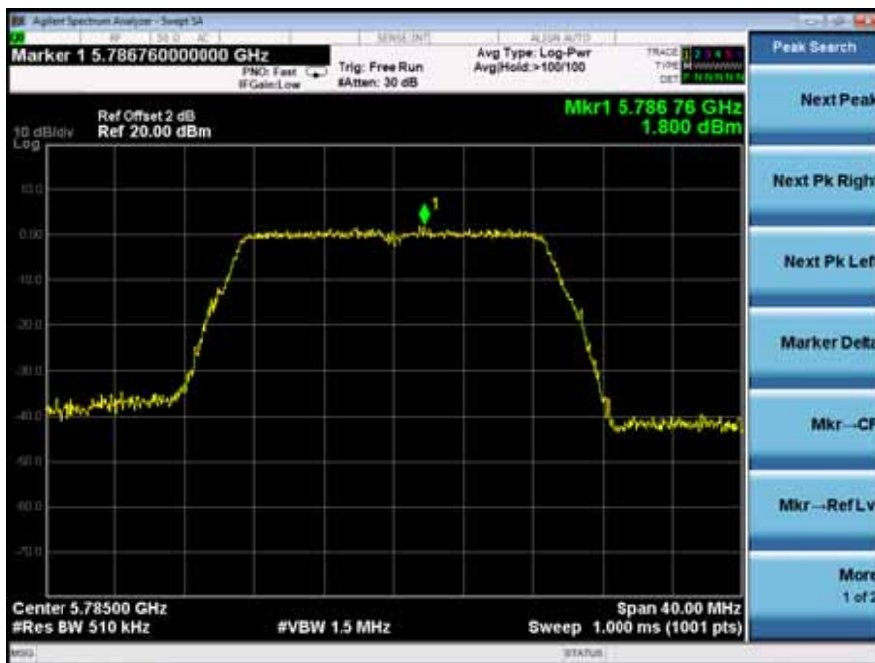


Power Spectral Density	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5825
Ant0	




Ant1




Power Spectral Density	UNII Band I
Test Model 802.11n(VHT40) mode	Frequency(MHz) 5190
Ant0	

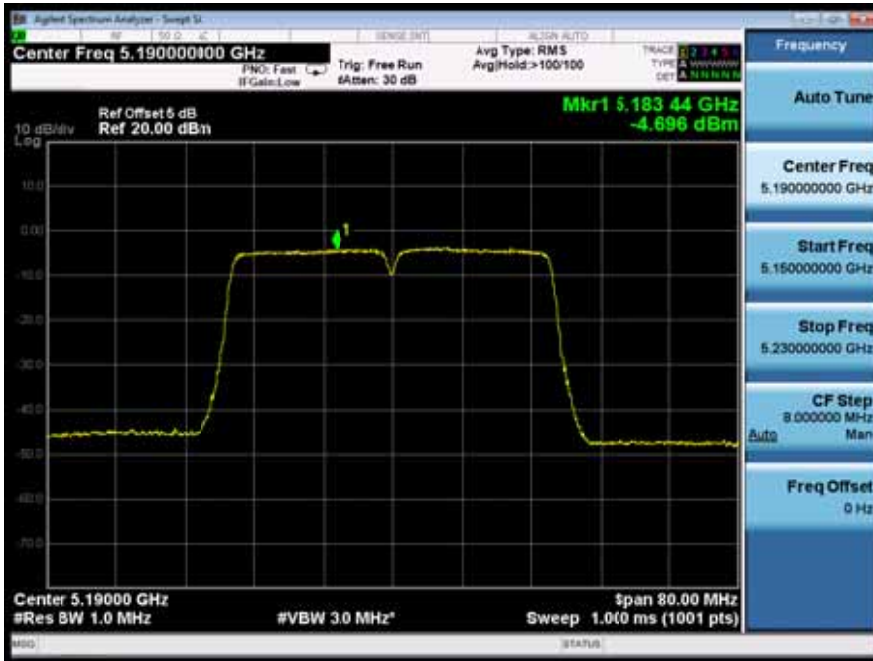

Ant1

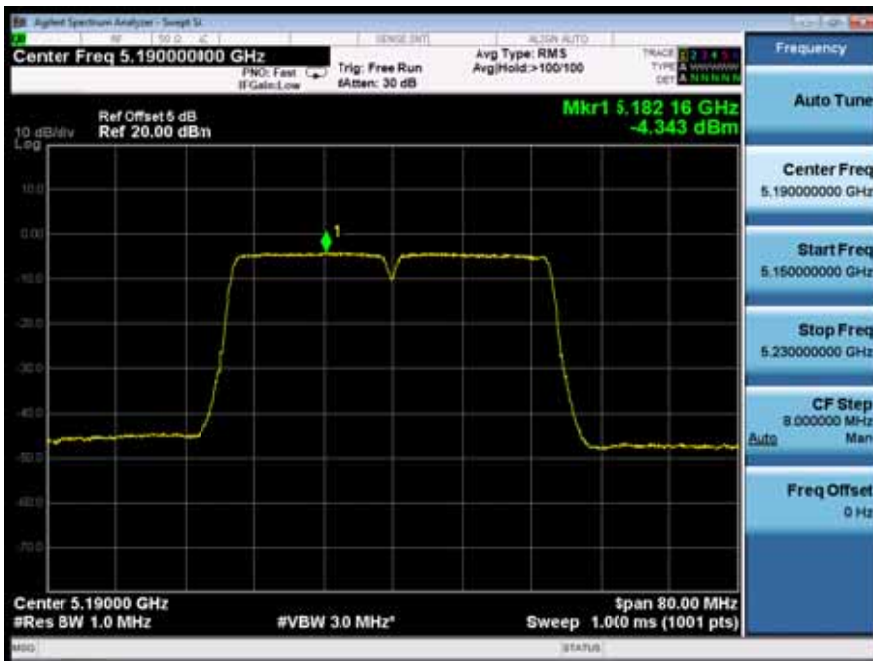


Power Spectral Density	UNII Band I
Test Model 802.11n(VHT40) mode	Frequency(MHz) 5230
Ant0	

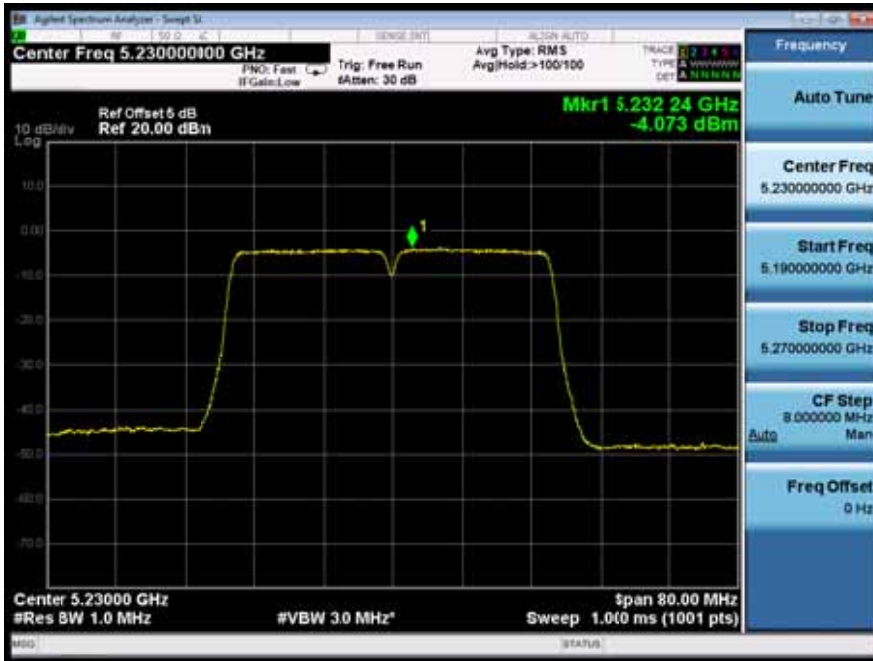


Ant1




Power Spectral Density UNII Band III
Test Model 802.11n(VHT40) mode Frequency(MHz) 5755
Ant0

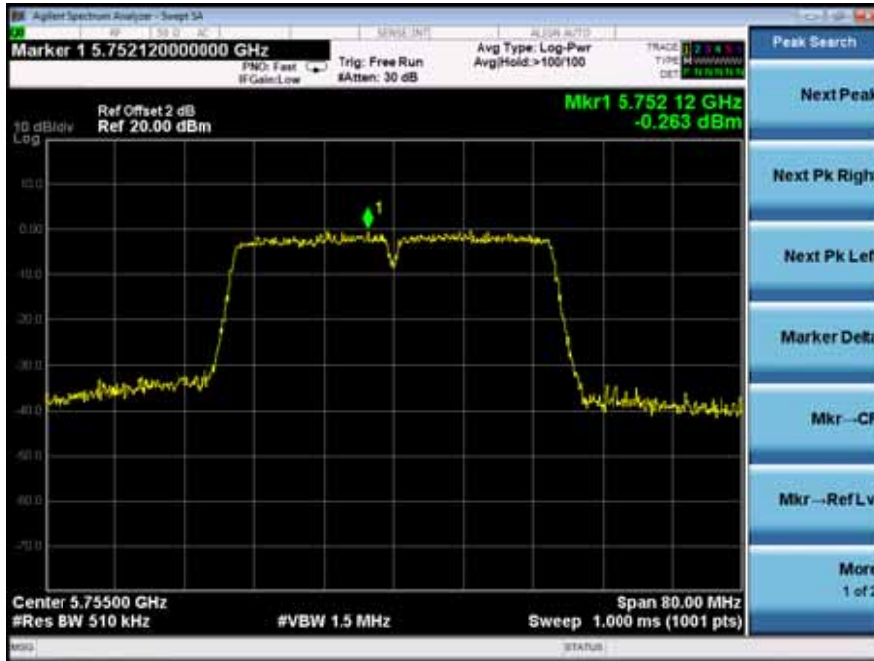


Ant1

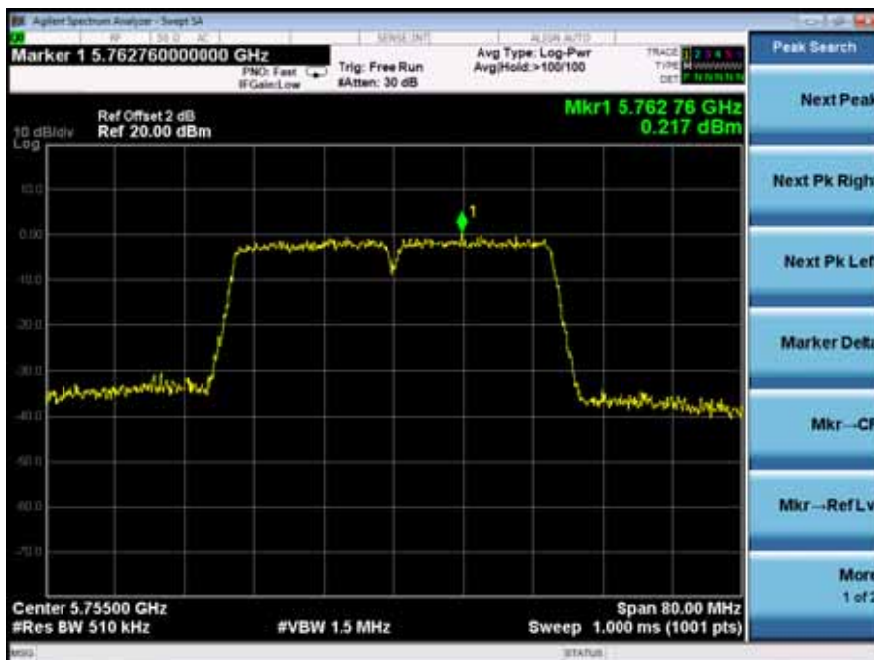

Power Spectral Density	UNII Band III
Test Model 802.11n(VHT40) mode	Frequency(MHz) 5795
Ant0	

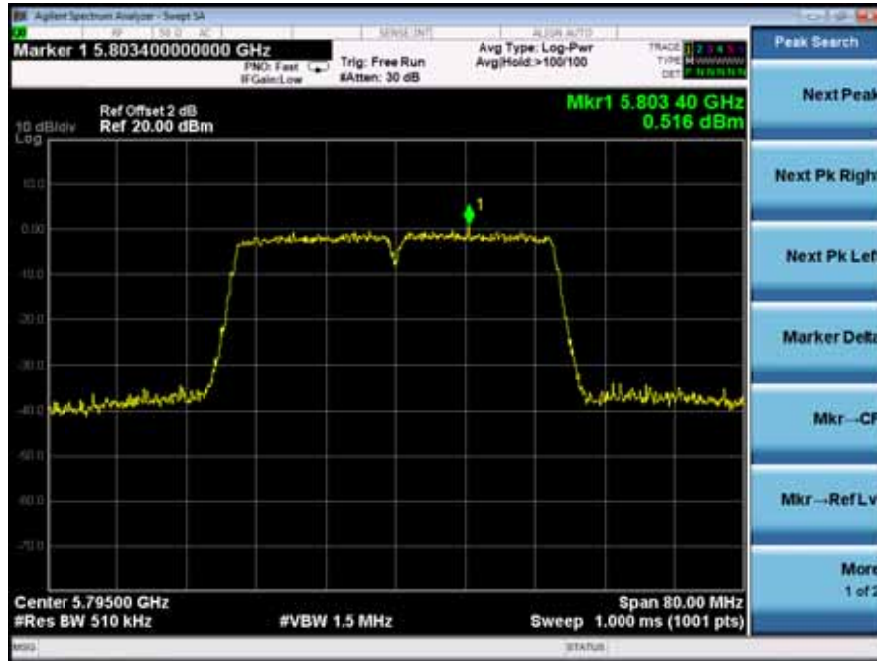

Ant1

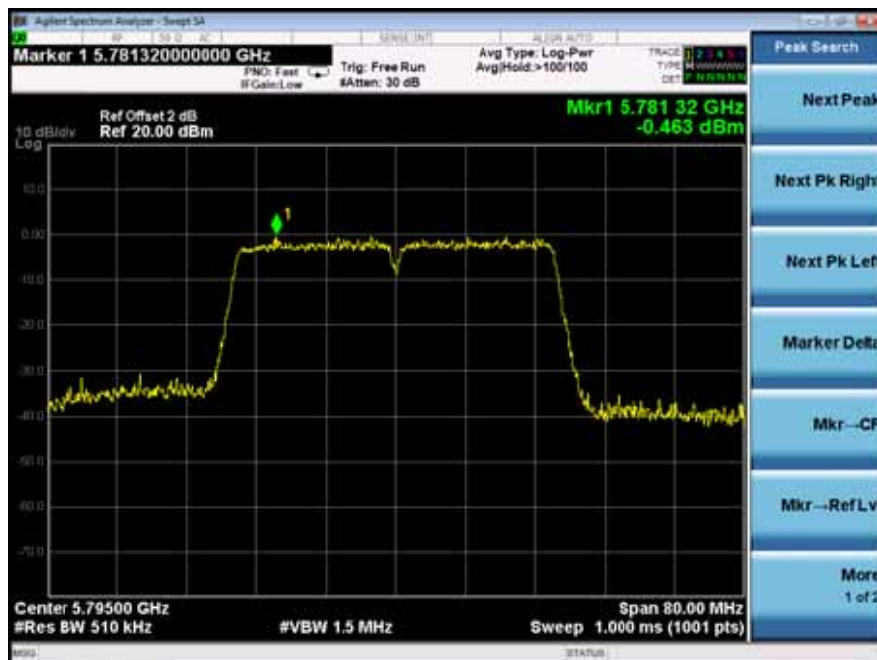

8.4 FREQUENCY STABILITY

8.4.1 Applicable Standard

According to FCC Part 15.407(g)
ANSI C63.10 Section 6.8

8.4.2 Conformance Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

8.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.4.4 Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 10 kHz.

Set the video bandwidth (VBW) =30 kHz.

Set Span= Entire absence of modulation emissions bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

Beginning at each temperature level specified in user manual , the frequency shall be measured within one minute after application of primary power to the transmitter and at intervals of no more than one minute thereafter until ten minutes have elapsed or until sufficient measurements are obtained to indicate clearly that the frequency has stabilized within the applicable tolerance, whichever time period is greater. During each test, the ambient temperature shall not be allowed to rise more than 10° centigrade above the respective beginning ambient temperature level

Measure and record the results in the test report.

8.4.5 Test Results

The test data for Antenna A

802.11a mode		5180		
Temperature :	--	Test Date :	August 22, 2017	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5179.969235	-30.765	Pass
	-10	5179.969243	-30.757	Pass
	0	5179.969487	-30.513	Pass
	10	5179.969591	-30.409	Pass
	20	5179.969583	-30.417	Pass
	30	5179.969344	-30.656	Pass
	40	5179.970044	-29.956	Pass
50	5179.969633	-30.367	Pass	
85% Vnom	20	5179.969582	-30.418	Pass
115% Vnom	20	5179.969344	-30.656	Pass

802.11a mode		5200		
Temperature :	--	Test Date :	August 22, 2017	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5199.961119	-38.881	Pass
	-10	5199.961479	-38.521	Pass
	0	5199.961640	-38.360	Pass
	10	5199.961597	-38.403	Pass
	20	5200.038794	38.794	Pass
	30	5199.961582	-38.418	Pass
	40	5199.961911	-38.089	Pass
50	5199.961773	-38.227	Pass	
85% Vnom	20	5199.961144	-38.856	Pass
115% Vnom	20	5199.961106	-38.894	Pass

802.11a mode		5240		
Temperature :	--	Test Date :	August 22, 2017	
Humidity :	65 %	Test By:	King Kong	

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5239.977966	-22.034	Pass
	-10	5239.977961	-22.039	Pass
	0	5239.977664	-22.336	Pass
	10	5239.977910	-22.090	Pass
	20	5239.977704	-22.296	Pass
	30	5239.977654	-22.346	Pass
	40	5239.977344	-22.656	Pass
50	5239.978044	-21.956	Pass	
85% Vnom	20	5239.977768	-22.232	Pass
115% Vnom	20	5239.977664	-22.336	Pass

802.11a mode 5745
 Temperature : -- Test Date : August 22, 2017
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5744.986270	-13.730	Pass
	-10	5744.986217	-13.783	Pass
	0	5744.986598	-13.402	Pass
	10	5744.986147	-13.853	Pass
	20	5744.986343	-13.657	Pass
	30	5744.986217	-13.783	Pass
	40	5744.986106	-13.894	Pass
50	5744.986577	-13.423	Pass	
85% Vnom	20	5744.986646	-13.354	Pass
115% Vnom	20	5744.986108	-13.892	Pass

802.11a mode 5785
 Temperature : -- Test Date : August 22, 2017
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5784.991221	-8.779	Pass
	-10	5784.991913	-8.087	Pass
	0	5784.991801	-8.199	Pass
	10	5784.991344	-8.656	Pass
	20	5784.991444	-8.556	Pass
	30	5784.991913	-8.087	Pass
	40	5784.991377	-8.623	Pass
50	5784.991906	-8.094	Pass	
85% Vnom	20	5784.991933	-8.067	Pass
115% Vnom	20	5784.991909	-8.091	Pass

802.11a mode 5825
 Temperature : -- Test Date : August 22, 2017
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5824.982654	-17.346	Pass
	-10	5824.982517	-17.483	Pass
	0	5824.982907	-17.093	Pass
	10	5824.982520	-17.480	Pass
	20	5824.982817	-17.183	Pass
	30	5824.982578	-17.422	Pass
	40	5824.982524	-17.476	Pass
50	5824.982960	-17.040	Pass	
85% Vnom	20	5824.983054	-16.946	Pass
115% Vnom	20	5824.983014	-16.986	Pass

802.11n(VHT20) mode 5180
 Temperature : -- Test Date : August 22, 2017
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5180.001188	1.188	Pass
	-10	5180.001188	1.188	Pass
	0	5180.001194	1.194	Pass
	10	5180.001216	1.216	Pass
	20	5180.001225	1.225	Pass
	30	5180.001595	1.595	Pass
	40	5180.001634	1.634	Pass
50	5180.001595	1.595	Pass	
85% Vnom	20	5180.001594	1.594	Pass
115% Vnom	20	5180.001651	1.651	Pass

802.11n(VHT20) mode 5200
 Temperature : -- Test Date : August 22, 2017
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5199.976041	-23.959	Pass
	-10	5199.975705	-24.295	Pass
	0	5199.975520	-24.480	Pass
	10	5199.975887	-24.113	Pass
	20	5199.975348	-24.652	Pass
	30	5199.975527	-24.473	Pass
	40	5199.975249	-24.751	Pass
50	5199.975909	-24.091	Pass	
85% Vnom	20	5199.975217	-24.783	Pass
115% Vnom	20	5199.976054	-23.946	Pass

802.11n(VHT20) mode 5240
 Temperature : -- Test Date : August 22, 2017
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5239.982013	-17.987	Pass
	-10	5239.981613	-18.387	Pass
	0	5239.981619	-18.381	Pass
	10	5239.981617	-18.383	Pass
	20	5239.981848	-18.152	Pass
	30	5239.981559	-18.441	Pass
	40	5239.981521	-18.479	Pass
50	5239.981617	-18.383	Pass	
85% Vnom	20	5239.981924	-18.076	Pass
115% Vnom	20	5239.981528	-18.472	Pass

802.11n(VHT20) mode	5745
Temperature : --	Test Date : August 22, 2017
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5744.980717	-19.283	Pass
	-10	5744.980924	-19.076	Pass
	0	5744.980910	-19.090	Pass
	10	5744.980546	-19.454	Pass
	20	5744.980913	-19.087	Pass
	30	5744.980611	-19.389	Pass
	40	5744.980580	-19.420	Pass
	50	5744.980553	-19.447	Pass
85% Vnom	20	5744.980477	-19.523	Pass
115% Vnom	20	5744.980504	-19.496	Pass

802.11n(VHT20) mode	5785
Temperature : --	Test Date : August 22, 2017
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5784.988831	-11.169	Pass
	-10	5784.988907	-11.093	Pass
	0	5784.988523	-11.477	Pass
	10	5784.988508	-11.492	Pass
	20	5784.988487	-11.513	Pass
	30	5784.988527	-11.473	Pass
	40	5784.988507	-11.493	Pass
	50	5784.988527	-11.473	Pass
85% Vnom	20	5784.988226	-11.774	Pass
115% Vnom	20	5784.988555	-11.445	Pass

802.11n(VHT20) mode	5825
Temperature : --	Test Date : August 22, 2017
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5824.991932	-8.068	Pass
	-10	5824.991553	-8.447	Pass
	0	5824.991923	-8.077	Pass
	10	5824.991220	-8.780	Pass
	20	5824.991543	-8.457	Pass
	30	5824.991524	-8.476	Pass
	40	5824.991113	-8.887	Pass
	50	5824.991487	-8.513	Pass
85% Vnom	20	5824.991613	-8.387	Pass
115% Vnom	20	5824.991913	-8.087	Pass

802.11n(VHT40) mode	5190
Temperature : --	Test Date : August 22, 2017
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5189.975163	-24.837	Pass
	-10	5189.976046	-23.954	Pass
	0	5189.976038	-23.962	Pass
	10	5189.976000	-24.000	Pass
	20	5189.975429	-24.571	Pass
	30	5189.975709	-24.291	Pass
	40	5189.975754	-24.246	Pass
50	5189.975704	-24.296	Pass	
85% Vnom	20	5189.975907	-24.093	Pass
115% Vnom	20	5189.975577	-24.423	Pass

802.11n(VHT40) mode	5230
Temperature : --	Test Date : August 22, 2017
Humidity : 65 %	Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5229.972420	-27.580	Pass
	-10	5229.972763	-27.237	Pass
	0	5229.972668	-27.332	Pass
	10	5229.972663	-27.337	Pass
	20	5229.972833	-27.167	Pass
	30	5229.972949	-27.051	Pass
	40	5229.972444	-27.556	Pass
50	5229.972506	-27.494	Pass	
85% Vnom	20	5229.972924	-27.076	Pass
115% Vnom	20	5229.972910	-27.090	Pass

802.11n(VHT40) mode 5755
 Temperature : -- Test Date : August 22, 2017
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5754.994800	-5.200	Pass
	-10	5754.994900	-5.100	Pass
	0	5754.994909	-5.091	Pass
	10	5754.994704	-5.296	Pass
	20	5754.994916	-5.084	Pass
	30	5754.994580	-5.420	Pass
	40	5754.994944	-5.056	Pass
50	5754.994834	-5.166	Pass	
85% Vnom	20	5754.994944	-5.056	Pass
115% Vnom	20	5754.994919	-5.081	Pass

802.11n(VHT40) mode 5795
 Temperature : -- Test Date : August 22, 2017
 Humidity : 65 % Test By: King Kong

Voltage(V)	Temp()	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5794.985796	-14.204	Pass
	-10	5794.985800	-14.200	Pass
	0	5794.985712	-14.288	Pass
	10	5794.985911	-14.089	Pass
	20	5794.985921	-14.079	Pass
	30	5794.986013	-13.987	Pass
	40	5794.985524	-14.476	Pass
50	5794.985488	-14.512	Pass	
85% Vnom	20	5794.985964	-14.036	Pass
115% Vnom	20	5794.986044	-13.956	Pass

8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.407 (b)

According to 789033 D02 Section II(G)

8.5.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.5.4 Test Procedure

■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for $f < 1$ GHz(30MHz to 1GHz), 200Hz for $f < 150$ KHz(9KHz to 150KHz), 9KHz for < 30 MHz (150KHz to 30KHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW \geq 3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle \geq 98 percent, set VBW \leq RBW/100 (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is $<$ 98 percent, set VBW \geq $1/T$, where T is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

■ Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

8.5.5 Test Results

■ For Undesirable radiated Spurious Emission in UNII Band I

The voltage 120V & 240V and the modes 802.11a/n has been tested and the worst result (801.11n(VHT20)) recorded as below:

● Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28	Test Date :	September 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5180

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7359.94	V	54.04	-41.19	-27	-14.19
10048.35	V	59.02	-36.21	-27	-9.21
13428.93	V	59.24	-35.99	-27	-8.99
7223.85	H	54.81	-40.42	-27	-13.42
10592.38	H	59.55	-35.68	-27	-8.68
13615.86	H	60.34	-34.89	-27	-7.89

Temperature :	28	Test Date :	September 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5220

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7358.57	V	53.35	-41.88	-27	-14.88
8390.35	V	53.99	-41.24	-27	-14.24
13429.98	V	58.32	-36.91	-27	-9.91
7222.51	H	54.18	-41.05	-27	-14.05
10593.44	H	58.7	-36.53	-27	-9.53
13614.51	H	57.17	-38.06	-27	-11.06

Temperature :	28	Test Date :	September 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5240

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7357.05	V	52.83	-42.4	-27	-15.4
10050.4	V	58.07	-37.16	-27	-10.16
13428.47	V	59.04	-36.19	-27	-9.19
7221.05	H	54.03	-41.2	-27	-14.2
10594.42	H	58.65	-36.58	-27	-9.58
13613.07	H	58.57	-36.66	-27	-9.66

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) $EIRP[dBm] = E[dBuV/m] + 20 \log(d[meters]) - 104.77$
 d is the measurement distance in 3 meters

- Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Temperature :	28	Test Date :	September 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5180


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5148.10	H	57.73	-10.5	-27	Pass
5144.55	V	52.95	-15.28	-27	Pass

Temperature :	28	Test Date :	September 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	801.11n(VHT20)	Frequency(MHz):	5240


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5368.50	V	47.46	-20.77	-27	Pass
5356.50	H	47.56	-20.67	-27	Pass

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters


UNII Band I	
Test Model	Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)
	<input type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(HT20) <input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> 5180 <input type="checkbox"/> 5200 <input type="checkbox"/> 5240 Ant.Pol H

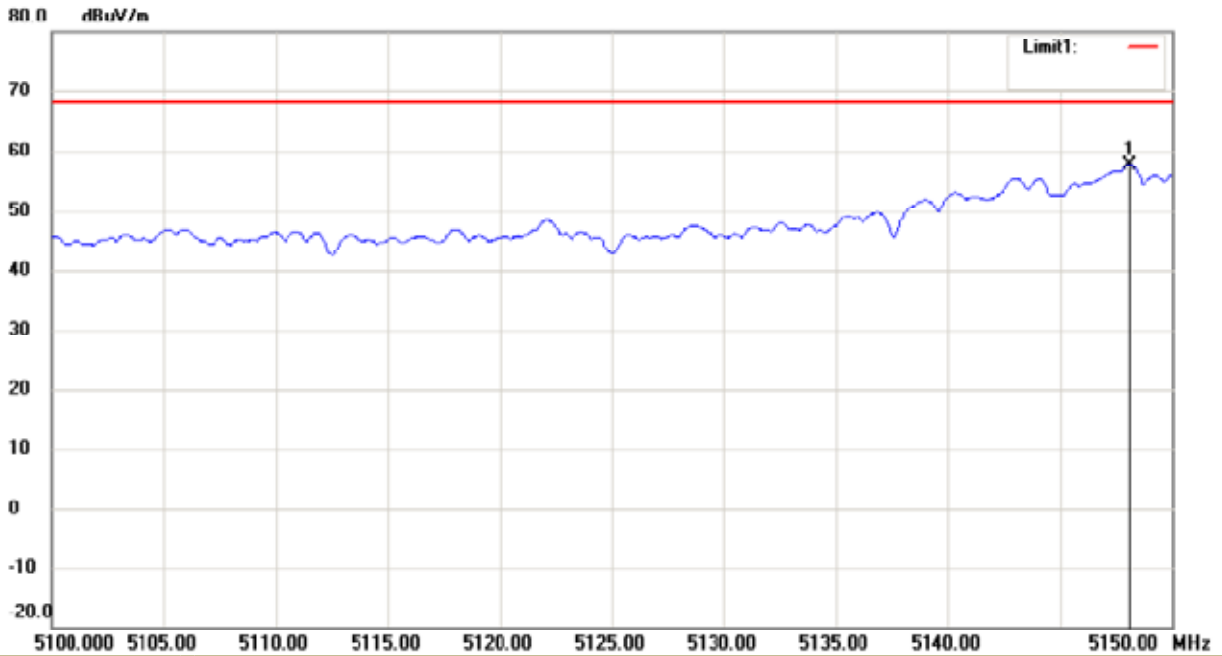


UNII Band I	
Test Model	Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)
	<input type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(HT20) <input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> 5180 <input type="checkbox"/> 5200 <input type="checkbox"/> 5240 Ant.Pol V

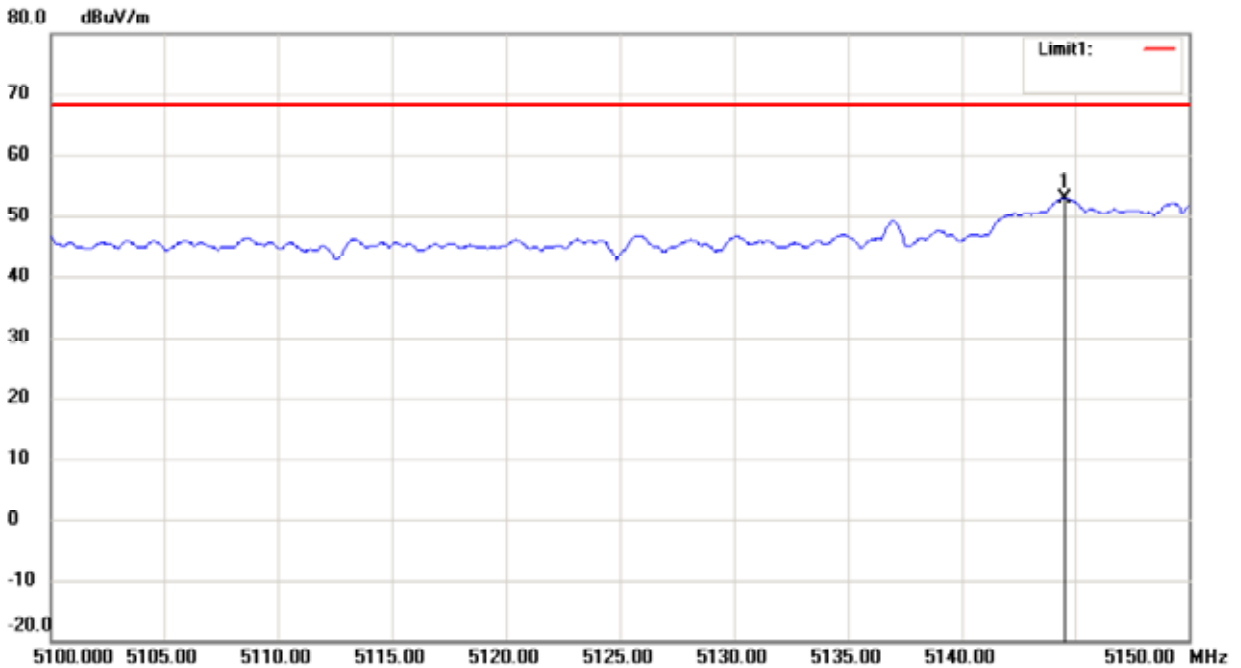

UNII Band I	
Test Model	Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)
	<input type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(HT20) <input type="checkbox"/> 802.11n(HT40)
	<input type="checkbox"/> 5180 <input type="checkbox"/> 5200 <input checked="" type="checkbox"/> 5240 Ant.Pol H

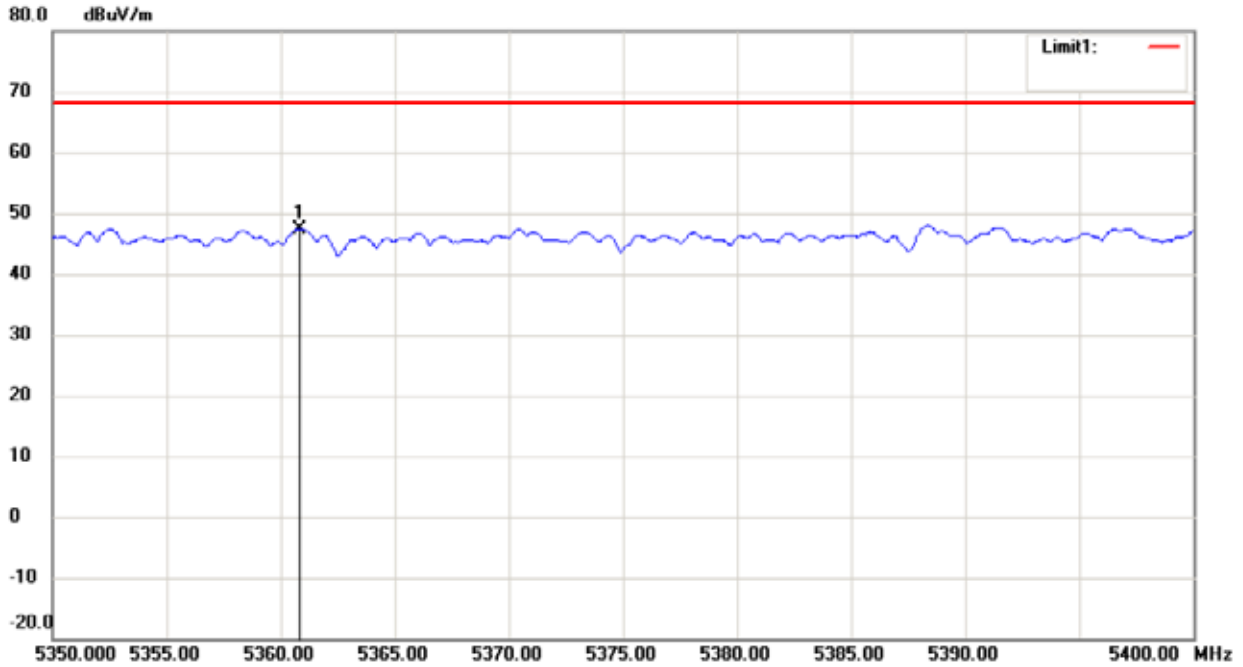

UNII Band I	
Test Model	Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)
	<input type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11n(HT20) <input type="checkbox"/> 802.11n(HT40)
	<input type="checkbox"/> 5180 <input type="checkbox"/> 5200 <input checked="" type="checkbox"/> 5240 Ant.Pol V

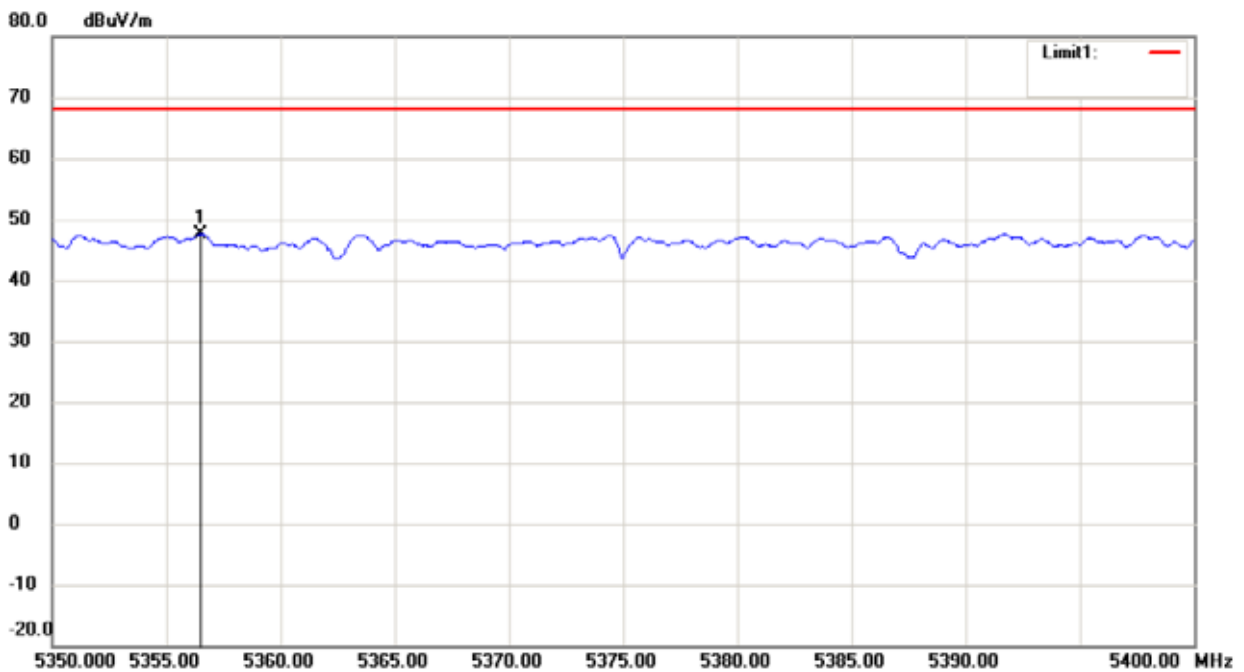

- For Undesirable radiated Spurious Emission in UNII Band III

All the modes 802.11a/n/ac has been tested and the worst result 802.11(HT20) recorded as below:

- Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28	Test Date :	September 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11(HT20)	Frequency(MHz):	5745

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7412.31	V	46.55	-48.68	-27.00	-21.68
10108.00	V	47.83	-47.40	-27.00	-20.40
13483.73	V	60.2	-35.03	-27.00	-8.03
7273.64	H	54.99	-40.24	-27.00	-13.24
10652.08	H	59.3	-35.93	-27.00	-8.93
13668.09	H	62.42	-32.81	-27.00	-5.81

Temperature :	28	Test Date :	September 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11(HT20)	Frequency(MHz):	5785

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7410.96	V	46.55	-48.68	-27.00	-21.68
10106.62	V	47.83	-47.40	-27.00	-20.40
13484.8	V	60.20	-35.03	-27.00	-8.03
7274.74	H	47.21	-48.02	-27.00	-21.02
10650.65	H	51.25	-43.98	-27.00	-16.98
13669.07	H	54.08	-41.15	-27.00	-14.15

Temperature :	28	Test Date :	September 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11(HT20)	Frequency(MHz):	5825

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7412.03	V	46.55	-48.68	-27.00	-21.68
10105.25	V	47.83	-47.40	-27.00	-20.40
13485.84	V	60.20	-35.03	-27.00	-8.03
7275.79	H	46.94	-48.29	-27.00	-21.29
10649.31	H	50.62	-44.61	-27.00	-17.61
13670.13	H	53.23	-42.00	-27.00	-15.00

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters

● Undesirable radiated Spurious Emission in band edge

Temperature :	28	Test Date :	September 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	5745


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5718.00	H	62.91	-32.32	-17	PASS
5717.75	V	60.34	-34.89	-17	PASS

Temperature :	28	Test Date :	September 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	5825


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5862.25	H	49.70	-18.53	-17	PASS
5869.25	V	49.20	-19.03	-17	PASS

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters


UNII Band III			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	<input type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> 5745		Ant.Pol: H

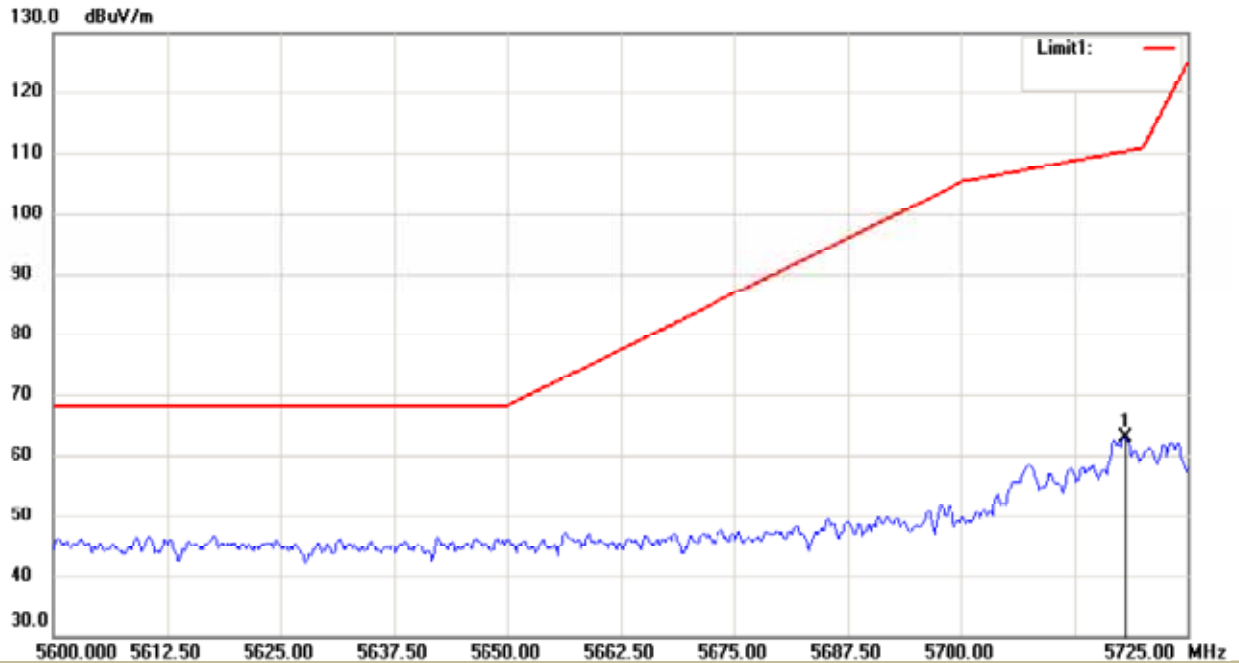


UNII Band III			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	<input type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> 5745		Ant.Pol: V

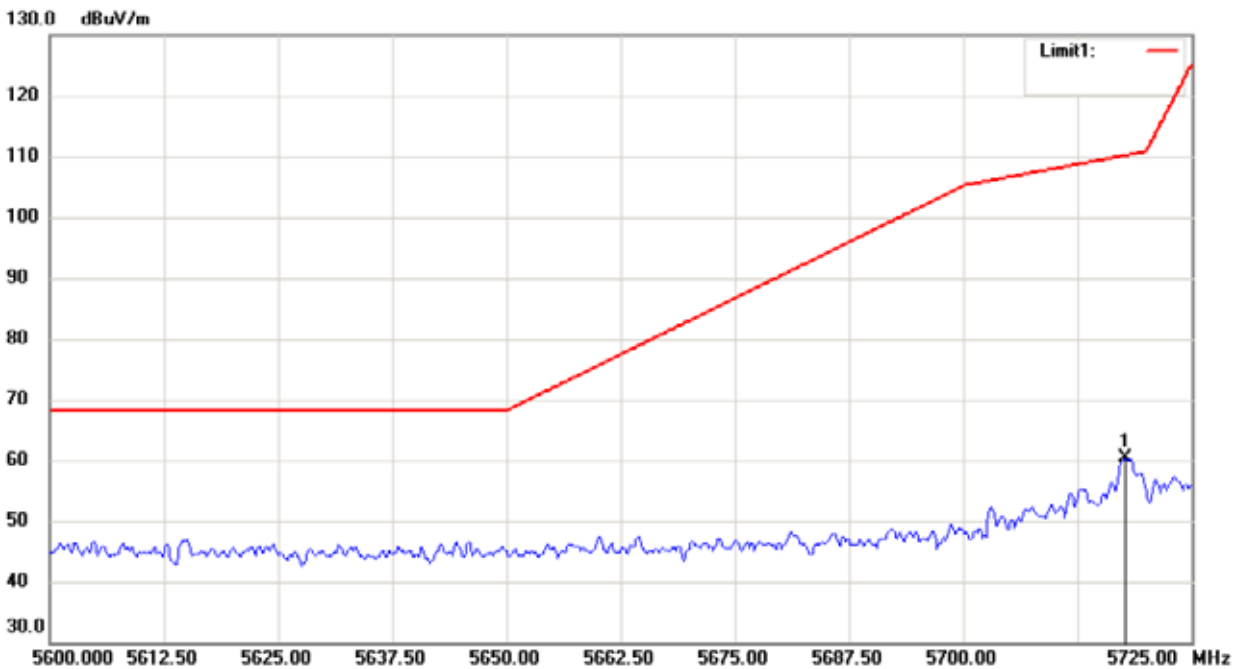


UNII Band III			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	<input type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
		<input checked="" type="checkbox"/> 5825	Ant.Pol: H

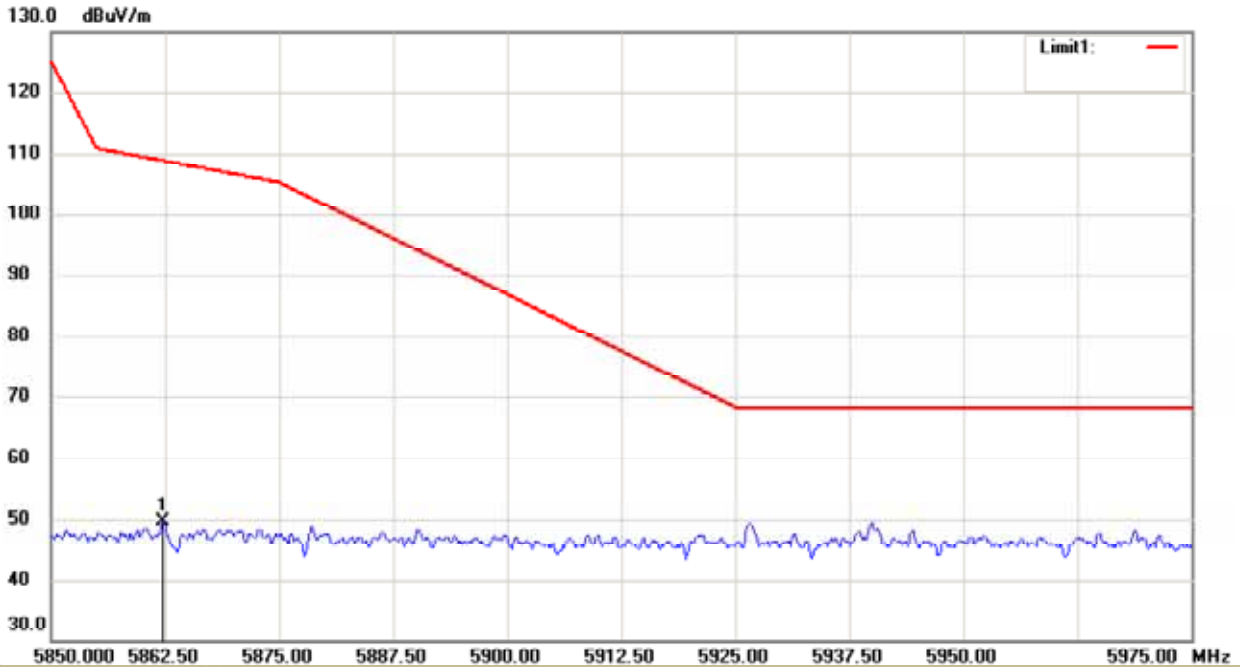

UNII Band III			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	<input type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
		<input checked="" type="checkbox"/> 5825	Ant.Pol: V

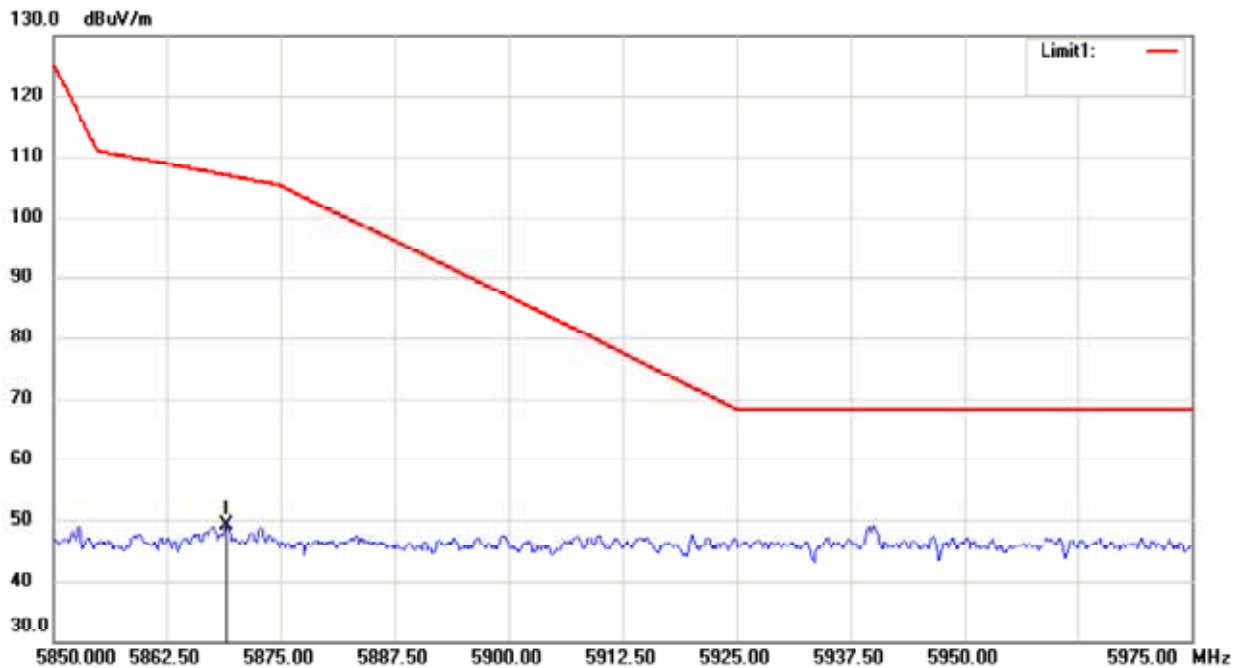

● Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

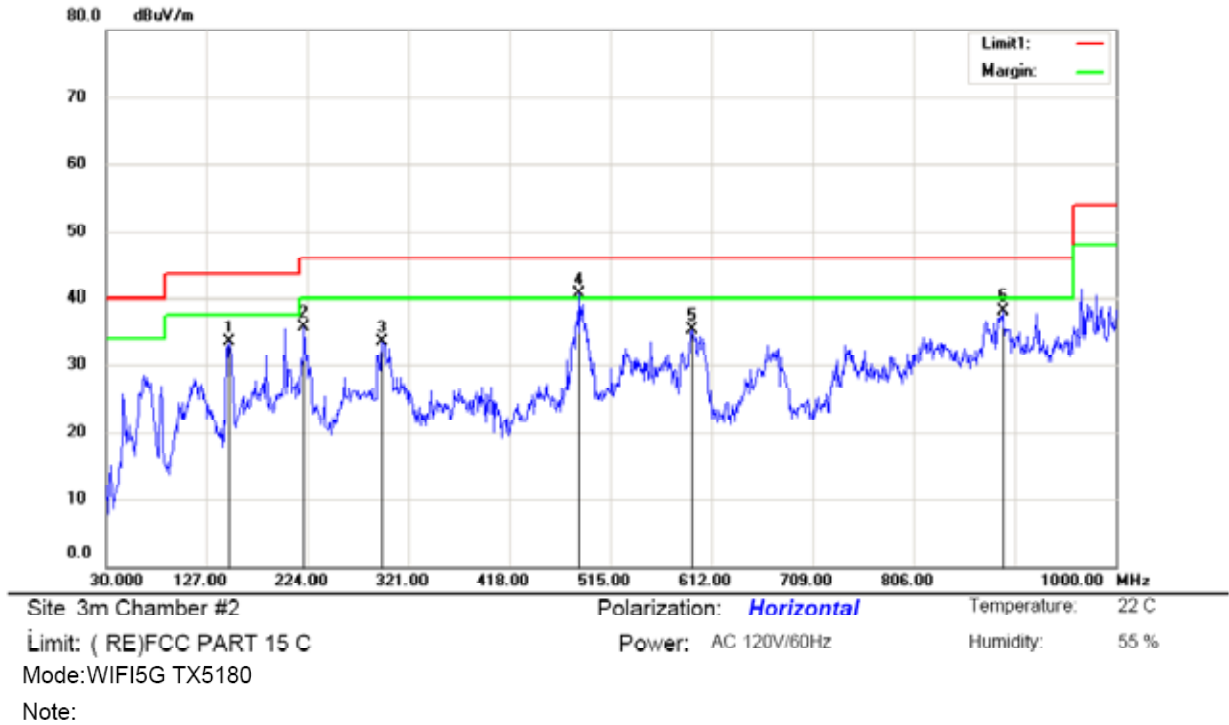

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		148.3400	52.26	-18.79	33.47	43.50	-10.03	QP		
2		221.0900	50.15	-14.35	35.80	46.00	-10.20	QP		
3		295.7800	45.59	-12.04	33.55	46.00	-12.45	QP		
4	*	483.9600	48.35	-7.87	40.48	46.00	-5.52	QP		
5		592.6000	40.73	-5.40	35.33	46.00	-10.67	QP		
6		891.3600	38.84	-0.67	38.17	46.00	-7.83	QP		

*:Maximum data x:Over limit !:over margin

Operator: Wang



Site 3m Chamber #2
 Limit: (RE)FCC PART 15 C
 Mode:WIFI5G TX5180
 Note:

Polarization: *Vertical* Temperature: 22 C
 Power: AC 120V/60Hz Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	47.4600	48.46	-13.39	35.07	40.00	-4.93			QP
2	*	83.3500	54.27	-19.06	35.21	40.00	-4.79			QP
3		149.3100	48.48	-18.79	29.69	43.50	-13.81			QP
4		519.8500	37.18	-7.04	30.14	46.00	-15.86			QP
5		594.5400	39.71	-5.37	34.34	46.00	-11.66			QP
6		888.4500	37.45	-0.70	36.75	46.00	-9.25			QP

*:Maximum data x:Over limit !:over margin

Operator: Wang




Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode: WIFI5G TX5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		148.3400	55.64	-18.79	36.85	43.50	-6.65	QP		
2		202.6600	51.82	-15.74	36.08	43.50	-7.42	QP		
3		221.0900	49.74	-14.35	35.39	46.00	-10.61	QP		
4		487.8400	43.18	-7.79	35.39	46.00	-10.61	QP		
5		594.5400	40.17	-5.37	34.80	46.00	-11.20	QP		
6	*	891.3600	41.69	-0.67	41.02	46.00	-4.98	QP		

*:Maximum data x:Over limit !:over margin

Operator: Wang

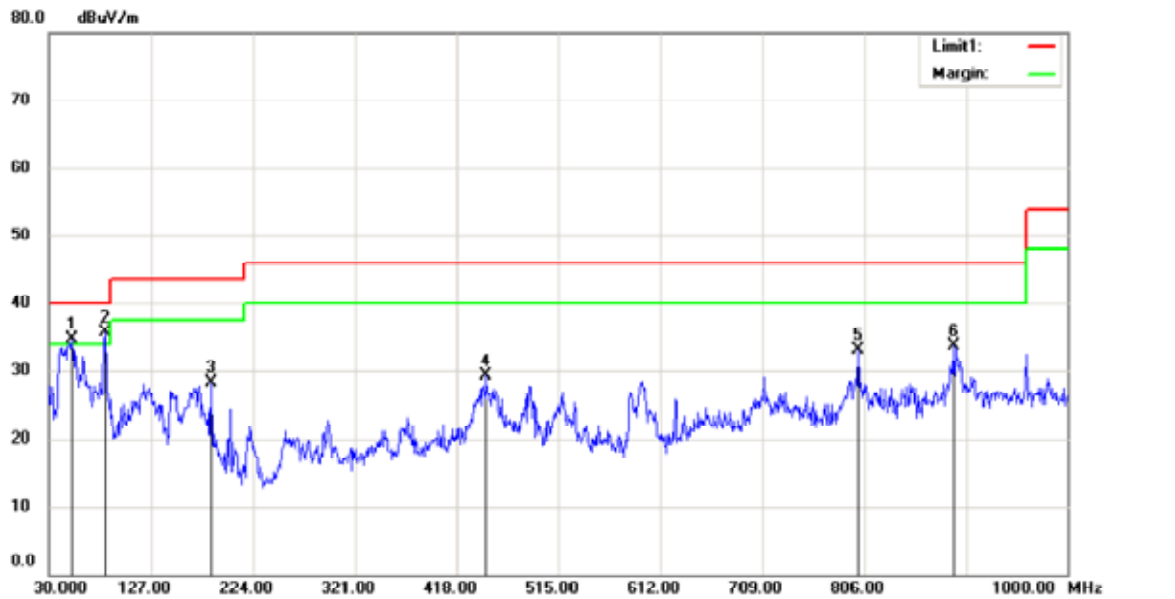


Site 3m Chamber #2 Polarization: *Vertical* Temperature: 22 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode:WIFI5G TX5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	51.3400	48.47	-13.84	34.63	40.00	-5.37	QP		
2	*	83.3500	54.71	-19.06	35.65	40.00	-4.35	QP		
3		184.2300	45.04	-16.80	28.24	43.50	-15.26	QP		
4		446.1300	38.10	-8.73	29.37	46.00	-16.63	QP		
5		800.1800	35.03	-1.96	33.07	46.00	-12.93	QP		
6		891.3600	34.47	-0.67	33.80	46.00	-12.20	QP		

*:Maximum data x:Over limit !:over margin

Operator: Wang

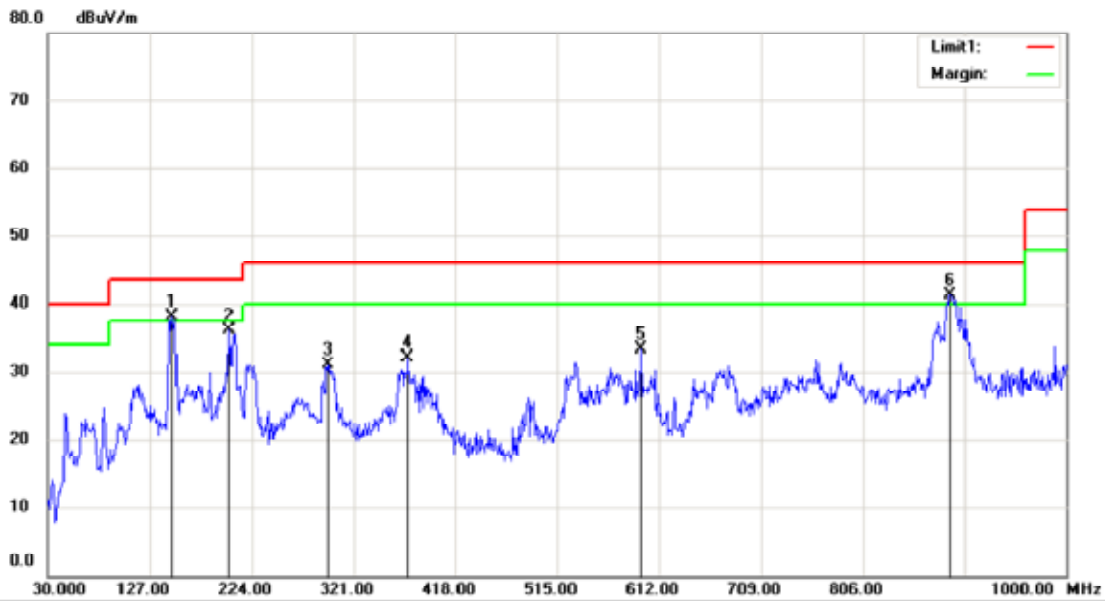

Site: 3m Chamber #2
 Limit: (RE)FCC PART 15 C
 Mode: WIFI5G TX5240
 Note:

Polarization: *Horizontal*
 Power: AC 120V/60Hz
 Temperature: 22 C
 Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	!	148.3400	56.87	-18.79	38.08	43.50	-5.42	QP		
2		202.6600	51.83	-15.74	36.09	43.50	-7.41	QP		
3		296.7500	43.05	-12.01	31.04	46.00	-14.96	QP		
4		372.4100	41.82	-9.65	32.17	46.00	-13.83	QP		
5		594.5400	38.63	-5.37	33.26	46.00	-12.74	QP		
6	*	889.4200	41.91	-0.70	41.21	46.00	-4.79	QP		

*:Maximum data x:Over limit !:over margin

Operator: Wang



Site: 3m Chamber #2 Polarization: *Vertical* Temperature: 22 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode: WIFI5G TX5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	47.4600	48.19	-13.39	34.80	40.00	-5.20	QP		
2	*	83.3500	54.18	-19.06	35.12	40.00	-4.88	QP		
3		603.2700	37.56	-5.19	32.37	46.00	-13.63	QP		
4		708.0300	35.75	-3.61	32.14	46.00	-13.86	QP		
5		799.2100	38.99	-1.97	37.02	46.00	-8.98	QP		
6		891.3600	37.67	-0.67	37.00	46.00	-9.00	QP		

^:Maximum data x:Over limit !:over margin

Operator: Wang




Site 3m Chamber #2 Polarization: *Horizontal* Temperature: 22 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode: WIFI5G TX5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	148.3400	56.95	-18.79	38.16	43.50	-5.34			QP
2		206.5400	50.77	-15.51	35.26	43.50	-8.24			QP
3		295.7800	45.67	-12.04	33.63	46.00	-12.37			QP
4		489.7800	40.92	-7.73	33.19	46.00	-12.81			QP
5		799.2100	35.93	-1.97	33.96	46.00	-12.04			QP
6		891.3600	38.58	-0.67	37.91	46.00	-8.09			QP

*:Maximum data x:Over limit !:over margin

Operator: Wang

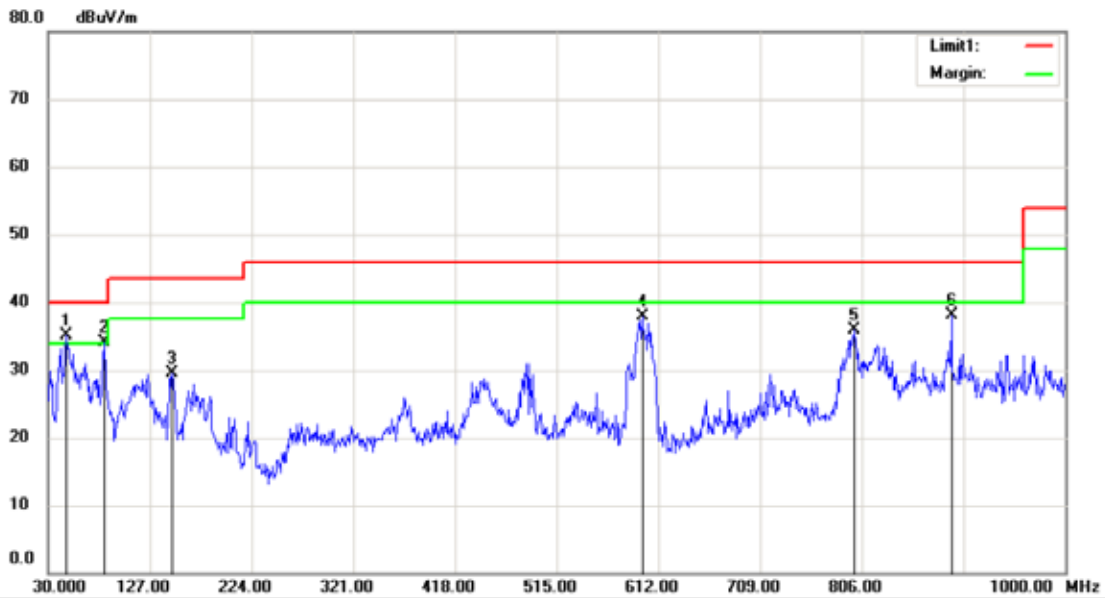


Site 3m Chamber #2 Polarization: *Vertical* Temperature: 22 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode:WIFI5G TX5745
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Table	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	47.4600	48.51	-13.39	35.12	40.00	-4.88	QP		
2	!	83.3500	53.15	-19.06	34.09	40.00	-5.91	QP		
3		143.3400	48.20	-18.79	29.41	43.50	-14.09	QP		
4		596.4800	43.27	-5.32	37.95	46.00	-8.05	QP		
5		798.2400	37.97	-1.99	35.98	46.00	-10.02	QP		
6		891.3600	38.86	-0.67	38.19	46.00	-7.81	QP		

*:Maximum data x:Over limit !:over margin

Operator: Wang

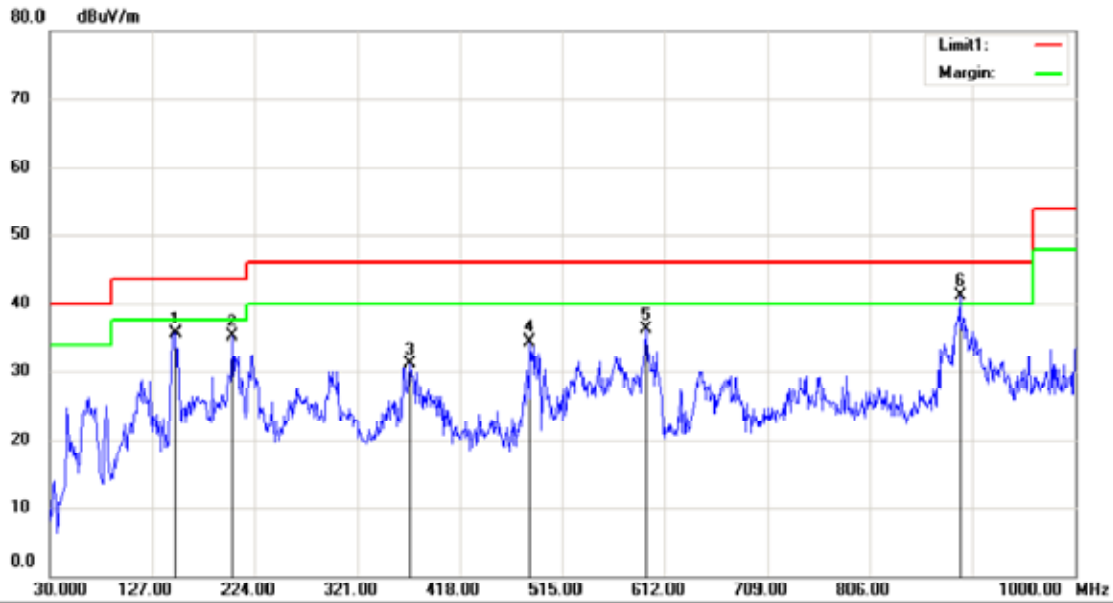

Site: 3m Chamber #2 Polarization: *Horizontal* Temperature: 22 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode:WIFI5G TX5785
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		149.3100	54.38	-18.79	35.59	43.50	-7.91	QP			
2		202.6600	50.82	-15.74	35.08	43.50	-8.42	QP			
3		370.4700	40.72	-9.68	31.04	46.00	-14.96	QP			
4		484.9300	42.15	-7.85	34.30	46.00	-11.70	QP			
5		594.5400	41.56	-5.37	36.19	46.00	-9.81	QP			
6	*	891.3600	41.75	-0.67	41.08	46.00	-4.92	QP			

*:Maximum data x:Over limit !:over margin

Operator: Wang



Site 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode:WIFI5G TX5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	47.4600	49.11	-13.39	35.72	40.00	-4.28	QP		
2		82.3800	52.97	-19.33	33.64	40.00	-6.36	QP		
3		169.6800	45.75	-17.11	28.64	43.50	-14.86	QP		
4		442.2500	36.54	-8.75	27.79	46.00	-18.21	QP		
5		800.1800	35.75	-1.96	33.79	46.00	-12.21	QP		
6		891.3600	34.14	-0.67	33.47	46.00	-12.53	QP		

*:Maximum data x:Over limit !:over margin

Operator: Wang



Site: 3m Chamber #2 Polarization: *Horizontal* Temperature: 22 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode:WIFI5G TX5825
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	!	40.6700	49.23	-14.46	34.77	40.00	-5.23	QP			
2	*	83.3500	55.36	-19.06	36.30	40.00	-3.70	QP			
3		221.0900	48.94	-14.35	34.59	46.00	-11.41	QP			
4		488.8100	46.83	-7.76	39.07	46.00	-6.93	QP			
5		596.4800	41.13	-5.32	35.81	46.00	-10.19	QP			
6		892.3300	39.59	-0.66	38.93	46.00	-7.07	QP			

*:Maximum data x:Over limit !:over margin

Operator: Wang



Site: 3m Chamber #2 Polarization: *Vertical* Temperature: 22 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode:WIFI5G TX5825
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	!	40.6700	49.23	-14.46	34.77	40.00	-5.23	QP		
2	*	83.3500	55.36	-19.06	36.30	40.00	-3.70	QP		
3		148.3400	50.47	-18.79	31.68	43.50	-11.82	QP		
4		223.0300	41.22	-14.30	26.92	46.00	-19.08	QP		
5		596.4800	41.13	-5.32	35.81	46.00	-10.19	QP		
6		892.3300	37.73	-0.66	37.07	46.00	-8.93	QP		

!:Maximum data x:Over limit !:over margin

Operator: Wang

8.6 POWER LINE CONDUCTED EMISSIONS

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.


Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass


We test the EUT at 120V and 240V, and show the worst result as bellow.

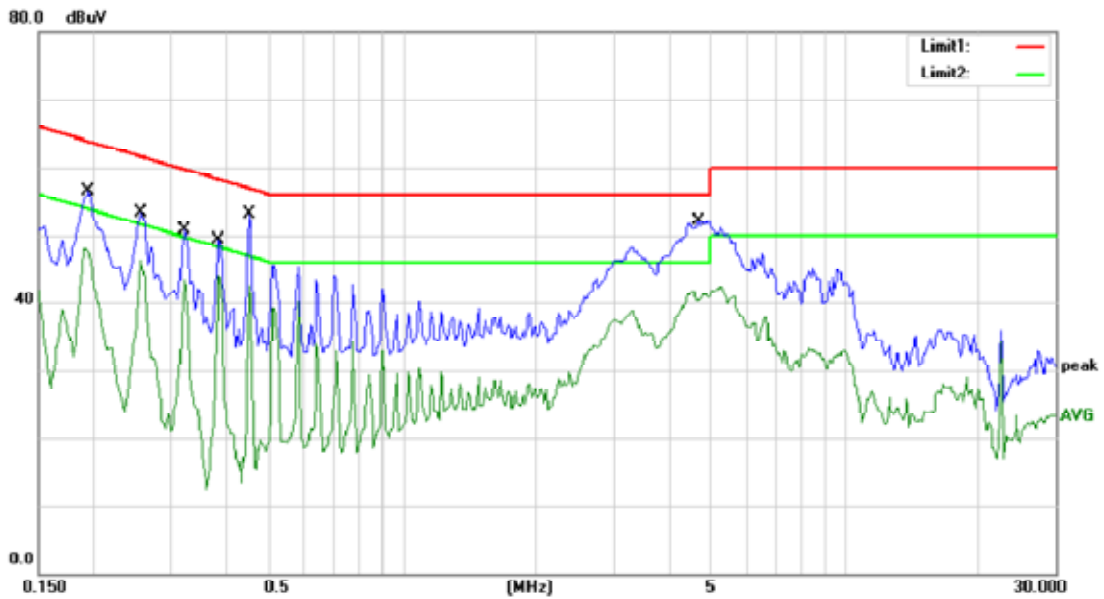

Site Conduction #2 Phase: **L1** Temperature: 22
 Limit: (CE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode: WIFI ON+ BT ON
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1950	56.44	0.00	56.44	63.82	-7.38	QP	
2		0.1950	47.91	0.00	47.91	53.82	-5.91	AVG	
3		0.2550	53.26	0.00	53.26	61.59	-8.33	QP	
4		0.2550	46.30	0.00	46.30	51.59	-5.29	AVG	
5		0.3200	50.72	0.00	50.72	59.71	-8.99	QP	
6		0.3200	43.34	0.00	43.34	49.71	-6.37	AVG	
7		0.3850	49.27	0.00	49.27	58.17	-8.90	QP	
8		0.3850	43.93	0.00	43.93	48.17	-4.24	AVG	
9	*	0.4500	53.14	0.00	53.14	56.88	-3.74	QP	
10		0.4500	42.51	0.00	42.51	46.88	-4.37	AVG	
11		4.6468	52.18	0.00	52.18	56.00	-3.82	QP	
12		4.6468	41.92	0.00	41.92	46.00	-4.08	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: WAP

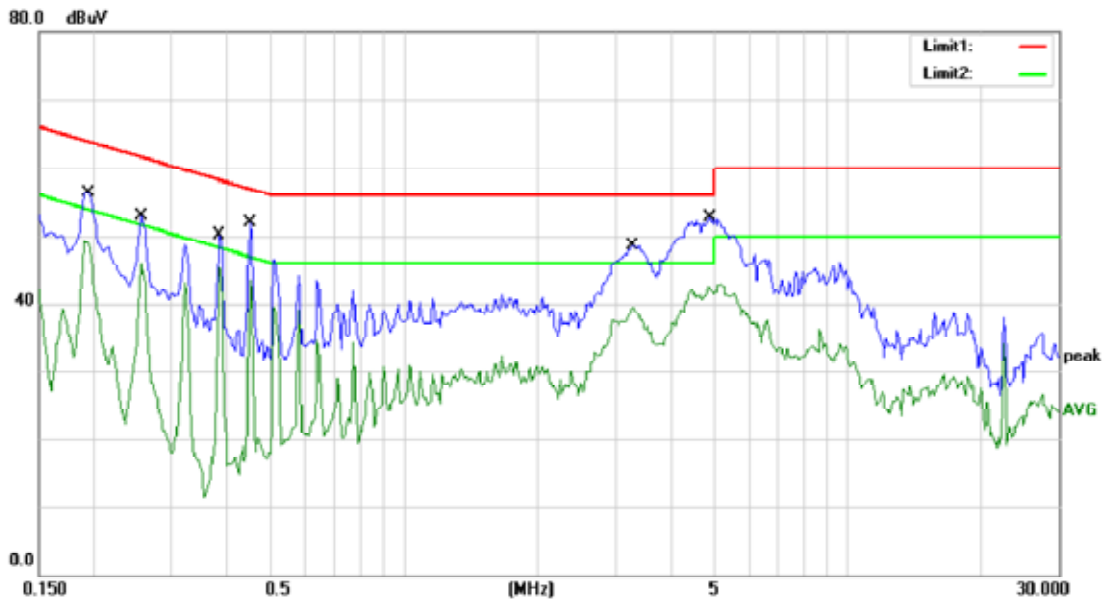

Site Conduction #2 Phase: **N** Temperature: 22
 Limit: (CE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode: WIFI ON+ BT ON
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1950	56.29	0.00	56.29	63.82	-7.53	QP	
2		0.1950	49.26	0.00	49.26	53.82	-4.56	AVG	
3		0.2550	52.88	0.00	52.88	61.59	-8.71	QP	
4		0.2550	45.90	0.00	45.90	51.59	-5.69	AVG	
5		0.3850	50.19	0.00	50.19	58.17	-7.98	QP	
6	*	0.3850	45.31	0.00	45.31	48.17	-2.86	AVG	
7		0.4500	51.91	0.00	51.91	56.88	-4.97	QP	
8		0.4500	43.41	0.00	43.41	46.88	-3.47	AVG	
9		3.2900	48.48	0.00	48.48	56.00	-7.52	QP	
10		3.2900	39.51	0.00	39.51	46.00	-6.49	AVG	
11		4.8996	52.68	0.00	52.68	56.00	-3.32	QP	
12		4.8996	42.86	0.00	42.86	46.00	-3.14	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: WAP

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

This module is suitable for host antennas with gain less than 6dBi. The auxiliary test antenna is metal antenna.