

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
GOOD EVER TRADING LIMITED

True Wireless Stereo

Model No.: CB-TE020, 20249, 2WN-8/1752, AA-TWSEP

FCC ID: 2AM7T-CBTE020

Prepared for : GOOD EVER TRADING LIMITED
Address : Rm.1701, Zhuoyue Building, Fuhua Yi Rd.,
Futian Central Zone, Shenzhen, P.R.China

Prepared by : Shenzhen Accurate Technology Co., Ltd.
Address : 1/F., Building A, Changyuan New Material Port, Science
& Industry Park, Nanshan District, Shenzhen,
Guangdong, P.R. China.

Tel: (0755) 26503290
Fax: (0755) 26503396

Report No. : ATE20200411
Date of Test : April 24, 2020-April 29, 2020
Date of Report : April 30, 2020

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Model difference declaration	5
1.3. Accessory and Auxiliary Equipment.....	6
1.4. Description of Test Facility	6
1.5. Measurement Uncertainty.....	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. 20DB BANDWIDTH TEST.....	11
5.1. Block Diagram of Test Setup.....	11
5.2. The Requirement For Section 15.247(a)(1).....	11
5.3. EUT Configuration on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	11
5.6. Test Result	12
6. CARRIER FREQUENCY SEPARATION TEST.....	16
6.1. Block Diagram of Test Setup.....	16
6.2. The Requirement For Section 15.247(a)(1).....	16
6.3. EUT Configuration on Measurement	16
6.4. Operating Condition of EUT	16
6.5. Test Procedure	17
6.6. Test Result	17
7. NUMBER OF HOPPING FREQUENCY TEST	21
7.1. Block Diagram of Test Setup.....	21
7.2. The Requirement For Section 15.247(a)(1)(iii).....	21
7.3. EUT Configuration on Measurement	21
7.4. Operating Condition of EUT	21
7.5. Test Procedure	21
7.6. Test Result	22
8. DWELL TIME TEST	24
8.1. Block Diagram of Test Setup.....	24
8.2. The Requirement For Section 15.247(a)(1)(iii).....	24
8.3. EUT Configuration on Measurement	24
8.4. Operating Condition of EUT	24
8.5. Test Procedure	24
8.6. Test Result	25
9. MAXIMUM PEAK OUTPUT POWER TEST	29
9.1. Block Diagram of Test Setup.....	29
9.2. The Requirement For Section 15.247(b)(1).....	29
9.3. EUT Configuration on Measurement	29

9.4.	Operating Condition of EUT	29
9.5.	Test Procedure	29
9.6.	Test Result	30
10.	RADIATED EMISSION TEST	34
10.1.	Block Diagram of Test Setup.....	34
10.2.	The Limit For Section 15.247(d)	36
10.3.	Restricted bands of operation	36
10.4.	Configuration of EUT on Measurement	37
10.5.	Test Procedure	37
10.6.	Data Sample.....	38
10.7.	The Field Strength of Radiation Emission Measurement Results	38
11.	BAND EDGE COMPLIANCE TEST	53
11.1.	Block Diagram of Test Setup.....	53
11.2.	The Requirement For Section 15.247(d)	53
11.3.	EUT Configuration on Measurement	53
11.4.	Operating Condition of EUT	53
11.5.	Test Procedure	54
11.6.	Test Result	54
12.	AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) ..	68
12.1.	Block Diagram of Test Setup.....	68
12.2.	Test System Setup.....	68
12.3.	Power Line Conducted Emission Measurement Limits	69
12.4.	Configuration of EUT on Measurement	69
12.5.	Operating Condition of EUT	69
12.6.	Test Procedure	69
12.7.	Data Sample.....	70
12.8.	Power Line Conducted Emission Measurement Results	70
13.	ANTENNA REQUIREMENT.....	74
13.1.	The Requirement	74
13.2.	Antenna Construction	74

Test Report Certification

Applicant : GOOD EVER TRADING LIMITED
Address : Rm.1701, Zhuoyue Building, Fuhua Yi Rd., Futian Central Zone, Shenzhen, P.R.China
Manufacturer : SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.
Address : RM1701, Zhuoyue Building, Fuhua Yi Rd., Futian Central Zone, Shenzhen, P.R.China
Product : True Wireless Stereo
Model No. : CB-TE020, 20249, 2WN-8/1752, AA-TWSEP
Trade name : N/A

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247 ANSI C63.10: 2013

The device described above is tested by SHENZHEN ACCURATE TECHNOLOGY CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and SHENZHEN ACCURATE TECHNOLOGY CO., LTD. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of SHENZHEN ACCURATE TECHNOLOGY CO., LTD.

Date of Test : April 24, 2020--April 29, 2020

Date of Report : April 30, 2020

Prepared by :

Tina Zhang

(Tina Zhang, Engineer)



Approve & Authorized Signer :

Martin Lü

(Martin Lü, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	True Wireless Stereo
Model Number	:	CB-TE020, 20249, 2WN-8/1752, AA-TWSEP
Bluetooth version	:	BT V5.0
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	79
Antenna Gain(Max)	:	1.05dBi
Antenna type	:	Chip Antenna
Trade Name	:	N/A
Rating	:	DC 3.7V (Powered by Battery) or DC 5V (Powered by adapter)
Modulation mode	:	GFSK, $\pi/4$ DQPSK
Applicant Address	:	GOOD EVER TRADING LIMITED Rm.1701, Zhuoyue Building, Fuhua Yi Rd., Futian Central Zone, Shenzhen, P.R.China
Manufacturer Address	:	SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD. RM1701, Zhuoyue Building, Fuhua Yi Rd., Futian Central Zone, Shenzhen, P.R.China
Date of sample received	:	April 23, 2020
Date of Test	:	April 24, 2020-April 29, 2020
Sample number	:	2000386

1.2. Model difference declaration

CB-TE020, 20249, 2WN-8/1752, AA-TWSEP are identical in interior structure, electrical circuits and components, except for the model name and appearance color.

1.3. Accessory and Auxiliary Equipment

PC	Manufacturer: LENOVO M/N: 4290-RT8 S/N: R9-FW93G 11/08
Adapter	Manufacturer: N/A INPUT: 100-240V 50/60Hz OUTPUT: DC 12V 5A

1.4. Description of Test Facility

EMC Lab	: Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358 Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2 Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193 Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	: Shenzhen Accurate Technology Co., Ltd.
Site Location	: 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

1.5.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.72dB, k=2
(Mains ports, 9kHz-30MHz)

Radiated emission expanded uncertainty = 2.66dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.28dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.98dB, k=2
(1G-18GHz)

Radiated emission expanded uncertainty = 5.06dB, k=2
(18G-26.5GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 04, 2020	1 Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 04, 2020	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV-40	101495	Jan. 04, 2020	1 Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 04, 2020	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 04, 2020	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 04, 2020	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 04, 2020	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 04, 2020	1 Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 04, 2020	1 Year
Open Switch and Control Unit	Rohde&Schwarz	OSP120 + OSP-B157	101244 + 100866	Jan. 04, 2020	1 Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 04, 2020	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 04, 2020	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 04, 2020	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 04, 2020	1 Year
RF Coaxial Cable (Conducted Emission)	SUHNER	N-2m	No.2	Jan. 04, 2020	1 Year
RF Coaxial Cable (Radiated Emission)	SUHNER	N-5m	NO.3	Jan. 04, 2020	1 Year
RF Coaxial Cable (Radiated Emission)	SUHNER	N-5m	NO.4	Jan. 04, 2020	1 Year
RF Coaxial Cable (Radiated Emission)	SUHNER	N-1m	NO.5	Jan. 04, 2020	1 Year
RF Coaxial Cable (Radiated Emission)	SUHNER	N-1m	NO.6	Jan. 04, 2020	1 Year
Conducted Emission Measurement Software: ES-K1 V1.71					
Radiated Emission Measurement Software: EZ_EMV V1.1.4.2					

3. OPERATION OF EUT DURING TESTING

3.1. Operating Mode

The mode is used: Transmitting mode


Low Channel: 2402MHz

Middle Channel: 2441MHz

High Channel: 2480MHz

Hopping

3.2. Configuration and peripherals

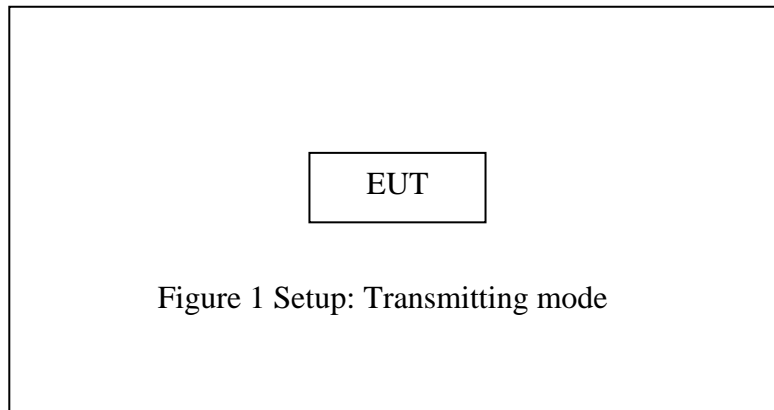

(EUT: True Wireless Stereo)


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission Test	Compliant
Section 15.247(a)(1)	20dB Bandwidth Test	Compliant
Section 15.247(a)(1)	Carrier Frequency Separation Test	Compliant
Section 15.247(a)(1)(iii)	Number Of Hopping Frequency Test	Compliant
Section 15.247(a)(1)(iii)	Dwell Time Test	Compliant
Section 15.247(b)(1)	Maximum Peak Output Power Test	Compliant
Section 15.247(d) Section 15.209	Radiated Emission Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.203	Antenna Requirement	Compliant

Note: The EUT is a pair of Bluetooth headphones. They have the same Bluetooth module and antenna, so we only tested one of them.

5. 20DB BANDWIDTH TEST

5.1. Block Diagram of Test Setup



(EUT: True Wireless Stereo)

5.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz.

5.5.3. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


5.6. Test Result

Channel	Frequency (MHz)	GFSK 20dB Bandwidth (MHz)	$\Pi/4$ DQPSK 20dB Bandwidth (MHz)	Result
Low	2402	0.750	1.200	Pass
Middle	2441	0.750	1.194	Pass
High	2480	0.792	1.218	Pass

The spectrum analyzer plots are attached as below.


GFSK Mode

Low channel

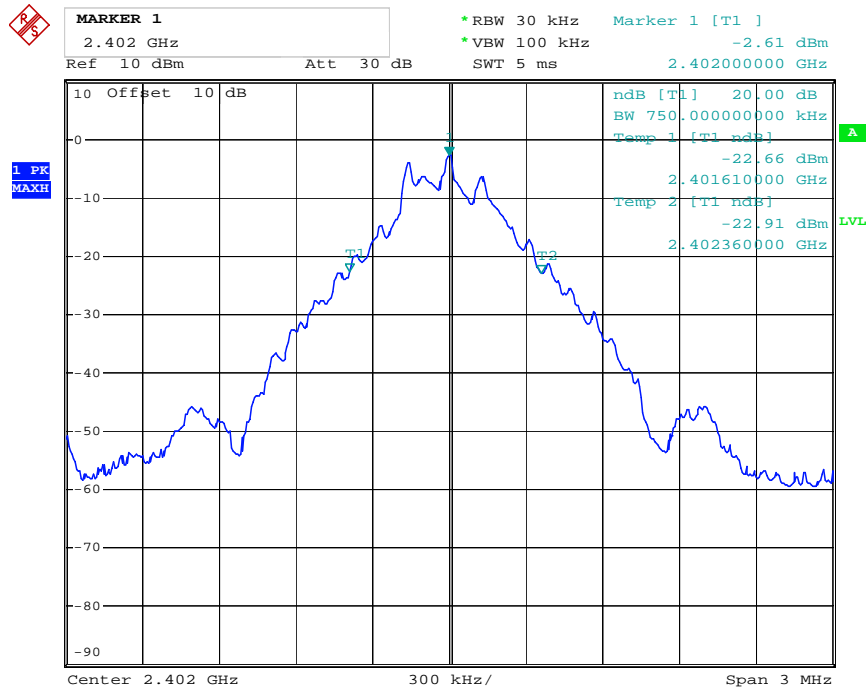


Date: 27.APR.2020 15:35:42

Middle channel

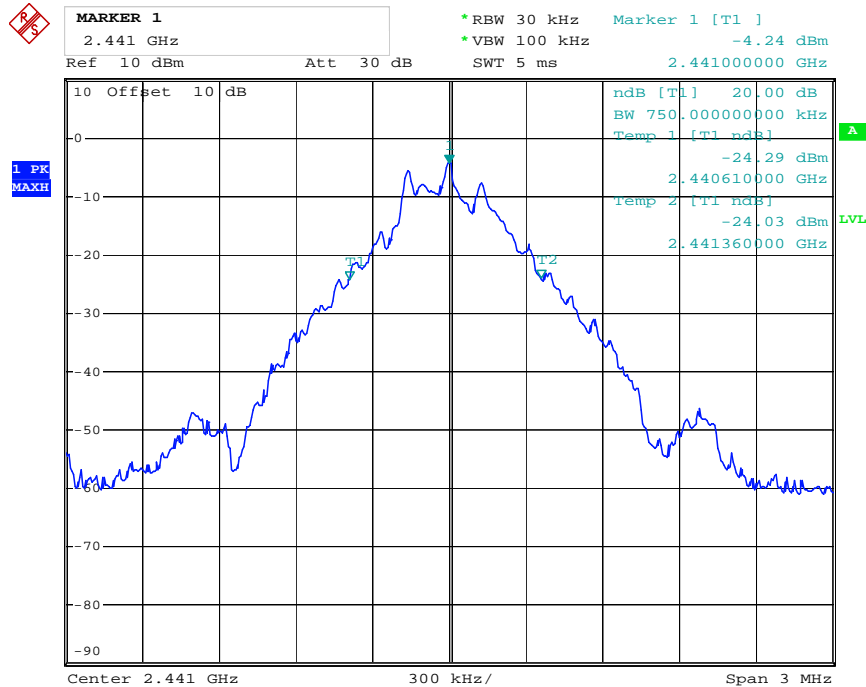

Date: 27.APR.2020 15:37:47


High channel

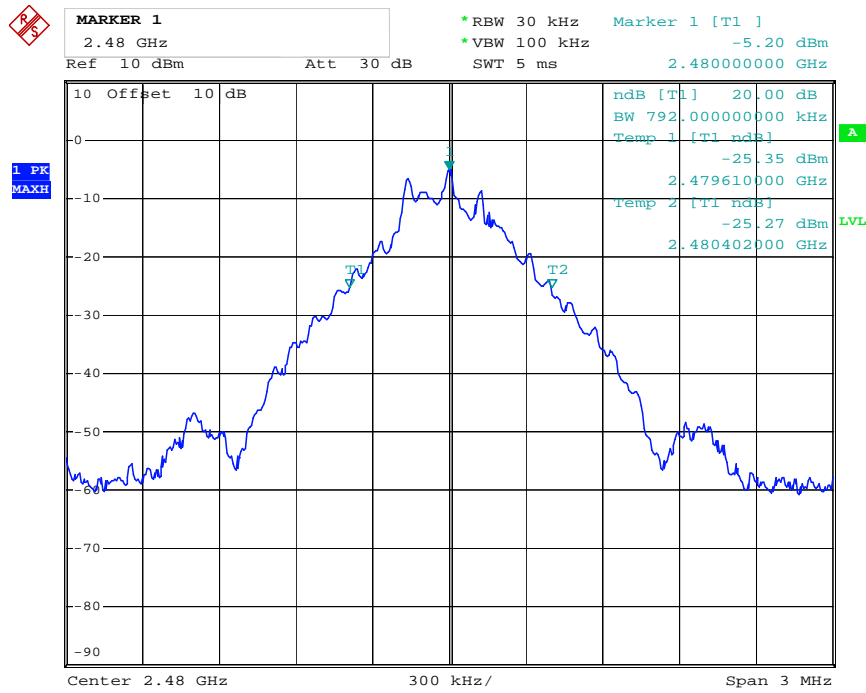

Date: 27.APR.2020 15:38:34


$\pi/4$ DQPSK Mode

Low channel

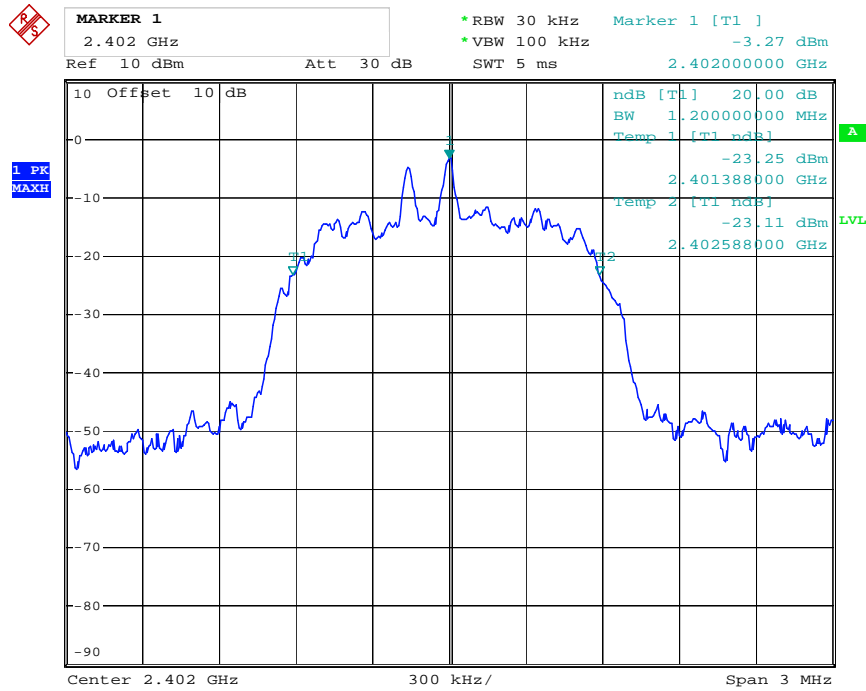


Date: 27.APR.2020 15:41:00

Middle channel

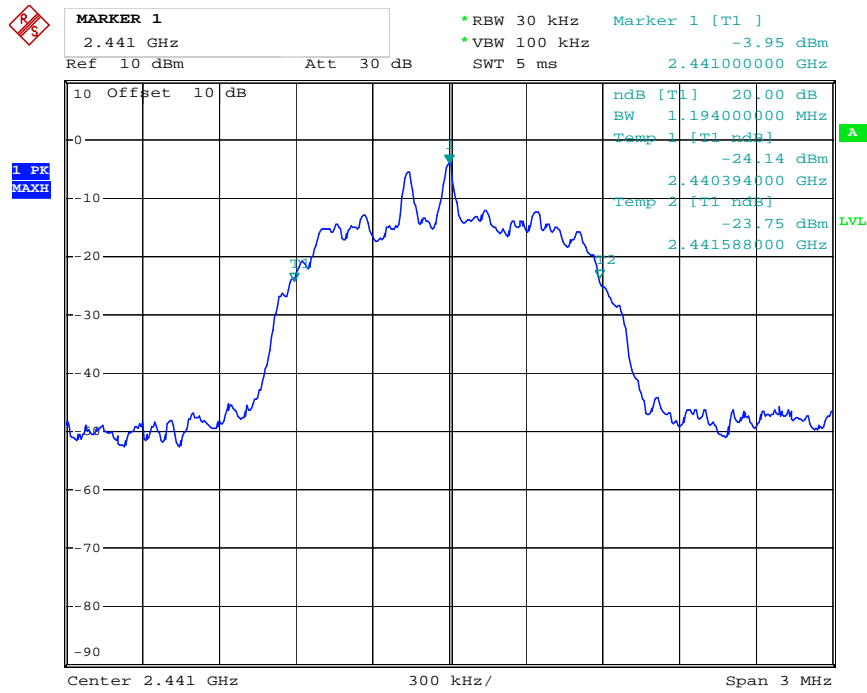

Date: 27.APR.2020 15:40:34


High channel

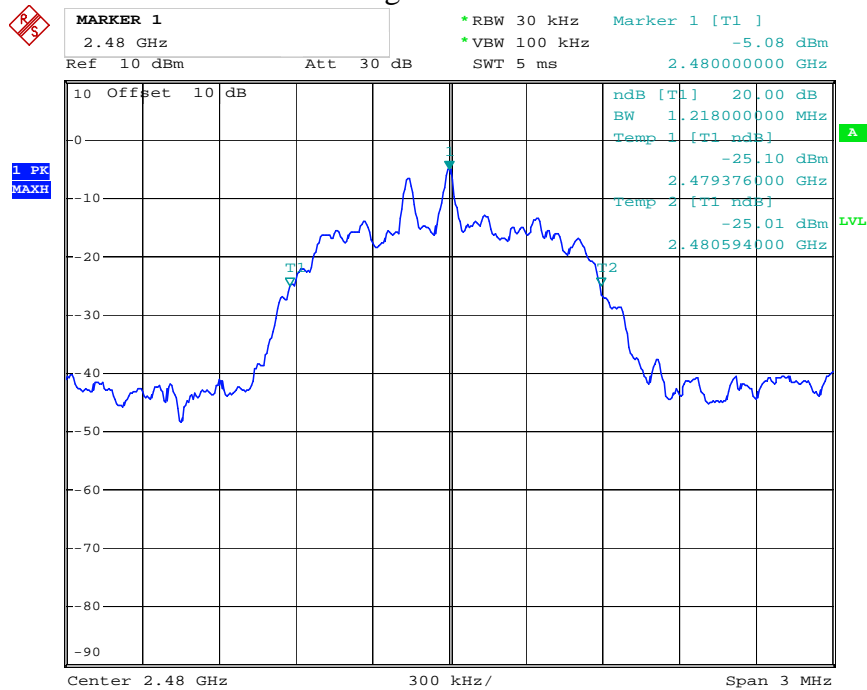

Date: 27.APR.2020 15:39:55

6. CARRIER FREQUENCY SEPARATION TEST

6.1. Block Diagram of Test Setup



(EUT: True Wireless Stereo)

6.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

6.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz. Adjust Span to 2MHz.

6.5.3. Set the adjacent channel of the EUT Maxhold another trace.

6.5.4. Measurement the channel separation

6.6. Test Result

GFSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.002	25KHz or 0.500MHz	PASS
	2403			
Middle	2440	1.002	25KHz or 0.500MHz	PASS
	2441			
High	2479	1.002	25KHz or 0.528MHz	PASS
	2480			


Π/4 DQPSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	0.996	25KHz or 0.800MHz	PASS
	2403			
Middle	2440	0.996	25KHz or 0.796MHz	PASS
	2441			
High	2479	1.002	25KHz or 0.812MHz	PASS
	2480			

The spectrum analyzer plots are attached as below.


GFSK Mode

Low channel

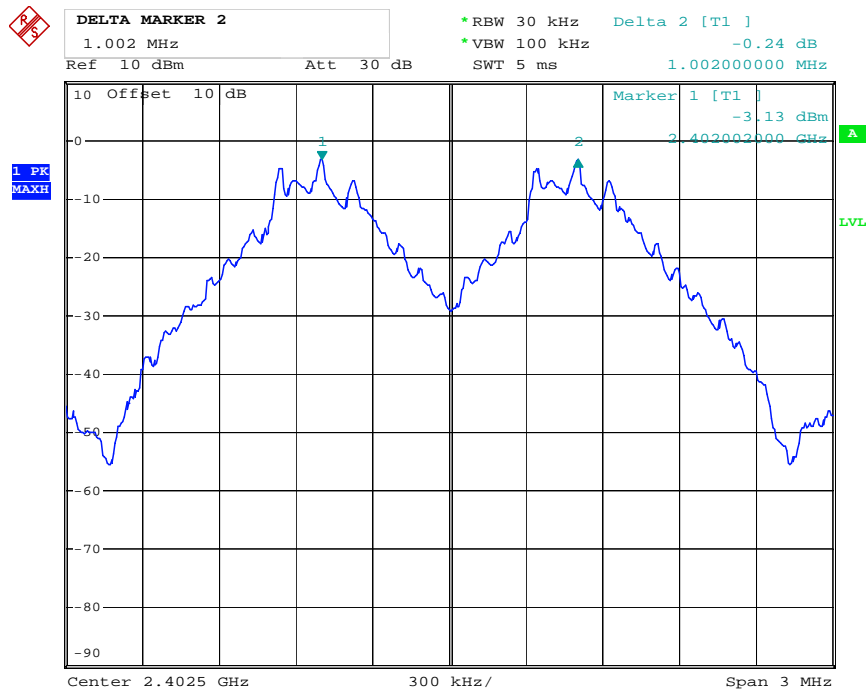


Date: 27.APR.2020 15:46:59

Middle channel

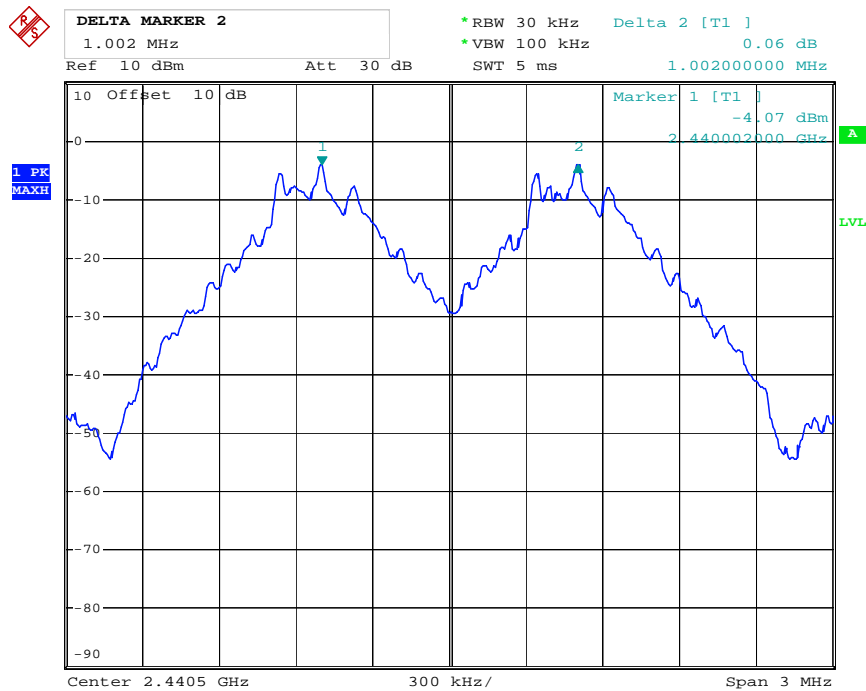

Date: 27.APR.2020 15:48:05


High channel

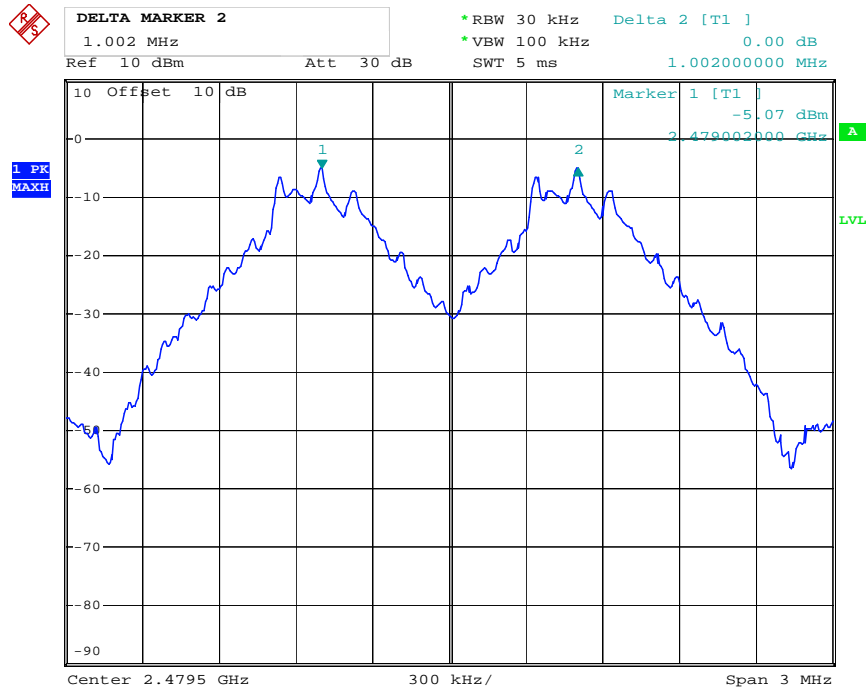

Date: 27.APR.2020 15:46:03


$\pi/4$ DQPSK Mode

Low channel

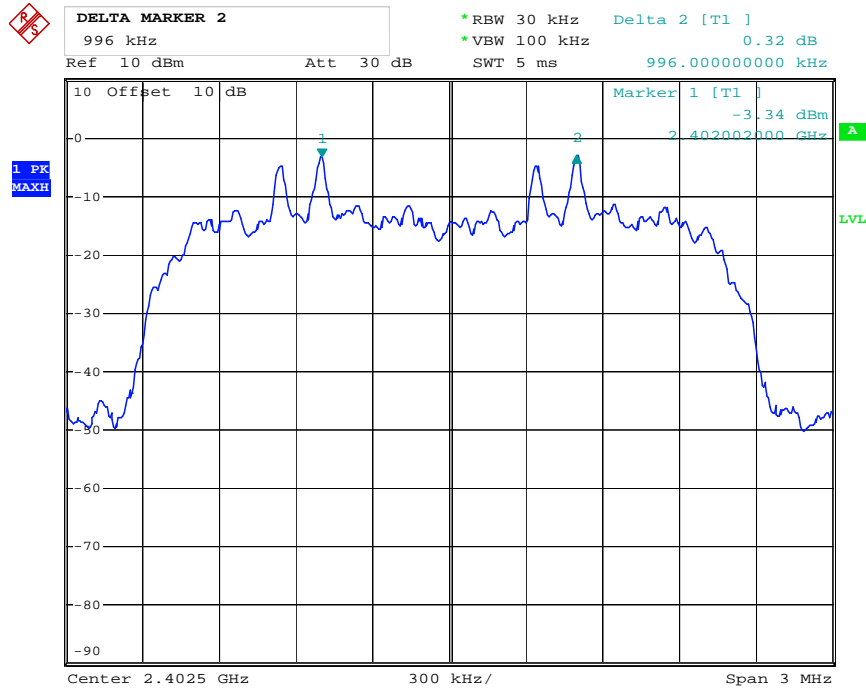


Date: 27.APR.2020 15:42:19

Middle channel

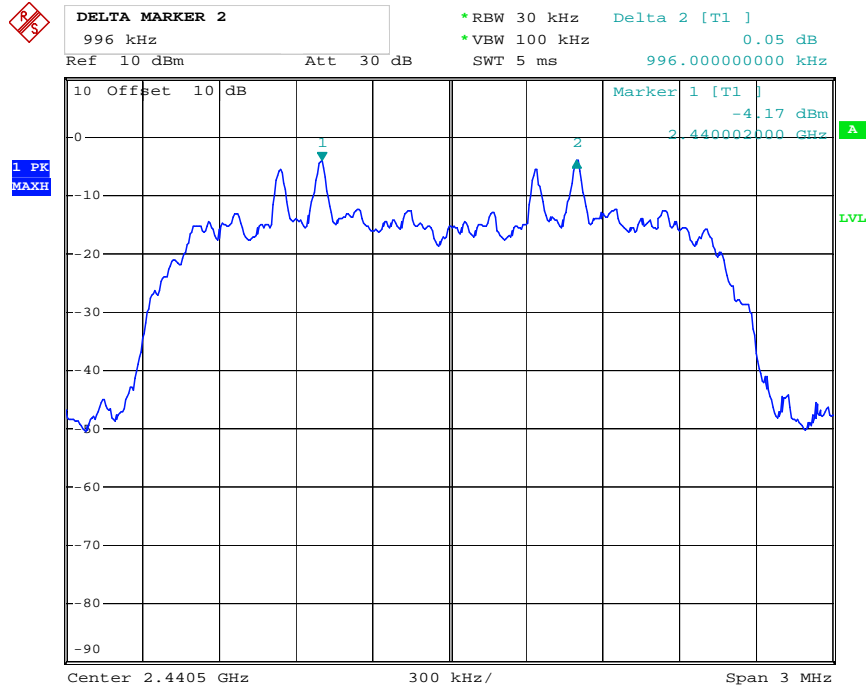

Date: 27.APR.2020 15:44:12


High channel

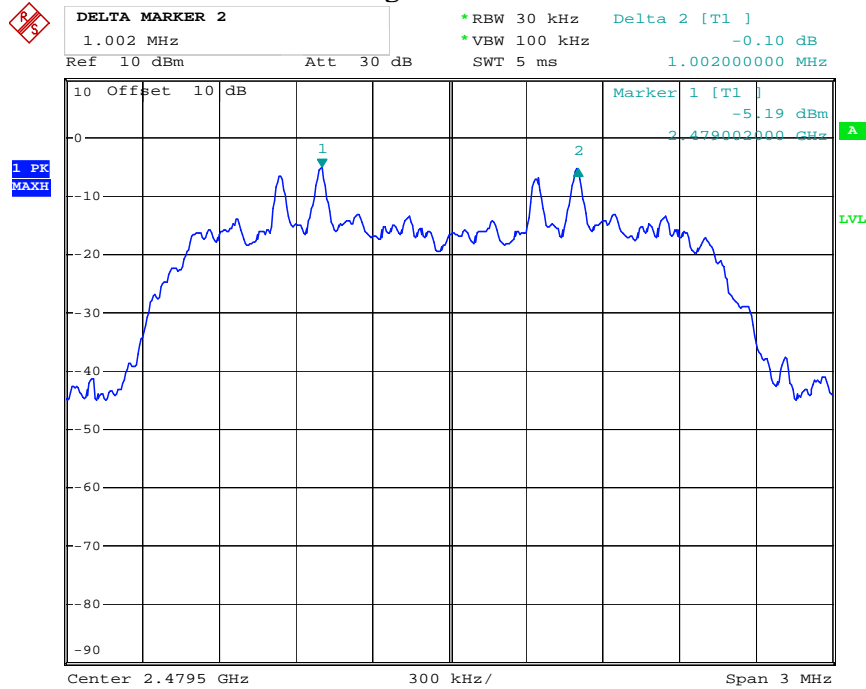

Date: 27.APR.2020 15:45:04

7. NUMBER OF HOPPING FREQUENCY TEST

7.1. Block Diagram of Test Setup



(EUT: True Wireless Stereo)

7.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX (Hopping on) modes measure it.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.


7.5.2. Set the spectrum analyzer as Span=83.5MHz, RBW=100 kHz, VBW=300 kHz.

7.5.3. Max hold, view and count how many channel in the band.

7.6. Test Result


Total number of hopping channel	Measurement result(CH)	Limit(CH)
		79

The spectrum analyzer plots are attached as below.

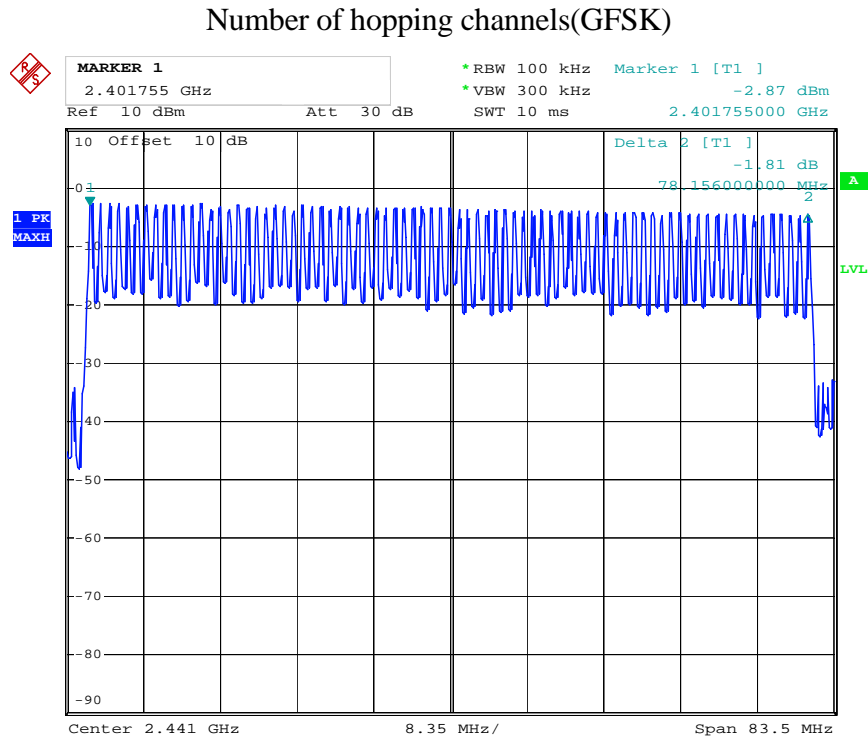

Date: 27.APR.2020 17:54:51


Number of hopping channels($\pi/4$ DQPSK)

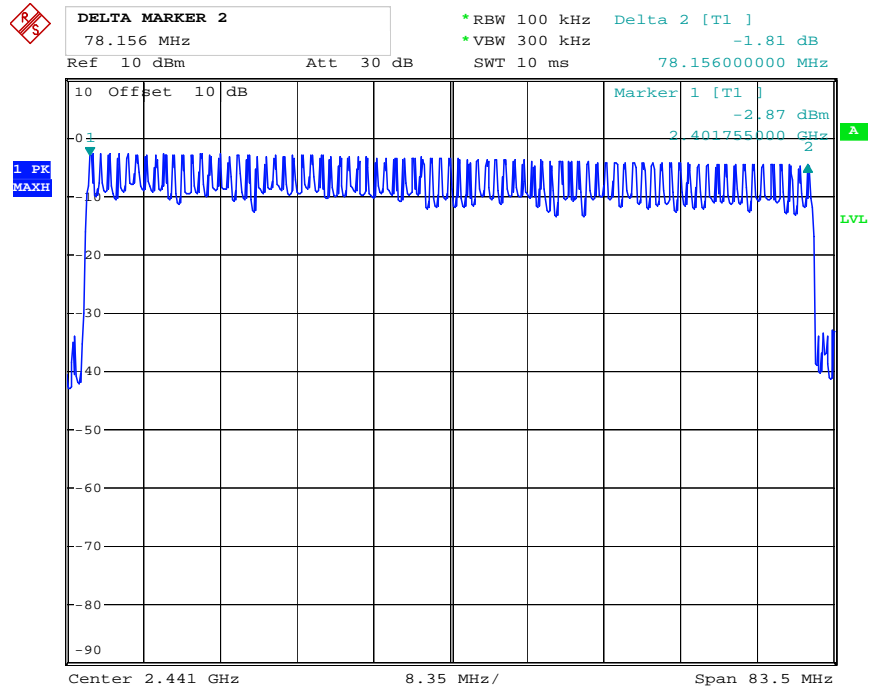

Date: 27.APR.2020 17:57:16

8. DWELL TIME TEST

8.1. Block Diagram of Test Setup



(EUT: True Wireless Stereo)

8.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Set center frequency of spectrum analyzer = operating frequency.

8.5.3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz, Adjust Sweep=5ms, 10ms, 15ms. Get the pulse time.

8.5.4.Repeat above procedures until all frequency measured were complete.

8.6.Test Result

GFSK Mode

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2441	0.450	144.000	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2*79)) \times 31.6$				
DH3	2441	1.710	273.600	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4*79)) \times 31.6$				
DH5	2441	3.000	320.000	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6*79)) \times 31.6$				

$\pi/4$ DQPSK


Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
2DH1	2441	0.460	147.200	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2*79)) \times 31.6$				
2DH3	2441	1.740	278.400	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4*79)) \times 31.6$				
2DH5	2441	3.000	320.000	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6*79)) \times 31.6$				

Note: We tested GFSK mode and $\pi/4$ DQPSK mode and recorded the worst case data for all test mode.

The spectrum analyzer plots are attached as below.


GFSK Mode

DH1 Middle channel

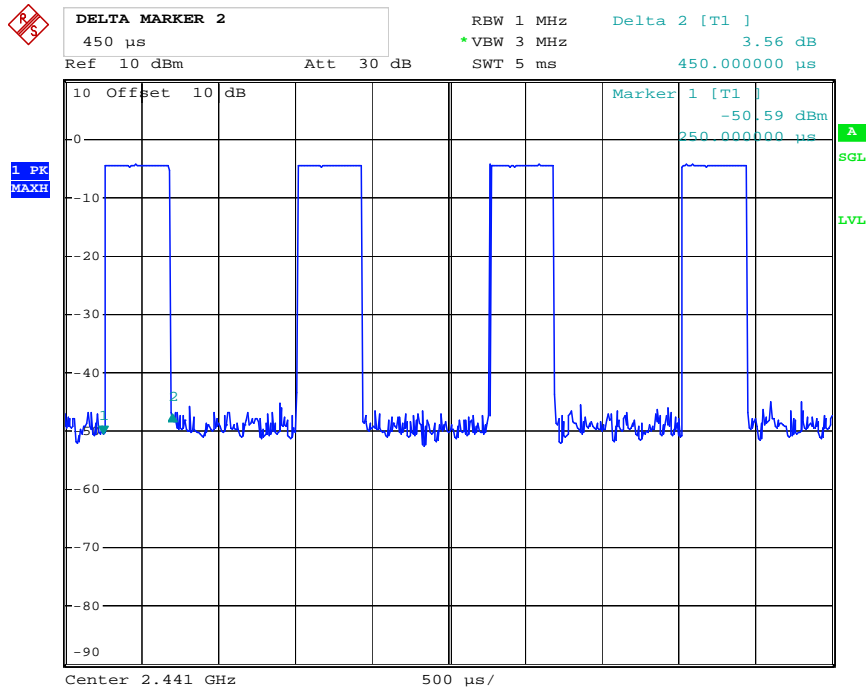


Date: 27.APR.2020 15:54:21

DH3 Middle channel

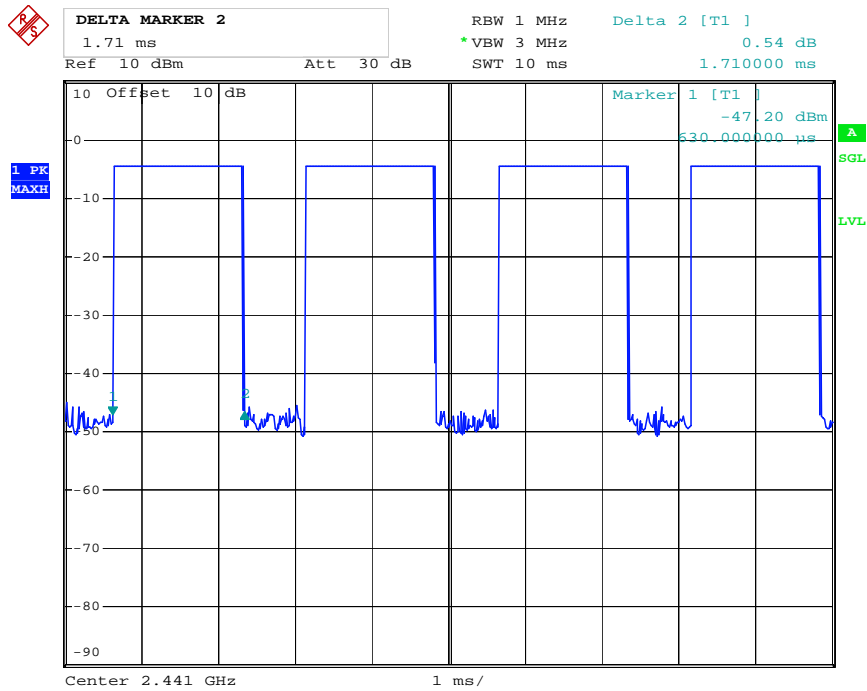

Date: 27.APR.2020 15:55:13


DH5 Middle channel

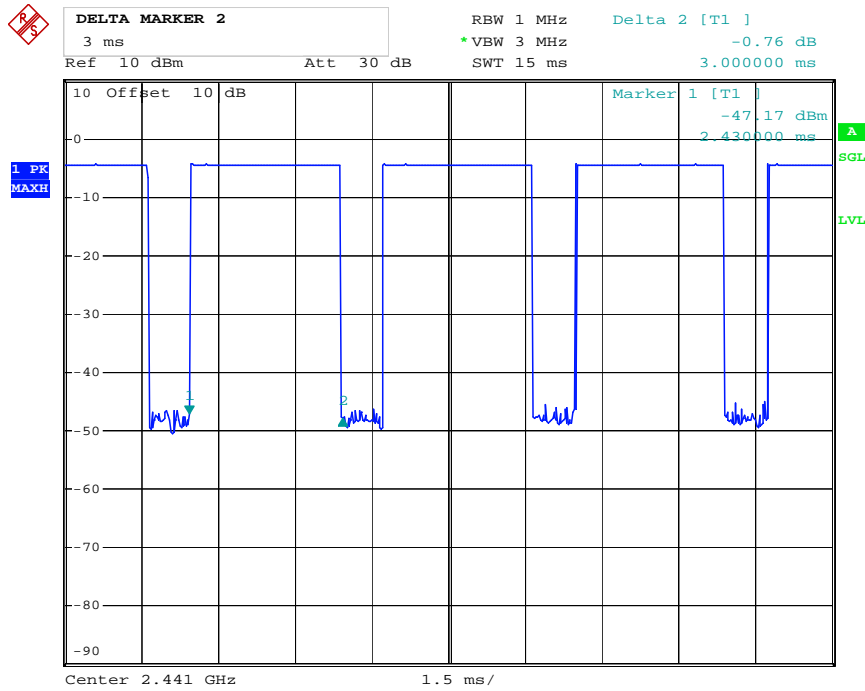

Date: 27.APR.2020 15:55:52


$\pi/4$ DQPSK Mode

2DH1 Middle channel

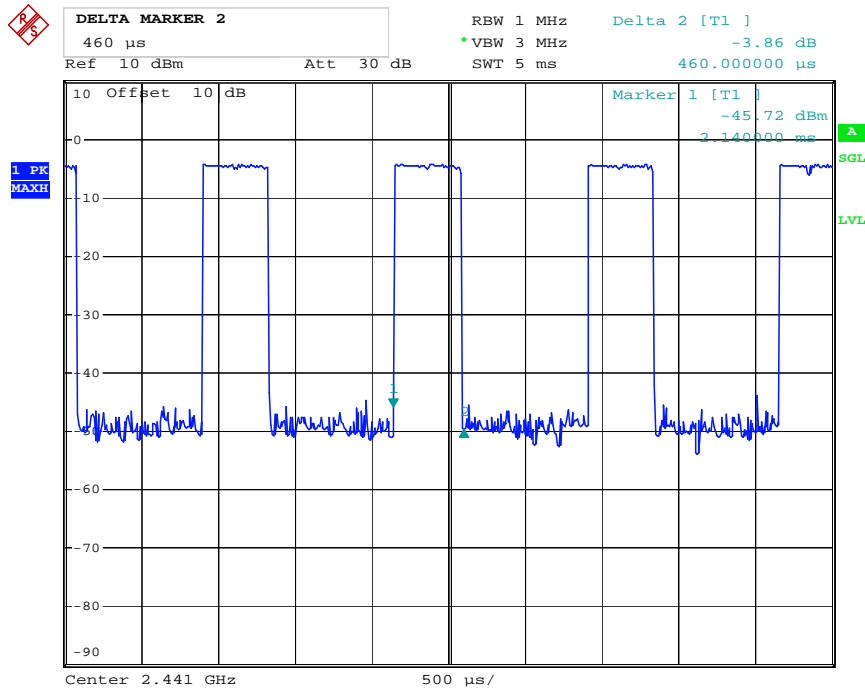


Date: 27.APR.2020 15:56:30

2DH3 Middle channel

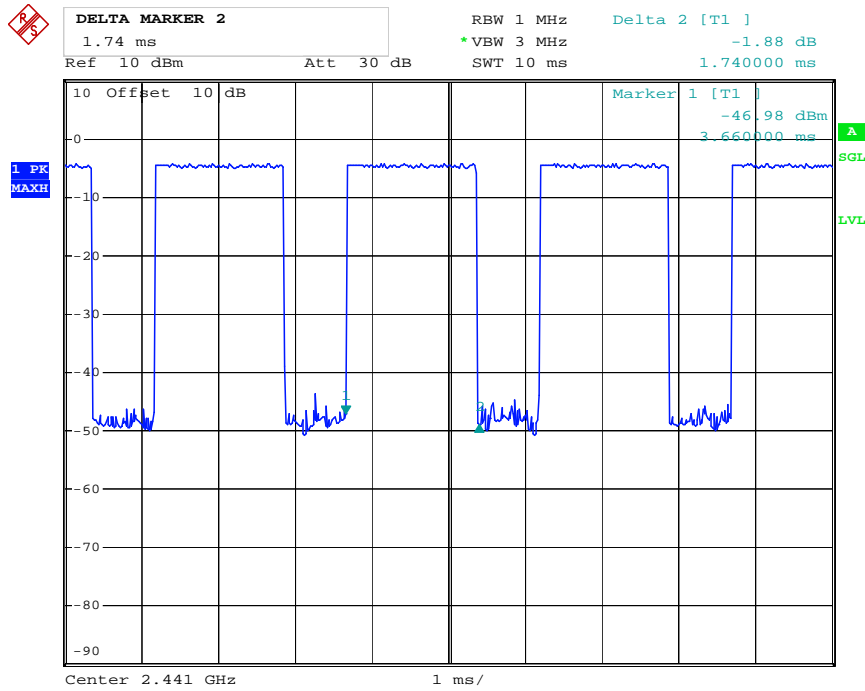

Date: 27.APR.2020 15:57:12


2DH5 Middle channel

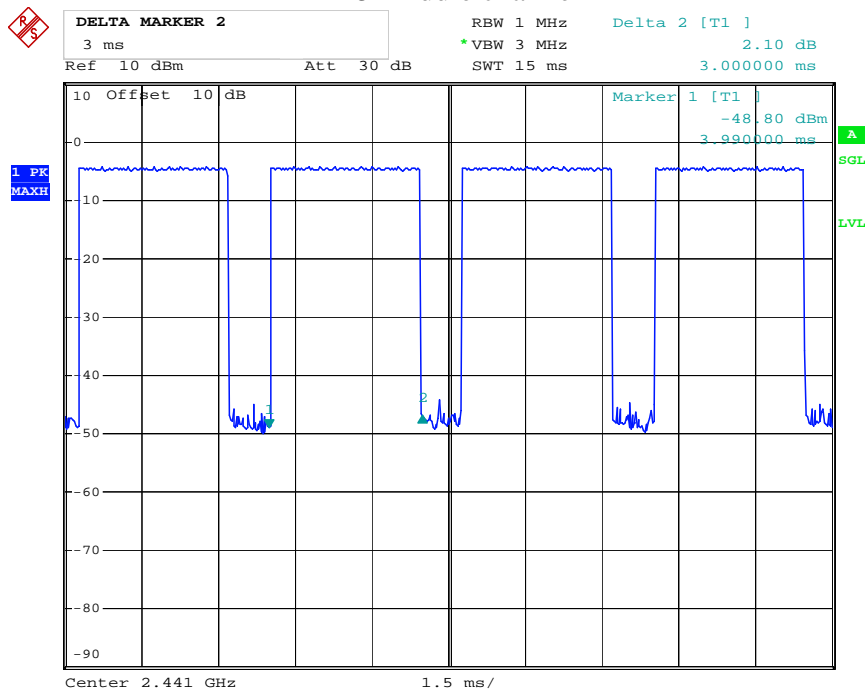

Date: 27.APR.2020 15:57:51

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1. Block Diagram of Test Setup



(EUT: True Wireless Stereo)

9.2. The Requirement For Section 15.247(b)(1)

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

9.5. Test Procedure

9.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz for GFSK mode

9.5.3. Set RBW of spectrum analyzer to 3MHz and VBW to 10MHz for $\pi/4$ DQPSK mode

9.5.4. Measurement the maximum peak output power.

9.6. Test Result

GFSK Mode

Channel	Frequency (MHz)	Peak Output Power (dBm/W)	Limits dBm / W
Low	2402	-2.58/0.00055	21 / 0.125
Middle	2441	-3.82/0.00041	21 / 0.125
High	2480	-5.08/0.00031	21 / 0.125


$\pi/4$ DQPSK Mode

Channel	Frequency (MHz)	Peak Output Power (dBm/W)	Limits dBm / W
Low	2402	-2.22/0.00060	21 / 0.125
Middle	2441	-3.22/0.00048	21 / 0.125
High	2480	-4.14/0.00039	21 / 0.125

The spectrum analyzer plots are attached as below.


GFSK Mode

Low channel

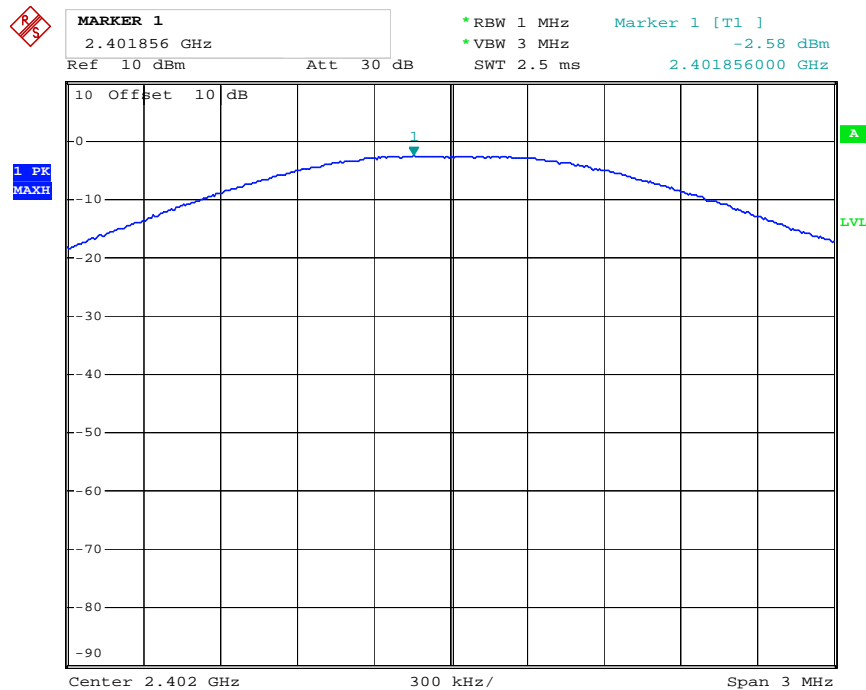


Date: 27.APR.2020 15:49:51

Middle channel

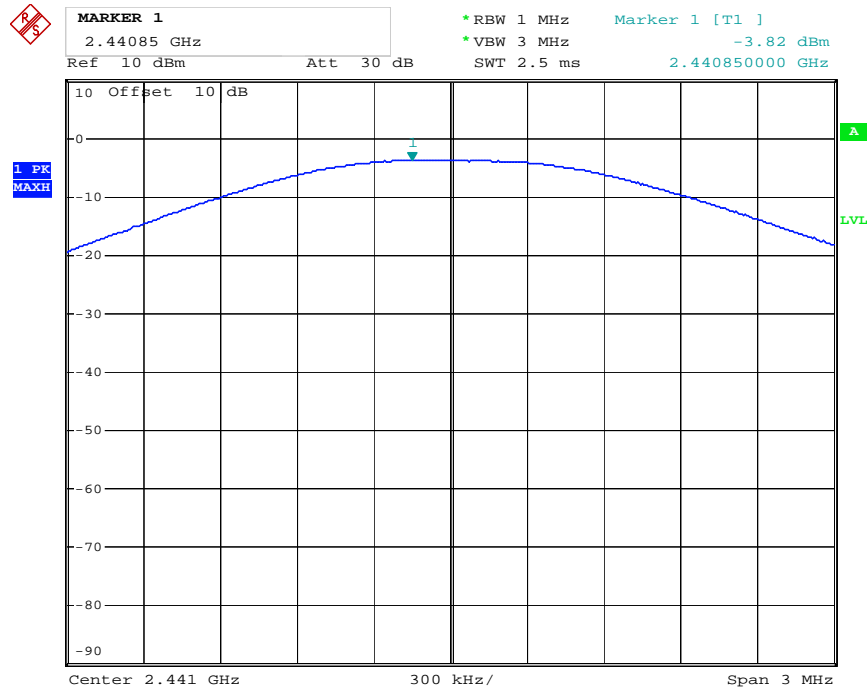

Date: 27.APR.2020 15:50:22


High channel

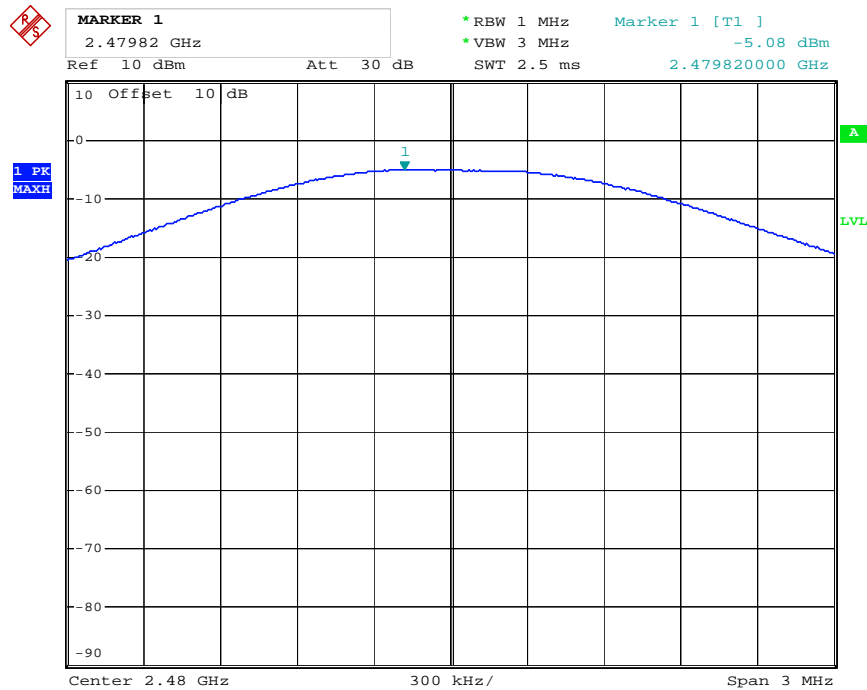

Date: 27.APR.2020 15:50:57


$\pi/4$ DQPSK Mode

Low channel

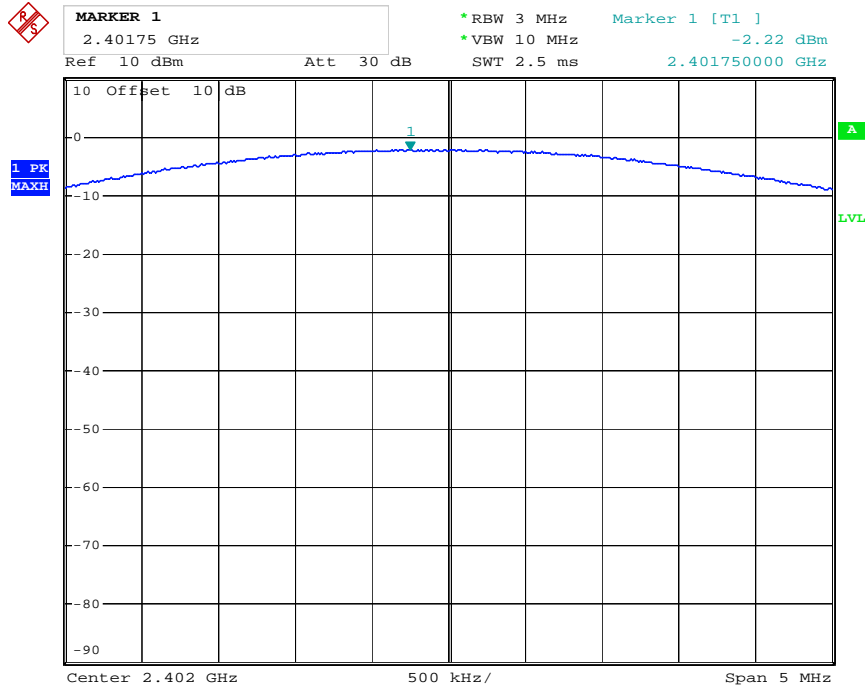


Date: 27.APR.2020 15:53:09

Middle channel

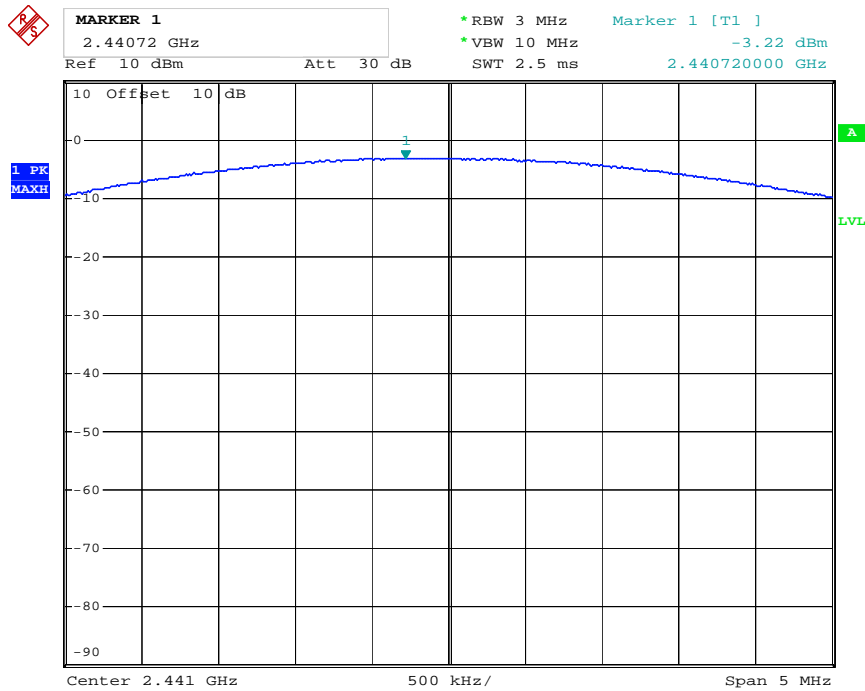

Date: 27.APR.2020 15:52:42

High channel

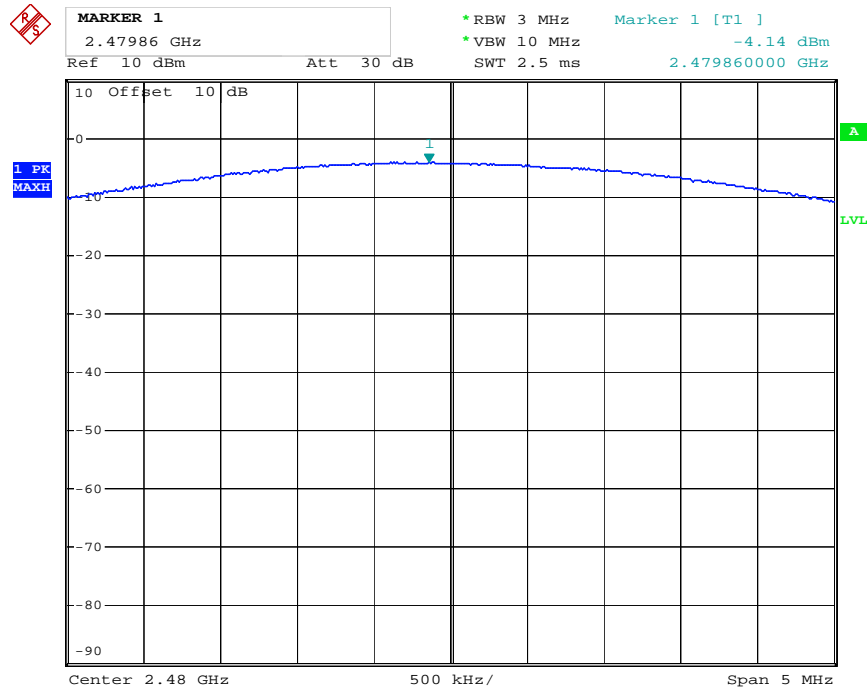


Date: 27.APR.2020 15:52:01

10. RADIATED EMISSION TEST

10.1. Block Diagram of Test Setup


10.1.1. Block diagram of connection between the EUT and peripherals


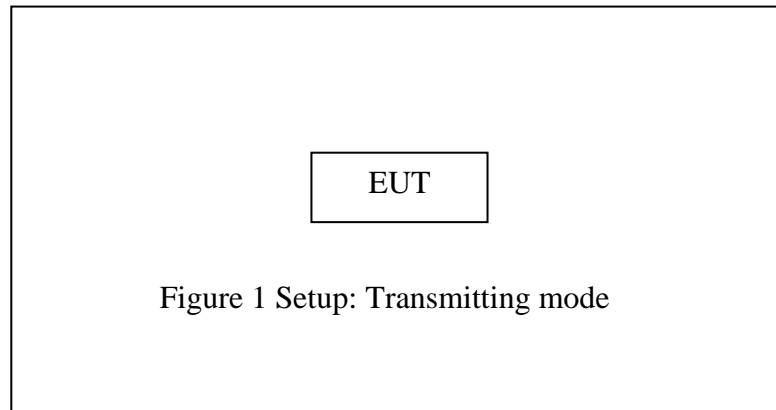


(EUT: True Wireless Stereo)

10.1.2. Semi-Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test Set-Up, Frequency below 30MHz

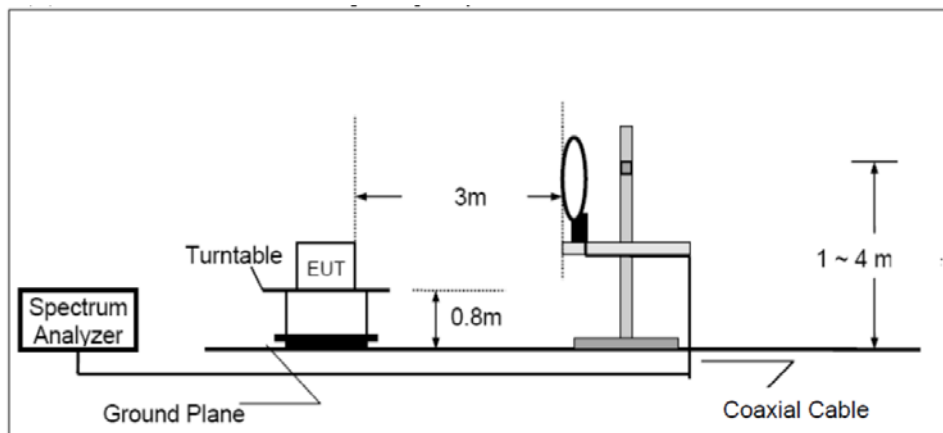

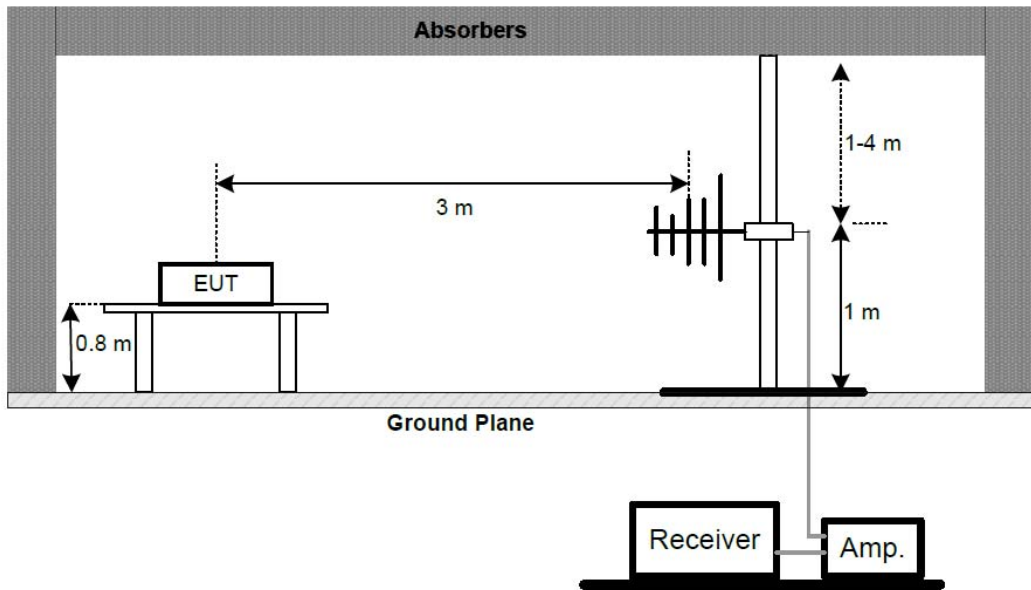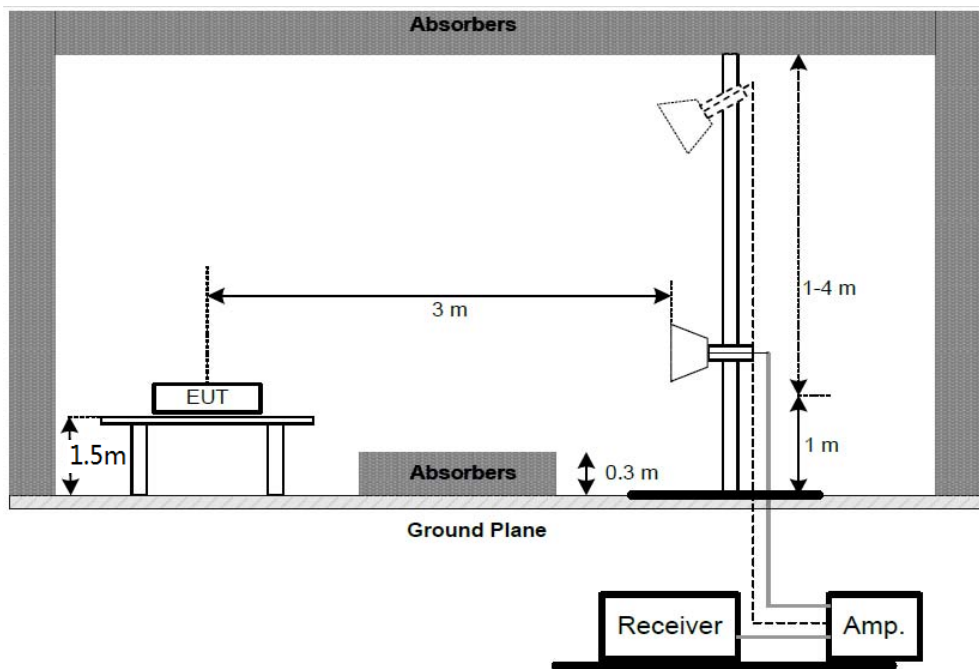(B) Radiated Emission Test Set-Up, Frequency below 1GHz**Above 1GHz:**

10.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.Restricted bands of operation

10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4. Configuration of EUT on Measurement

The equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

10.6.Data Sample

Frequency (MHz)	Reading (dB μ v)	Factor (dB/m)	Result (dB μ v/m)	Limit (dB μ v/m)	Margin (dB)	Remark
X.XX	28.66	-15.19	13.47	40.0	-26.53	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB μ v) = Uncorrected Analyzer/Receiver reading

Factor (dB/m) = Antenna factor + Cable Loss – Amplifier gain

Result(dB μ v/m) = Reading(dB μ v) + Factor(dB/m)

Limit (dB μ v/m) = Limit stated in standard

Margin (dB) = Result(dB μ v/m) - Limit (dB μ v/m)

QP = Quasi-peak Reading

Calculation Formula:

Margin(dB) = Result (dB μ V/m)–Limit(dB μ V/m)

Result(dB μ V/m)= Reading(dB μ V)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

10.7.The Field Strength of Radiation Emission Measurement Results

Note: 1.We tested GFSK mode and $\pi/4$ DQPSK Mode and recorded the worst case data

(GFSK mode) from 30MHz-1GHz.

2.We tested GFSK mode and $\pi/4$ DQPSK Mode and recorded the worst case data($\pi/4$ DQPSK mode)

from 1GHz-25GHz.

3. The test frequency is from 9KHz to 25GHz, The radiation emission from 9KHz-30MHz and 18-25GHz are not reported, because the levels are too low against the limit.

Below 1GHz


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: jp2020 #78

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: CHARGING

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2020/04/28/

Time: 9/25/56

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

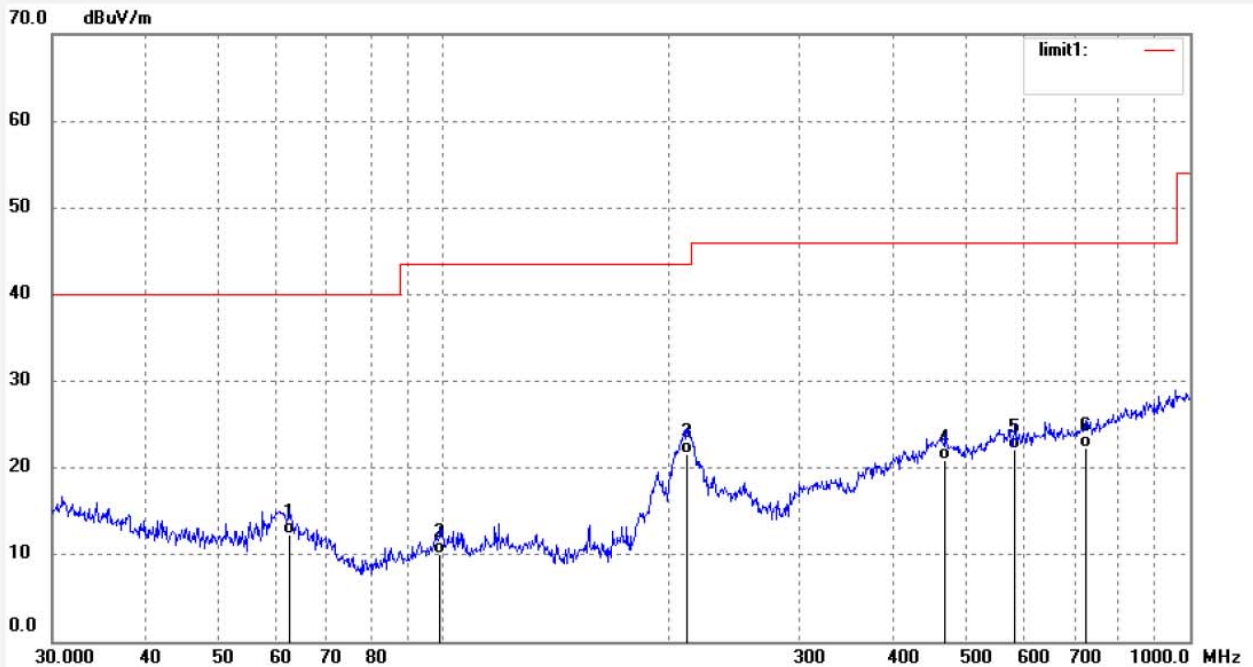

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	62.4313	28.21	-15.81	12.40	40.00	-27.60	QP	200	105	
2	99.1795	24.50	-14.40	10.10	43.50	-33.40	QP	200	156	
3	212.2693	34.64	-13.04	21.60	43.50	-21.90	QP	200	186	
4	470.5230	27.50	-6.50	21.00	46.00	-25.00	QP	200	198	
5	582.7423	26.20	-4.10	22.10	46.00	-23.90	QP	200	249	
6	724.2611	24.82	-2.42	22.40	46.00	-23.60	QP	200	276	

Job No.: jp2020 #79

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: CHARGING

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2020/04/28/

Time: 9/27/36

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

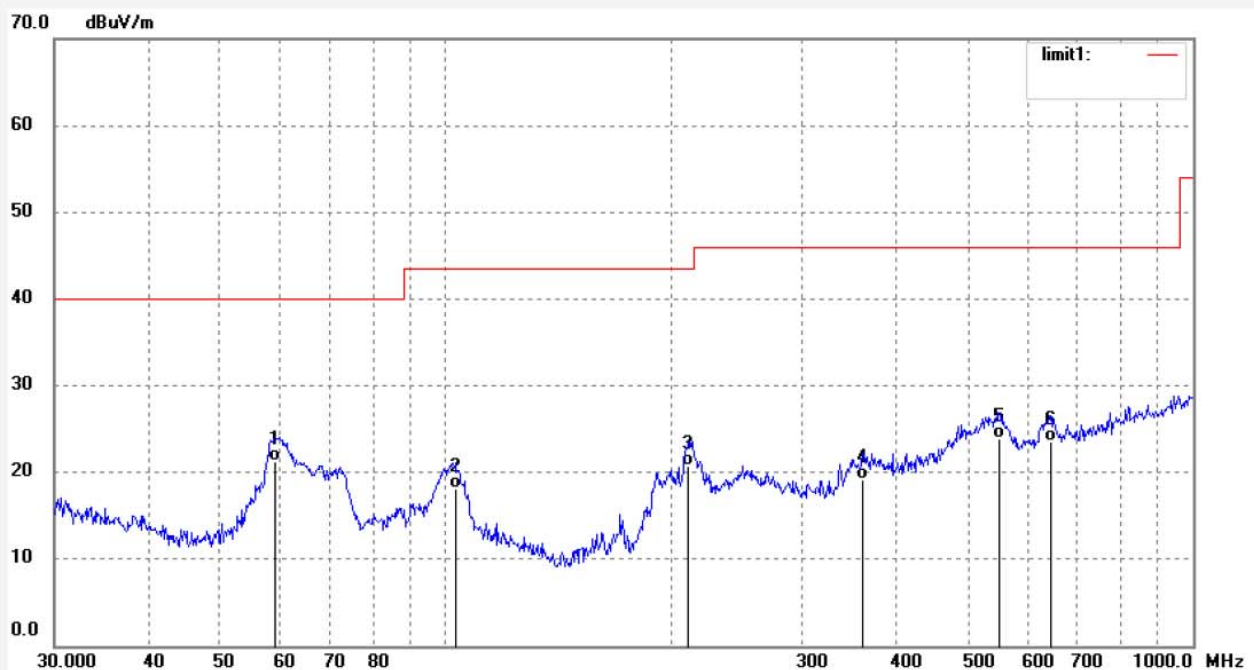

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	59.2325	35.99	-14.79	21.20	40.00	-18.80	QP	100	116	
2	103.0799	32.73	-14.63	18.10	43.50	-25.40	QP	100	153	
3	211.5264	33.89	-13.09	20.80	43.50	-22.70	QP	100	196	
4	361.7139	27.80	-8.60	19.20	46.00	-26.80	QP	100	215	
5	550.9479	28.49	-4.59	23.90	46.00	-22.10	QP	100	263	
6	645.1195	27.12	-3.52	23.60	46.00	-22.40	QP	100	302	

Job No.: jp2020 #81

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2402MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 9/32/56

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

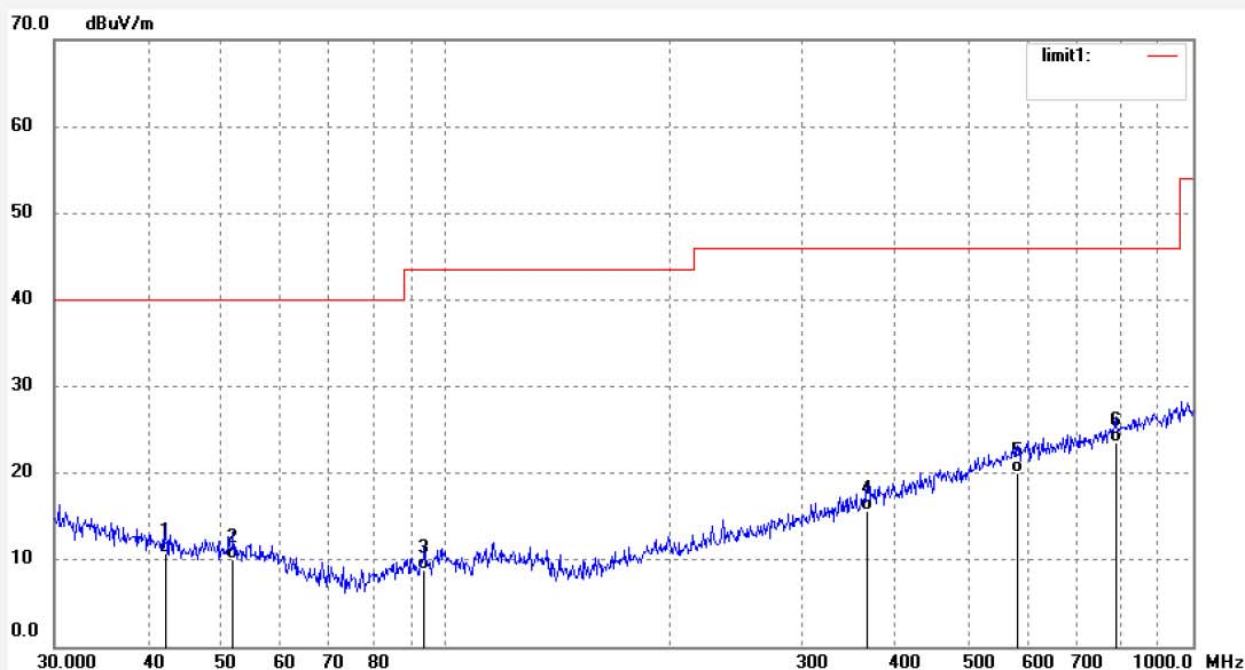

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	42.3021	23.85	-13.05	10.80	40.00	-29.20	QP	200	123	
2	52.0251	23.75	-13.75	10.00	40.00	-30.00	QP	200	163	
3	93.7685	24.67	-15.87	8.80	43.50	-34.70	QP	200	198	
4	366.8231	24.14	-8.54	15.60	46.00	-30.40	QP	200	203	
5	582.7423	24.10	-4.10	20.00	46.00	-26.00	QP	200	245	
6	787.8513	24.73	-1.23	23.50	46.00	-22.50	QP	200	298	

Job No.: jp2020 #80

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2402MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 9/31/35

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

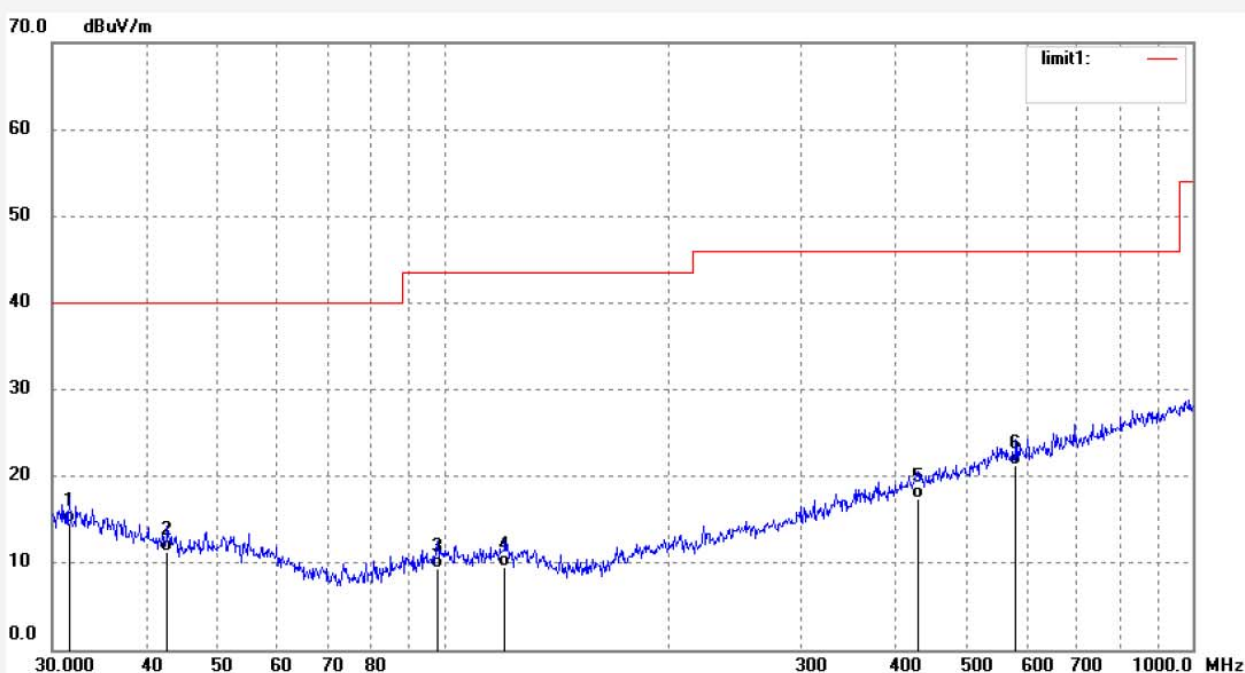

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	31.6202	25.01	-10.41	14.60	40.00	-25.40	QP	100	114	
2	42.7496	24.44	-13.14	11.30	40.00	-28.70	QP	100	163	
3	98.1419	24.15	-14.75	9.40	43.50	-34.10	QP	100	198	
4	120.6991	23.82	-14.22	9.60	43.50	-33.90	QP	100	206	
5	429.5228	24.55	-7.05	17.50	46.00	-28.50	QP	100	245	
6	580.7025	25.32	-4.12	21.20	46.00	-24.80	QP	100	291	

Job No.: jp2020 #83

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2441MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 9/34/56

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

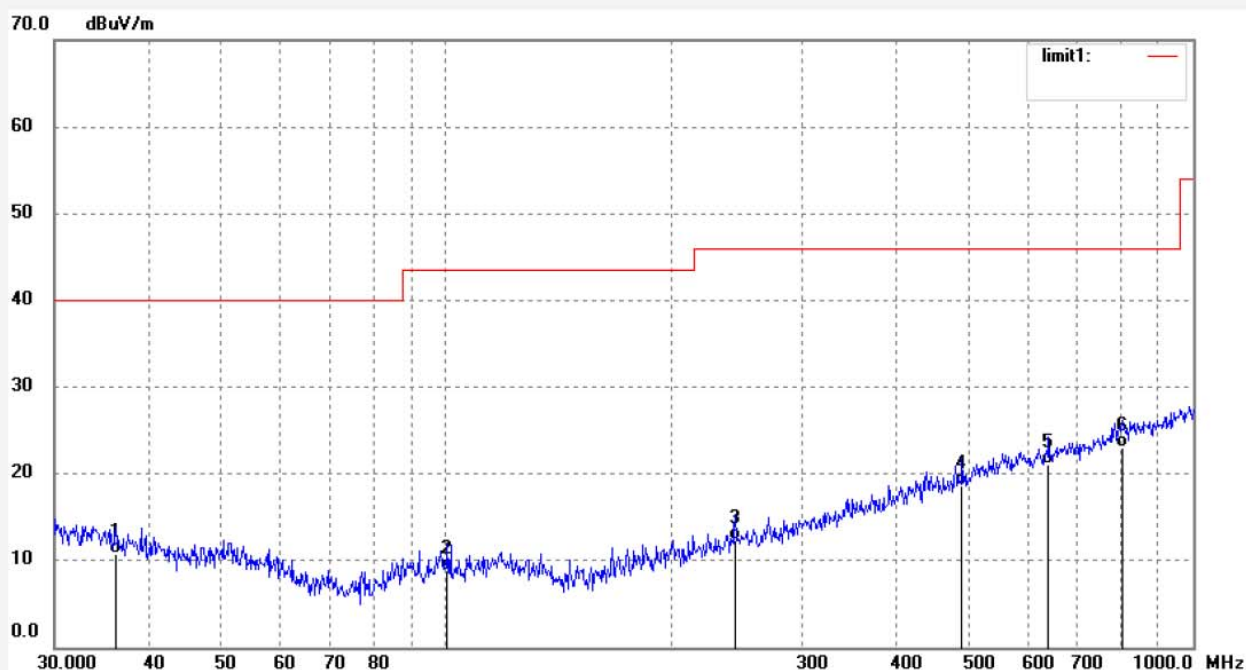

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.2541	22.51	-11.71	10.80	40.00	-29.20	QP	200	145	
2	100.5806	23.11	-14.21	8.90	43.50	-34.60	QP	200	163	
3	244.2321	24.12	-11.82	12.30	46.00	-33.70	QP	200	196	
4	490.7447	24.77	-6.17	18.60	46.00	-27.40	QP	200	206	
5	640.6109	24.63	-3.53	21.10	46.00	-24.90	QP	200	256	
6	804.6028	23.89	-0.89	23.00	46.00	-23.00	QP	200	276	

Job No.: jp2020 #82

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2441MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 9/33/48

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

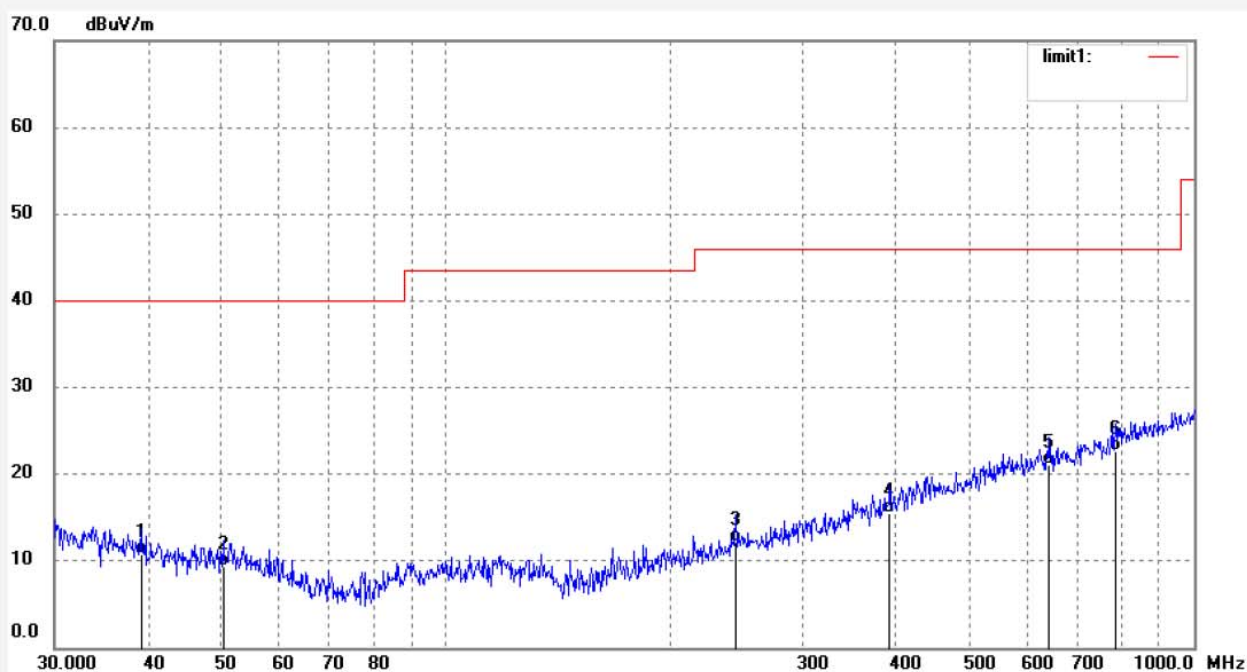

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	39.1613	23.06	-12.36	10.70	40.00	-29.30	QP	100	115	
2	50.4089	23.04	-13.64	9.40	40.00	-30.60	QP	100	163	
3	244.2321	24.02	-11.82	12.20	46.00	-33.80	QP	100	196	
4	392.0951	23.64	-8.14	15.50	46.00	-30.50	QP	100	205	
5	640.6109	24.63	-3.53	21.10	46.00	-24.90	QP	100	263	
6	785.0932	24.02	-1.32	22.70	46.00	-23.30	QP	100	296	


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: jp2020 #85

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2480MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 9/36/49

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

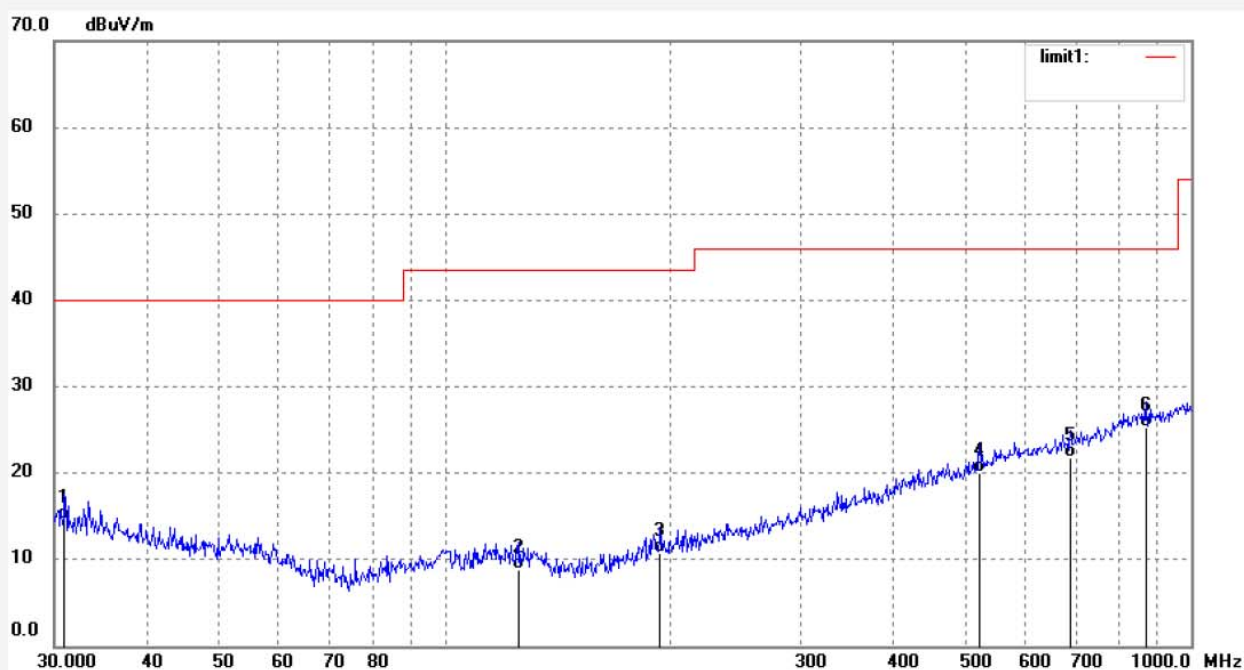

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.9618	24.81	-10.21	14.60	40.00	-25.40	QP	200	103	
2	125.8863	23.66	-14.76	8.90	43.50	-34.60	QP	200	136	
3	194.4533	24.29	-13.49	10.80	43.50	-32.70	QP	200	186	
4	520.8881	25.41	-5.31	20.10	46.00	-25.90	QP	200	202	
5	689.5643	24.72	-2.92	21.80	46.00	-24.20	QP	200	216	
6	869.1299	25.27	0.03	25.30	46.00	-20.70	QP	200	263	

Job No.: jp2020 #84

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2480MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 9/35/45

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

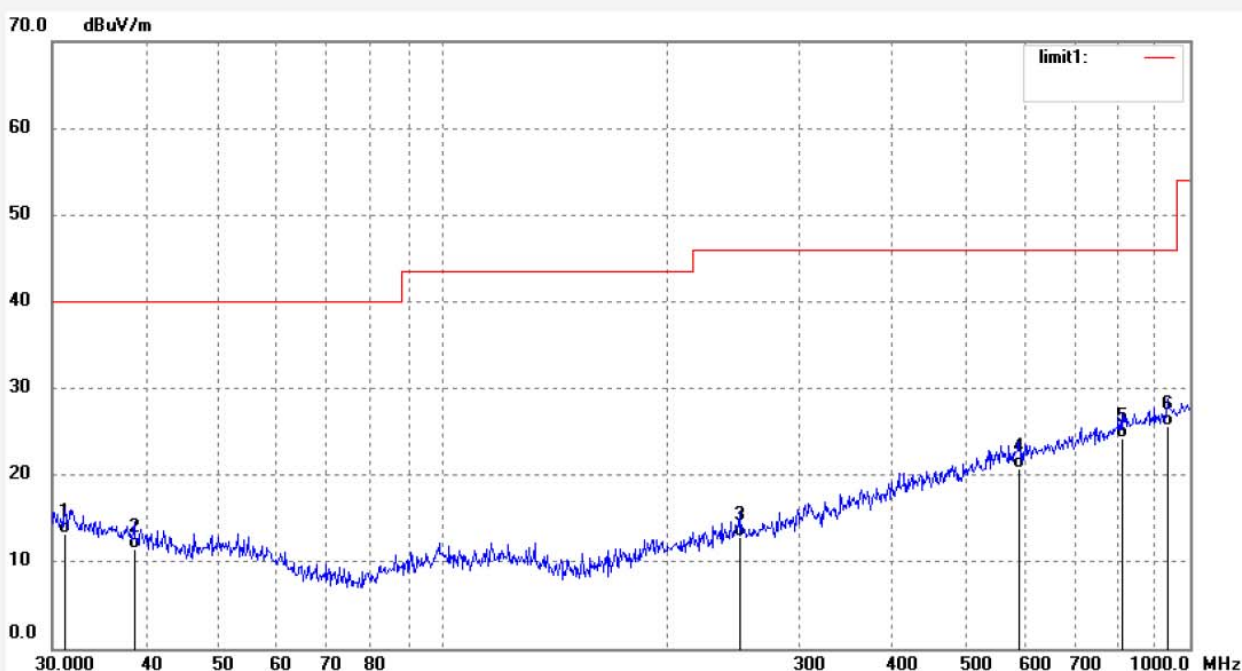

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	31.1798	23.47	-10.27	13.20	40.00	-26.80	QP	100	125	
2	38.6160	23.74	-12.24	11.50	40.00	-28.50	QP	100	165	
3	249.4250	24.57	-11.77	12.80	46.00	-33.20	QP	100	196	
4	590.9737	24.84	-4.04	20.80	46.00	-25.20	QP	100	202	
5	810.2653	25.01	-0.81	24.20	46.00	-21.80	QP	100	256	
6	932.2712	24.85	0.85	25.70	46.00	-20.30	QP	100	286	

Above 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: jp2020 #62

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2402MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/36/00

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

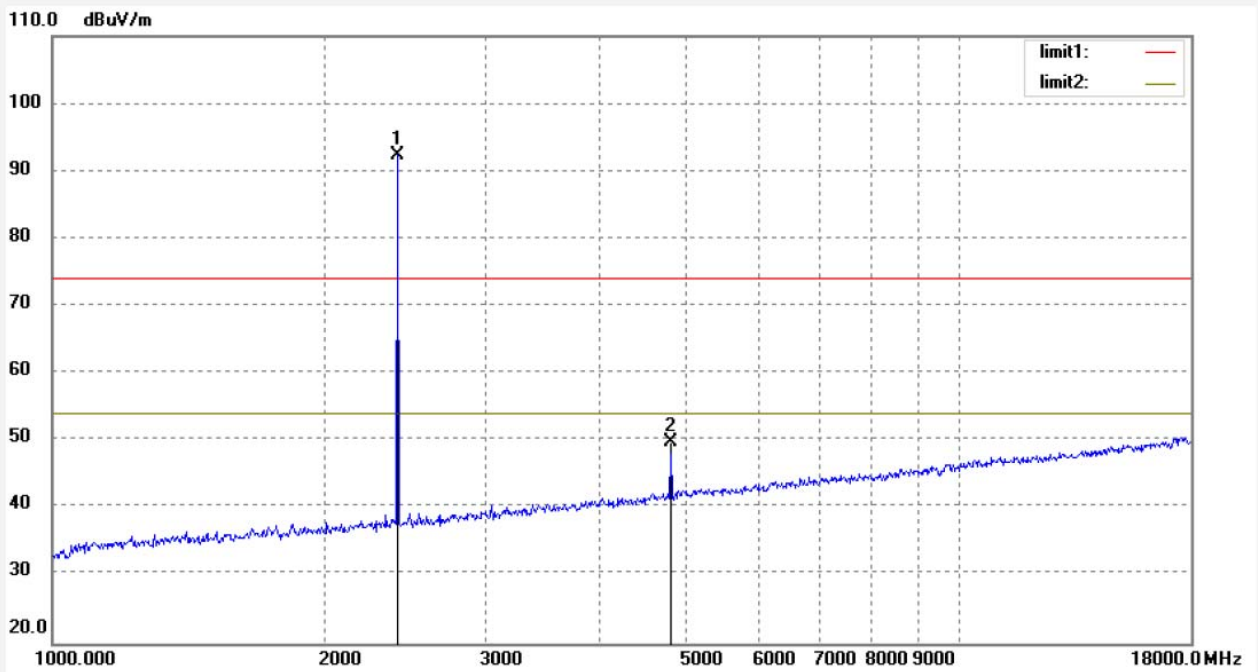

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	91.39	0.88	92.27			peak	250	136	
2	4804.000	42.52	7.40	49.92	74.00	-24.08	peak	250	136	

Job No.: jp2020 #63

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2402MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/37/03

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

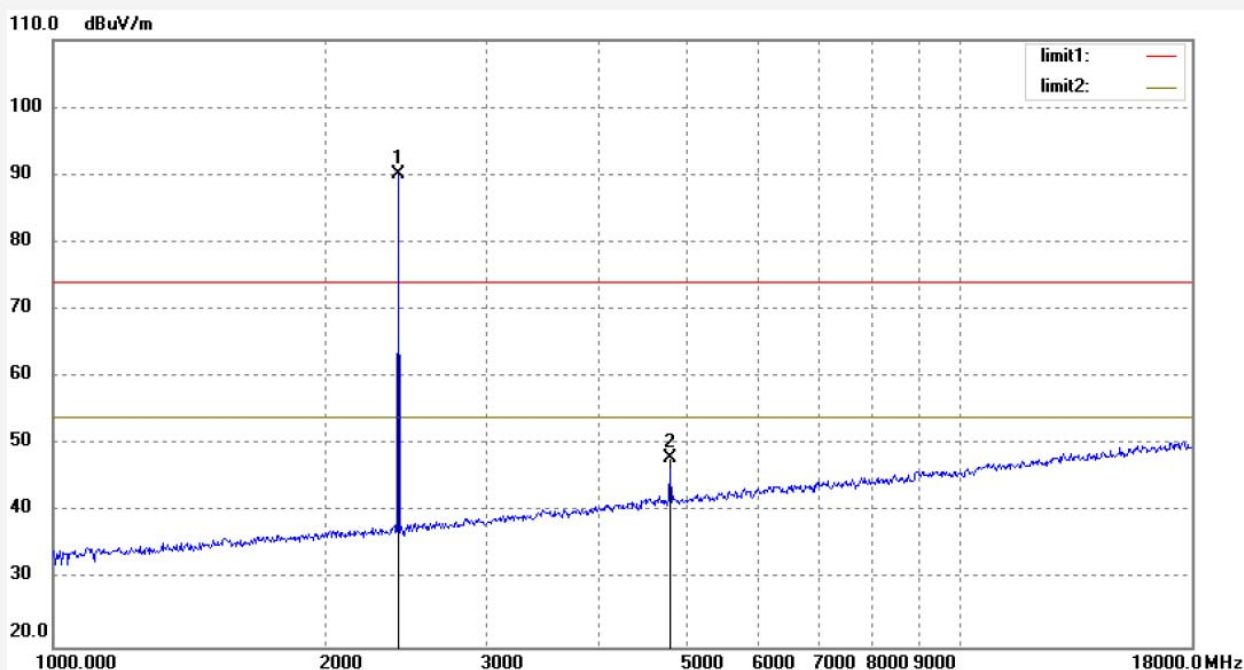

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	89.17	0.88	90.05			peak	150	186	
2	4804.000	40.74	7.30	48.04	74.00	-25.96	peak	150	186	

Job No.: jp2020 #65

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2441MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/39/48

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

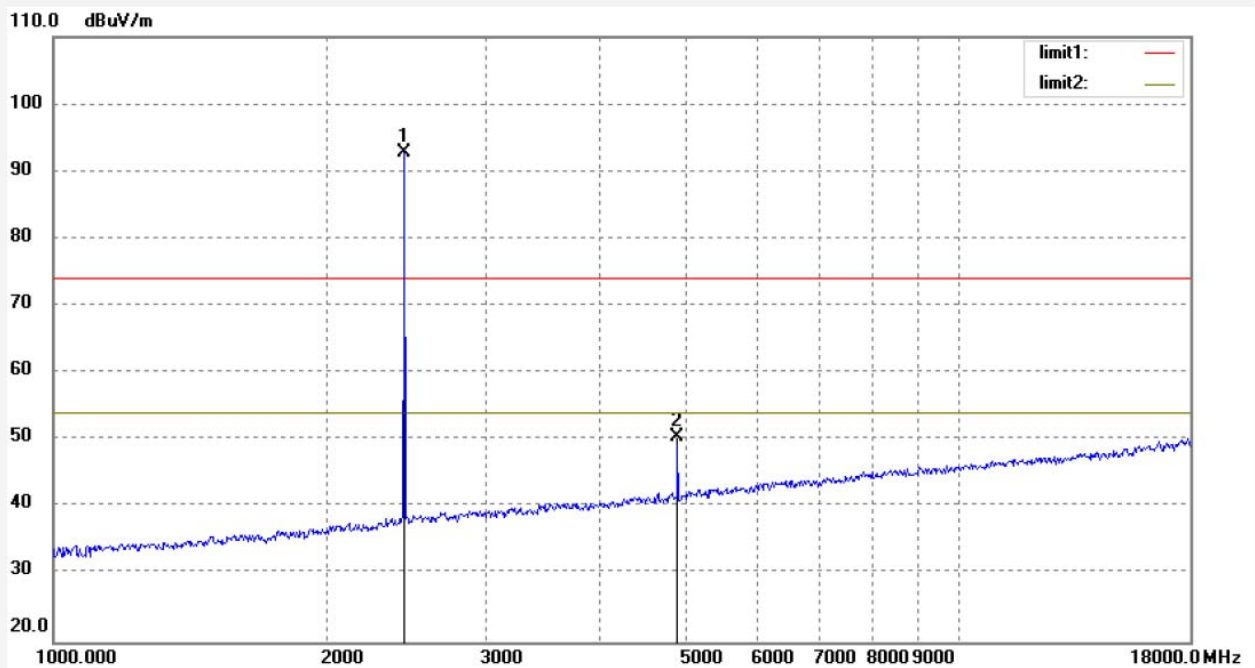

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	91.62	1.06	92.68			peak	250	189	
2	4882.000	42.32	8.11	50.43	74.00	-23.57	peak	250	189	

Job No.: jp2020 #64

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2441MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/38/49

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

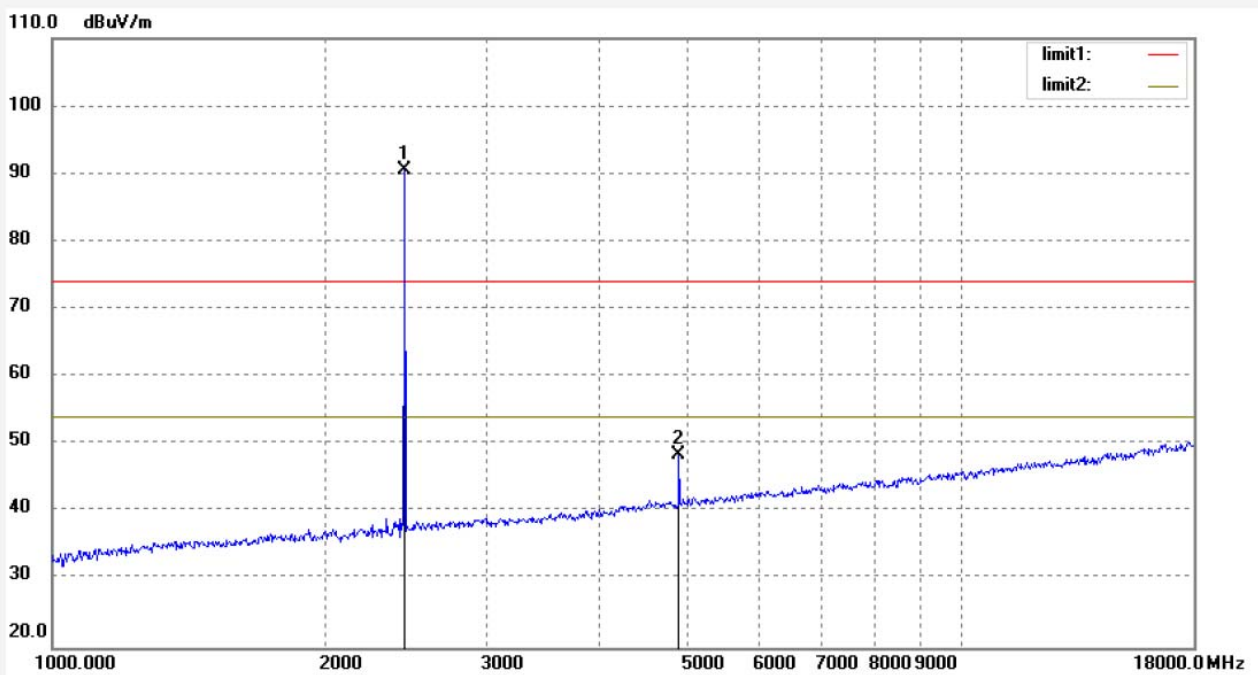

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	89.50	1.06	90.56			peak	150	163	
2	4882.000	40.44	8.11	48.55	74.00	-25.45	peak	150	163	

Job No.: jp2020 #66

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2480MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/41/32

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

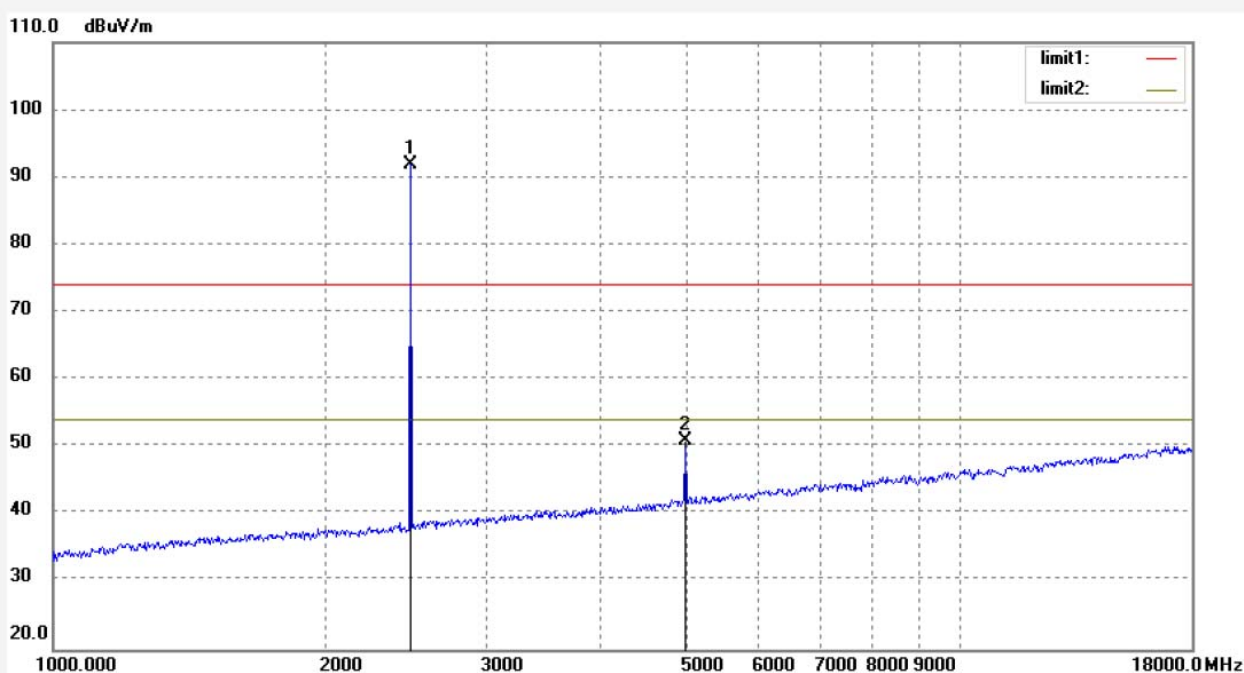

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	90.86	1.09	91.95			peak	250	175	
2	4960.000	42.28	8.60	50.88	74.00	-23.12	peak	250	175	

Job No.: jp2020 #67

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: TX 2480MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/42/28

Engineer Signature: Ben

Distance: 3m


Note: Report NO.:ATE20200411

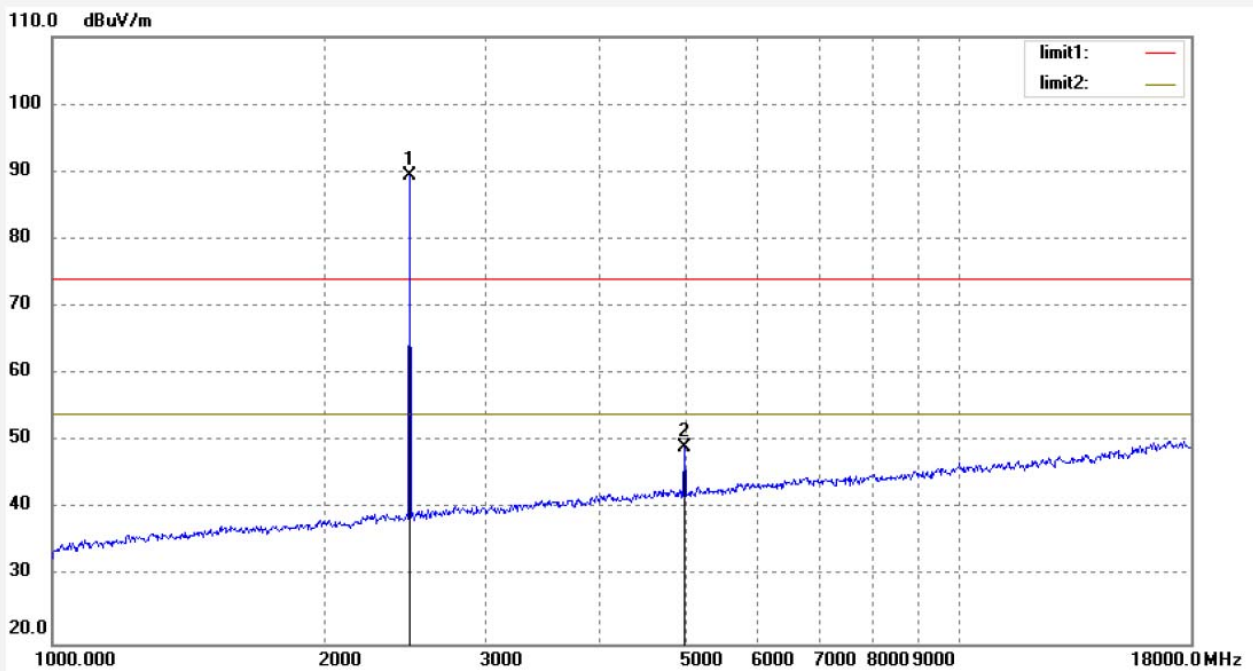

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	88.37	1.09	89.46			peak	150	196	
2	4960.000	40.63	8.60	49.23	74.00	-24.77	peak	150	196	

11. BAND EDGE COMPLIANCE TEST

11.1. Block Diagram of Test Setup



(EUT: True Wireless Stereo)

11.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4. Operating Condition of EUT

11.4.1. Setup the EUT and simulator as shown as Section 11.1.

11.4.2. Turn on the power of all equipment.

11.4.3. Let the EUT work in TX (Hopping off, Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

11.5. Test Procedure

11.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

11.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz with convenient frequency span including 100 kHz bandwidth from band edge.

11.5.3. The band edges was measured and recorded.


11.6. Test Result

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
GFSK		
2399.16	30.53	> 20dBc
2483.50	31.85	> 20dBc
π /4 DQPSK Mode		
2399.16	31.30	> 20dBc
2483.50	35.20	> 20dBc


Note: Both hopping-on mode and hopping-off mode had been pre-tested, and only the worst case was recorded in the test report.

The spectrum analyzer plots are attached as below.

GFSK Mode

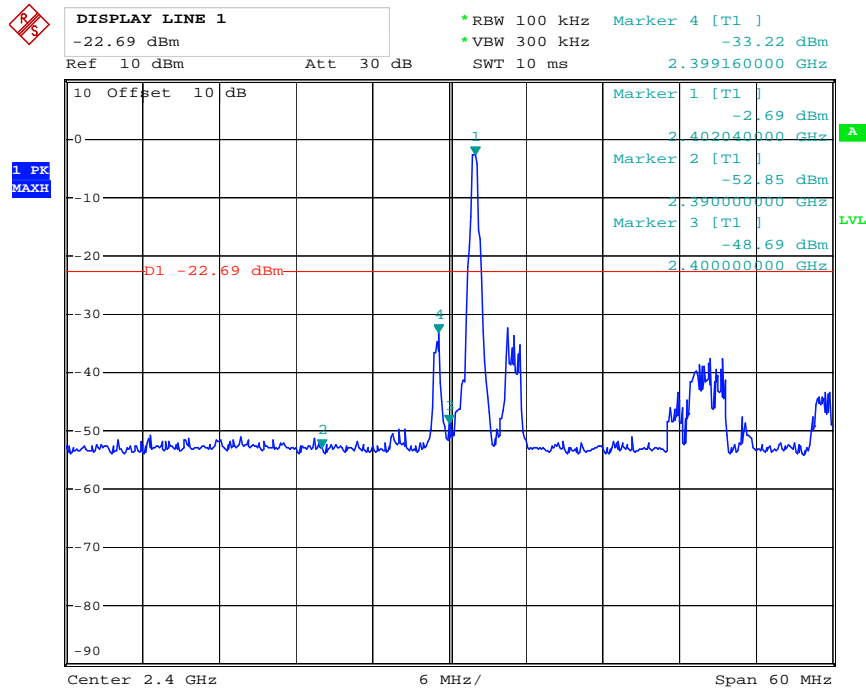


Date: 27.APR.2020 17:40:50

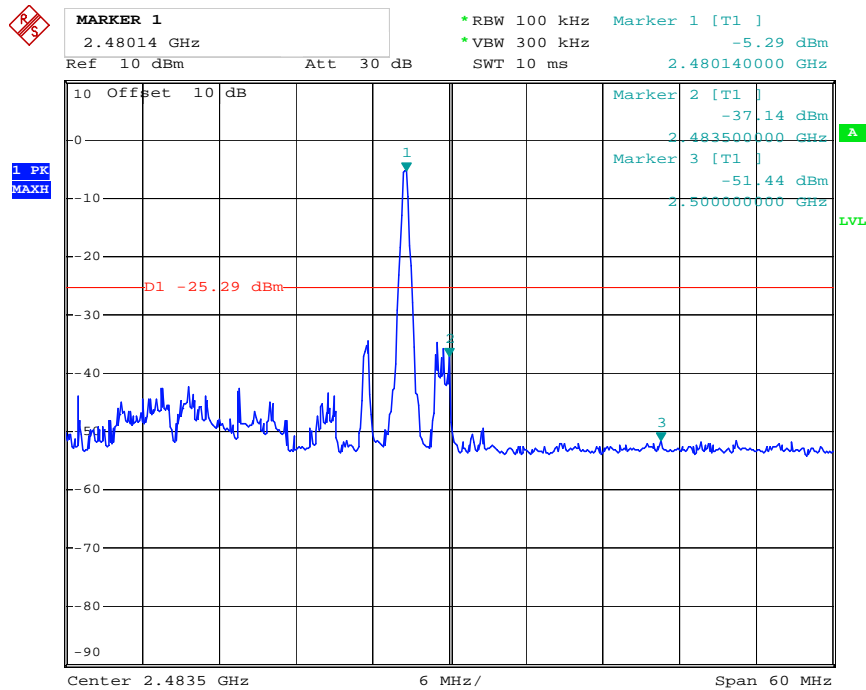


Date: 29.APR.2020 15:19:53

$\pi/4$ DQPSK Mode

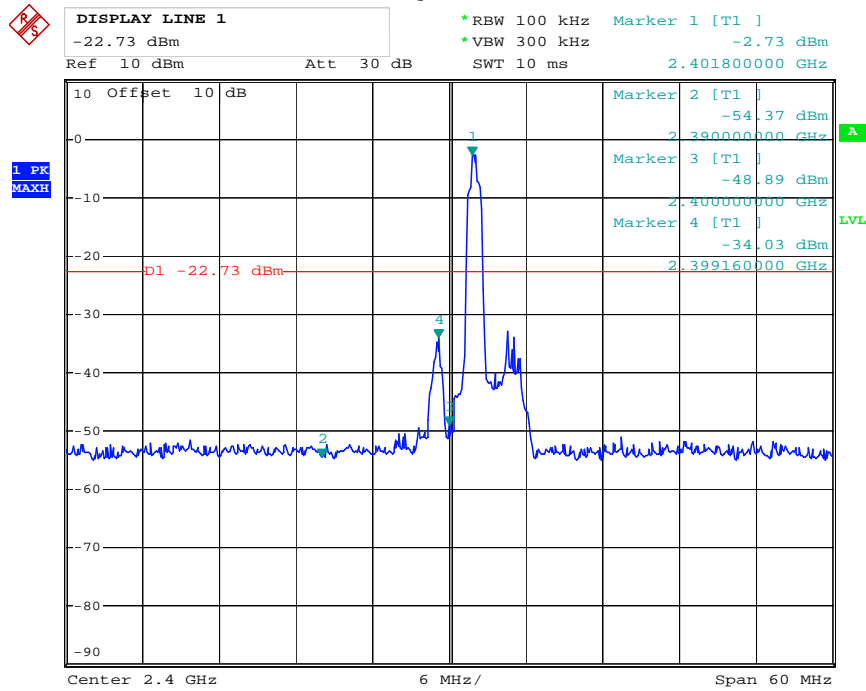

Date: 27.APR.2020 17:42:15

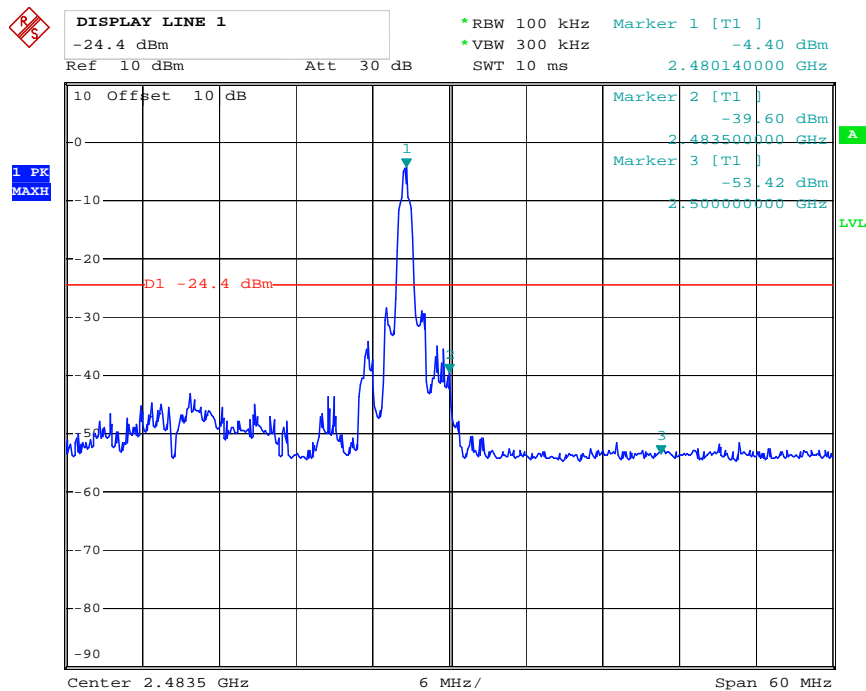

Date: 29.APR.2020 15:20:58

Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

3. Display the measurement of peak values.

Test Procedure:

The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

Let the EUT work in TX (Hopping off, Hopping on) modes measure it.
We select 2402MHz, 2480MHz TX frequency to transmit(Hopping off mode).
We select 2402-2480MHz TX frequency to transmit(Hopping on mode).

During the radiated emission test, the spectrum analyzer was set with the following configurations:

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- 3.All modes of operation were investigated and the worst-case emissions are reported.

Note:

- 1.We tested GFSK mode and $\pi/4$ DQPSK Mode and recorded the worst case data ($\pi/4$ DQPSK mode) for hopping mode.**

Non-hopping mode


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: jp2020 #70

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: DH1 TX 2402MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/47/57

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

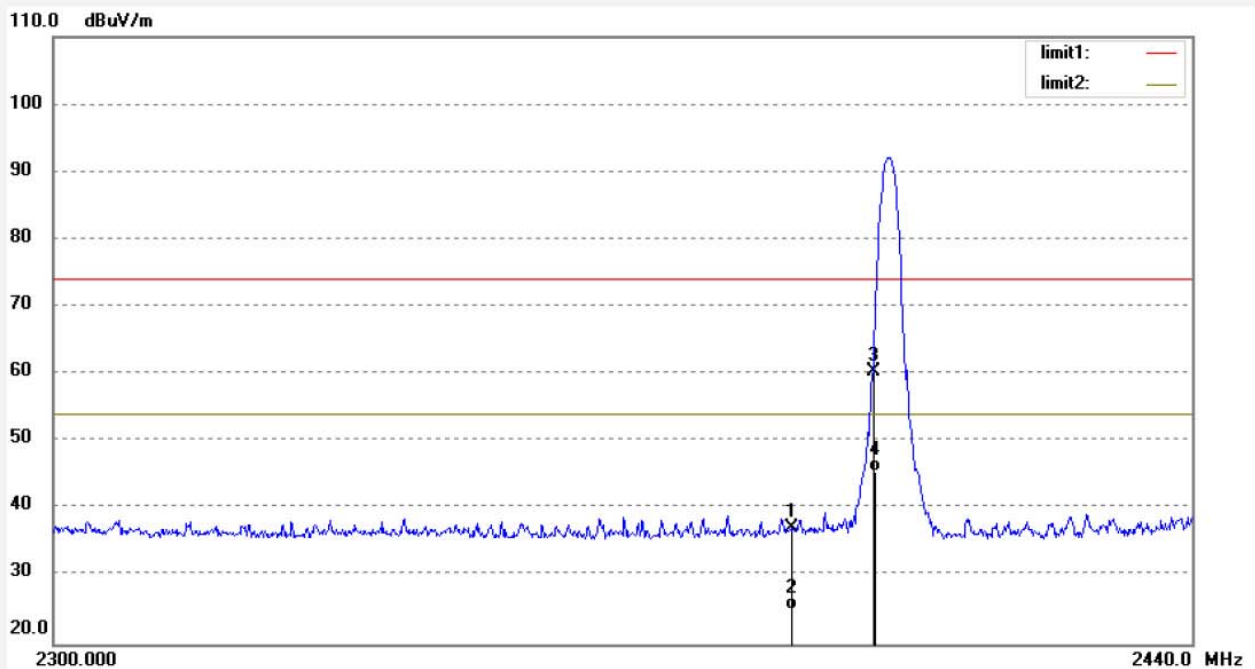

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	36.32	0.79	37.11	74.00	-36.89	peak	250	158	
2	2390.000	24.32	0.79	25.11	54.00	-28.89	AVG	250	158	
3	2400.000	59.53	0.88	60.41	74.00	-13.59	peak	250	236	
4	2400.000	44.62	0.88	45.50	54.00	-8.50	AVG	250	236	

Job No.: jp2020 #71

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: DH1 TX 2402MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/48/57

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

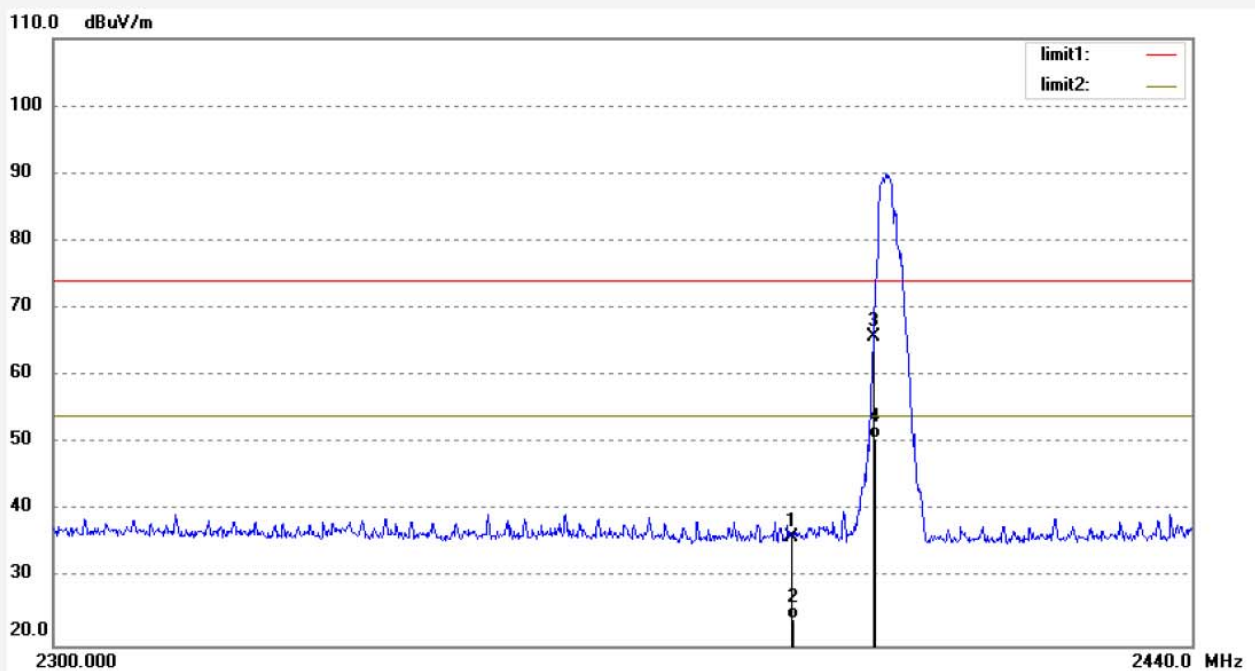

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	35.21	0.79	36.00	74.00	-38.00	peak	150	149	
2	2390.000	23.21	0.79	24.00	54.00	-30.00	AVG	150	149	
3	2400.000	64.83	0.88	65.71	74.00	-8.29	peak	150	219	
4	2400.000	49.82	0.88	50.70	54.00	-3.30	AVG	150	219	

Job No.: jp2020 #69

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: DH1 TX 2480MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/44/45

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

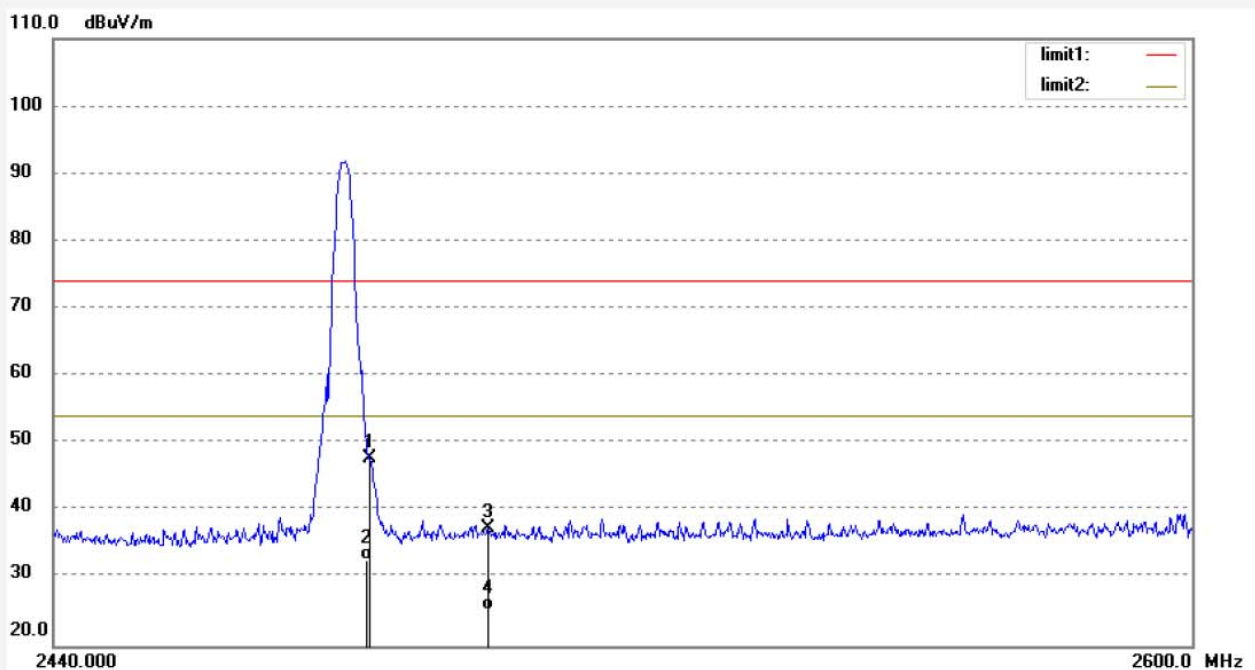

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	46.67	1.10	47.77	74.00	-26.23	peak	250	156	
2	2483.500	31.60	1.10	32.70	54.00	-21.30	AVG	250	156	
3	2500.000	36.30	1.10	37.40	74.00	-36.60	peak	250	205	
4	2500.000	24.30	1.10	25.40	54.00	-28.60	AVG	250	205	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: jp2020 #68

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: DH1 TX 2480MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/43/45

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

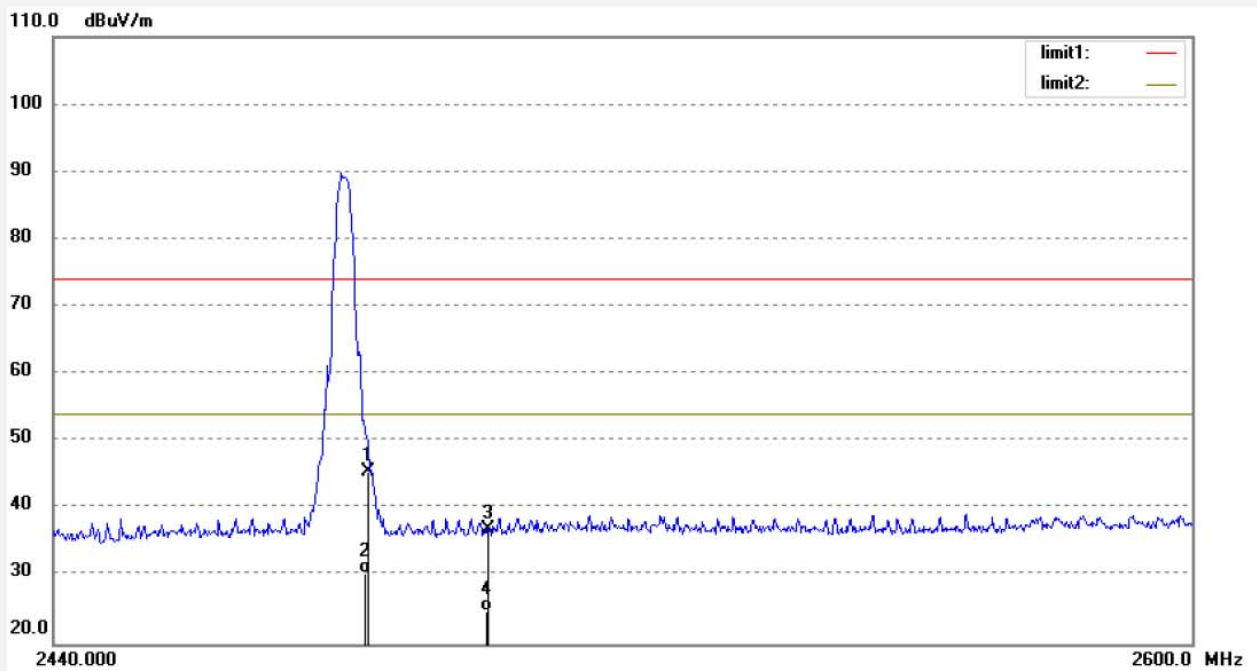

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.36	1.10	45.46	74.00	-28.54	peak	150	129	
2	2483.500	29.30	1.10	30.40	54.00	-23.60	AVG	150	129	
3	2500.000	35.84	1.10	36.94	74.00	-37.06	peak	150	198	
4	2500.000	23.80	1.10	24.90	54.00	-29.10	AVG	150	198	

Job No.: jp2020 #73

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: 2DH1 TX 2402MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/51/35

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

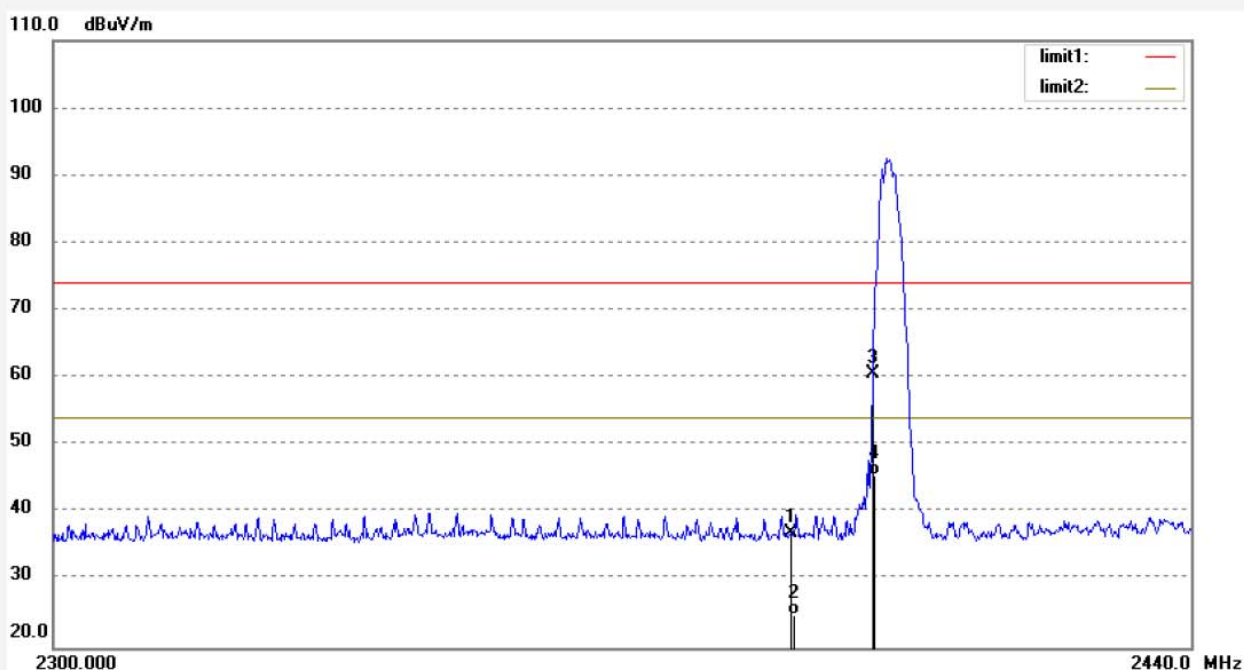

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	36.13	0.79	36.92	74.00	-37.08	peak	250	138	
2	2390.000	24.11	0.79	24.90	54.00	-29.10	AVG	250	138	
3	2400.000	59.70	0.88	60.58	74.00	-13.42	peak	250	196	
4	2400.000	44.72	0.88	45.60	54.00	-8.40	AVG	250	196	

Job No.: jp2020 #72

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: 2DH1 TX 2402MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/50/36

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

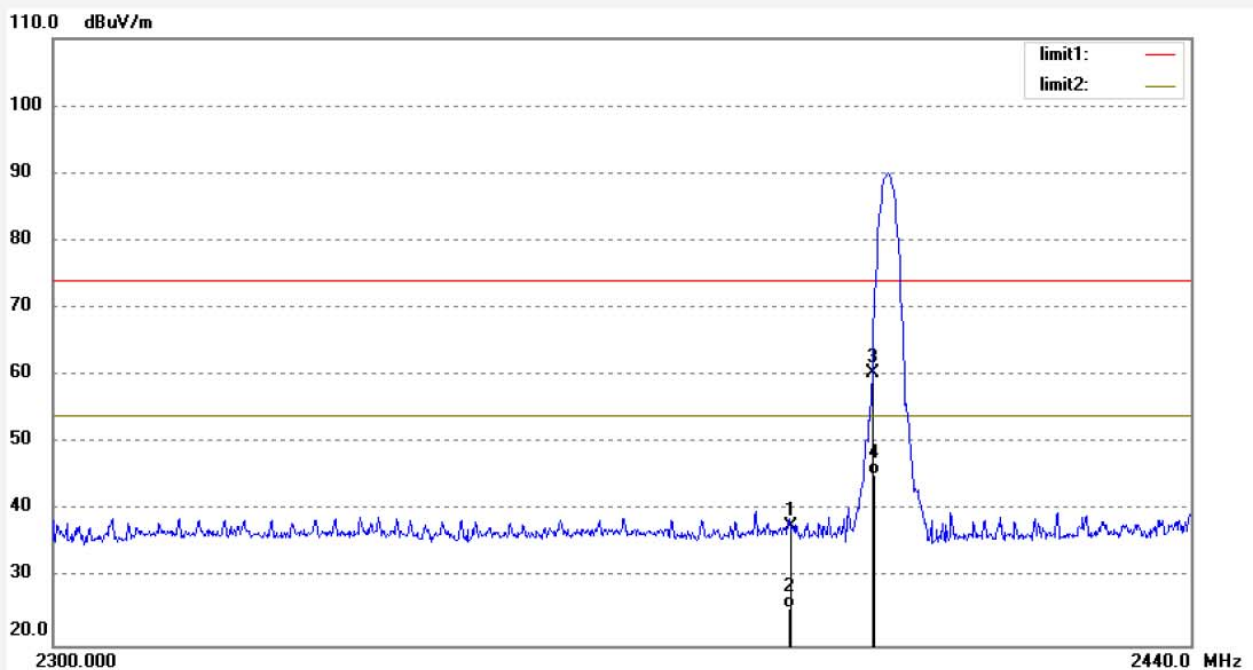

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	36.78	0.79	37.57	74.00	-36.43	peak	150	167	
2	2390.000	24.71	0.79	25.50	54.00	-28.50	AVG	150	167	
3	2400.000	59.55	0.88	60.43	74.00	-13.57	peak	150	202	
4	2400.000	44.52	0.88	45.40	54.00	-8.60	AVG	150	202	

Job No.: jp2020 #74

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: 2DH1 TX 2480MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/53/15

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

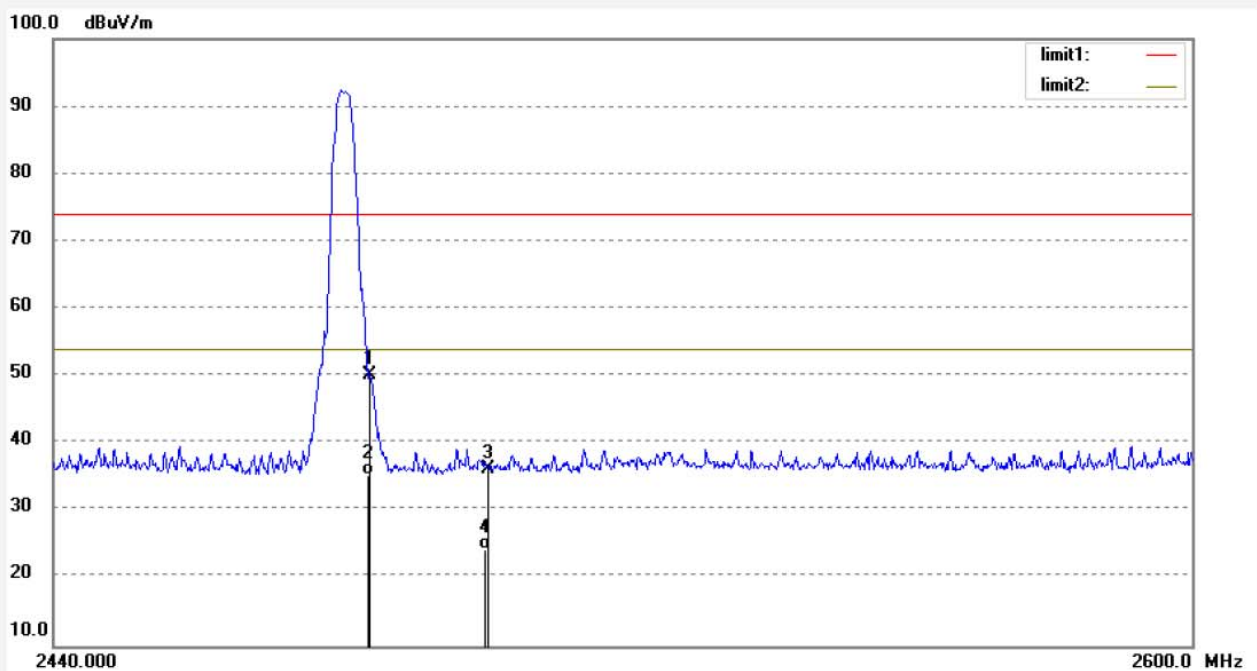

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	49.12	1.10	50.22	74.00	-23.78	peak	250	186	
2	2483.500	34.10	1.10	35.20	54.00	-18.80	AVG	250	186	
3	2500.000	35.20	1.10	36.30	74.00	-37.70	peak	250	215	
4	2500.000	23.20	1.10	24.30	54.00	-29.70	AVG	250	215	

Job No.: jp2020 #75

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: 2DH1 TX 2480MHz

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/54/17

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

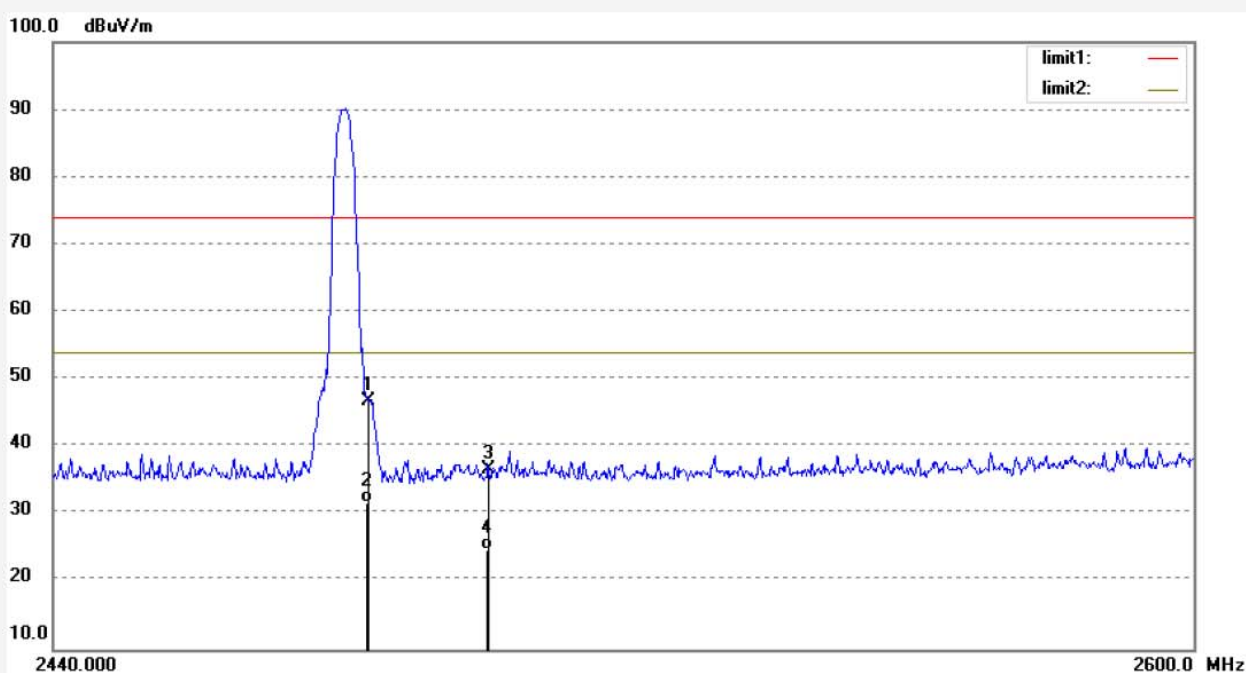

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	45.71	1.10	46.81	74.00	-27.19	peak	150	129	
2	2483.500	30.70	1.10	31.80	54.00	-22.20	AVG	150	129	
3	2500.000	35.60	1.10	36.70	74.00	-37.30	peak	150	186	
4	2500.000	23.60	1.10	24.70	54.00	-29.30	AVG	150	186	

Hopping mode(Worse case: $\pi/4$ DQPSK Mode)

ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: jp2020 #77

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: HOPPING

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Horizontal

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/58/42

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

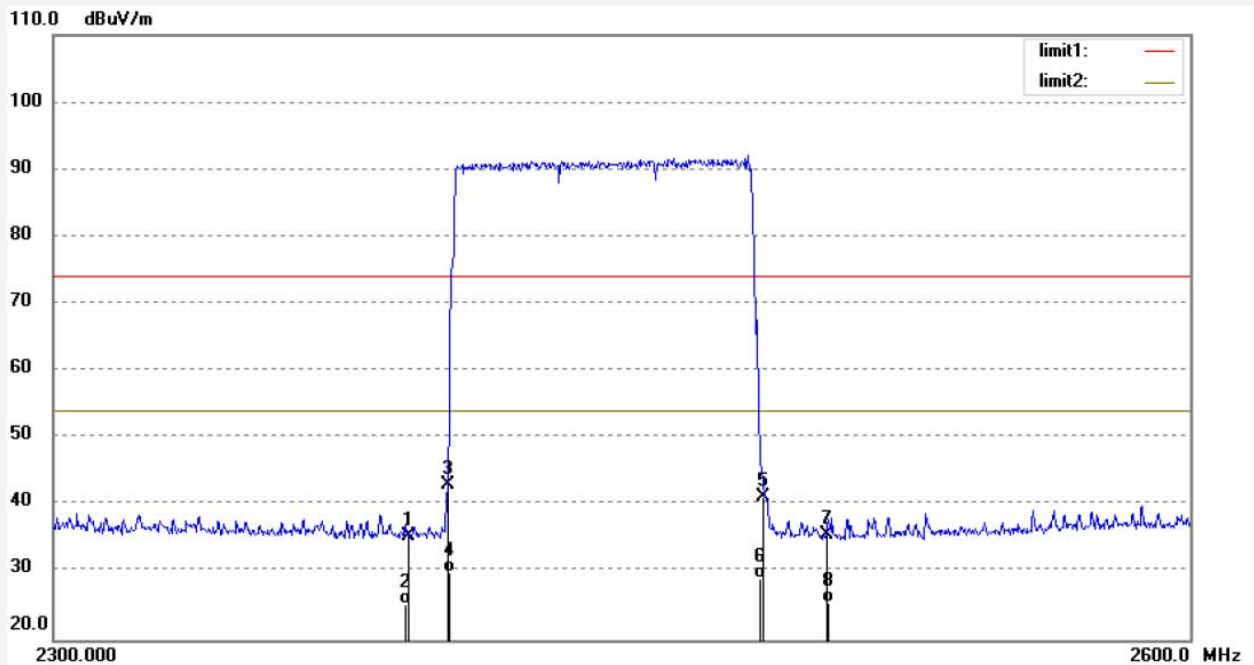

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	34.56	0.79	35.35	74.00	-38.65	peak	250	102	
2	2390.000	24.41	0.79	25.20	54.00	-28.80	AVG	250	102	
3	2400.000	42.22	0.88	43.10	74.00	-30.90	peak	250	163	
4	2400.000	29.22	0.88	30.10	54.00	-23.90	AVG	250	163	
5	2483.500	40.11	1.10	41.21	74.00	-32.79	peak	250	185	
6	2483.500	28.10	1.10	29.20	54.00	-24.80	AVG	250	185	
7	2500.000	34.54	1.10	35.64	74.00	-38.36	peak	250	215	
8	2500.000	24.40	1.10	25.50	54.00	-28.50	AVG	250	215	

Job No.: jp2020 #76

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: True Wireless Stereo

Mode: HOPPING

Model: CB-TE020

Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.

Polarization: Vertical

Power Source: DC 3.7V


Date: 2020/04/28/

Time: 8/56/22

Engineer Signature: Ben

Distance: 3m

Note: Report NO.:ATE20200411

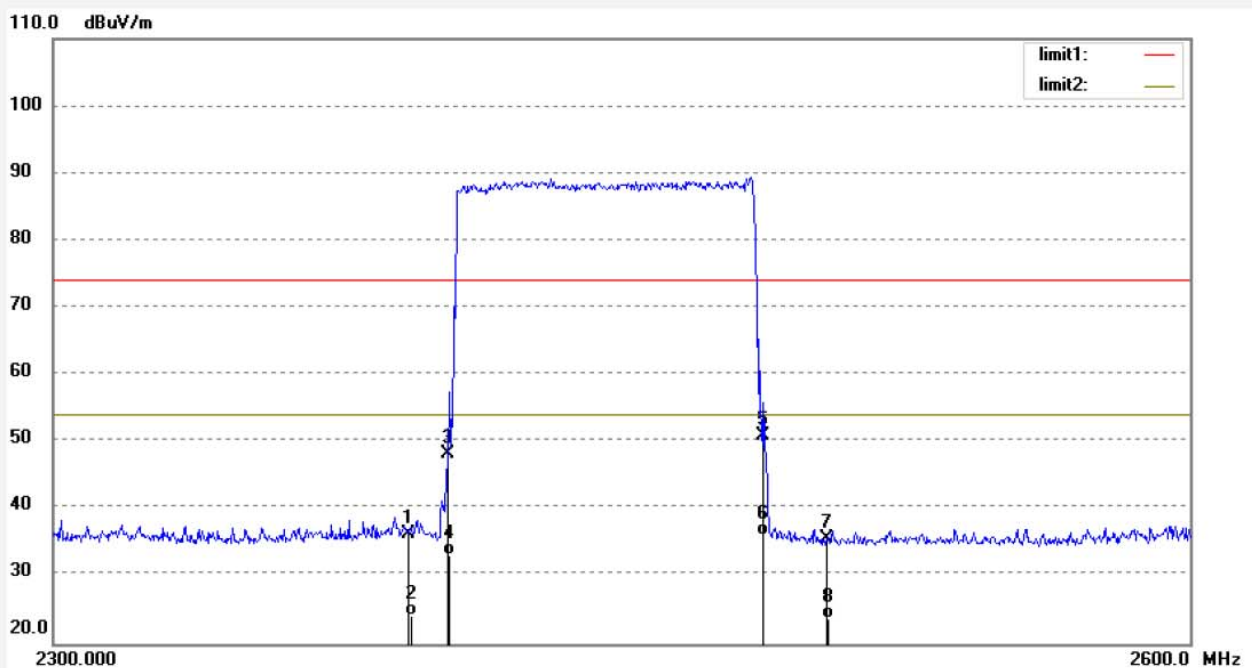


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	35.43	0.79	36.22	74.00	-37.78	peak	150	126	
2	2390.000	23.41	0.79	24.20	54.00	-29.80	AVG	150	126	
3	2400.000	47.25	0.88	48.13	74.00	-25.87	peak	150	156	
4	2400.000	32.22	0.88	33.10	54.00	-20.90	AVG	150	156	
5	2483.500	49.91	1.10	51.01	74.00	-22.99	peak	150	196	
6	2483.500	34.90	1.10	36.00	54.00	-18.00	AVG	150	196	
7	2500.000	34.61	1.10	35.71	74.00	-38.29	peak	150	263	
8	2500.000	22.50	1.10	23.60	54.00	-30.40	AVG	150	263	

12.AC POWER LINE CONDUCTED EMISSION FOR FCC PART


15 SECTION 15.207(A)

12.1.Block Diagram of Test Setup

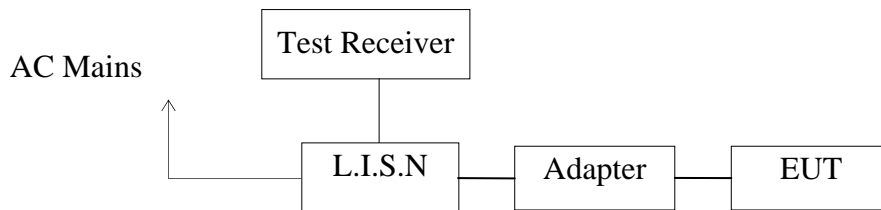

(EUT: True Wireless Stereo)

12.2.Test System Setup

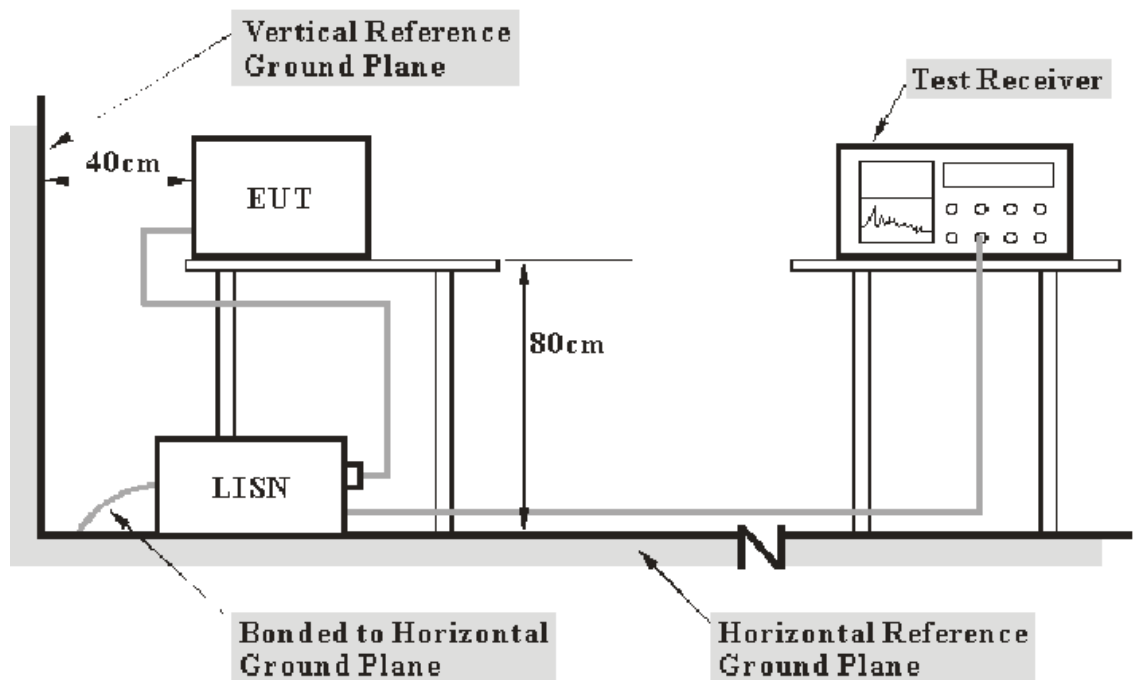

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

12.3. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.
 NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

12.4. Configuration of EUT on Measurement

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

12.5. Operating Condition of EUT

12.5.1. Setup the EUT and simulator as shown as Section 12.1.

12.5.2. Turn on the power of all equipment.

12.5.3. Let the EUT work in test mode and measure it.

12.6. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

12.7.Data Sample

Frequency (MHz)	Transducer value (dB)	QuasiPeak Level (dBμV)	Average Level (dBμV)	QuasiPeak Limit (dBμV)	Average Limit (dBμV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	10.5	51.1	34.2	56.0	46.0	4.9	11.8	Pass

Frequency(MHz) = Emission frequency in MHz

Transducer value(dB) = Insertion loss of LISN + Cable Loss

Level(dBμV) = Quasi-peak Reading/Average Reading + Transducer value

Limit (dBμV) = Limit stated in standard

Margin = Limit (dBμV) - Level (dBμV)

Calculation Formula:

Margin = Limit (dBμV) - Level (dBμV)

12.8.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

Emissions attenuated more than 20 dB below the permissible value are not reported.

We tested the conducted emission of high and low voltage mode and recorded the worst mode data. All data was recorded in the Quasi-peak and average detection mode.

Test mode : CHARGING (AC 120V/60Hz)								
MEASUREMENT RESULT: "ZC-0428-05_fin"								
2020-4-28 13:51								
Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE	
0.346000	30.20	10.9	59	28.9	QP	L1	GND	
0.500000	39.00	11.0	56	17.0	QP	L1	GND	
0.890000	29.20	11.1	56	26.8	QP	L1	GND	
4.880000	24.40	11.4	56	31.6	QP	L1	GND	
5.590000	26.50	11.5	60	33.5	QP	L1	GND	
21.780000	14.50	11.7	60	45.5	QP	L1	GND	
MEASUREMENT RESULT: "ZC-0428-05_fin2"								
2020-4-28 13:51								
Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE	
0.350000	17.60	10.9	49	31.4	AV	L1	GND	
0.504000	25.20	11.0	46	20.8	AV	L1	GND	
0.984000	19.90	11.1	46	26.1	AV	L1	GND	
4.765000	11.70	11.4	46	34.3	AV	L1	GND	
5.350000	12.50	11.5	50	37.5	AV	L1	GND	
21.020000	9.90	11.7	50	40.1	AV	L1	GND	

MEASUREMENT RESULT: "ZC-0428-06_fin"								
2020-4-28 13:54								
Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE	
0.150000	41.80	10.8	66	24.2	QP	N	GND	
0.502000	38.20	11.0	56	17.8	QP	N	GND	
0.880000	23.90	11.1	56	32.1	QP	N	GND	
2.435000	20.50	11.3	56	35.5	QP	N	GND	
5.575000	24.60	11.5	60	35.4	QP	N	GND	
13.000000	14.40	11.6	60	45.6	QP	N	GND	
MEASUREMENT RESULT: "ZC-0428-06_fin2"								
2020-4-28 13:54								
Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE	
0.150000	35.90	10.8	56	20.1	AV	N	GND	
0.500000	26.20	11.0	46	19.8	AV	N	GND	
1.002000	19.20	11.1	46	26.8	AV	N	GND	
2.435000	12.20	11.3	46	33.8	AV	N	GND	
5.630000	8.20	11.5	50	41.8	AV	N	GND	
20.475000	6.00	11.7	50	44.0	AV	N	GND	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: True Wireless Stereo M/N:CB-TE020
 Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.
 Operating Condition: CHARGING
 Test Site: 1#Shielding Room
 Operator: Ben
 Test Specification: L 120V/60Hz
 Comment: Report NO.:ATE20200411
 Start of Test: 2020-4-28 / 13:49:55

SCAN TABLE: "V 150K-30MHZ fin"

Short Description: SUB STD VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

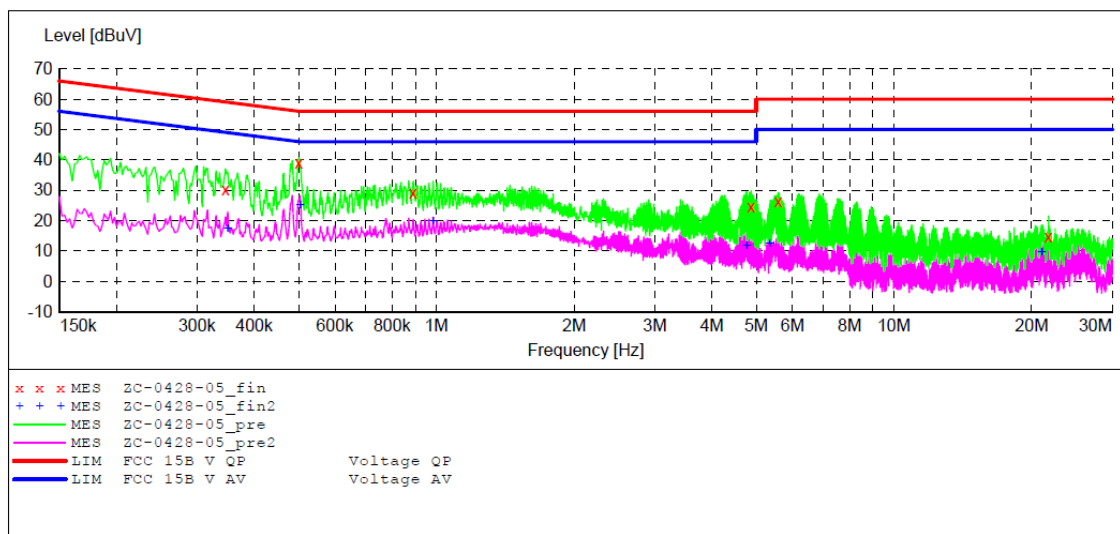

MEASUREMENT RESULT: "ZC-0428-05_fin"

2020-4-28 13:51

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.346000	30.20	10.9	59	28.9	QP	L1	GND
0.500000	39.00	11.0	56	17.0	QP	L1	GND
0.890000	29.20	11.1	56	26.8	QP	L1	GND
4.880000	24.40	11.4	56	31.6	QP	L1	GND
5.590000	26.50	11.5	60	33.5	QP	L1	GND
21.780000	14.50	11.7	60	45.5	QP	L1	GND

MEASUREMENT RESULT: "ZC-0428-05_fin2"

2020-4-28 13:51

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.350000	17.60	10.9	49	31.4	AV	L1	GND
0.504000	25.20	11.0	46	20.8	AV	L1	GND
0.984000	19.90	11.1	46	26.1	AV	L1	GND
4.765000	11.70	11.4	46	34.3	AV	L1	GND
5.350000	12.50	11.5	50	37.5	AV	L1	GND
21.020000	9.90	11.7	50	40.1	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: True Wireless Stereo M/N:CB-TE020
 Manufacturer: SHENZHEN CLEVER BRIGHT IMP. & EXP. Co., LTD.
 Operating Condition: CHARGING
 Test Site: 1#Shielding Room
 Operator: Ben
 Test Specification: N 120V/60Hz
 Comment: Report NO.:ATE20200411
 Start of Test: 2020-4-28 / 13:52:15

SCAN TABLE: "V 150K-30MHZ fin"

Short Description: SUB STD VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

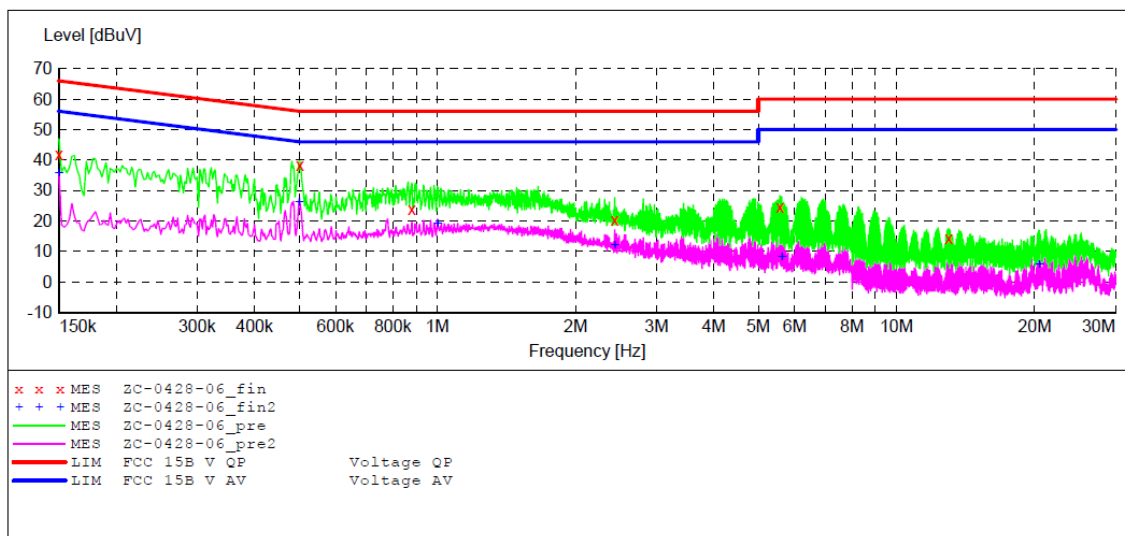

MEASUREMENT RESULT: "ZC-0428-06_fin"

2020-4-28 13:54

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	41.80	10.8	66	24.2	QP	N	GND
0.502000	38.20	11.0	56	17.8	QP	N	GND
0.880000	23.90	11.1	56	32.1	QP	N	GND
2.435000	20.50	11.3	56	35.5	QP	N	GND
5.575000	24.60	11.5	60	35.4	QP	N	GND
13.000000	14.40	11.6	60	45.6	QP	N	GND

MEASUREMENT RESULT: "ZC-0428-06_fin2"

2020-4-28 13:54

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	35.90	10.8	56	20.1	AV	N	GND
0.500000	26.20	11.0	46	19.8	AV	N	GND
1.002000	19.20	11.1	46	26.8	AV	N	GND
2.435000	12.20	11.3	46	33.8	AV	N	GND
5.630000	8.20	11.5	50	41.8	AV	N	GND
20.475000	6.00	11.7	50	44.0	AV	N	GND

13.ANTENNA REQUIREMENT

13.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

13.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 1.05dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.