



2437 MHz

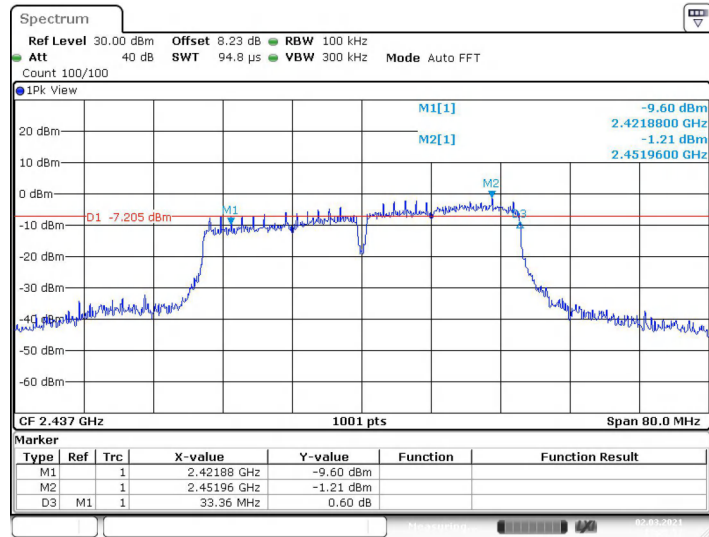

Date: 2.MAR.2021 18:28:52


2452 MHz

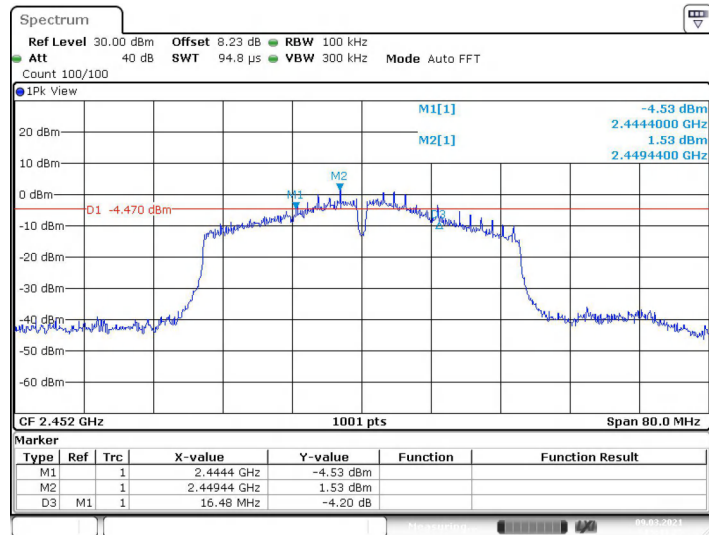

Date: 9.MAR.2021 16:41:20


Test Mode:	802.11b Mode	
Channel frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	12.867	≥0.5
2437	13.467	
2462	13.586	

2412 MHz

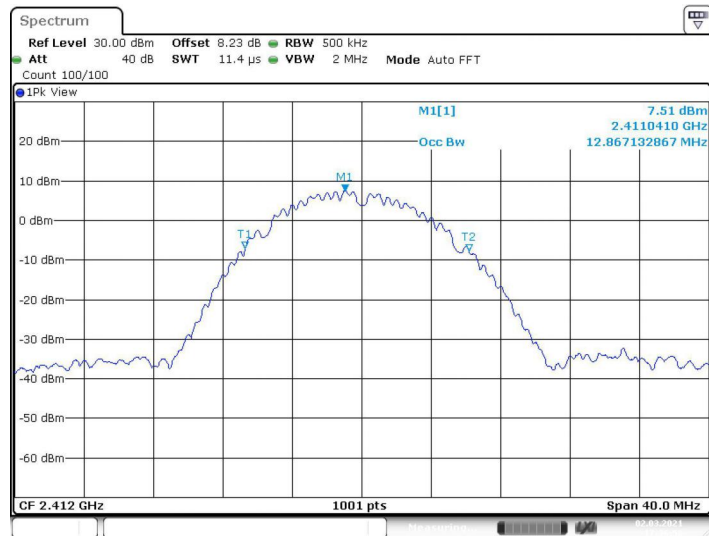


Date: 2.MAR.2021 17:36:58

2437 MHz

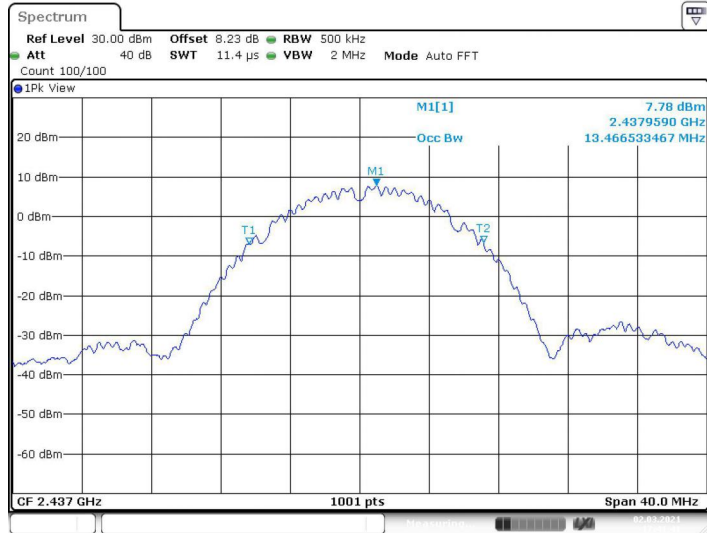


2462 MHz

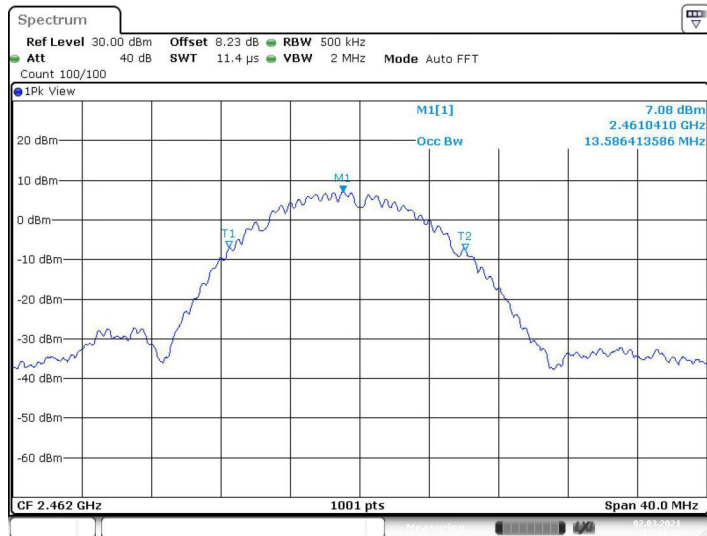


Test Mode:	802.11g Mode	
Channel frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	17.063	≥0.5
2437	17.143	
2462	17.463	

2412 MHz

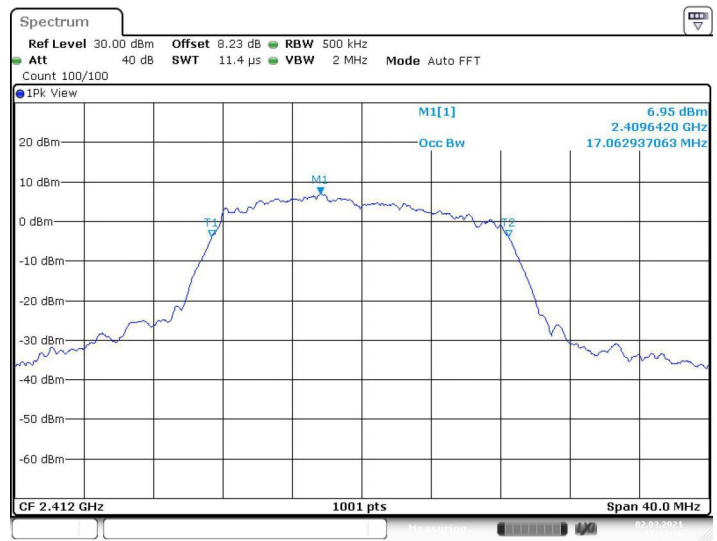


Date: 2.MAR.2021 17:47:18

2437 MHz

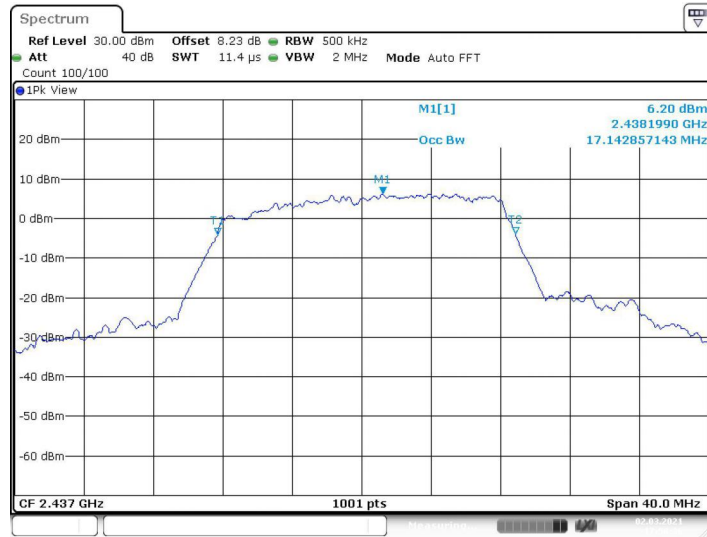

Date: 2.MAR.2021 17:50:36

2462 MHz

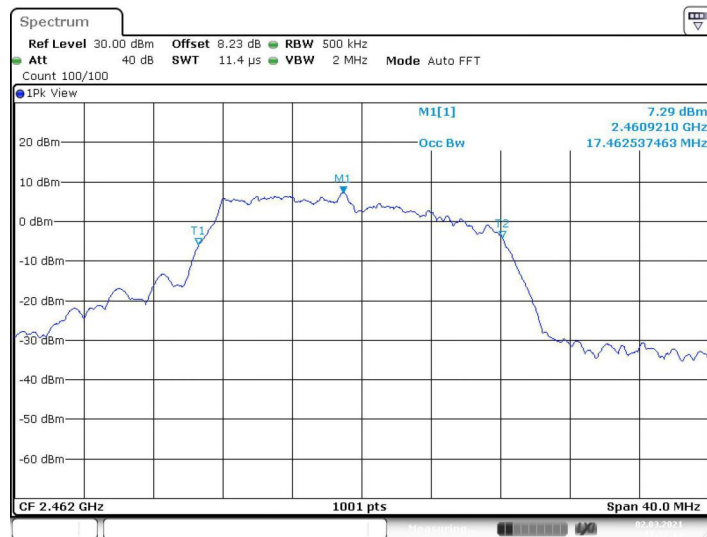

Date: 2.MAR.2021 17:52:14


Test Mode:	802.11n(HT20) Mode	
Channel frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	17.862	>=0.5
2437	18.102	
2462	19.341	

2412 MHz



Date: 2.MAR.2021 17:54:55

2437 MHz

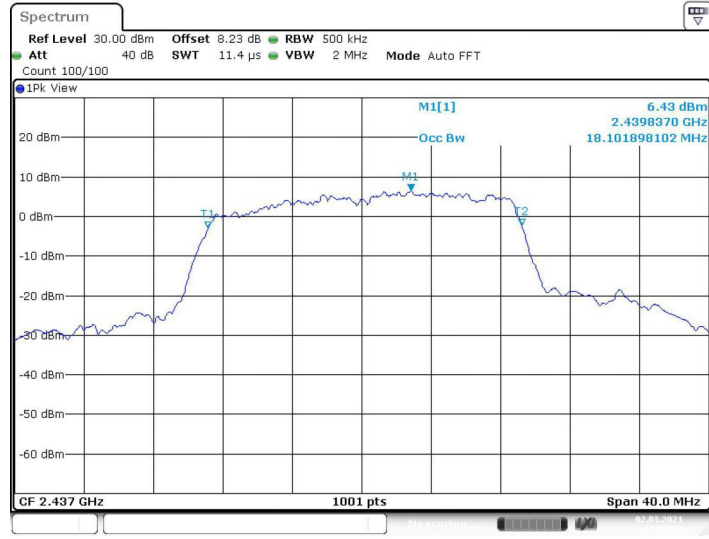

Date: 2.MAR.2021 17:57:37


2462 MHz



Date: 2.MAR.2021 17:59:39


Test Mode:	802.11n(HT40) Mode	
Channel frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2422	36.843	>=0.5
2437	36.204	
2452	34.845	

2422 MHz

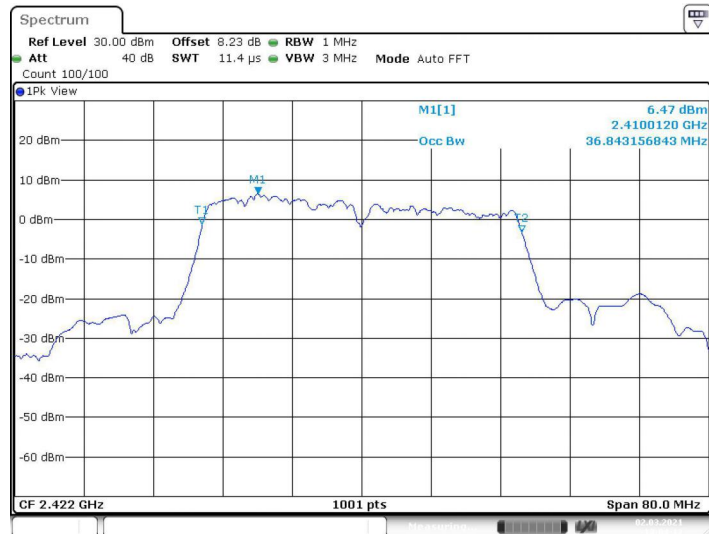

Date: 2.MAR.2021 18:04:11

2437 MHz

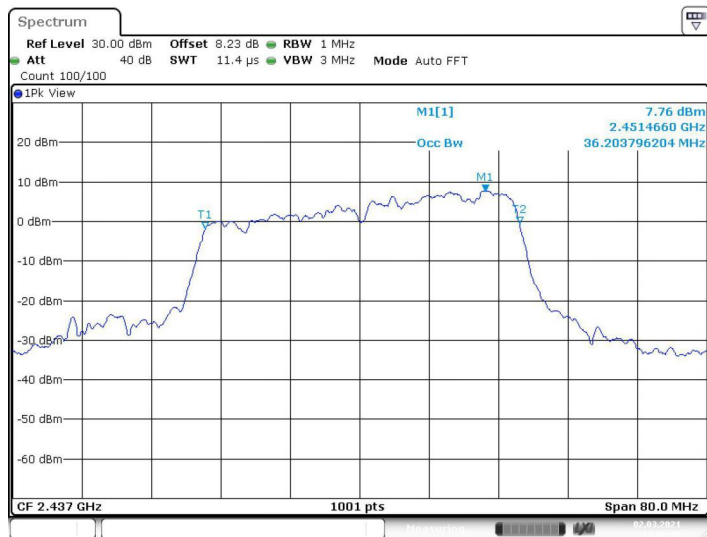

Date: 2.MAR.2021 18:06:50

2452 MHz



Date: 9.MAR.2021 16:41:32


3.5. Band edge and Spurious Emission (conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Configuration

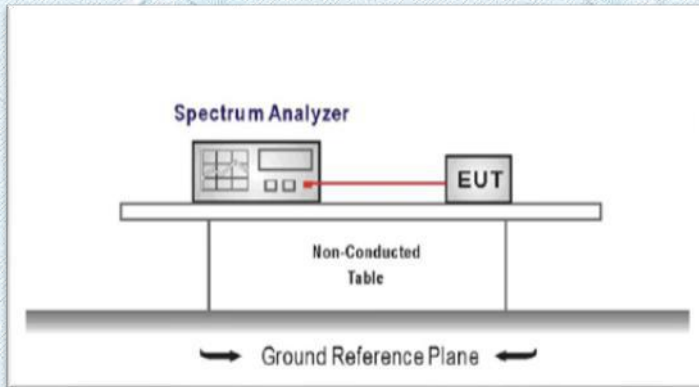

Test Procedure

1. Connect EUT RF Output port to the Spectrum Analyzer through an RF attenuator.
2. Spectrum Setting:
 - RBW=100KHz
 - VBW=300KHz.
 - Detector function: Peak.
 - Trace: Max hold.
 - Sweep = Auto couple.

Allow the trace to stabilize.


Test Mode

Please refer to the clause 2.2.

Test Results


802.11b

CH01-Bandedge

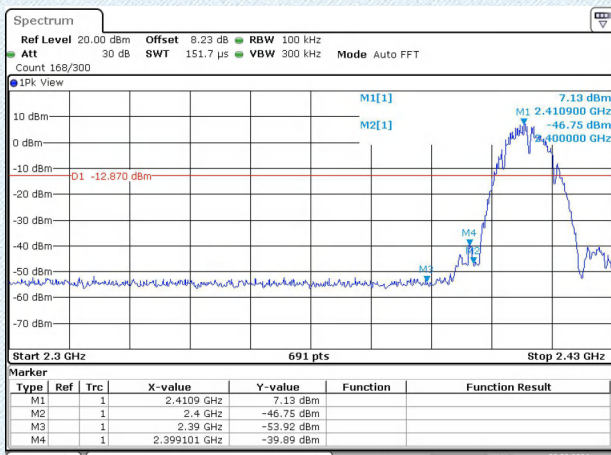

Date: 2.MAR.2021 17:37:20


CH11-Bandedge

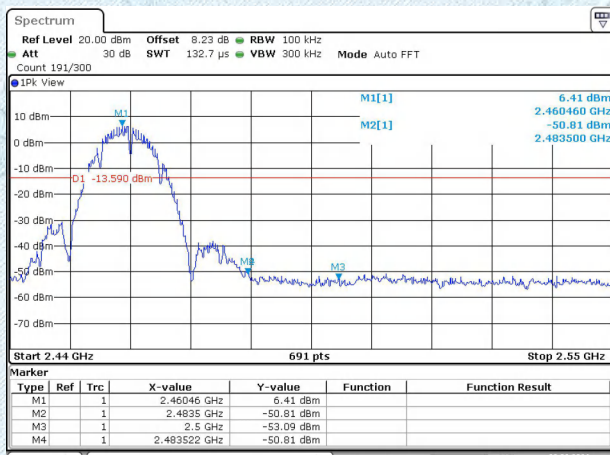


Date: 2.MAR.2021 17:45:00

802.11b

CH01-SE

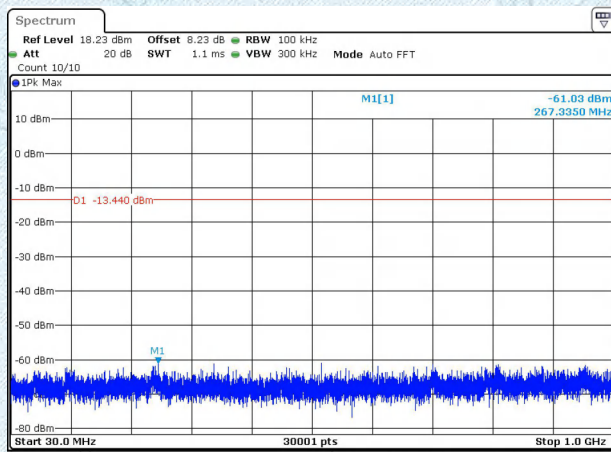


Date: 2.MAR.2021 17:38:24

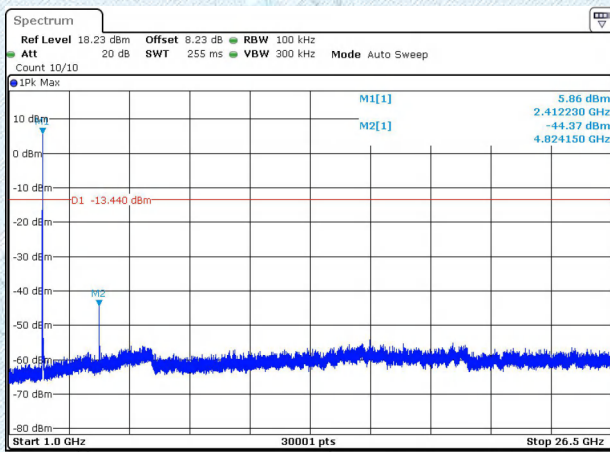


Date: 2.MAR.2021 17:38:47

CH06-SE


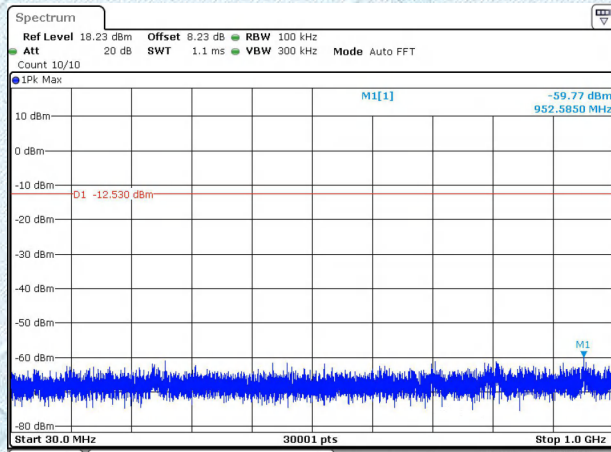


Date: 2.MAR.2021 17:42:04

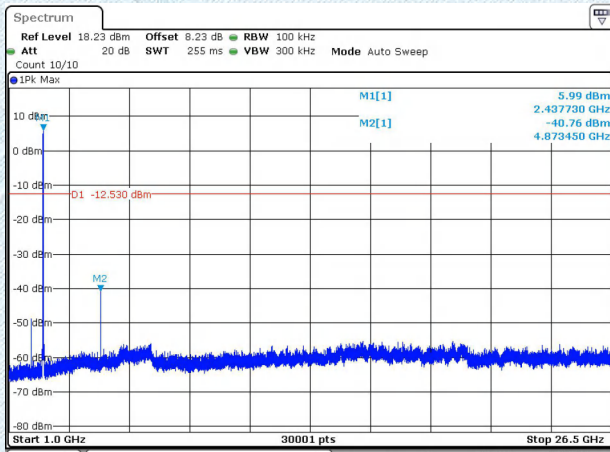


Date: 2.MAR.2021 17:42:27

CH11-SE

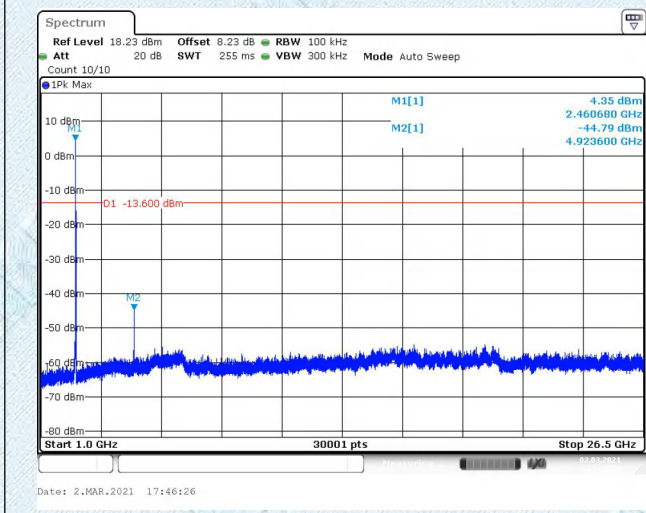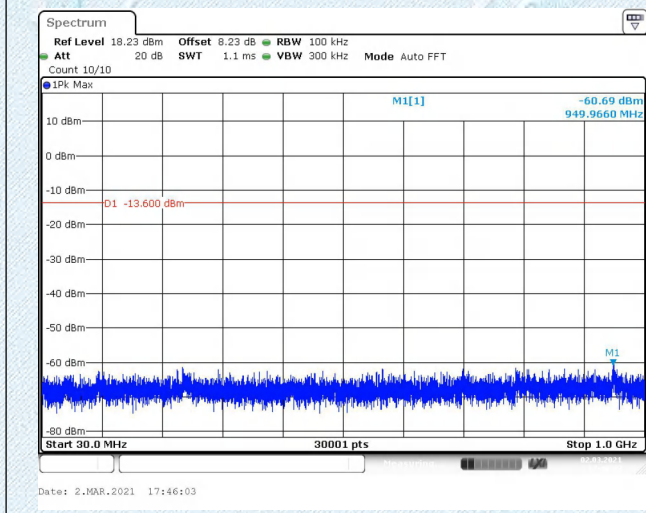


802.11g

CH01-Bandedge


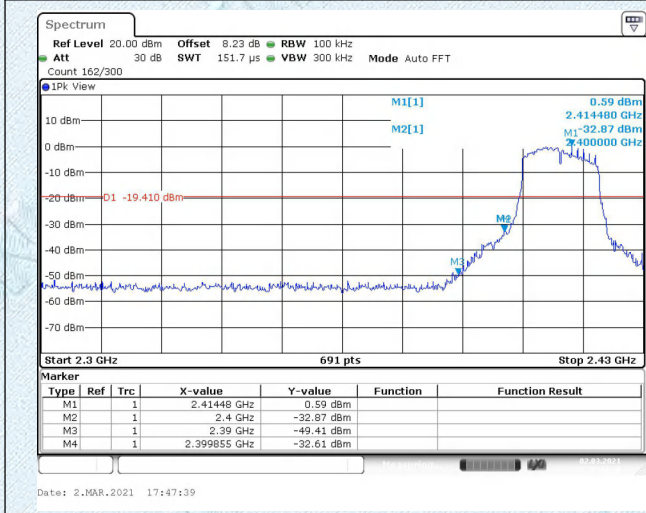


CH11-Bandedge


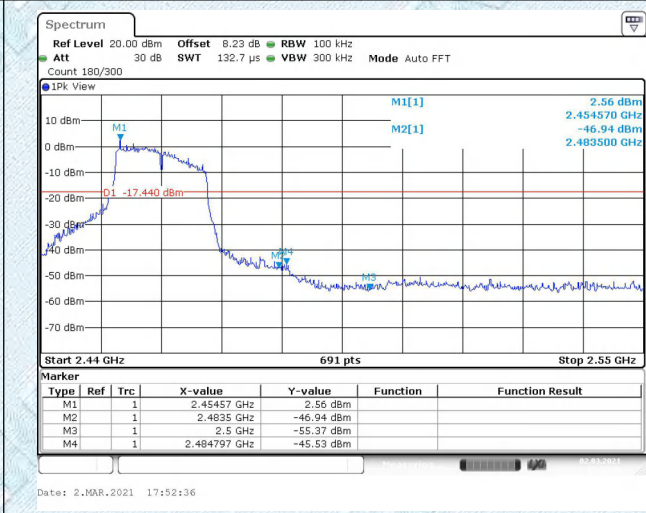


802.11g



CH01-SE

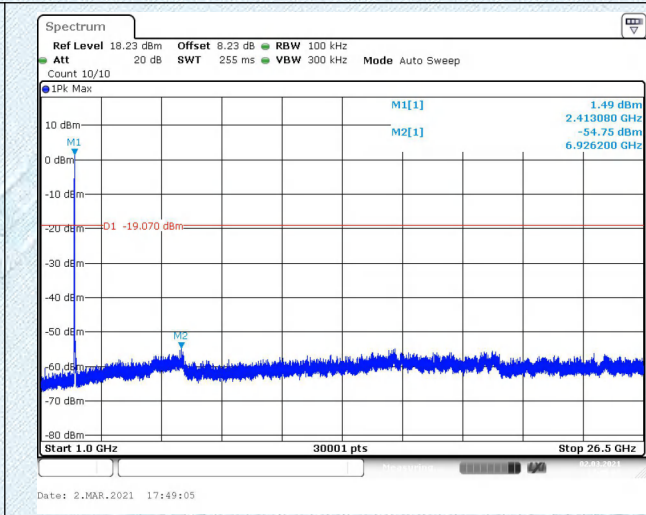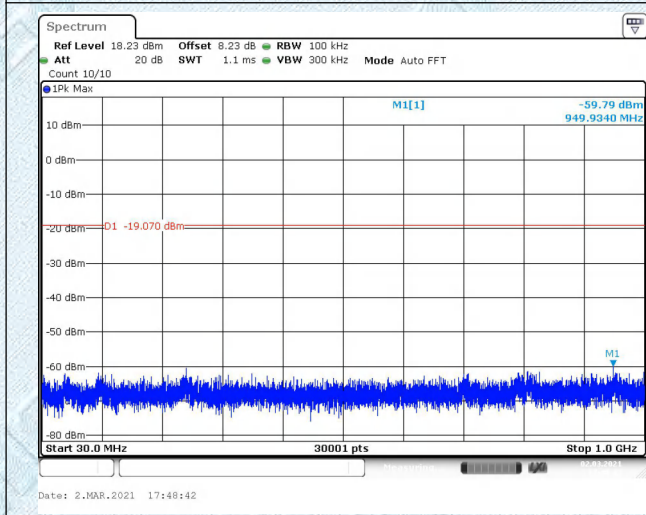

CH06-SE

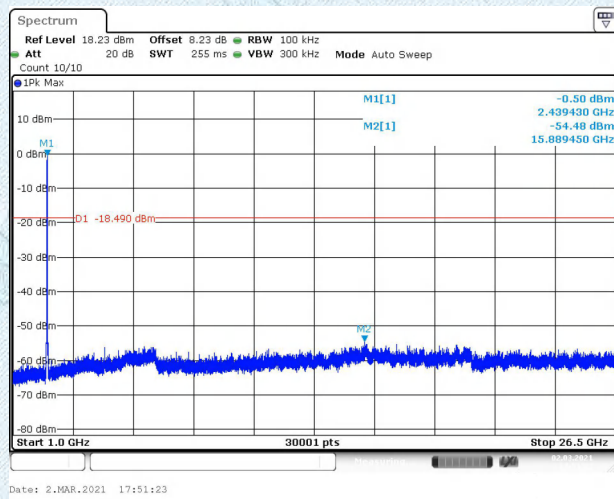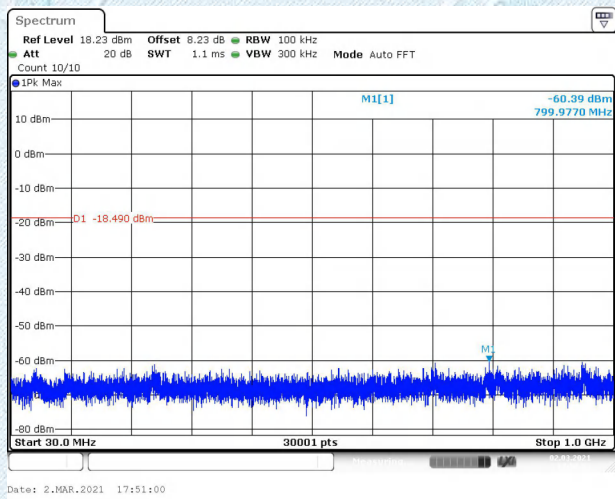


CH11-SE

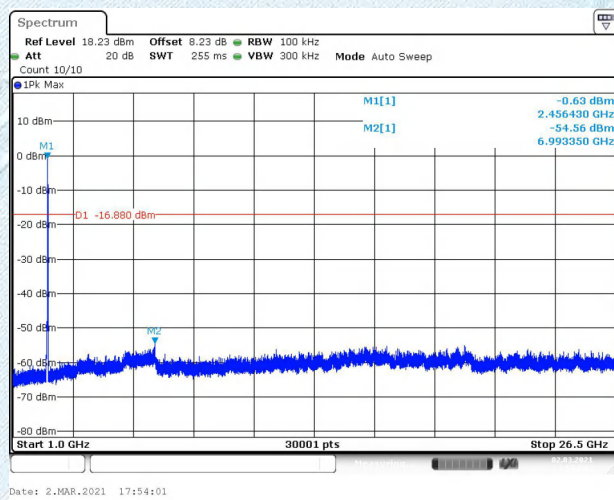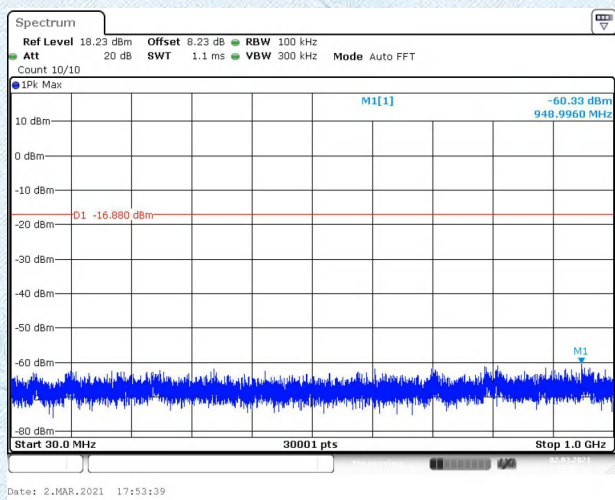

802.11n(HT20)

CH01-Bandedge


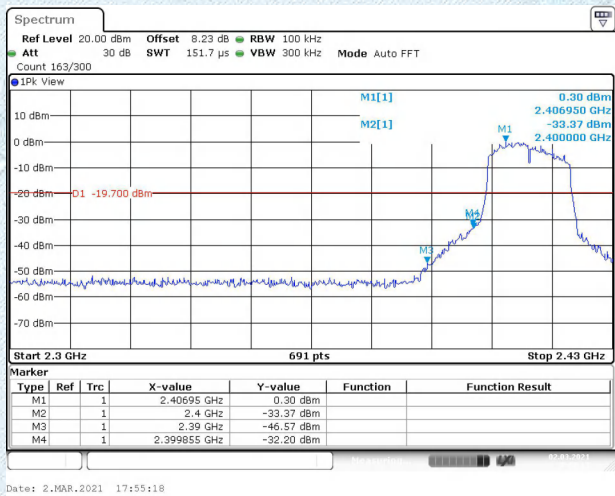


CH11-Bandedge



802.11n(HT20)



CH01-SE

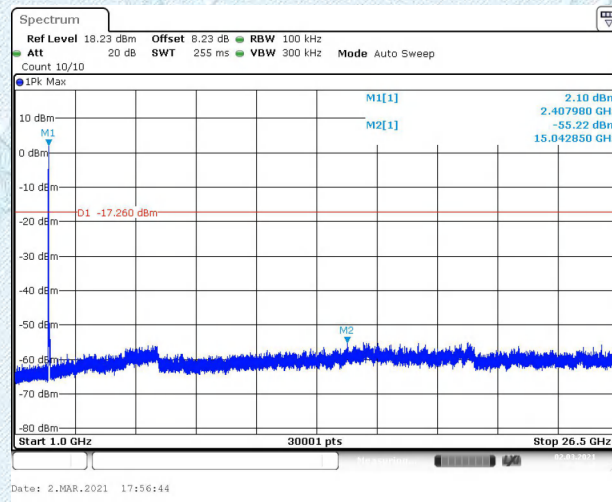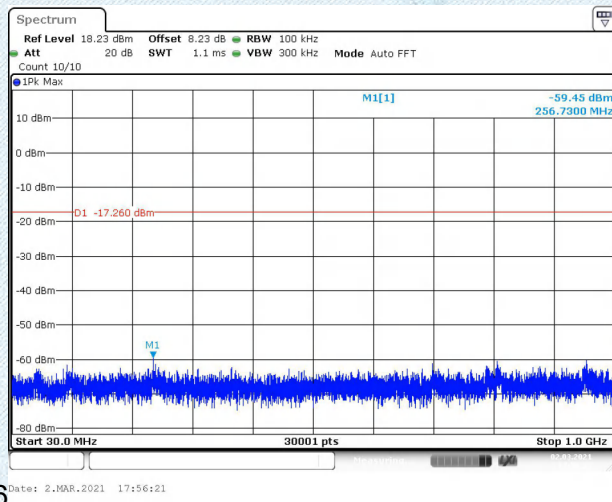

6 Date: 2.MAR.2021 17:56:21

Date: 2.MAR.2021 17:56:44



CH06-SE

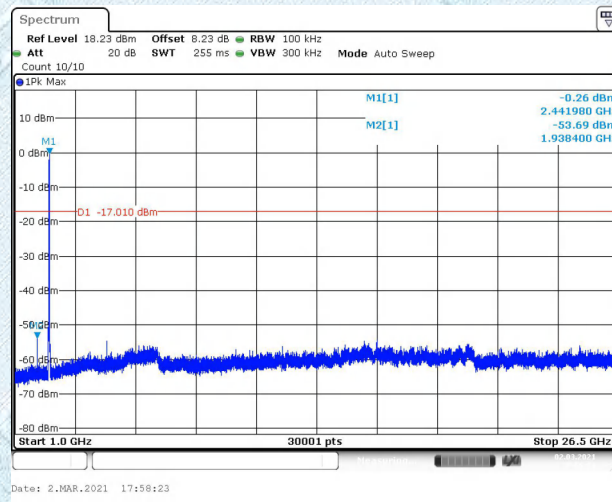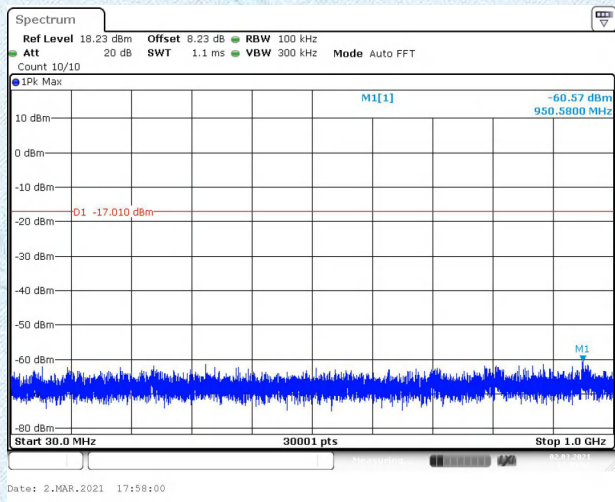

Date: 2.MAR.2021 17:58:00

Date: 2.MAR.2021 17:58:23

CH11-SE

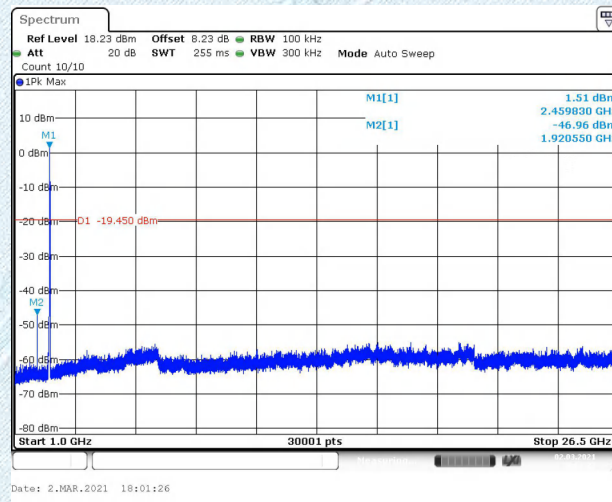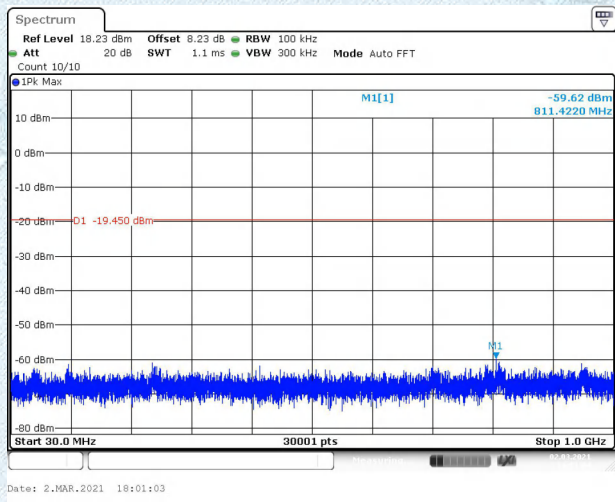



Date: 2.MAR.2021 18:01:03

Date: 2.MAR.2021 18:01:26

802.11n(HT40)

CH03-Bandedge

CH09-Bandedge

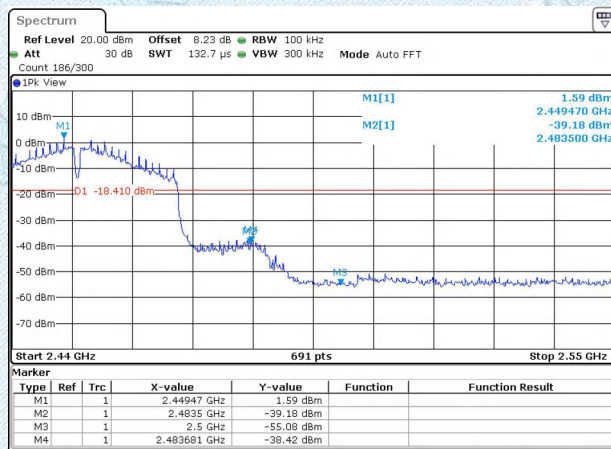
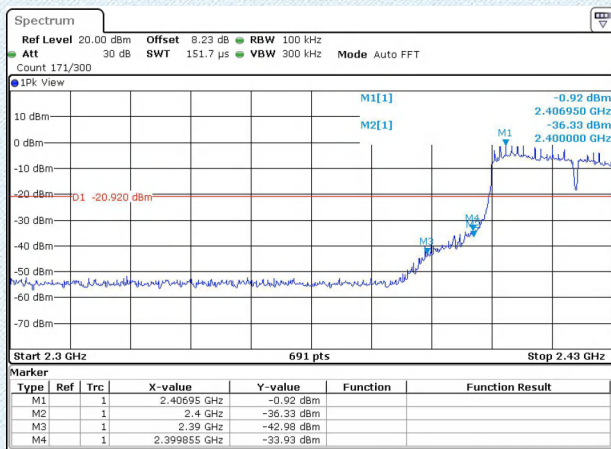


Date: 2.MAR.2021 18:04:33

Date: 2.MAR.2021 18:06:48

802.11n(HT40)



CH03-SE

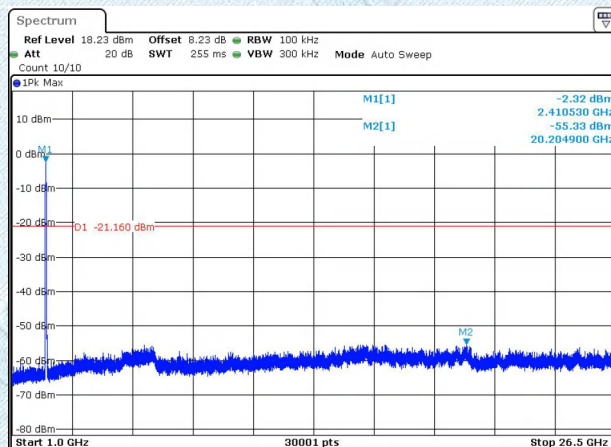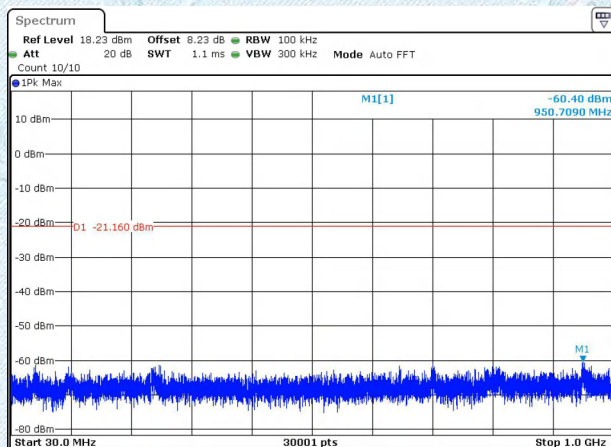

Date: 2.MAR.2021 18:05:36

Date: 2.MAR.2021 18:05:59



CH06-SE

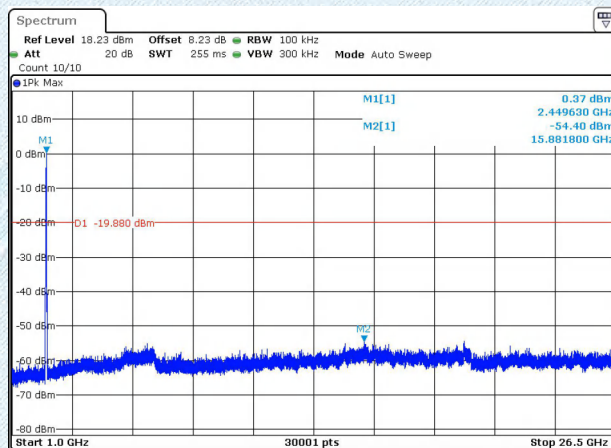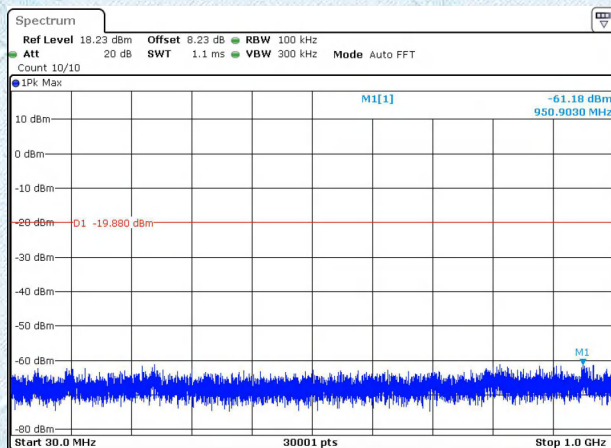

Date: 2.MAR.2021 18:07:13

Date: 2.MAR.2021 18:07:36

CH09-SE

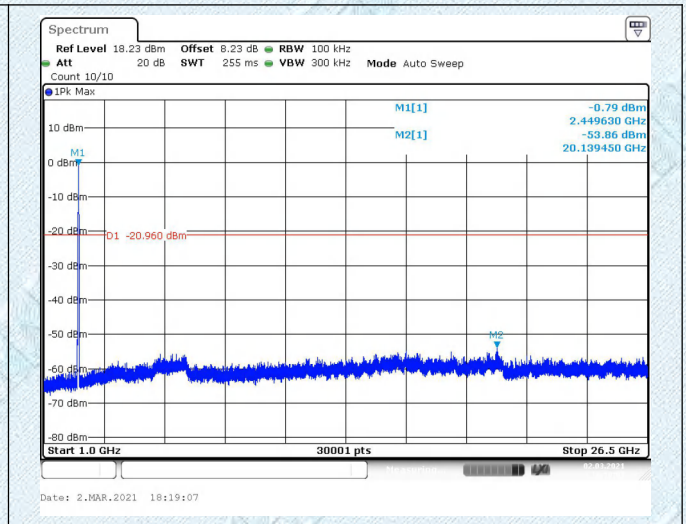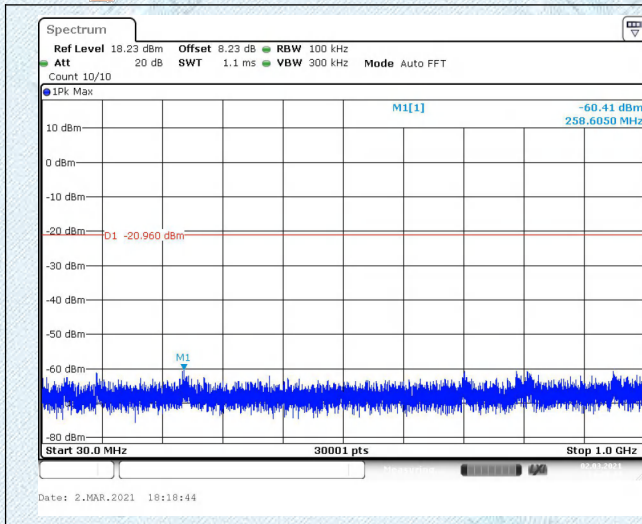


3.6. Band Edge Emissions(Radiated)

Limit

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Note: All restriction bands have been tested, only the worst case is reported.

Test Configuration

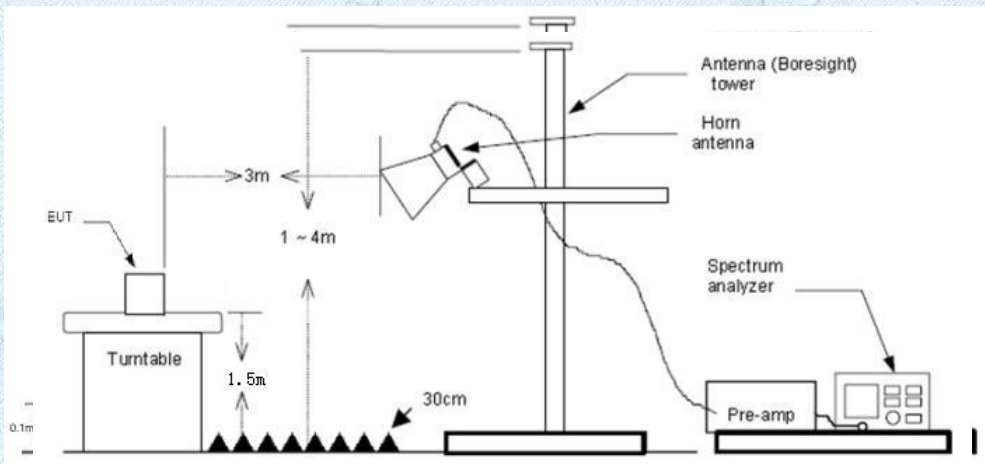

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
 RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
 RBW=1MHz, VBW=10Hz with PEAK detector for Average Value.

Test Mode

Please refer to the clause 2.2.

Test Results


Note:

1.Measurement = Reading level + Correct Factor

Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor


2.Pre-scan 802.11b, 802.11g, 802.11n(HT20) and 802.11n(HT40) mode, and found the 802.11g mode which it is worse case, so only show the test data for worse case.


Test Voltage:	DC 3.7V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2412MHz

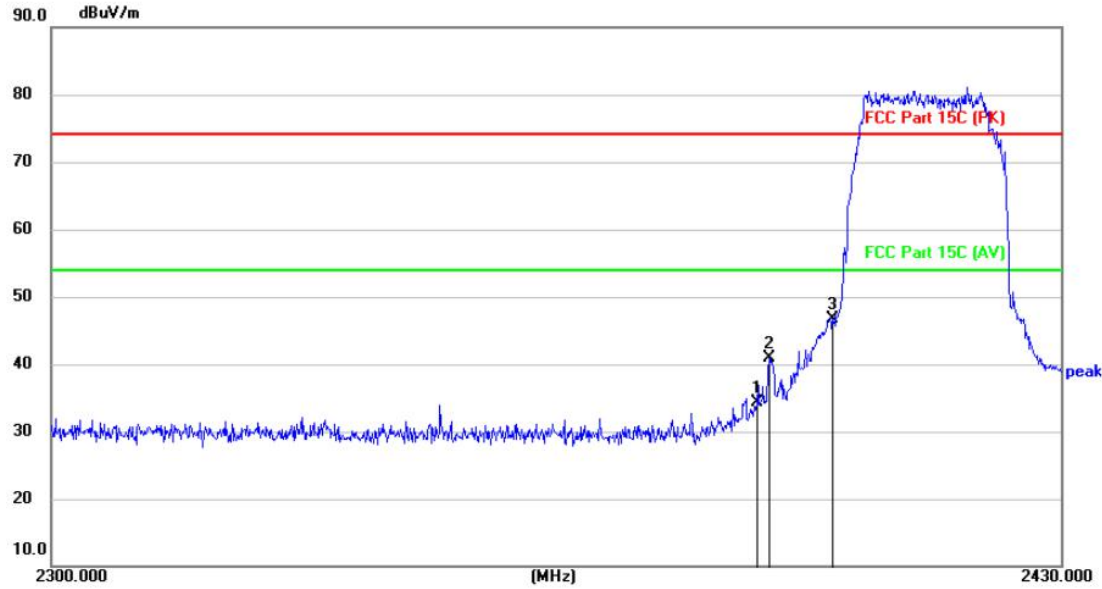


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		2390.000	45.15	-10.92	34.23	74.00	-39.77	peak
2		2391.806	51.79	-10.92	40.87	74.00	-33.13	peak
3	*	2400.000	57.57	-10.92	46.65	74.00	-27.35	peak

Measurement = Reading level + Correct Factor

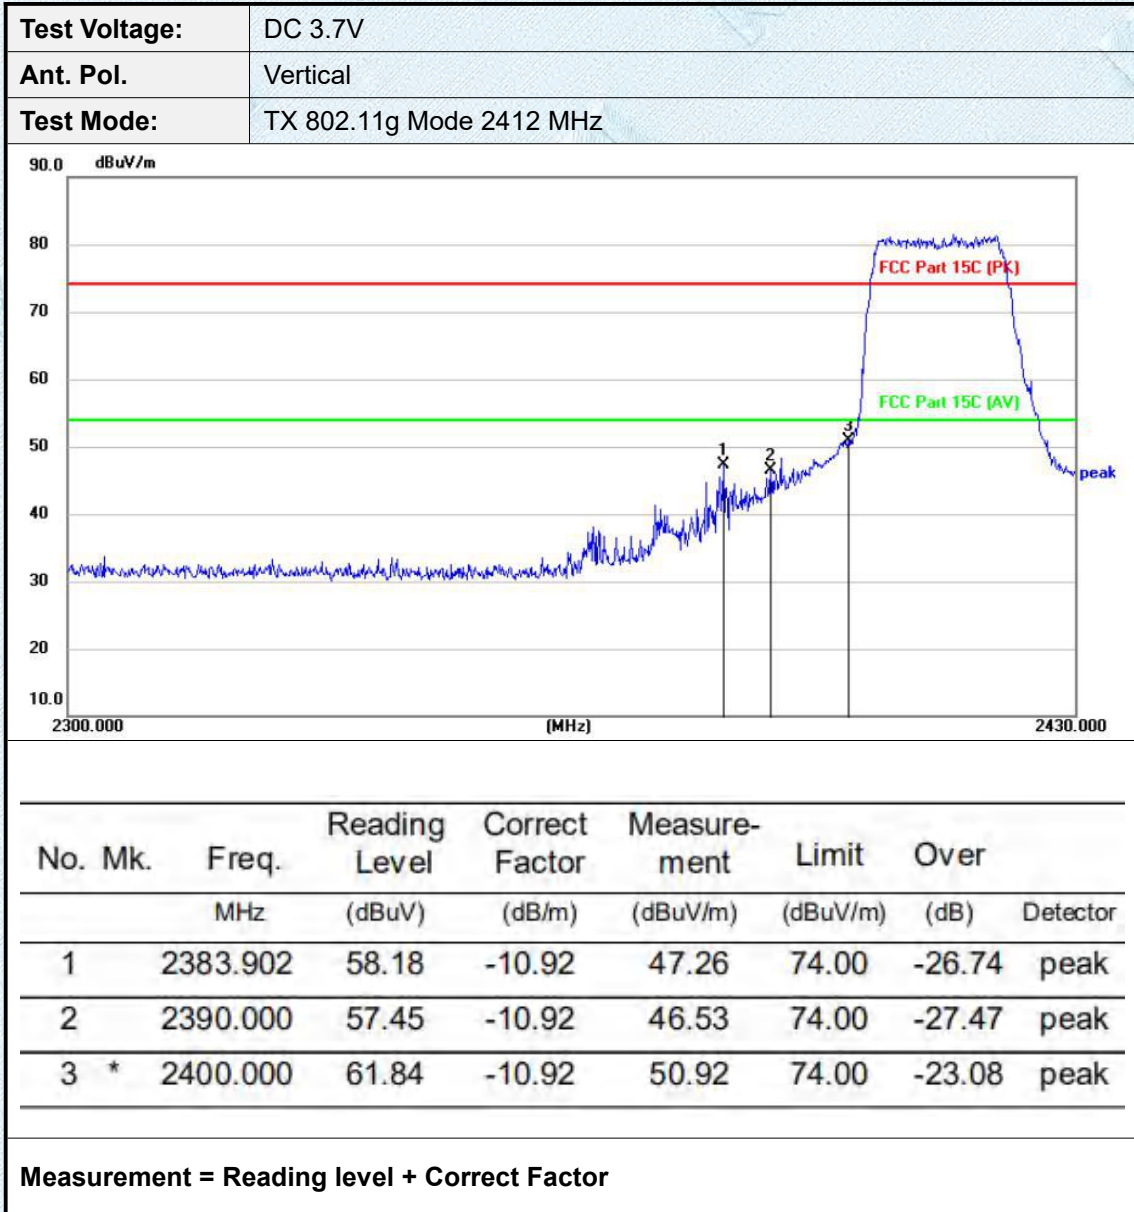

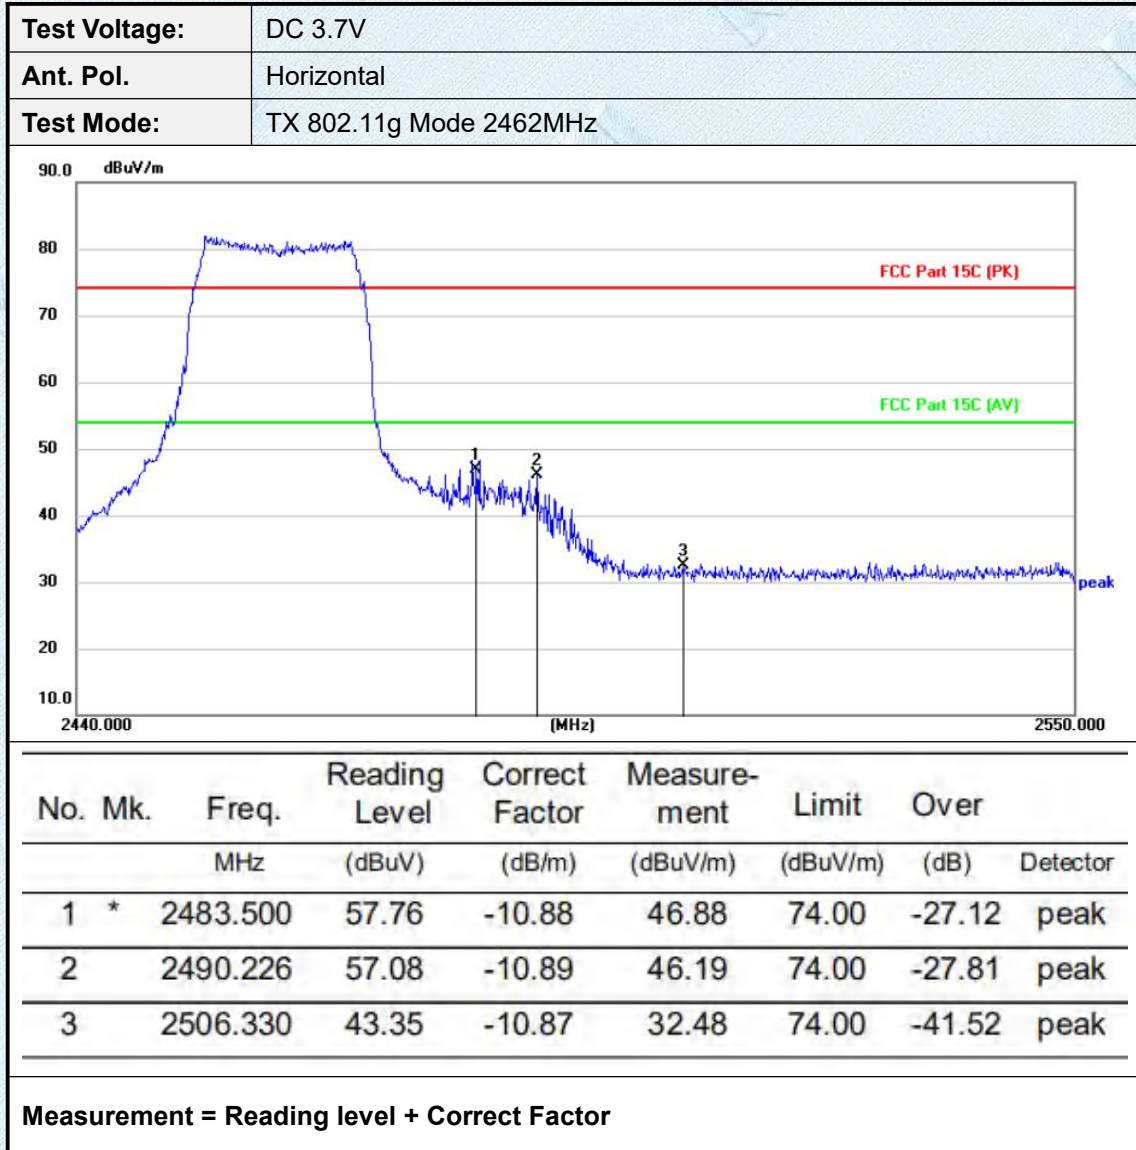

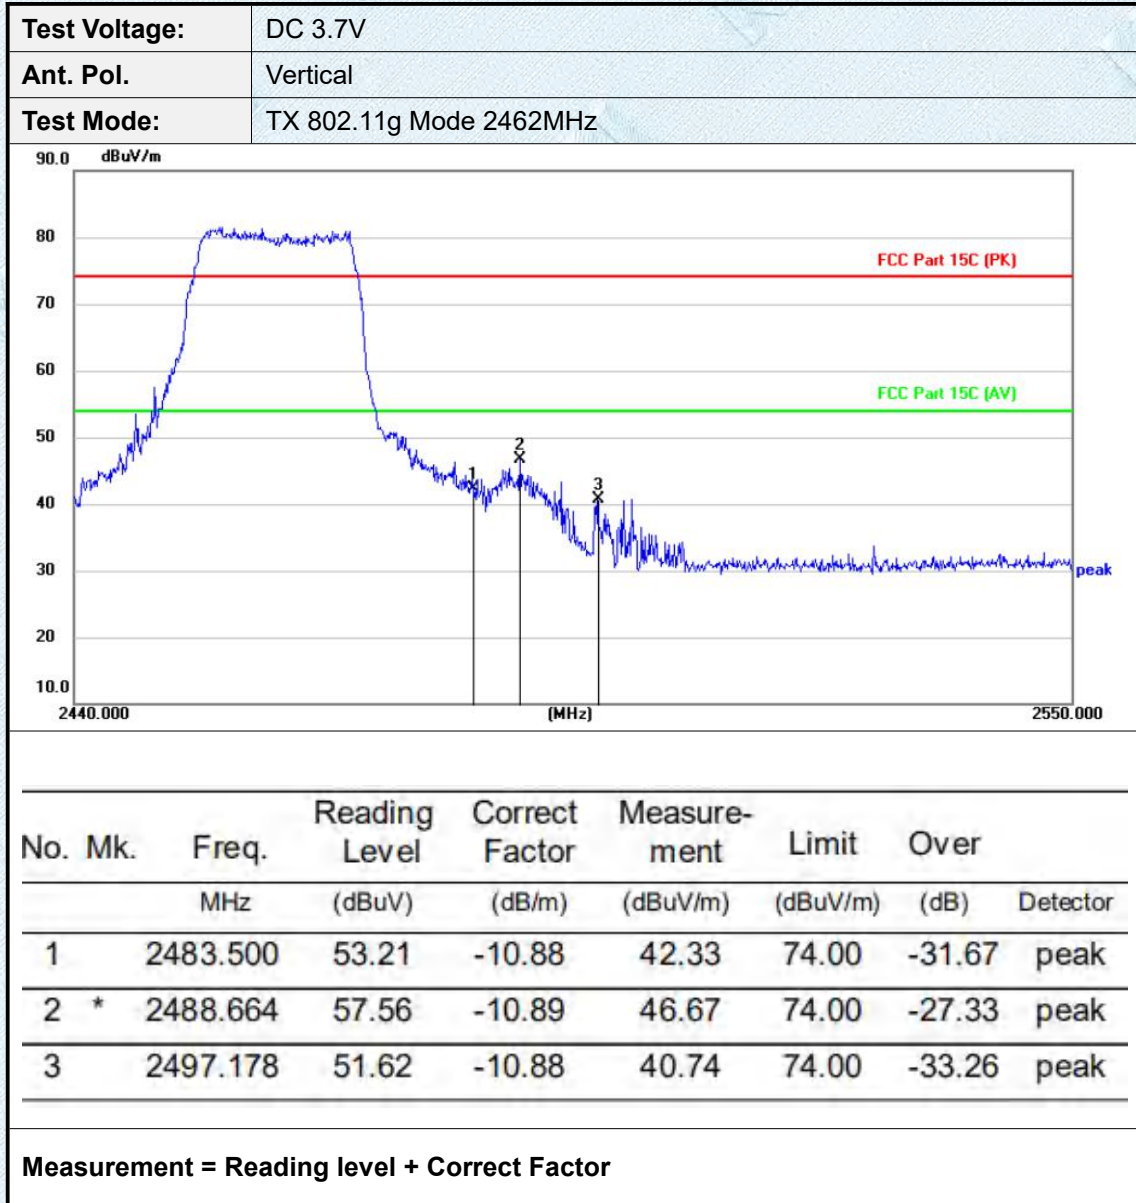

3.7. Spurious Emission (Radiated)

Limit

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


Test Configuration

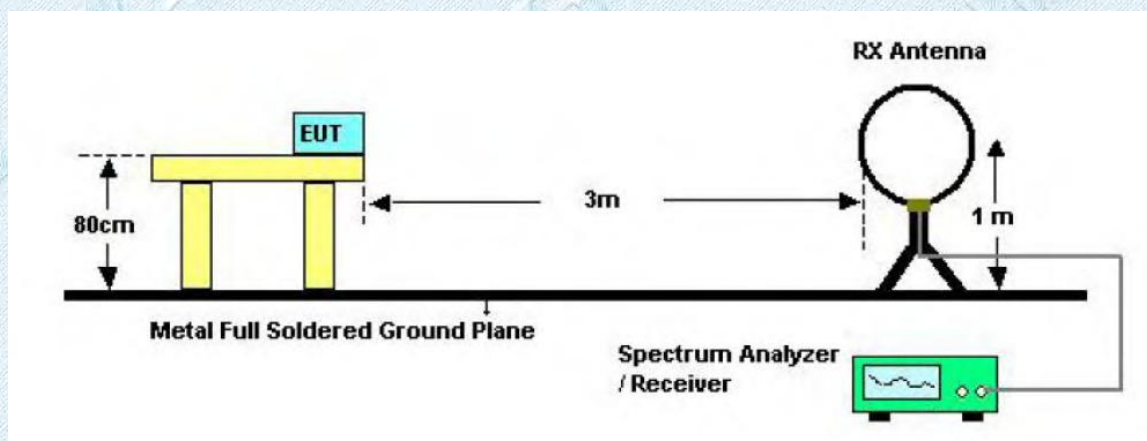

Below 30MHz Test Setup

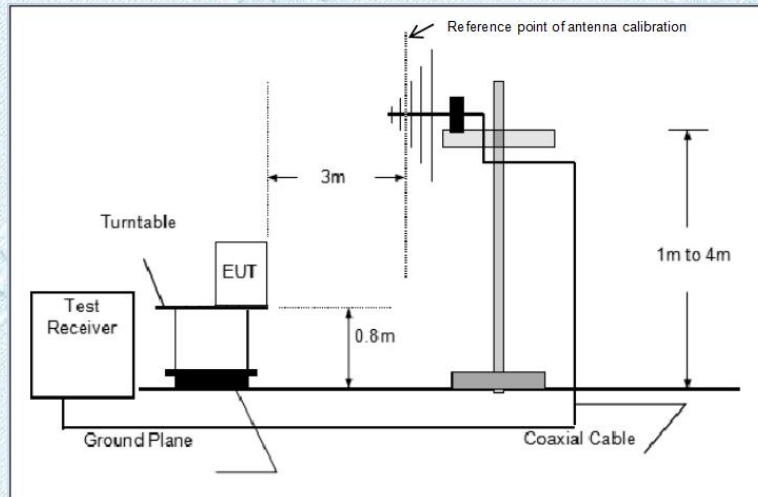

Below 1000MHz Test Setup

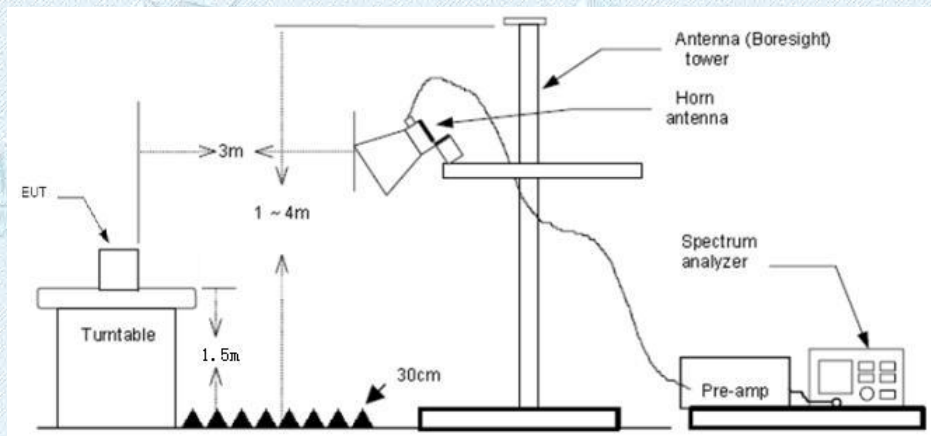

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=1MHz Peak detector for Peak value.
RBW=1MHz, VBW=10Hz Peak detector for Average value.

Test Mode

Please refer to the clause 2.2

Test Result**9 KHz~30 MHz and 18GHz~25GHz**

From 9 KHz~30 MHz and 18GHz~25GHz: Conclusion: PASS

Note:


- 1) Measurement = Reading level + Correct Factor
Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor
- 2) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- 3) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 4) The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 5) Pre-scan 802.11b/g/n(HT20/HT40) modulation, and found 802.11g_2412MHz which it is worse case for 30MHz-1GHz , the 802.11g modulation which it is worse case for above 1GHz, so only show the test data for worse case.

BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.


30MHz-1GHz

Test Voltage:	DC 3.7V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2412MHz

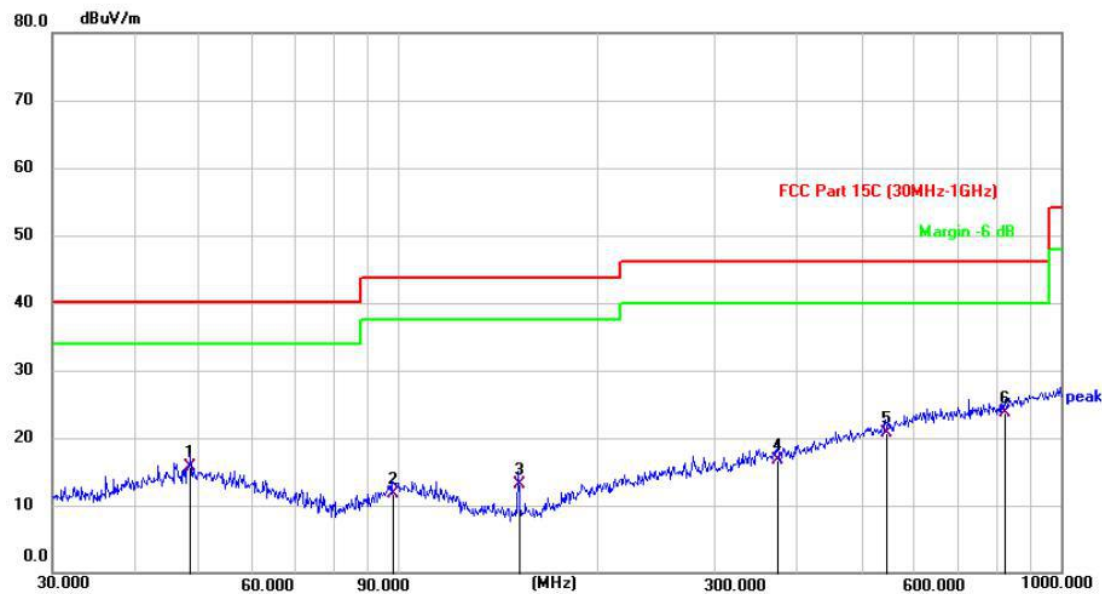


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		48.5185	26.19	-10.40	15.79	40.00	-24.21	QP
2		98.0387	24.64	-12.88	11.76	43.50	-31.74	QP
3		152.0231	29.63	-16.52	13.11	43.50	-30.39	QP
4		374.3599	25.69	-8.99	16.70	46.00	-29.30	QP
5		544.6094	26.22	-5.44	20.78	46.00	-25.22	QP
6	*	821.7103	26.65	-2.88	23.77	46.00	-22.23	QP


Measurement = Reading Level+ Correct Factor

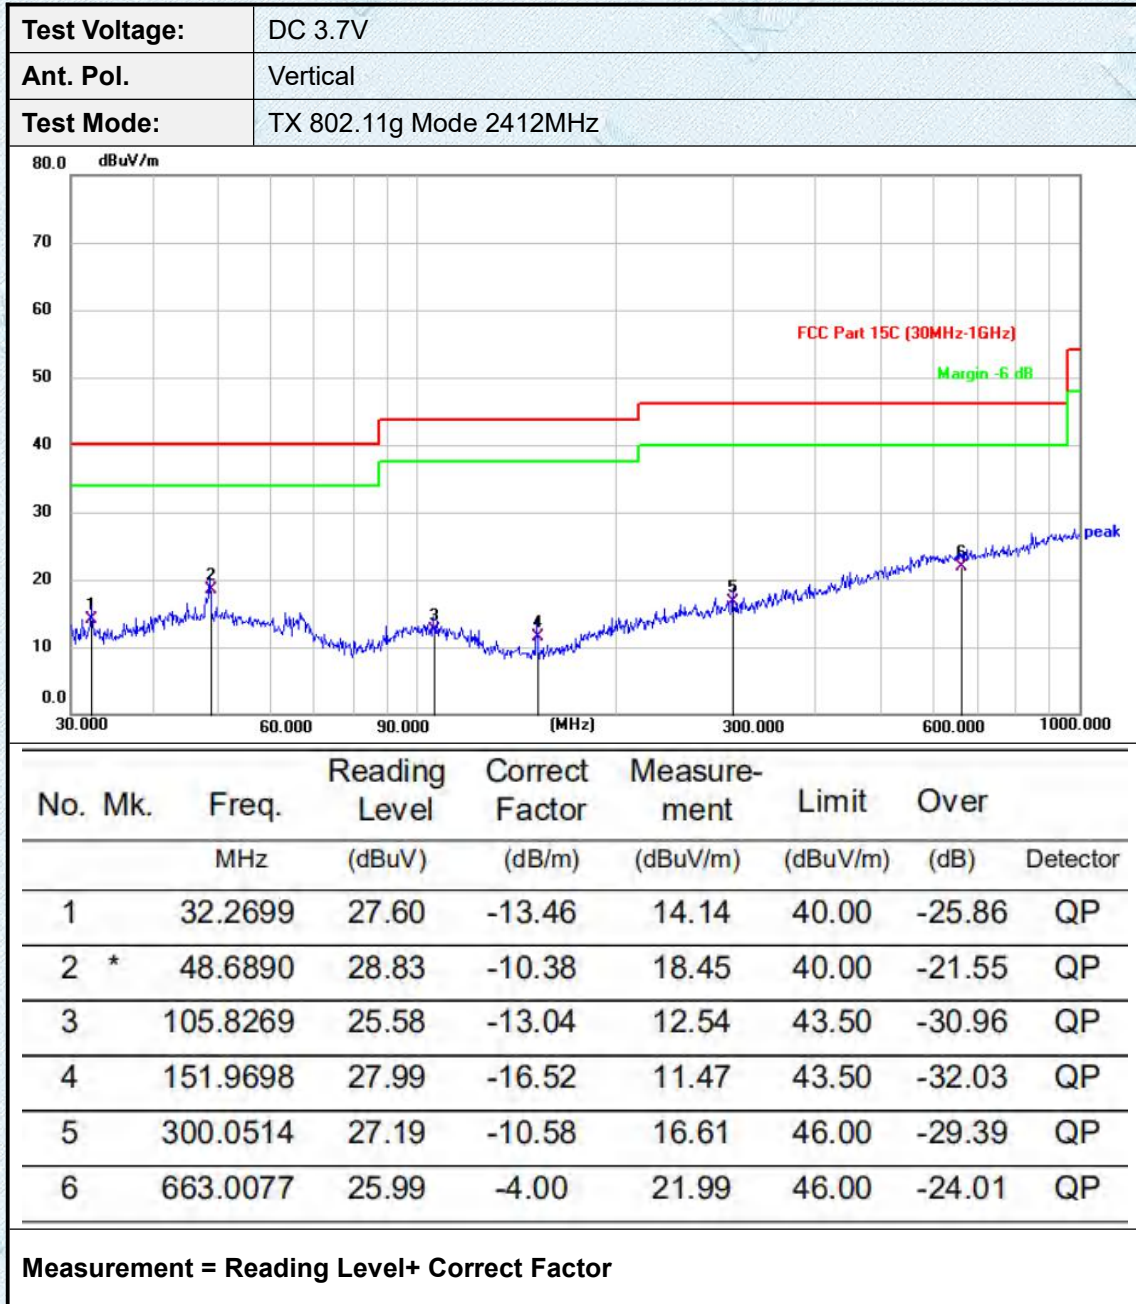

Adobe 1GHz

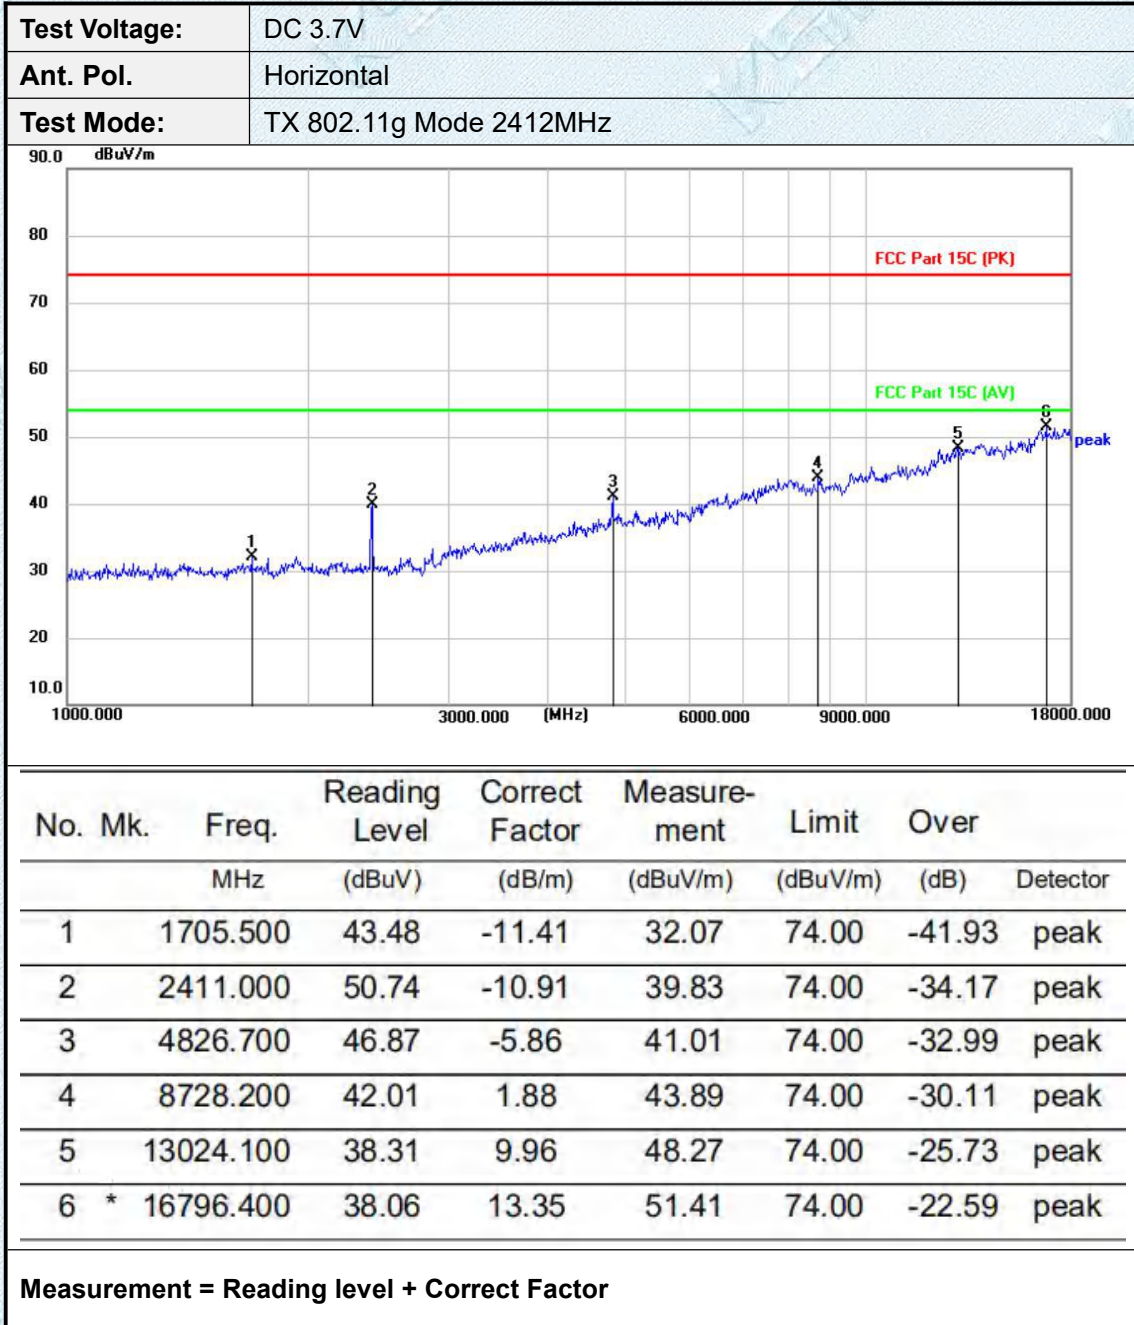


Test Voltage:	DC 3.7V
Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2412MHz

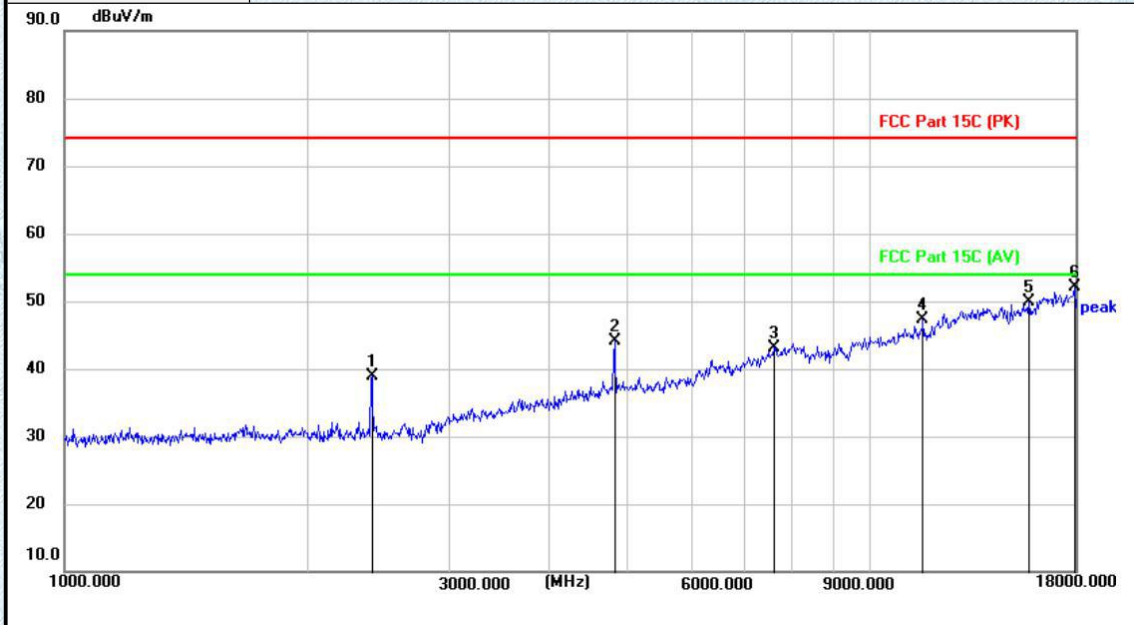


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		2409.300	49.89	-10.91	38.98	74.00	-35.02	peak
2		4830.100	49.90	-5.85	44.05	74.00	-29.95	peak
3		7619.800	42.06	1.12	43.18	74.00	-30.82	peak
4		11645.400	40.19	7.16	47.35	74.00	-26.65	peak
5		15781.500	37.47	12.36	49.83	74.00	-24.17	peak
6	*	17981.300	38.51	13.62	52.13	74.00	-21.87	peak

Measurement = Reading level + Correct Factor

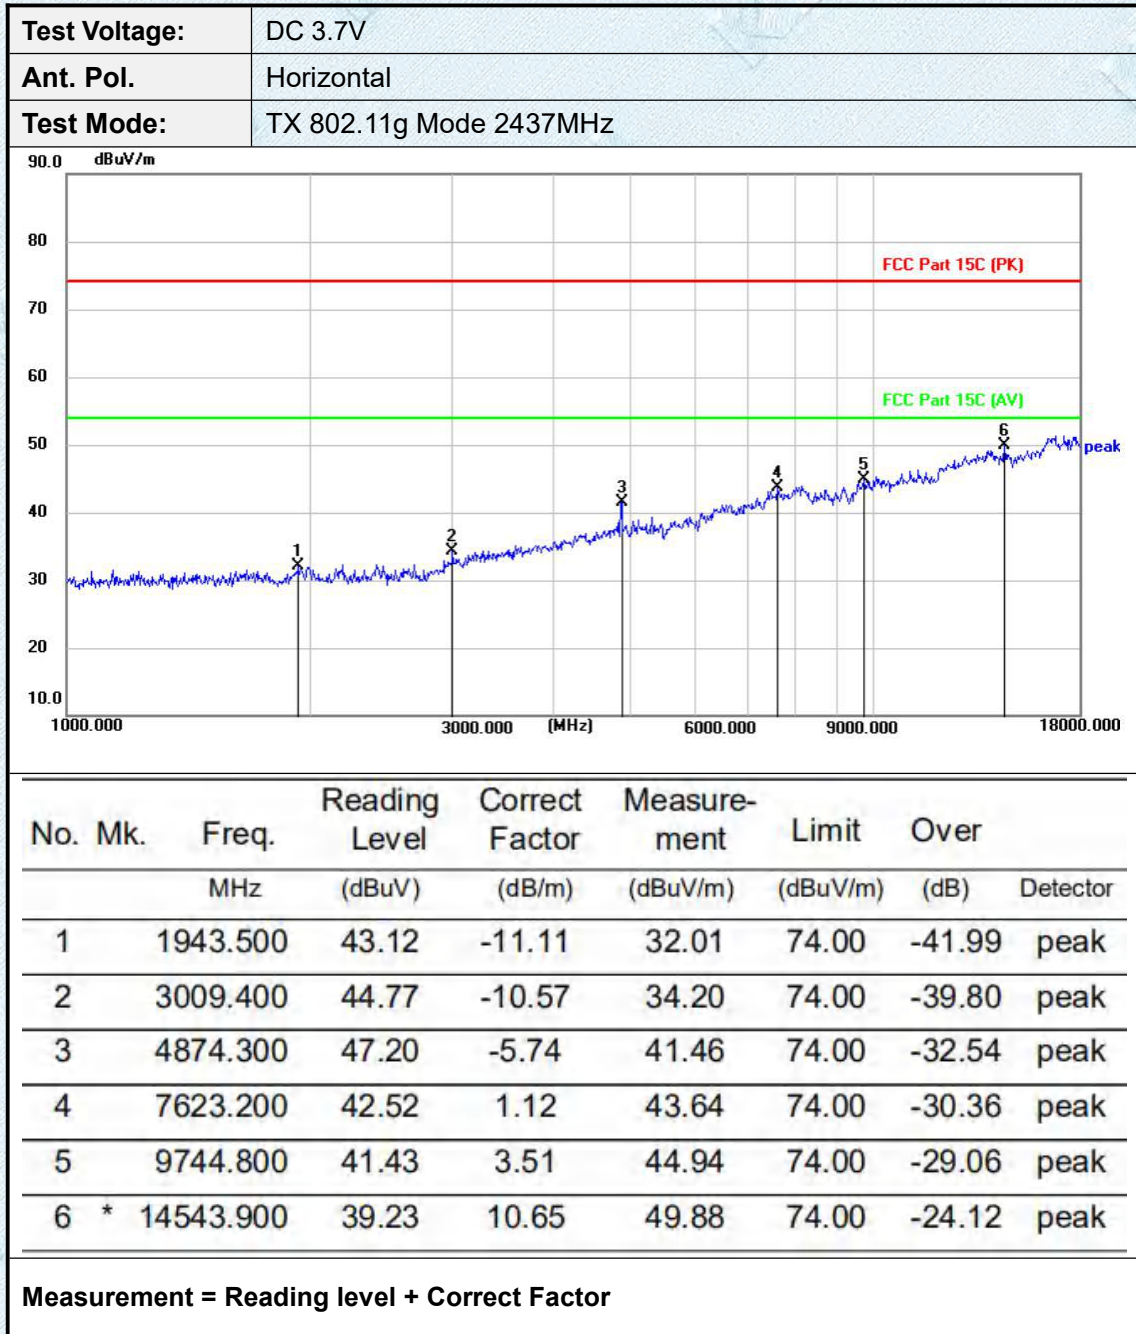


Test Voltage:	DC 3.7V
Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2437MHz

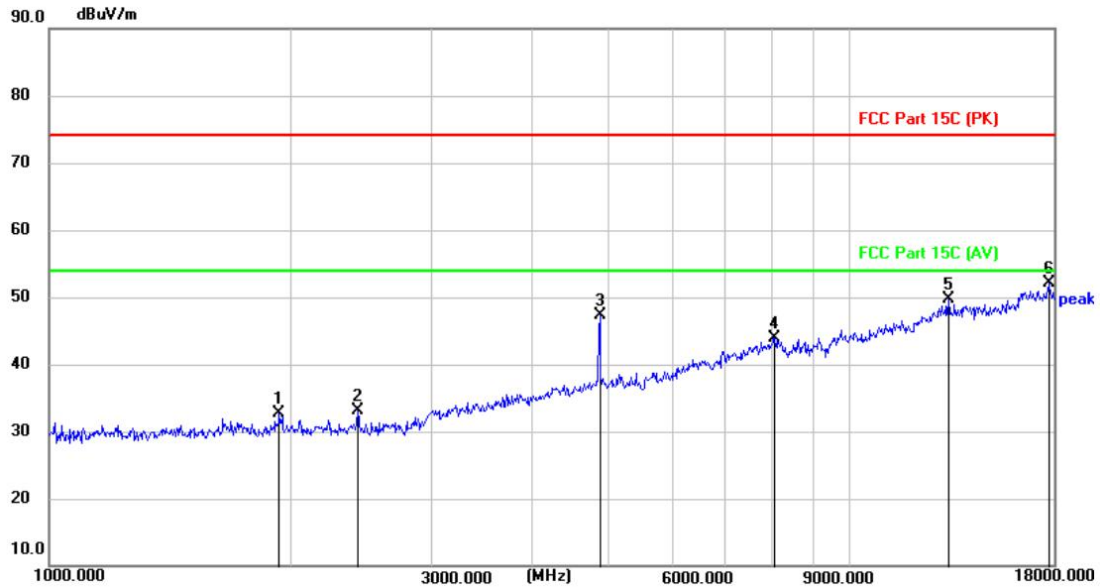

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		1940.100	43.87	-11.11	32.76	74.00	-41.24	peak
2		2433.100	43.96	-10.90	33.06	74.00	-40.94	peak
3		4876.000	52.99	-5.73	47.26	74.00	-26.74	peak
4		8077.100	41.94	2.05	43.99	74.00	-30.01	peak
5		13301.200	39.46	10.34	49.80	74.00	-24.20	peak
6	*	17756.900	38.51	13.51	52.02	74.00	-21.98	peak

Measurement = Reading level + Correct Factor


Test Voltage:	DC 3.7V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2462MHz

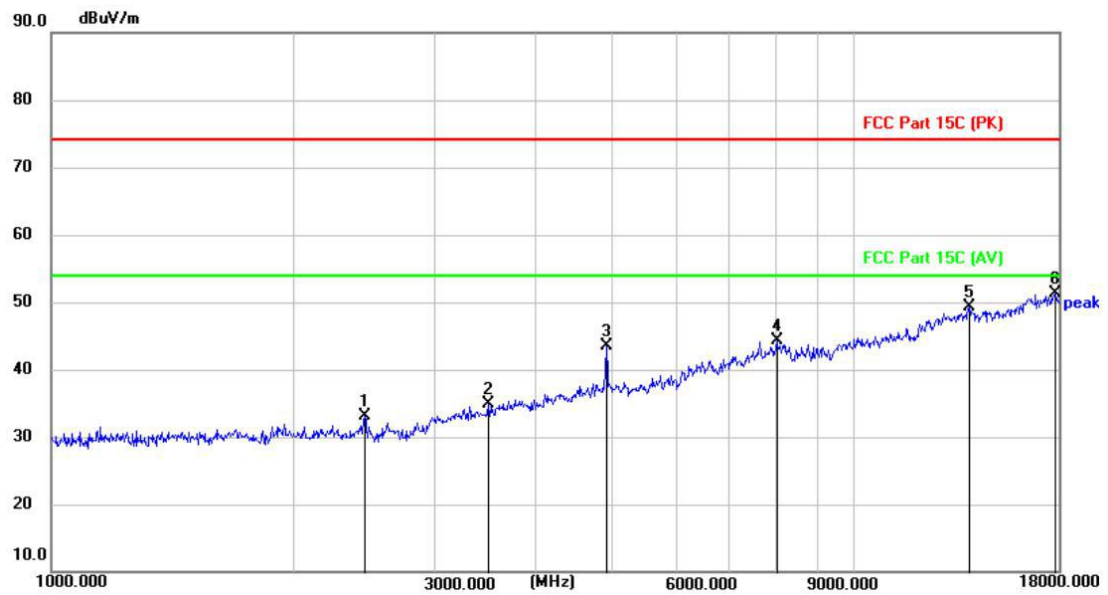

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		2460.300	43.99	-10.89	33.10	74.00	-40.90	peak
2		3512.600	44.56	-9.64	34.92	74.00	-39.08	peak
3		4921.900	49.19	-5.60	43.59	74.00	-30.41	peak
4		8034.600	42.22	2.07	44.29	74.00	-29.71	peak
5		13918.300	38.16	11.12	49.28	74.00	-24.72	peak
6	*	17857.200	37.82	13.56	51.38	74.00	-22.62	peak

Measurement = Reading level + Correct Factor

Test Voltage:	DC 3.7V
Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2462MHz

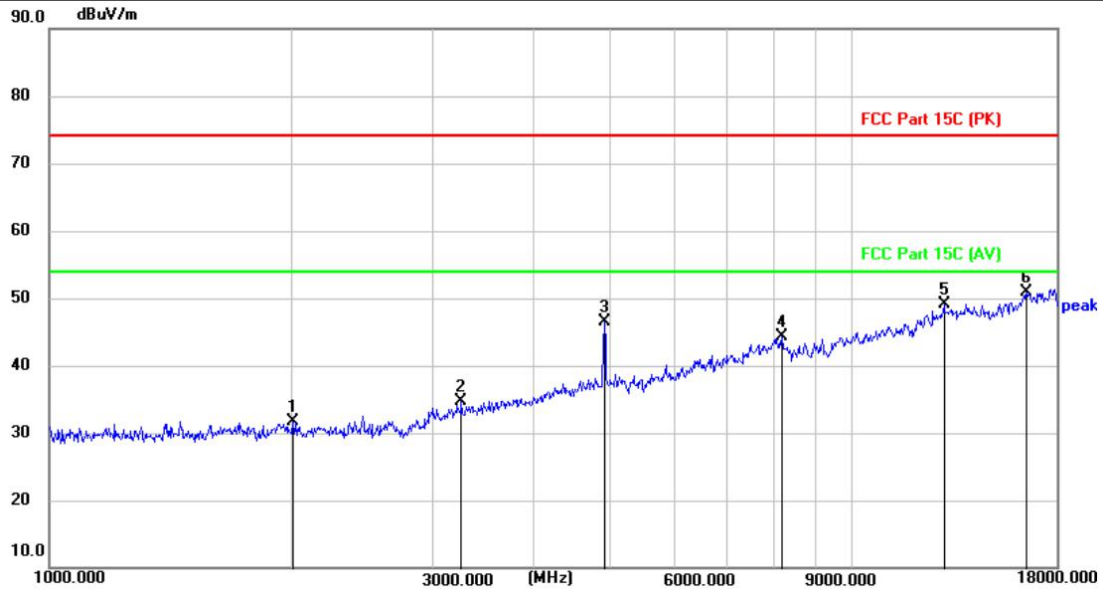

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		2013.200	42.79	-11.06	31.73	74.00	-42.27	peak
2		3269.500	44.76	-10.11	34.65	74.00	-39.35	peak
3		4923.600	52.04	-5.60	46.44	74.00	-27.56	peak
4		8196.100	42.19	2.03	44.22	74.00	-29.78	peak
5		13022.400	39.09	9.96	49.05	74.00	-24.95	peak
6	*	16529.500	37.14	13.76	50.90	74.00	-23.10	peak

Measurement = Reading level + Correct Factor

3.8. Conducted Emission

Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

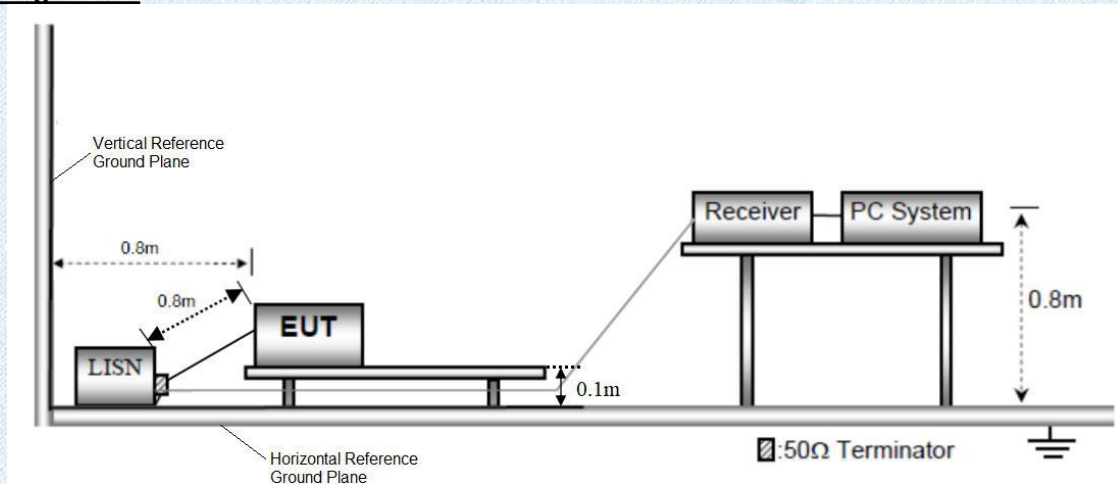

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 0.1m above the conducting ground plane. The vertical conducting plane was located 80 cm to the rear of the EUT. All other surfaces of EUT were at least 0.8m from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.


Test Mode:

Please refer to the clause 2.2.

Test Results

Pre-scan 802.11b/g/n(HT20/HT40) modulation, and found the 802.11g modulation 2412MHz which it is worse case, so only show the test data for worse case.

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Test Mode:	Charging+2.4G WIFI

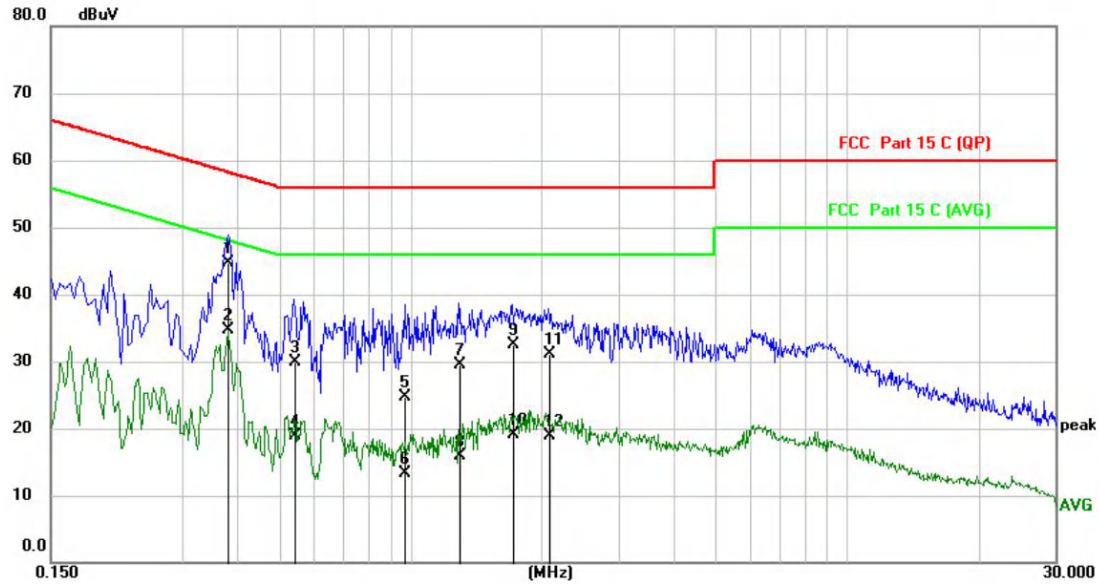


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.3820	33.75	10.89	44.64	58.24	-13.60	QP
2	*	0.3820	23.88	10.89	34.77	48.24	-13.47	AVG
3		0.5420	18.97	10.90	29.87	56.00	-26.13	QP
4		0.5420	8.01	10.90	18.91	46.00	-27.09	AVG
5		0.9700	13.89	10.87	24.76	56.00	-31.24	QP
6		0.9700	2.41	10.87	13.28	46.00	-32.72	AVG
7		1.2900	18.63	10.88	29.51	56.00	-26.49	QP
8		1.2900	5.10	10.88	15.98	46.00	-30.02	AVG
9		1.7140	21.53	10.88	32.41	56.00	-23.59	QP
10		1.7140	8.14	10.88	19.02	46.00	-26.98	AVG
11		2.0660	20.26	10.89	31.15	56.00	-24.85	QP
12		2.0660	8.03	10.89	18.92	46.00	-27.08	AVG

Remarks:

- 1.Measurement = Reading Level+ Correct Factor
- 2.Over = Measurement -Limit

Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Test Mode:	Charging+WIFI

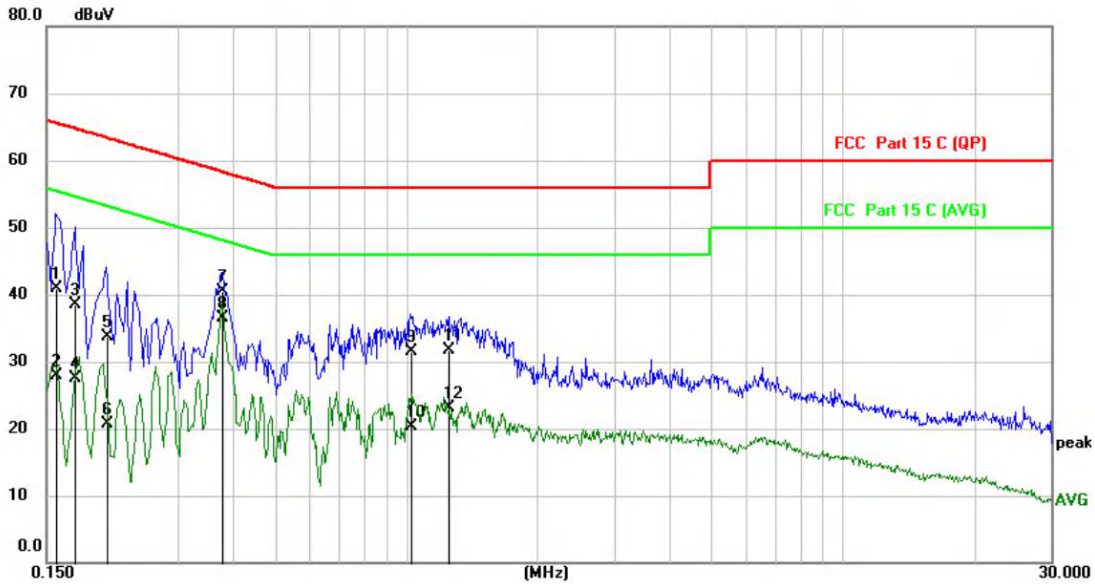

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1580	30.12	10.84	40.96	65.57	-24.61	QP
2		0.1580	17.02	10.84	27.86	55.57	-27.71	AVG
3		0.1740	27.60	10.86	38.46	64.77	-26.31	QP
4		0.1740	16.59	10.86	27.45	54.77	-27.32	AVG
5		0.2060	22.91	10.88	33.79	63.37	-29.58	QP
6		0.2060	9.90	10.88	20.78	53.37	-32.59	AVG
7		0.3780	29.67	10.86	40.53	58.32	-17.79	QP
8	*	0.3780	25.64	10.86	36.50	48.32	-11.82	AVG
9		1.0260	20.56	10.87	31.43	56.00	-24.57	QP
10		1.0260	9.46	10.87	20.33	46.00	-25.67	AVG
11		1.2500	20.89	10.88	31.77	56.00	-24.23	QP
12		1.2500	12.14	10.88	23.02	46.00	-22.98	AVG


Remarks:
 1.Measurement = Reading Level+ Correct Factor
 2.Over = Measurement -Limit

4.EUT TEST PHOTOS

Radiated Emissions (30MHz~1000MHz)




Radiated Emissions (Above 1GHz)

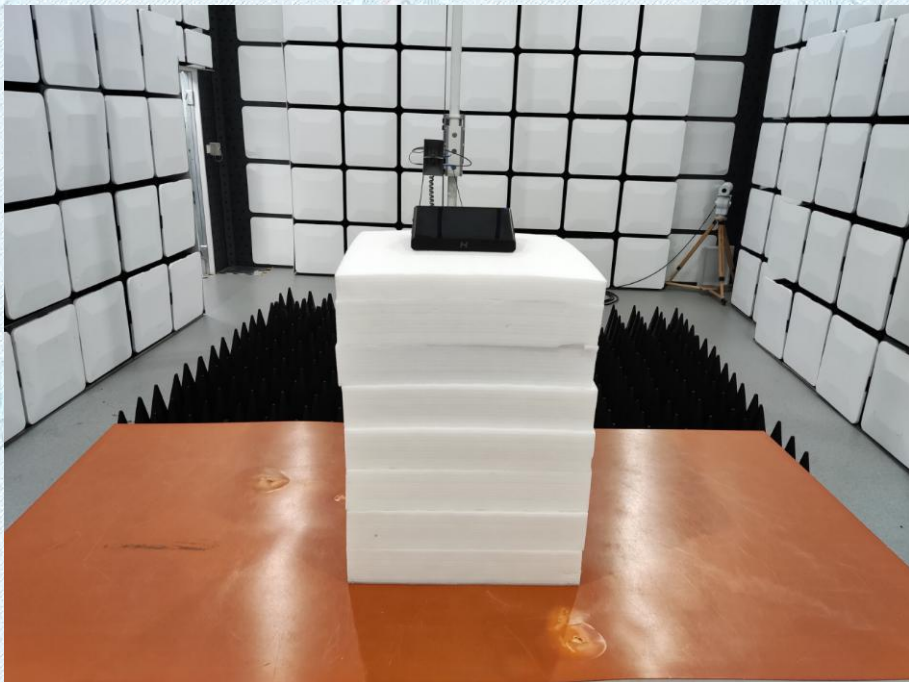

RF Conducted



Conducted Emission

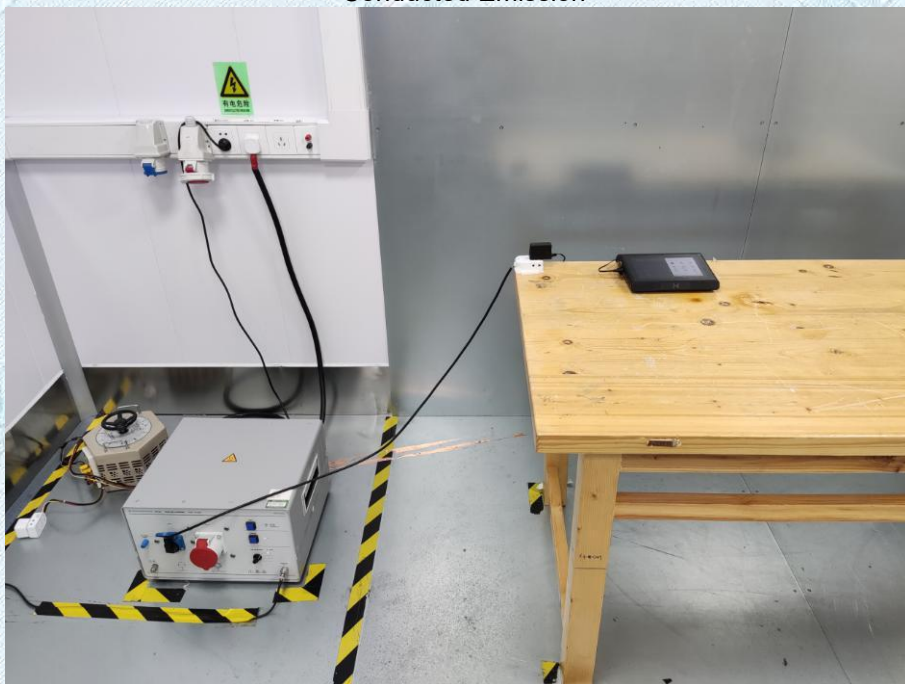

5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Please refer to External Photographs and Internal Photographs

*****THE END*****