



Product Service

Choose certainty.
Add value.

July 3, 2017

Page 1 of 50

Prüfbericht / Test Report

Nr. / No. 06528-08998-01 (Edition 4)

Applicant: IQ Air AG

Type of equipment: Air Purifier with RFID reader modul

Type designation: ATEM Air Purifier (Type 03)

Order No.: --

Test standards: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207, 15.215 and 15.225

Industry Canada Radio Standards Specifications
RSS-GEN Issue 4, Sections 8.8, 8.9 and 8.10 and
RSS-210 Issue 9, Section B.6 (Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.



BNetzA-CAB-16/21-15

Trade Register Munich
HRB 85742
VAT ID No. DE129484267
Information pursuant to Section 2(1)
DL-InfoV (Germany) at
www.tuev-sued.com/imprint

Management:
Robert Kees
Dr. Jens Butenandt
Holger Lindner

Phone: +49 9421 55 22-0
Fax: +49 9421 55 22-99
www.tuev-sued.de
TÜV®

TÜV SÜD Product Service GmbH
Äußere Frühlingstraße 45
94315 Straubing
Germany

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	4
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT	7
6	Measurement Procedures	8
6.1	Bandwidth Measurements.....	8
6.2	Conducted AC Powerline Emission	10
6.3	Radiated Emission Measurement 9 kHz to 30 MHz.....	12
6.4	Radiated Emission in Fully or Semi Anechoic Room	14
6.5	Radiated Emission at Alternative Test Site	17
6.6	Carrier Frequency Stability.....	19
7	Test Results	21
7.1	Occupied Bandwidth	23
7.2	Bandwidth of the Emission.....	27
7.3	Designation of Emissions.....	29
7.4	Conducted Powerline Emission Measurement 150 kHz to 30 MHz	30
7.5	Spectrum Mask.....	33
7.6	Radiated Emission Measurement 9 kHz to 30 MHz.....	35
7.7	Radiated Emission Measurement 30 MHz to 1 GHz.....	38
7.8	Carrier Frequency Stability.....	40
7.9	Exposure of Humans to RF Fields	43
8	Referenced Regulations	47
9	Test Equipment List with Calibration Data.....	49
10	Revision History	50

1 Description of the Equipment Under Test (EUT)

General data of EUT

Type of equipment:	Air Purifier with RFID reader modul
Parts ¹ :	--
Serial number(s):	000105
Manufacturer:	IQ Air AG
Type designation ² :	ATEM Air Purifier (Type 03)
Version:	V1
FCC ID:	2AMBQ-ATEM03
Industry Canada ID:	22813-ATEM03
Additional parts/accessories:	--

Technical data of EUT

Application frequency range:	13.110 - 14.010 MHz
Frequency range:	13.553 – 13-567 MHz
Operating frequency:	13.56 MHz
Type of modulation:	ASK
Pulse train:	--
Pulse width:	--
Number of RF-channels:	1
Channel spacing:	--
Designation of emissions ³ :	40k2A1D
Type of antenna:	Onboard
Size/length of antenna:	--
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of power supply:	DC supply
Specifications for power supply:	nominal voltage: 5.0 V minimum voltage: 4.5 V maximum voltage: 5.5 V nominal frequency: DC Hz

¹ Type designations of the parts of the system, if applicable.

² Type designation of the system if EUT consists of more than one part.

³ Also known as "Class of Emission".

2 Administrative Data

Application details

Applicant (full address):	IQ Air AG Blumenfeldstrasse 10 CH-9403 Goldach
Contact person:	Mr. Vorburger
Order number:	--
Receipt of EUT:	2017-05-16
Date(s) of test:	2017-05-22 & 2017-05-23
Note(s):	--

Report details

Report number:	06528-08998-01
Edition:	4
Issue date:	July 3, 2017

3 Identification of the Test Laboratory

Details of the Test Laboratory

Company name:	TÜV SÜD Product Service GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAkkS Registration No. D-PL-11321-11-01
Laboratory recognition:	Registration No. BNetzA-CAB-16/21-15
Industry Canada test site registration:	3050A-2
Contact person:	Mr. Markus Biberger
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207, 15.215 and 15.225
of the Federal Communication Commission (FCC) and the
Radio Standards Specifications
RSS-GEN Issue 4, Sections 8.8, 8.9 and 8.10 and
RSS-210 Issue 9, Section , B.6 (Category I Equipment)
of Industry Canada (IC).

Die Prüfergebnisse beziehen sich ausschließlich auf das zur Prüfung vorgestellte Prüfmuster. Ohne schriftliche Genehmigung des Prüflabors darf der Prüfbericht auszugsweise nicht vervielfältigt werden. *The test results relate only to the individual item which has been tested. Without the written approval of the test laboratory this report may not be reproduced in extracts.*

Datum / Date	Geprüft von / Tested by	Freigabe durch / Checked by	Prüfergebnis / Test Result
July 3, 2017	 Markus Biberger Responsible for testing	 Martin Steindl Reviewer	<input checked="" type="checkbox"/> Erfüllt / Passed <input type="checkbox"/> Nicht erfüllt / Not passed

5 Operation Mode and Configuration of EUT

Operation Mode(s)

The EUT is transmitting continuously at 13,56MHz withwith the RFID tag in the HEPA-Filter
Software: IQAir Product Interface V 000.62

Configuration(s) of EUT

The EUT is configured via IQAir product interface to continuously transmit with the RFID tag ("rfidEm-cTestEnable")

List of ports and cables

Port	Description	Classification ⁴	Cable type	Cable length
1	Power supply	dc power	Unshielded	1.8m

List of devices connected to EUT

Item	Description	Type Designation	Serial no. or ID	Manufacturer
1	Test notebook	E460	TPS-STR-NB04	Lenovo
2	USB BLE module	--	--	--

List of support devices


Item	Description	Type Designation	Serial no. or ID	Manufacturer
--	--	--	--	--

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures

6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 4, section 6.6 IC RSS-210 Issue 9, section A.1.3 ANSI C63.10, section 6.9.1
Guide:	ANSI C63.10 / IC RSS-Gen Issue 4, section 6.6
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.3)
If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.	
If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.	
The analyzer settings are specified by the test description of the appropriate test record(s).	

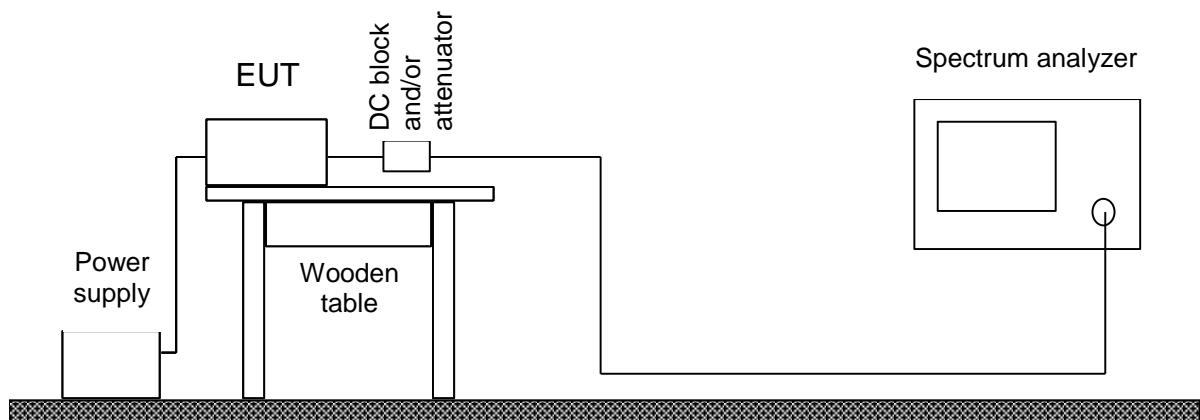

Test instruments used for conducted measurements:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Spectrum analyzer	FSV40	2364	101448	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Power meter	NRVS	1264	836856/015	Rohde & Schwarz
<input type="checkbox"/> Peak power sensor	NRV-Z31	1701	8579604.03	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z52	1499	837901/030	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z4	1034	863828/015	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input checked="" type="checkbox"/> Microwave cable	ST- 18/SMAm/SMAm/4 8	1949	696378	Huber+Suhner
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda
<input type="checkbox"/> Measurement Software	EMC32_K2 V9.25.00	2033	100003	Rohde & Schwarz

6.2 Conducted AC Powerline Emission

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, section 15.207

IC RSS-Gen Issue 4, section 8.8

Guide: ANSI C63.10 / CISPR 22


Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:

First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.

If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.

According to ANSI C63.10, section 6.2.5, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.

Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.

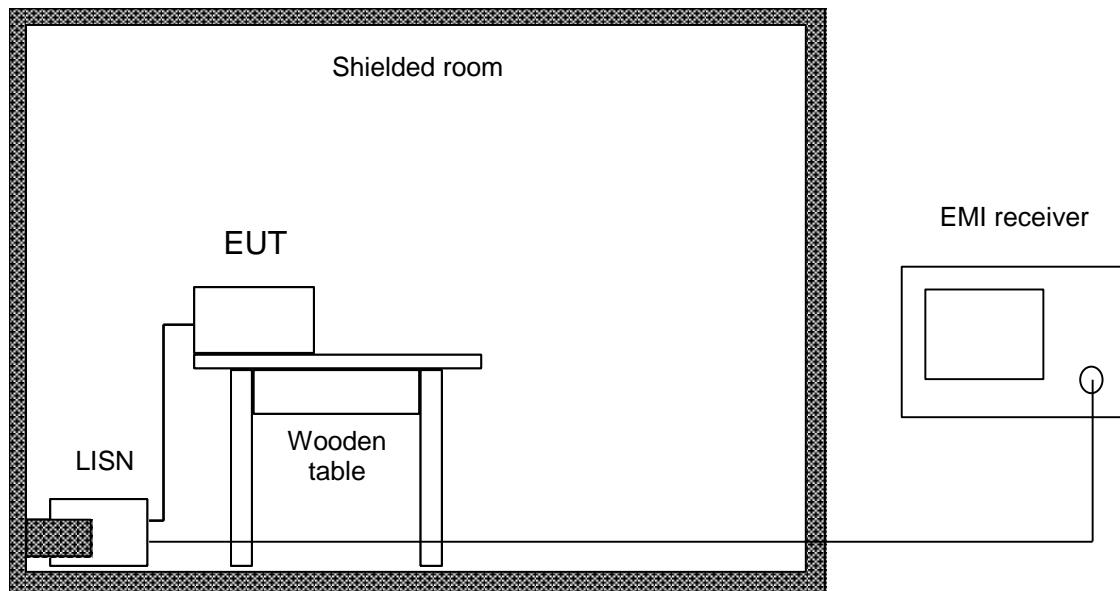

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Test receiver	ESCI3	11-001973	1000008	Rohde & Schwarz
<input checked="" type="checkbox"/> V-network	ESH 3-Z5	1059	894785/005	Rohde & Schwarz
<input type="checkbox"/> V-network	ESH 3-Z5	1218	830952/025	Rohde & Schwarz
<input type="checkbox"/> Artificial mains network	ESH 2-Z5	1536	842966/004	Rohde & Schwarz
<input checked="" type="checkbox"/> Microwave cable	FB293C1080005050	2157	72110-02	Rosenberger Micro-Coax
<input type="checkbox"/> Coax cable	RG214 N/N 5m	1188	---	Senton
<input type="checkbox"/> Shielded room	No. 1	1451	---	Albatross
<input checked="" type="checkbox"/> Shielded room	No. 4	1454	3FD 100 544	Euroshield
<input checked="" type="checkbox"/> Measurement Software	EMC32_K1 V9.26.01	2230	100281	Rohde & Schwarz

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, sections 15.205, 15.215(b) and 15.225(a)-(d)
 IC RSS-GEN Issue 4, sections 8.9 and 8.10 and
 IC RSS-210 Issue 9, section B.6

Guide: ANSI C63.10

Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.


Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).

Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

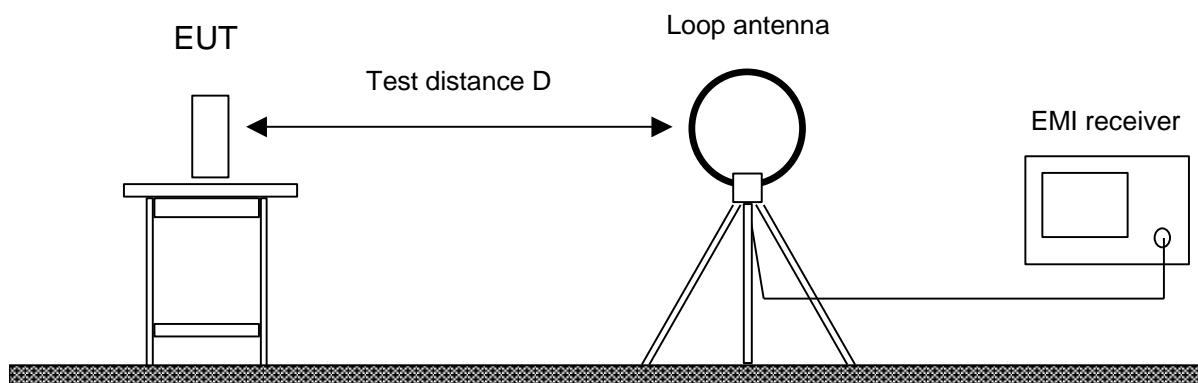

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESR7	22643	101713	Rohde & Schwarz
<input type="checkbox"/> Preamplifier	CPA9231A	1716	3557	Schaffner
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
<input type="checkbox"/> Microwave cable	UFA210A-FG	1681	23516	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable	KKSF1040016	2020	289854/4	Huber + Suhner
<input type="checkbox"/> Microwave cable	FA210AF020000000	2060	64566-2	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable	EF393	2053	---	Albatross Projects
<input checked="" type="checkbox"/> Microwave cable	FB293C1050005050	2054	63834-1	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable	FB293C1080005050	2055	63833-1	Rosenberger Micro-Coax
<input checked="" type="checkbox"/> Microwave cable	LCF12-50	2057	P1.3.9	RFS
<input type="checkbox"/> Microwave cable	LCF12-50	2057	P1.4.12	RFS
<input type="checkbox"/> Microwave cable	LCF12-50	2057	P1.6.19	RFS
<input type="checkbox"/> Microwave cable	FA210AF040005050G	2127	72061-01	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable	FA210AF04000505G	2056	64567-01	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable	FA210AF04000505	2068	64610-1	Rosenberger Micro-Coax
<input type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross
<input checked="" type="checkbox"/> Measurement Software	EMC32_K8 V9.25.00	1852	100016	Rohde & Schwarz

6.4 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:

Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-GEN Issue 4, sections 8.9 and 8.10(b)(c) and IC RSS-210 Issue 9, section B.6
Guide:	ANSI C63.10

Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.

Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).

Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.


All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 respectively ANSI C63.10 for alternative test sites is used (see 6.5). If prescans are recorded in fully anechoic room they are indicated appropriately.

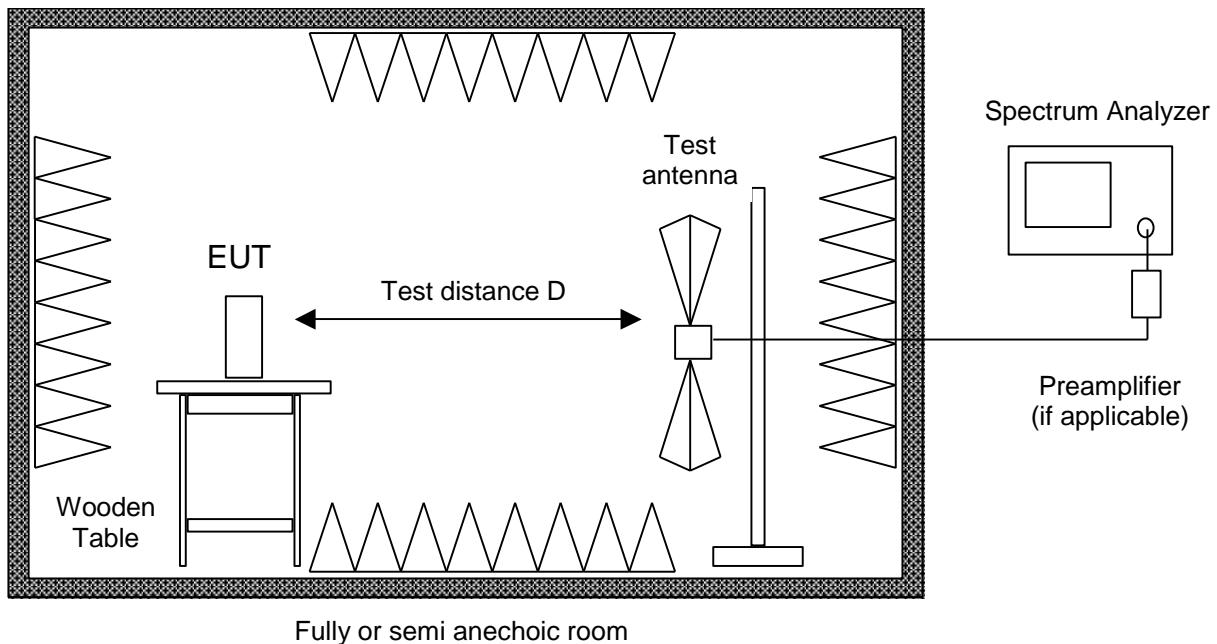


Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESR7	22643	101713	Rohde & Schwarz
<input type="checkbox"/> Preamplifier	CPA9231A	1716	3557	Schaffner
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
<input type="checkbox"/> Microwave cable	UFA210A-FG	1681	23516	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable	KKSF1040016	2020	289854/4	Huber + Suhner
<input type="checkbox"/> Microwave cable	FA210AF020000000	2060	64566-2	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable	EF393	2053	---	Albatross Projects
<input checked="" type="checkbox"/> Microwave cable	FB293C1050005050	2054	63834-1	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable	FB293C1080005050	2055	63833-1	Rosenberger Micro-Coax
<input checked="" type="checkbox"/> Microwave cable	LCF12-50	2057	P1.3.9	RFS
<input type="checkbox"/> Microwave cable	LCF12-50	2057	P1.4.12	RFS
<input type="checkbox"/> Microwave cable	LCF12-50	2057	P1.6.19	RFS
<input type="checkbox"/> Microwave cable	FA210AF040005050G	2127	72061-01	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable	FA210AF04000505G	2056	64567-01	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable	FA210AF04000505	2068	64610-1	Rosenberger Micro-Coax
<input type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross
<input checked="" type="checkbox"/> Measurement Software	EMC32_K8 V9.25.00	1852	100016	Rohde & Schwarz

6.5 Radiated Emission at Alternative Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-GEN Issue 4, sections 8.9 and 8.10(b)(c) and IC RSS-210 Issue 9, section B.6
Guide:	ANSI C63.10
<p>Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 respectively ANSI C63.10 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.</p> <p>If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels.</p> <p>Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.</p> <p>With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.</p>	

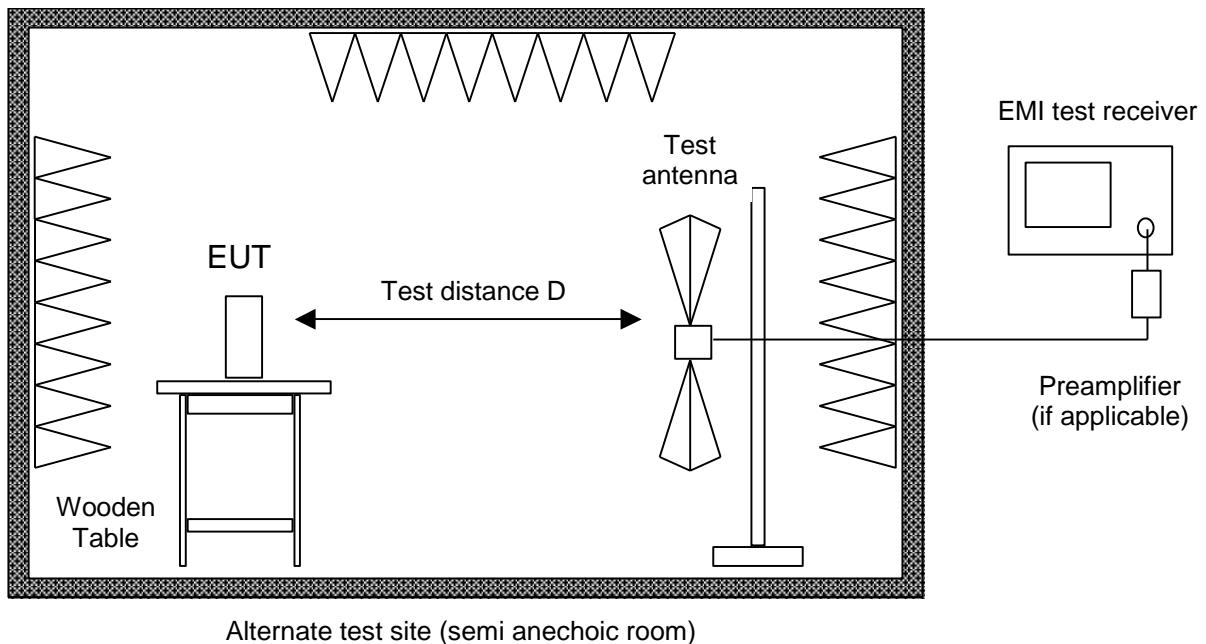

Alternate test site (semi anechoic room)

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> EMI test receiver	ESR7	22643	101713	Rohde & Schwarz
<input type="checkbox"/> Trilog antenna Cabin no. 8	VULB 9163	2058	9163-408	Schwarzbeck
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	EF393	2053	---	Albatross Projects
<input type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.6.19	RFS
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.3.9	RFS
<input type="checkbox"/> Microwave cable Cabin no. 8	FA210AF04000505	2068	64610-1	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	FA210AF040005050G	2127	72061-01	Rosenberger Micro-Coax
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross
<input checked="" type="checkbox"/> Measurement Software	EMC32_K8 V9.25.00	1852	100016	Rohde & Schwarz

6.6 Carrier Frequency Stability

Measurement Procedure:

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 4, section 6.11 and IC RSS-210 Issue 9, section B.6
Guide:	ANSI C63.10

The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °C.


If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector or a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage
- the battery nominal voltage
- 85% of the battery nominal voltage
- the battery operating end point voltage which shall be specified by the equipment manufacturer

The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.

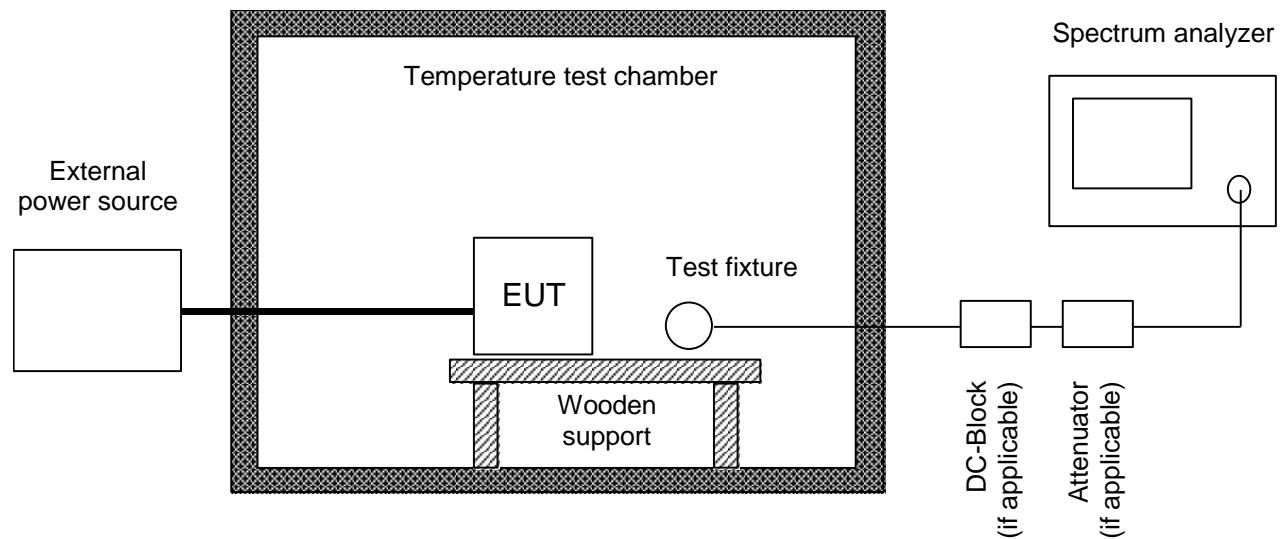

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Spectrum analyzer	FSV40	2364	101448	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda
<input type="checkbox"/> Test probe	TP 01	1628	001	TÜV SÜD PS
<input type="checkbox"/> Multimeter	21 III	1653	76530546	Fluke
<input type="checkbox"/> Multimeter	21 III	1654	76381229	Fluke
<input type="checkbox"/> Multimeter	Fluke 77 III	1975	92370108	Fluke
<input type="checkbox"/> Multimeter	Fluke 77 IV	1976	93090238	Fluke
<input type="checkbox"/> Multimeter	Fluke 177	2025	96720024	Fluke
<input type="checkbox"/> Multimeter	Fluke 177	2026	96720025	Fluke
<input checked="" type="checkbox"/> DC power supply	NGSM 32/10	1267	203	Rohde & Schwarz
<input type="checkbox"/> Isolating transformer	RT 5A	1127	10387	Grundig
<input type="checkbox"/> Isolating transformer	RT 5A	1128	10416	Grundig
<input checked="" type="checkbox"/> Temperature test chamber	PL-2J	2408	150011626	Espec

7 Test Results

FCC CFR 47 Parts 2 and 15			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	23	Recorded
15.215(c)	Bandwidth of the emission	27	Test passed
2.201, 2.202	Class of emission	29	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a) 15.205(d)(7)	Restricted bands of operation	--- ⁵	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	30	Test passed
15.225(a)-(d)	Spectrum Mask	33	Test passed
15.205(b) 15.215(b) 15.225(a)(d)	Radiated emission 9 kHz to 30 MHz	35	Test passed
15.205(b) 15.225(d)	Radiated emission 30 MHz to 1 GHz	38	Test passed
15.225(e)	Carrier frequency stability	40	Test passed

⁵ See "Spectrum Mask" for the 13.36 to 13.41 MHz band. For all other restricted bands see "Radiated Emission".

IC RSS-GEN Issue 4

Section(s)	Test	Page	Result
6.12	Transmitter output power (conducted)	---	Not applicable
6.6	Occupied Bandwidth	23	Recorded
9	Designation of emissions	29	Calculated
6.10	Pulsed operation	---	Not applicable
8.10	Restricted bands and unwanted emission frequencies	...6	Test passed
6.4, 6.13, 8.9	Unwanted emissions 9 kHz to 30 MHz	35	Test passed
6.4, 6.13, 8.9	Unwanted emissions 30 MHz to 1 GHz	38	Test passed
8.8	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	30	Test passed
3.2	Exposure of Humans to RF Fields	43	Exempted from SAR and RF eval- uation

IC RSS-210 Issue 9

Section(s)	Test	Page	Result
B.6	Spectrum Mask	33	Test passed
B.6	Unwanted emissions 9 kHz to 30 MHz	35	Test passed
B.6	Unwanted emissions 30 MHz to 1 GHz	38	Test passed
B.6	Carrier frequency stability	40	Test passed


⁶ See "Spectrum Mask" and "Unwanted emissions".

7.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.10, section 6.9.1
Guide:	ANSI C63.10
Description:	<p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.10, section 6.9.1; is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>The span range of the spectrum analysator display shall be between two times and five times of the occupied bandwidth. The resolution bandwidth of the spectrum analyzer should be approximately 1 % to 5 % of the occupied bandwidth, unless otherwise specified, depending on the applicable requirement. The video bandwidth shall be at least three times greater than the resolution bandwidth. The dynamic range of the spectrum analyzator at the selected resolution bandwidth shall be more than 10 dB below the target "dB down" (attenuation) requirement.</p>
Measurement procedure:	Bandwidth Measurements (6.1)


Comment:	--
Date of test:	2017-05-23
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):

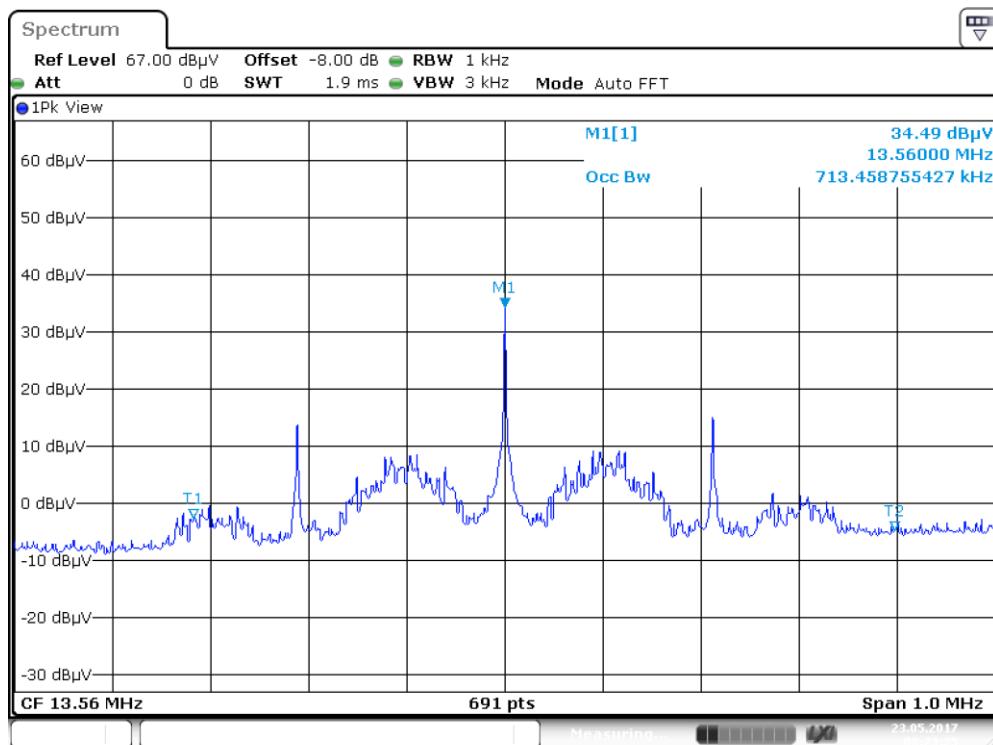

Occupied Bandwidth (99 %): **713 kHz**

Occupied Bandwidth (-20 dB):

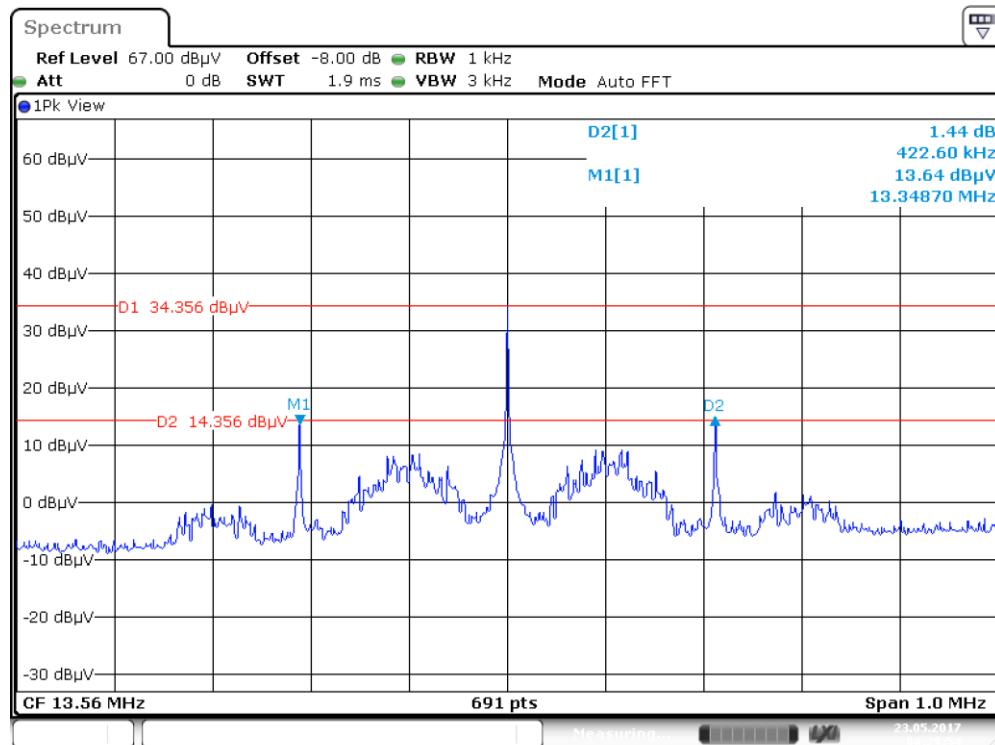


Occupied Bandwidth (-20 dB): **423 kHz**

Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 4, section 6.6
Guide:	IC RSS-Gen Issue 4, section 6.6
Description:	If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.
Measurement procedure:	Bandwidth Measurements (6.1)
Comment:	--
Date of test:	2017-05-23
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):

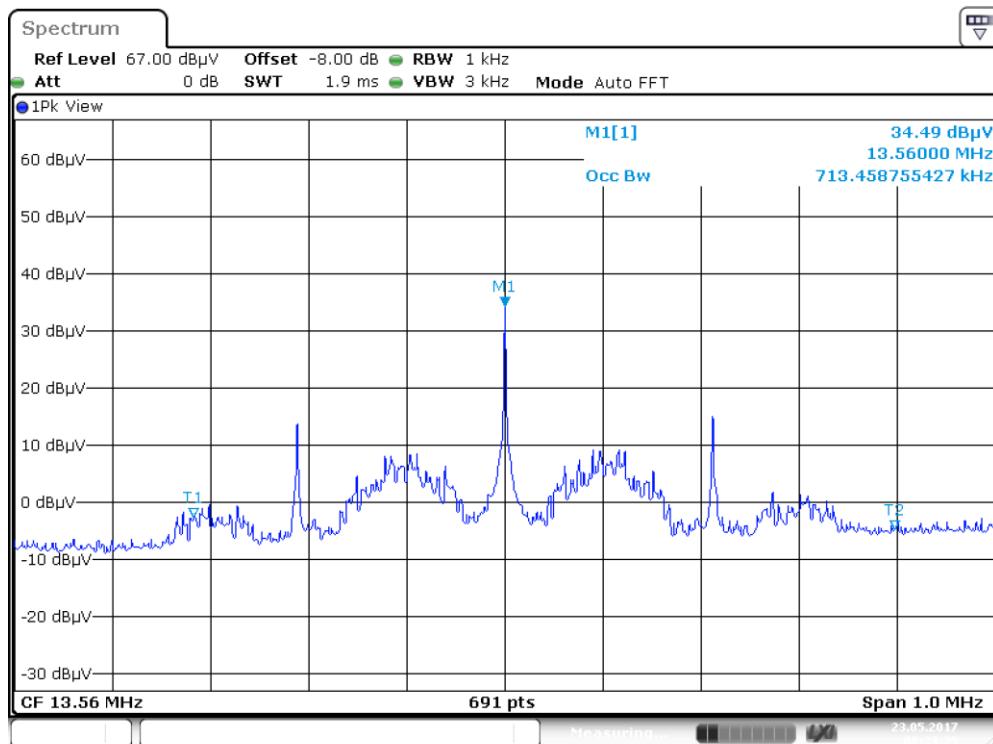


Occupied Bandwidth (99 %): **713 kHz**

7.2 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.215(c)
Guide:	ANSI C63.10
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The span range of the spectrum analyser display shall be between two times and five times of the occupied bandwidth. The resolution bandwidth of the spectrum analyzer should be approximately 1 % to 5 % of the occupied bandwidth, unless otherwise specified, depending on the applicable requirement. The video bandwidth shall be at least three times greater than the resolution bandwidth. The dynamic range of the spectrum analyzer at the selected resolution bandwidth shall be more than 10 dB below the target "dB down" (attenuation) requirement.</p> <p>The video bandwidth shall be at least three times greater than the resolution bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	--
Date of test:	2017-05-23
Test site:	Fully anechoic room, cabin no. 2

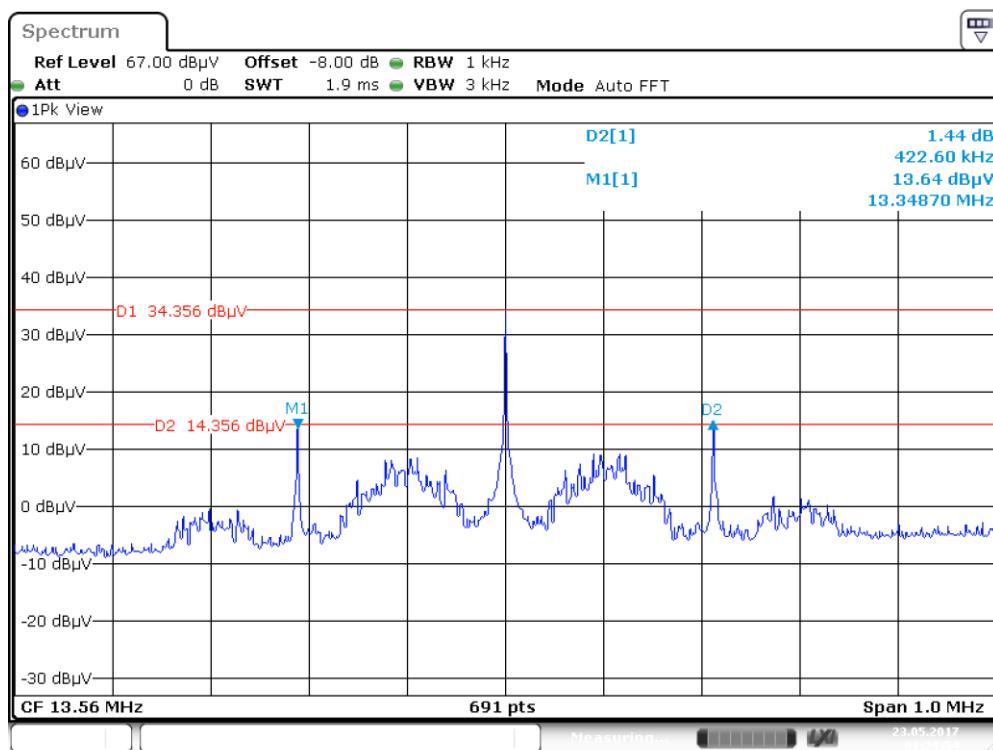

Permitted frequency band:	13.110 - 14.010 MHz	
20 dB bandwidth:	422.6 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances:	+0.074 kHz -0.058 kHz	
Bandwidth of the emission:	422.8 kHz	within permitted frequency band⁷: <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁷ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

7.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 4, section 9
Guide:	ANSI C63.10 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------

B_n = Necessary Bandwidth	$B_n = 2BK$
B = Modulation rate	$B = 211.4$ kHz
K = Overall numerical factor	$K = 1$
Calculation:	$B_n = 2 \cdot (211.4 \text{ kHz}) \cdot 1 = 422.8 \text{ kHz}$

Designation of Emissions:	422k8A1D
---------------------------	-----------------

7.4 Conducted Powerline Emission Measurement 150 kHz to 30 MHz


Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-GEN Issue 4, section 8.8		
Guide:	ANSI C63.10 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		

Comment:	--
Date of test:	2017-05-23
Test site:	Shielded room, cabin no. 1

Test Result:	Test passed
--------------	-------------


Tested on:

L1

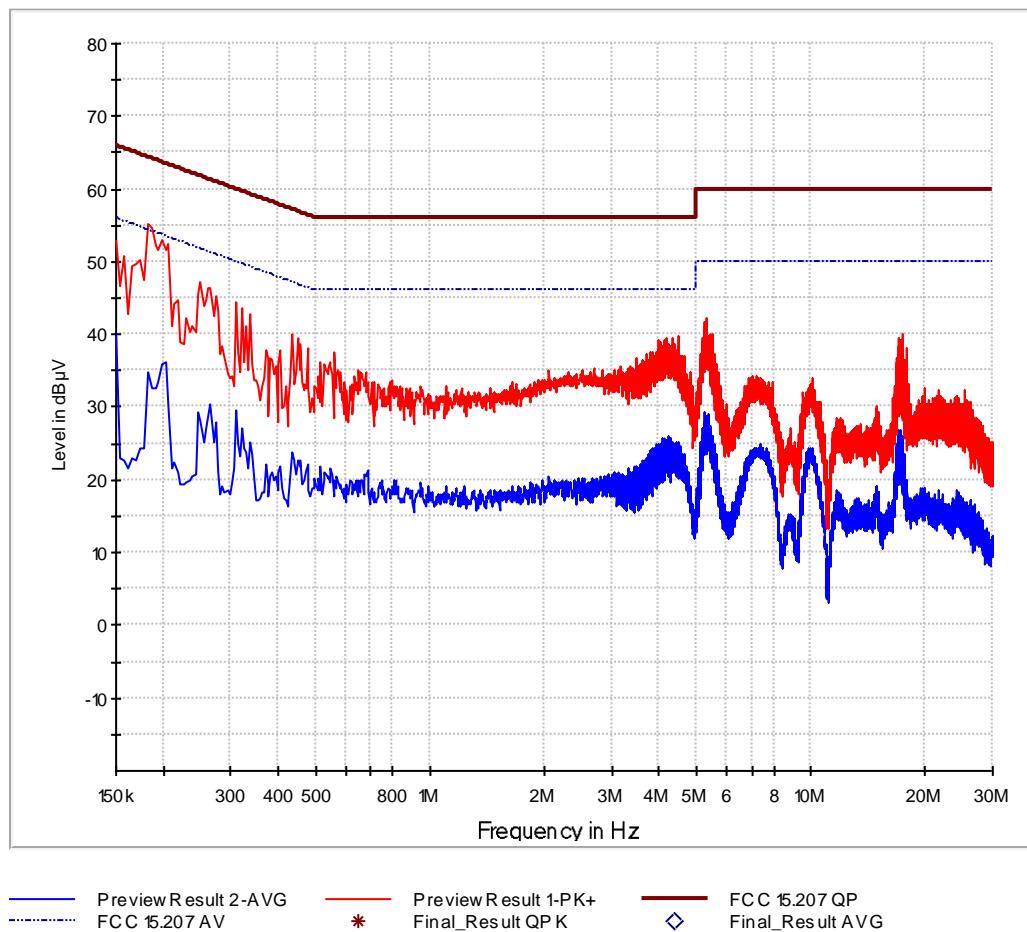

Tested on:

N

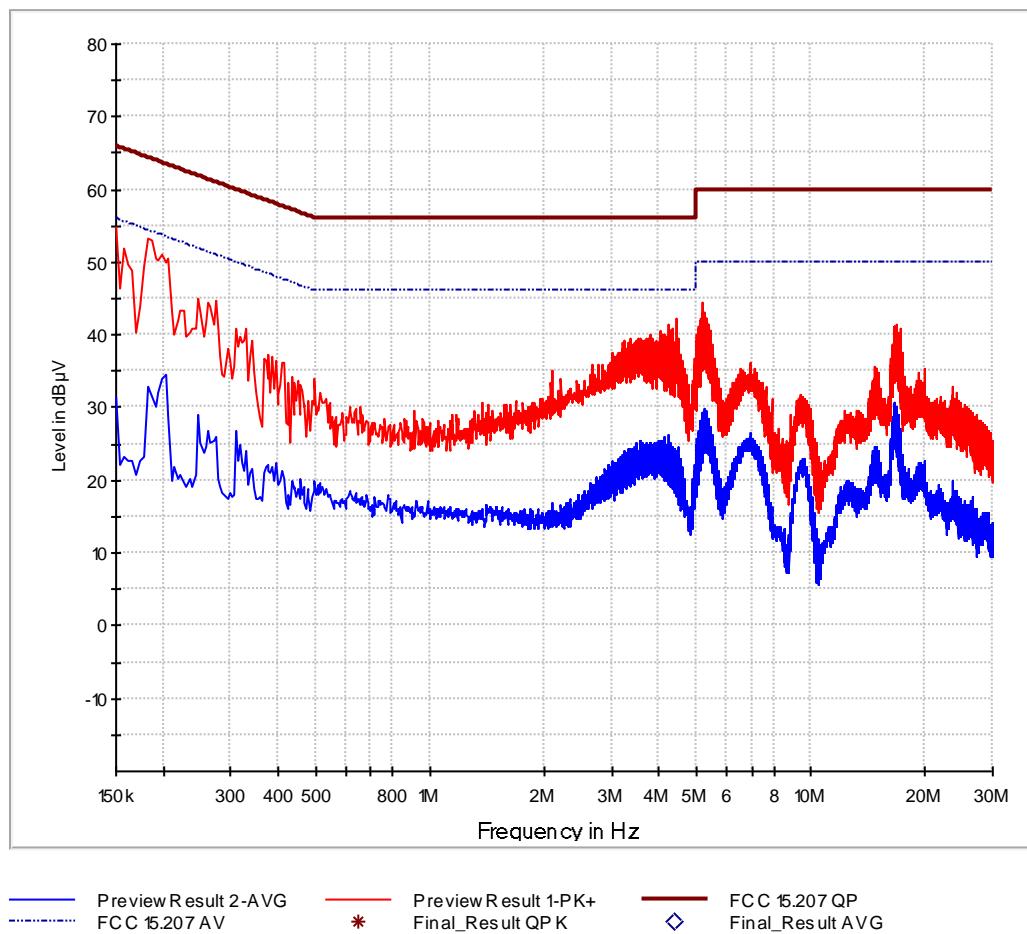

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$



7.5 Spectrum Mask

Rules and specifications:	CFR 47 Part 15, section 15.225(a)-(d) IC RSS-210 Issue 9, section B.6			
Guide:	ANSI C63.10			
Description:	<p>Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.</p> <p>General fieldstrength limit according to RSS-GEN is applicable outside the band 13.110 MHz – 14.010 MHz. See Radiated Emission Measurement 9 kHz to 30 MHz (7.6) for details.</p>			
Limit:	Frequency of Emission (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance d (meters)
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	--
Date of test:	2017-05-22
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters
Extrapolation Factor:	40 dB/decade

Test Result:

Test passed

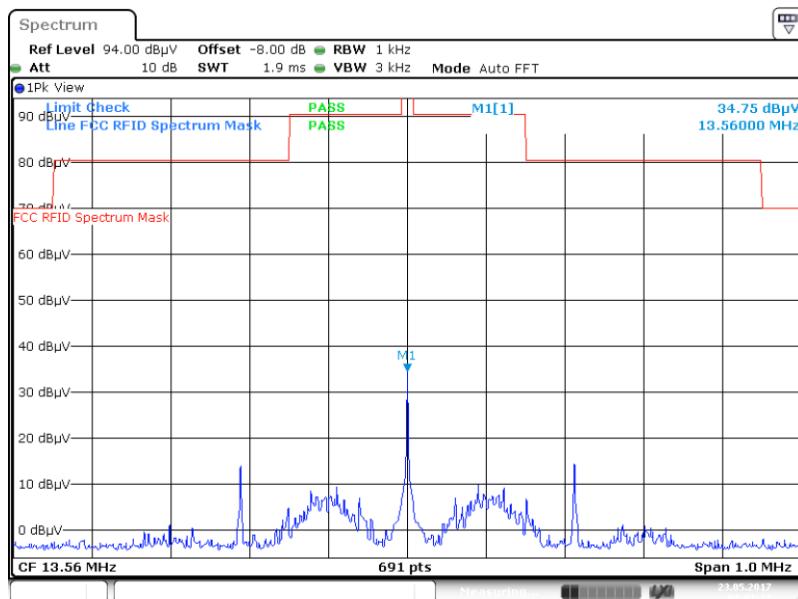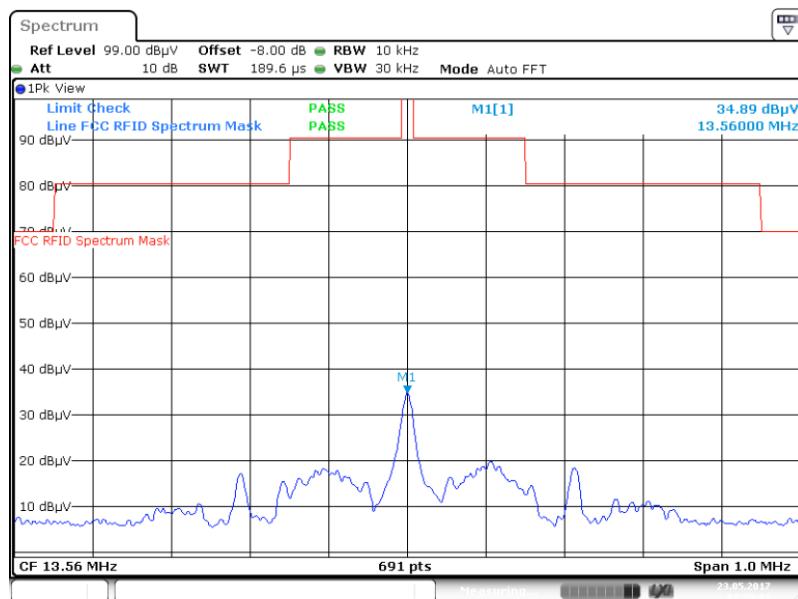


7.6 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.225(a)-(d) IC RSS-GEN Issue 4, sections 8.9 and 8.10(b)(c) and IC RSS-210 Issue 9, section B.6			
Guide:	ANSI C63.10			
Limit:	Frequency of Emission (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	--
Test distance:	10 m
Date of test:	2017-05-22
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

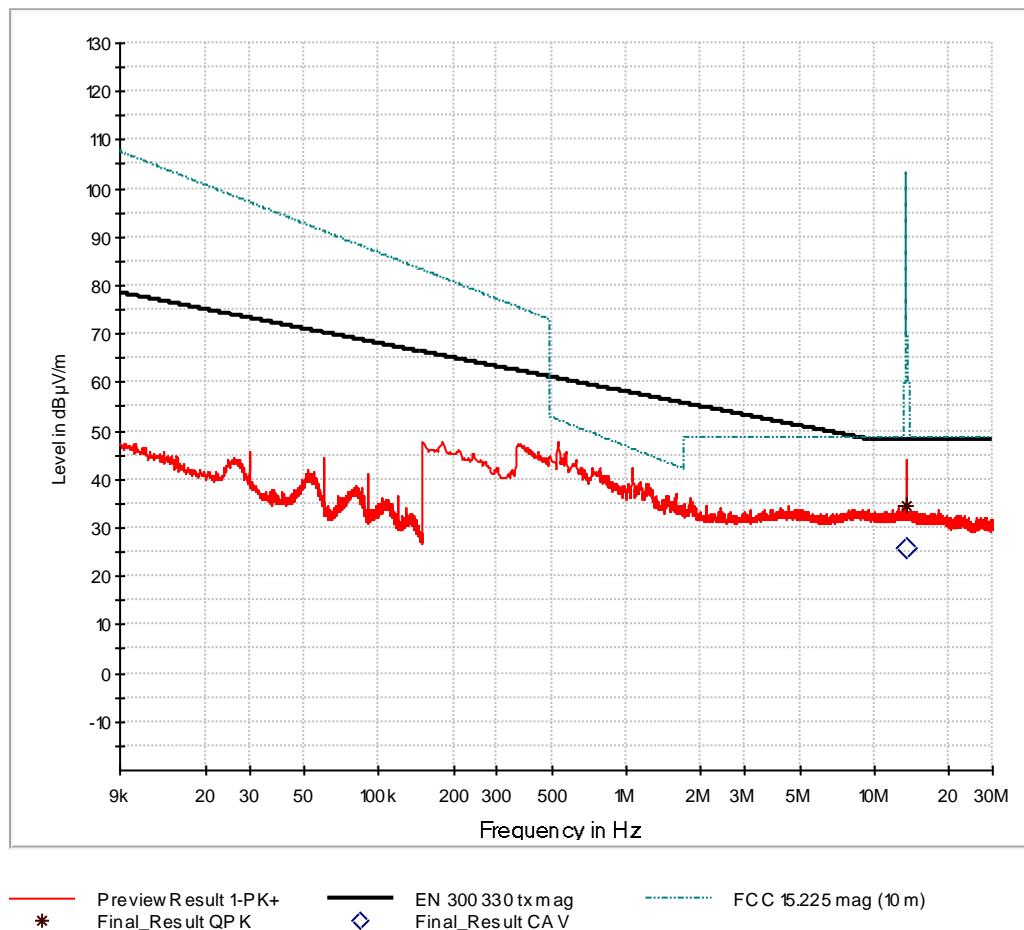

Final Results 1:

Frequency MHz	QuasiPeak dB μ V/m	Limit dB μ V/m	Margin dB	Pol	Azimuth deg
13.560000	34.58	48.00	13.42	H	-63.0

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance d1 (m)	d (m)	Reading Value (dB μ V)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
13.56000	Quasi-Peak	10	30	14.6	20.0	-19.1		15.5	84.0	68.5

Sample calculation of final values:

$$\text{Extrapolation Factor (dB)} = (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}$$


Note: Extrapolation factor (dB) and final value (dB μ V/m) are relating to distance d.

7.7 Radiated Emission Measurement 30 MHz to 1 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-GEN Issue 4, sections 8.9 and 8.10(b)(c) and IC RSS-210 Issue 9, section B.6		
Guide:	ANSI C63.10		
Limit:	Frequency of Emission (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Alternative Test Site (6.5)		

Comment:	--
Date of test:	2017-05-23
Test site:	Frequencies ≤ 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	Frequencies ≤ 8.2 GHz: 3 meters Frequencies > 8.2 GHz: 1 meter

Test Result:	Test passed
--------------	-------------

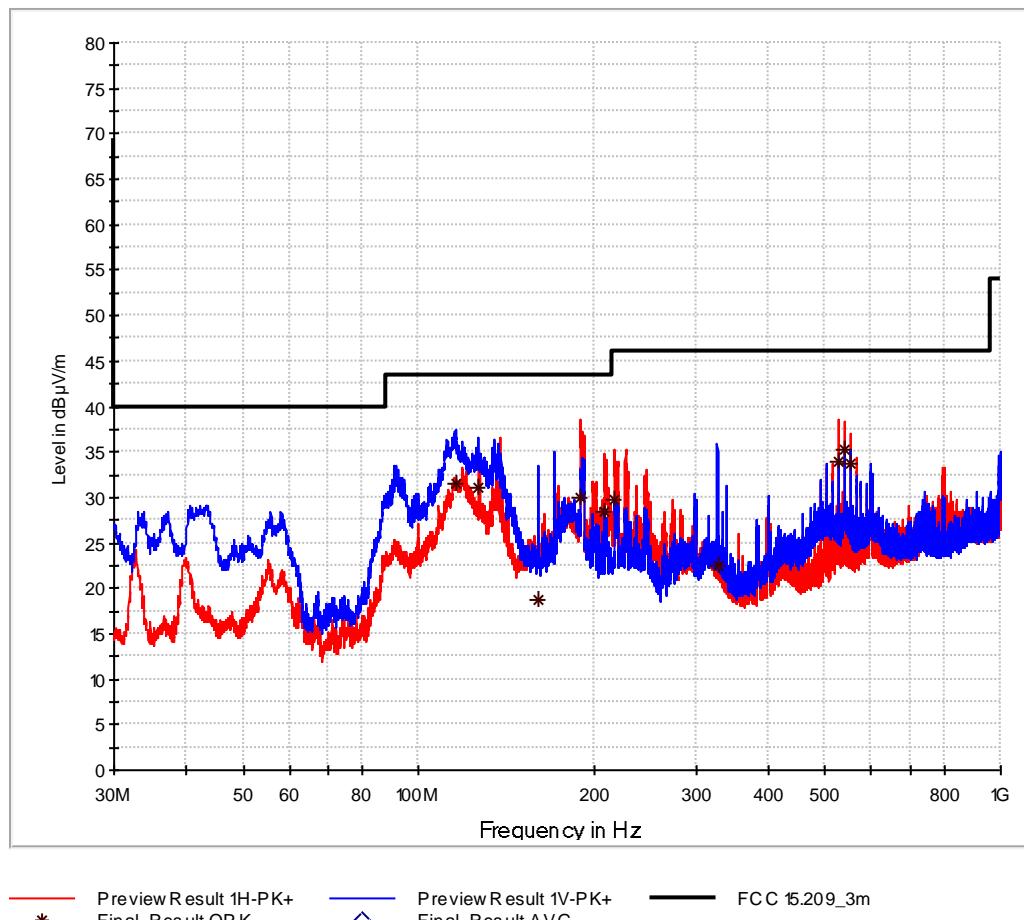

Frequency MHz	QuasiPeak dB μ V/m	Limit dB μ V/m	Margin dB	Height cm	Pol	Azimuth deg
116.130000	31.58	43.50	11.92	122.0	V	-43.0
127.170000	30.97	43.50	12.53	107.0	V	-152.0
160.375000	18.63	43.50	24.87	109.0	V	31.0
190.325000	30.06	43.50	13.44	169.0	H	-91.0
208.575000	28.42	43.50	15.08	112.0	H	-76.0
217.525000	29.70	46.00	16.30	125.0	H	-78.0
326.275000	22.38	46.00	23.62	161.0	V	12.0
528.005000	33.97	46.00	12.03	119.0	H	-56.0
540.000000	35.31	46.00	10.69	138.0	H	-54.0
551.990000	33.73	46.00	12.27	136.0	H	-35.0

Sample calculation of final values:


$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$

7.8 Carrier Frequency Stability

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 4, section 8.11 and IC RSS-210 Issue 9, section B.6
Guide:	ANSI C63.10
Limit:	The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (± 100 ppm) of the carrier frequency under nominal conditions.
Temperature range:	-20°C to +50°C (at normal supply voltage)
Voltage range:	85% to 115% of the rated supply voltage (at a temperature of +20°C)
Measurement procedure:	Carrier Frequency Stability (6.6)

Comment:	--
Date of test:	2017-05-23

7.8.1 Carrier Frequency Stability vs. Temperature

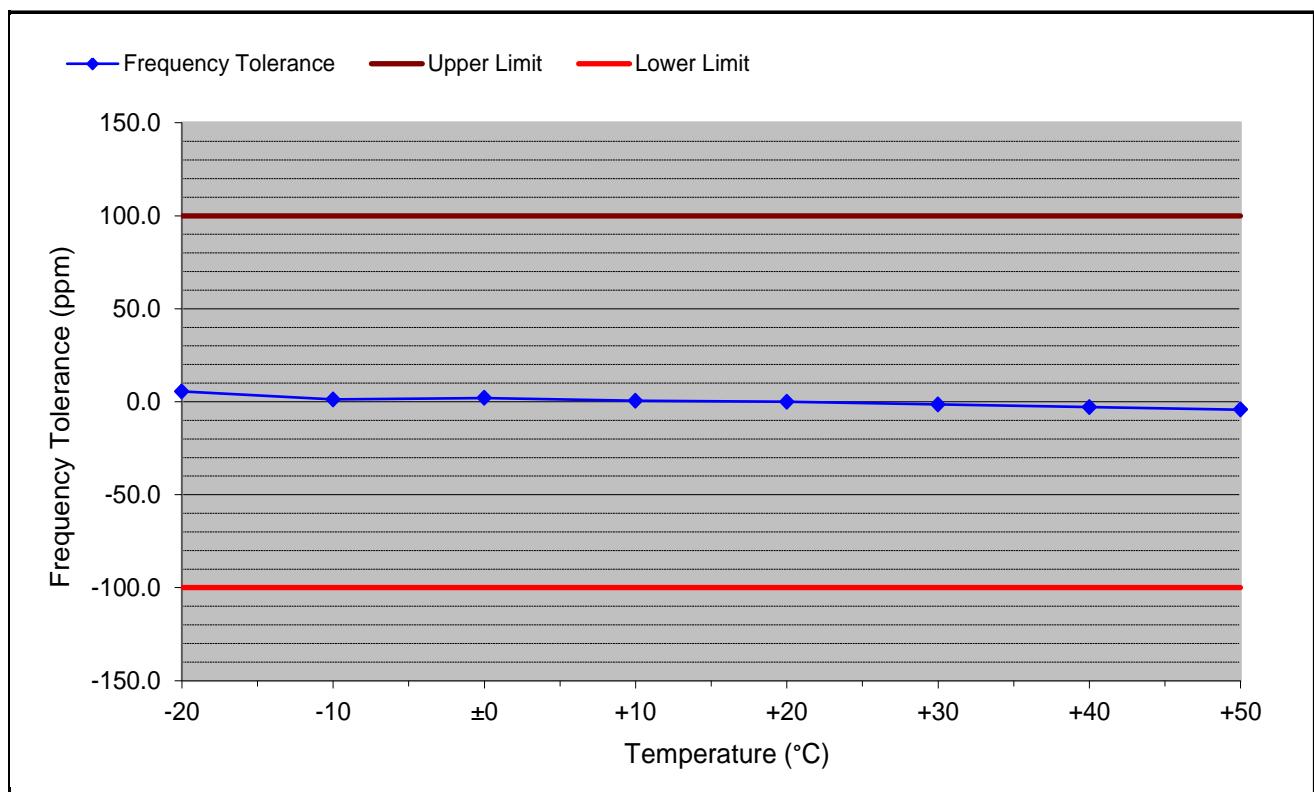


Supply voltage: 5 V Nominal frequency: 13.560010 MHz

Temperature (°C)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
-20	13.560084	74	5.5	+100.0	-100.0	94.5
-10	13.560027	17	1.2	+100.0	-100.0	98.8
±0	13.560038	28	2.1	+100.0	-100.0	97.9
+10	13.560017	7	0.5	+100.0	-100.0	99.5
+20	13.560010	0	0.0	+100.0	-100.0	100.0
+30	13.559990	-20	-1.5	+100.0	-100.0	98.5
+40	13.559971	-39	-2.9	+100.0	-100.0	97.1
+50	13.559952	-58	-4.2	+100.0	-100.0	95.8

Test Result:	Test passed
--------------	-------------

7.8.2 Carrier Frequency Stability vs. Supply Voltage

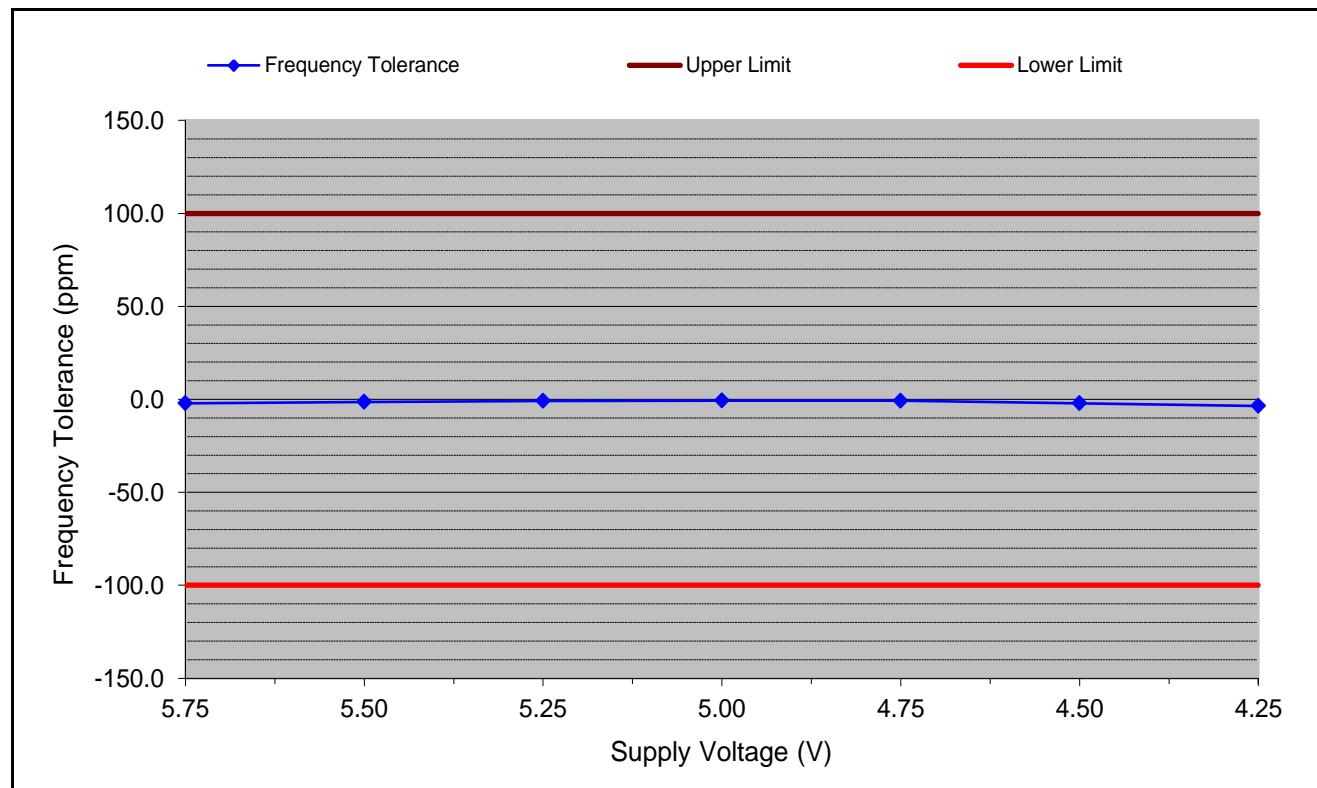

Temperature: +20 °C
 Nominal frequency: 13.560010 MHz

Battery End Point:

#WERT!

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
5.75	13.559981	-29	-2.1	+100.0	-100.0	97.9
5.50	13.559991	-19	-1.4	+100.0	-100.0	98.6
5.25	13.559999	-11	-0.8	+100.0	-100.0	99.2
5.00	13.560001	-9	-0.7	+100.0	-100.0	99.3
4.75	13.560000	-10	-0.8	+100.0	-100.0	99.2
4.50	13.559982	-28	-2.1	+100.0	-100.0	97.9
4.25	13.559962	-48	-3.5	+100.0	-100.0	96.5

Test Result:

Test passed

7.9 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 4, section 3.2
Guide:	IC RSS-102 Issue 5, section 2.5

Exposure of Humans to RF Fields		Applicable	Declared by applicant	Measured	Exemption
The antenna is					
<input type="checkbox"/> detachable					
The conducted output power (CP in watts) is measured at the antenna connector: $CP = \dots \text{ W}$					
The effective isotropic radiated power (EIRP in watts) is calculated using <input type="checkbox"/> the numerical antenna gain: $G = \dots$ $EIRP = G \cdot CP \Rightarrow EIRP = \dots \text{ W}$					
<input type="checkbox"/> the field strength ⁸ in V/m: $FS = \dots \text{ V/m}$ $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots \text{ W}$					
with: Distance between the antennas in m: $D = \dots \text{ m}$					
<input checked="" type="checkbox"/> not detachable					
A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by ⁸ : $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = 10 \text{ nW}$					
with: Field strength in V/m: $FS = 54 \mu\text{V/m}$ Distance between the two antennas in m: $D = 10 \text{ m}$					
Selection of output power					
The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.): $TP = 10 \text{ nW}$					

⁸ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
Separation distance between the user and the transmitting device is				
<input checked="" type="checkbox"/> less than or equal to 20 cm	<input type="checkbox"/> greater than 20 cm		<input checked="" type="checkbox"/>	
Transmitting device is				
<input type="checkbox"/> in the vicinity of the human head	<input type="checkbox"/> body-worn		<input checked="" type="checkbox"/>	

SAR evaluation										
Frequency (MHz)	Exemption limits (mW) ⁹ at separation distance of									
	<5 mm	10 mm	15 mm	20 mm	25 mm	30 mm	35 mm	40 mm	45 mm	50 mm
≤300 ¹⁰	71	101	132	162	193	223	254	284	315	345
450	52	70	88	106	123	141	159	177	195	213
835	17	30	42	55	67	80	92	105	117	130
1900	7	10	18	34	60	99	153	225	316	431
2450	4	7	15	30	52	83	123	173	235	309
3500	2	6	16	32	55	86	124	170	225	290
5800	1	6	15	27	41	56	71	85	97	106
Carrier frequency:	$f = \dots$ MHz									
Distance:	$d = \dots$ mm									
Transmitter output power:	$TP = \dots$ mW									
Limit:	$TP_{limit} = \dots$ mW									
<input type="checkbox"/> SAR evaluation is documented in test report no.										

⁹ The exemption limit in the table are based on measurements and simulations on half-wave dipole antennas at separation distances of 5 mm to 25 mm from a flat phantom, providing a SAR value of approximately 0.4 W/kg for 1 g of tissue. For low frequencies (300 MHz to 835 MHz), the exemption limits are derived from a linear fit. For high frequencies (1900 MHz and above), the exemption limits are derived from a third order polynomial fit.

¹⁰ Transmitters operating between 3 kHz and 10 MHz, meeting the exemption from routine SAR evaluation, shall demonstrate compliance to the instantaneous limits in IC RSS-102, issue 5, section 4.

Exposure of Humans to RF Fields (continued)		Applicable	Declared by applicant	Measured	Exemption
RF exposure evaluation					
RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:					
<input checked="" type="checkbox"/> below 20 MHz ¹¹ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance).					
<input type="checkbox"/> between 3 kHz and 10 MHz exposure limits apply as following:					
<input type="checkbox"/> In a uncontrolled environment the basic restriction for the instantaneous internal electric field strength is equal to or less than $2.7 \cdot 10^{-4} f \text{ V/m}_{\text{rms}}$ at any part of the body where f is in Hz. The instantaneous RF field strength is equal or less than $83 \text{ V/m}_{\text{rms}}$ and equal or less than $90 \text{ A/m}_{\text{rms}}$.					
<input type="checkbox"/> In a controlled environment the basic restriction for the instantaneous internal electric field strength is equal to or less than $1.35 \cdot 10^{-4} f \text{ V/m}_{\text{rms}}$ at any part of the body where f is in Hz. The instantaneous RF field strength is equal or less than $170 \text{ V/m}_{\text{rms}}$ and equal or less than $180 \text{ A/m}_{\text{rms}}$.					
<input type="checkbox"/> at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4,49/f^{0.5} \text{ W}$ (adjusted for tune-up tolerance, where f is in MHz).					
<input type="checkbox"/> at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance).					
<input type="checkbox"/> at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \cdot 10^{-2} f^{0.6834} \text{ W}$ (adjusted for tune-up tolerance), where f is in MHz.					
<input type="checkbox"/> at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).					
In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.					
Carrier frequency: $f = 13.56 \text{ MHz}$					
Transmitter output power: $TP = 10 \text{ nW}$					
Limit: $TP_{\text{limit}} = 1000 \text{ mW}$					<input checked="" type="checkbox"/>
<input type="checkbox"/> RF exposure evaluation is documented in test report no.					

¹¹ Transmitters operating between 3 kHz and 10 MHz, meeting the exemption from routine RF Exposure evaluation, shall demonstrate compliance to the instantaneous limits in IC RSS-102, issue 5, section 4.

8 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2015
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2015
<input type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	June 13, 2014 (published on June 20, 2014)
X	ANSI C63.10	American national Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June 27, 2013 (published on September 13, 2013)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 5 containing General Requirements for Compliance of Radio Apparatus, published by Industry Canada	November 2015
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 9 for Licence-Exempt Radio Apparatus: Category I Equipment, published by Industry Canada	August 2016
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 3 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 5: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), published by Industry Canada	March 2015
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 6: Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement, published by Industry Canada	January 2016
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
<input type="checkbox"/>	CAN/CSA CISPR 22-10	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	2010

TRC-43

Designation of Emissions, Class of Station and Na-
ture of Service, published by Industry Canada

November 2012

9 Test Equipment List with Calibration Data

Type	Inv.-No.	Type Designation	Serial Number	Manufacturer	Calibration Organiza-tion	Last Cali-bration	Next Cali-bration
EMI test receiver	11-001973	ESCI3	1000008	Rohde & Schwarz	Rohde & Schwarz	09/2016	09/2017
EMI test receiver	1711	ESPI7	836914/0002	Rohde & Schwarz	Rohde & Schwarz	06/2016	06/2017
EMI test receiver	22643	ESR7	101713	Rohde & Schwarz	Rohde & Schwarz	08/2016	08/2017
Spectrum analyser	2364	FSV40	101448	Rohde & Schwarz	Rohde & Schwarz	04/2017	04/2018
V-network	1059	ESH3-Z5	894785/005	Rohde & Schwarz	Rohde & Schwarz	08/2016	08/2017
V-network	1060	ESH3-Z5	862770/021	Rohde & Schwarz	Rohde & Schwarz	06/2016	05/2017
Loop antenna	1016	HFH2-Z2	882964/0001	Rohde & Schwarz	Rohde & Schwarz	08/2016	08/2017
TRILOG Broadband Antenna	2058	VULB 9163	9163-408	Schwarzbeck	Rohde & Schwarz	08/2016	08/2017
Multimeter	1653	21 III	76530546	Fluke	ZMK	11/2016	11/2018
Temperature test chamber	2408	PL-2J	150011626	Espec	ZMK	06/2016	06/2018

Note 1: No calibration required.

Note 2: Not calibrated separately but with the whole test system when recording calibration data.

Note 3: No calibration required. Devices are checked before use.

Note 4: No calibration required. Devices are checked by calibrated equipment during test.

10 Revision History

Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	2017-05-23	M. Biberger (lc)	First Edition
2	2017-06-08	M. Biberger	Second Edition: Model no. corrected
3	2017-06-29	M. Biberger	Third Edition: Model no. corrected
4	2017-07-03	M. Biberger	Fourth Edition: Test setup photos removed