

TEST REPORT

Reference No...... : WTX21X04033440W
FCC ID : 2AMDJ-TC50
Applicant..... : Tersus GNSS Inc
Address : Room 305, Building 1, No.1228 Jinhu Road, China (Shanghai) Pilot Free Trade Zone
Product Name : TD-LTE Wireless Data Terminal
Test Model..... : TC50
FCC Part 2.1093
Standards..... : ANSI / IEEE C95.1 : 2005+A1:2010
ANSI / IEEE C95.3 : 2002(R2008)
IEEE 1528 :2013
Date of Receipt sample.... : Apr.25, 2021
Date of Test : Apr.25, 2021 to May.11, 2021
Date of Issue : May.13, 2021
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:

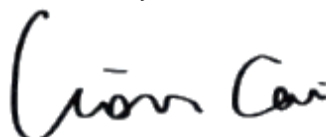

Hubrey Cai / Project Engineer

Lion Cai / RF Manager

Silin Chen / Manager

TABLE OF CONTENTS

1. General Information	3
1.1 Product Description for Equipment Under Test (EUT)	3
1.2 Test Standards.....	6
1.3 Test Methodology.....	6
1.4 Test Facility.....	6
2. Summary of Test Results	7
3. Specific Absorption Rate (SAR)	8
3.1 Introduction	8
3.2 SAR Definition.....	8
4. SAR Measurement System	9
4.1 The Measurement System	9
4.2 Probe.....	9
4.3 Probe Calibration Process	11
4.4 Phantom	12
4.5 Device Holder.....	12
4.6 Test Equipment List.....	13
5. Tissue Simulating Liquids	14
5.1 Composition of Tissue Simulating Liquid	14
5.2 Tissue Dielectric Parameters for Head and Body Phantoms.....	15
5.3 Tissue Calibration Result	16
6. SAR Measurement Evaluation	17
6.1 Purpose of System Performance Check	17
6.2 System Setup.....	17
6.3 Validation Results.....	19
7. EUT Testing Position	20
7.1 Define Two Imaginary Lines on The Handset.....	20
7.2 Cheek Position	21
7.3 Tilted Position.....	21
7.4 Body Position	22
7.5 EUT Antenna Position	23
7.6 EUT Testing Position.....	24
8. SAR Measurement Procedures	25
8.1 Measurement Procedures.....	25
8.2 Spatial Peak SAR Evaluation.....	25
8.3 Area & Zoom Scan Procedures.....	26
8.4 Volume Scan Procedures	26
8.5 SAR Averaged Methods	26
8.6 Power Drift Monitoring	26
9. SAR Test Result	27
9.1 Conducted RF Output Power	27
9.2 Test Results for Standalone SAR Test	57
9.3 Simultaneous Multi-band Transmission SAR Analysis.....	70
10. Measurement Uncertainty	75
10.1 Uncertainty for EUT SAR Test.....	75
10.2 Uncertainty for System Performance Check.....	76
Annex A. Plots of System Performance Check	78
Annex B. Plots of SAR Measurement	94
Annex C. EUT Photos	170
Annex D. Test Setup Photos	172
Annex E. Calibration Certificate	177

1. General Information

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Tersus GNSS Inc
Address of applicant: Room 305, Building 1, No.1228 Jinhu Road, China
(Shanghai) Pilot Free Trade Zone

Manufacturer: Speedata Group Ltd
Address of manufacturer: 1F Zhiyuan Building, NO.28, ShangDi6th Street HaiDian
District, Beijing, China

General Description of EUT:	
Product Name:	TD-LTE Wireless Data Terminal
Brand Name:	Tersus
Model No.:	TC50
Adding Model(s):	/
Rated Voltage:	DC3.8V by Battery
Battery:	7000mAh
Device Category:	Portable Device
Software Version:	V.SN50.2.1.26.2021041411
Hardware Version:	SD55-D3_Main board_Rev.A1
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
RF Output Power:	GSM850: 32.72dBm, GSM1900: 31.07dBm EDGE850: 27.15dBm, EDGE1900: 26.60dBm
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: -0.84dBi; GSM1900: -0.28dBi
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 23.14dBm, WCDMA Band 5: 23.94dBm
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: -0.28dBi, WCDMA Band 5: -0.84dBi
4G	
Support Networks:	FDD-LTE, TDD-LTE
Support Band:	FDD-LTE Band 5, 7 TDD-LTE Band 38, 40, 41
Uplink Frequency:	FDD-LTE Band 5: Tx: 824-849MHz, FDD-LTE Band 7: Tx: 2500-2570MHz, FDD-LTE Band 38: Tx: 2570-2620MHz, FDD-LTE Band 40: Tx: 2300-2400MHz, FDD-LTE Band 41: Tx: 2496-2690MHz
Downlink Frequency:	FDD-LTE Band 5: Rx: 869-894MHz, FDD-LTE Band 7: Rx: 2620-2690MHz, FDD-LTE Band 38: Rx: 2570-2620MHz, FDD-LTE Band 40: Rx: 2300-2400MHz, FDD-LTE Band 41: Rx: 2496-2690MHz

RF Output Power:	FDD-LTE Band 5: 22.97dBm FDD-LTE Band 7: 22.71dBm TDD-LTE Band 38: 21.93dBm TDD-LTE Band 40(2305-2315MHz): 21.69dBm TDD-LTE Band 40(2350-2360MHz): 21.83dBm TDD-LTE Band 41: 22.45dBm
Type of Modulation:	QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	FDD-LTE Band 5: -0.84dBi, FDD-LTE Band 7: 0.34dBi, TDD-LTE Band 38: 0.31dBi, TDD-LTE Band 40: 0.18dBi, TDD-LTE Band 41: 0.28dBi
WIFI(2.4G)	
Support Standards:	802.11b, 802.11g, 802.11n-HT20/40
Frequency Range:	2412-2462MHz for 802.11b/g/n-HT20 2422-2452MHz for 802.11n-HT40
RF Output Power:	16.73dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Quantity of Channels:	11 for 802.11b/g/n-HT20 7 for 802.11n-HT40
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	0.68dBi
Bluetooth	
Bluetooth Version:	V4.1
Frequency Range:	2402-2480MHz
RF Output Power:	5.854dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79/40
Channel Separation:	1MHz/2MHz
Antenna Type:	Integral Antenna
Antenna Gain:	0.68dBi
WIFI(5G)	
Support Standards:	802.11a, 802.11n-HT20/40
Frequency Range:	Band 1: 5180-5240MHz,Band 2: 5260-5320MHz, Band 3: 5500-5700MHz,Band 4: 5745-5825MHz
RF Output Power:	15.60dBm (Conducted)
Type of Modulation:	BPSK,QPSK, 16QAM, 64QAM, 256-QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	0.74dBi

1.2 Test Standards

ANSI/IEEE C95.1-2005, ANSI / IEEE C95.3 :2002, IEEE 1528-2013, KDB 447498 D01 v06, KDB 648474 D04 v01r03, KDB 248227 D01 v02r02, KDB 941225 D01 v03r01, KDB 941225 D05 v02r05 , and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010. Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Head SAR	Body-worn (10mm Gap)	Hotspot (10mm Gap)	SAR _{1g} Limit (W/kg)
	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	Maximum SAR _{1g} (W/kg)	
GSM	0.307	0.374	0.432	1.6
WCDMA	0.435	0.587	0.587	1.6
LTE	0.746	0.769	0.785	1.6
WLAN 2.4G	0.624	0.216	0.316	1.6
WLAN 5G	0.742	0.793	0.793	1.6
Simultaneous Transmission	1.482	1.562	1.562	1.6

Remark:

The highest reported SAR values for head, body-worn, router(hotspot), and simultaneous transmission conditions are 0.746W/kg, 0.793W/kg, 0.793W/kg, and 1.562W/kg respectively.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013 and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2 Probe


For the measurements the Specific Dosimetric E-Field Probe SSE2 SN 45/15 EPGO280 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm

Waltek Testing Group (Shenzhen) Co., Ltd.
<http://www.semtest.com.cn>

- Distance between dipoles / probe extremity: 2.7mm
 - Probe linearity: <0.25 dB
 - Axial Isotropy: <0.25 dB
 - Spherical Isotropy: <0.50 dB
 - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

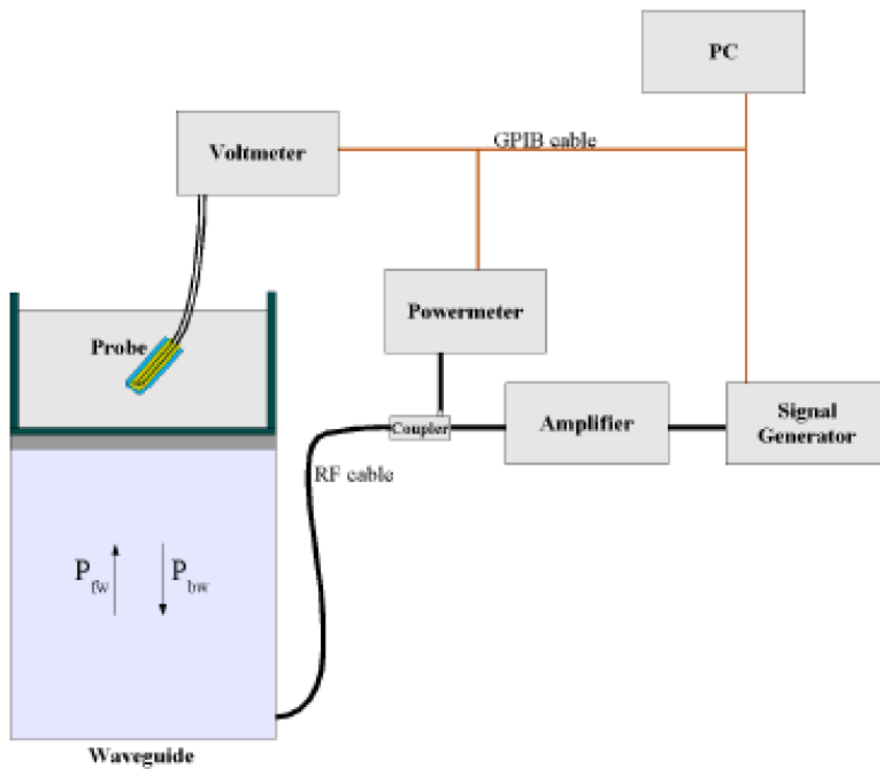

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$\text{SAR} = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 °.

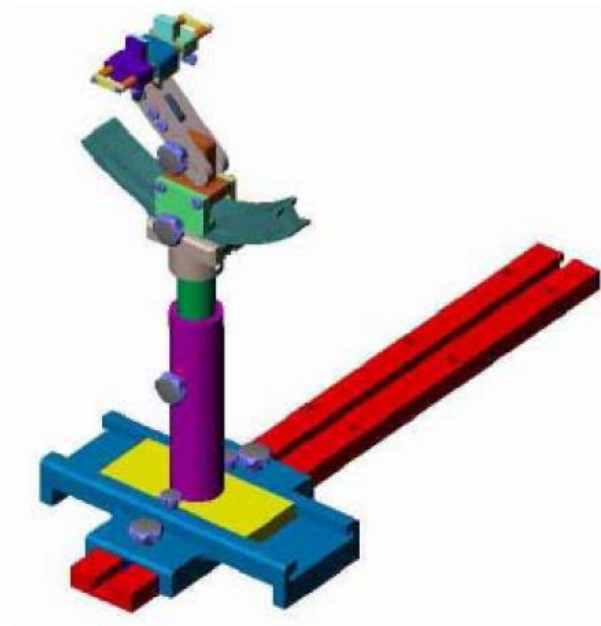

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005


4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	MVG	SSE5	SN 09/13 EP168	2020-05-22	2022-05-21
E-Field Probe	MVG	SSE2	SN 45/15 EPGO280	2020-07-03	2022-07-02
835MHz Dipole	MVG	SID835	SN 47/12 DIP 0G835-204	2020-03-11	2022-03-10
1900MHz Dipole	MVG	SID1900	SN 47/12 DIP 1G900-207	2020-03-11	2022-03-10
2450MHz Dipole	MVG	SID2450	SN 13/15 DIP 2G450-364	2020-03-11	2022-03-10
2600MHz Dipole	MVG	SID2600	SN 13/15 DIP 2G600-365	2020-03-11	2022-03-10
5 GHz Waveguide	MVG	SWG5500	SN 49/16 WGA45	2020-07-03	2022-07-02
Dielectric Probe	SATIMO	SCLMP	SN 47/12 OCPG49	2020-03-11	2022-03-10
SAM Phantom	SATIMO	SAM	SN/ 47/12 SAM95	N/A	N/A
Multi Meter	Keithley	Keithley 2000	4006367	2021-03-27	2022-03-26
Power meter	Keithley	3500	JC-2017-09-001	2021-03-27	2022-03-26
Power meter	Keithley	3500	JC-2017-09-001	2021-03-27	2022-03-26
Power Sensor	Agilent	11636B	JC-2017-10-002	2021-03-27	2022-03-26
Signal Generator	Rohde & Schwarz	SMR20	100047	2021-03-27	2022-03-26
Universal Tester	Rohde & Schwarz	CMU200	112315	2021-03-27	2022-03-26
Communications Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
Network Analyzer	HP	8753C	SEMT-1064	2021-03-27	2022-03-26
Directional Couplers	Agilent	778D	20160	2021-03-27	2022-03-26


5. Tissue Simulating Liquids

5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.

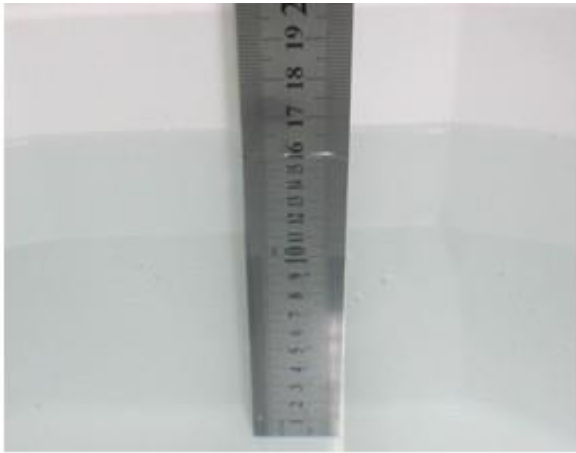

Liquid Height for Head SAR

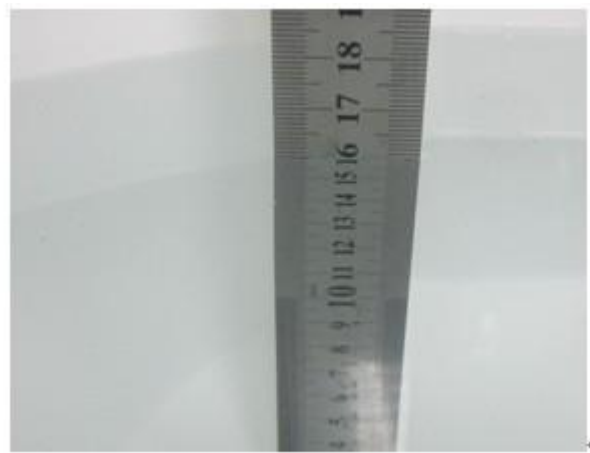

Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
Head						
750	41.1	1.4	57.0	0.2	0.3	0
835	40.3	1.4	57.9	0.2	0.2	0
1700-1900	55.2	0.3	0	0	0	44.5
2450	55.0	0.1	0	0	0	44.9
2600	54.9	0.1	0	0	0	45.0

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
Head			
5000-6000	65.52	17.24	17.24

5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head	
	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3
300	0.87	45.3
450	0.87	43.5
750	0.89	41.9
835	0.90	41.5
900	0.97	41.5
915	0.98	41.5
1450	1.20	40.5
1610	1.29	40.3
1750	1.37	40.1
1800-2000	1.40	40.0
2450	1.80	39.2
3000	2.40	38.5
5200	4.66	36.0
5800	5.27	35.3

5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Head Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading (σ)	Target (σ)	Delta (%)	Reading (ϵ_r)	Target (ϵ_r)	Delta (%)		
835	22.1	0.92	0.90	2.22	42.70	41.5	2.89	±5	2021-05-06
1900	22.3	1.40	1.40	0.00	39.57	40.0	-1.08	±5	2021-05-08
2450	21.9	1.82	1.80	1.11	39.85	39.2	1.66	±5	2021-04-30
2600	21.9	1.99	1.96	1.53	39.22	39.0	0.56	±5	2021-04-30
5200	22.5	4.80	4.66	3.00	37.11	36.0	3.08	±5	2021-05-11
5400	22.5	4.94	4.86	1.65	36.52	35.8	2.01	±5	2021-05-11
5600	22.5	5.12	5.07	0.99	35.34	35.5	-0.45	±5	2021-05-11
5800	22.5	5.31	5.27	0.76	34.92	35.3	-1.08	±5	2021-05-11


6. SAR Measurement Evaluation

6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835MHz, 1800MHz, 1900MHz, 2450MHz, 2600MHz, and 5GHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

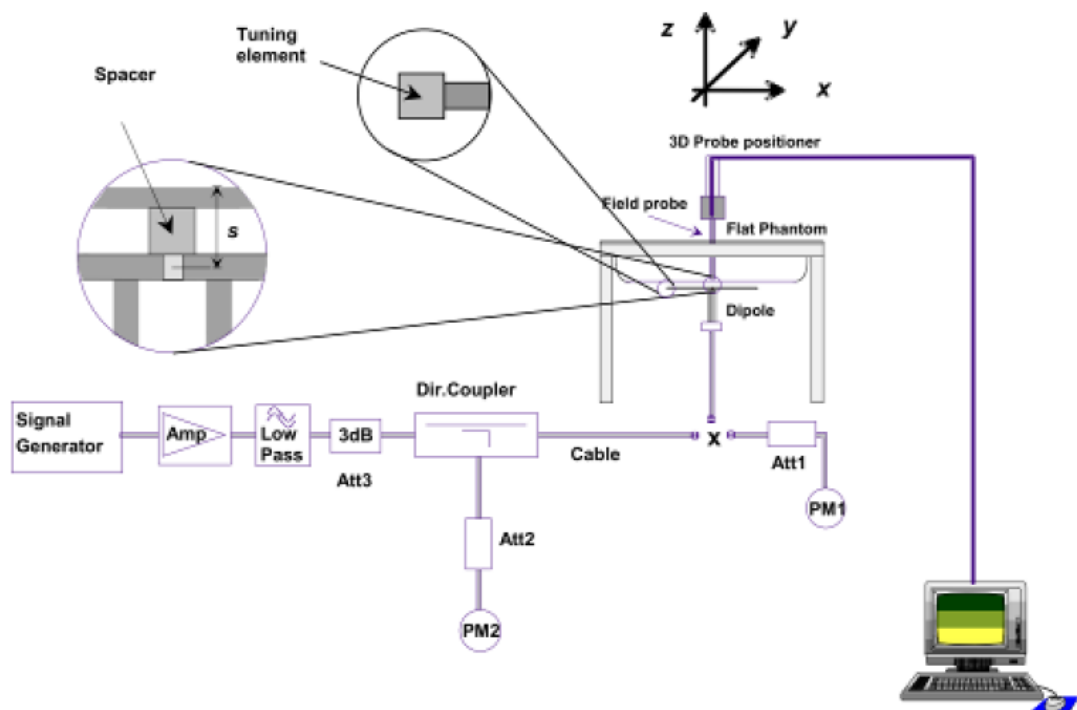

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

The output power on dipole port must be calibrated to 24 dBm(250 mW) before dipole is connected.
The output power on 5 GHz Waveguide must be calibrated to 20 dBm (100mW) before 5 GHz Waveguide is connected.

6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Liquid	Power (mw)	Targeted SAR1g	Measured SAR1g	Normalized SAR1g	Tolerance	Date
835	Head	250	6.26	1.51	6.04	-3.51	2021-05-06
1900	Head	250	39.59	9.50	38.00	-4.02	2021-05-08
2450	Head	250	53.76	13.83	55.32	2.90	2021-04-30
2600	Head	250	55.7	14.11	56.44	1.33	2021-04-30
5200	Head	100	159.0	16.746	167.46	5.32	2021-05-11
5400	Head	100	166.4	17.481	174.81	5.05	2021-05-11
5600	Head	100	173.8	17.604	176.04	1.29	2021-05-11
5800	Head	100	181.2	17.96	179.6	-0.88	2021-05-11

Remark: Referring to IEEE 1528-2013, Section 8.2, The system check shall be performed at a test frequency that is within $\pm 10\%$ or ± 100 MHz of the compliance test mid-band frequency, so the 1750 MHz system verification is made of 1800MHz Dipole.

Targeted and Measurement SAR

Please refer to Annex A for the plots of system performance check.

7. EUT Testing Position

7.1 Define Two Imaginary Lines on The Handset

- (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

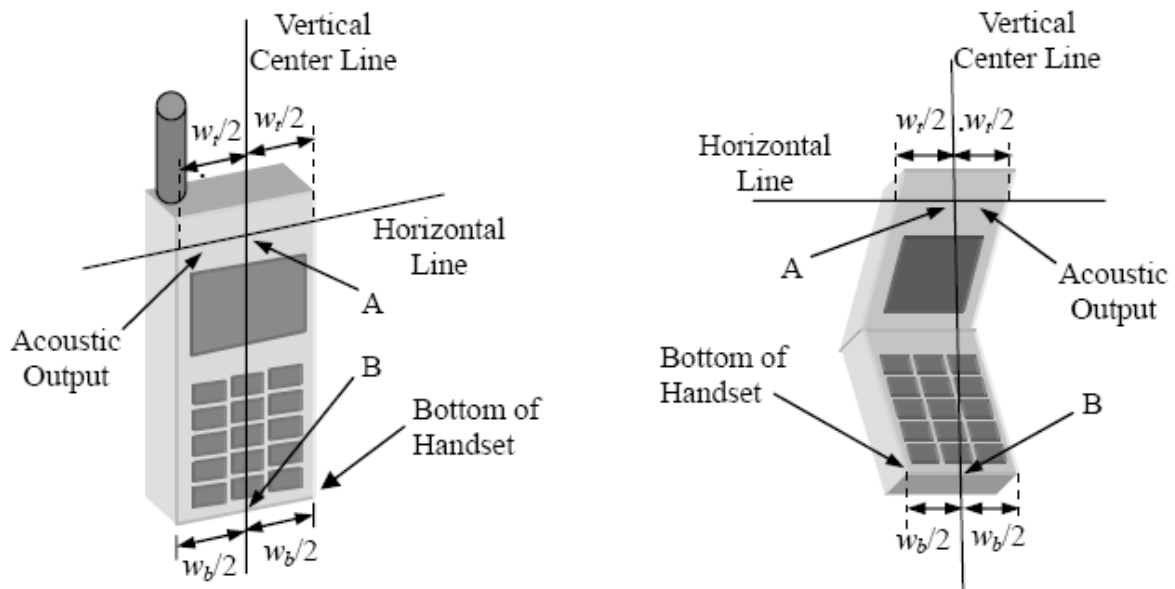


Illustration for Handset Vertical and Horizontal Reference Lines

7.2 Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 7.2).

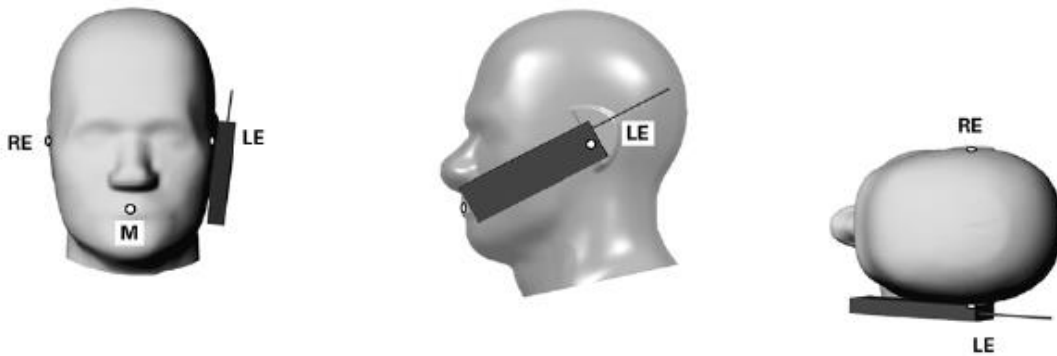


Illustration for Cheek Position

7.3 Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 7.3).

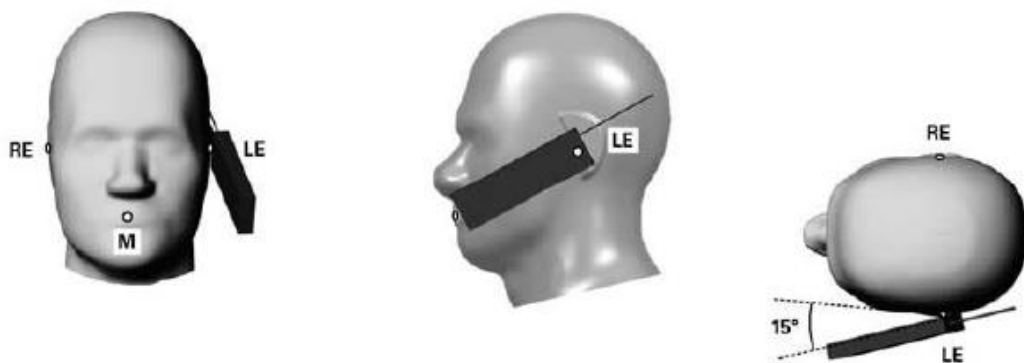


Illustration for Tilted Position

7.4 Body Position

- (a) To position the device parallel to the phantom surface with each side.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 10mm.


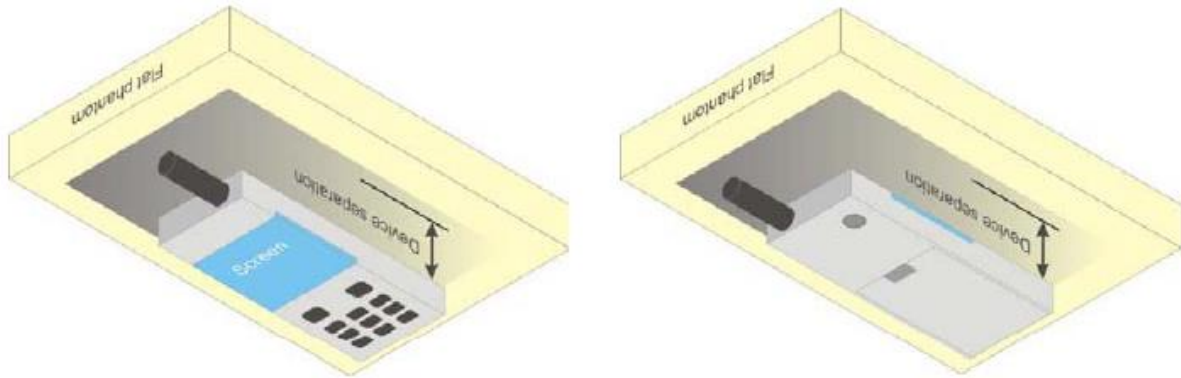


Illustration for Body Position

7.5 EUT Antenna Position

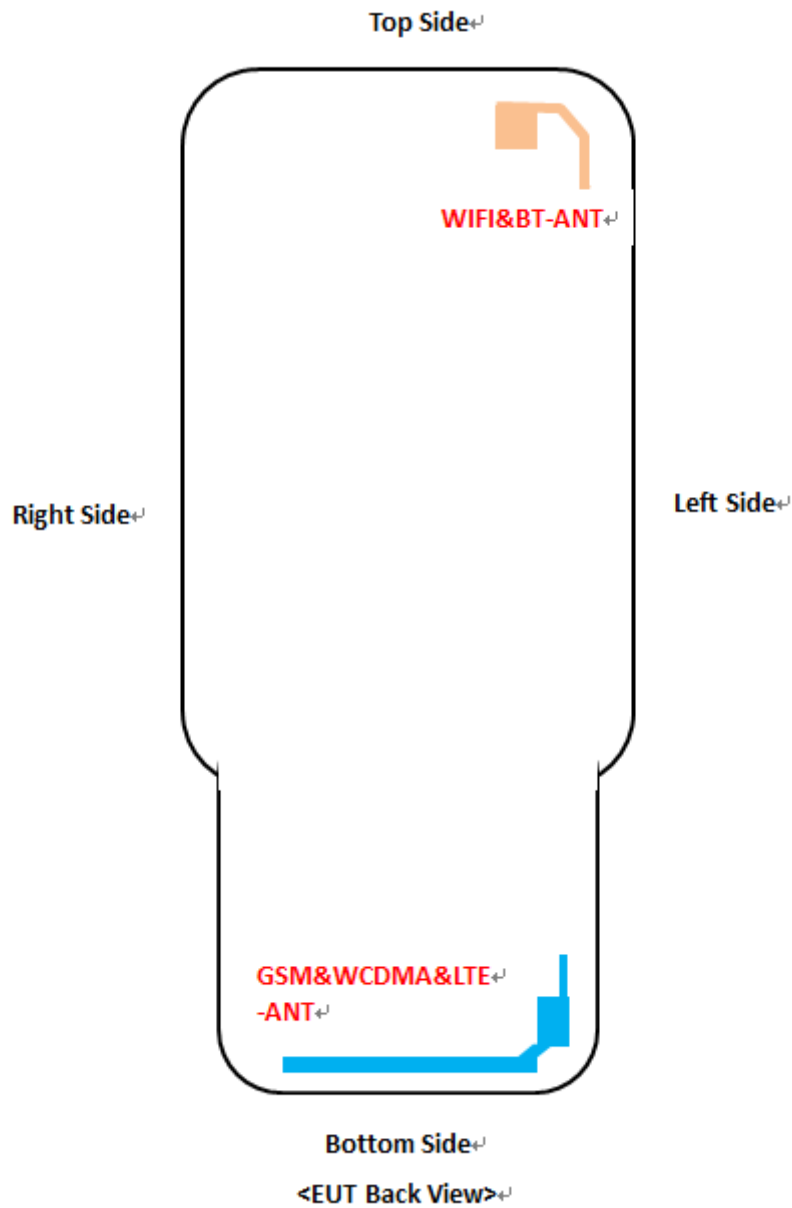

Block Diagram for EUT Antenna Position

Distance of EUT antenna-to-edge/surface(mm), Test distance:10mm						
Antennas	Front	Back	Left Side	Right Side	Top Side	Bottom Side
WWAN	<25	<25	<25	<25	176	<25
WLAN	<25	<25	<25	52	<25	187

7.6 EUT Testing Position

Head/Body mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Head SAR tests				
Antennas	Right Cheek	Left Cheek	Right Tilted	Left Tilted
WWAN	Yes	Yes	Yes	Yes
WLAN	Yes	Yes	Yes	Yes

Body-worn SAR tests, Test distance: 10mm		
Antennas	Front	Back
WWAN	Yes	Yes
WLAN	Yes	Yes

Hotspot SAR tests, Test distance: 10mm						
Antennas	Front	Back	Left Side	Right Side	Top Side	Bottom Side
WWAN	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	Yes	No	Yes	No

Remark:

- Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test separation distances is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
- Referring to KDB 648474 D04 Handset SAR v01r03, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$

Please refer to Annex D for the EUT test setup photos.

8. SAR Measurement Procedures

8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9. SAR Test Result

9.1 Conducted RF Output Power

GSM - Burst Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	32.58	32.68	32.55	33.0	30.76	31.00	31.00	31.5
GPRS (1 slot)	32.59	32.72	32.58	33.0	30.79	31.05	31.07	31.5
GPRS (2 slots)	31.88	32.03	31.80	32.5	29.55	29.93	30.12	30.5
GPRS (3 slots)	30.15	30.22	30.01	30.5	27.47	27.97	28.30	28.5
GPRS (4 slots)	29.08	29.14	28.95	29.5	26.69	27.26	27.59	28.0
EDGE (1 slot)	27.11	27.15	27.15	27.5	25.64	25.76	25.66	26.0
EDGE (2 slots)	25.93	26.04	25.99	26.5	25.49	26.60	26.48	27.0
EDGE (3 slots)	23.82	23.81	23.85	24.0	24.40	24.44	24.29	24.5
EDGE (4 slots)	22.56	22.67	22.65	23.0	23.30	23.34	23.13	23.5

GSM - Source-Based Time-Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	23.58	23.68	23.55	24.0	21.76	22.00	22.00	22.5
GPRS (1 slot)	23.59	23.72	23.58	24.0	21.79	22.05	22.07	22.5
GPRS (2 slots)	25.88	26.03	25.80	26.5	23.55	23.93	24.12	24.5
GPRS (3 slots)	25.90	25.97	25.76	26.0	23.22	23.72	24.05	24.5
GPRS (4 slots)	26.08	26.14	25.95	26.5	23.69	24.26	24.59	25.0
EDGE (1 slot)	18.11	18.15	18.15	18.5	16.64	16.76	16.66	17.0
EDGE (2 slots)	19.93	20.04	19.99	20.5	19.49	20.60	20.48	21.0
EDGE (3 slots)	19.57	19.56	19.60	20.0	20.15	20.19	20.04	20.5
EDGE (4 slots)	19.56	19.67	19.65	20.0	20.30	20.34	20.13	20.5

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

Remark:

1. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM for GSM850 and GSM1900 due to its highest source-based time-average power.
2. For Body SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (4TX slots) for GSM850 and

GPRS (4TX slots) for GSM1900 due to its highest source-based time-average power.

3. Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. The DUT do not support DTM function.
5. The DUT do not support Hotspot function.

WCDMA - Average Power (dBm)								
Band	WCDMA Band II				WCDMA Band V			
Channel	9262	9400	9538	Tune-up	4132	4183	4233	Tune-up
Frequency (MHz)	1852.4	1880.0	1907.6	power (dBm)	826.4	836.4	846.6	power (dB0m)
RMC 12.2k	22.95	23.06	23.14	23.5	23.94	23.82	23.93	24.0
HSDPA Subtest-1	21.72	21.82	21.89	22.0	22.85	22.96	22.96	23.0
HSDPA Subtest-2	21.68	21.78	21.86	22.0	22.83	22.95	22.94	23.0
HSDPA Subtest-3	21.68	21.76	21.84	22.0	22.81	22.91	22.93	23.0
HSDPA Subtest-4	21.69	21.76	21.85	22.0	22.83	22.93	22.94	23.0
HSUPA Subtest-1	21.65	21.70	21.80	22.0	22.86	22.85	23.00	23.5
HSUPA Subtest-2	21.61	21.67	21.76	22.0	22.83	22.81	22.96	23.0
HSUPA Subtest-3	21.63	21.68	21.78	22.0	22.84	22.83	22.97	23.0
HSUPA Subtest-4	21.62	21.69	21.76	22.0	22.85	22.83	22.98	23.0
HSUPA Subtest-5	21.62	21.67	21.77	22.0	22.86	22.83	22.96	23.0

Remark:

1. per KDB 941225 D01 v03, The 12.2kbps RMC mode was selected for SAR testing(the primary mode).
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

FDD-LTE Band 5:

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.21	0
		1	3	22.37	0
		1	5	22.24	0
		3	0	22.25	0
		3	2	22.29	0
		3	3	22.26	0
		6	0	21.30	1
	MCH	1	0	22.43	0
		1	3	22.50	0
		1	5	22.40	0
		3	0	22.41	0
		3	2	22.44	0
		3	3	22.41	0
		6	0	21.46	1
	HCH	1	0	22.57	0
		1	3	22.72	0
		1	5	22.63	0
		3	0	22.58	0
		3	2	22.65	0
		3	3	22.66	0
		6	0	21.66	1
16QAM	LCH	1	0	21.35	1
		1	3	21.58	1
		1	5	21.39	1
		3	0	21.31	1
		3	2	21.36	1
		3	3	21.33	1
		6	0	20.25	2
	MCH	1	0	21.71	1
		1	3	21.88	1
		1	5	21.70	1
		3	0	21.38	1
		3	2	21.41	1
		3	3	21.38	1
		6	0	20.39	2
HCH	1	0	21.75	1	
	1	3	21.99	1	

		1	5	21.79	1
		3	0	21.63	1
		3	2	21.64	1
		3	3	21.69	1
		6	0	20.74	2

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.27	0
		1	7	22.58	0
		1	14	22.33	0
		8	0	21.35	1
		8	4	21.35	1
		8	7	21.35	1
		15	0	21.29	1
	MCH	1	0	22.44	0
		1	7	22.73	0
		1	14	22.46	0
		8	0	21.44	1
		8	4	21.48	1
		8	7	21.46	1
		15	0	21.38	1
	HCH	1	0	22.65	0
		1	7	22.84	0
		1	14	22.65	0
		8	0	21.60	1
		8	4	21.70	1
		8	7	21.61	1
		15	0	21.58	1
16QAM	LCH	1	0	21.50	1
		1	7	21.70	1
		1	14	21.55	1
		8	0	20.42	2
		8	4	20.45	2
		8	7	20.43	2
		15	0	20.27	2
	MCH	1	0	21.77	1
		1	7	22.01	1
		1	14	21.78	1
		8	0	20.45	2
		8	4	20.48	2

		8	7	20.47	2
		15	0	20.41	2
	HCH	1	0	21.83	1
		1	7	22.02	1
		1	14	21.87	1
		8	0	20.50	2
		8	4	20.59	2
		8	7	20.53	2
		15	0	20.53	2

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.22	0
		1	12	22.57	0
		1	24	22.33	0
		12	0	21.27	1
		12	6	21.38	1
		12	13	21.32	1
		25	0	21.35	1
	MCH	1	0	22.40	0
		1	12	22.73	0
		1	24	22.39	0
		12	0	21.40	1
		12	6	21.44	1
		12	13	21.40	1
		25	0	21.43	1
	HCH	1	0	22.55	0
		1	12	22.93	0
		1	24	22.65	0
		12	0	21.63	1
		12	6	21.62	1
		12	13	21.55	1
		25	0	21.60	1
16QAM	LCH	1	0	21.45	1
		1	12	21.63	1
		1	24	21.52	1
		12	0	20.36	2
		12	6	20.48	2
		12	13	20.34	2
		25	0	20.35	2
	MCH	1	0	21.57	1

		1	12	22.01	1
		1	24	21.60	1
		12	0	20.52	2
		12	6	20.60	2
		12	13	20.52	2
		25	0	20.47	2
	HCH	1	0	21.68	1
		1	12	22.08	1
		1	24	21.77	1
		12	0	20.56	2
		12	6	20.58	2
		12	13	20.52	2
		25	0	20.56	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.30	0
		1	24	22.58	0
		1	49	22.39	0
		25	0	21.41	1
		25	12	21.40	1
		25	25	21.44	1
		50	0	21.41	1
	MCH	1	0	22.42	0
		1	24	22.97	0
		1	49	22.50	0
		25	0	21.47	1
		25	12	21.48	1
		25	25	21.51	1
		50	0	21.44	1
	HCH	1	0	22.58	0
		1	24	22.79	0
		1	49	22.66	0
		25	0	21.67	1
		25	12	21.64	1
		25	25	21.59	1
		50	0	21.58	1
16QAM	LCH	1	0	21.53	1
		1	24	21.79	1
		1	49	21.61	1
		25	0	20.42	2

		25	12	20.42	2
		25	25	20.48	2
		50	0	20.45	2
	MCH	1	0	21.74	1
		1	24	21.99	1
		1	49	21.82	1
		25	0	20.49	2
		25	12	20.55	2
		25	25	20.55	2
		50	0	20.48	2
	HCH	1	0	21.78	1
		1	24	21.98	1
		1	49	21.89	1
		25	0	20.63	2
		25	12	20.55	2
25		25	20.50	2	
50		0	20.53	2	

FDD-LTE Band 7:

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.09	0
		1	12	22.51	0
		1	24	22.13	0
		12	0	21.11	1
		12	6	21.18	1
		12	13	21.13	1
		25	0	21.13	1
	MCH	1	0	21.99	0
		1	12	22.26	0
		1	24	21.96	0
		12	0	21.01	1
		12	6	21.07	1
		12	13	20.97	1
		25	0	21.02	1
	HCH	1	0	21.89	0
		1	12	22.30	0
		1	24	21.86	0
		12	0	20.88	1
		12	6	20.93	1
		12	13	20.86	1
		25	0	20.91	1
16QAM	LCH	1	0	21.28	1
		1	12	21.62	1
		1	24	21.30	1
		12	0	20.46	2
		12	6	20.43	2
		12	13	20.45	2
		25	0	20.44	2
	MCH	1	0	21.29	1
		1	12	21.54	1
		1	24	21.18	1
		12	0	20.48	2
		12	6	20.51	2
		12	13	20.50	2
		25	0	20.36	2
HCH	1	0	21.08	1	
	1	12	21.39	1	

		1	24	21.10	1
		12	0	20.93	2
		12	6	20.99	2
		12	13	20.95	2
		25	0	20.92	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.11	0
		1	24	22.32	0
		1	49	22.12	0
		25	0	21.19	1
		25	12	21.17	1
		25	25	21.16	1
		50	0	21.17	1
	MCH	1	0	22.08	0
		1	24	22.20	0
		1	49	21.92	0
		25	0	21.11	1
		25	12	21.02	1
		25	25	21.03	1
		50	0	21.03	1
	HCH	1	0	21.91	0
		1	24	22.13	0
		1	49	21.94	0
		25	0	20.95	1
		25	12	20.92	1
		25	25	20.94	1
		50	0	20.99	1
16QAM	LCH	1	0	21.27	1
		1	24	21.50	1
		1	49	21.34	1
		25	0	20.59	2
		25	12	20.59	2
		25	25	20.50	2
		50	0	20.48	2
	MCH	1	0	21.45	1
		1	24	21.54	1
		1	49	21.27	1
		25	0	20.75	2
		25	12	20.78	2

		25	25	20.77	2
		50	0	20.79	2
	HCH	1	0	21.23	1
		1	24	21.37	1
		1	49	21.17	1
		25	0	20.64	2
		25	12	20.60	2
		25	25	20.64	2
		50	0	20.65	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.51	0
		1	37	22.68	0
		1	74	22.46	0
		37	0	21.22	1
		37	18	21.25	1
		37	38	21.21	1
		75	0	21.26	1
	MCH	1	0	22.03	0
		1	37	22.21	0
		1	74	21.86	0
		37	0	21.08	1
		37	18	21.06	1
		37	38	21.03	1
		75	0	21.07	1
	HCH	1	0	21.88	0
		1	37	22.19	0
		1	74	21.82	0
		37	0	20.87	1
		37	18	20.96	1
		37	38	20.85	1
		75	0	20.96	1
16QAM	LCH	1	0	21.28	1
		1	37	21.46	1
		1	74	21.31	1
		37	0	20.43	2
		37	18	20.65	2
		37	38	20.40	2
		75	0	20.55	2
	MCH	1	0	21.34	1

		1	37	21.45	1
		1	74	21.08	1
		37	0	20.61	2
		37	18	20.73	2
		37	38	20.99	2
		75	0	20.64	2
	HCH	1	0	21.13	1
		1	37	21.46	1
		1	74	21.10	1
		37	0	20.86	2
		37	18	20.97	2
		37	38	20.97	2
		75	0	20.99	2

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.16	0
		1	49	22.71	0
		1	99	22.12	0
		50	0	21.16	1
		50	25	21.15	1
		50	50	21.14	1
		100	0	21.14	1
	MCH	1	0	22.04	0
		1	49	22.26	0
		1	99	21.83	0
		50	0	21.04	1
		50	25	21.05	1
		50	50	20.85	1
		100	0	20.90	1
	HCH	1	0	21.74	0
		1	49	22.02	0
		1	99	21.69	0
		50	0	20.94	1
		50	25	20.98	1
		50	50	20.96	1
		100	0	20.94	1
16QAM	LCH	1	0	21.24	1
		1	49	21.53	1
		1	99	21.28	1
		50	0	20.64	2

		50	25	20.68	2
		50	50	20.69	2
		100	0	20.62	2
	MCH	1	0	21.39	1
		1	49	21.54	1
		1	99	21.11	1
		50	0	20.57	2
		50	25	20.59	2
		50	50	20.52	2
		100	0	20.90	2
	HCH	1	0	20.97	1
		1	49	21.33	1
		1	99	21.04	1
		50	0	20.70	2
		50	25	20.72	2
50		50	20.71	2	
100		0	20.65	2	

TDD-LTE Band 38:

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.28	0
		1	12	21.63	0
		1	24	21.28	0
		12	0	20.42	1
		12	6	20.52	1
		12	13	20.51	1
		25	0	20.38	1
	MCH	1	0	21.52	0
		1	12	21.89	0
		1	24	21.56	0
		12	0	20.56	1
		12	6	20.57	1
		12	13	20.56	1
		25	0	20.56	1
	HCH	1	0	21.77	0
		1	12	22.09	0
		1	24	21.77	0
		12	0	20.79	1
		12	6	20.82	1
		12	13	20.77	1
		25	0	20.81	1
16QAM	LCH	1	0	20.39	1
		1	12	20.66	1
		1	24	20.37	1
		12	0	20.38	2
		12	6	20.40	2
		12	13	20.33	2
		25	0	20.55	2
	MCH	1	0	20.83	1
		1	12	21.13	1
		1	24	20.84	1
		12	0	20.69	2
		12	6	20.71	2
		12	13	20.66	2
		25	0	20.65	2
HCH	1	0	20.98	1	
	1	12	21.31	1	

		1	24	21.01	1
		12	0	20.84	2
		12	6	20.85	2
		12	13	20.82	2
		25	0	20.85	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.47	0
		1	24	21.55	0
		1	49	21.46	0
		25	0	20.51	1
		25	12	20.47	1
		25	25	20.43	1
		50	0	20.39	1
	MCH	1	0	21.66	0
		1	24	21.72	0
		1	49	21.63	0
		25	0	20.63	1
		25	12	20.63	1
		25	25	20.65	1
		50	0	20.59	1
	HCH	1	0	21.80	0
		1	24	21.92	0
		1	49	21.82	0
		25	0	20.87	1
		25	12	20.88	1
		25	25	20.85	1
		50	0	20.84	1
16QAM	LCH	1	0	20.58	1
		1	24	20.71	1
		1	49	20.61	1
		25	0	20.47	2
		25	12	20.43	2
		25	25	20.38	2
		50	0	20.37	2
	MCH	1	0	20.89	1
		1	24	21.03	1
		1	49	20.94	1
		25	0	20.69	2
		25	12	20.67	2

		25	25	20.67	2
		50	0	20.66	2
	HCH	1	0	21.17	1
		1	24	21.29	1
		1	49	21.18	1
		25	0	20.89	2
		25	12	20.89	2
		25	25	20.87	2
		50	0	20.86	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.46	0
		1	37	21.70	0
		1	74	21.36	0
		37	0	20.55	1
		37	18	20.52	1
		37	38	20.48	1
		75	0	20.52	1
	MCH	1	0	21.57	0
		1	37	21.89	0
		1	74	21.63	0
		37	0	20.61	1
		37	18	20.63	1
		37	38	20.59	1
		75	0	20.63	1
	HCH	1	0	21.69	0
		1	37	22.14	0
		1	74	21.73	0
		37	0	20.75	1
		37	18	20.83	1
		37	38	20.83	1
		75	0	20.84	1
16QAM	LCH	1	0	20.59	1
		1	37	20.86	1
		1	74	20.55	1
		37	0	20.50	2
		37	18	20.48	2
		37	38	20.45	2
		75	0	20.53	2
	MCH	1	0	20.76	1

		1	37	21.09	1
		1	74	20.82	1
		37	0	20.62	2
		37	18	20.64	2
		37	38	20.64	2
		75	0	20.60	2
	HCH	1	0	21.04	1
		1	37	21.46	1
		1	74	21.11	1
		37	0	20.73	2
		37	18	20.82	2
		37	38	20.82	2
		75	0	20.81	2

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.40	0
		1	49	21.60	0
		1	99	21.40	0
		50	0	20.45	1
		50	25	20.42	1
		50	50	20.36	1
		100	0	20.40	1
	MCH	1	0	21.54	0
		1	49	21.78	0
		1	99	21.60	0
		50	0	20.55	1
		50	25	20.58	1
		50	50	20.58	1
		100	0	20.54	1
	HCH	1	0	21.57	0
		1	49	21.93	0
		1	99	21.62	0
		50	0	20.68	1
		50	25	20.79	1
		50	50	20.75	1
		100	0	20.69	1
16QAM	LCH	1	0	20.53	1
		1	49	20.78	1
		1	99	20.60	1
		50	0	20.39	2

		50	25	20.40	2
		50	50	20.61	2
		100	0	20.39	2
	MCH	1	0	20.77	1
		1	49	21.01	1
		1	99	20.85	1
		50	0	20.58	2
		50	25	20.63	2
		50	50	20.63	2
		100	0	20.54	2
	HCH	1	0	20.72	1
		1	49	21.00	1
		1	99	20.80	1
		50	0	20.68	2
		50	25	20.80	2
50		50	20.77	2	
100		0	20.69	2	

TDD-LTE Band 40 a(2305-2315MHz):

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.34	0
		1	12	21.66	0
		1	24	21.32	0
		12	0	20.37	1
		12	6	20.42	1
		12	13	20.39	1
		25	0	20.40	1
	MCH	1	0	21.34	0
		1	12	21.65	0
		1	24	21.33	0
		12	0	20.51	1
		12	6	20.38	1
		12	13	20.33	1
		25	0	20.37	1
	HCH	1	0	21.33	0
		1	12	21.66	0
		1	24	21.33	0
		12	0	20.32	1
		12	6	20.44	1
		12	13	20.38	1
		25	0	20.34	1
16QAM	LCH	1	0	20.54	1
		1	12	20.83	1
		1	24	20.49	1
		12	0	20.38	2
		12	6	20.39	2
		12	13	20.38	2
		25	0	20.51	2
	MCH	1	0	20.65	1
		1	12	20.97	1
		1	24	20.68	1
		12	0	20.37	2
		12	6	20.39	2
		12	13	20.41	2
		25	0	20.31	2
HCH	1	0	20.58	1	
	1	12	20.91	1	

		1	24	20.59	1
		12	0	20.36	2
		12	6	20.38	2
		12	13	20.32	2
		25	0	20.35	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	/	0
		1	24	/	0
		1	49	/	0
		25	0	/	1
		25	12	/	1
		25	25	/	1
		50	0	/	1
	MCH	1	0	21.43	0
		1	24	21.69	0
		1	49	21.39	0
		25	0	20.39	1
		25	12	20.45	1
		25	25	20.42	1
		50	0	20.40	1
	HCH	1	0	/	0
		1	24	/	0
		1	49	/	0
		25	0	/	1
		25	12	/	1
		25	25	/	1
		50	0	/	1
16QAM	LCH	1	0	/	1
		1	24	/	1
		1	49	/	1
		25	0	/	2
		25	12	/	2
		25	25	/	2
		50	0	/	2
	MCH	1	0	20.67	1
		1	24	20.75	1
		1	49	20.64	1
		25	0	20.34	2
		25	12	20.39	2

		25	25	20.34	2
		50	0	20.33	2
	HCH	1	0	/	1
		1	24	/	1
		1	49	/	1
		25	0	/	2
		25	12	/	2
		25	25	/	2
		50	0	/	2

FDD-LTE Band 40(2350 MHz -2360 MHz):

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.55	0
		1	12	21.81	0
		1	24	21.50	0
		12	0	20.57	1
		12	6	20.59	1
		12	13	20.53	1
		25	0	20.59	1
	MCH	1	0	21.52	0
		1	12	21.82	0
		1	24	21.50	0
		12	0	20.55	1
		12	6	20.55	1
		12	13	20.51	1
		25	0	20.59	1
	HCH	1	0	21.52	0
		1	12	21.78	0
		1	24	21.45	0
		12	0	20.54	1
		12	6	20.55	1
		12	13	20.50	1
		25	0	20.56	1
16QAM	LCH	1	0	20.71	1
		1	12	20.98	1
		1	24	20.66	1
		12	0	20.57	2
		12	6	20.57	2
		12	13	20.52	2

	MCH	25	0	20.51	2
		1	0	20.85	1
		1	12	21.18	1
		1	24	20.83	1
		12	0	20.60	2
		12	6	20.64	2
		12	13	20.58	2
	25	0	20.53	2	
	HCH	1	0	20.78	1
		1	12	21.07	1
		1	24	20.74	1
		12	0	20.50	2
		12	6	20.50	2
		12	13	20.50	2
25		0	20.54	2	

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	/	0
		1	24	/	0
		1	49	/	0
		25	0	/	1
		25	12	/	1
		25	25	/	1
		50	0	/	1
	MCH	1	0	21.83	0
		1	24	21.71	0
		1	49	21.54	0
		25	0	20.60	1
		25	12	20.63	1
		25	25	20.61	1
		50	0	20.60	1
	HCH	1	0	/	0
		1	24	/	0
		1	49	/	0
		25	0	/	1
		25	12	/	1
		25	25	/	1
		50	0	/	1
16QAM	LCH	1	0	/	1
		1	24	/	1

		1	49	/	1
		25	0	/	2
		25	12	/	2
		25	25	/	2
		50	0	/	2
	MCH	1	0	20.86	1
		1	24	20.92	1
		1	49	20.78	1
		25	0	20.58	2
		25	12	20.60	2
		25	25	20.55	2
		50	0	20.55	2
	HCH	1	0	/	1
		1	24	/	1
		1	49	/	1
		25	0	/	2
		25	12	/	2
		25	25	/	2
		50	0	/	2

TDD-LTE Band 41:

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.33	0
		1	12	21.63	0
		1	24	21.31	0
		12	0	20.52	1
		12	6	20.35	1
		12	13	20.39	1
		25	0	20.34	1
	MCH	1	0	21.60	0
		1	12	21.94	0
		1	24	21.66	0
		12	0	20.63	1
		12	6	20.69	1
		12	13	20.64	1
		25	0	20.68	1
	HCH	1	0	22.04	0
		1	12	22.39	0
		1	24	22.00	0
		12	0	21.05	1
		12	6	21.05	1
		12	13	20.99	1
		25	0	21.00	1
16QAM	LCH	1	0	20.46	1
		1	12	20.73	1
		1	24	20.39	1
		12	0	20.37	2
		12	6	20.40	2
		12	13	20.36	2
		25	0	20.32	2
	MCH	1	0	20.93	1
		1	12	21.22	1
		1	24	20.94	1
		12	0	20.77	2
		12	6	20.79	2
		12	13	20.78	2
		25	0	20.67	2
HCH	1	0	21.13	1	
	1	12	21.44	1	

		1	24	21.07	1
		12	0	20.49	2
		12	6	20.46	2
		12	13	20.40	2
		25	0	20.42	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.50	0
		1	24	21.52	0
		1	49	21.40	0
		25	0	20.46	1
		25	12	20.47	1
		25	25	20.42	1
		50	0	20.40	1
	MCH	1	0	21.74	0
		1	24	21.79	0
		1	49	21.81	0
		25	0	20.70	1
		25	12	20.71	1
		25	25	20.77	1
		50	0	20.71	1
	HCH	1	0	22.18	0
		1	24	22.17	0
		1	49	22.06	0
		25	0	21.15	1
		25	12	21.14	1
		25	25	21.03	1
		50	0	21.07	1
16QAM	LCH	1	0	20.67	1
		1	24	20.68	1
		1	49	20.55	1
		25	0	20.52	2
		25	12	20.44	2
		25	25	20.39	2
		50	0	20.56	2
	MCH	1	0	21.00	1
		1	24	21.14	1
		1	49	21.08	1
		25	0	20.75	2
		25	12	20.74	2

		25	25	20.81	2
		50	0	20.78	2
	HCH	1	0	21.33	1
		1	24	21.33	1
		1	49	21.23	1
		25	0	20.54	2
		25	12	20.51	2
		25	25	20.51	2
		50	0	20.52	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.48	0
		1	37	21.71	0
		1	74	21.38	0
		37	0	20.51	1
		37	18	20.51	1
		37	38	20.47	1
		75	0	20.55	1
	MCH	1	0	21.67	0
		1	37	22.00	0
		1	74	21.72	0
		37	0	20.67	1
		37	18	20.71	1
		37	38	20.75	1
		75	0	20.77	1
	HCH	1	0	22.18	0
		1	37	22.45	0
		1	74	21.97	0
		37	0	21.29	1
		37	18	21.20	1
		37	38	21.13	1
		75	0	21.24	1
16QAM	LCH	1	0	20.64	1
		1	37	20.85	1
		1	74	20.48	1
		37	0	20.48	2
		37	18	20.45	2
		37	38	20.42	2
		75	0	20.45	2
	MCH	1	0	20.89	1

		1	37	21.22	1
		1	74	20.95	1
		37	0	20.71	2
		37	18	20.75	2
		37	38	20.78	2
		75	0	20.74	2
	HCH	1	0	21.35	1
		1	37	21.54	1
		1	74	21.14	1
		37	0	20.43	2
		37	18	20.57	2
		37	38	20.68	2
		75	0	20.96	2

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.46	0
		1	49	21.58	0
		1	99	21.33	0
		50	0	20.38	1
		50	25	20.39	1
		50	50	20.27	1
		100	0	20.32	1
	MCH	1	0	22.45	0
		1	49	22.30	0
		1	99	22.37	0
		50	0	21.62	1
		50	25	21.74	1
		50	50	21.71	1
		100	0	21.68	1
	HCH	1	0	21.87	0
		1	49	22.04	0
		1	99	21.69	0
		50	0	20.93	1
		50	25	20.84	1
		50	50	20.67	1
		100	0	20.81	1
16QAM	LCH	1	0	20.65	1
		1	49	20.72	1
		1	99	20.50	1
		50	0	20.51	2

		50	25	20.62	2
		50	50	20.22	2
		100	0	20.59	2
	MCH	1	0	20.91	1
		1	49	21.17	1
		1	99	21.03	1
		50	0	20.68	2
		50	25	20.77	2
		50	50	20.76	2
		100	0	20.69	2
	HCH	1	0	20.98	1
		1	49	21.06	1
		1	99	20.71	1
		50	0	20.93	2
		50	25	20.82	2
50		50	20.64	2	
100		0	20.77	2	

Remark:

1. Per KDB941225 D05 v02r05, Start with the largest channel bandwidth then measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. 6 When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
2. Per KDB941225 D05 v02r05, The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
3. Per KDB941225 D05 v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB941225 D05 v02r05, For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in 5.2.1, 5.2.2, and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

WLAN(2.4G) - Maximum Average Power					
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	15.44	15.5
		CH 06	2437	16.31	16.5
		CH 11	2462	16.73	17.0
802.11g	6Mbps	CH 01	2412	14.03	14.5
		CH 06	2437	15.63	16.0
		CH 11	2462	15.01	15.5
802.11n (20MHz)	MCS0	CH 01	2412	14.41	14.5
		CH 06	2437	15.24	15.5
		CH 11	2462	16.25	16.5
802.11n (40MHz)	MCS0	CH 03	2422	13.46	13.5
		CH 06	2437	14.04	14.5
		CH 09	2452	14.45	14.5

WLAN(5.2G) – Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	CH 36	5180	13.35	13.5
	CH 40	5200	12.87	13.0
	CH 48	5240	12.97	13.0
802.11n (HT20)	CH 36	5180	12.18	12.5
	CH 40	5200	12.82	13.0
	CH 48	5240	12.46	12.5
802.11n (HT40)	CH 38	5190	12.71	13.0
	CH 46	5230	13.06	13.5

WLAN(5.3G) – Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	CH 52	5260	12.85	13.0
	CH 56	5280	13.72	14.0
	CH 64	5320	14.10	14.5
802.11n (HT20)	CH 52	5260	14.21	14.5
	CH 56	5280	14.18	14.5
	CH 64	5320	14.76	15.0

802.11n (HT40)	CH 54	5270	13.18	13.5
	CH 62	5310	13.74	14.0

WLAN(5.6G) – Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	CH 100	5500	15.23	15.5
	CH 120	5600	14.77	15.0
	CH 140	5700	13.37	13.5
802.11n (HT20)	CH 100	5500	14.62	15.0
	CH 120	5600	14.52	15.0
	CH 140	5700	13.01	13.5
802.11n (HT40)	CH 102	5510	15.60	16.0
	CH 118	5590	14.53	15.0
	CH 134	5670	13.56	14.0

WLAN(5.8G) – Conducted Power				
Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11a	CH 149	5745	11.21	11.5
	CH 157	5785	11.03	11.5
	CH 165	5825	10.24	10.5
802.11n (HT20)	CH 149	5745	11.95	12.0
	CH 157	5785	11.02	11.5
	CH 165	5825	11.50	12.0
802.11n (HT40)	CH 151	5755	11.14	11.5
	CH159	5795	10.90	11.0

Remark:

1. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
2. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements ,when the reported SAR of the highest measured maximum output power channel (see 3.1) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
- 3 .For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.
4. Per KDB 248227 D01 v02r02, When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined by applying the following steps sequentially.
 - 1) The largest channel bandwidth configuration is selected among the multiple configurations in a frequency band with the

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>

same specified maximum output power.

- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

Bluetooth - Maximum Average Power			
Test Mode	Data Rate	Average Power(dBm)	Tune-up power (dBm)
GFSK	1Mbps	5.849	6.0
Pi/4 QDPSK	2Mbps	4.944	5.0
8DPSK	3Mbps	5.229	5.5

Bluetooth - Maximum Average Power					
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
BLE	1Mbps	CH 00	2402	5.854	6.0
		CH 19	2440	3.713	4.0
		CH 39	2480	5.019	5.5

Remark:

Bluetooth maximum output power is 5.854dBm and Maximum Tune-Up output power is 6.0dBm,. Per KDB 447498 D01 V06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR,16 where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

Bluetooth:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	Result	Limit
6.0	3.98	5	2.402	1.23	3

The exclusion thresholds is $1.23 < 3$, therefore, the RF exposure evaluation is not required.

9.2 Test Results for Standalone SAR Test

Head SAR

GSM850 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1	GSM	Right Cheek	190	836.6	32.68	33.0	1.076	0.135	0.145
	GSM	Right Tilted	190	836.6	32.68	33.0	1.076	0.048	0.052
	GSM	Left Cheek	190	836.6	32.68	33.0	1.076	0.122	0.131
	GSM	Left Tilted	190	836.6	32.68	33.0	1.076	0.043	0.046

GSM1900 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	M Hz					
	GSM	Right Cheek	810	1909.8	31.07	31.5	1.104	0.237	0.262
	GSM	Right Tilted	810	1909.8	31.07	31.5	1.104	0.082	0.091
2	GSM	Left Cheek	810	1909.8	31.07	31.5	1.104	0.278	0.307
	GSM	Left Tilted	810	1909.8	31.07	31.5	1.104	0.089	0.098

WCDMA Band 2 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	RMC	Right Cheek	9538	1907.6	23.14	23.5	1.086	0.277	0.301
	RMC	Right Tilted	9538	1907.6	23.14	23.5	1.086	0.091	0.099
3	RMC	Left Cheek	9538	1907.6	23.14	23.5	1.086	0.400	0.435
	RMC	Left Tilted	9538	1907.6	23.14	23.5	1.086	0.142	0.154

WCDMA Band 5 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	RMC	Right Cheek	4132	826.4	23.94	24.0	1.014	0.174	0.176
	RMC	Right Tilted	4132	826.4	23.94	24.0	1.014	0.052	0.053
4	RMC	Left Cheek	4132	826.4	23.94	24.0	1.014	0.175	0.177
	RMC	Left Tilted	4132	826.4	23.94	24.0	1.014	0.052	0.053

LTE Band 5– Head SAR Test								
Plot No.	Mode	Test Position Head	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
5	QPSK 10MHz 1RB	Right Cheek	836.5	22.97	23.0	1.007	0.129	0.130
	QPSK 10MHz 1RB	Right Tilted	836.5	22.97	23.0	1.007	0.044	0.044
	QPSK 10MHz 1RB	Left Cheek	836.5	22.97	23.0	1.007	0.111	0.112
	QPSK 10MHz 1RB	Left Tilted	836.5	22.97	23.0	1.007	0.038	0.038
	QPSK 10MHz 50%RB	Right Cheek	836.5	21.51	22.0	1.119	0.109	0.122
	QPSK 10MHz 50%RB	Right Tilted	836.5	21.51	22.0	1.119	0.036	0.040
	QPSK 10MHz 50%RB	Left Cheek	836.5	21.51	22.0	1.119	0.093	0.104
	QPSK 10MHz 50%RB	Left Tilted	836.5	21.51	22.0	1.119	0.030	0.034

LTE Band 7– Head SAR Test								
Plot No.	Mode	Test Position Head	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	QPSK 20MHz 1RB	Right Cheek	2510	22.71	23.0	1.069	0.410	0.438
	QPSK 20MHz 1RB	Right Tilted	2510	22.71	23.0	1.069	0.147	0.157
6	QPSK 20MHz 1RB	Left Cheek	2510	22.71	23.0	1.069	0.698	0.746
	QPSK 20MHz 1RB	Left Tilted	2510	22.71	23.0	1.069	0.235	0.251
	QPSK 20MHz 50%RB	Right Cheek	2510	21.16	21.5	1.081	0.380	0.411
	QPSK 20MHz 50%RB	Right Tilted	2510	21.16	21.5	1.081	0.126	0.136
	QPSK 20MHz 50%RB	Left Cheek	2510	21.16	21.5	1.081	0.553	0.598
	QPSK 20MHz 50%RB	Left Tilted	2510	21.16	21.5	1.081	0.198	0.214

LTE Band 38– Head SAR Test								
Plot No.	Mode	Test Position Head	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	QPSK 20MHz 1RB	Right Cheek	2610.0	21.93	22.0	1.016	0.075	0.076
	QPSK 20MHz 1RB	Right Tilted	2610.0	21.93	22.0	1.016	0.021	0.021
7	QPSK 20MHz 1RB	Left Cheek	2610.0	21.93	22.0	1.016	0.144	0.146
	QPSK 20MHz 1RB	Left Tilted	2610.0	21.93	22.0	1.016	0.046	0.047
	QPSK 20MHz 50%RB	Right Cheek	2610.0	20.79	21.0	1.050	0.056	0.059
	QPSK 20MHz 50%RB	Right Tilted	2610.0	20.79	21.0	1.050	0.016	0.017
	QPSK 20MHz 50%RB	Left Cheek	2610.0	20.79	21.0	1.050	0.109	0.114
	QPSK 20MHz 50%RB	Left Tilted	2610.0	20.79	21.0	1.050	0.040	0.042

LTE Band 40 a– Head SAR Test								
Plot No.	Mode	Test Position Head	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	QPSK 10MHz 1RB	Right Cheek	2310.0	21.69	22.0	1.074	0.178	0.191
	QPSK 10MHz 1RB	Right Tilted	2310.0	21.69	22.0	1.074	0.052	0.056
8	QPSK 10MHz 1RB	Left Cheek	2310.0	21.69	22.0	1.074	0.302	0.324
	QPSK 10MHz 1RB	Left Tilted	2310.0	21.69	22.0	1.074	0.094	0.101
	QPSK 10MHz 50%RB	Right Cheek	2310.0	20.45	20.5	1.012	0.147	0.149
	QPSK 10MHz 50%RB	Right Tilted	2310.0	20.45	20.5	1.012	0.048	0.049
	QPSK 10MHz 50%RB	Left Cheek	2310.0	20.45	20.5	1.012	0.251	0.254
	QPSK 10MHz 50%RB	Left Tilted	2310.0	20.45	20.5	1.012	0.080	0.081

LTE Band 40 b– Head SAR Test								
Plot No.	Mode	Test Position Head	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	QPSK 10MHz 1RB	Right Cheek	2355.0	21.83	22.0	1.040	0.208	0.216
	QPSK 10MHz 1RB	Right Tilted	2355.0	21.83	22.0	1.040	0.060	0.062
9	QPSK 10MHz 1RB	Left Cheek	2355.0	21.83	22.0	1.040	0.295	0.307
	QPSK 10MHz 1RB	Left Tilted	2355.0	21.83	22.0	1.040	0.092	0.096
	QPSK 10MHz 50%RB	Right Cheek	2355.0	20.63	21.0	1.089	0.168	0.183
	QPSK 10MHz 50%RB	Right Tilted	2355.0	20.63	21.0	1.089	0.053	0.058
	QPSK 10MHz 50%RB	Left Cheek	2355.0	20.63	21.0	1.089	0.237	0.258
	QPSK 10MHz 50%RB	Left Tilted	2355.0	20.63	21.0	1.089	0.077	0.084

LTE Band 41– Head SAR Test								
Plot No.	Mode	Test Position Head	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
	QPSK 20MHz 1RB	Right Cheek	2593	22.45	22.5	1.012	0.070	0.071
	QPSK 20MHz 1RB	Right Tilted	2593	22.45	22.5	1.012	0.021	0.021
10	QPSK 20MHz 1RB	Left Cheek	2593	22.45	22.5	1.012	0.132	0.134
	QPSK 20MHz 1RB	Left Tilted	2593	22.45	22.5	1.012	0.042	0.042
	QPSK 20MHz 50%RB	Right Cheek	2593	21.74	22.0	1.062	0.056	0.059
	QPSK 20MHz 50%RB	Right Tilted	2593	21.74	22.0	1.062	0.017	0.018
	QPSK 20MHz 50%RB	Left Cheek	2593	21.74	22.0	1.062	0.104	0.110
	QPSK 20MHz 50%RB	Left Tilted	2593	21.74	22.0	1.062	0.030	0.032

WLAN 2.4GHz – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
11	802.11b	Right Cheek	11	2462	16.73	17.0	1.064	0.586	0.624
	802.11b	Right Tilted	11	2462	16.73	17.0	1.064	0.502	0.534
	802.11b	Left Cheek	11	2462	16.73	17.0	1.064	0.236	0.251
	802.11b	Left Tilted	11	2462	16.73	17.0	1.064	0.184	0.196

WLAN 5GHz(Band 1) – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
12	802.11 n (HT40)	Right Cheek	46	5230	13.06	13.5	1.107	0.517	0.572
	802.11 n (HT40)	Right Tilted	46	5230	13.06	13.5	1.107	0.432	0.478
	802.11 n (HT40)	Left Cheek	46	5230	13.06	13.5	1.107	0.473	0.523
	802.11 n (HT40)	Left Tilted	46	5230	13.06	13.5	1.107	0.405	0.448

WLAN 5GHz(Band 2) – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11 n (HT20)	Right Cheek	64	5320	14.76	15.0	1.057	0.576	0.609
	802.11 n (HT20)	Right Tilted	64	5320	14.76	15.0	1.057	0.508	0.537
13	802.11 n (HT20)	Left Cheek	64	5320	14.76	15.0	1.057	0.624	0.659
	802.11 n (HT20)	Left Tilted	64	5320	14.76	15.0	1.057	0.565	0.597

WLAN 5GHz(Band 3) – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
14	802.11 n (HT40)	Right Cheek	102	5510	15.60	16.0	1.096	0.677	0.742

	802.11 n (HT40)	Right Tilted	102	5510	15.60	16.0	1.096	0.596	0.654
	802.11 n (HT40)	Left Cheek	102	5510	15.60	16.0	1.096	0.514	0.564
	802.11 n (HT40)	Left Tilted	102	5510	15.60	16.0	1.096	0.458	0.502

WLAN 5GHz(Band 4) – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	802.11 n (HT20)	Right Cheek	149	5745	11.95	12.0	1.012	0.720	0.728
	802.11 n (HT20)	Right Tilted	149	5745	11.95	12.0	1.012	0.635	0.642
15	802.11 n (HT20)	Left Cheek	149	5745	11.95	12.0	1.012	0.728	0.736
	802.11 n (HT20)	Left Tilted	149	5745	11.95	12.0	1.012	0.638	0.645

Remark: Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

Body-worn SAR

GSM850 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
16	GSM	Back	190	836.6	32.68	33.0	1.076	0.145	0.156
	GSM	Front	190	836.6	32.68	33.0	1.076	0.138	0.149

GSM1900 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	GSM	Back	810	1909.8	31.07	31.5	1.104	0.246	0.272
17	GSM	Front	810	1909.8	31.07	31.5	1.104	0.339	0.374

WCDMA Band 2 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	RMC 12.2k	Back Side	9538	1907.6	23.14	23.5	1.086	0.340	0.369
18	RMC 12.2k	Front Face	9538	1907.6	23.14	23.5	1.086	0.540	0.587

WCDMA Band 5 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
19	RMC 12.2k	Back Side	4132	826.4	23.94	24.0	1.014	0.156	0.158
	RMC 12.2k	Front Side	4132	826.4	23.94	24.0	1.014	0.144	0.146

LTE Band 5–Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency MHz	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB								
20	QPSK 10MHz 1RB	Back Side	836.5	22.97	23.0	1.007	0.114	0.115	
	QPSK 10MHz 1RB	Front Side	836.5	22.97	23.0	1.007	0.108	0.109	
	QPSK 10MHz 50%RB	Back Side	836.5	21.51	22.0	1.119	0.092	0.103	
	QPSK 10MHz 50%RB	Front Side	836.5	21.51	22.0	1.119	0.087	0.097	

LTE Band 7–Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position	Frequency	Output Power	Rated Limit	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g	

	Modulation, Bandwidth, RB	Body	MHz	(dBm)	(dBm)			(W/kg)
21	QPSK 20MHz 1RB	Back Side	2510	22.71	23.0	1.069	0.719	0.769
	QPSK 20MHz 1RB	Front Side	2510	22.71	23.0	1.069	0.668	0.714
	QPSK 20MHz 50%RB	Back Side	2510	21.16	21.5	1.081	0.596	0.645
	QPSK 20MHz 50%RB	Front Side	2510	21.16	21.5	1.081	0.607	0.656

LTE Band 38–Body SAR Test (Gap: 10mm)

Plot No.	Mode	Test Position Body	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
22	QPSK 20MHz 1RB	Back Side	2610.0	21.93	22.0	1.016	0.130	0.132
	QPSK 20MHz 1RB	Front Side	2610.0	21.93	22.0	1.016	0.092	0.093
	QPSK 20MHz 50%RB	Back Side	2610.0	20.79	21.0	1.050	0.102	0.107
	QPSK 20MHz 50%RB	Front Side	2610.0	20.79	21.0	1.050	0.070	0.073

LTE Band 40 a–Body SAR Test (Gap: 10mm)

Plot No.	Mode	Test Position Body	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 10MHz 1RB	Back Side	2310.0	21.69	22.0	1.074	0.205	0.220
23	QPSK 10MHz 1RB	Front Side	2310.0	21.69	22.0	1.074	0.269	0.289
	QPSK 10MHz 50%RB	Back Side	2310.0	20.45	20.5	1.012	0.170	0.172
	QPSK 10MHz 50%RB	Front Side	2310.0	20.45	20.5	1.012	0.222	0.225

LTE Band 40 b–Body SAR Test (Gap: 10mm)

Plot No.	Mode	Test Position Body	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 10MHz 1RB	Back Side	2355.0	21.83	22.0	1.040	0.202	0.210
24	QPSK 10MHz 1RB	Front Side	2355.0	21.83	22.0	1.040	0.274	0.285
	QPSK 10MHz 50%RB	Back Side	2355.0	20.63	21.0	1.089	0.158	0.172
	QPSK 10MHz 50%RB	Front Side	2355.0	20.63	21.0	1.089	0.222	0.242

LTE Band 41–Body SAR Test (Gap: 10mm)

Plot No.	Mode	Test Position Body	Freque ncy	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
25	QPSK 20MHz 1RB	Back Side	2593	22.45	22.5	1.012	0.123	0.124
	QPSK 20MHz 1RB	Front Side	2593	22.45	22.5	1.012	0.093	0.094
	QPSK 20MHz 50%RB	Back Side	2593	21.74	22.0	1.062	0.096	0.102
	QPSK 20MHz 50%RB	Front Side	2593	21.74	22.0	1.062	0.071	0.075

WLAN 2.4GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
26	802.11b	Back Side	11	2462	16.73	17.0	1.064	0.203	0.216
	802.11b	Front Side	11	2462	16.73	17.0	1.064	0.203	0.216

WLAN 5GHz(Band 1) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
27	802.11 n (HT40)	Back Side	46	5230	13.06	13.5	1.107	0.496	0.549
	802.11 n (HT40)	Front Side	46	5230	13.06	13.5	1.107	0.225	0.249

WLAN 5GHz(Band 2) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
28	802.11 n (HT20)	Back Side	64	5320	14.76	15.0	1.057	0.518	0.547
	802.11 n (HT20)	Front Side	64	5320	14.76	15.0	1.057	0.214	0.226

WLAN 5GHz(Band 3) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
29	802.11 n (HT40)	Back Side	102	5510	15.60	16.0	1.096	0.723	0.793
	802.11 n (HT40)	Front Side	102	5510	15.60	16.0	1.096	0.296	0.325

WLAN 5GHz(Band 4) –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
30	802.11 n (HT20)	Back Side	149	5745	11.95	12.0	1.012	0.558	0.564
	802.11 n (HT20)	Front Side	149	5745	11.95	12.0	1.012	0.384	0.388

Hotspot SAR

GSM850 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
31	GPRS_4TX	Back Side	190	836.6	29.14	29.5	1.086	0.132	0.143
	GPRS_4TX	Front Side	190	836.6	29.14	29.5	1.086	0.112	0.122
	GPRS_4TX	Right side	190	836.6	29.14	29.5	1.086	0.025	0.027
	GPRS_4TX	Left side	190	836.6	29.14	29.5	1.086	0.097	0.105
	GPRS_4TX	Bottom side	190	836.6	29.14	29.5	1.086	0.057	0.062

GSM1900 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	GPRS_4TX	Back Side	810	1909.8	27.59	28.0	1.099	0.289	0.318
	GPRS_4TX	Front Side	810	1909.8	27.59	28.0	1.099	0.374	0.411
32	GPRS_4TX	Right side	810	1909.8	27.59	28.0	1.099	0.102	0.112
	GPRS_4TX	Left side	810	1909.8	27.59	28.0	1.099	0.393	0.432
	GPRS_4TX	Bottom side	810	1909.8	27.59	28.0	1.099	0.291	0.320

WCDMA Band 2 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
	RMC 12.2k	Back Side	9538	1907.6	23.14	23.5	1.086	0.340	0.369
33	RMC 12.2k	Front Face	9538	1907.6	23.14	23.5	1.086	0.540	0.587
	RMC 12.2k	Right side	9538	1907.6	23.14	23.5	1.086	0.138	0.150
	RMC 12.2k	Left side	9538	1907.6	23.14	23.5	1.086	0.459	0.499
	RMC 12.2k	Bottom Side	9538	1907.6	23.14	23.5	1.086	0.441	0.479

WCDMA Band 5 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
34	RMC 12.2k	Back Side	4132	826.4	23.94	24.0	1.014	0.156	0.158
	RMC 12.2k	Front Side	4132	826.4	23.94	24.0	1.014	0.144	0.146
	RMC 12.2k	Right side	4132	826.4	23.94	24.0	1.014	0.019	0.019
	RMC 12.2k	Left side	4132	826.4	23.94	24.0	1.014	0.113	0.115
	RMC 12.2k	Bottom side	4132	826.4	23.94	24.0	1.014	0.056	0.057

LTE Band 5–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
35	QPSK 10MHz 1RB	Back Side	836.5	22.97	23.0	1.007	0.114	0.115
	QPSK 10MHz 1RB	Front Side	836.5	22.97	23.0	1.007	0.108	0.109
	QPSK 10MHz 1RB	Right side	836.5	22.97	23.0	1.007	0.014	0.014
	QPSK 10MHz 1RB	Left side	836.5	22.97	23.0	1.007	0.080	0.081
	QPSK 10MHz 1RB	Bottom side	836.5	22.97	23.0	1.007	0.042	0.042
	QPSK 10MHz 50%RB	Back Side	836.5	21.51	22.0	1.119	0.092	0.103
	QPSK 10MHz 50%RB	Front Side	836.5	21.51	22.0	1.119	0.087	0.097
	QPSK 10MHz 50%RB	Right side	836.5	21.51	22.0	1.119	0.010	0.011
	QPSK 10MHz 50%RB	Left side	836.5	21.51	22.0	1.119	0.064	0.072
	QPSK 10MHz 50%RB	Bottom side	836.5	21.51	22.0	1.119	0.033	0.037

LTE Band 7–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 20MHz 1RB	Back Side	2510	22.71	23.0	1.069	0.719	0.769
	QPSK 20MHz 1RB	Front Side	2510	22.71	23.0	1.069	0.668	0.714
	QPSK 20MHz 1RB	Right side	2510	22.71	23.0	1.069	0.151	0.161
36	QPSK 20MHz 1RB	Left side	2510	22.71	23.0	1.069	0.734	0.785
	QPSK 20MHz 1RB	Bottom side	2510	22.71	23.0	1.069	0.276	0.295
	QPSK 20MHz 50%RB	Back Side	2510	21.16	21.5	1.081	0.596	0.645
	QPSK 20MHz 50%RB	Front Side	2510	21.16	21.5	1.081	0.607	0.656
	QPSK 20MHz 50%RB	Right side	2510	21.16	21.5	1.081	0.136	0.147
	QPSK 20MHz 50%RB	Left side	2510	21.16	21.5	1.081	0.607	0.656
	QPSK 20MHz 50%RB	Bottom side	2510	21.16	21.5	1.081	0.225	0.243

LTE Band 38–Body SAR Test (Gap: 10mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
	QPSK 20MHz 1RB	Back Side	2610.0	21.93	22.0	1.016	0.130	0.132
	QPSK 20MHz 1RB	Front Side	2610.0	21.93	22.0	1.016	0.092	0.093
	QPSK 20MHz 1RB	Right side	2610.0	21.93	22.0	1.016	0.035	0.036
37	QPSK 20MHz 1RB	Left side	2610.0	21.93	22.0	1.016	0.179	0.182
	QPSK 20MHz 1RB	Bottom side	2610.0	21.93	22.0	1.016	0.035	0.036
	QPSK 20MHz 50%RB	Back Side	2610.0	20.79	21.0	1.050	0.102	0.107
	QPSK 20MHz 50%RB	Front Side	2610.0	20.79	21.0	1.050	0.070	0.073