



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

olibra llc

45 legion dr, CRESSKILL, New Jersey, United States 07626

FCC ID: 2AME8EMB1KU

Report Type: Original Report	Product Type: WIFI Bluetooth Module
Test Engineer: <u>Max Min</u> <i>Max Min</i>	
Report Number: RSHA180720003-00B	
Report Date: 2018-08-22	
Reviewed By: Oscar Ye <u>RF Leader</u>	<i>Oscar.Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	11
EXTERNAL I/O CABLE.....	11
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS	13
TEST EQUIPMENT LIST	14
FCC §15.203 - ANTENNA REQUIREMENT.....	16
APPLICABLE STANDARD	16
ANTENNA CONNECTOR CONSTRUCTION	16
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	17
CORRECTED FACTOR & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	27
APPLICABLE STANDARD	27
EUT SETUP	27
EMI TEST RECEIVER SETUP.....	28
TEST PROCEDURE	28
CORRECTED AMPLITUDE & MARGIN CALCULATION	28
TEST RESULTS SUMMARY	28
TEST DATA	29
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	89
APPLICABLE STANDARD	89
TEST PROCEDURE	89
TEST DATA	89
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	99
APPLICABLE STANDARD	99
TEST PROCEDURE	99
TEST DATA	99
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	103
APPLICABLE STANDARD	103
TEST PROCEDURE	103
TEST DATA	103

FCC §15.247(e) - POWER SPECTRAL DENSITY	109
APPLICABLE STANDARD	109
TEST PROCEDURE	109
TEST DATA	109

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	olibra llc
Tested Model:	EMB-1000-U
Product Type:	WIFI Bluetooth Module
Dimension:	18.1mm(L)*19.3mm(W)*3.3mm(H)
Power Supply:	DC 3.3V

**All measurement and test data in this report was gathered from production sample serial number: 20180720003.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-07-20)*

Objective

This report is prepared on behalf of *olibra llc* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS submission with FCC ID: 2AME8EMB1KU.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item	Uncertainty	
AC Power Lines Conducted Emissions	3.19dB	
RF conducted test with spectrum	0.9dB	
RF Output Power with Power meter	0.5dB	
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth	0.5kHz	
Temperature	1.0°C	
Humidity	6%	

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b mode, EUT was tested with Channel 1, 2, 6 and 11;
(For channel 2, only restricted bands emissions and output power were tested.)

For 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 2, 3, 6, 9, 10 and 11;
(For channel 2, 3, 9 and 10, only restricted bands emissions and output power were tested.)

For 802.11n-HT40 mode, EUT was tested with Channel 3, 4, 5, 6, 7, 8 and 9.
(For channel 4, 5, 7 and 8, only restricted bands emissions and output power were tested.)

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For BLE mode, EUT was tested with channel 0, 19 and 39.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
18	2438	38	2478
19	2440	39	2480

Equipment Modifications

No modification was made to the EUT tested.

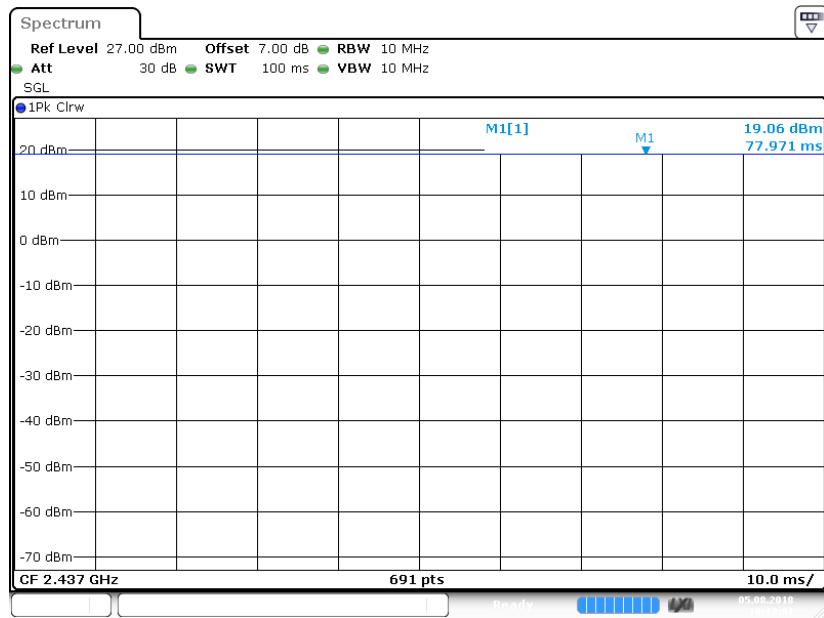
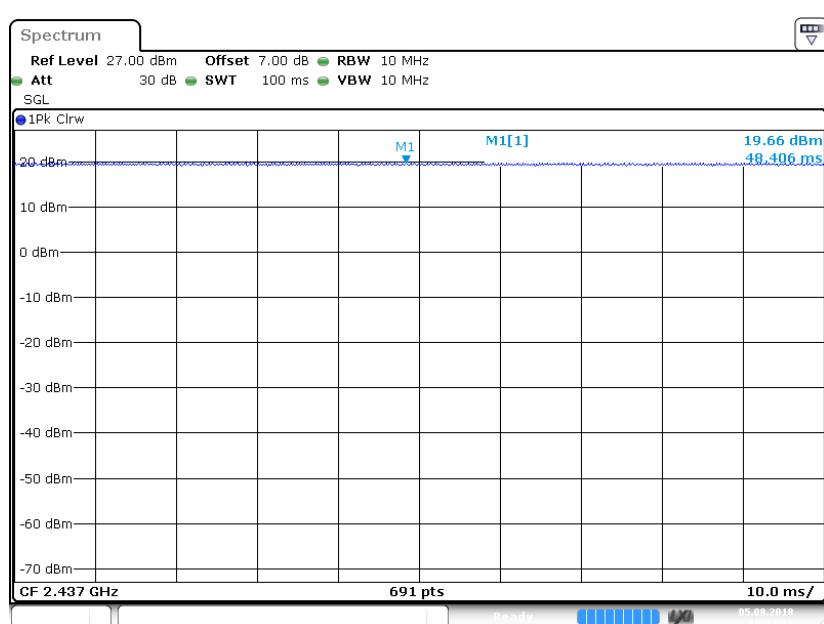
EUT Exercise Software

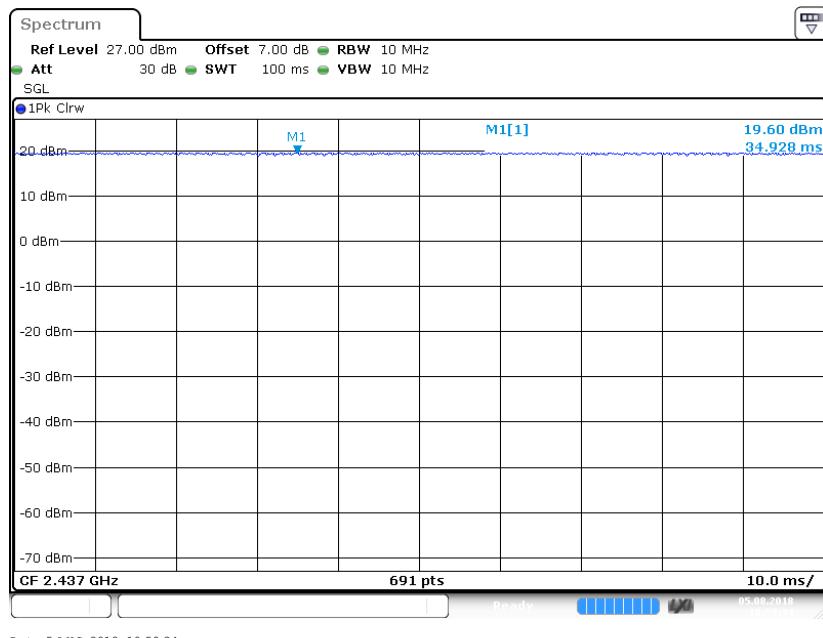
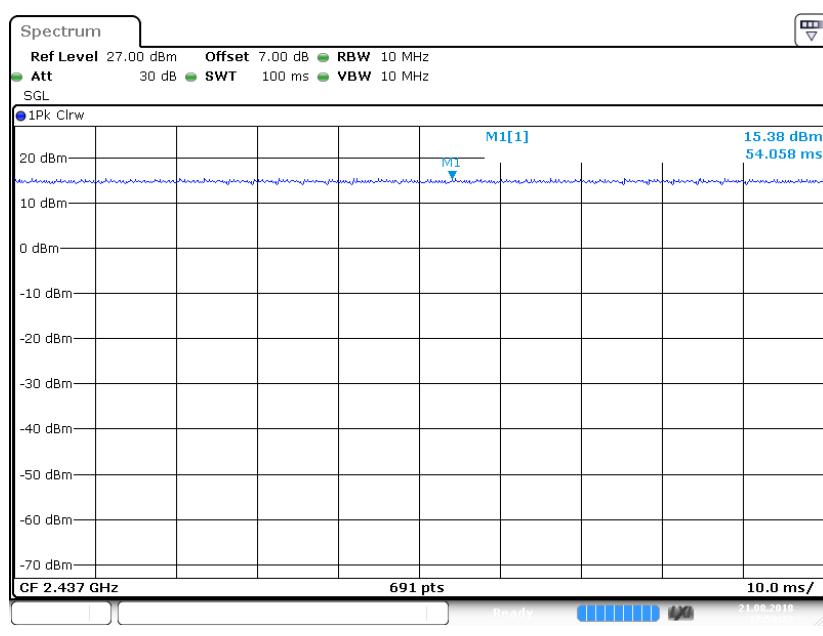
RF test tool: SecureCRT

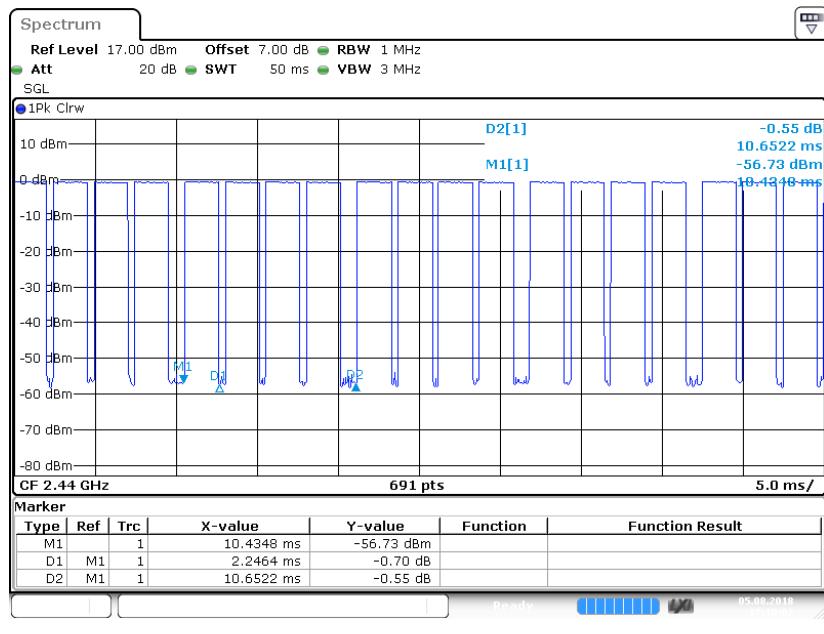
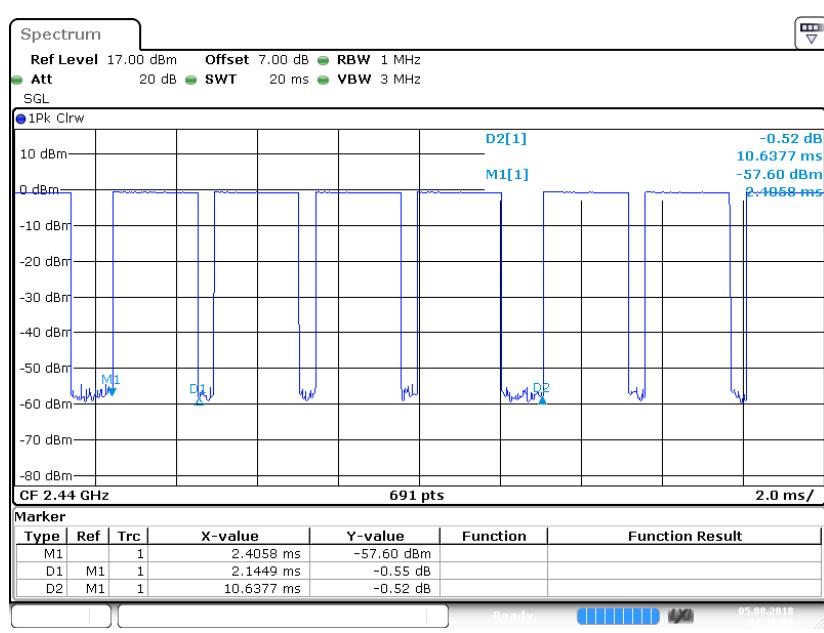
Pre-scan with all the data rates, and the worst case was performed as below:

Mode	Data Rate	Channel	Frequency (MHz)	Power Level
802.11b	1 Mbps	1	2412	6
		2	2417	0
		6	2437	0
		11	2462	0
802.11g	6 Mbps	1	2412	20
		2	2417	4
		3	2422	0
		6	2437	0
		9	2452	0
		10	2457	4
		11	2462	12
802.11n-HT20	MCS0	1	2412	24
		2	2417	4
		3	2422	0
		6	2437	0
		9	2452	0
		10	2457	4
		11	2462	16
802.11n-HT40	MCS0	3	2422	32
		4	2427	20
		5	2432	16
		6	2437	16
		7	2442	20
		8	2447	28
		9	2452	40
BLE	1Mbps	/	/	4

Note: For Wi-Fi mode, the value of power level increases 4, the power attenuates 1dB.

Duty Cycle:**802.11b Mode Channel 6: 2437MHz****802.11g Mode Channel 6: 2437MHz**

802.11n-HT20 Mode Channel 6: 2437MHz**802.11n-HT40 Mode Channel 6: 2437MHz**

BLE Mode Channel 19: 2440MHz-1**BLE Mode Channel 19: 2440MHz-1**

Mode	Duty Cycle (%)	T(us)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	0
802.11g	100	/	/	0
802.11n-HT20	100	/	/	0
802.11n-HT40	100	/	/	0
BLE	80.65	2145	0.47	0.93

Note: "x" means the Duty Cycle.

Support Equipment List and Details

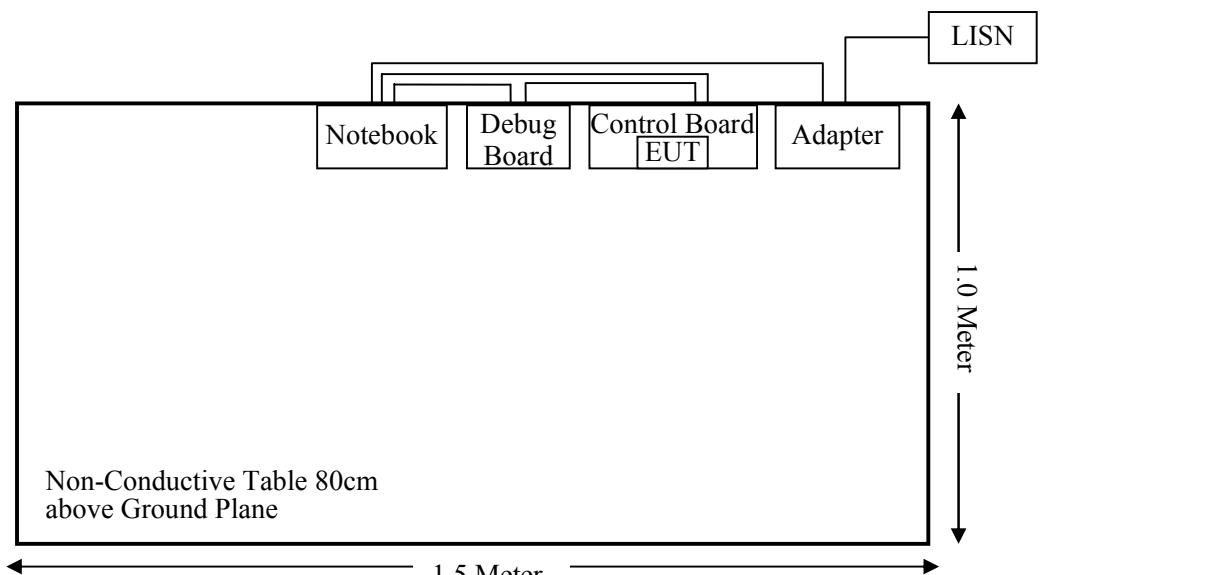
Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
ESPRESSIF	Debug Board	ESP-WROOM-03	/
ESPRESSIF	Control Board	ESP32_Module_Test board 2L V1	/

External I/O Cable

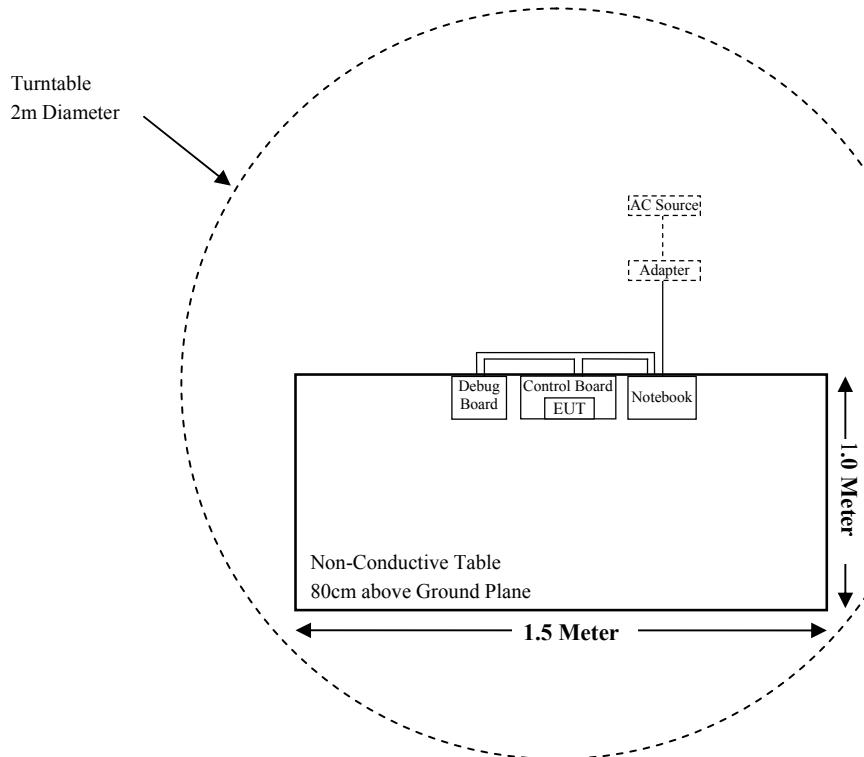
Cable Description	Length (m)	From Port	To
Data Cable	0.3	Debug Board	Control Board
USB Cable	0.8	Notebook	Debug Board
USB Cable-2	1.5	Notebook	Control Board

Block Diagram of Test Setup

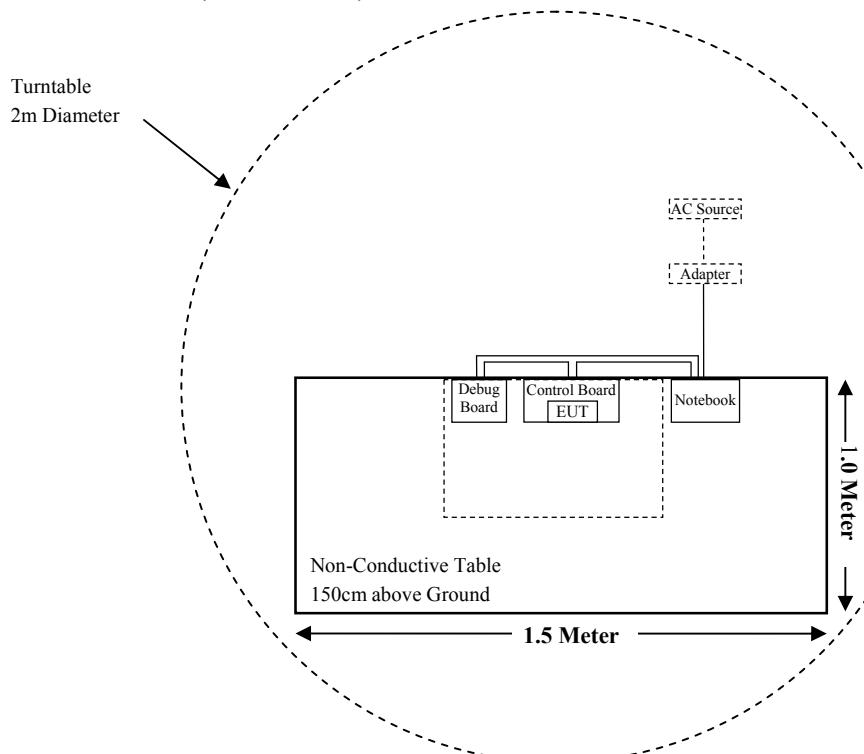
For Conducted Emissions:



For Radiated Emissions(Below 1GHz):



For Radiated Emissions(Above 1GHz):



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliance
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2017-08-15	2018-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2017-08-27	2018-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Mini-Circuits	Amplifier	ZVA-183W-S+	220701818	2018-05-20	2019-05-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Band notch Filter	BRM50702	/	2017-08-05	2018-08-04
Narda	Attenuator/10dB	10dB	/	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2017-08-15	2018-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2018-07-23	2019-07-22
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
olibra llc	RF Cable	/	/	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-15	2018-11-14
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2017-08-15	2018-08-14

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Maximum Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
		(dBi)	(numeric)	(dBm)	(mW)			
BT 3.0	2402-2480	2.33	1.71	3.50	2.24	20	0.0008	1.000
BLE	2402-2480	2.33	1.71	0.00	1.00	20	0.0003	1.000
802.11b	2412-2462	2.33	1.71	25.00	316.23	20	0.1076	1.000
802.11g		2.33	1.71	25.00	316.23	20	0.1076	1.000
802.11 n-HT20		2.33	1.71	25.00	316.23	20	0.1076	1.000
802.11 n-HT40	2422-2452	2.33	1.71	22.50	177.83	20	0.0605	1.000

Note: 1. The tune-up conducted power was declared by the manufacturer.
 2. Wi-Fi and BT can't transmit simultaneously.

Conclusion: The EUT meets exemption requirement - RF exposure evaluation greater than 20cm distance specified in § 2.1091. If the device built into a host as a portable usage, the additional RF exposure evaluation may be required as specified by § 2.1093.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two types of antennas as below, which used a unique coupling to the intentional radiator, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain
PIFA Antenna	1.82dBi
Dipole Antenna	2.33dBi

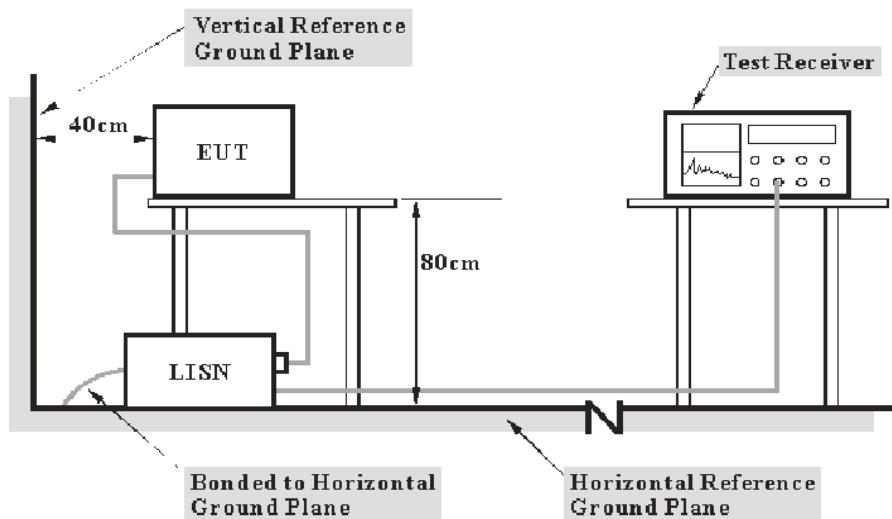
Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup



- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “Margin” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the [FCC Part 15.207](#).

Test Data

Environmental Conditions

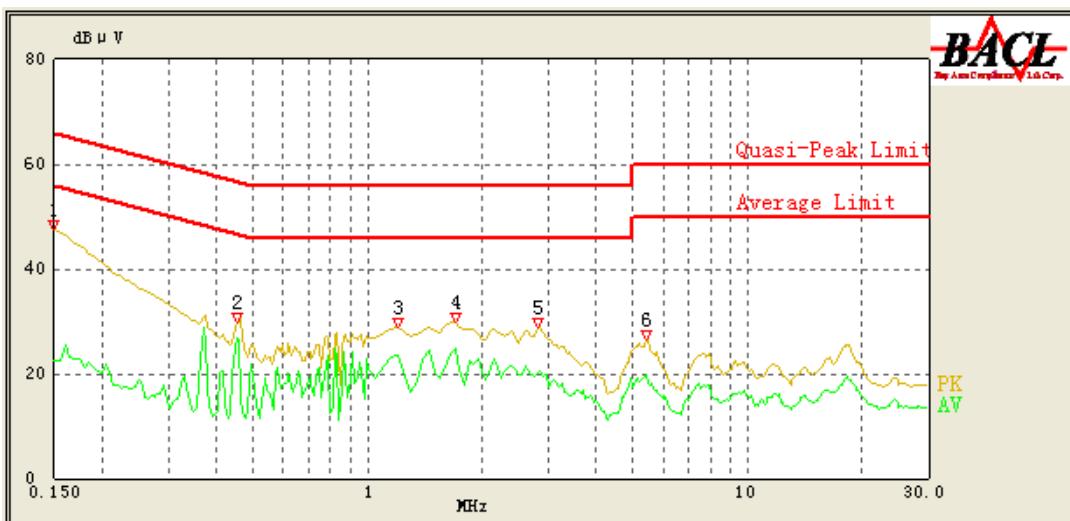
Temperature:	20.2 °C
Relative Humidity:	51 %
ATM Pressure:	101.3 kPa

The testing was performed by Max Min on 2018-08-07.

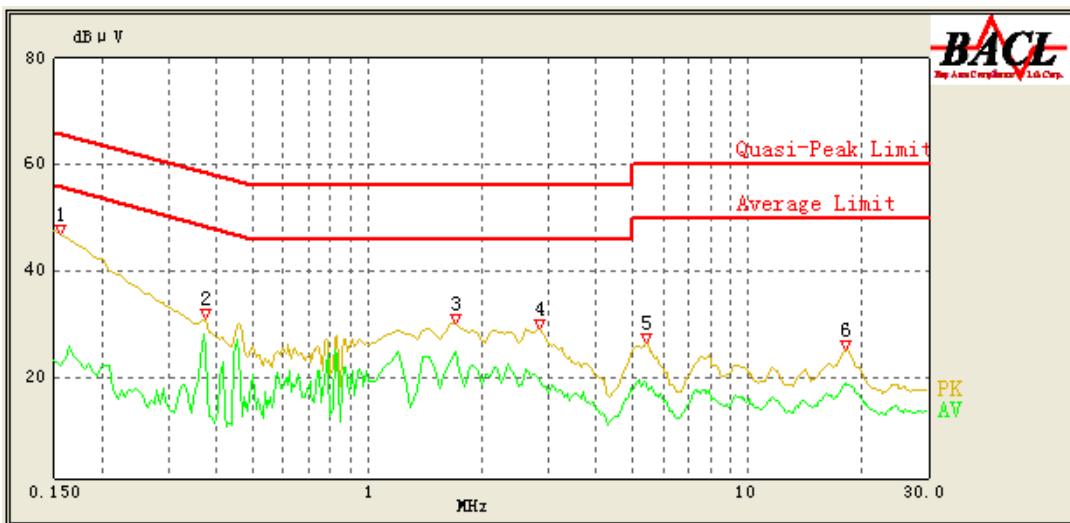
Data for PIFA Antenna:**For Wi-Fi Mode:**

EUT operation mode: Transmitting in 802.11n-HT20 mode channel 3 (worst case)

AC 120V/60 Hz, Line



Frequency (MHz)	Corrected Amplitude (dB μ V)	Detector (QP/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB μ V)	Margin (dB)	Comment
0.150	47.51	QP	9.000	L1	16.06	66.00	18.49	Compliance
0.150	22.62	AV	9.000	L1	16.06	56.00	33.38	Compliance
0.455	29.86	QP	9.000	L1	16.07	57.29	27.43	Compliance
0.455	26.97	AV	9.000	L1	16.07	47.29	20.32	Compliance
1.200	28.90	QP	9.000	L1	15.87	56.00	27.10	Compliance
1.200	23.55	AV	9.000	L1	15.87	46.00	22.45	Compliance
1.700	29.96	QP	9.000	L1	15.86	56.00	26.04	Compliance
1.700	24.97	AV	9.000	L1	15.86	46.00	21.03	Compliance
2.800	28.85	QP	9.000	L1	15.85	56.00	27.15	Compliance
2.800	20.28	AV	9.000	L1	15.85	46.00	25.72	Compliance
5.400	26.58	QP	9.000	L1	15.88	60.00	33.42	Compliance
5.400	19.83	AV	9.000	L1	15.88	50.00	30.17	Compliance

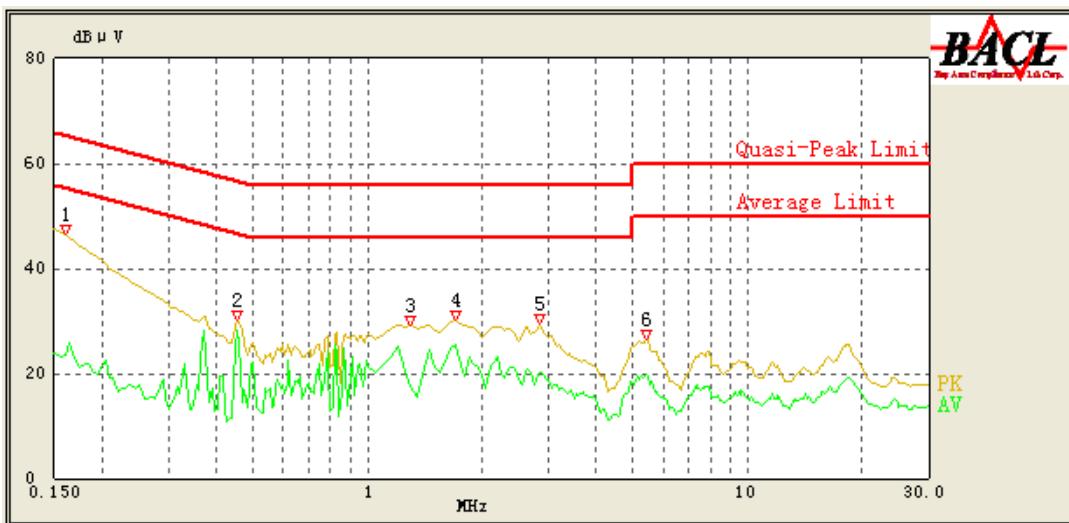
AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dB μ V)	Detector (QP/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB μ V)	Margin (dB)	Comment
0.155	46.93	QP	9.000	N	16.06	65.86	18.93	Compliance
0.155	22.23	AV	9.000	N	16.06	55.86	33.63	Compliance
0.375	31.19	QP	9.000	N	16.08	59.57	28.38	Compliance
0.375	25.59	AV	9.000	N	16.08	49.57	23.98	Compliance
1.700	30.12	QP	9.000	N	15.92	56.00	25.88	Compliance
1.700	24.85	AV	9.000	N	15.92	46.00	21.15	Compliance
2.850	29.08	QP	9.000	N	15.90	56.00	26.92	Compliance
2.850	19.59	AV	9.000	N	15.90	46.00	26.41	Compliance
5.400	26.54	QP	9.000	N	15.88	60.00	33.46	Compliance
5.400	19.01	AV	9.000	N	15.88	50.00	30.99	Compliance
18.200	25.06	QP	9.000	N	16.11	60.00	34.94	Compliance
18.200	18.66	AV	9.000	N	16.11	50.00	31.34	Compliance

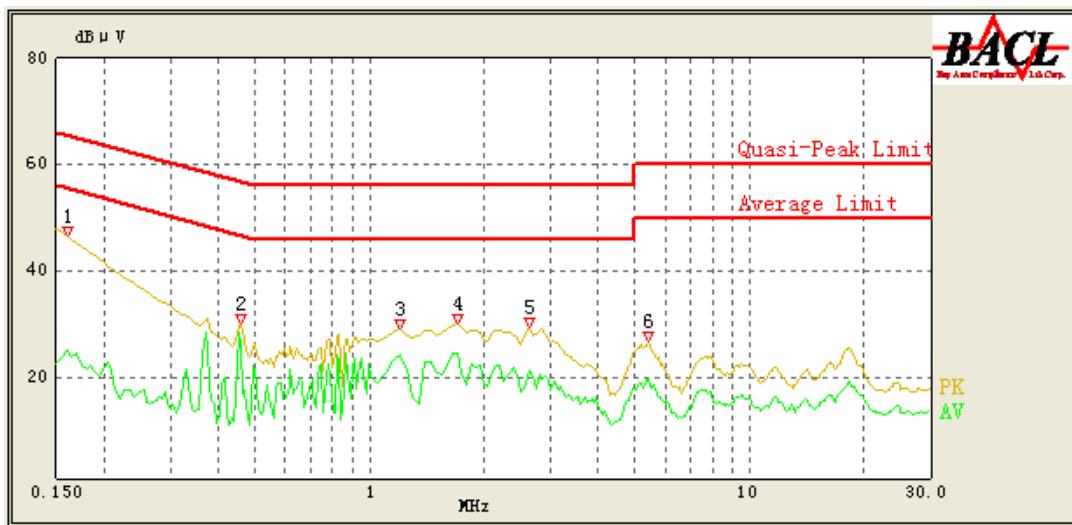
Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Margin (dB) = Limit (dB μ V) - Corrected Amplitude (dB μ V)

For BLE Mode:*EUT operation mode: Transmitting in channel 19 (worst case)***AC 120V/60 Hz, Line**

Frequency (MHz)	Corrected Amplitude (dB μ V)	Detector (QP/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB μ V)	Margin (dB)	Comment
0.160	46.61	QP	9.000	L1	16.05	65.71	19.10	Compliance
0.160	23.38	AV	9.000	L1	16.05	55.71	32.33	Compliance
0.455	30.09	QP	9.000	L1	16.07	57.29	27.20	Compliance
0.455	28.15	AV	9.000	L1	16.07	47.29	19.14	Compliance
1.300	29.23	QP	9.000	L1	15.87	56.00	26.77	Compliance
1.300	17.46	AV	9.000	L1	15.87	46.00	28.54	Compliance
1.700	30.02	QP	9.000	L1	15.86	56.00	25.98	Compliance
1.700	25.54	AV	9.000	L1	15.86	46.00	20.46	Compliance
2.850	29.35	QP	9.000	L1	15.85	56.00	26.65	Compliance
2.850	20.20	AV	9.000	L1	15.85	46.00	25.80	Compliance
5.400	26.64	QP	9.000	L1	15.88	60.00	33.36	Compliance
5.400	19.88	AV	9.000	L1	15.88	50.00	30.12	Compliance

AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dB μ V)	Detector (QP/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB μ V)	Margin (dB)	Comment
0.160	46.44	QP	9.000	N	16.06	65.71	19.27	Compliance
0.160	25.28	AV	9.000	N	16.06	55.71	30.43	Compliance
0.460	30.02	QP	9.000	N	16.10	57.14	27.12	Compliance
0.460	26.22	AV	9.000	N	16.10	47.14	20.92	Compliance
1.200	29.27	QP	9.000	N	15.93	56.00	26.73	Compliance
1.200	24.21	AV	9.000	N	15.93	46.00	21.79	Compliance
1.700	30.02	QP	9.000	N	15.92	56.00	25.98	Compliance
1.700	24.66	AV	9.000	N	15.92	46.00	21.34	Compliance
2.650	29.32	QP	9.000	N	15.90	56.00	26.68	Compliance
2.650	21.09	AV	9.000	N	15.90	46.00	24.91	Compliance
5.400	26.70	QP	9.000	N	15.88	60.00	33.30	Compliance
5.400	19.93	AV	9.000	N	15.88	50.00	30.07	Compliance

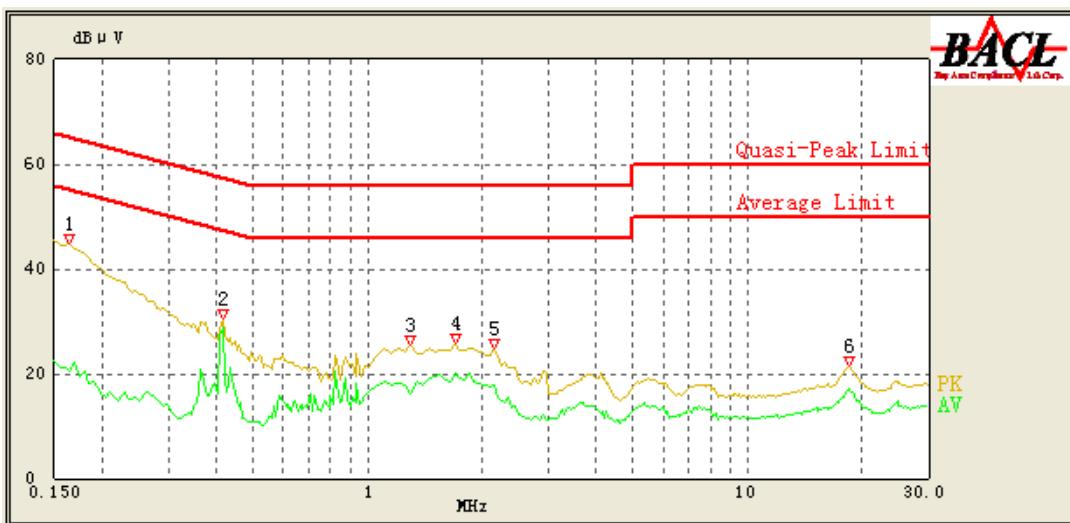
Note:

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dB μ V) – Corrected Amplitude (dB μ V)

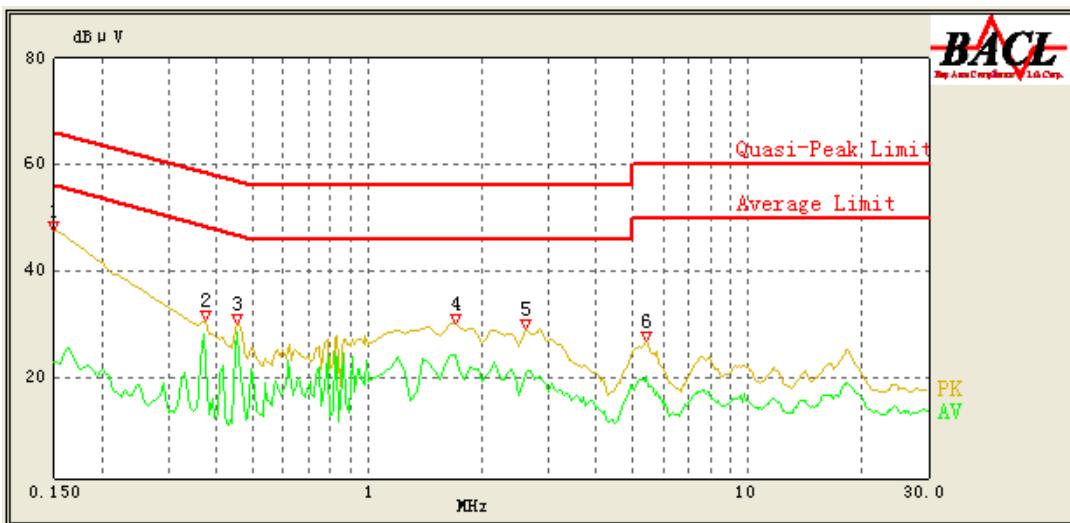
Data for Dipole Antenna:**For Wi-Fi Mode:**

EUT operation mode: Transmitting in 802.11n-HT20 mode channel 3 (worst case)

AC 120V/60 Hz, Line



Frequency (MHz)	Corrected Amplitude (dB μ V)	Detector (QP/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB μ V)	Margin (dB)	Comment
0.165	44.96	QP	9.000	L1	16.05	65.57	20.61	Compliance
0.165	20.46	AV	9.000	L1	16.05	55.57	35.11	Compliance
0.415	30.42	QP	9.000	L1	16.06	58.43	28.01	Compliance
0.415	28.87	AV	9.000	L1	16.06	48.43	19.56	Compliance
1.300	25.57	QP	9.000	L1	15.87	56.00	30.43	Compliance
1.300	16.15	AV	9.000	L1	15.87	46.00	29.85	Compliance
1.700	25.85	QP	9.000	L1	15.86	56.00	30.15	Compliance
1.700	20.09	AV	9.000	L1	15.86	46.00	25.91	Compliance
2.150	24.80	QP	9.000	L1	15.85	56.00	31.20	Compliance
2.150	17.86	AV	9.000	L1	15.85	46.00	28.14	Compliance
18.450	21.39	QP	9.000	L1	16.37	60.00	38.61	Compliance
18.450	17.10	AV	9.000	L1	16.37	50.00	32.90	Compliance

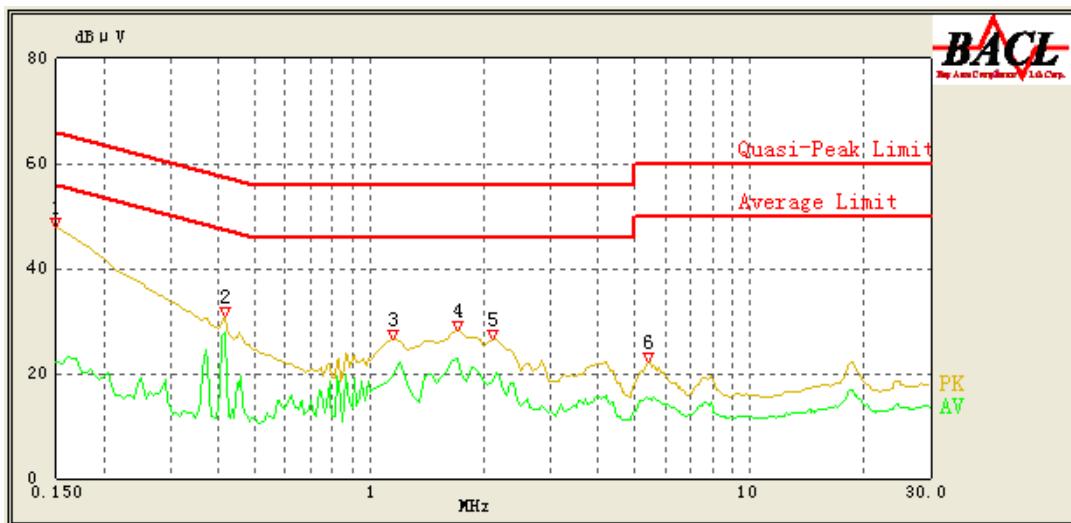
AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dB μ V)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB μ V)	Margin (dB)	Comment
0.150	47.56	QP	9.000	N	16.06	66.00	18.44	Compliance
0.150	22.97	AV	9.000	N	16.06	56.00	33.03	Compliance
0.375	30.77	QP	9.000	N	16.08	59.57	28.80	Compliance
0.375	22.62	AV	9.000	N	16.08	49.57	26.95	Compliance
0.455	30.17	QP	9.000	N	16.10	57.29	27.12	Compliance
0.455	28.64	AV	9.000	N	16.10	47.29	18.65	Compliance
1.700	30.10	QP	9.000	N	15.92	56.00	25.90	Compliance
1.700	24.29	AV	9.000	N	15.92	46.00	21.71	Compliance
2.600	29.15	QP	9.000	N	15.90	56.00	26.85	Compliance
2.600	20.68	AV	9.000	N	15.90	46.00	25.32	Compliance
5.400	26.88	QP	9.000	N	15.88	60.00	33.12	Compliance
5.400	20.18	AV	9.000	N	15.88	50.00	29.82	Compliance

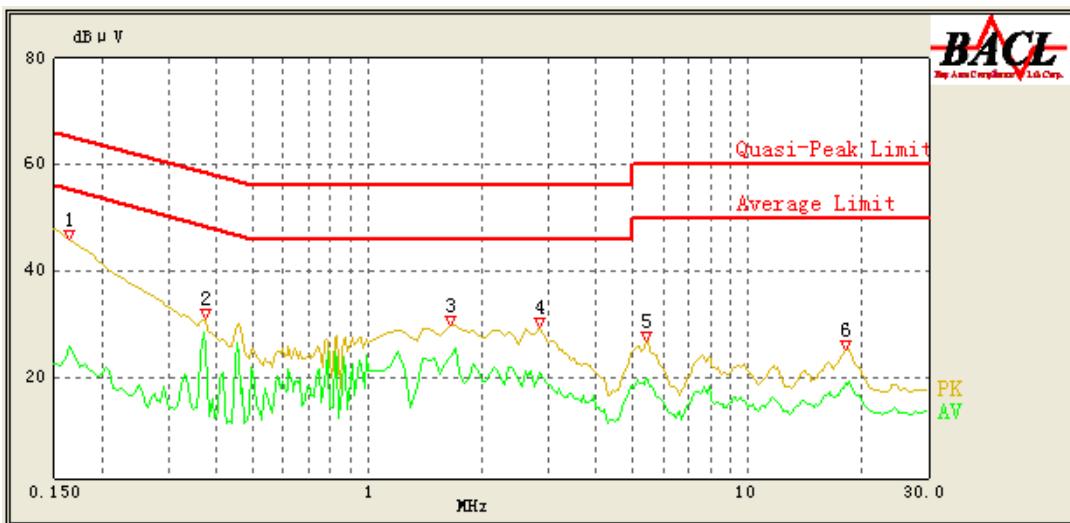
Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Margin (dB) = Limit (dB μ V) - Corrected Amplitude (dB μ V)

For BLE Mode:*EUT operation mode: Transmitting in channel 19 (worst case)***AC 120V/60 Hz, Line**

Frequency (MHz)	Corrected Amplitude (dB μ V)	Detector (QP/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB μ V)	Margin (dB)	Comment
0.150	47.79	QP	9.000	L1	16.06	66.00	18.21	Compliance
0.150	22.22	AV	9.000	L1	16.06	56.00	33.78	Compliance
0.415	30.84	QP	9.000	L1	16.06	58.43	27.59	Compliance
0.415	27.90	AV	9.000	L1	16.06	48.43	20.53	Compliance
1.150	26.46	QP	9.000	L1	15.88	56.00	29.54	Compliance
1.150	19.61	AV	9.000	L1	15.88	46.00	26.39	Compliance
1.700	28.15	QP	9.000	L1	15.86	56.00	27.85	Compliance
1.700	22.73	AV	9.000	L1	15.86	46.00	23.27	Compliance
2.100	26.61	QP	9.000	L1	15.85	56.00	29.39	Compliance
2.100	18.51	AV	9.000	L1	15.85	46.00	27.49	Compliance
5.400	22.19	QP	9.000	L1	15.88	60.00	37.81	Compliance
5.400	15.26	AV	9.000	L1	15.88	50.00	34.74	Compliance

AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dB μ V)	Detector (QP/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dB μ V)	Margin (dB)	Comment
0.165	45.98	QP	9.000	N	16.06	65.57	19.59	Compliance
0.165	25.99	AV	9.000	N	16.06	55.57	29.58	Compliance
0.375	31.01	QP	9.000	N	16.08	59.57	28.56	Compliance
0.375	25.36	AV	9.000	N	16.08	49.57	24.21	Compliance
1.650	29.91	QP	9.000	N	15.92	56.00	26.09	Compliance
1.650	23.89	AV	9.000	N	15.92	46.00	22.11	Compliance
2.850	29.34	QP	9.000	N	15.90	56.00	26.66	Compliance
2.850	20.96	AV	9.000	N	15.90	46.00	25.04	Compliance
5.400	26.82	QP	9.000	N	15.88	60.00	33.18	Compliance
5.400	19.88	AV	9.000	N	15.88	50.00	30.12	Compliance
18.200	25.34	QP	9.000	N	16.11	60.00	34.66	Compliance
18.200	18.54	AV	9.000	N	16.11	50.00	31.46	Compliance

Note:

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dB μ V) – Corrected Amplitude (dB μ V)

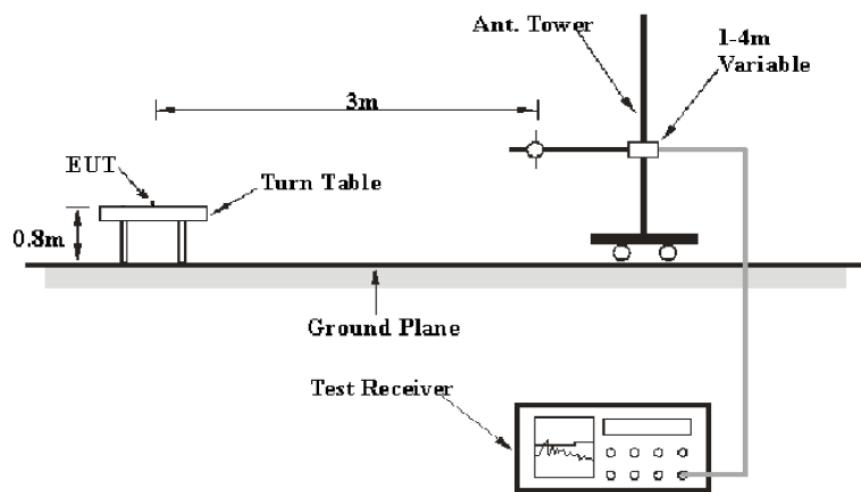
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

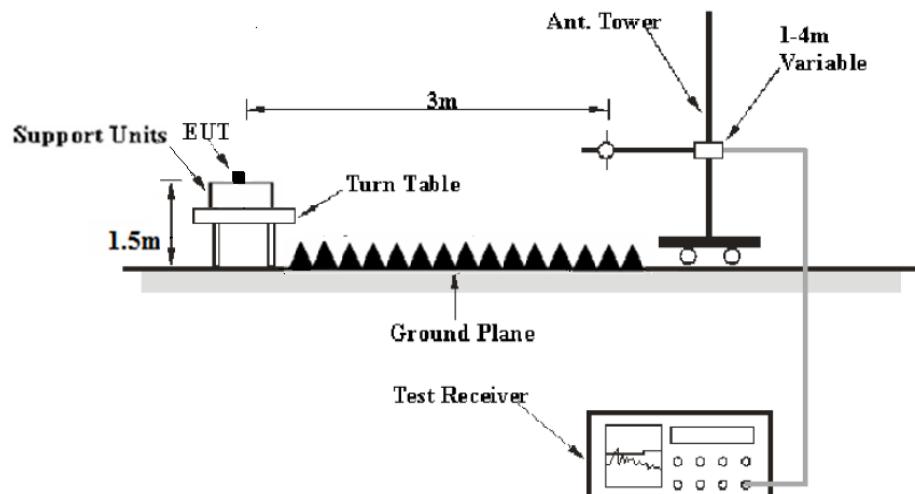
FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:



Above 1GHz:



The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 12.1 and 12.2. and ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “Margin” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

Radiated emission test was performed by Max Min on 2018-08-07 & 2018-08-08.; RF conducted test was performed by Max Min on 2018-08-05& 2018-08-21.

EUT operation mode: Transmitting

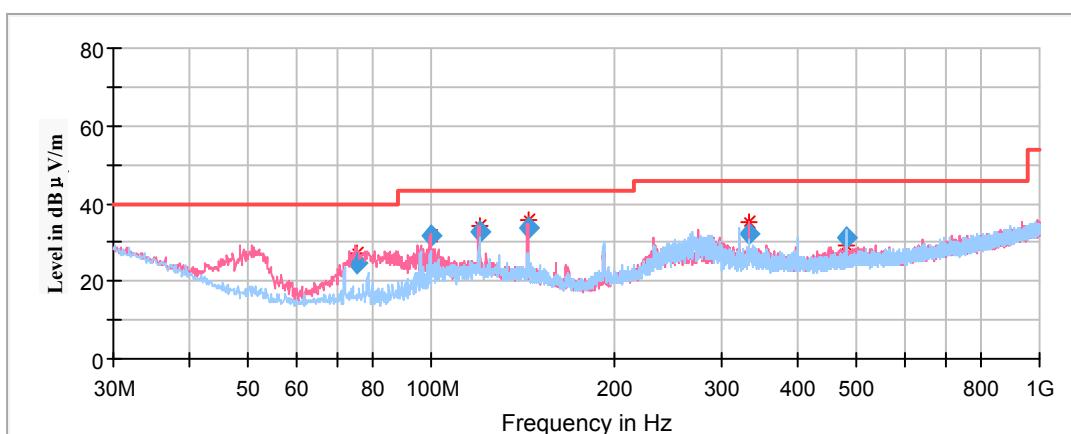
Data for PIFA Antenna:

For Wi-Fi Mode:

Spurious Emission Test:

30MHz-1GHz:

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **channel 3 of 802.11n-HT20 mode in X-axis of orientation** was recorded

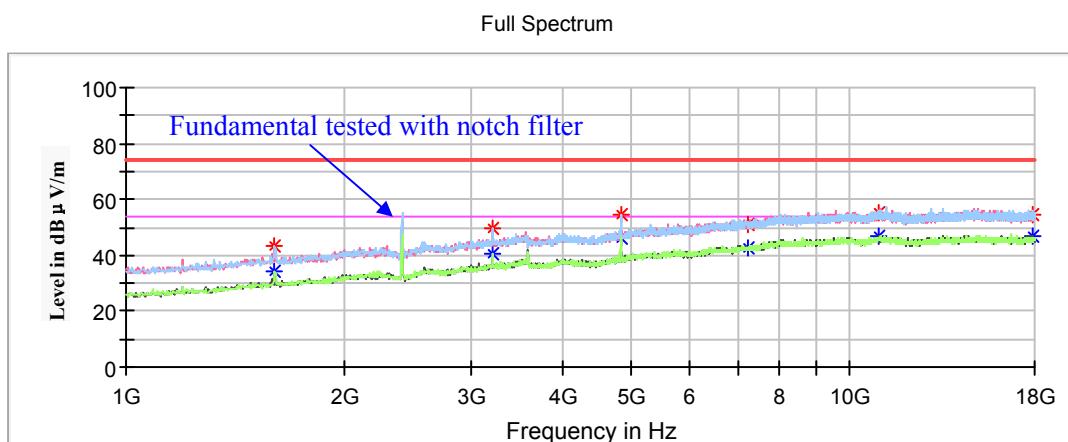


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	QuasiPeak (dBµV/m)	Height (cm)	Polar (H/V)				
75.717850	24.57	101.0	V	317.0	-17.6	40.00	15.43
99.608600	31.67	101.0	V	202.0	-15.0	43.50	11.83
120.064100	32.73	101.0	V	139.0	-11.2	43.50	10.77
144.303900	33.63	101.0	V	359.0	-12.1	43.50	9.87
333.041100	32.28	199.0	V	350.0	-9.8	46.00	13.72
479.995700	31.37	199.0	H	151.0	-6.7	46.00	14.63

1GHz - 18GHz:**802.11b Mode:**(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

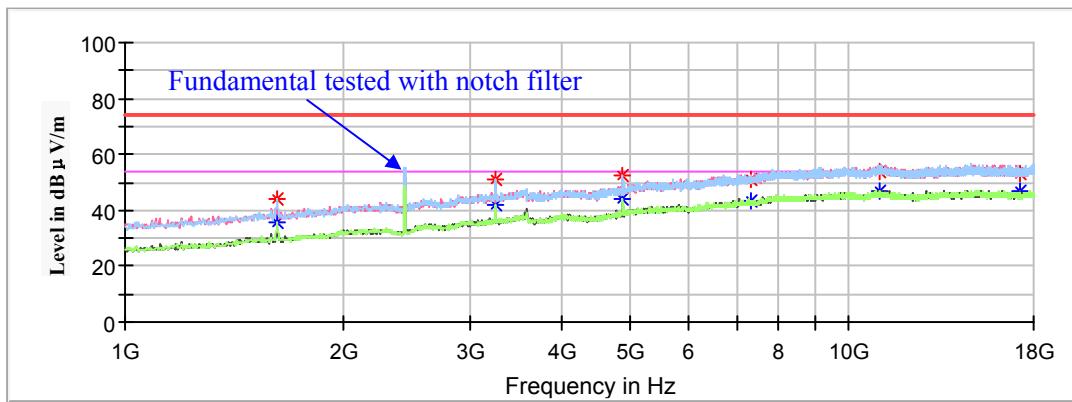
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V / m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V / m)

Channel 1: 2412MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V / m)	Average (dB μ V / m)	Height (cm)	Polar (H/V)				
1605.200000	43.33	---	100.0	H	18.0	-0.5	74.00	30.67
1605.200000	---	34.02	100.0	H	18.0	-0.5	54.00	19.98
3213.400000	49.59	---	100.0	H	18.0	6.6	74.00	24.41
3213.400000	---	40.66	100.0	H	18.0	6.6	54.00	13.34
4824.000000	54.28	---	200.0	V	204.0	10.8	74.00	19.72
4824.000000	---	46.23	200.0	V	204.0	10.8	54.00	7.77
7236.000000	51.03	---	100.0	V	42.0	15.3	74.00	22.97
7236.000000	---	42.82	100.0	V	42.0	15.3	54.00	11.18
10968.800000	55.39	---	200.0	V	274.0	19.0	74.00	18.61
10968.800000	---	46.70	200.0	V	274.0	19.0	54.00	7.30
17887.800000	54.21	---	100.0	V	213.0	19.0	74.00	19.79
17887.800000	---	46.87	100.0	V	213.0	19.0	54.00	7.13

Channel 6: 2437MHz

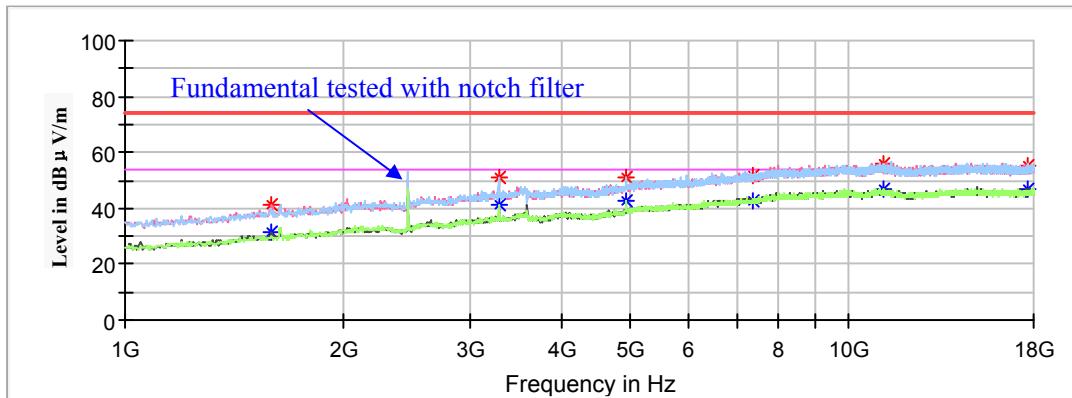
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu\text{V}/\text{m}$)	Margin (dB)
	MaxPeak (dB $\mu\text{V}/\text{m}$)	Average (dB $\mu\text{V}/\text{m}$)	Height (cm)	Polar (H/V)				
1622.200000	---	35.40	250.0	H	144.0	-0.4	54.00	18.60
1622.200000	43.95	---	250.0	H	144.0	-0.4	74.00	30.05
3247.400000	---	48.10	100.0	H	157.0	6.6	54.00	11.90
3247.400000	51.11	---	100.0	H	157.0	6.6	74.00	22.89
4874.000000	---	44.17	150.0	V	174.0	11.1	54.00	9.83
4874.000000	52.48	---	150.0	V	174.0	11.1	74.00	21.52
7311.000000	---	43.05	250.0	V	339.0	15.4	54.00	10.95
7311.000000	51.15	---	250.0	V	339.0	15.4	74.00	22.85
10999.400000	---	47.16	100.0	V	327.0	19.1	54.00	6.84
10999.400000	53.98	---	100.0	V	327.0	19.1	74.00	20.02
17258.800000	---	46.86	250.0	V	5.0	18.3	54.00	7.14
17258.800000	53.46	---	250.0	V	5.0	18.3	74.00	20.54

Channel 11: 2462MHz

Full Spectrum

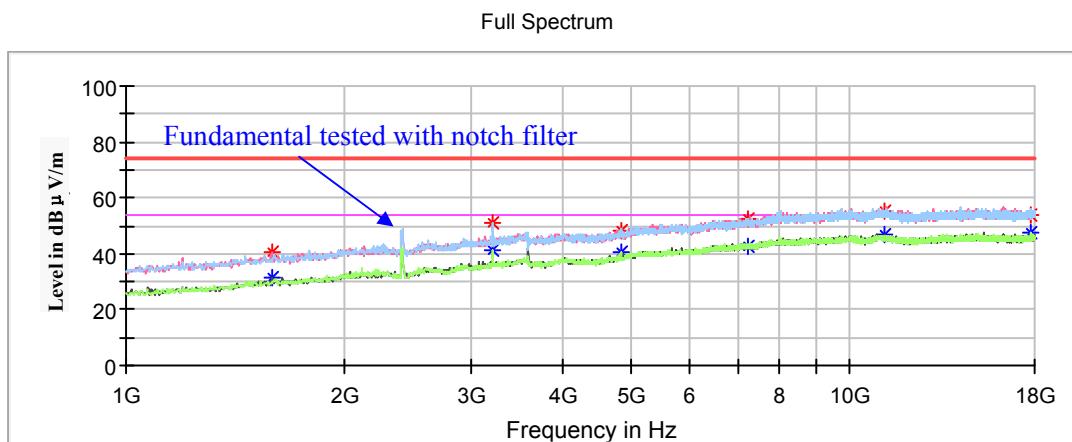


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.000000	40.99	---	200.0	V	145.0	-0.6	74.00	33.01
1595.000000	---	31.67	200.0	V	145.0	-0.6	54.00	22.33
3281.400000	51.33	---	100.0	H	201.0	6.7	74.00	22.67
3281.400000	---	41.10	100.0	H	201.0	6.7	54.00	12.90
4924.000000	50.90	---	250.0	V	196.0	11.3	74.00	23.10
4924.000000	---	42.90	250.0	V	196.0	11.3	54.00	11.10
7386.000000	51.82	---	200.0	V	353.0	15.5	74.00	22.18
7386.000000	---	42.68	200.0	V	353.0	15.5	54.00	11.32
11162.600000	55.72	---	150.0	H	136.0	18.8	74.00	18.28
11162.600000	---	46.79	150.0	H	136.0	18.8	54.00	7.21
17687.200000	55.36	---	200.0	V	341.0	18.7	74.00	18.64
17687.200000	---	46.87	200.0	V	341.0	18.7	54.00	7.13

802.11g Mode:(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

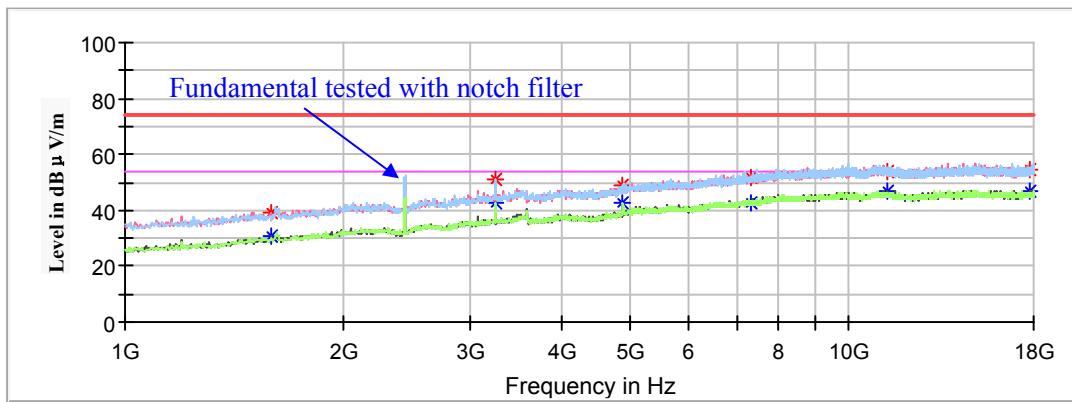
1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Channel 1: 2412MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1588.200000	40.66	---	100.0	V	93.0	-0.6	74.00	33.34
1588.200000	---	31.54	100.0	V	93.0	-0.6	54.00	22.46
3213.400000	51.04	---	150.0	H	194.0	6.6	74.00	22.96
3213.400000	---	41.43	150.0	H	194.0	6.6	54.00	12.57
4824.000000	48.58	---	200.0	V	144.0	10.8	74.00	25.42
4824.000000	---	40.86	200.0	V	144.0	10.8	54.00	13.14
7236.000000	52.29	---	100.0	V	51.0	15.3	74.00	21.71
7236.000000	---	42.94	100.0	V	51.0	15.3	54.00	11.06
11152.400000	55.06	---	200.0	V	290.0	18.8	74.00	18.94
11152.400000	---	46.63	200.0	V	290.0	18.8	54.00	7.37
17772.200000	54.18	---	150.0	H	264.0	18.9	74.00	19.82
17772.200000	---	47.30	150.0	H	264.0	18.9	54.00	6.70

Channel 6: 2437MHz

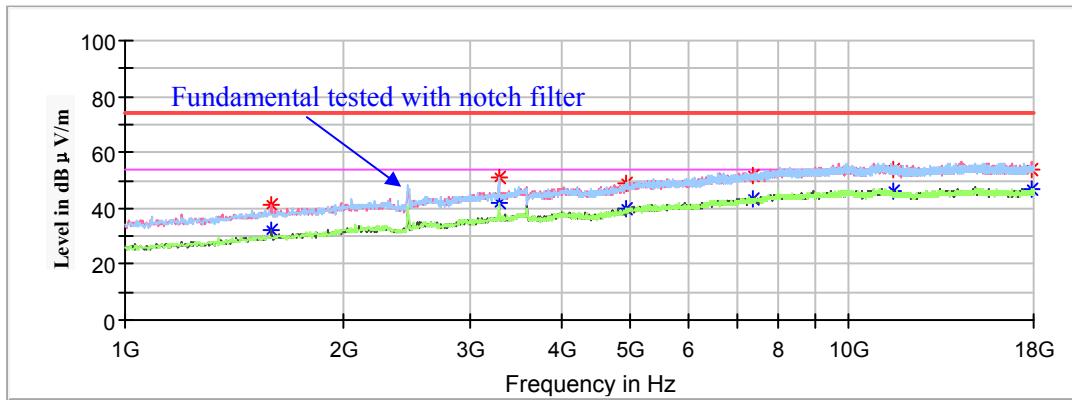
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1591.600000	---	30.64	200.0	V	335.0	-0.6	54.00	23.36
1591.600000	39.34	---	200.0	V	335.0	-0.6	74.00	34.66
3247.400000	---	42.35	150.0	H	226.0	6.6	54.00	11.65
3247.400000	50.98	---	150.0	H	226.0	6.6	74.00	23.02
4874.000000	---	42.63	100.0	V	54.0	11.1	54.00	11.37
4874.000000	48.74	---	100.0	V	54.0	11.1	74.00	25.26
7311.000000	---	42.65	200.0	V	240.0	15.4	54.00	11.35
7311.000000	51.62	---	200.0	V	240.0	15.4	74.00	22.38
11325.800000	---	46.80	100.0	V	154.0	18.6	54.00	7.20
11325.800000	54.12	---	100.0	V	154.0	18.6	74.00	19.88
17768.800000	---	46.73	250.0	V	142.0	18.9	54.00	7.27
17768.800000	54.58	---	250.0	V	142.0	18.9	74.00	19.42

Channel 11: 2462MHz

Full Spectrum

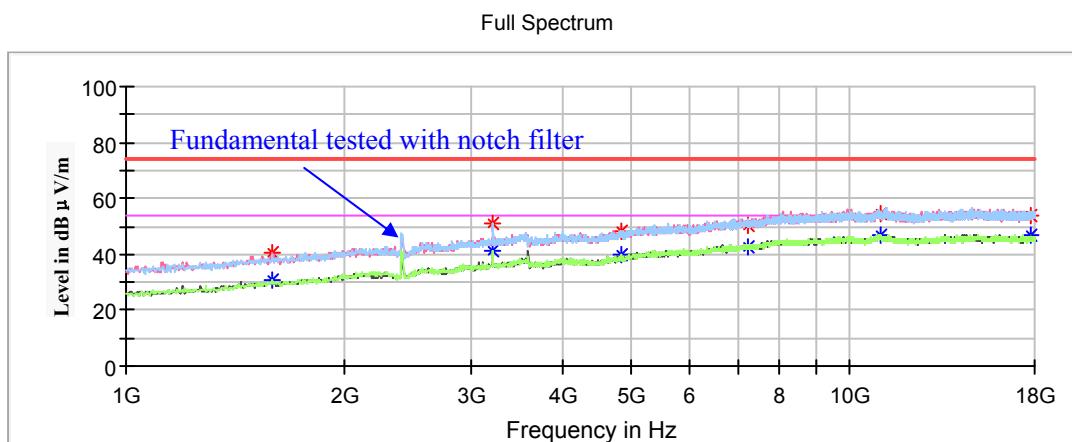


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu\text{V}/\text{m}$)	Margin (dB)
	MaxPeak (dB $\mu\text{V}/\text{m}$)	Average (dB $\mu\text{V}/\text{m}$)	Height (cm)	Polar (H/V)				
1591.600000	---	32.46	250.0	V	187.0	-0.6	54.00	21.54
1595.000000	41.60	---	250.0	V	187.0	-0.6	74.00	32.40
3281.400000	---	41.61	100.0	H	23.0	6.7	54.00	12.39
3281.400000	51.36	---	100.0	H	23.0	6.7	74.00	22.64
4924.000000	---	39.68	250.0	V	62.0	11.3	54.00	14.32
4924.000000	48.90	---	250.0	V	62.0	11.3	74.00	25.10
7386.000000	---	43.18	250.0	V	130.0	15.5	54.00	10.82
7386.000000	52.00	---	250.0	V	130.0	15.5	74.00	22.00
11495.800000	---	46.43	100.0	V	180.0	18.3	54.00	7.57
11495.800000	53.88	---	100.0	V	180.0	18.3	74.00	20.12
17911.600000	---	46.60	200.0	V	86.0	19.1	54.00	7.40
17911.600000	53.57	---	200.0	V	86.0	19.1	74.00	20.43

802.11n-HT20 Mode:(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

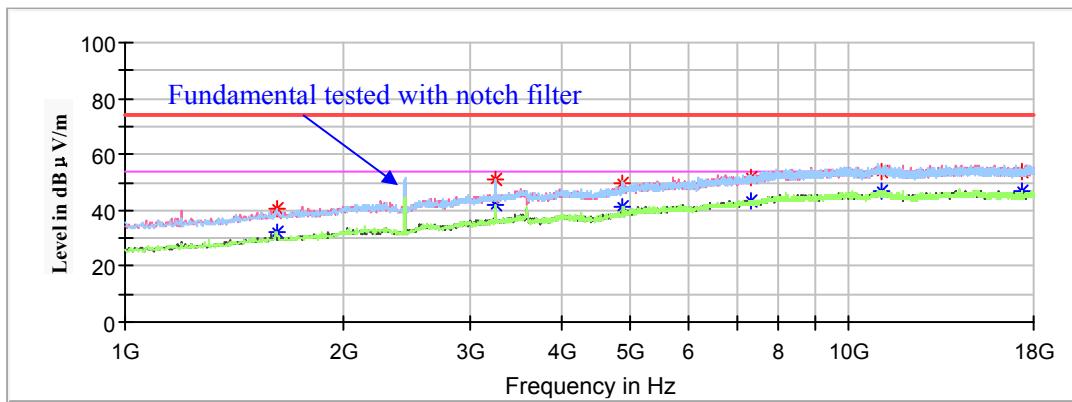
1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Channel 1: 2412MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1591.600000	40.39	---	150.0	V	63.0	-0.6	74.00	33.61
1591.600000	---	31.04	150.0	V	63.0	-0.6	54.00	22.96
3213.400000	51.33	---	100.0	H	85.0	6.6	74.00	22.67
3213.400000	---	41.44	100.0	H	85.0	6.6	54.00	12.56
4824.000000	48.56	---	250.0	V	305.0	10.8	74.00	25.44
4824.000000	---	39.65	250.0	V	305.0	10.8	54.00	14.35
7236.000000	50.65	---	100.0	V	214.0	15.3	74.00	23.35
7236.000000	---	42.81	100.0	V	214.0	15.3	54.00	11.19
11026.600000	54.35	---	200.0	H	200.0	19.0	74.00	19.65
11026.600000	---	47.17	200.0	H	200.0	19.0	54.00	6.83
17782.400000	53.81	---	100.0	H	166.0	18.9	74.00	20.19
17782.400000	---	46.73	100.0	H	166.0	18.9	54.00	7.27

Channel 6: 2437MHz

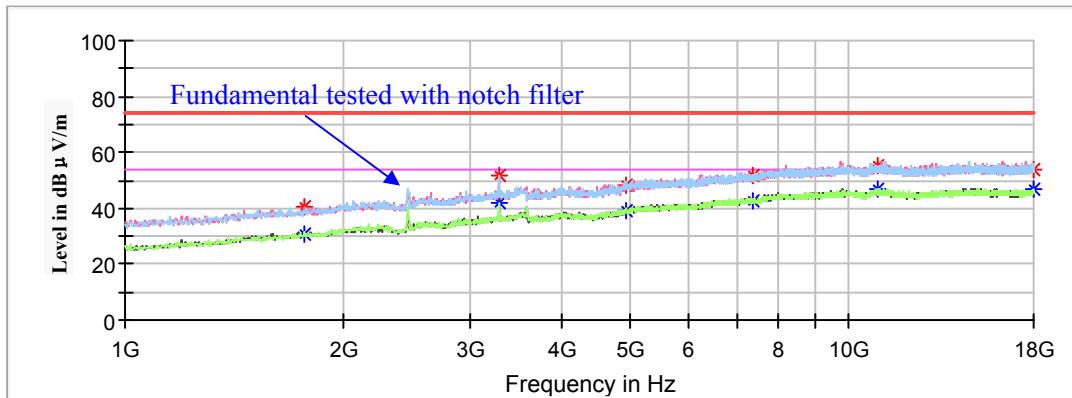
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1622.200000	40.37	---	200.0	H	99.0	-0.4	74.00	33.63
1622.200000	---	31.94	200.0	H	99.0	-0.4	54.00	22.06
3247.400000	50.82	---	150.0	H	152.0	6.6	74.00	23.18
3247.400000	---	41.90	150.0	H	152.0	6.6	54.00	12.10
4874.000000	49.73	---	100.0	V	92.0	11.1	74.00	24.27
4874.000000	---	41.38	100.0	V	92.0	11.1	54.00	12.62
7311.000000	51.56	---	200.0	V	174.0	15.4	74.00	22.44
7311.000000	---	43.37	200.0	V	174.0	15.4	54.00	10.63
11077.600000	53.86	---	100.0	H	212.0	19.0	74.00	20.14
11077.600000	---	47.12	100.0	H	212.0	19.0	54.00	6.88
17391.400000	53.61	---	200.0	H	158.0	18.4	74.00	20.39
17391.400000	---	46.79	200.0	H	158.0	18.4	54.00	7.21

Channel 11: 2462MHz

Full Spectrum

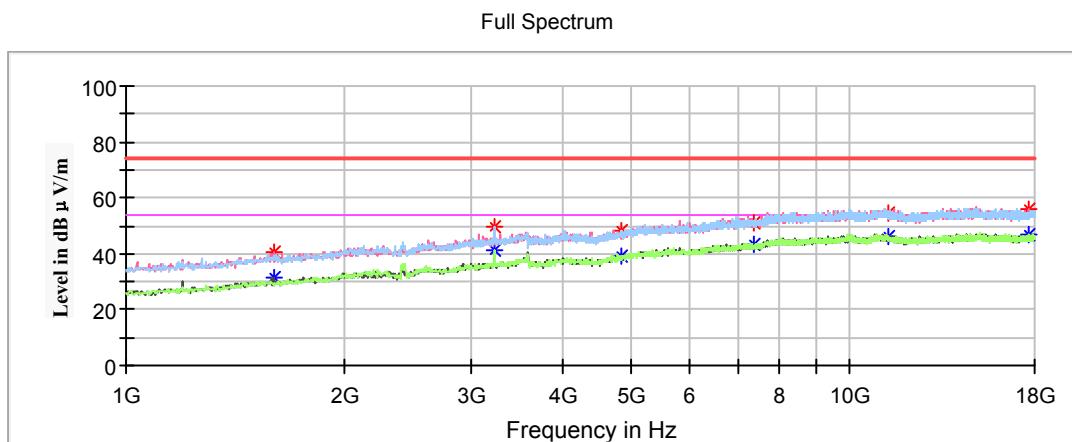


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1771.800000	---	30.68	200.0	V	88.0	0.6	54.00	23.32
1771.800000	40.53	---	200.0	V	88.0	0.6	74.00	33.47
3281.400000	---	41.86	100.0	H	148.0	6.7	54.00	12.14
3281.400000	51.59	---	100.0	H	148.0	6.7	74.00	22.41
4924.000000	---	39.41	250.0	V	114.0	11.3	54.00	14.59
4924.000000	47.95	---	250.0	V	114.0	11.3	74.00	26.05
7386.000000	---	42.66	250.0	V	12.0	15.5	54.00	11.34
7386.000000	51.65	---	250.0	V	12.0	15.5	74.00	22.35
10928.000000	---	46.54	150.0	V	4.0	18.9	54.00	7.46
10928.000000	55.34	---	150.0	V	4.0	18.9	74.00	18.66
17945.600000	---	46.70	200.0	H	72.0	19.1	54.00	7.30
17945.600000	53.93	---	200.0	H	72.0	19.1	74.00	20.07

802.11n-HT40 Mode:(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

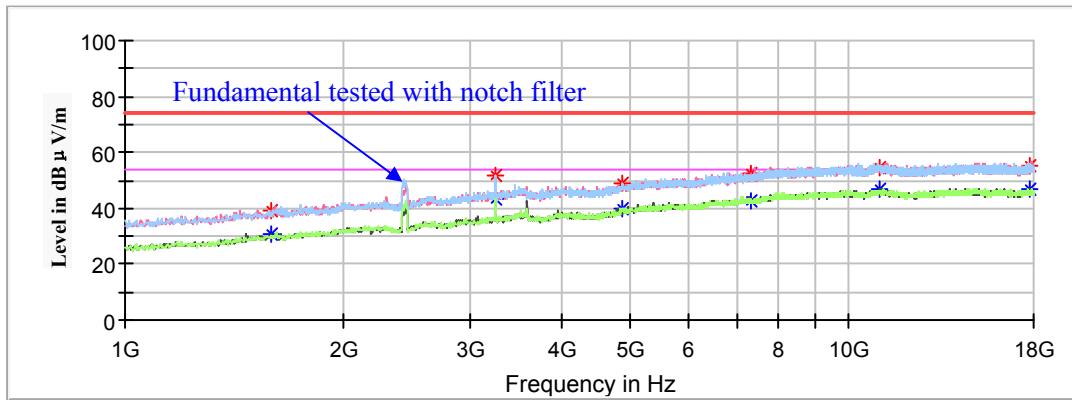
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Channel 3: 2422MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1598.400000	40.40	---	150.0	V	223.0	-0.6	74.00	33.60
1598.400000	---	31.21	150.0	V	223.0	-0.6	54.00	22.79
3227.000000	49.98	---	150.0	H	121.0	6.6	74.00	24.02
3227.000000	---	40.96	150.0	H	121.0	6.6	54.00	13.04
4844.000000	48.56	---	200.0	V	31.0	10.9	74.00	25.44
4844.000000	---	39.20	200.0	V	31.0	10.9	54.00	14.80
7266.000000	51.17	---	150.0	V	308.0	15.5	74.00	22.83
7266.000000	---	43.01	150.0	V	308.0	15.5	54.00	10.99
11312.200000	54.46	---	250.0	V	231.0	18.6	74.00	19.54
11312.200000	---	46.49	250.0	V	231.0	18.6	54.00	7.51
17697.400000	55.96	---	100.0	V	101.0	18.8	74.00	18.04
17697.400000	---	47.17	100.0	V	101.0	18.8	54.00	6.83

Channel 6: 2437MHz

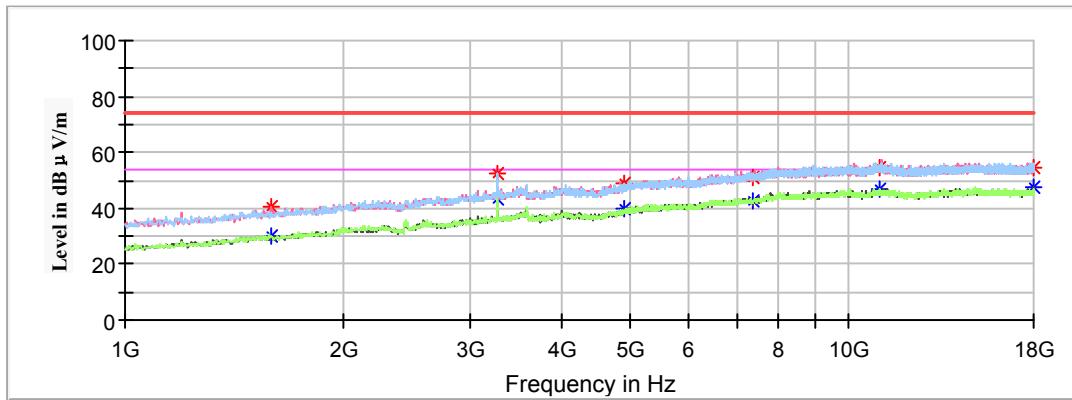
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1591.600000	---	30.90	200.0	V	197.0	-0.6	54.00	23.10
1591.600000	39.48	---	200.0	V	197.0	-0.6	74.00	34.52
3247.400000	---	43.09	100.0	H	297.0	6.6	54.00	10.91
3247.400000	51.90	---	100.0	H	297.0	6.6	74.00	22.10
4874.000000	---	40.05	100.0	V	270.0	11.1	54.00	13.95
4874.000000	48.60	---	100.0	V	270.0	11.1	74.00	25.40
7311.000000	---	42.76	250.0	V	54.0	15.4	54.00	11.24
7311.000000	52.33	---	250.0	V	54.0	15.4	74.00	21.67
11023.200000	---	46.82	150.0	H	55.0	19.0	54.00	7.18
11023.200000	54.30	---	150.0	H	55.0	19.0	74.00	19.70
17734.800000	---	46.88	250.0	V	7.0	18.8	54.00	7.12
17734.800000	54.96	---	250.0	V	7.0	18.8	74.00	19.04

Channel 9: 2452MHz

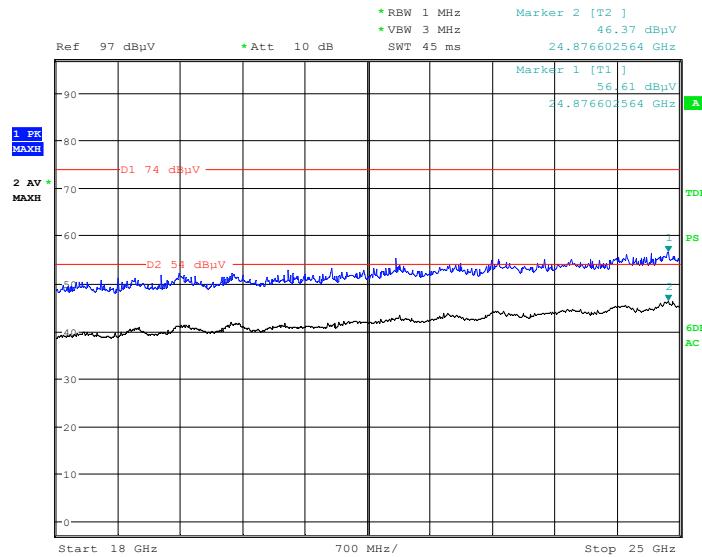
Full Spectrum



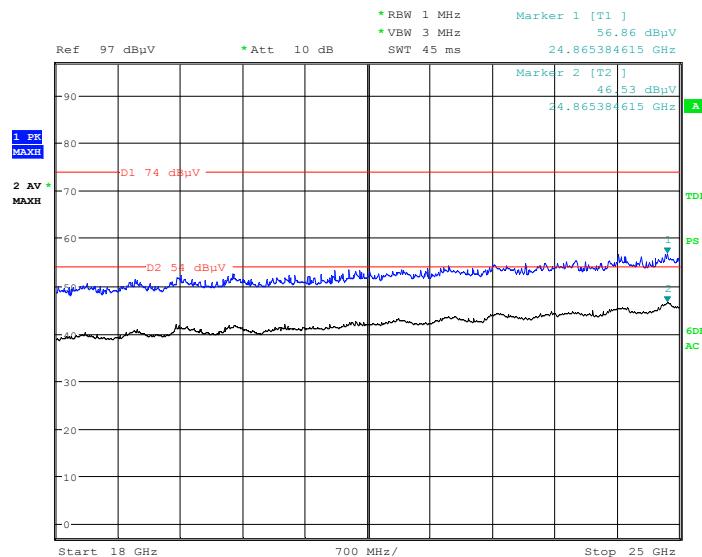
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1588.200000	40.77	---	200.0	V	160.0	-0.6	74.00	33.23
1588.200000	---	30.13	200.0	V	160.0	-0.6	54.00	23.87
3267.800000	52.19	---	100.0	H	127.0	6.7	74.00	21.81
3267.800000	---	43.31	100.0	H	127.0	6.7	54.00	10.69
4904.000000	48.85	---	200.0	V	81.0	11.2	74.00	25.15
4904.000000	---	39.94	200.0	V	81.0	11.2	54.00	14.06
7356.000000	51.35	---	250.0	V	326.0	15.5	74.00	22.65
7356.000000	---	42.59	250.0	V	326.0	15.5	54.00	11.41
11036.800000	54.28	---	150.0	V	158.0	19.0	74.00	19.72
11036.800000	---	46.78	150.0	V	158.0	19.0	54.00	7.22
17969.400000	54.84	---	250.0	V	124.0	19.2	74.00	19.16
17969.400000	---	47.23	250.0	V	124.0	19.2	54.00	6.77

18GHz - 25GHz:

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case channel 3 of 802.11n-HT20 mode in X-axis of orientation was recorded

Horizontal

Date: 7.AUG.2018 08:40:36

Vertical

Date: 7.AUG.2018 08:50:36

Fundamental Test & Restricted Bands Emissions Test:

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)**802.11b Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turtable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 1: 2412MHz								
2412.000000	113.09	---	200.0	V	266.0	2.9	/	/
2412.000000	---	106.21	200.0	V	266.0	2.9	/	/
2412.000000	110.54	---	150.0	H	90.0	2.9	/	/
2412.000000	---	103.88	150.0	H	90.0	2.9	/	/
2390.000000	56.12	---	250.0	V	48.0	2.8	74.00	17.88
2390.000000	---	48.40	250.0	V	48.0	2.8	54.00	5.60
Channel 2: 2417MHz								
2417.000000	113.39	---	200.0	V	266.0	2.9	/	/
2417.000000	---	107.91	200.0	V	266.0	2.9	/	/
2417.000000	---	105.39	150.0	H	274.0	2.9	/	/
2417.000000	110.93	---	150.0	H	274.0	2.9	/	/
2390.000000	53.16	---	150.0	V	81.0	2.8	74.00	20.84
2390.000000	---	46.23	150.0	V	81.0	2.8	54.00	7.77
Channel 6: 2437MHz								
2437.000000	113.76	---	150.0	V	115.0	3.0	/	/
2437.000000	---	107.16	150.0	V	115.0	3.0	/	/
2437.000000	111.35	---	250.0	H	227.0	3.0	/	/
2437.000000	---	104.60	250.0	H	227.0	3.0	/	/
Channel 11: 2462MHz								
2462.000000	113.56	---	200.0	V	202.0	3.0	/	/
2462.000000	---	106.51	200.0	V	202.0	3.0	/	/
2462.000000	111.27	---	200.0	H	318.0	3.0	/	/
2462.000000	---	104.15	200.0	H	318.0	3.0	/	/
2483.500000	55.88	---	150.0	V	337.0	3.0	74.00	18.12
2483.500000	---	47.56	150.0	V	337.0	3.0	54.00	6.44

802.11g Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 1: 2412MHz								
2412.000000	103.39	---	150.0	V	97.0	2.9	/	/
2412.000000	---	95.42	150.0	V	97.0	2.9	/	/
2412.000000	101.11	---	250.0	H	52.0	2.9	/	/
2412.000000	---	93.13	250.0	H	52.0	2.9	/	/
2390.000000	53.61	---	200.0	V	81.0	2.8	74.00	20.39
2390.000000	---	40.10	200.0	V	81.0	2.8	54.00	13.90
Channel 2: 2417MHz								
2417.000000	106.88	---	200.0	V	265.0	2.9	/	/
2417.000000	---	98.26	200.0	V	265.0	2.9	/	/
2417.000000	104.45	---	250.0	H	265.0	2.9	/	/
2417.000000	---	95.81	250.0	H	265.0	2.9	/	/
2390.000000	58.59	---	200.0	V	6.0	2.8	74.00	15.41
2390.000000	---	48.13	200.0	V	6.0	2.8	54.00	5.87
Channel 3: 2422MHz								
2422.000000	106.94	---	150.0	V	140.0	2.9	/	/
2422.000000	---	99.43	150.0	V	140.0	2.9	/	/
2422.000000	104.44	---	150.0	H	140.0	2.9	/	/
2422.000000	---	96.92	150.0	H	140.0	2.9	/	/
2390.000000	58.36	---	200.0	V	220.0	2.8	74.00	15.64
2390.000000	---	48.86	200.0	V	220.0	2.8	54.00	5.14
Channel 6: 2437MHz								
2437.000000	107.01	---	150.0	V	180.0	3.0	/	/
2437.000000	---	98.87	150.0	V	180.0	3.0	/	/
2437.000000	104.80	---	200.0	H	277.0	3.0	/	/
2437.000000	---	96.41	200.0	H	277.0	3.0	/	/
Channel 9: 2452MHz								
2452.000000	106.53	---	150.0	V	224.0	3.0	/	/
2452.000000	---	98.28	150.0	V	224.0	3.0	/	/
2452.000000	104.14	---	200.0	H	224.0	3.0	/	/
2452.000000	---	95.85	200.0	H	224.0	3.0	/	/
2483.500000	55.69	---	150.0	V	112.0	3.0	74.00	18.31
2483.500000	---	46.76	150.0	V	112.0	3.0	54.00	7.24

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 10: 2457MHz								
2457.000000	105.46	---	200.0	V	324.0	3.0	/	/
2457.000000	---	97.71	200.0	V	324.0	3.0	/	/
2457.000000	103.04	---	250.0	H	324.0	3.0	/	/
2457.000000	---	95.21	250.0	H	324.0	3.0	/	/
2483.500000	57.16	---	200.0	V	80.0	3.0	74.00	16.84
2483.500000	---	48.09	200.0	V	80.0	3.0	54.00	5.91
Channel 11: 2462MHz								
2462.000000	104.50	---	250.0	V	248.0	3.0	/	/
2462.000000	---	96.02	250.0	V	248.0	3.0	/	/
2462.000000	102.21	---	150.0	H	133.0	3.0	/	/
2462.000000	---	93.63	150.0	H	133.0	3.0	/	/
2483.500000	58.22	---	200.0	V	40.0	3.0	74.00	15.78
2483.500000	---	50.67	200.0	V	40.0	3.0	54.00	3.33

802.11n-HT20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 1: 2412MHz								
2412.000000	102.64	---	250.0	V	354.0	2.9	/	/
2412.000000	---	93.76	250.0	V	354.0	2.9	/	/
2412.000000	100.15	---	200.0	H	91.0	2.9	/	/
2412.000000	---	91.40	200.0	H	91.0	2.9	/	/
2390.000000	55.99	---	200.0	V	7.0	2.8	74.00	18.01
2390.000000	---	47.80	200.0	V	7.0	2.8	54.00	6.20
Channel 2: 2417MHz								
2417.000000	106.53	---	150.0	V	322.0	2.9	/	/
2417.000000	---	97.59	150.0	V	322.0	2.9	/	/
2417.000000	104.12	---	150.0	H	322.0	2.9	/	/
2417.000000	---	97.15	150.0	H	322.0	2.9	/	/
2390.000000	---	47.55	200.0	V	53.0	2.8	54.00	6.45
2390.000000	57.36	---	200.0	V	53.0	2.8	74.00	16.64

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 3: 2422MHz								
2422.000000	107.02	---	150.0	V	285.0	2.9	/	/
2422.000000	---	98.31	150.0	V	285.0	2.9	/	/
2422.000000	104.57	---	200.0	H	285.0	2.9	/	/
2422.000000	---	95.89	200.0	H	285.0	2.9	/	/
2390.000000	---	47.96	150.0	V	75.0	2.8	54.00	6.04
2390.000000	58.16	---	150.0	V	75.0	2.8	74.00	15.84
Channel 6: 2437MHz								
2437.000000	106.99	---	200.0	V	345.0	3.0	/	/
2437.000000	---	98.28	200.0	V	345.0	3.0	/	/
2437.000000	104.55	---	200.0	H	213.0	3.0	/	/
2437.000000	---	95.81	200.0	H	213.0	3.0	/	/
Channel 9: 2452MHz								
2452.000000	106.88	---	200.0	V	60.0	3.0	/	/
2452.000000	---	98.67	200.0	V	60.0	3.0	/	/
2452.000000	104.49	---	200.0	H	60.0	3.0	/	/
2452.000000	---	96.25	200.0	H	60.0	3.0	/	/
2483.500000	---	47.98	150.0	V	210.0	3.0	54.00	6.02
2483.500000	57.63	---	150.0	V	210.0	3.0	74.00	16.37
Channel 10: 2457MHz								
2457.000000	---	97.69	200.0	H	301.0	3.0	/	/
2457.000000	106.39	---	200.0	H	301.0	3.0	/	/
2457.000000	---	95.27	200.0	H	301.0	3.0	/	/
2457.000000	103.99	---	200.0	H	301.0	3.0	/	/
2483.500000	55.69	---	150.0	H	231.0	3.0	74.00	18.31
2483.500000	---	46.97	150.0	H	231.0	3.0	54.00	7.03
Channel 11: 2462MHz								
2462.000000	103.57	---	250.0	V	195.0	3.0	/	/
2462.000000	---	94.91	250.0	V	195.0	3.0	/	/
2462.000000	101.05	---	250.0	H	355.0	3.0	/	/
2462.000000	---	92.48	250.0	H	355.0	3.0	/	/
2483.500000	56.13	---	200.0	V	231.0	3.0	74.00	17.87
2483.500000	---	48.92	200.0	V	231.0	3.0	54.00	5.08

802.11n-HT40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 3: 2422MHz								
2422.000000	97.11	---	150.0	V	222.0	2.9	/	/
2422.000000	---	88.20	150.0	V	222.0	2.9	/	/
2422.000000	94.62	---	250.0	H	343.0	2.9	/	/
2422.000000	---	85.82	250.0	H	343.0	2.9	/	/
2390.000000	55.27	---	200.0	V	47.0	2.8	74.00	18.73
2390.000000	---	48.73	200.0	V	47.0	2.8	54.00	5.27
Channel 4: 2427MHz								
2427.000000	---	91.36	200.0	V	346.0	2.9	/	/
2427.000000	99.79	---	200.0	V	346.0	2.9	/	/
2427.000000	---	88.90	200.0	H	346.0	2.9	/	/
2427.000000	97.36	---	200.0	H	346.0	2.9	/	/
2390.000000	54.69	---	150.0	V	334.0	2.8	74.00	19.31
2390.000000	---	47.56	150.0	V	334.0	2.8	54.00	6.44
Channel 5: 2432MHz								
2432.000000	---	92.61	150.0	V	327.0	3.0	/	/
2432.000000	100.51	---	150.0	V	327.0	3.0	/	/
2432.000000	---	90.22	250.0	H	327.0	3.0	/	/
2432.000000	98.15	---	250.0	H	327.0	3.0	/	/
2390.000000	55.99	---	150.0	V	347.0	2.8	74.00	18.01
2390.000000	---	47.86	150.0	V	347.0	2.8	54.00	6.14
Channel 6: 2437MHz								
2437.000000	100.49	---	250.0	V	113.0	3.0	/	/
2437.000000	---	92.63	250.0	V	113.0	3.0	/	/
2437.000000	98.17	---	150.0	H	210.0	3.0	/	/
2437.000000	---	90.08	150.0	H	210.0	3.0	/	/
Channel 7: 2442MHz								
2442.000000	---	91.16	200.0	V	277.0	3.0	/	/
2442.000000	99.88	---	200.0	V	277.0	3.0	/	/
2442.000000	---	88.89	200.0	H	277.0	3.0	/	/
2442.000000	97.47	---	200.0	H	277.0	3.0	/	/
2483.500000	55.53	---	150.0	V	315.0	3.0	74.00	18.47
2483.500000	---	47.76	150.0	V	315.0	3.0	54.00	6.24

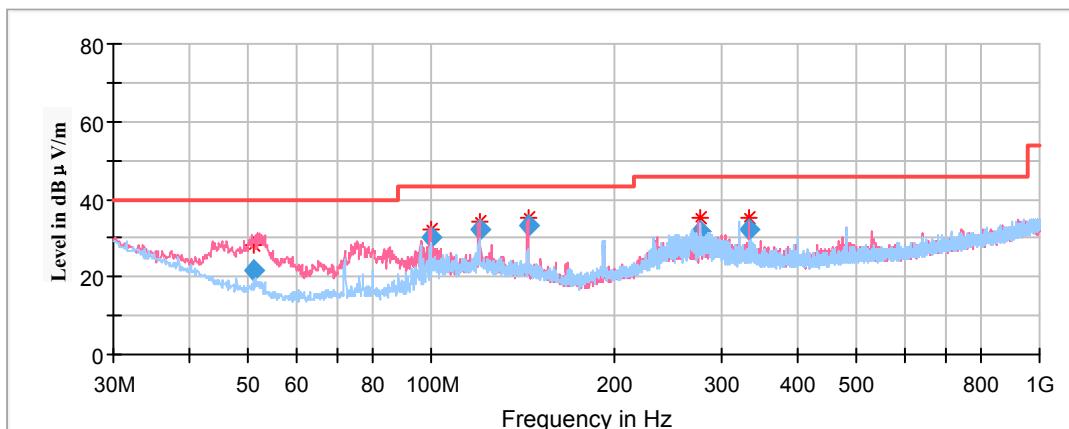
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 8: 2447MHz								
2447.000000	---	89.39	250.0	V	131.0	3.0	/	/
2447.000000	97.98	---	250.0	V	131.0	3.0	/	/
2447.000000	---	87.01	200.0	H	131.0	3.0	/	/
2447.000000	95.55	---	200.0	H	131.0	3.0	/	/
2483.500000	---	47.89	150.0	V	280.0	3.0	54.00	6.11
2483.500000	54.83	---	150.0	V	280.0	3.0	74.00	19.17
Channel 9: 2452MHz								
2452.000000	95.02	---	200.0	V	72.0	3.0	/	/
2452.000000	---	86.44	200.0	V	72.0	3.0	/	/
2452.000000	92.79	---	150.0	H	158.0	3.0	/	/
2452.000000	---	84.01	150.0	H	158.0	3.0	/	/
2483.500000	55.32	---	250.0	V	116.0	3.0	74.00	18.68
2483.500000	---	48.34	250.0	V	116.0	3.0	54.00	5.66

For BLE Mode:

Spurious Emission Test:

30MHz-1GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case channel 19 of operation in the X axis of orientation was recorded)

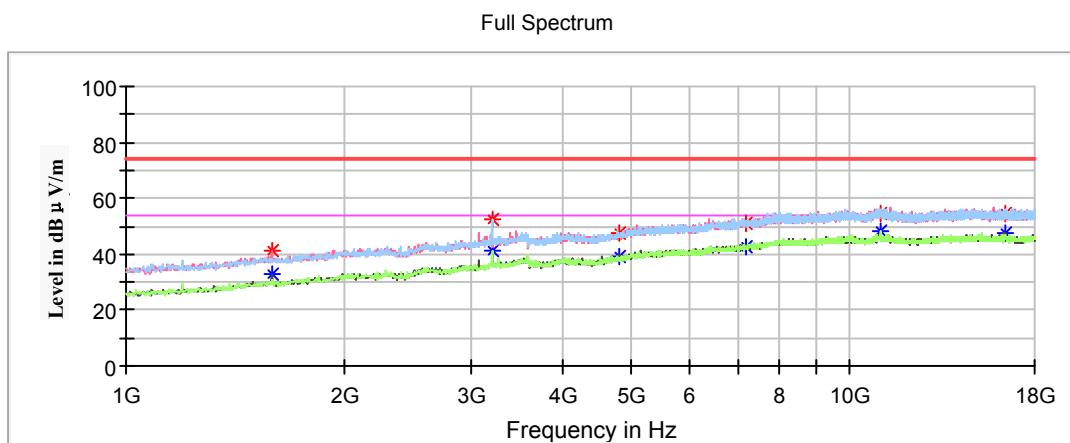


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dB μ V/m)	Height (cm)	Polar (H/V)				
51.090100	21.66	101.0	V	353.0	-17.6	40.00	18.34
99.612500	30.23	101.0	V	119.0	-15.0	43.50	13.27
120.029900	32.45	101.0	V	165.0	-11.2	43.50	11.05
144.310000	33.35	101.0	V	341.0	-12.1	43.50	10.15
276.545550	31.51	199.0	V	186.0	-11.2	46.00	14.49
333.001050	32.22	199.0	V	13.0	-9.8	46.00	13.78

1GHz-18GHz(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

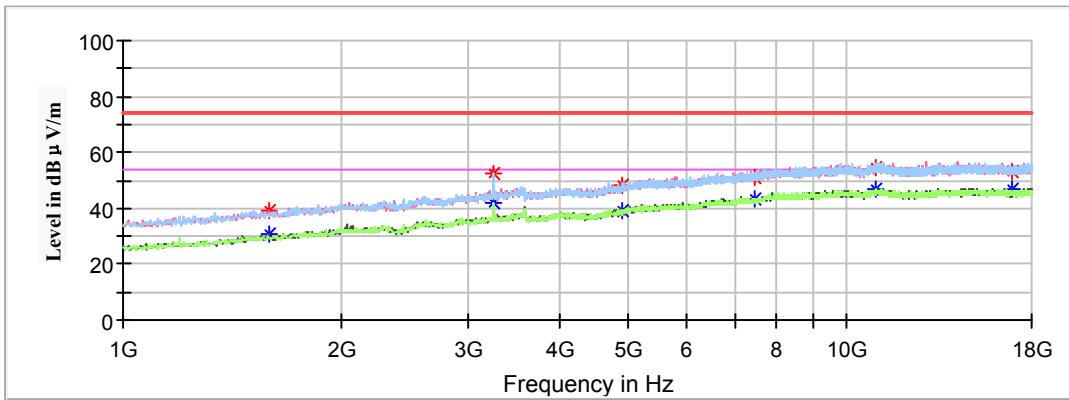
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Channel 0: 2402MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1588.200000	41.47	---	100.0	V	274.0	-0.6	74.00	32.53
1588.200000	---	32.69	100.0	V	274.0	-0.6	54.00	21.31
3199.800000	52.15	---	150.0	H	28.0	6.5	74.00	21.85
3199.800000	---	41.55	150.0	H	28.0	6.5	54.00	12.45
4804.000000	47.58	---	200.0	V	54.0	10.7	74.00	26.42
4804.000000	---	38.95	200.0	V	54.0	10.7	54.00	15.05
7206.000000	51.02	---	150.0	V	319.0	15.2	74.00	22.98
7206.000000	---	42.93	150.0	V	319.0	15.2	54.00	11.07
11016.400000	54.58	---	200.0	H	221.0	19.0	74.00	19.42
11016.400000	---	47.94	200.0	H	221.0	19.0	54.00	6.06
16398.600000	54.43	---	100.0	H	162.0	18.1	74.00	19.57
16398.600000	---	47.68	100.0	H	162.0	18.1	54.00	6.32

Channel 19: 2440MHz

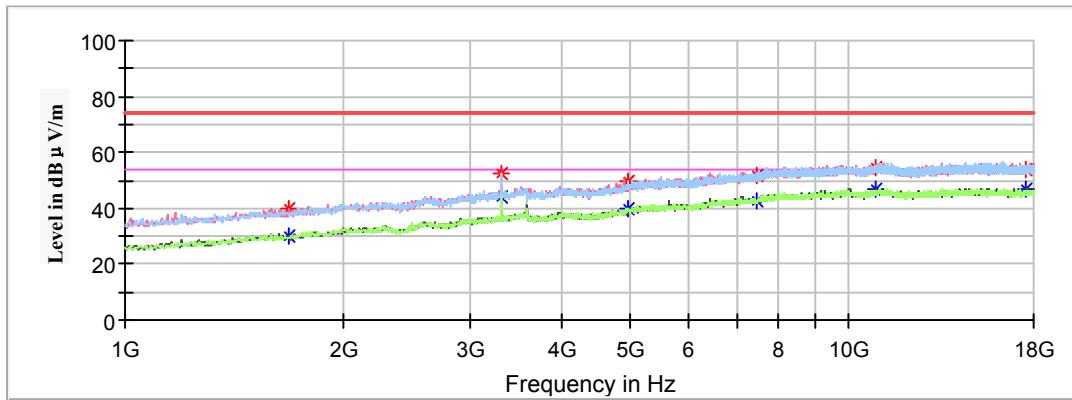
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1591.600000	---	30.69	100.0	V	230.0	-0.6	54.00	23.31
1591.600000	39.07	---	100.0	V	230.0	-0.6	74.00	34.93
3250.800000	---	42.28	150.0	H	205.0	6.6	54.00	11.72
3250.800000	52.11	---	150.0	H	205.0	6.6	74.00	21.89
4880.000000	---	39.08	200.0	V	80.0	11.1	54.00	14.92
4880.000000	48.02	---	200.0	V	80.0	11.1	74.00	25.98
7320.000000	---	43.01	100.0	V	184.0	15.4	54.00	10.99
7320.000000	51.31	---	100.0	V	184.0	15.4	74.00	22.69
10979.000000	---	46.80	250.0	H	276.0	19.0	54.00	7.20
10979.000000	54.81	---	250.0	H	276.0	19.0	74.00	19.19
16895.000000	---	46.67	100.0	V	149.0	18.1	54.00	7.33
16895.000000	53.42	---	100.0	V	149.0	18.1	74.00	20.58

Channel 39: 2480MHz

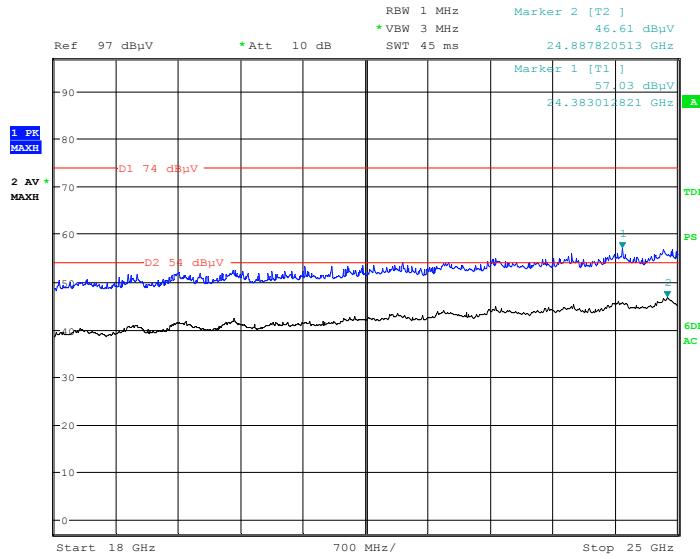
Full Spectrum



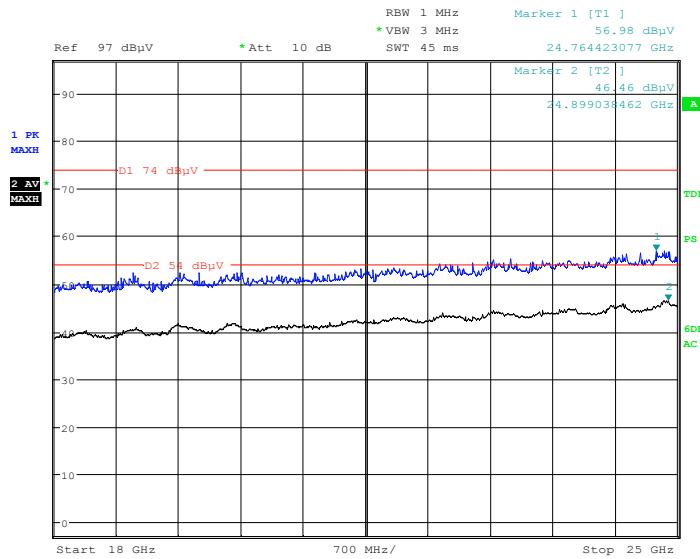
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1686.800000	39.80	---	250.0	V	164.0	0.1	74.00	34.20
1686.800000	---	30.38	250.0	V	164.0	0.1	54.00	23.62
3305.200000	52.75	---	100.0	H	162.0	6.8	74.00	21.25
3305.200000	---	43.71	100.0	H	162.0	6.8	54.00	10.29
4960.000000	49.92	---	250.0	V	269.0	11.5	74.00	24.08
4960.000000	---	39.65	250.0	V	269.0	11.5	54.00	14.35
7440.000000	51.88	---	200.0	V	224.0	15.6	74.00	22.12
7440.000000	---	42.93	200.0	V	224.0	15.6	54.00	11.07
10887.200000	54.44	---	100.0	H	148.0	18.8	74.00	19.56
10887.200000	---	46.79	100.0	H	148.0	18.8	54.00	7.21
17561.400000	53.55	---	200.0	V	4.0	18.6	74.00	20.45
17561.400000	---	46.98	200.0	V	4.0	18.6	54.00	7.02

18GHz-25GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case channel 19 of operation in the X axis of orientation was recorded)

Horizontal Plot

Date: 8.AUG.2018 09:15:57

Vertical Plot

Date: 8.AUG.2018 09:26:48

Fundamental Test & Restricted Bands Emissions Test:

(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

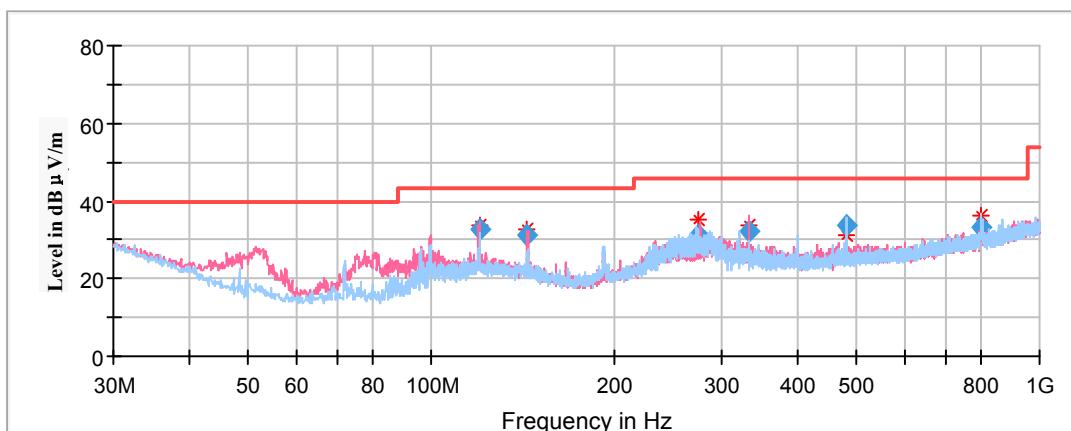
1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turtable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 0: 2402MHz								
2402.000000	95.66	---	200.0	V	253.0	2.9	/	/
2402.000000	---	94.88	200.0	V	253.0	2.9	/	/
2402.000000	93.47	---	150.0	H	317.0	2.9	/	/
2402.000000	---	92.82	150.0	H	317.0	2.9	/	/
2390.000000	52.74	---	150.0	V	263.0	2.8	74.00	21.26
2390.000000	---	46.49	150.0	V	263.0	2.8	54.00	7.51
Channel 19: 2440MHz								
2440.000000	95.73	---	250.0	V	113.0	3.0	/	/
2440.000000	---	95.14	250.0	V	113.0	3.0	/	/
2440.000000	93.78	---	150.0	H	210.0	3.0	/	/
2440.000000	---	93.08	150.0	H	210.0	3.0	/	/
Channel 39: 2480MHz								
2480.000000	95.61	---	250.0	V	0.0	3.0	/	/
2480.000000	---	94.97	250.0	V	0.0	3.0	/	/
2480.000000	93.77	---	150.0	H	130.0	3.0	/	/
2480.000000	---	92.85	150.0	H	130.0	3.0	/	/
2483.500000	52.97	---	200.0	V	233.0	3.0	74.00	21.03
2483.500000	---	46.53	200.0	V	233.0	3.0	54.00	7.47

Data for Dipole Antenna:**For Wi-Fi Mode:****Spurious Emission Test:****30MHz-1GHz:**

*Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case **channel 3 of 802.11n-HT20 mode in X-axis of orientation** was recorded*

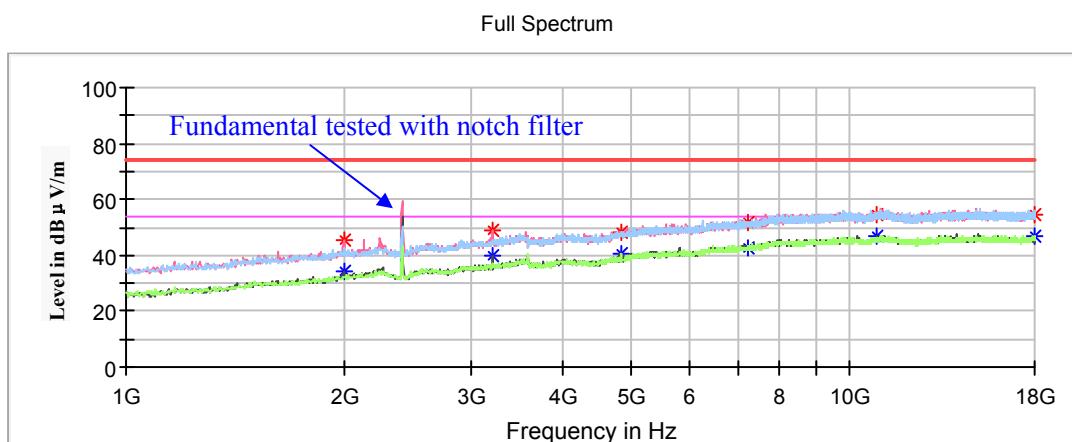


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
120.102600	32.59	101.0	V	101.0	-11.2	43.50	10.91
144.010950	31.04	101.0	V	49.0	-12.1	43.50	12.46
275.530750	31.40	199.0	V	217.0	-11.3	46.00	14.60
332.993700	32.21	199.0	V	329.0	-9.8	46.00	13.79
480.022950	33.86	198.0	H	130.0	-6.7	46.00	12.14
800.706550	33.10	101.0	H	0.0	-1.7	46.00	12.90

1GHz-18GHz:**802.11b Mode:***(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)*

Note:

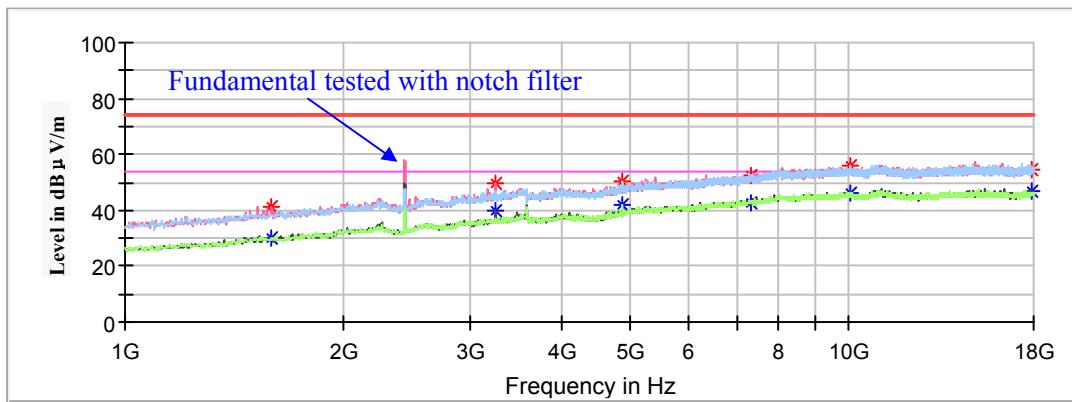
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V / m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V / m)

Channel 1: 2412MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V / m)	Average (dB μ V / m)	Height (cm)	Polar (H/V)				
1999.600000	---	33.94	100.0	V	59.0	2.0	54.00	20.06
1999.600000	45.61	---	100.0	V	59.0	2.0	74.00	28.39
3213.400000	---	40.02	150.0	V	263.0	6.6	54.00	13.98
3213.400000	49.19	---	150.0	V	263.0	6.6	74.00	24.81
4824.000000	---	40.60	250.0	V	148.0	10.8	54.00	13.40
4824.000000	48.30	---	250.0	V	148.0	10.8	74.00	25.70
7236.000000	---	42.53	100.0	V	267.0	15.3	54.00	11.47
7236.000000	52.06	---	100.0	V	267.0	15.3	74.00	21.94
10904.200000	---	46.84	200.0	V	332.0	18.8	54.00	7.16
10904.200000	54.41	---	200.0	V	332.0	18.8	74.00	19.59
17945.600000	---	46.81	100.0	H	118.0	19.1	54.00	7.19
17945.600000	54.50	---	100.0	H	118.0	19.1	74.00	19.50

Channel 6: 2437MHz

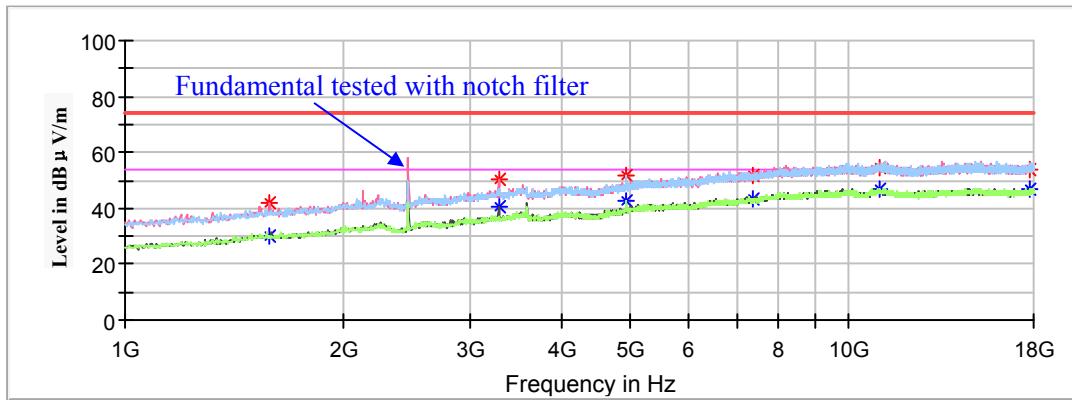
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.000000	---	30.22	200.0	V	220.0	-0.6	54.00	23.78
1595.000000	41.33	---	200.0	V	220.0	-0.6	74.00	32.67
3247.400000	---	40.02	150.0	V	40.0	6.6	54.00	13.98
3247.400000	49.39	---	150.0	V	40.0	6.6	74.00	24.61
4874.000000	---	41.94	100.0	V	46.0	11.1	54.00	12.06
4874.000000	50.49	---	100.0	V	46.0	11.1	74.00	23.51
7311.000000	---	42.78	200.0	V	106.0	15.4	54.00	11.22
7311.000000	52.46	---	200.0	V	106.0	15.4	74.00	21.54
10020.200000	---	46.26	100.0	H	16.0	18.3	54.00	7.74
10020.200000	56.21	---	100.0	H	16.0	18.3	74.00	17.79
17867.400000	---	46.80	200.0	V	204.0	19.0	54.00	7.20
17867.400000	54.32	---	200.0	V	204.0	19.0	74.00	19.68

Channel 11: 2462MHz

Full Spectrum

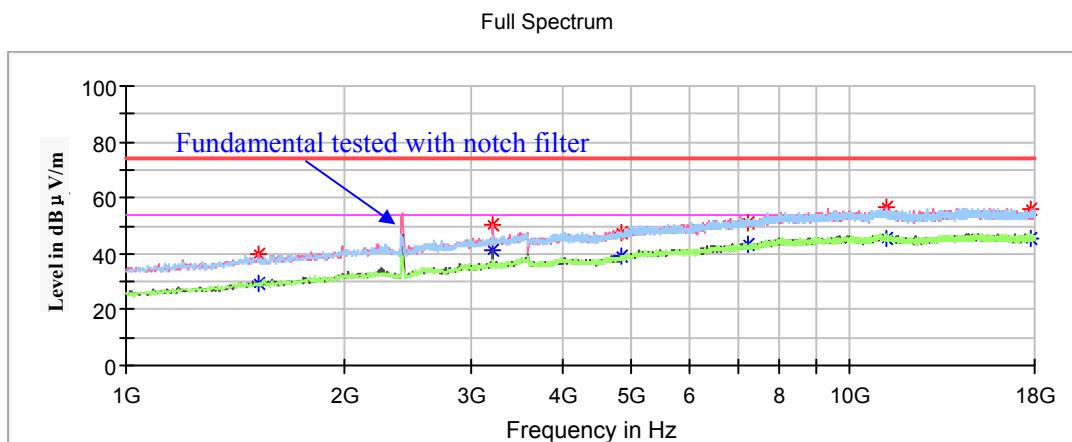


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1584.800000	41.97	---	200.0	V	124.0	-0.6	74.00	32.03
1584.800000	---	29.86	200.0	V	124.0	-0.6	54.00	24.14
3281.400000	50.35	---	150.0	V	101.0	6.7	74.00	23.65
3281.400000	---	40.31	150.0	V	101.0	6.7	54.00	13.69
4924.000000	51.73	---	250.0	V	234.0	11.3	74.00	22.27
4924.000000	---	42.85	250.0	V	234.0	11.3	54.00	11.15
7386.000000	51.54	---	200.0	V	294.0	15.5	74.00	22.46
7386.000000	---	43.34	200.0	V	294.0	15.5	54.00	10.66
11060.600000	54.28	---	100.0	V	131.0	19.0	74.00	19.72
11060.600000	---	47.11	100.0	V	131.0	19.0	54.00	6.89
17768.800000	54.07	---	200.0	V	123.0	18.9	74.00	19.93
17768.800000	---	46.87	200.0	V	123.0	18.9	54.00	7.13

802.11g Mode:(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

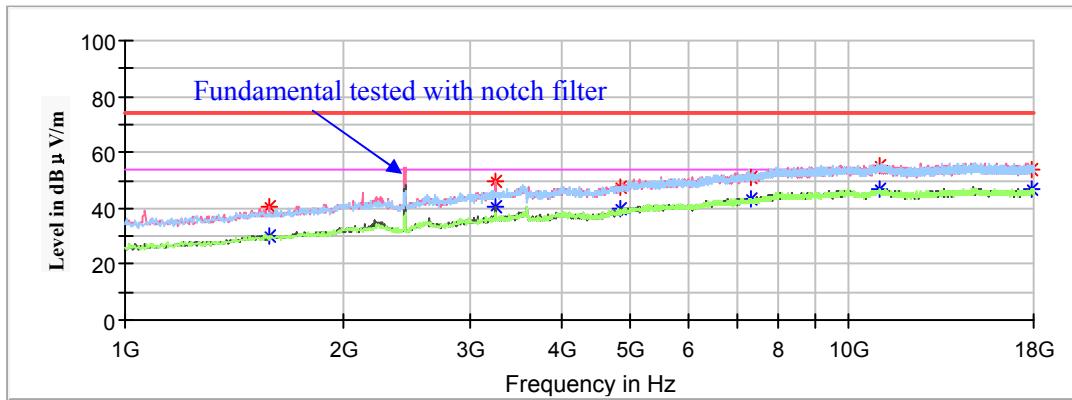
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Channel 1: 2412MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1523.600000	---	29.55	100.0	V	246.0	-1.1	54.00	24.45
1523.600000	40.05	---	100.0	V	246.0	-1.1	74.00	33.95
3213.400000	---	41.25	100.0	V	340.0	6.6	54.00	12.75
3213.400000	50.45	---	100.0	V	340.0	6.6	74.00	23.55
4824.000000	---	39.42	250.0	V	231.0	10.8	54.00	14.58
4824.000000	47.32	---	250.0	V	231.0	10.8	74.00	26.68
7236.000000	---	43.02	100.0	V	199.0	15.3	54.00	10.98
7236.000000	51.03	---	100.0	V	199.0	15.3	74.00	22.97
11237.400000	---	45.69	250.0	V	250.0	18.7	54.00	8.31
11237.400000	56.38	---	250.0	V	250.0	18.7	74.00	17.62
17826.600000	---	45.11	150.0	V	140.0	18.9	54.00	8.89
17826.600000	56.15	---	150.0	V	140.0	18.9	74.00	17.85

Channel 6: 2437MHz

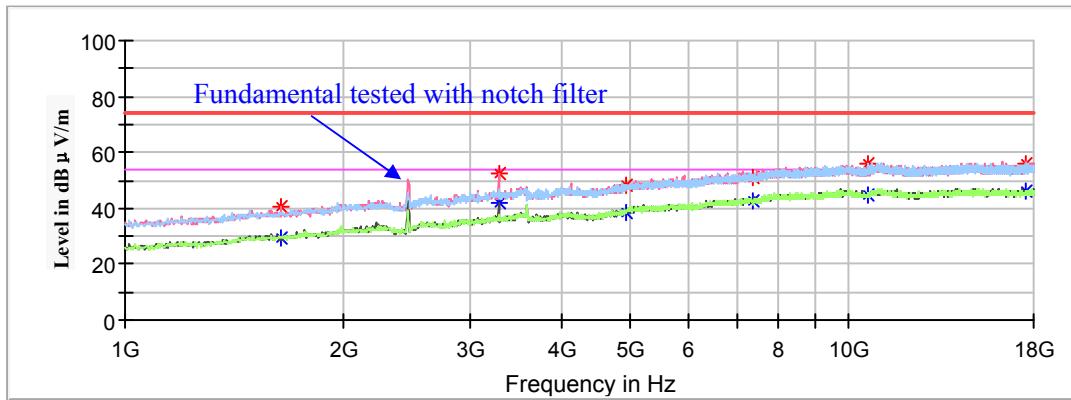
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1581.400000	40.84	---	250.0	V	134.0	-0.7	74.00	33.16
1581.400000	---	30.06	250.0	V	134.0	-0.7	54.00	23.94
3247.400000	49.95	---	100.0	V	199.0	6.6	74.00	24.05
3247.400000	---	40.65	100.0	V	199.0	6.6	54.00	13.35
4874.000000	47.47	---	150.0	V	153.0	11.1	74.00	26.53
4874.000000	---	39.68	150.0	V	153.0	11.1	54.00	14.32
7311.000000	51.19	---	200.0	V	354.0	15.4	74.00	22.81
7311.000000	---	43.35	200.0	V	354.0	15.4	54.00	10.65
11036.800000	55.58	---	150.0	V	104.0	19.0	74.00	18.42
11036.800000	---	46.69	150.0	V	104.0	19.0	54.00	7.31
17850.400000	53.79	---	200.0	V	344.0	19.0	74.00	20.21
17850.400000	---	47.18	200.0	V	344.0	19.0	54.00	6.82

Channel 11: 2462MHz

Full Spectrum

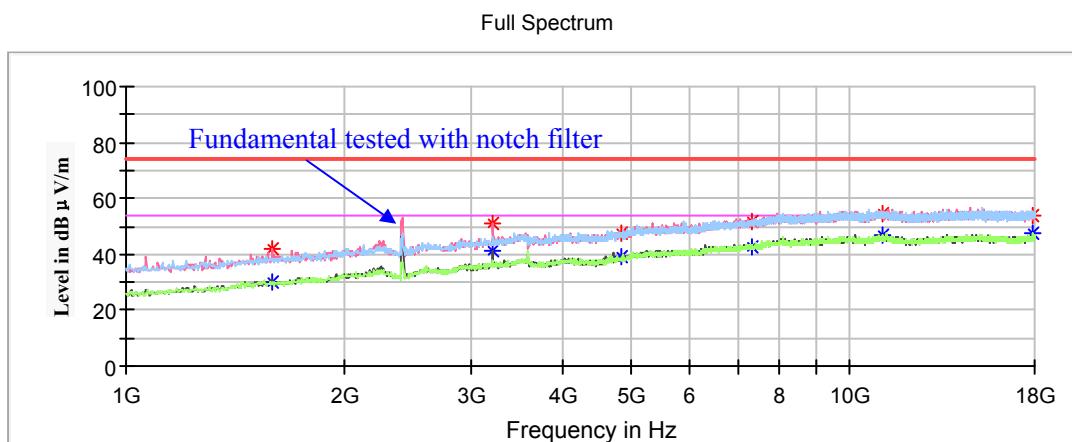


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1642.600000	---	29.32	200.0	V	260.0	-0.2	54.00	24.68
1642.600000	40.34	---	200.0	V	260.0	-0.2	74.00	33.66
3281.400000	---	41.87	100.0	V	276.0	6.7	54.00	12.13
3281.400000	52.12	---	100.0	V	276.0	6.7	74.00	21.88
4924.000000	---	38.41	250.0	V	70.0	11.3	54.00	15.59
4924.000000	48.12	---	250.0	V	70.0	11.3	74.00	25.88
7386.000000	---	43.00	250.0	V	117.0	15.5	54.00	11.00
7386.000000	51.23	---	250.0	V	117.0	15.5	74.00	22.77
10645.800000	---	44.55	150.0	H	80.0	18.1	54.00	9.45
10645.800000	55.89	---	150.0	H	80.0	18.1	74.00	18.11
17581.800000	---	45.85	200.0	H	305.0	18.6	54.00	8.15
17581.800000	55.96	---	200.0	H	305.0	18.6	74.00	18.04

802.11n-HT20 Mode:(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

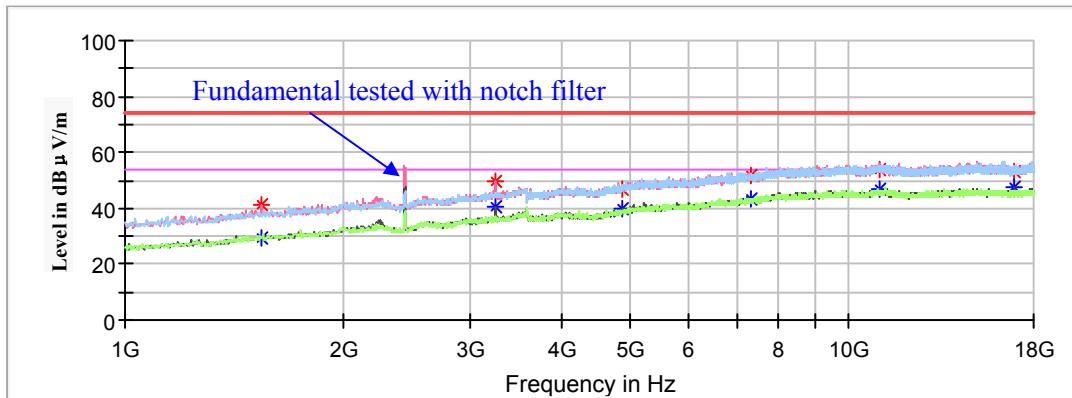
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Channel 1: 2412MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1591.600000	41.91	---	150.0	H	16.0	-0.6	74.00	32.09
1591.600000	---	30.38	150.0	H	16.0	-0.6	54.00	23.62
3213.400000	50.90	---	100.0	V	161.0	6.6	74.00	23.10
3213.400000	---	41.53	100.0	V	161.0	6.6	54.00	12.47
4824.000000	47.65	---	200.0	V	116.0	10.8	74.00	26.35
4824.000000	---	38.97	200.0	V	116.0	10.8	54.00	15.03
7236.000000	51.86	---	100.0	V	353.0	15.3	74.00	22.14
7236.000000	---	42.51	100.0	V	353.0	15.3	54.00	11.49
11064.000000	54.31	---	200.0	V	259.0	19.0	74.00	19.69
11064.000000	---	47.15	200.0	V	259.0	19.0	54.00	6.85
17918.400000	53.92	---	150.0	H	147.0	19.1	74.00	20.08
17918.400000	---	47.22	150.0	H	147.0	19.1	54.00	6.78

Channel 6: 2437MHz

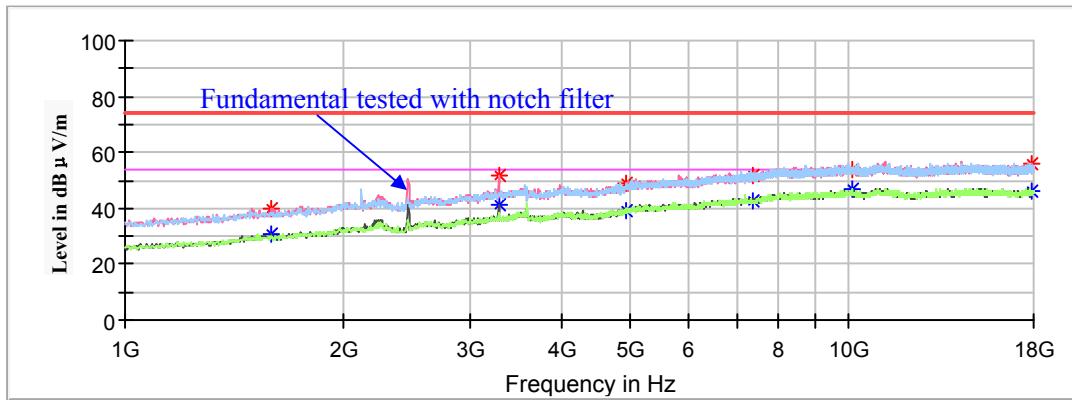
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1547.400000	40.92	---	200.0	V	281.0	-0.9	74.00	33.08
1547.400000	---	29.38	200.0	V	281.0	-0.9	54.00	24.62
3247.400000	49.44	---	150.0	V	128.0	6.6	74.00	24.56
3247.400000	---	40.84	150.0	V	128.0	6.6	54.00	13.16
4874.000000	47.13	---	100.0	V	61.0	11.1	74.00	26.87
4874.000000	---	39.90	100.0	V	61.0	11.1	54.00	14.10
7311.000000	51.74	---	250.0	V	95.0	15.4	74.00	22.26
7311.000000	---	43.19	250.0	V	95.0	15.4	54.00	10.81
10999.400000	54.16	---	100.0	H	66.0	19.1	74.00	19.84
10999.400000	---	46.71	100.0	H	66.0	19.1	54.00	7.29
16969.800000	53.48	---	200.0	V	13.0	18.1	74.00	20.52
16969.800000	---	47.27	200.0	V	13.0	18.1	54.00	6.73

Channel 11: 2462MHz

Full Spectrum

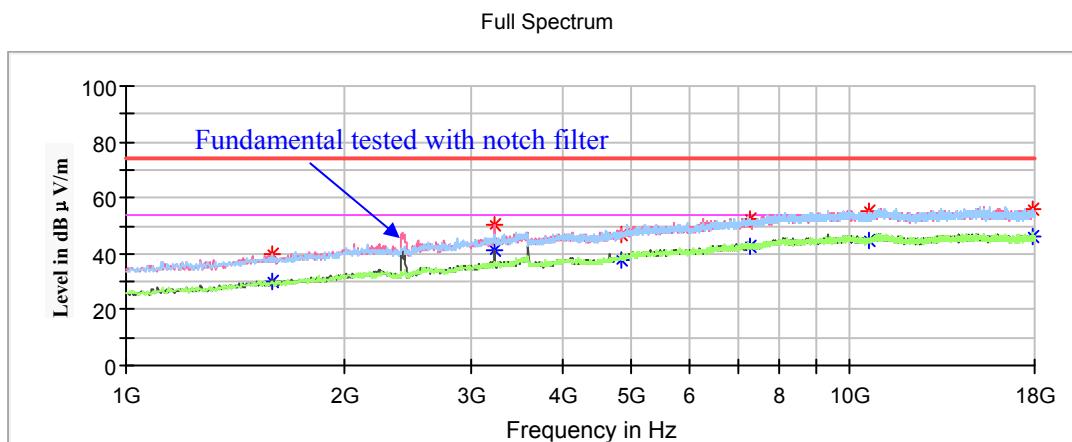


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1591.600000	40.02	---	250.0	V	276.0	-0.6	74.00	33.98
1591.600000	---	30.98	250.0	V	276.0	-0.6	54.00	23.02
3281.400000	51.66	---	100.0	V	48.0	6.7	74.00	22.34
3281.400000	---	41.52	100.0	V	48.0	6.7	54.00	12.48
4924.000000	49.06	---	200.0	V	145.0	11.3	74.00	24.94
4924.000000	---	38.97	200.0	V	145.0	11.3	54.00	15.03
7386.000000	52.03	---	250.0	V	26.0	15.5	74.00	21.97
7386.000000	---	42.66	250.0	V	26.0	15.5	54.00	11.34
10129.000000	54.15	---	100.0	H	78.0	18.1	74.00	19.85
10129.000000	---	47.04	100.0	H	78.0	18.1	54.00	6.96
17877.600000	55.80	---	250.0	V	146.0	19.0	74.00	18.20
17877.600000	---	46.19	250.0	V	146.0	19.0	54.00	7.81

802.11n-HT40 Mode:(Pre-scan in the X, Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

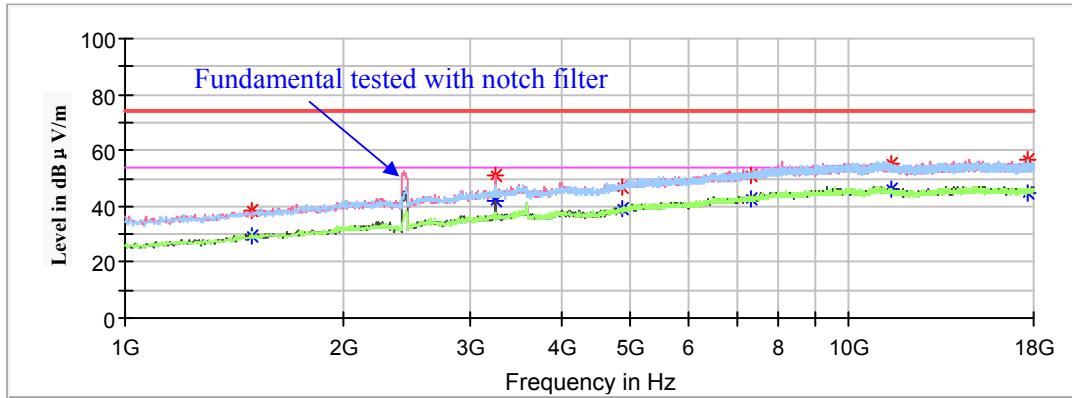
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Channel 3: 2422MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1588.200000	---	30.18	100.0	H	352.0	-0.6	54.00	23.82
1588.200000	40.02	---	100.0	H	352.0	-0.6	74.00	33.98
3227.000000	---	40.91	100.0	V	23.0	6.6	54.00	13.09
3227.000000	50.66	---	100.0	V	23.0	6.6	74.00	23.34
4844.000000	---	38.08	250.0	V	215.0	10.9	54.00	15.92
4844.000000	46.95	---	250.0	V	215.0	10.9	74.00	27.05
7266.000000	---	42.46	150.0	V	127.0	15.3	54.00	11.54
7266.000000	52.27	---	150.0	V	127.0	15.3	74.00	21.73
10635.600000	---	44.43	200.0	V	171.0	18.1	54.00	9.57
10635.600000	55.37	---	200.0	V	171.0	18.1	74.00	18.63
17881.000000	---	46.05	100.0	V	294.0	19.0	54.00	7.95
17881.000000	55.86	---	100.0	V	294.0	19.0	74.00	18.14

Channel 6: 2437MHz

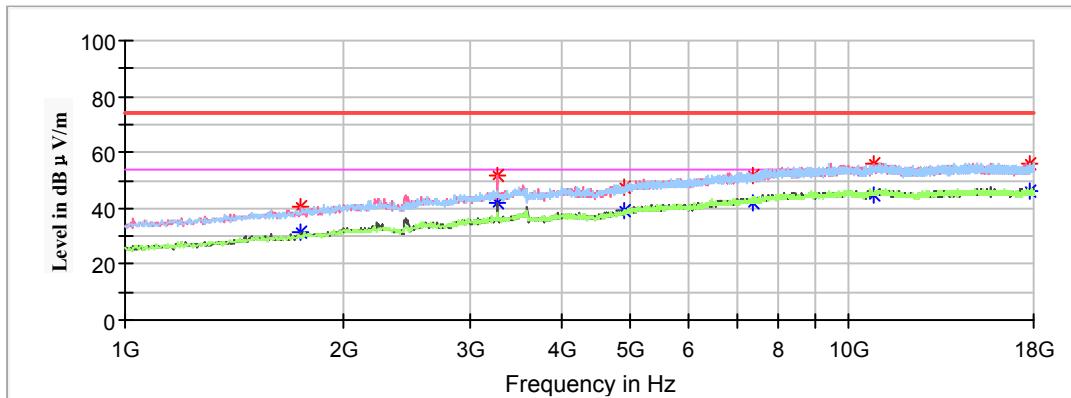
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1496.400000	---	29.31	200.0	V	281.0	-1.3	54.00	24.69
1496.400000	38.71	---	200.0	V	281.0	-1.3	74.00	35.29
3247.400000	---	41.78	150.0	V	298.0	6.6	54.00	12.22
3247.400000	51.21	---	150.0	V	298.0	6.6	74.00	22.79
4874.000000	---	38.91	100.0	V	212.0	11.1	54.00	15.09
4874.000000	47.17	---	100.0	V	212.0	11.1	74.00	26.83
7311.000000	---	42.43	250.0	V	190.0	15.4	54.00	11.57
7311.000000	51.16	---	250.0	V	190.0	15.4	74.00	22.84
11434.600000	---	46.04	100.0	H	43.0	18.4	54.00	7.96
11434.600000	55.19	---	100.0	H	43.0	18.4	74.00	18.81
17646.400000	---	44.95	250.0	H	105.0	18.7	54.00	9.05
17646.400000	56.51	---	250.0	H	105.0	18.7	74.00	17.49

Channel 9: 2452MHz

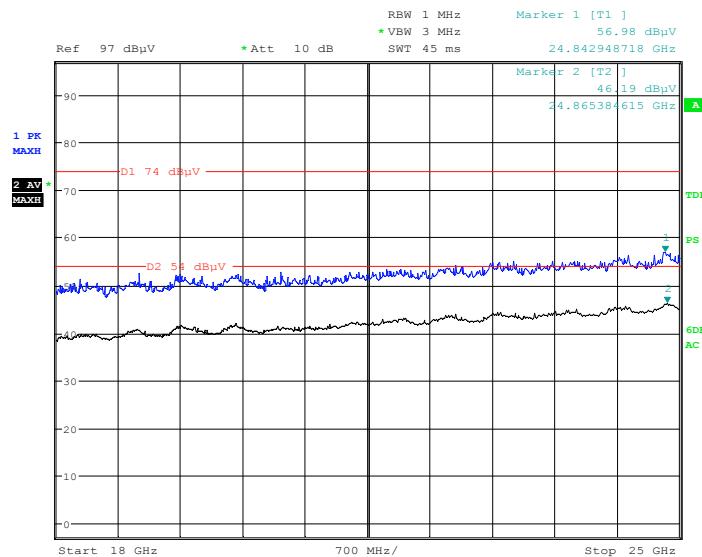
Full Spectrum



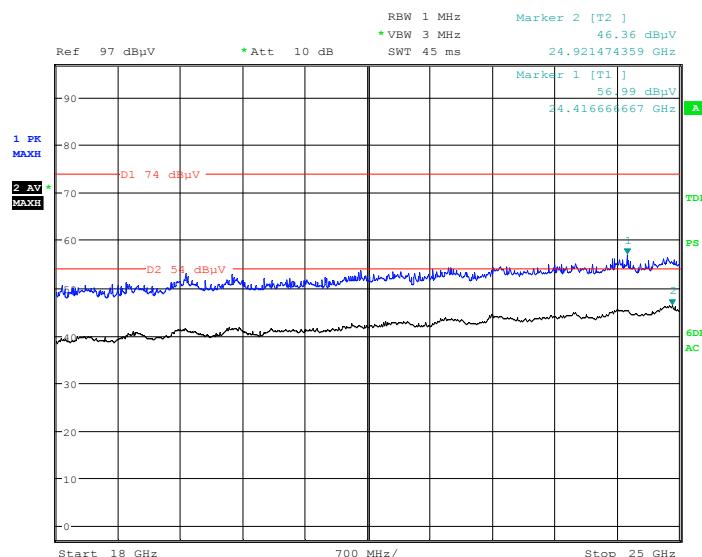
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1751.400000	---	31.43	200.0	V	36.0	0.5	54.00	22.57
1751.400000	40.64	---	200.0	V	36.0	0.5	74.00	33.36
3267.800000	---	42.02	100.0	V	83.0	6.7	54.00	11.98
3267.800000	51.45	---	100.0	V	83.0	6.7	74.00	22.55
4904.000000	---	39.26	100.0	V	293.0	11.2	54.00	14.74
4904.000000	47.72	---	100.0	V	293.0	11.2	74.00	26.28
7356.000000	---	42.18	250.0	V	271.0	15.5	54.00	11.82
7356.000000	51.58	---	250.0	V	271.0	15.5	74.00	22.42
10792.000000	---	44.85	150.0	V	65.0	18.5	54.00	9.15
10792.000000	55.98	---	150.0	V	65.0	18.5	74.00	18.02
17762.000000	---	46.36	200.0	H	240.0	18.9	54.00	7.64
17762.000000	55.65	---	200.0	H	240.0	18.9	74.00	18.35

18GHz-25GHz:

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case channel 3 of 802.11n-HT20 mode in X-axis of orientation was recorded

Horizontal

Date: 8.AUG.2018 09:35:30

Vertical

Date: 8.AUG.2018 09:46:08

Fundamental Test & Restricted Bands Emissions Test:

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)**802.11b Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 1: 2412MHz								
2412.000000	113.35	---	200.0	V	53.0	2.9	/	/
2412.000000	---	106.99	200.0	V	53.0	2.9	/	/
2412.000000	110.87	---	250.0	H	76.0	2.9	/	/
2412.000000	---	104.81	250.0	H	76.0	2.9	/	/
2390.000000	57.44	---	200.0	V	0.0	2.8	74.00	16.56
2390.000000	---	50.18	200.0	V	0.0	2.8	54.00	3.82
Channel 2: 2417MHz								
2417.000000	---	107.53	200.0	V	183.0	2.9	/	/
2417.000000	114.06	---	200.0	V	183.0	2.9	/	/
2417.000000	---	105.11	200.0	H	183.0	2.9	/	/
2417.000000	111.56	---	200.0	H	183.0	2.9	/	/
2390.000000	53.59	---	200.0	V	252.0	2.8	74.00	20.61
2390.000000	---	46.53	200.0	V	252.0	2.8	54.00	7.47
Channel 6: 2437MHz								
2437.000000	113.95	---	200.0	V	328.0	3.0	/	/
2437.000000	---	107.23	200.0	V	328.0	3.0	/	/
2437.000000	111.75	---	200.0	H	332.0	3.0	/	/
2437.000000	---	104.90	200.0	H	332.0	3.0	/	/
Channel 11: 2462MHz								
2462.000000	113.80	---	200.0	V	245.0	3.0	/	/
2462.000000	---	107.17	200.0	V	245.0	3.0	/	/
2462.000000	111.37	---	250.0	H	341.0	3.0	/	/
2462.000000	---	104.58	250.0	H	341.0	3.0	/	/
2483.500000	57.43	---	150.0	V	223.0	3.0	74.00	16.57
2483.500000	---	49.52	150.0	V	223.0	3.0	54.00	4.48

802.11g Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 1: 2412MHz								
2412.000000	103.68	---	200.0	V	154.0	2.9	/	/
2412.000000	---	95.24	200.0	V	154.0	2.9	/	/
2412.000000	101.44	---	200.0	H	12.0	2.9	/	/
2412.000000	---	92.76	200.0	H	12.0	2.9	/	/
2390.000000	56.42	---	200.0	V	108.0	2.8	74.00	17.58
2390.000000	---	49.30	200.0	V	108.0	2.8	54.00	4.70
Channel 2: 2417MHz								
2417.000000	106.45	---	200.0	V	290.0	2.9	/	/
2417.000000	---	97.97	200.0	V	290.0	2.9	/	/
2417.000000	104.02	---	200.0	V	290.0	2.9	/	/
2417.000000	---	95.51	200.0	V	290.0	2.9	/	/
2390.000000	60.95	---	150.0	V	324.0	2.8	74.00	13.05
2390.000000	---	50.07	150.0	V	324.0	2.8	54.00	3.93
Channel 3: 2422MHz								
2422.000000	107.16	---	200.0	V	305.0	2.9	/	/
2422.000000	---	98.96	200.0	V	305.0	2.9	/	/
2422.000000	104.65	---	200.0	V	305.0	2.9	/	/
2422.000000	---	96.43	200.0	V	305.0	2.9	/	/
2390.000000	60.05	---	200.0	V	215.0	2.8	74.00	13.95
2390.000000	---	50.40	200.0	V	215.0	2.8	54.00	3.60
Channel 6: 2437MHz								
2437.000000	107.28	---	200.0	V	180.0	3.0	/	/
2437.000000	---	98.97	200.0	V	180.0	3.0	/	/
2437.000000	104.91	---	200.0	H	53.0	3.0	/	/
2437.000000	---	96.55	200.0	H	53.0	3.0	/	/
Channel 9: 2452MHz								
2452.000000	107.06	---	200.0	V	258.0	3.0	/	/
2452.000000	---	98.56	200.0	V	258.0	3.0	/	/
2452.000000	104.50	---	200.0	V	258.0	3.0	/	/
2452.000000	---	96.03	200.0	V	258.0	3.0	/	/
2483.500000	57.89	---	150.0	V	0.0	3.0	74.00	16.11
2483.500000	---	48.64	150.0	V	0.0	3.0	54.00	5.36

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 10: 2457MHz								
2457.000000	106.21	---	200.0	V	266.0	3.0	/	/
2457.000000	---	97.53	200.0	V	266.0	3.0	/	/
2457.000000	103.69	---	200.0	V	266.0	3.0	/	/
2457.000000	---	95.04	200.0	V	266.0	3.0	/	/
2483.500000	58.07	---	200.0	V	206.0	3.0	74.00	15.93
2483.500000	---	50.43	200.0	V	206.0	3.0	54.00	3.57
Channel 11: 2462MHz								
2462.000000	104.84	---	250.0	V	84.0	3.0	/	/
2462.000000	---	96.46	250.0	V	84.0	3.0	/	/
2462.000000	102.63	---	150.0	H	295.0	3.0	/	/
2462.000000	---	94.12	150.0	H	295.0	3.0	/	/
2483.500000	58.96	---	150.0	V	54.0	3.0	74.00	15.04
2483.500000	---	49.75	150.0	V	54.0	3.0	54.00	4.25

802.11n-HT20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 1: 2412MHz								
2412.000000	102.80	---	250.0	V	86.0	2.9	/	/
2412.000000	---	94.71	250.0	V	86.0	2.9	/	/
2412.000000	100.31	---	250.0	H	7.0	2.9	/	/
2412.000000	---	92.18	250.0	H	7.0	2.9	/	/
2390.000000	58.55	---	200.0	V	235.0	2.8	74.00	15.45
2390.000000	---	50.36	200.0	V	235.0	2.8	54.00	3.64
Channel 2: 2417MHz								
2417.000000	106.87	---	200.0	V	298.0	2.9	/	/
2417.000000	---	97.99	200.0	V	298.0	2.9	/	/
2417.000000	104.42	---	200.0	H	298.0	2.9	/	/
2417.000000	---	95.49	200.0	H	298.0	2.9	/	/
2390.000000	---	50.83	200.0	V	139.0	2.8	54.00	3.17
2390.000000	60.33	---	200.0	V	139.0	2.8	74.00	13.67

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 3: 2422MHz								
2422.000000	107.58	---	200.0	V	285.0	2.9	/	/
2422.000000	---	98.78	200.0	V	285.0	2.9	/	/
2422.000000	105.07	---	200.0	H	285.0	2.9	/	/
2422.000000	---	96.30	200.0	H	285.0	2.9	/	/
2390.000000	---	50.51	200.0	V	232.0	2.8	54.00	3.49
2390.000000	60.93	---	200.0	V	272.0	2.8	74.00	13.07
Channel 6: 2437MHz								
2437.000000	107.39	---	200.0	V	342.0	3.0	/	/
2437.000000	---	98.61	200.0	V	342.0	3.0	/	/
2437.000000	105.08	---	150.0	H	43.0	3.0	/	/
2437.000000	---	96.11	150.0	H	43.0	3.0	/	/
Channel 9: 2452MHz								
2452.000000	107.33	---	200.0	V	275.0	3.0	/	/
2452.000000	---	98.58	200.0	V	275.0	3.0	/	/
2452.000000	104.81	---	200.0	H	275.0	3.0	/	/
2452.000000	---	96.03	200.0	H	275.0	3.0	/	/
2483.500000	---	49.04	150.0	V	294.0	3.0	54.00	4.96
2483.500000	58.89	---	150.0	V	294.0	3.0	74.00	15.11
Channel 10: 2457MHz								
2457.000000	---	97.82	200.0	V	299.0	3.0	/	/
2457.000000	106.50	---	200.0	V	299.0	3.0	/	/
2457.000000	---	95.30	200.0	H	299.0	3.0	/	/
2457.000000	104.01	---	200.0	H	299.0	3.0	/	/
2483.500000	57.23	---	200.0	V	325.0	3.0	74.00	16.77
2483.500000	---	48.90	200.0	V	325.0	3.0	54.00	5.10
Channel 11: 2462MHz								
2462.000000	103.86	---	150.0	V	86.0	3.0	/	/
2462.000000	---	94.96	150.0	V	86.0	3.0	/	/
2462.000000	101.34	---	250.0	H	112.0	3.0	/	/
2462.000000	---	92.54	250.0	H	112.0	3.0	/	/
2483.500000	58.33	---	250.0	V	49.0	3.0	74.00	15.67
2483.500000	---	50.18	250.0	V	49.0	3.0	54.00	3.82

802.11n-HT40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 3: 2422MHz								
2422.000000	97.44	---	150.0	V	245.0	2.9	/	/
2422.000000	---	89.49	150.0	V	245.0	2.9	/	/
2422.000000	95.22	---	200.0	H	265.0	2.9	/	/
2422.000000	---	87.15	200.0	H	265.0	2.9	/	/
2390.000000	58.52	---	250.0	V	258.0	2.8	74.00	15.48
2390.000000	---	50.43	250.0	V	258.0	2.8	54.00	3.57
Channel 4: 2427MHz								
2427.000000	---	92.13	200.0	V	294.0	2.9	/	/
2427.000000	100.18	---	200.0	V	294.0	2.9	/	/
2427.000000	---	87.70	250.0	H	294.0	2.9	/	/
2427.000000	97.67	---	250.0	H	294.0	2.9	/	/
2390.000000	56.71	---	200.0	V	248.0	2.8	74.00	17.29
2390.000000	---	49.12	200.0	V	237.0	2.8	54.00	4.88
Channel 5: 2432MHz								
2432.000000	---	92.79	200.0	V	298.0	3.0	/	/
2432.000000	101.04	---	200.0	V	298.0	3.0	/	/
2432.000000	---	90.37	150.0	H	298.0	3.0	/	/
2432.000000	98.59	---	150.0	H	298.0	3.0	/	/
2390.000000	58.76	---	200.0	V	231.0	2.8	74.00	15.24
2390.000000	---	50.88	200.0	V	231.0	2.8	54.00	3.12
Channel 6: 2437MHz								
2437.000000	100.99	---	250.0	V	113.0	3.0	/	/
2437.000000	---	93.04	250.0	V	113.0	3.0	/	/
2437.000000	98.76	---	150.0	H	210.0	3.0	/	/
2437.000000	---	90.76	150.0	H	210.0	3.0	/	/
Channel 7: 2442MHz								
2442.000000	---	91.45	250.0	V	241.0	3.0	/	/
2442.000000	100.22	---	250.0	V	241.0	3.0	/	/
2442.000000	---	88.99	250.0	H	241.0	3.0	/	/
2442.000000	97.71	---	250.0	H	241.0	3.0	/	/
2483.500000	58.81	---	150.0	V	236.0	3.0	74.00	15.19
2483.500000	---	50.56	150.0	V	236.0	3.0	54.00	3.44

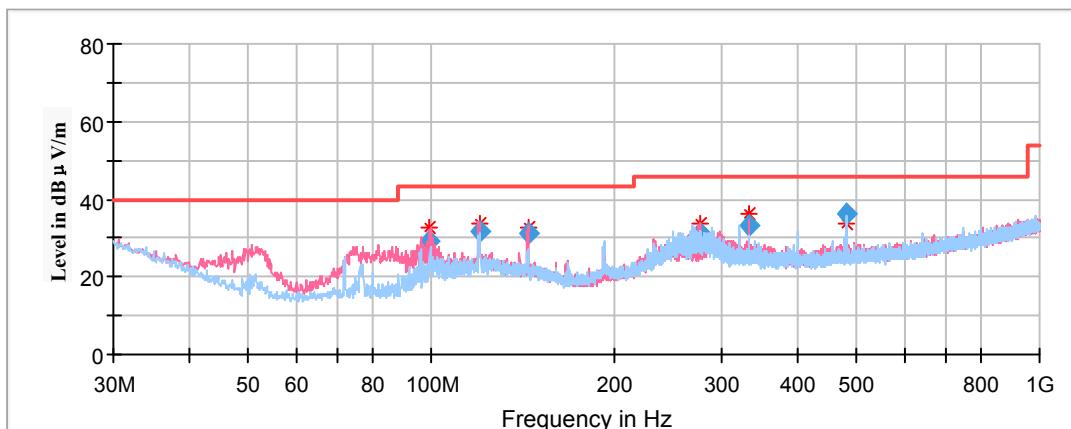
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 8: 2447MHz								
2447.000000	---	90.36	250.0	V	264.0	3.0	/	/
2447.000000	98.56	---	250.0	V	264.0	3.0	/	/
2447.000000	---	87.96	250.0	H	264.0	3.0	/	/
2447.000000	96.17	---	250.0	H	264.0	3.0	/	/
2483.500000	---	50.06	150.0	V	106.0	3.0	54.00	3.94
2483.500000	56.81	---	150.0	V	106.0	3.0	74.00	17.19
Channel 9: 2452MHz								
2452.000000	95.28	---	250.0	V	36.0	3.0	/	/
2452.000000	---	87.53	250.0	V	36.0	3.0	/	/
2452.000000	93.07	---	200.0	H	38.0	3.0	/	/
2452.000000	---	85.28	200.0	H	38.0	3.0	/	/
2483.500000	57.56	---	150.0	V	153.0	3.0	74.00	16.44
2483.500000	---	50.42	150.0	V	153.0	3.0	54.00	3.58

For BLE Mode:

Spurious Emission Test:

30MHz-1GHz

(Pre-scan with low, middle and high channels of operation in the X, Y and Z axes of orientation, the worst case channel 19 of operation in the X axis of orientation was recorded)

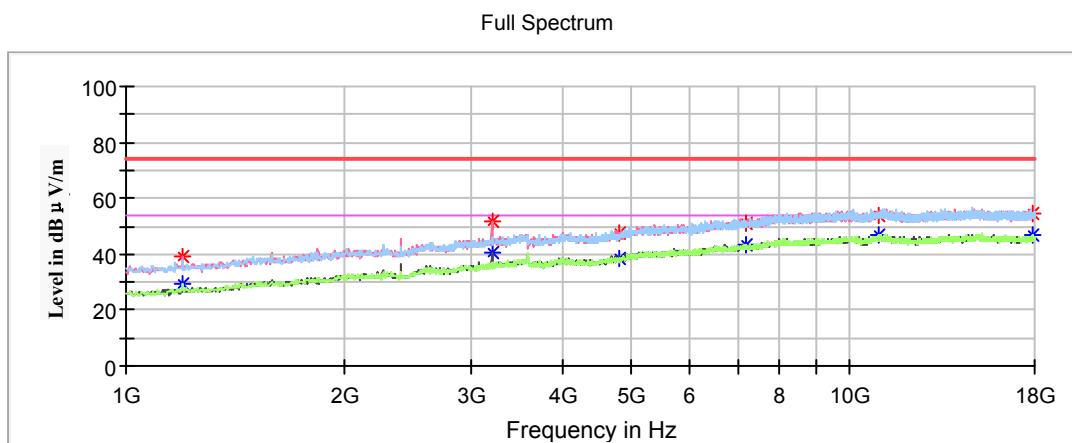


Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dB μ V/m)	Height (cm)	Polar (H/V)				
99.557400	29.23	101.0	V	304.0	-15.0	43.50	14.27
119.827900	31.63	101.0	V	120.0	-11.2	43.50	11.87
144.395450	31.12	101.0	V	359.0	-12.1	43.50	12.38
276.549850	31.21	199.0	V	179.0	-11.2	46.00	14.79
331.954850	33.05	199.0	V	355.0	-9.8	46.00	12.95
480.003500	36.06	199.0	H	133.0	-6.7	46.00	9.94

1GHz-18GHz(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

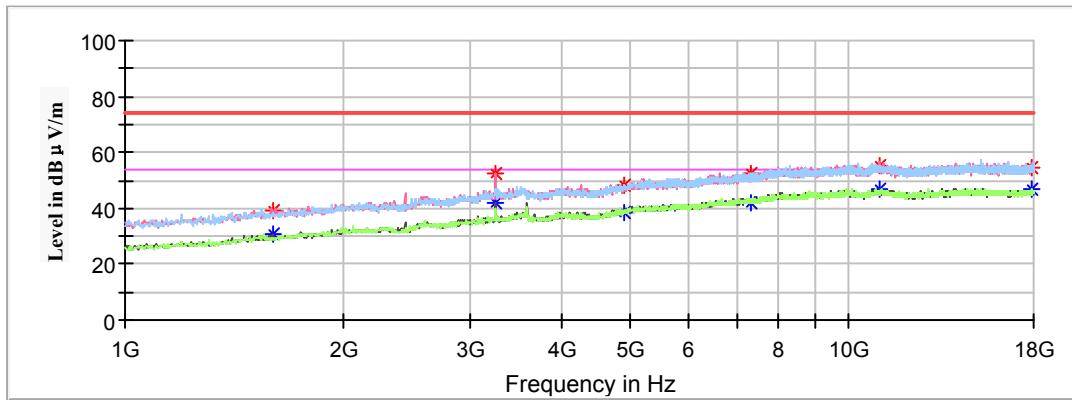
1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Channel 0: 2402MHz

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1197.200000	---	29.14	100.0	V	103.0	-3.0	54.00	24.86
1197.200000	38.82	---	100.0	V	103.0	-3.0	74.00	35.18
3199.800000	---	40.49	150.0	V	284.0	6.5	54.00	13.51
3199.800000	51.64	---	150.0	V	284.0	6.5	74.00	22.36
4804.000000	---	38.55	250.0	V	307.0	10.8	54.00	15.45
4804.000000	47.51	---	250.0	V	307.0	10.8	74.00	26.49
7206.000000	51.10	---	150.0	V	185.0	15.2	74.00	22.90
7206.000000	---	43.13	150.0	V	185.0	15.2	54.00	10.87
10968.800000	54.11	---	200.0	H	65.0	19.0	74.00	19.89
10968.800000	---	47.04	200.0	H	65.0	19.0	54.00	6.96
17833.400000	54.52	---	100.0	V	98.0	19.0	74.00	19.48
17833.400000	---	46.51	100.0	V	98.0	19.0	54.00	7.49

Channel 19: 2440MHz

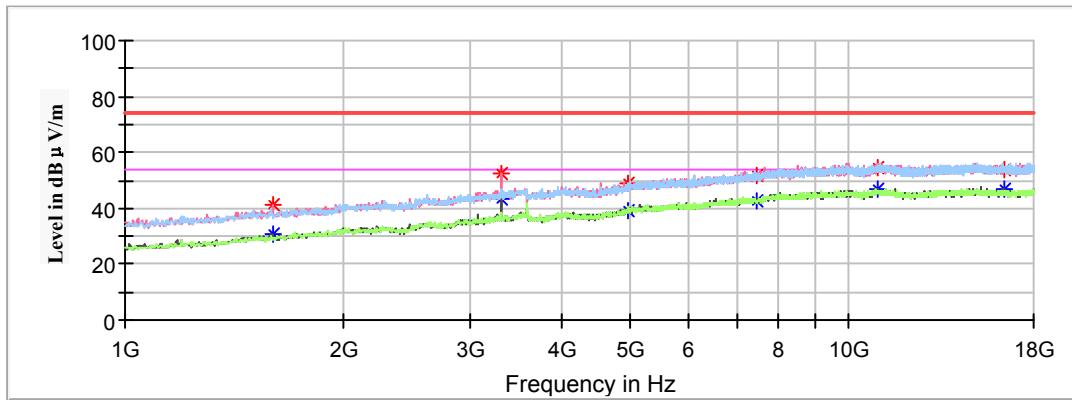
Full Spectrum



Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1598.400000	39.38	---	200.0	V	313.0	-0.6	74.00	34.62
1598.400000	---	31.04	200.0	V	313.0	-0.6	54.00	22.96
3250.800000	53.14	---	100.0	V	157.0	6.6	74.00	20.86
3250.800000	---	49.60	100.0	V	157.0	6.6	54.00	4.40
4880.000000	48.44	---	100.0	V	332.0	11.1	74.00	25.56
4880.000000	---	38.68	100.0	V	332.0	11.1	54.00	15.32
7320.000000	52.61	---	200.0	V	226.0	15.4	74.00	21.39
7320.000000	---	42.24	200.0	V	226.0	15.4	54.00	11.76
11033.400000	55.04	---	150.0	H	33.0	19.0	74.00	18.96
11033.400000	---	46.67	150.0	H	33.0	19.0	54.00	7.33
17935.400000	54.23	---	250.0	H	282.0	19.1	74.00	19.77
17935.400000	---	46.76	250.0	H	282.0	19.1	54.00	7.24

Channel 39: 2480MHz

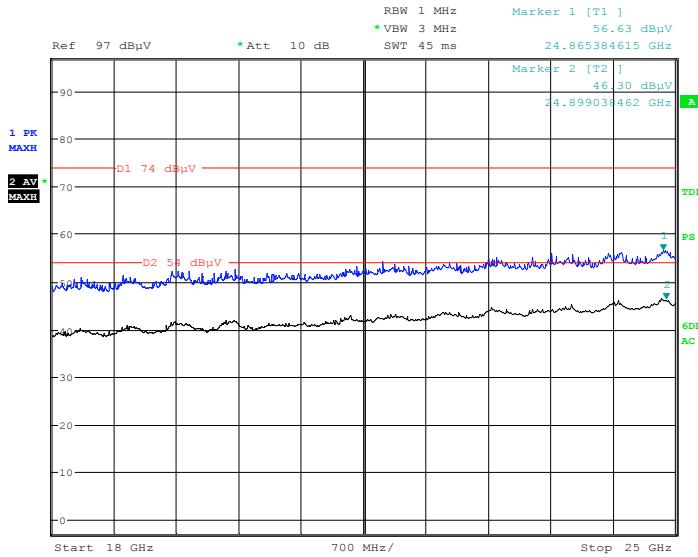
Full Spectrum



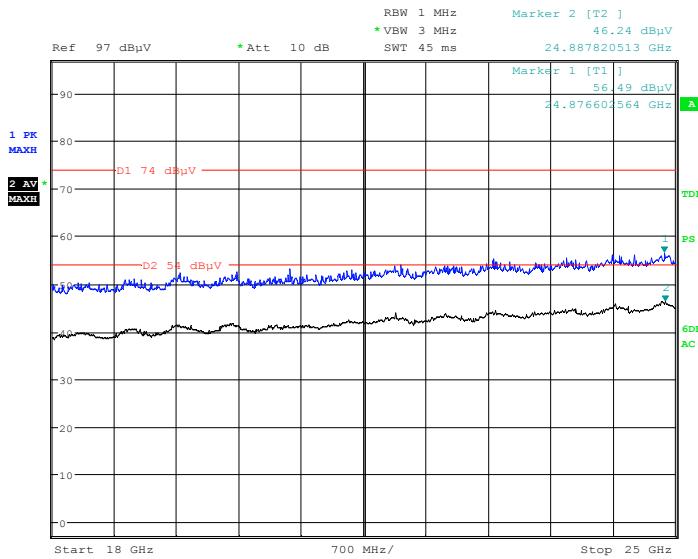
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1598.400000	41.11	---	200.0	V	41.0	-0.6	74.00	32.89
1598.400000	---	30.59	200.0	V	41.0	-0.6	54.00	23.41
3305.200000	53.33	---	100.0	V	342.0	6.8	74.00	20.67
3305.200000	---	49.82	100.0	V	342.0	6.8	54.00	4.18
4960.000000	48.61	---	200.0	V	288.0	11.5	74.00	25.39
4960.000000	---	39.07	200.0	V	288.0	11.5	54.00	14.93
7440.000000	51.52	---	200.0	V	345.0	15.6	74.00	22.48
7440.000000	---	42.58	200.0	V	345.0	15.6	54.00	11.42
10934.800000	54.69	---	150.0	V	73.0	18.9	74.00	19.31
10934.800000	---	47.10	150.0	V	73.0	18.9	54.00	6.90
16449.600000	54.17	---	200.0	H	117.0	18.1	74.00	19.83
16449.600000	---	46.87	200.0	H	117.0	18.1	54.00	7.13

18GHz - 25GHz

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case channel 19 of operation in the X axis of orientation was recorded)

Horizontal Plot

Date: 8.AUG.2018 10:16:58

Vertical Plot

Date: 8.AUG.2018 10:27:44

Fundamental Test & Restricted Bands Emissions Test:

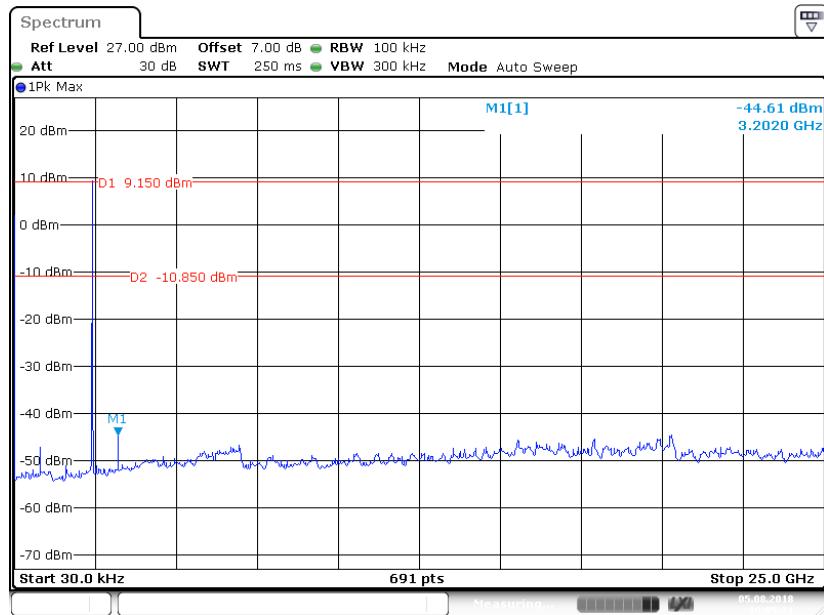
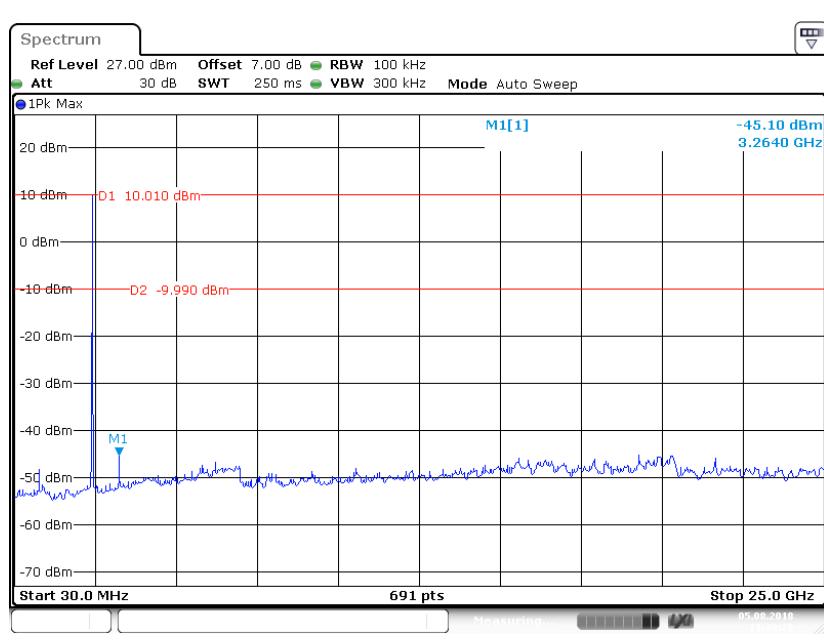
(Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

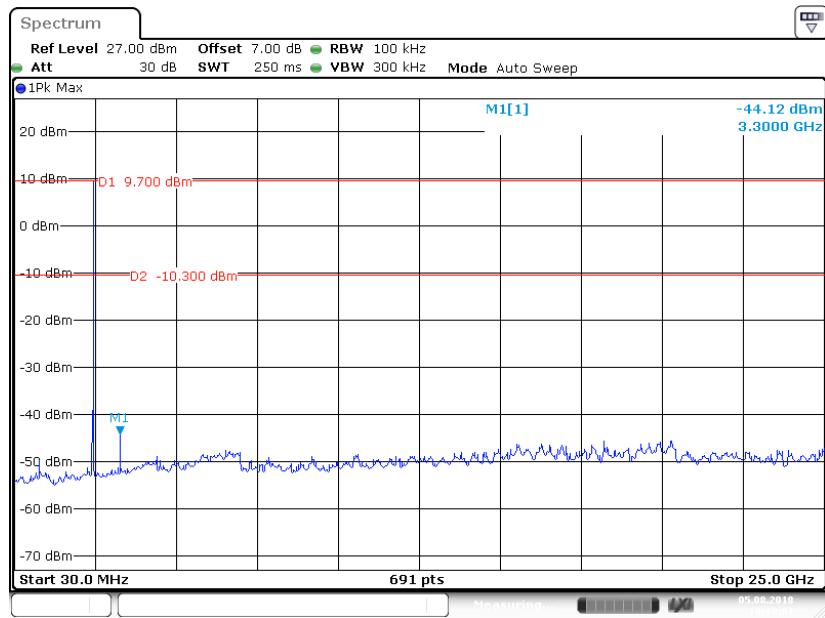
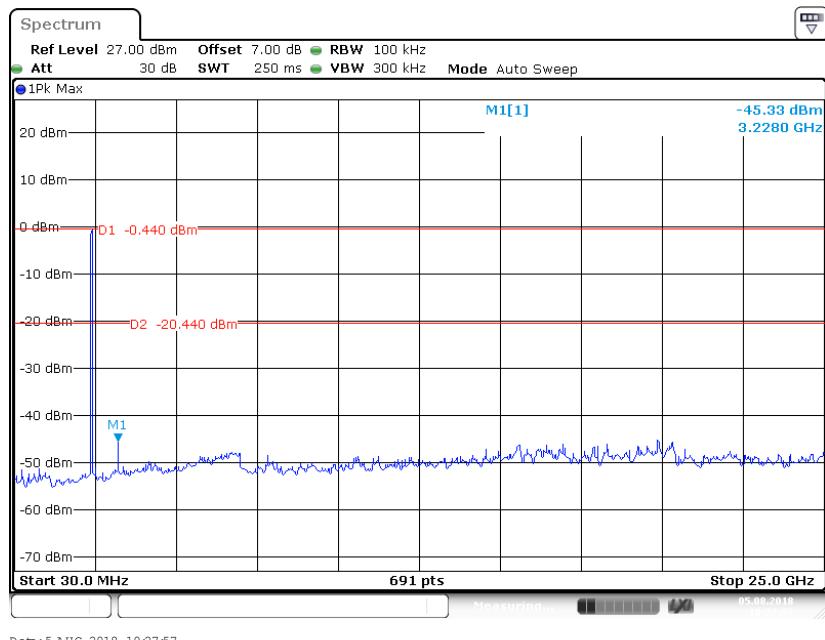
Note:

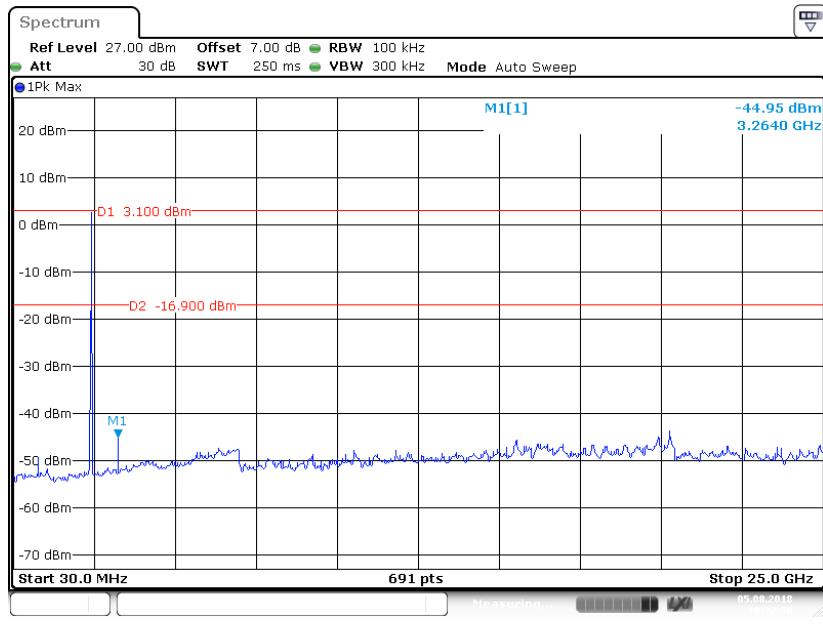
1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

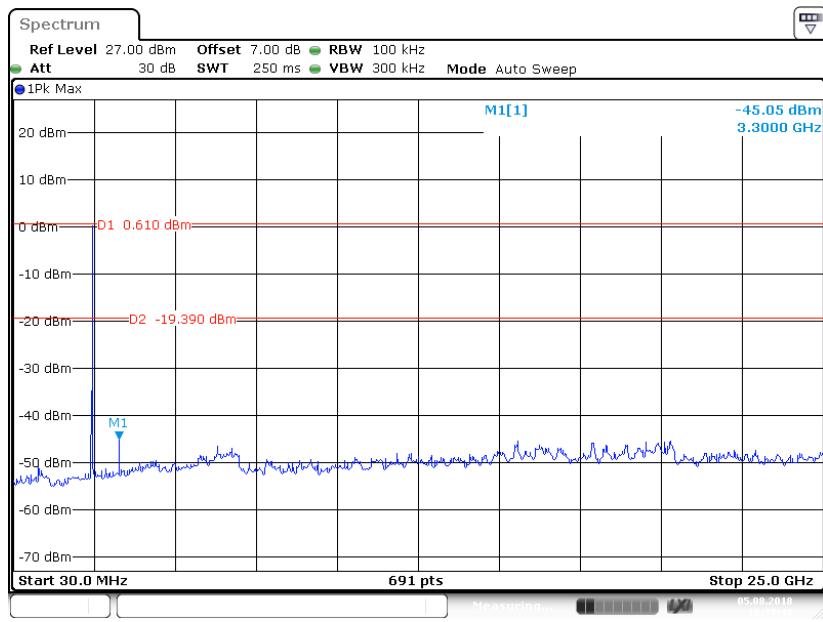
Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turtable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
Channel 0: 2402MHz								
2402.000000	95.69	---	200.0	V	258.0	2.9	/	/
2402.000000	---	95.07	200.0	V	258.0	2.9	/	/
2402.000000	93.61	---	150.0	H	305.0	2.9	/	/
2402.000000	---	92.95	150.0	H	305.0	2.9	/	/
2390.000000	53.20	---	200.0	V	307.0	2.8	74.00	20.80
2390.000000	---	47.01	200.0	V	307.0	2.8	54.00	6.99
Channel 19: 2440MHz								
2440.000000	95.75	---	250.0	V	113.0	3.0	/	/
2440.000000	---	94.98	250.0	V	113.0	3.0	/	/
2440.000000	93.76	---	150.0	H	210.0	3.0	/	/
2440.000000	---	92.96	150.0	H	210.0	3.0	/	/
Channel 39: 2480MHz								
2480.000000	95.53	---	200.0	V	284.0	3.0	/	/
2480.000000	---	94.82	200.0	V	284.0	3.0	/	/
2480.000000	93.45	---	150.0	H	273.0	3.0	/	/
2480.000000	---	92.94	150.0	H	273.0	3.0	/	/
2483.500000	53.45	---	200.0	V	206.0	3.0	74.00	20.55
2483.500000	---	47.19	200.0	V	206.0	3.0	54.00	6.81

Conducted Spurious Emissions at Antenna Port**802.11b Mode Channel 1: 2412MHz****802.11b Mode Channel 6: 2437MHz**

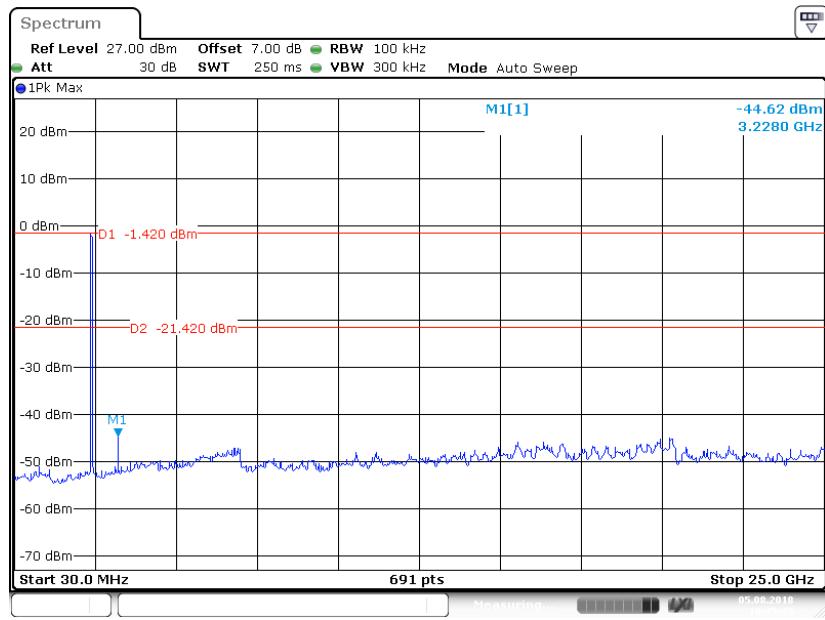
802.11b Mode Channel 11: 2462MHz**802.11g Mode Channel 1: 2412MHz**

802.11g Mode Channel 6: 2437MHz

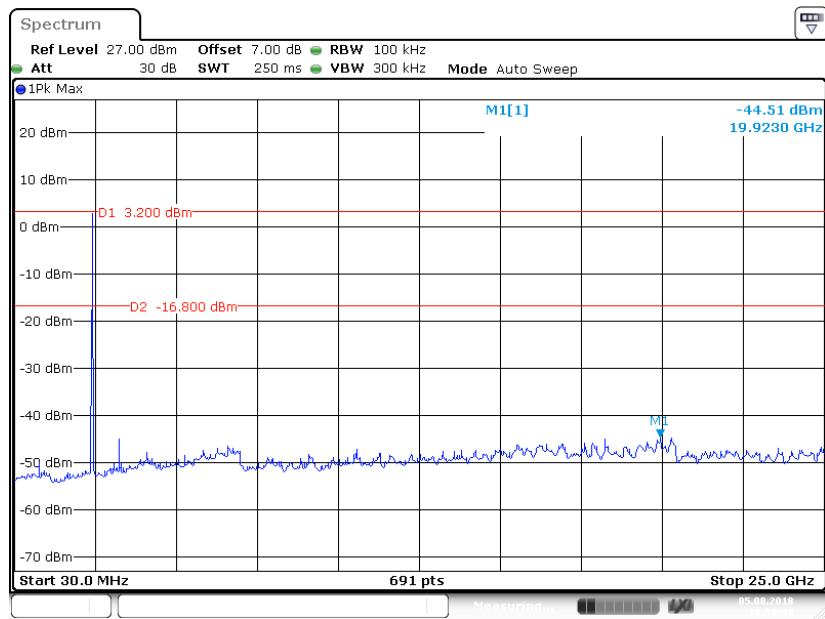
Date: 5 AUG 2018 10:32:50

802.11g Mode Channel 11: 2462MHz

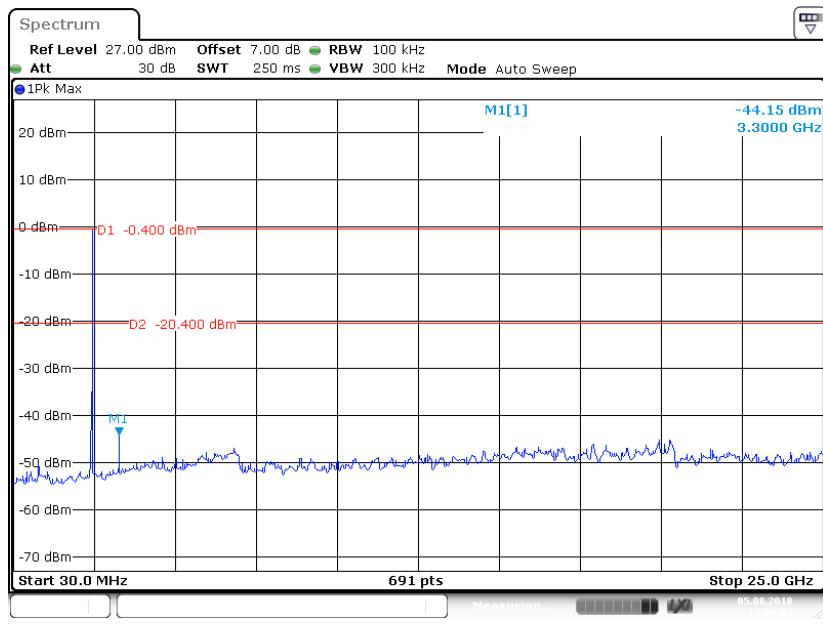
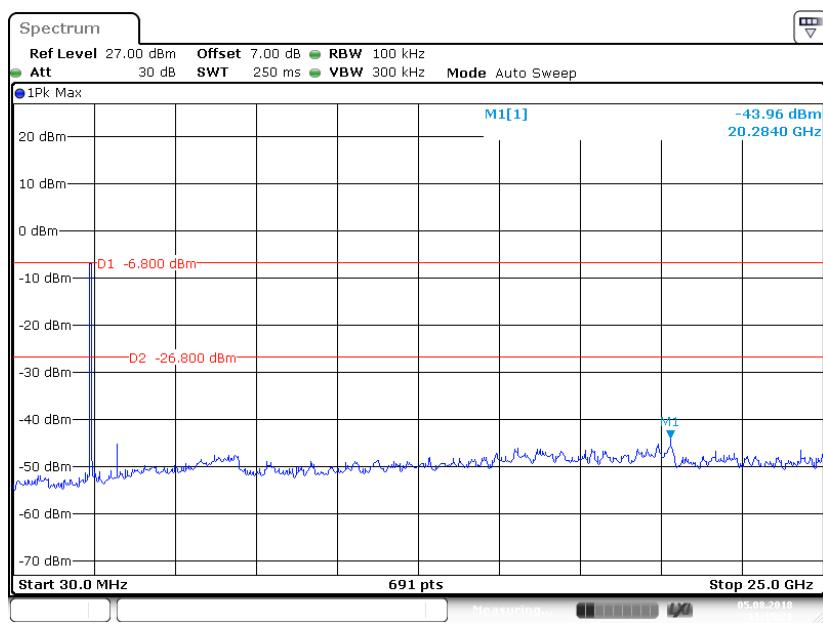
Date: 5 AUG 2018 10:39:41

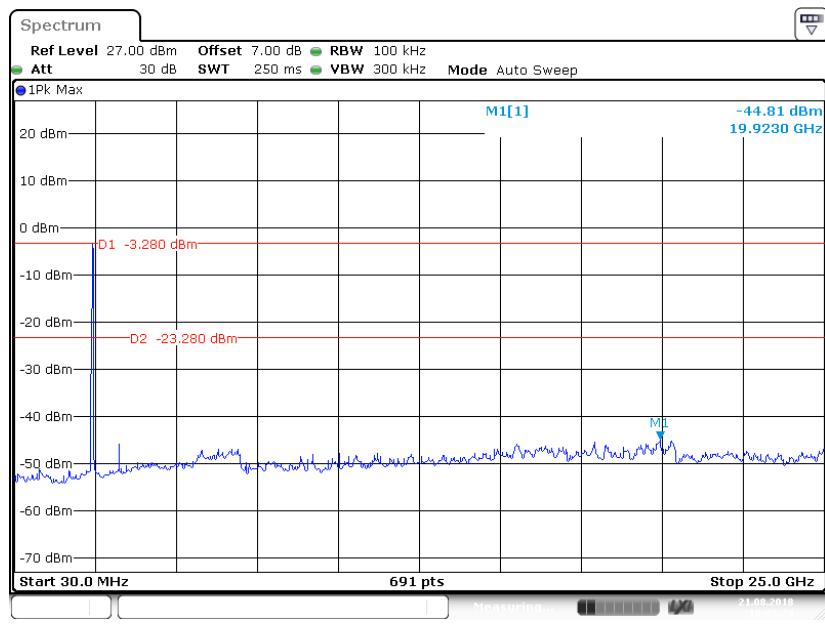
802.11n-HT20 Mode Channel 1: 2412MHz

Date: 5 AUG 2018 10:45:45

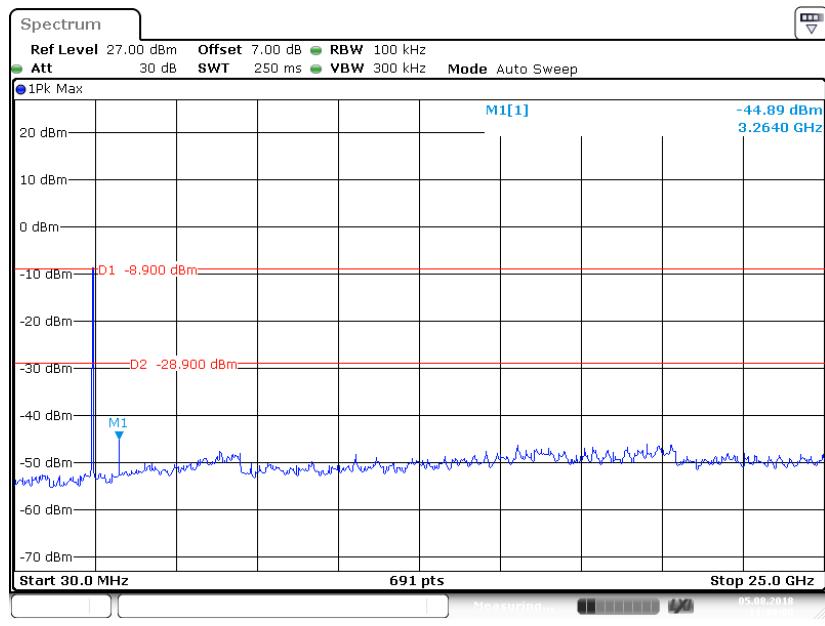
802.11n-HT20 Mode Channel 6: 2437MHz

Date: 5 AUG 2018 10:58:50

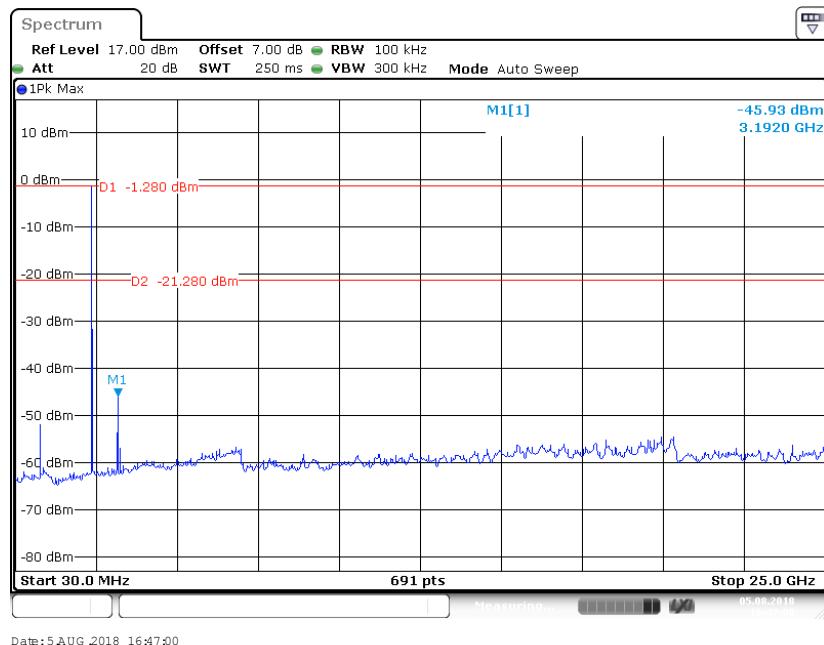
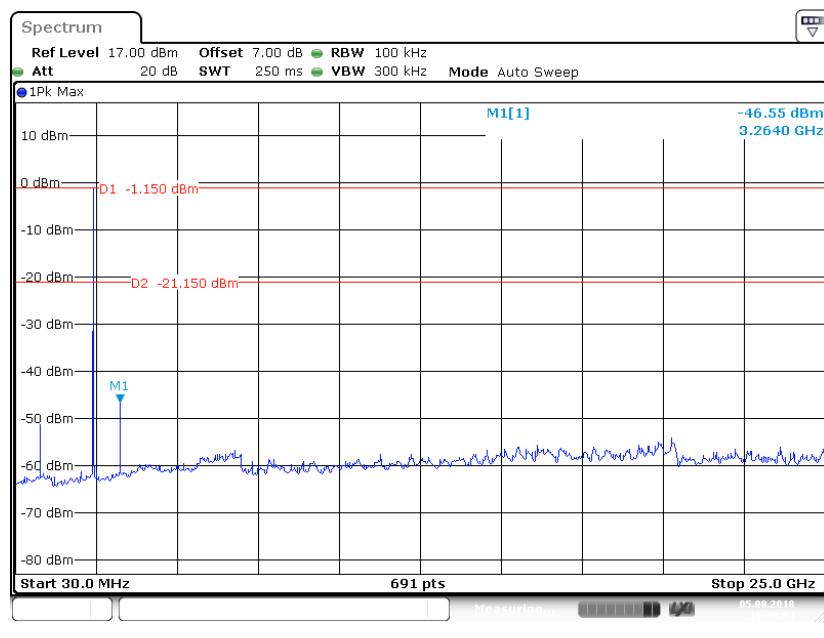
802.11n-HT20 Mode Channel 11: 2462MHz**802.11n-HT40 Mode Channel 3: 2422MHz**

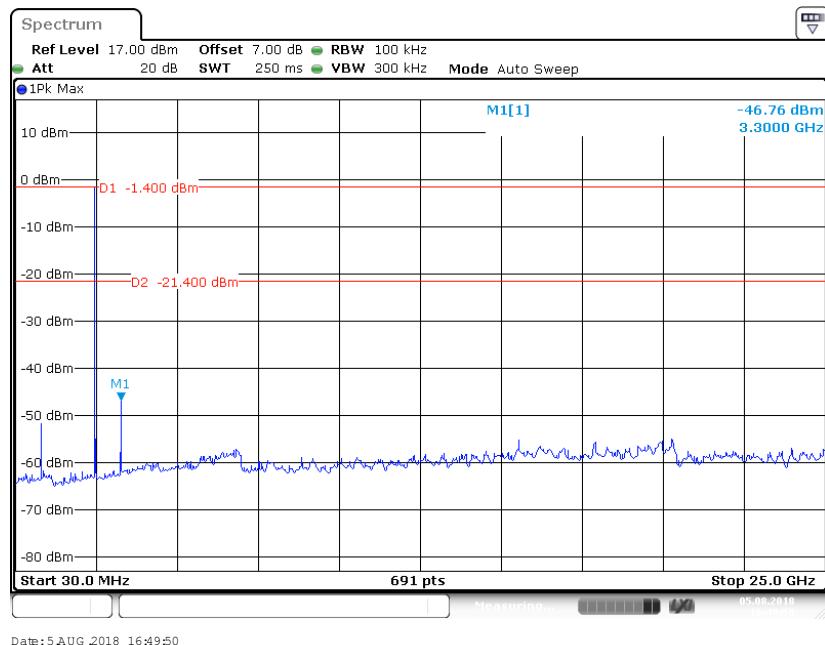
802.11n-HT40 Mode Channel 6: 2437MHz

Date: 21 AUG 2018 18:03:24

802.11n-HT40 Mode Channel 9: 2452MHz

Date: 5 AUG 2018 11:30:00

BLE Mode Channel 0: 2402MHz**BLE Mode Channel 19: 2440MHz**

BLE Mode Channel 39: 2480MHz

Date: 5 AUG 2018 16:49:50

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

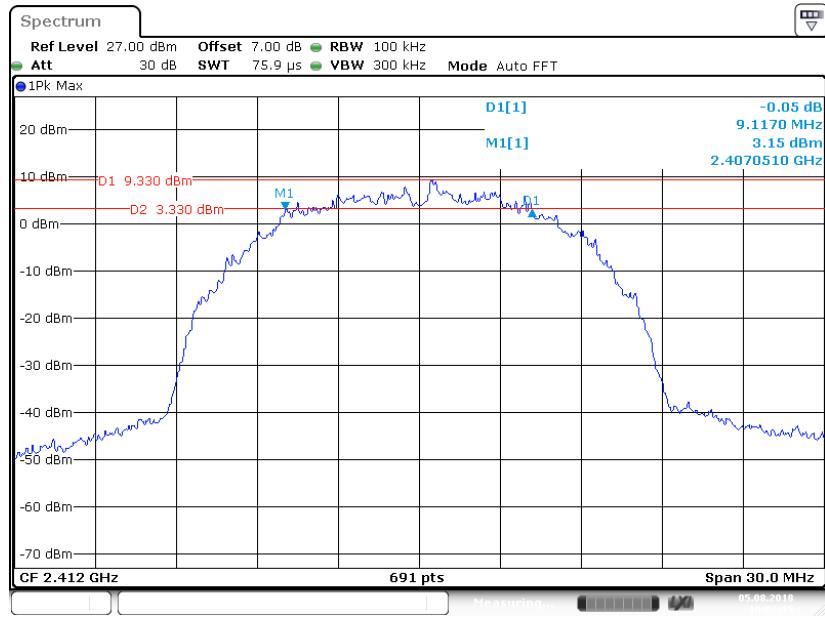
Temperature:	24 °C
Relative Humidity:	51 %
ATM Pressure:	101.3 kPa

The testing was performed by Max Min on 2018-08-05 & 2018-08-21.

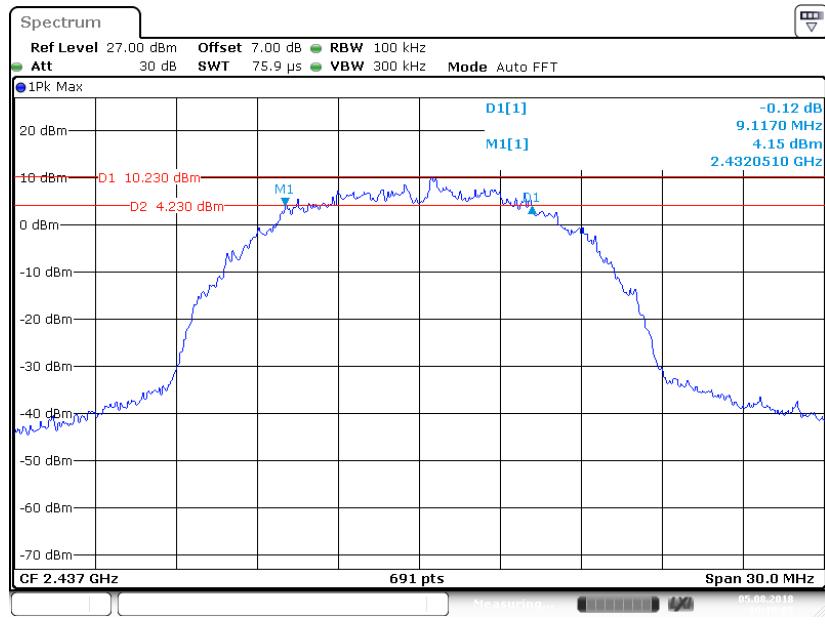
EUT operation mode: Transmitting

Test Result: Pass

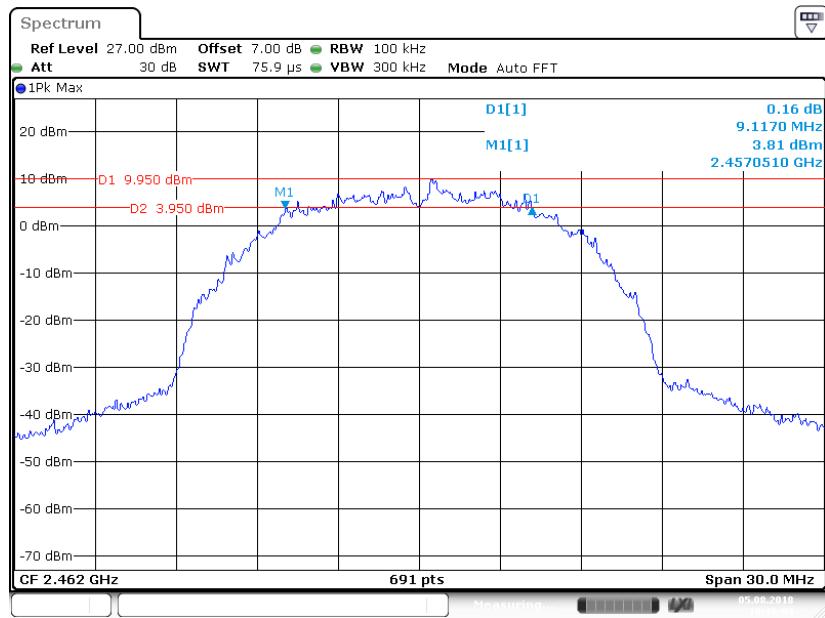
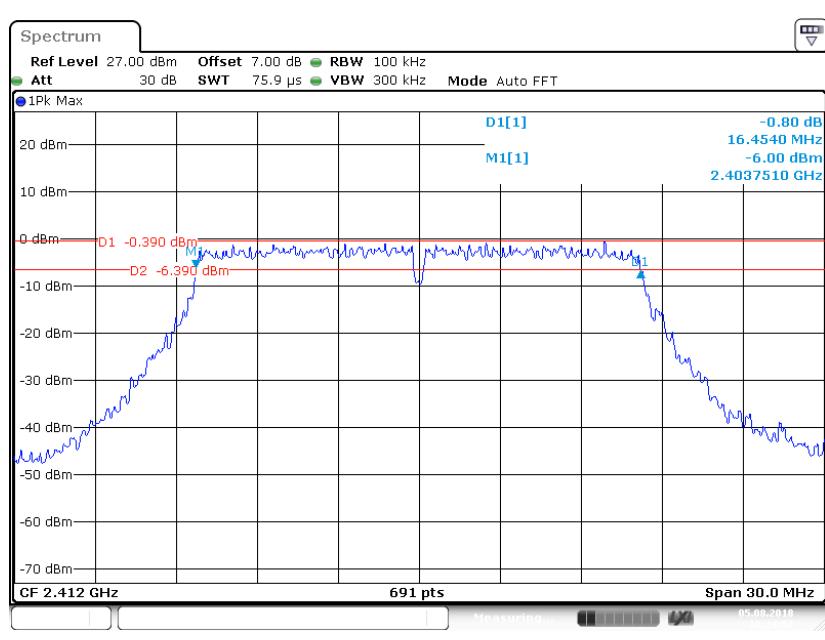
Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
1	2412	9.117	≥ 0.5
6	2437	9.117	≥ 0.5
11	2462	9.117	≥ 0.5
802.11g Mode			
1	2412	16.454	≥ 0.5
6	2437	16.454	≥ 0.5
11	2462	16.454	≥ 0.5
802.11n-HT20 Mode			
1	2412	17.583	≥ 0.5
6	2437	17.583	≥ 0.5
11	2462	17.583	≥ 0.5
802.11n-HT40 Mode			
3	2422	36.469	≥ 0.5
6	2437	36.469	≥ 0.5
9	2452	36.469	≥ 0.5
BLE Mode			
0	2402	0.647	≥ 0.5
19	2440	0.647	≥ 0.5
39	2480	0.647	≥ 0.5

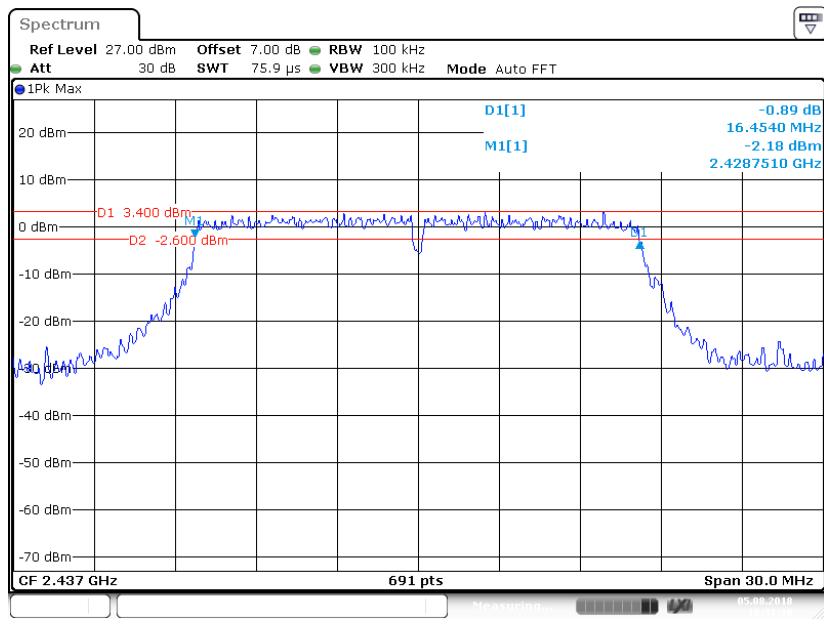
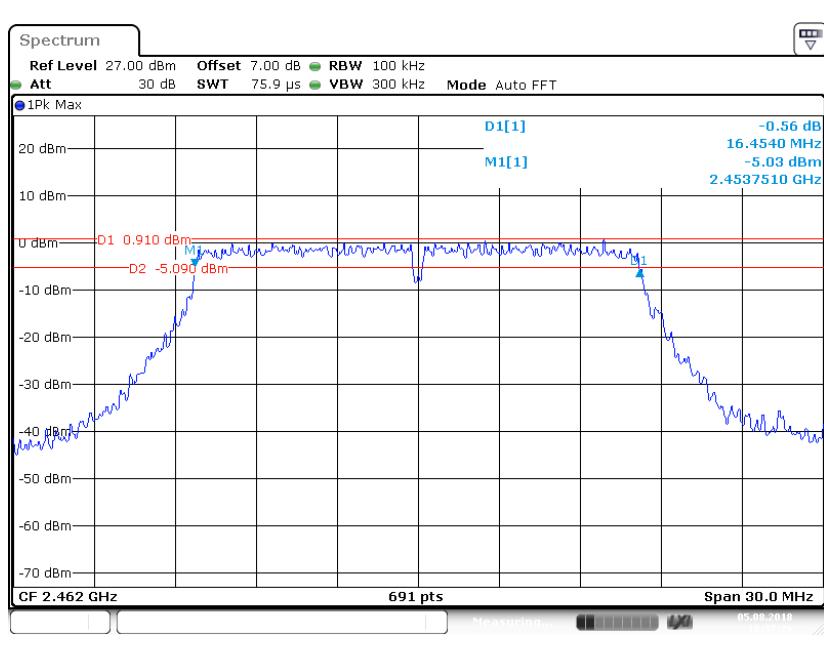
802.11b Mode Channel 1: 2412MHz

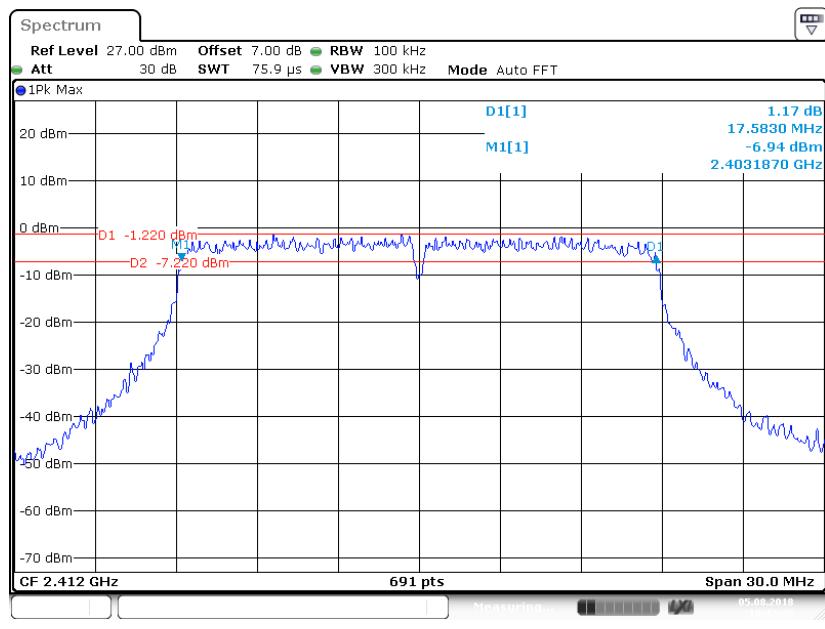
Date: 5 AUG 2018 10:02:16

802.11b Mode Channel 6: 2437MHz

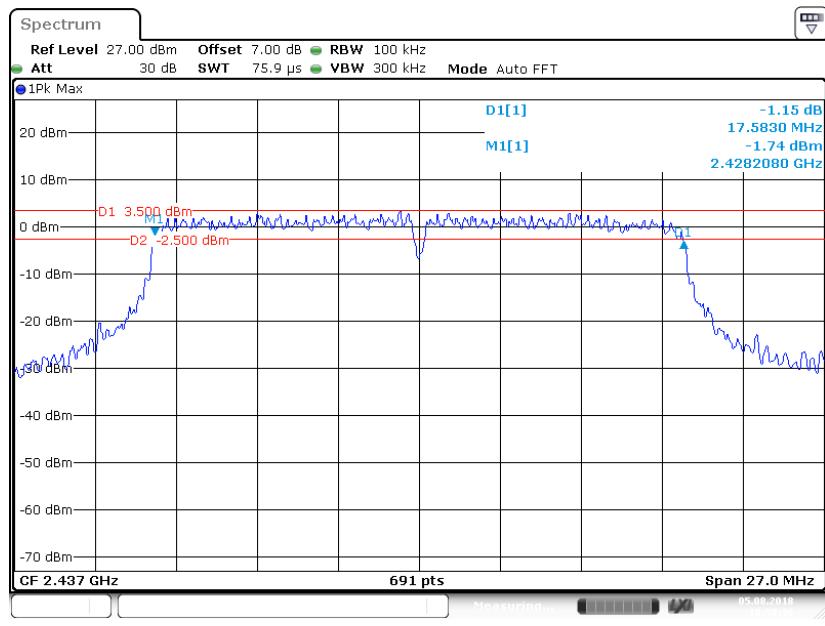
Date: 5 AUG 2018 10:10:06

802.11b Mode Channel 11: 2462MHz**802.11g Mode Channel 1: 2412MHz**

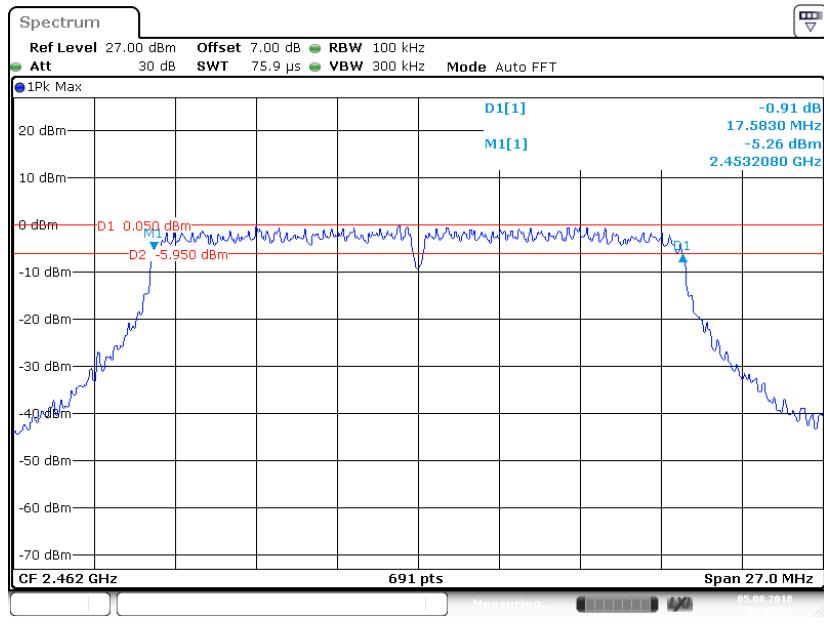
802.11g Mode Channel 6: 2437MHz**802.11g Mode Channel 11: 2462MHz**

802.11n-HT20 Mode Channel 1: 2412MHz

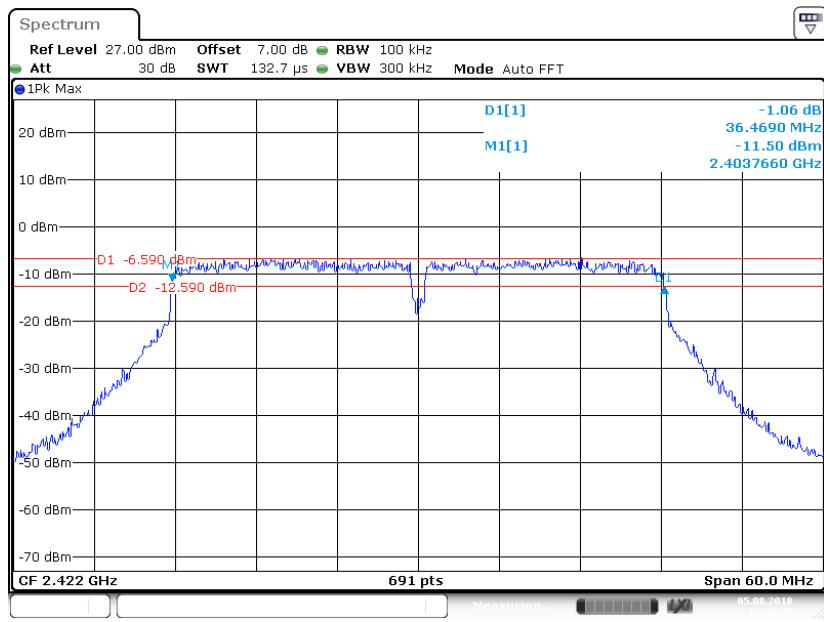
Date: 5 AUG 2018 10:42:45

802.11n-HT20 Mode Channel 6: 2437MHz

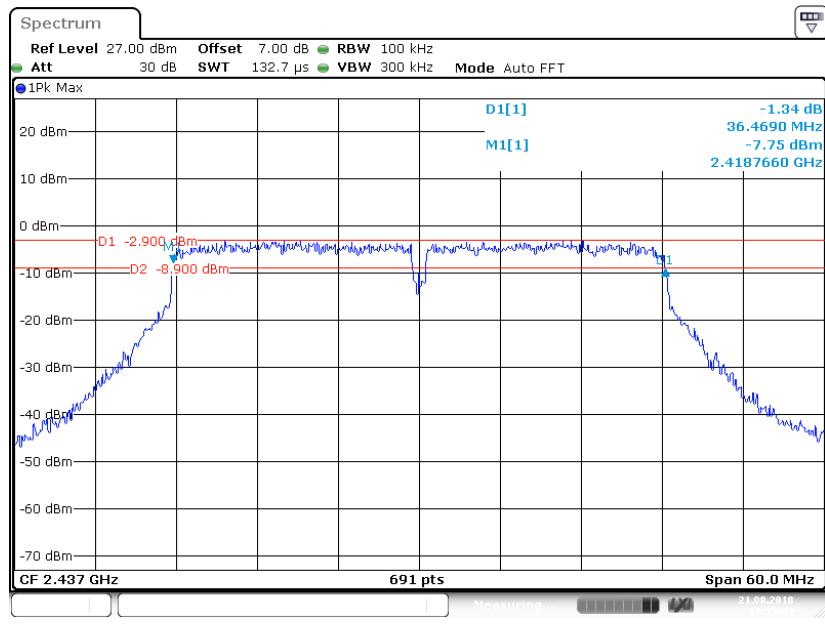
Date: 5 AUG 2018 10:50:36

802.11n-HT20 Mode Channel 11: 2462MHz

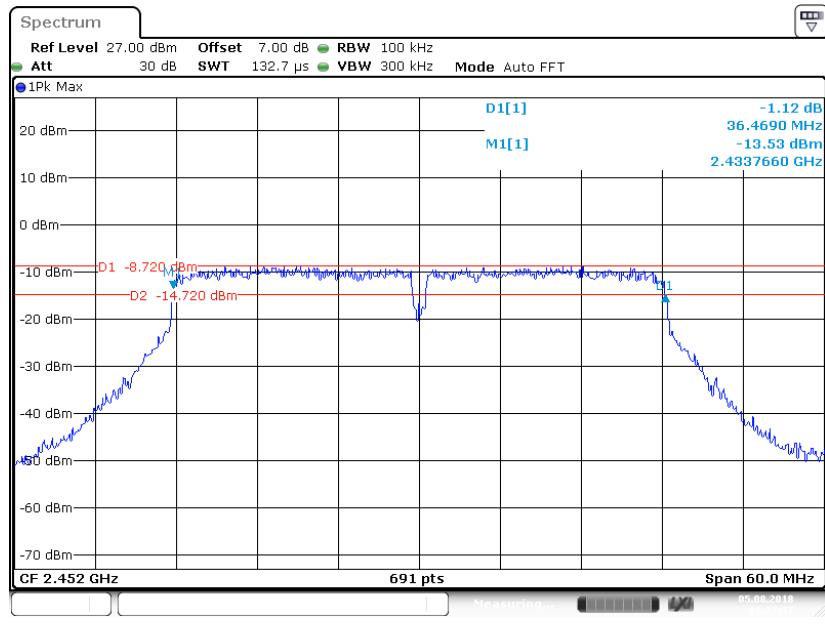
Date: 5 AUG 2018 11:05:12

802.11n-HT40 Mode Channel 3: 2422MHz

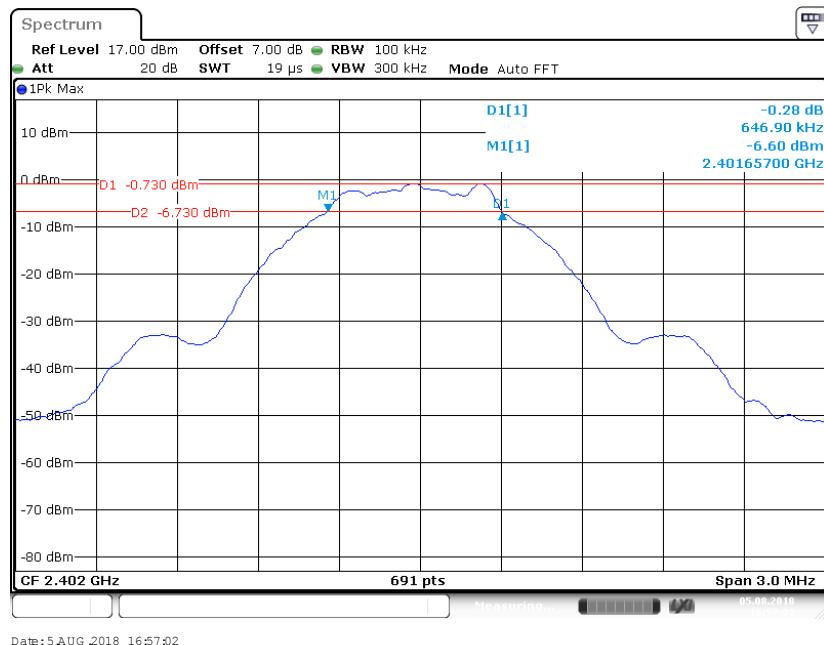
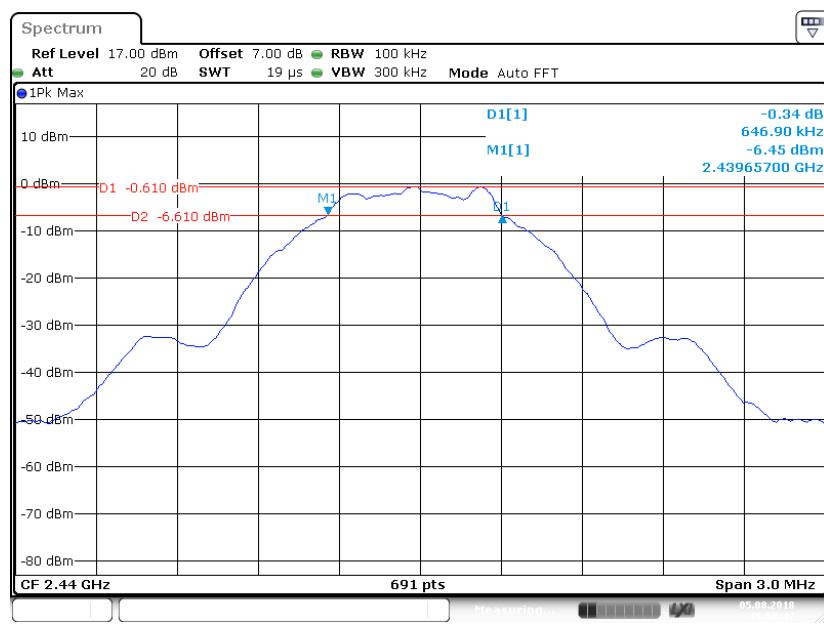
Date: 5 AUG 2018 11:11:35

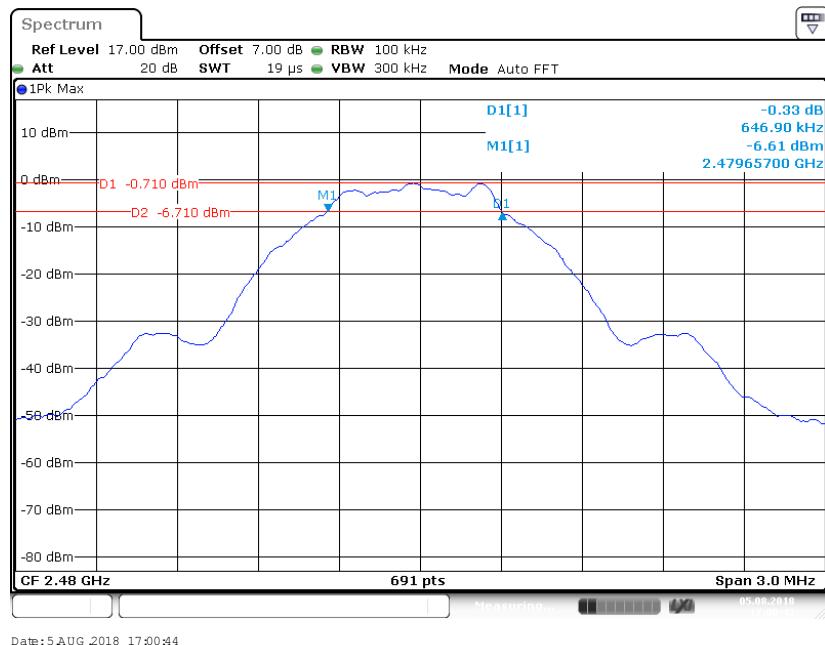
802.11n-HT40 Mode Channel 6: 2437MHz

Date: 21 AUG 2018 17:55:43

802.11n-HT40 Mode Channel 9: 2452MHz

Date: 5 AUG 2018 11:27:48

BLE Mode Channel 0: 2402MHz**BLE Mode Channel 19: 2440MHz**

BLE Mode Channel 39: 2480MHz

Date: 5 AUG 2018 17:00:44

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04

For Wi-Fi:


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



For BLE:

1. Set the RBW \geq DTS bandwidth.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 3 \times$ RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data

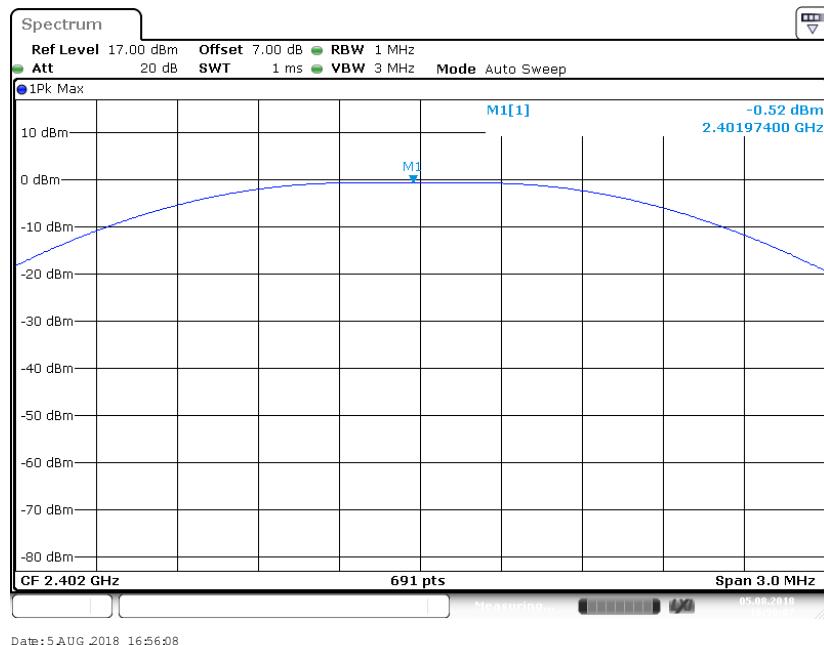
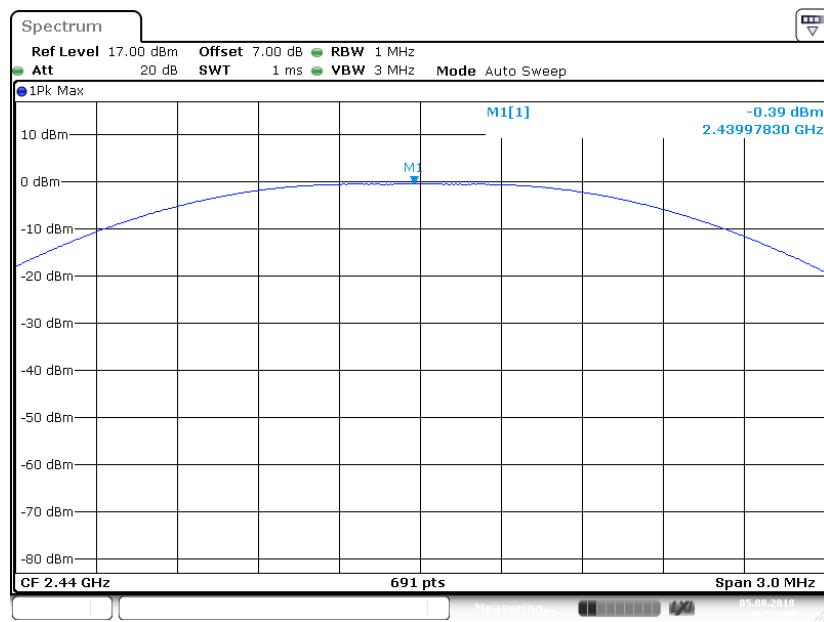
Environmental Conditions

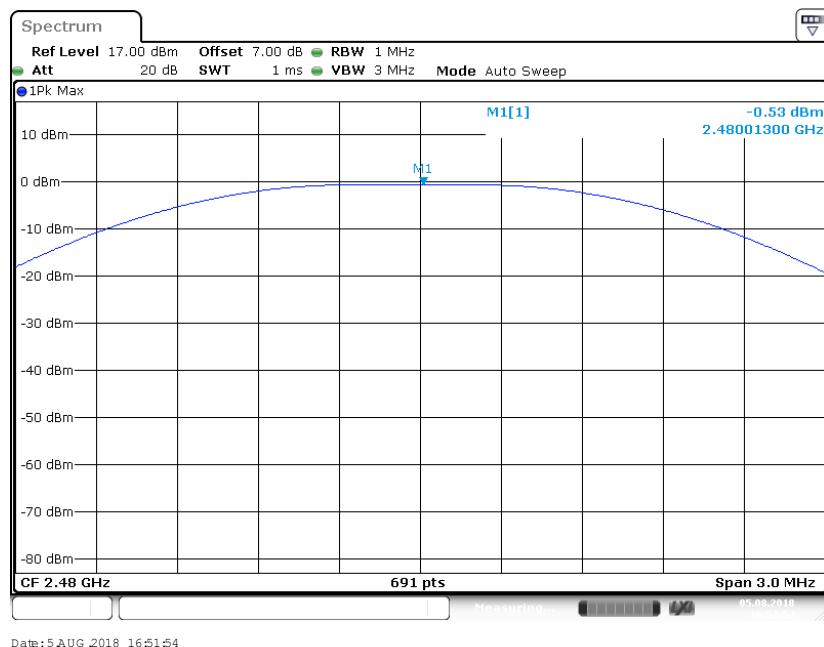
Temperature:	23.8°C
Relative Humidity:	54 %
ATM Pressure:	101.2 kPa

The testing was performed by Max Min on 2018-08-05.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
802.11b Mode				
1	2412	23.79	≤ 30	Pass
2	2417	24.75	≤ 30	Pass
6	2437	24.67	≤ 30	Pass
11	2462	24.71	≤ 30	Pass
802.11g Mode				
1	2412	20.78	≤ 30	Pass
2	2417	23.76	≤ 30	Pass
3	2422	24.45	≤ 30	Pass
6	2437	24.57	≤ 30	Pass
9	2452	24.31	≤ 30	Pass
10	2457	23.48	≤ 30	Pass
11	2462	22.48	≤ 30	Pass
802.11n-HT20 Mode				
1	2412	20.13	≤ 30	Pass
2	2417	24.11	≤ 30	Pass
3	2422	24.82	≤ 30	Pass
6	2437	24.61	≤ 30	Pass
9	2452	24.57	≤ 30	Pass
10	2457	23.72	≤ 30	Pass
11	2462	21.71	≤ 30	Pass
802.11n-HT40 Mode				
3	2422	18.52	≤ 30	Pass
4	2427	21.32	≤ 30	Pass
5	2432	22.19	≤ 30	Pass
6	2437	22.18	≤ 30	Pass
7	2442	21.36	≤ 30	Pass
8	2447	19.43	≤ 30	Pass
9	2452	16.64	≤ 30	Pass
BLE Mode				
0	2402	-0.52	≤ 30	Pass
19	2440	-0.39	≤ 30	Pass
39	2480	-0.53	≤ 30	Pass

BLE Mode Channel 0: 2402MHz**BLE Mode Channel 19: 2440MHz**

BLE Mode Channel 39: 2480MHz

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 13.2 and ANSI C63.10-2013 clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

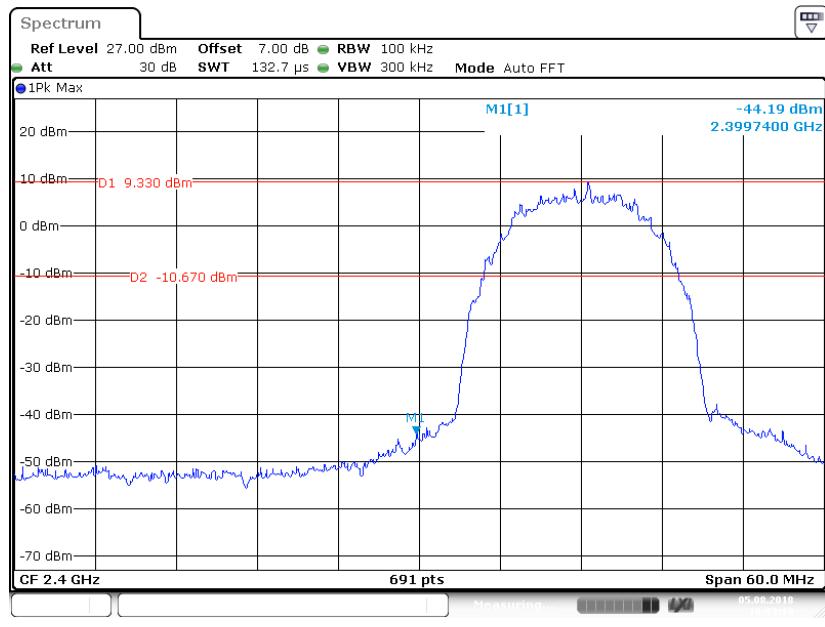
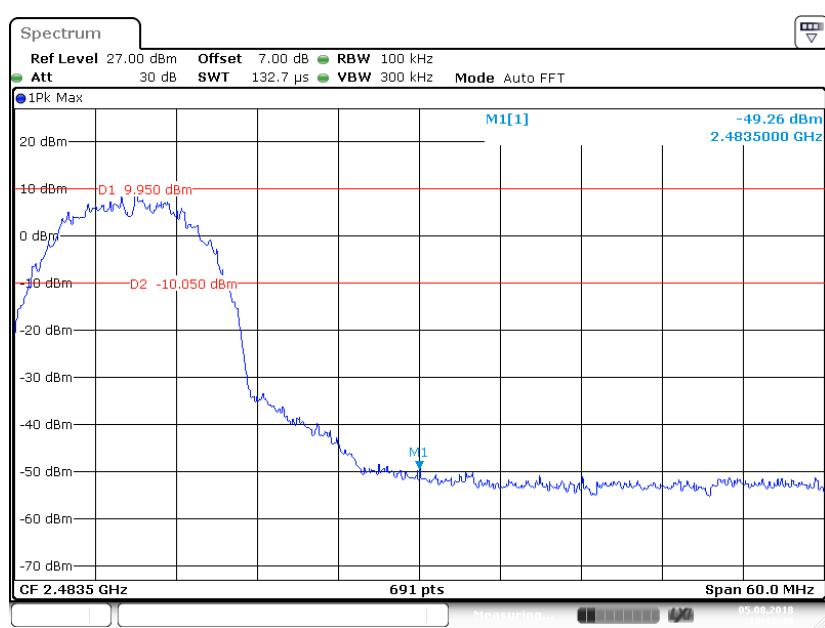
Environmental Conditions

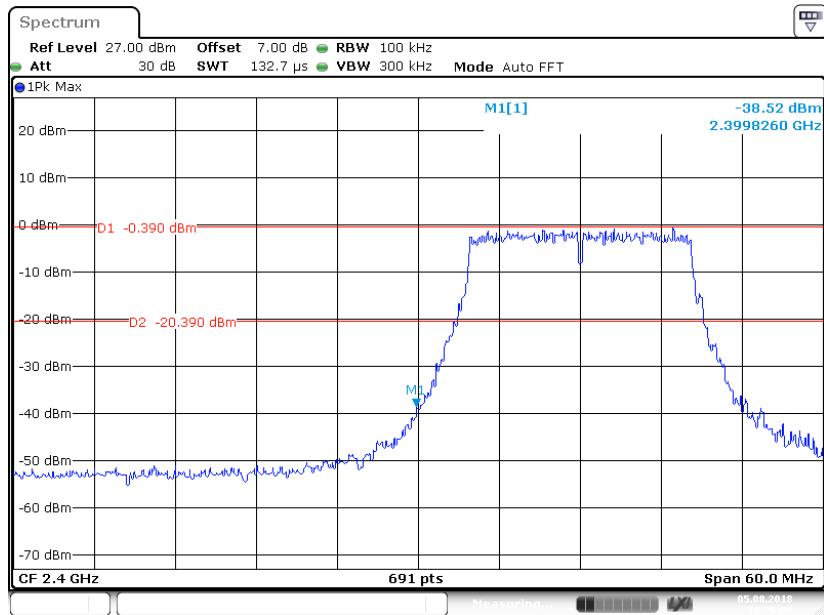
Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Max Min on 2018-08-05.

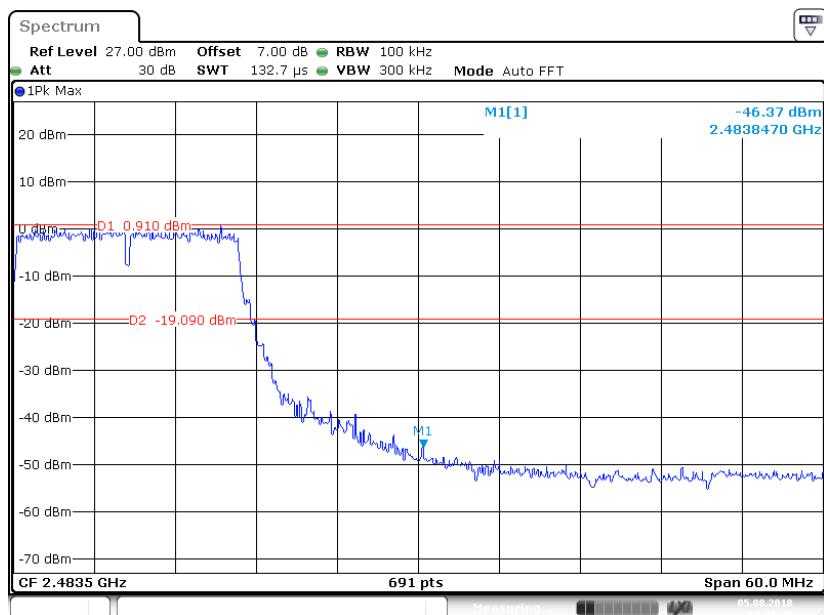
EUT operation mode: Transmitting

Test Result: Compliance

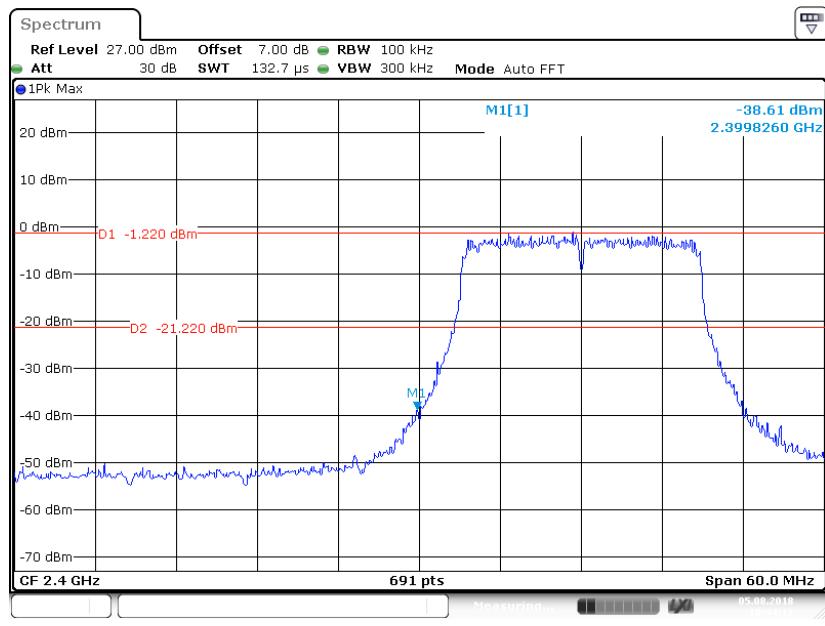
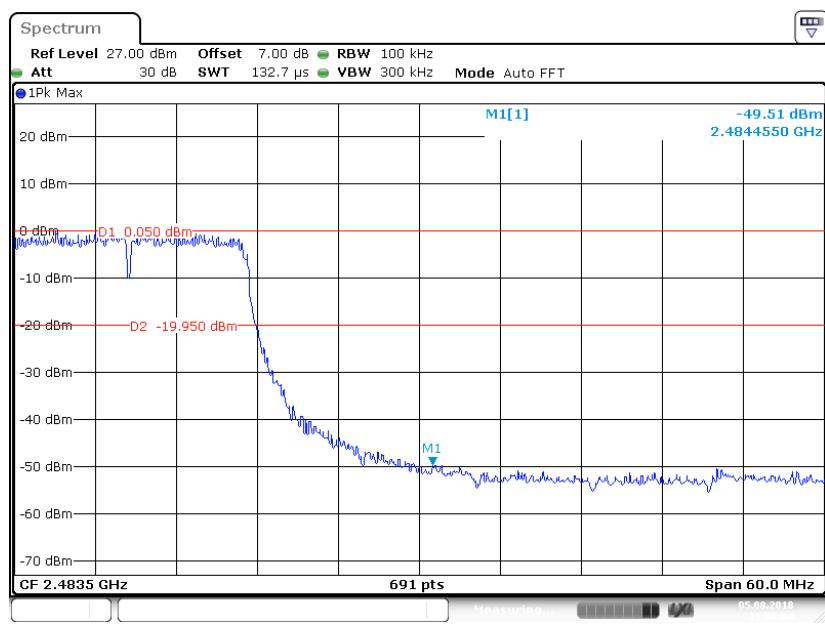
802.11b Mode Left Side**802.11b Mode Right Side**

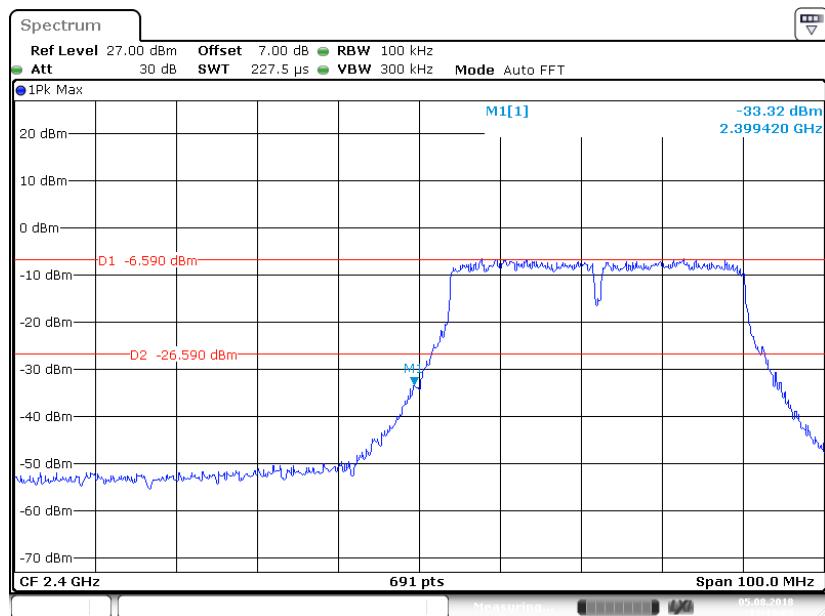
802.11g Mode Left Side

Date: 5 AUG 2018 10:26:01

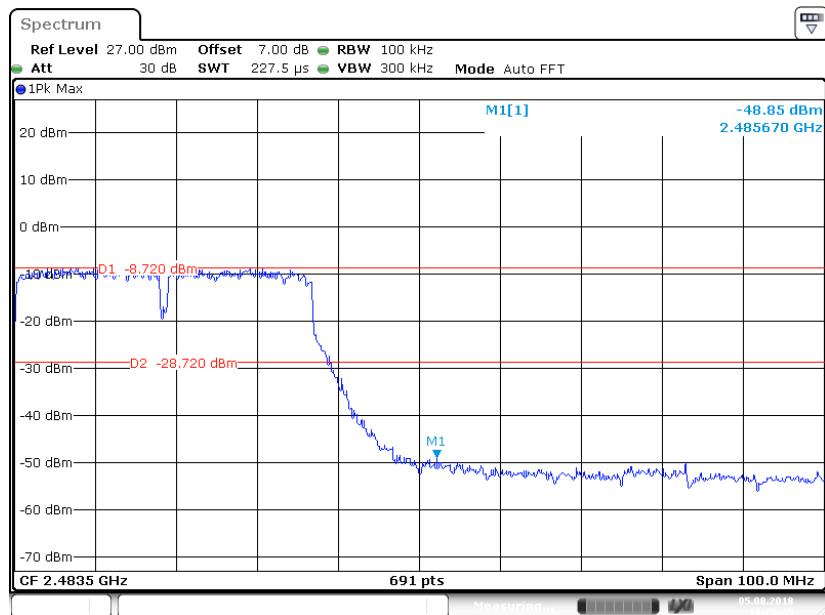
802.11g Mode Right Side

Date: 5 AUG 2018 10:38:41

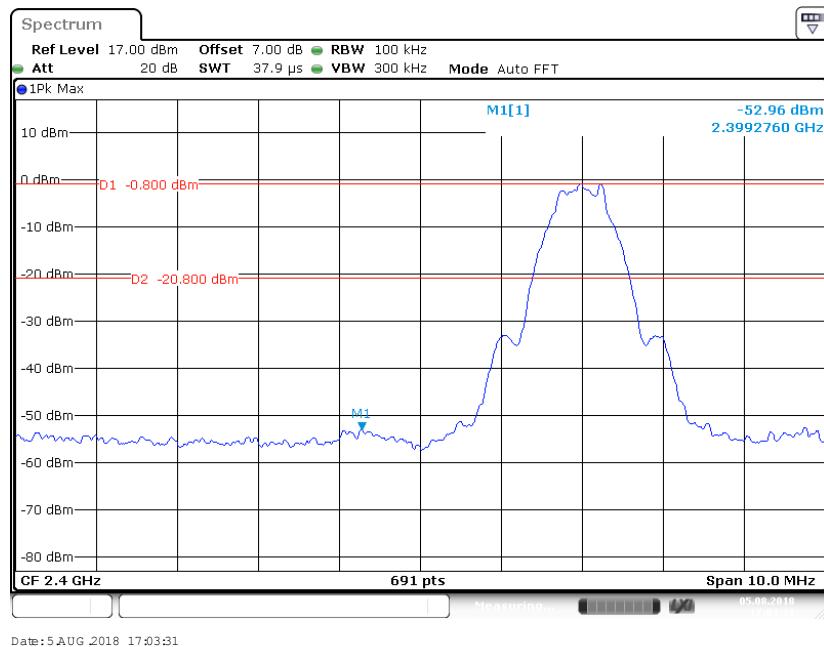
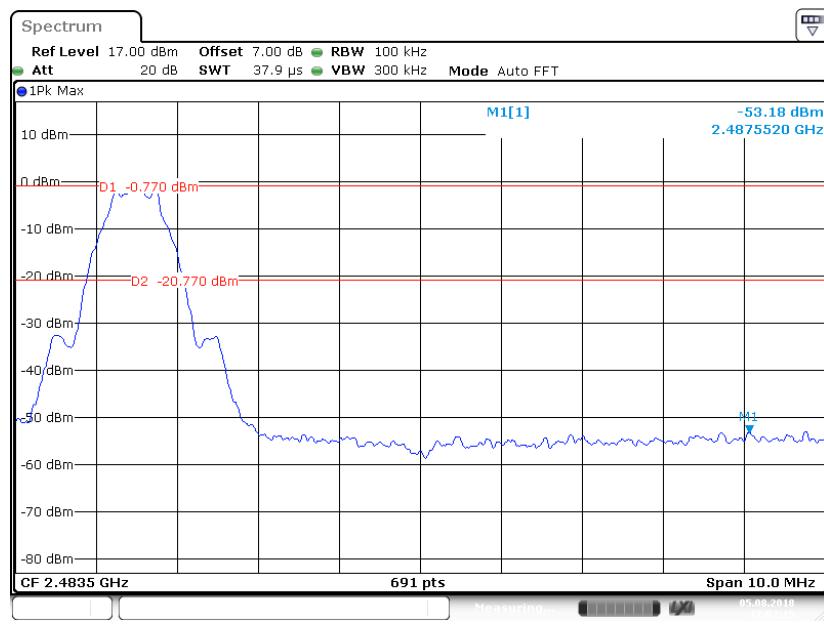
802.11n-HT20 Mode Left Side**802.11n-HT20 Mode Right Side**

802.11n-HT40 Mode Left Side

Date: 5 AUG 2018 11:13:09

802.11n-HT40 Mode Right Side

Date: 5 AUG 2018 11:28:45

BLE Mode Left Side**BLE Mode Right Side**

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate Compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

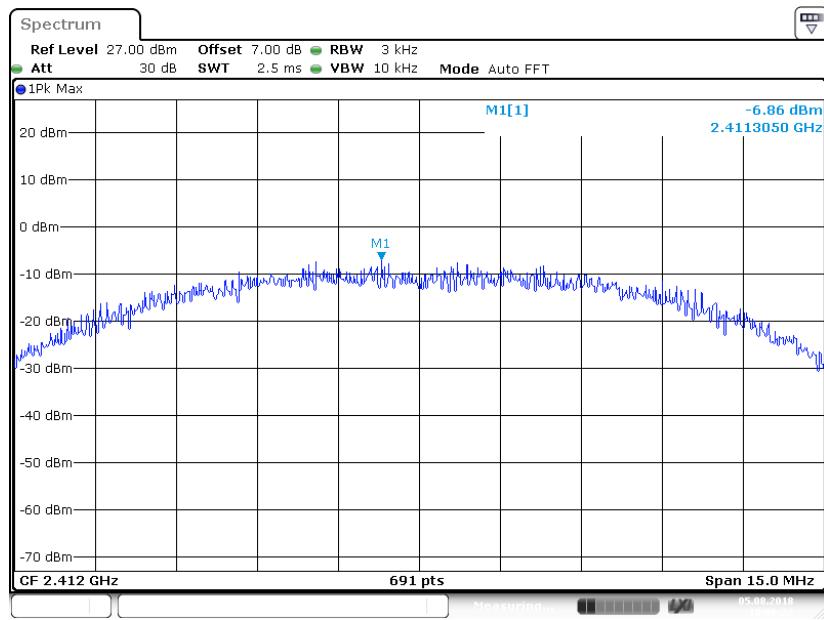
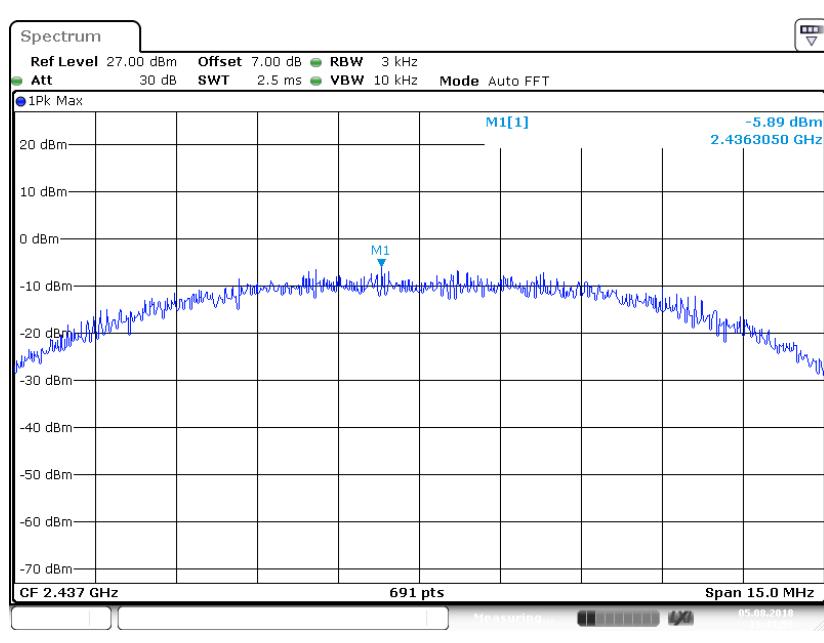
Temperature:	24.1 °C
Relative Humidity:	50%
ATM Pressure:	101.3 kPa

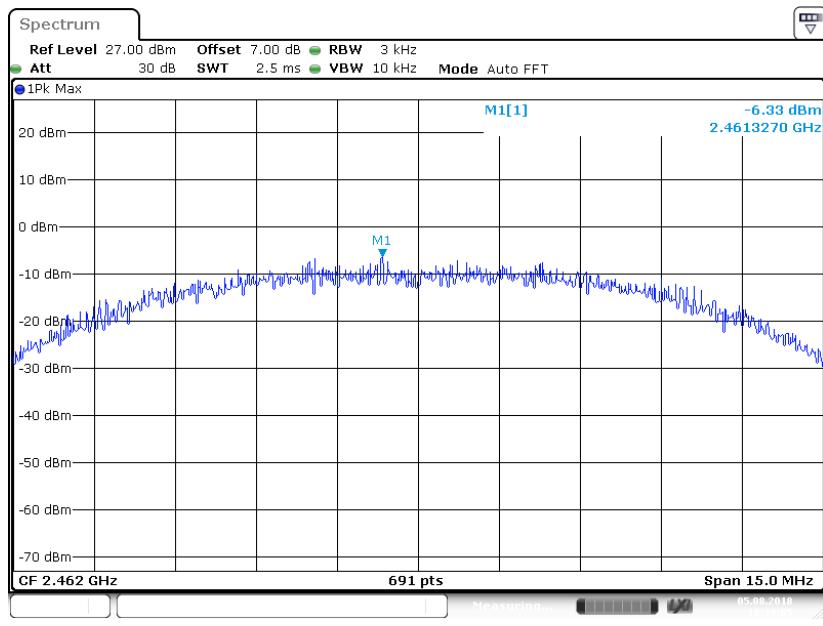
The testing was performed by Max Min on 2018-08-05 & 2018-08-21.

EUT operation mode: Transmitting

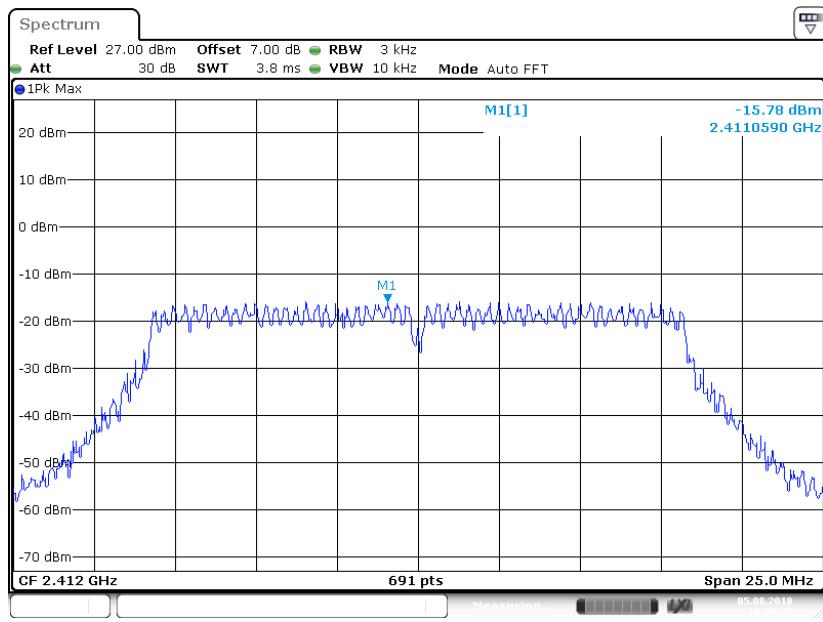
Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b Mode			
1	2412	-6.86	≤ 8
6	2437	-5.89	≤ 8
11	2462	-6.33	≤ 8
802.11g Mode			
1	2412	-15.78	≤ 8
6	2437	-12.12	≤ 8
11	2462	-14.59	≤ 8
802.11n-HT20 mode			
1	2412	-15.94	≤ 8
6	2437	-11.46	≤ 8
11	2462	-14.68	≤ 8
802.11n-HT40 Mode			
3	2422	-19.39	≤ 8
6	2437	-13.16	≤ 8
9	2452	-21.36	≤ 8
BLE Mode			
0	2402	-16.93	≤ 8
19	2440	-16.31	≤ 8
39	2480	-16.96	≤ 8

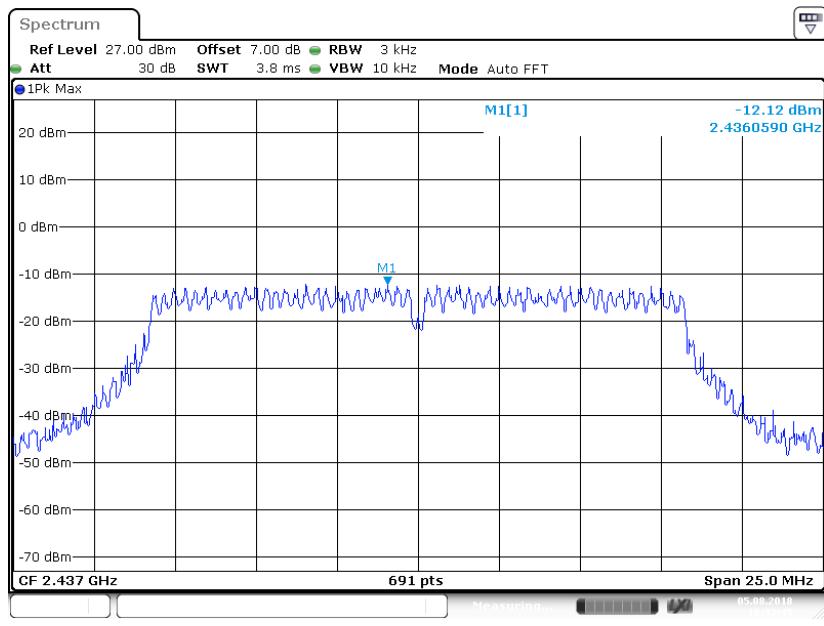
802.11b Mode Channel 1: 2412MHz**802.11b Mode Channel 6: 2437MHz**

802.11b Mode Channel 11: 2462MHz

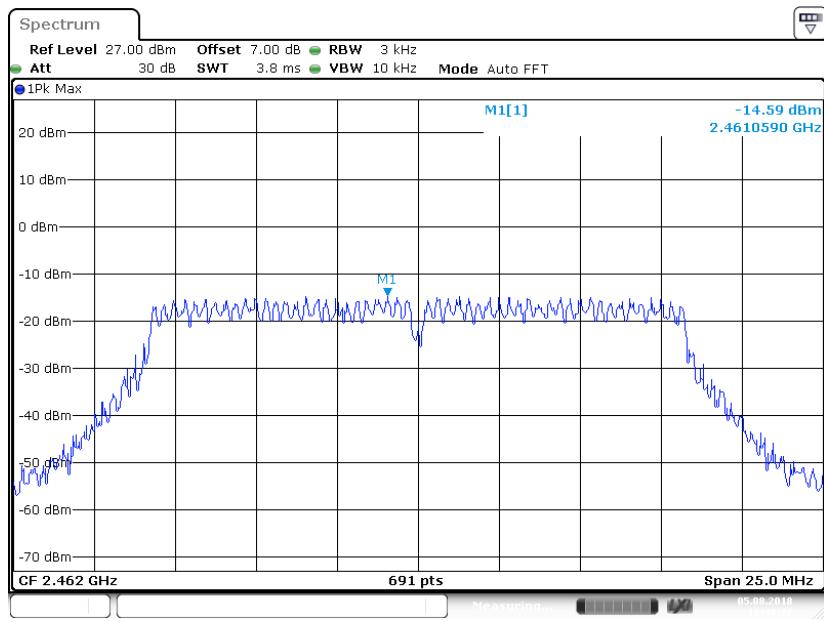
Date: 5 AUG 2018 10:19:06

802.11g Mode Channel 1: 2412MHz

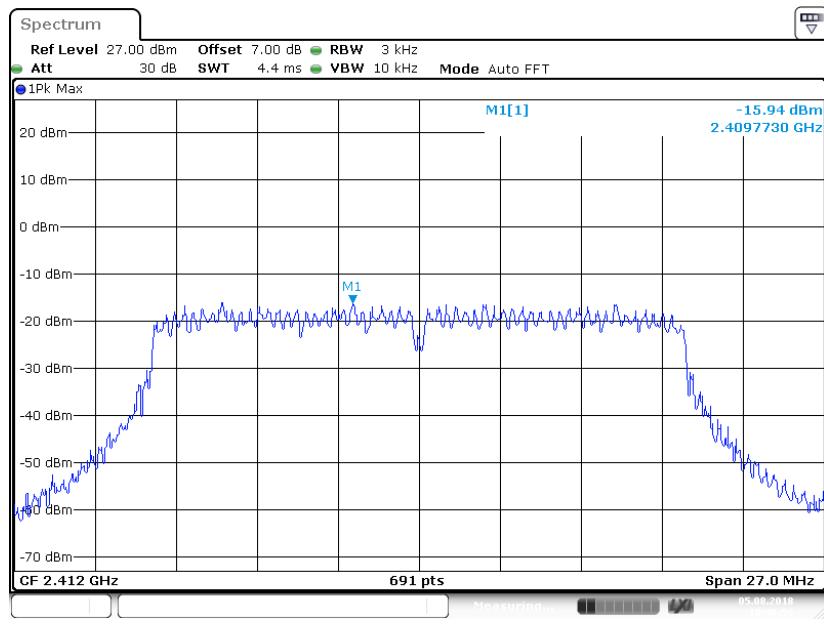
Date: 5 AUG 2018 10:29:17

802.11g Mode Channel 6: 2437MHz

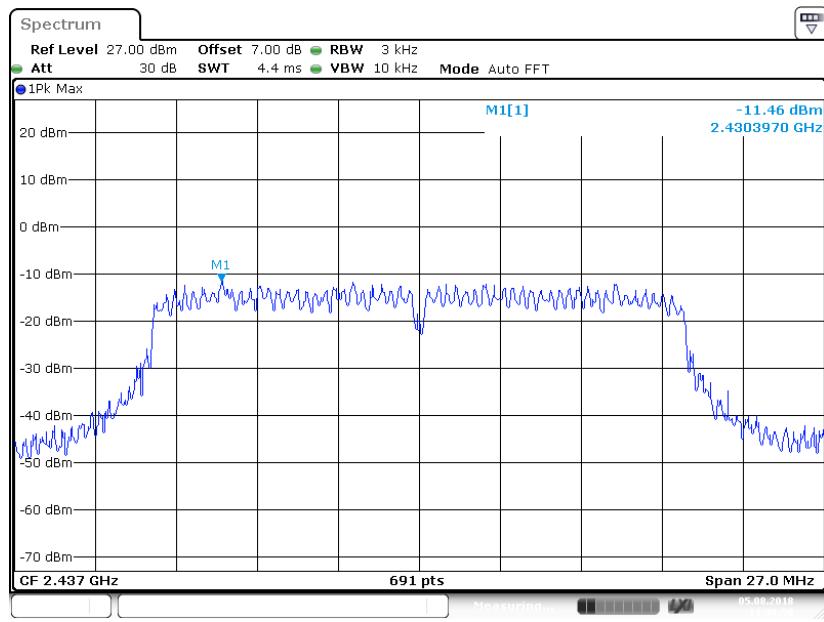
Date: 5 AUG 2018 10:33:45

802.11g Mode Channel 11: 2462MHz

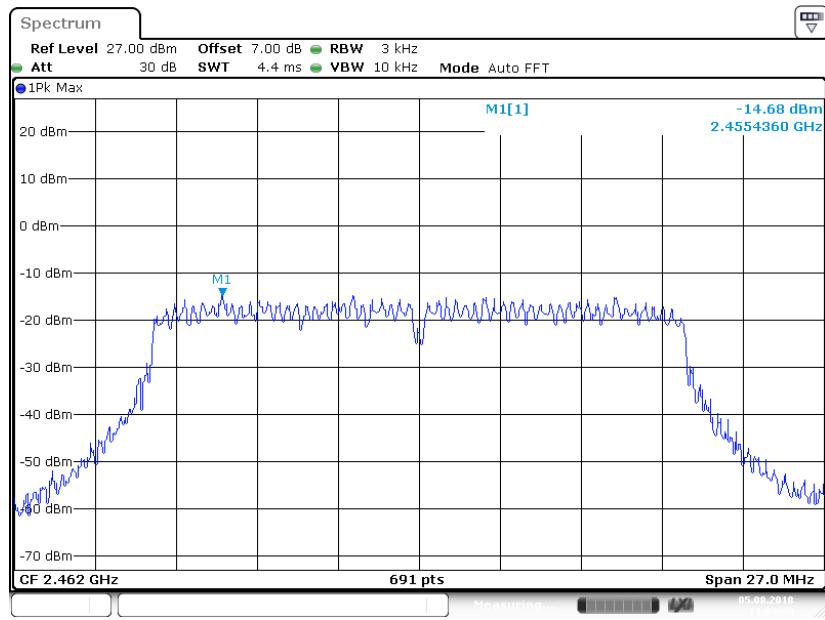
Date: 5 AUG 2018 10:40:27

802.11n-HT20 Mode Channel 1: 2412MHz

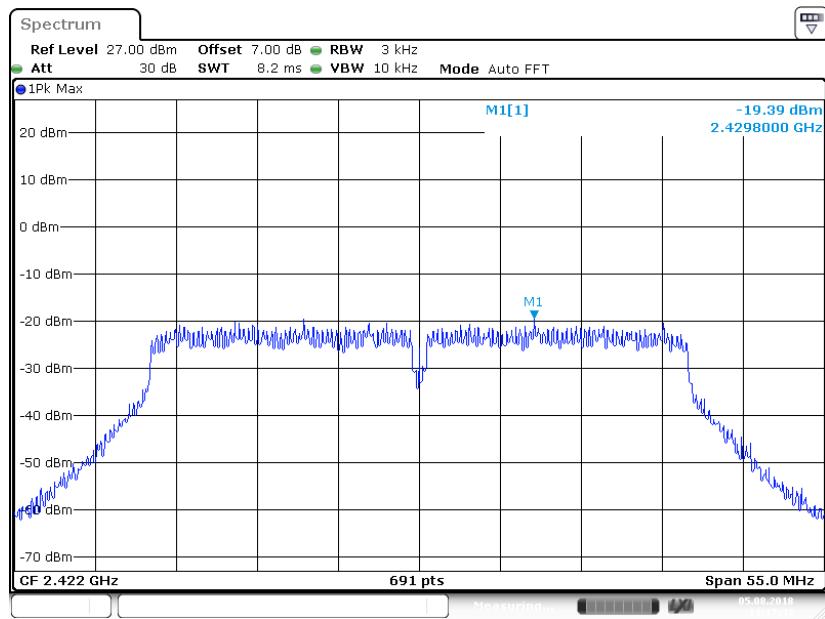
Date: 5 AUG 2018 10:46:56

802.11n-HT20 Mode Channel 6: 2437MHz

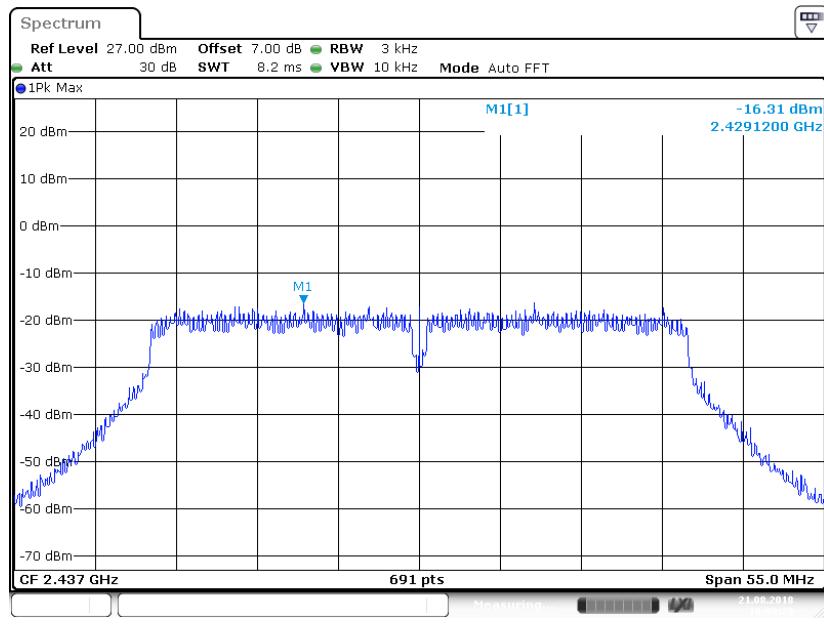
Date: 5 AUG 2018 11:00:50

802.11n-HT20 Mode Channel 11: 2462MHz

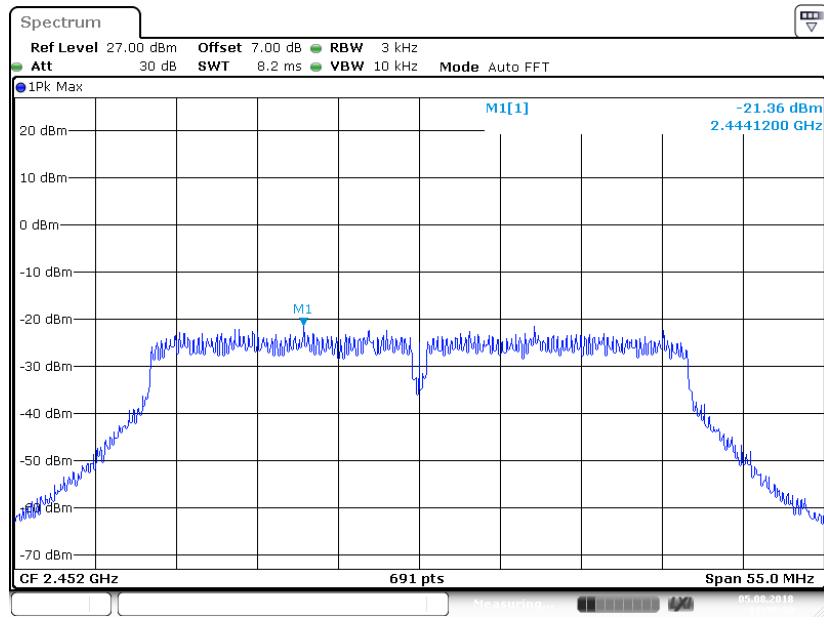
Date: 5 AUG 2018 11:08:39

802.11n-HT40 Mode Channel 3: 2422MHz

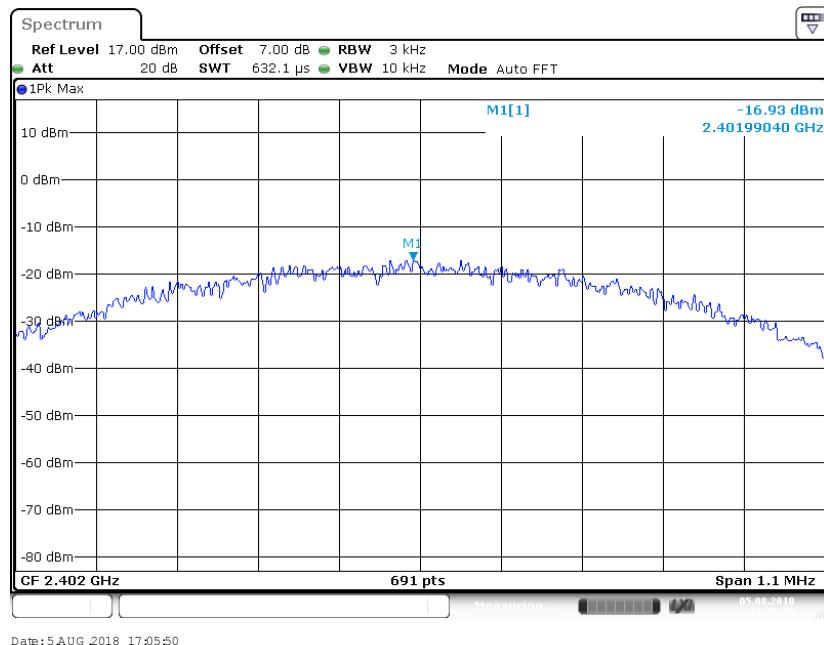
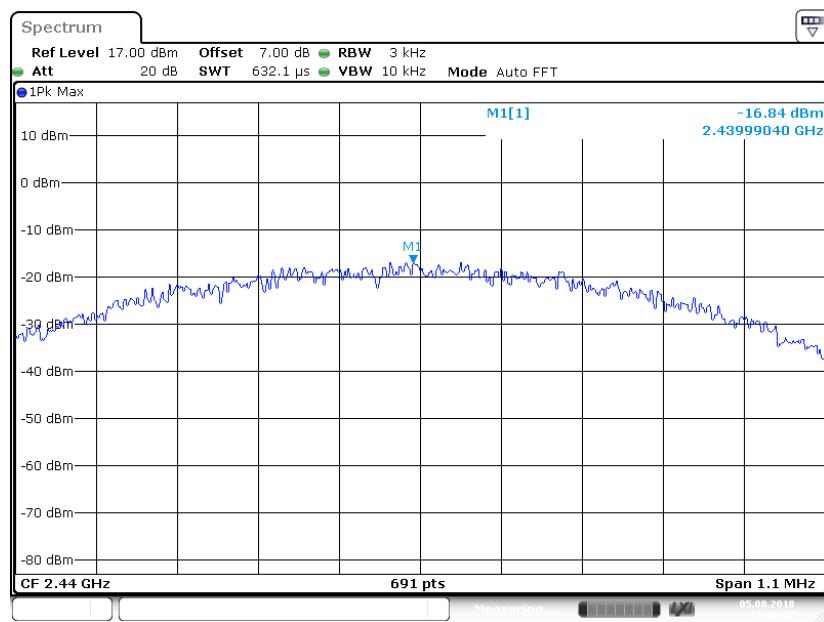
Date: 5 AUG 2018 11:17:44

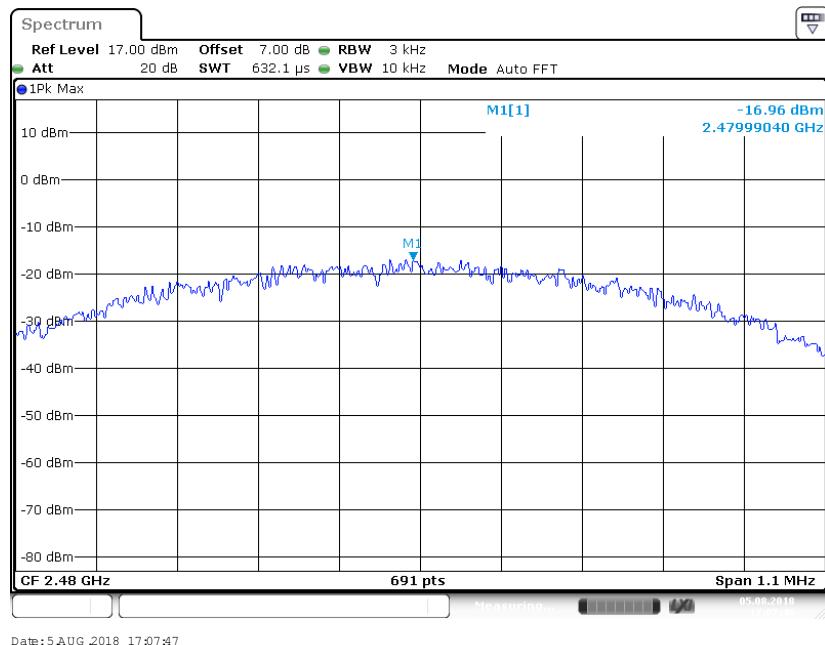
802.11n-HT40 Mode Channel 6: 2437MHz

Date: 21 AUG 2018 18:00:28

802.11n-HT40 Mode Channel 9: 2452MHz

Date: 5 AUG 2018 11:30:50

BLE Mode Channel 0: 2402MHz**BLE Mode Channel 19: 2440MHz**

BLE Mode Channel 39: 2480MHz

Date: 5 AUG 2018 17:07:47

******* END OF REPORT *******