



# TEST REPORT

## FCC PART 15 SUBPART C 15.247 & RSS 247

Test report  
On Behalf of  
JLR Gear  
For  
Bluetooth speaker  
Model No.: STG-6392-TX, STG-6496-JB

FCC ID: 2AMG5-6392V1

Prepared for : JLR Gear  
2612 Barrington Court, Hayward, CA 94545

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China

Date of Test: June 27, 2018 ~ July 05, 2018

Date of Report: July 05, 2018

Report Number: HUAK180628499E

### TEST RESULT CERTIFICATION

**Applicant's name** ..... : JLR Gear

Address ..... : 2612 Barrington Court , Hayward, CA 94545

**Manufacture's Name**..... : EDRTEK.CO., LTD.

Address ..... : ROOM 1617, OVERSEA FRIENDSHIP BUILDING, NO12,  
YINGCHUN ROAD, LUOHU DISTRICT, SHENZHEN

**Product description**

Trade Mark: N/A

Product name .....: Bluetooth speaker

Model and/or type reference : STG-6392-TX,STG-6496-JB

**Standards**..... : **47 CFR FCC Part 15 Subpart C 15.247**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....

Date (s) of performance of tests .....: June 27, 2018 ~ July 05, 2018

Date of Issue .....: July 05, 2018

Test Result.....: **Pass**

Prepared by:




Project Engineer

Reviewed by:



Project Supervisor

Approved by:



Technical Director

## Table of Contents

**Page**

1.	SUMMARY .....	4
1.1.	TEST STANDARDS.....	4
1.2.	TEST DESCRIPTION .....	4
1.3.	TEST FACILITY .....	5
1.4.	STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	5
2.	GENERAL INFORMATION.....	6
2.1.	ENVIRONMENTAL CONDITIONS.....	6
2.2.	GENERAL DESCRIPTION OF EUT.....	6
2.3.	DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	6
2.4.	EQUIPMENTS USED DURING THE TEST .....	7
2.5.	RELATED SUBMITTAL(S) / GRANT (S).....	8
2.6.	MODIFICATIONS .....	8
3.	TEST CONDITIONS AND RESULTS .....	9
3.1.	CONDUCTED EMISSIONS TEST.....	9
3.2.	RADIATED EMISSIONS AND BAND EDGE .....	12
3.3.	MAXIMUM PEAK CONDUCTED OUTPUT POWER .....	19
3.4.	20dB BANDWIDTH.....	20
3.5.	FREQUENCY SEPARATION.....	24
3.6.	NUMBER OF HOPPING FREQUENCY .....	28
3.7.	TIME OF OCCUPANCY (DWELL TIME).....	32
3.8.	OUT-OF-BAND EMISSIONS .....	36
3.9.	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	43
4.	TEST SETUP PHOTOS OF THE EUT .....	44

# 1. SUMMARY

## 1.1. TEST STANDARDS

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

**ANSI C63.10:2013** : American National Standard for Testing Unlicensed Wireless Devices

**ANSI C63.4: 2014:** –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

## 1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(1)(i)	20dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b) RSS 247 5.4 (2)	Maximum Peak Output Power	PASS
FCC Part 15.247(b)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.205/15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS

## 1.3. Test Facility

### 1.3.1 Address of the test laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.:1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,Heping Community, Fuhai Street, Bao'an District, Shenzhen, China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 21210

The 3m alternate test site of Shenzhen HUAK Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 21210 on May 24, 2016.

## 1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen HUAK Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for HUAK laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	$\pm 0.57$ dB	(1)
Transmitter power Radiated	$\pm 2.20$ dB	(1)
Conducted spurious emission 9KHz-40 GHz	$\pm 2.20$ dB	(1)
Occupied Bandwidth	$\pm 0.01$ ppm	(1)
Radiated Emission 30~1000MHz	$\pm 4.10$ dB	(1)
Radiated Emission Above 1GHz	$\pm 4.32$ dB	(1)
Conducted Disturbance 0.15~30MHz	$\pm 3.20$ dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.2. General Description of EUT

Product Name:	Bluetooth speaker
Model/Type reference:	STG-6392-TX
Serial No:	STG-6496-JB
Model Difference:	Everything is the same except the name
Power supply:	DC3.7V From Battery or DC5V 1A From Micro USB
Version:	Supported BT4.2
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	0 dBi
Hardware Version:	V1.0
Software Version:	V1.0

Note: For more details, refer to the user's manual of the EUT.

### 2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

There are 79 channels provided to the EUT and Channel 00/39/78 was selected for testing.

#### Operation Frequency :

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

Note: The line display in grey were the channel selected for testing

Preliminary tests were performed in each mode and packet length of BT, and found worst case as below, finally test were conducted at those mode and recorded in this report.

Test Items	Worst case
Conducted Emissions	DH5 Middle channel
Radiated Emissions and Band Edge	DH5
Maximum Conducted Output Power	DH5/2DH5/3DH5
20dB Bandwidth&99% Bandwidth	DH5/2DH5/3DH5
Frequency Separation	DH5/2DH5/3DH5 Middle channel
Number of hopping frequency	DH5/2DH5/3DH5
Time of Occupancy (Dwell Time)	DH1/DH3/DH5 Middle channel 2DH1/2DH3/2DH5 Middle channel 3DH1/3DH3/3DH5 Middle channel
Out-of-band Emissions	DH5/2DH5/3DH5

## 2.4. Equipments Used during the Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2017	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2017	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 28, 2017	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 28, 2017	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 28, 2017	1 Year
15.	Power Meter	Anritsu	ML2487B	110553	Dec. 28, 2017	1 Year
16.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
17.	Signal generator	Agilent	N5182A	HKE-029	Dec. 28, 2017	1 Year
18.	Signal Generator	Agilent	83630A	HKE-028	Dec. 28, 2017	1 Year
19.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2017	3 Year

The calibration interval was one year

## **2.5. Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## **2.6. Modifications**

No modifications were implemented to meet testing criteria.



### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emissions Test


##### LIMIT

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

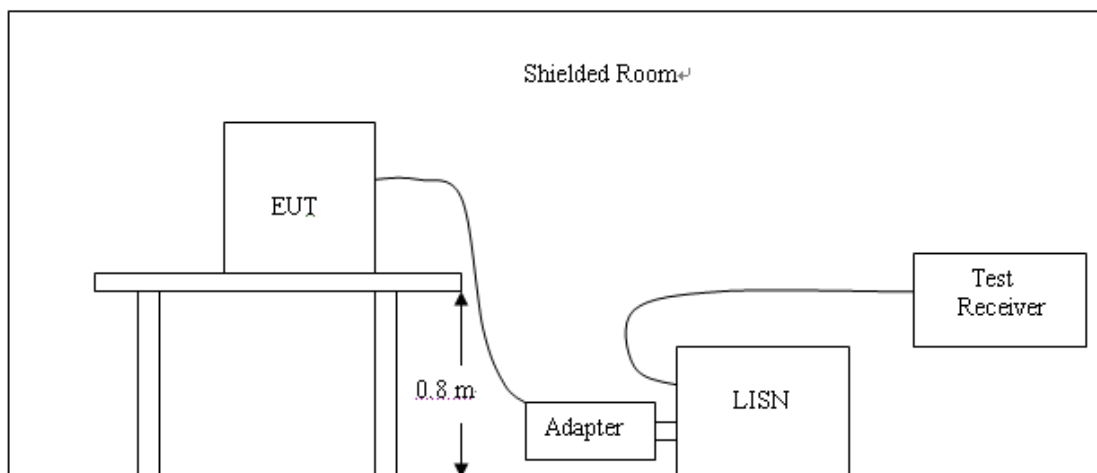


##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

## TEST RESULTS

Remark: All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of 8DPSK High Channel was reported as below:


Test Specification: Line

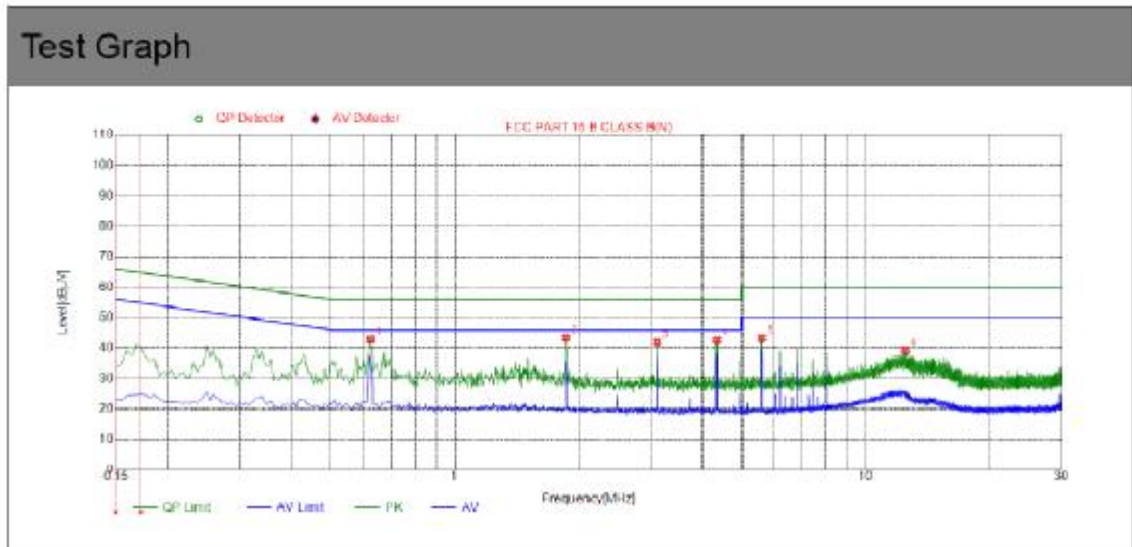

### Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.6225	42.91	10.05	56.00	13.09	PK
2	1.8645	43.47	10.14	56.00	12.53	PK
3	3.1065	42.01	10.22	56.00	13.99	PK
4	4.3530	42.69	10.25	56.00	13.31	PK
5	5.5950	43.26	10.25	60.00	16.72	PK
6	12.4935	39.26	9.98	60.00	20.74	PK

Test Specification: Neutral

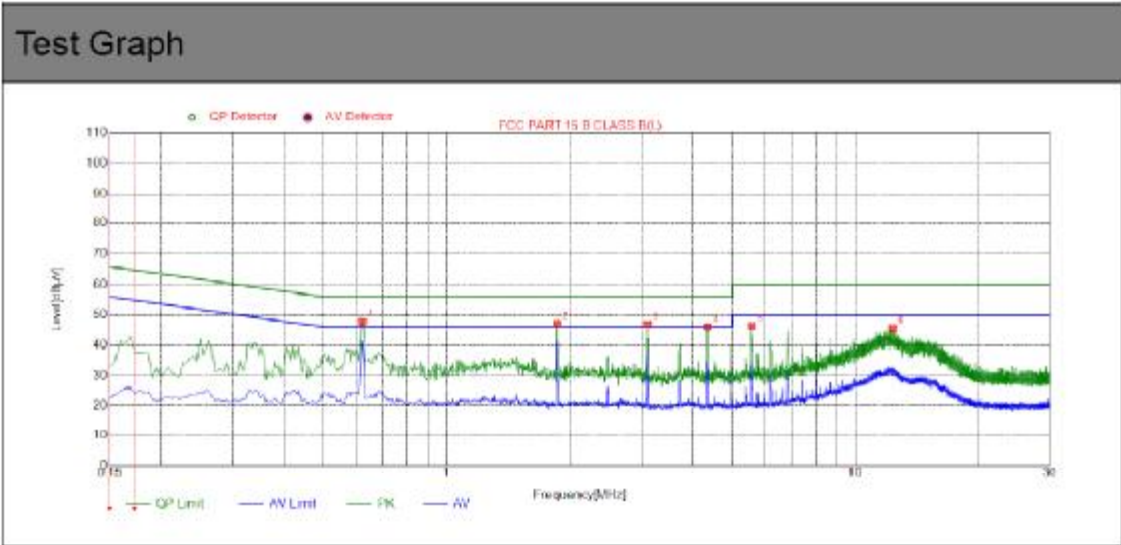

Suspected List

NO.	Freq [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.6225	47.82	10.05	56.00	8.18	PK
2	1.8645	47.09	10.14	56.00	8.91	PK
3	3.1065	46.86	10.22	56.00	9.14	PK
4	4.3530	45.95	10.25	56.00	10.05	PK
5	5.5905	46.26	10.25	60.00	13.74	PK
6	12.3540	45.52	9.98	60.00	14.48	PK

## 3.2. Radiated Emissions and Band Edge

### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)


Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

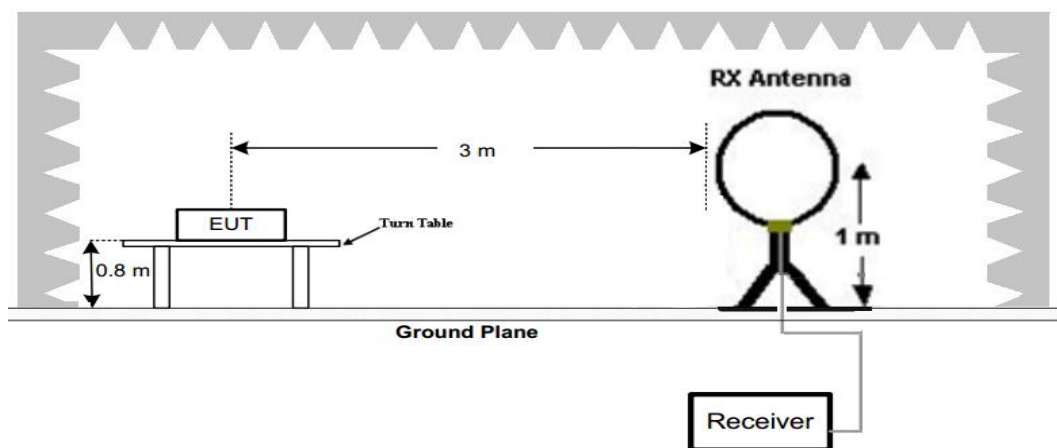

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

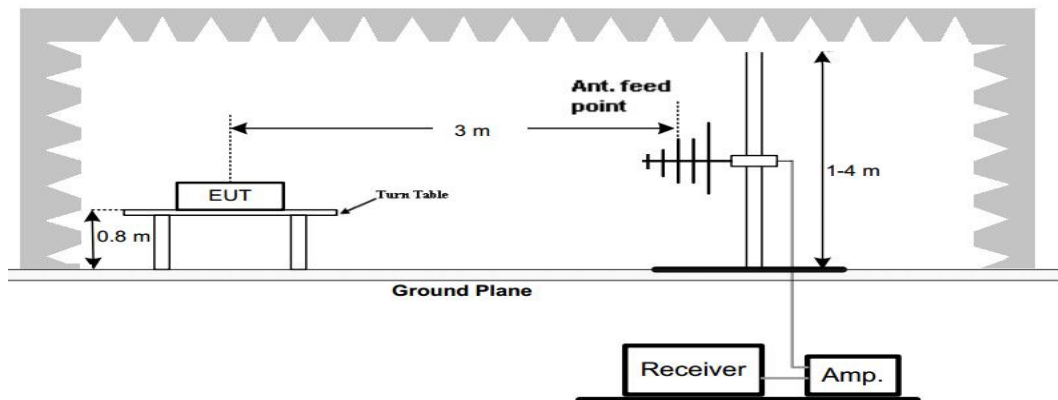

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

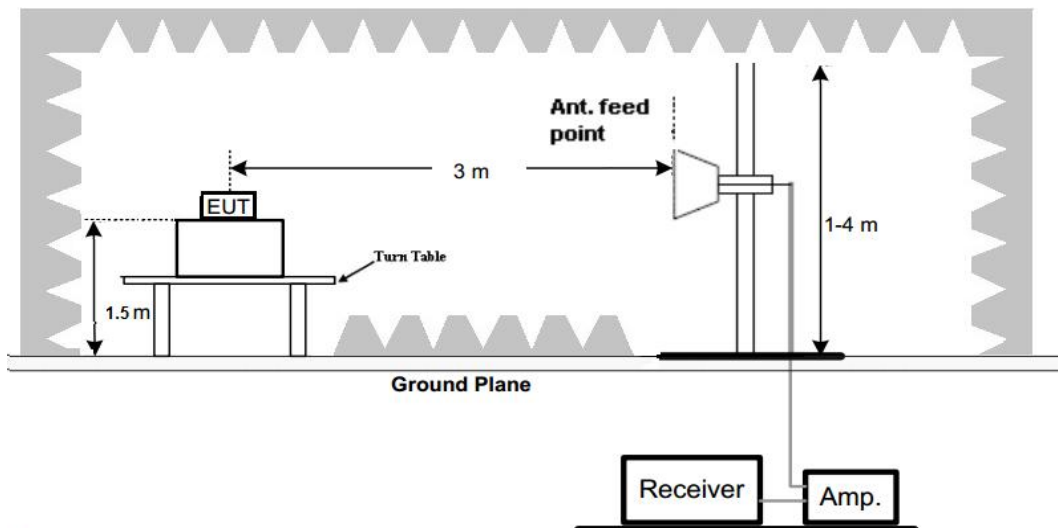

### Test Procedure


1. The EUT was placed on turn table which is 0.8m above ground plane for below 1GHz test, and on a low permittivity and low loss tangent turn table which is 1.5m above ground plane for above 1GHz test.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

### TEST RESULTS

Remark:

1. Radiated Emission measured at GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 9 KHz to 10th harmonic of fundamental and recorded worst case at GFSK DH5 mode.
2. There is no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
3. For below 1GHz testing recorded worst at GFSK DH5 low channel.

Below 1GHz Test Results:  
Antenna polarity: H

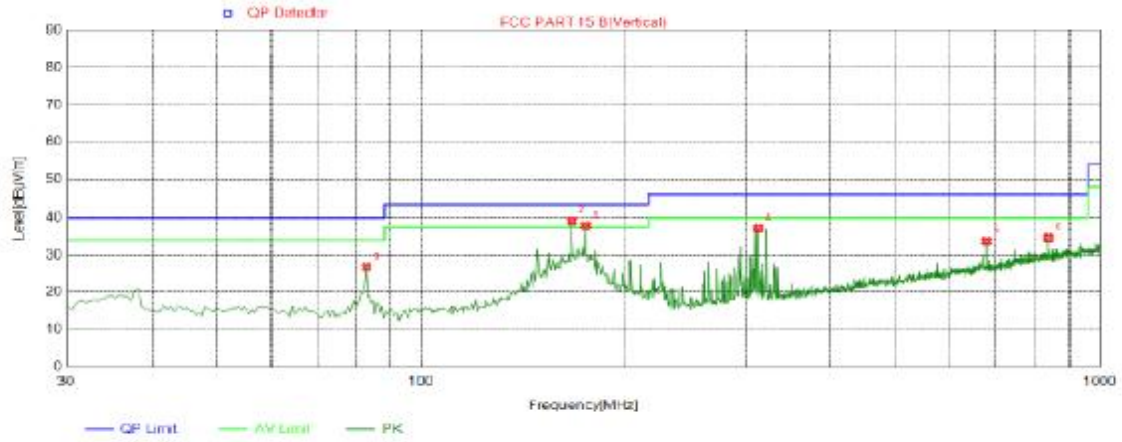


**Suspected List**

NO.	Freq. [MHz]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	82.8650	26.75	-18.83	40.00	13.25	PK	100	255	Vertical
2	166.2850	39.13	-10.24	43.50	4.37	PK	100	145	Vertical
3	174.5300	37.80	-11.92	43.50	5.70	PK	100	279	Vertical
4	313.2400	37.12	-12.82	46.00	8.88	PK	100	308	Vertical
5	680.3850	33.74	-4.42	46.00	12.26	PK	100	98	Vertical
6	838.9800	34.59	-1.64	46.00	11.41	PK	100	226	Vertical

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

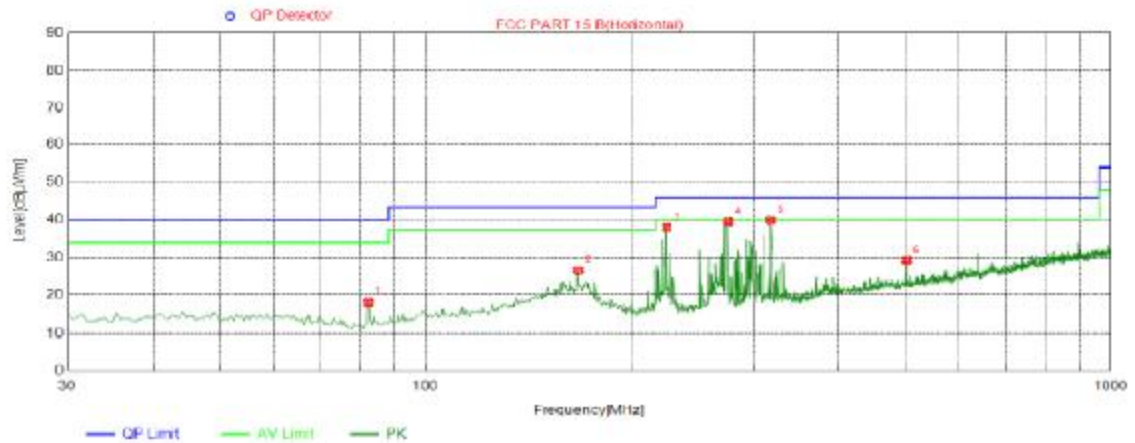

### Suspected List

NO.	Freq. [MHz]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	82.3800	18.06	-18.90	40.00	21.94	PK	100	358	Horizontal
2	166.7700	26.61	-10.33	43.50	16.89	PK	100	227	Horizontal
3	224.4850	38.04	-15.20	46.00	7.96	PK	100	39	Horizontal
4	275.8950	39.61	-14.11	46.00	6.39	PK	100	88	Horizontal
5	318.5750	39.96	-12.54	46.00	6.04	PK	100	360	Horizontal
6	502.8750	29.33	-8.12	46.00	16.67	PK	100	97	Horizontal

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

**For 1GHz to 25GHz**

CH Low (2402MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4804	56.84	-3.65	59.45	74.00	-14.55	peak
4804	46.59	-3.65	38.75	54.00	-15.25	AVG
7206	56.53	-0.95	55.58	74.00	-18.42	peak
7206	44.17	-0.95	40.25	54.00	-13.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4804	56.41	-3.65	58.64	74.00	-15.36	peak
4804	46.27	-3.65	38.41	54.00	-15.59	AVG
7206	56.33	-0.95	57.16	74.00	-16.84	peak
7206	43.86	-0.95	43.89	54.00	-10.11	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH Middle (2441MHz)  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	56.29	-3.54	54.68	74.00	-19.32	peak
4882.00	46.64	-3.54	38.15	54.00	-15.85	AVG
7323.00	56.38	-0.81	56.54	74.00	-17.46	peak
7323.00	43.61	-0.81	35.49	54.00	-18.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	55.86	-3.54	57.21	74.00	-16.79	peak
4882.00	46.15	-3.54	41.29	54.00	-12.71	AVG
7323.00	56.02	-0.81	53.18	74.00	-20.82	peak
7323.00	43.74	-0.81	40.95	54.00	-13.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH High (2480MHz)  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960	55.64	-3.43	53.19	74.00	-20.81	peak
4960	45.77	-3.44	39.28	54.00	-14.72	AVG
7440	55.83	-0.77	57.14	74.00	-16.86	peak
7440	43.25	-0.77	41.64	54.00	-12.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960	55.12	-3.43	56.35	74.00	-17.65	peak
4960	45.53	-3.44	37.92	54.00	-16.08	AVG
7440	55.47	-0.77	53.49	74.00	-20.51	peak
7440	42.75	-0.77	39.18	54.00	-14.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz °
- (2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.

### 3.3. Maximum Peak Conducted Output Power


#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

#### Test Configuration



#### Test Results

DH5	2402	-3.802	30	PASS
DH5	2480	-4.354	30	PASS
2DH5	2402	-6.234	30	PASS
2DH5	2480	-5.478	30	PASS
3DH5	2402	-6.042	30	PASS
3DH5	2480	-5.275	30	PASS

### 3.4. 20dB Bandwidth

#### Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator.


The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW for 20dB bandwidth.

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW for Occupied Bandwidth.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

#### Test Configuration



#### Test Results

Modulation	Channel	20dB bandwidth (MHz)	Result
GFSK	CH00	1.107	Pass
	CH39	1.100	
	CH78	1.099	
$\pi/4$ DQPSK	CH00	1.371	
	CH39	1.358	
	CH78	1.365	
8DPSK	CH00	1.367	
	CH39	1.365	
	CH78	1.376	

Test plot as follows:

20dB bandwidth

*GFSK Modulation*



*CH00*



*CH39*



*CH78*

$\pi/4$ DQPSK Modulation



CH00



CH39



CH78

8DPSK Modulation



CH00



CH39



CH78

### 3.5. Frequency Separation


#### LIMIT

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $\frac{2}{3} * 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

#### TEST CONFIGURATION



#### TEST RESULTS

Test Mode	Test Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	2480	1.186	0.7326666666666667	PASS
2DH5	2480	1.179	0.91	PASS
3DH5	2480	0.98	0.9173333333333333	PASS
DH5	2441	0.951	0.7333333333333333	PASS
2DH5	2441	0.985	0.9053333333333333	PASS
3DH5	2441	1.149	0.91	PASS

Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle


#### Test plot as follows:




Carrier Frequency Separation\_DH5\_2480



Carrier Frequency Separation\_2DH5\_2480

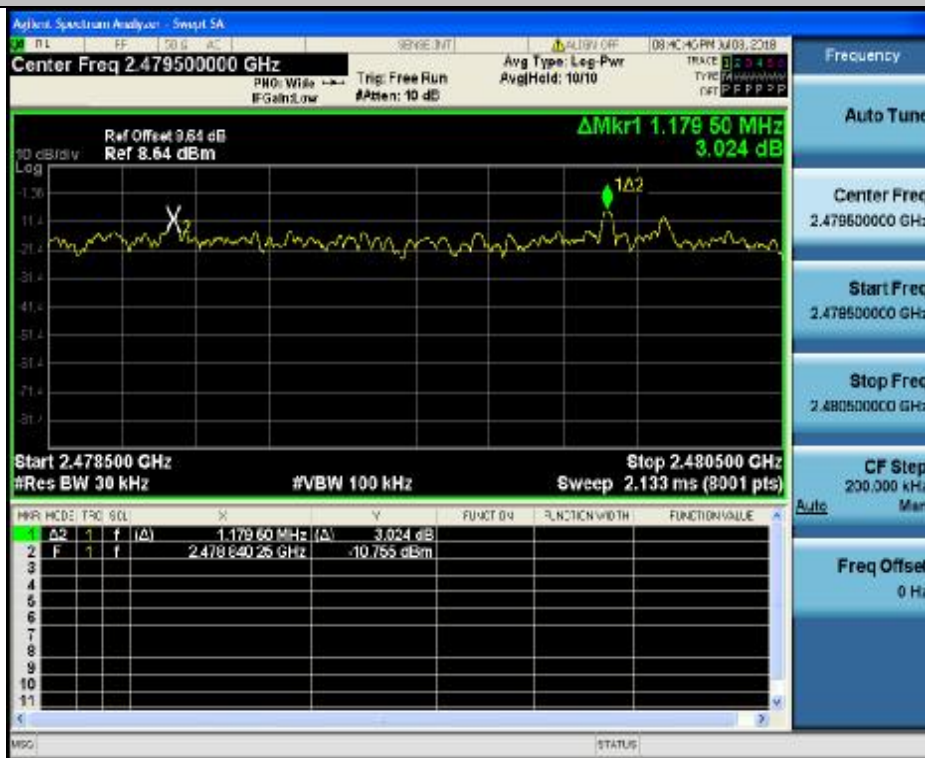


Carrier Frequency Separation\_3DH5\_2480

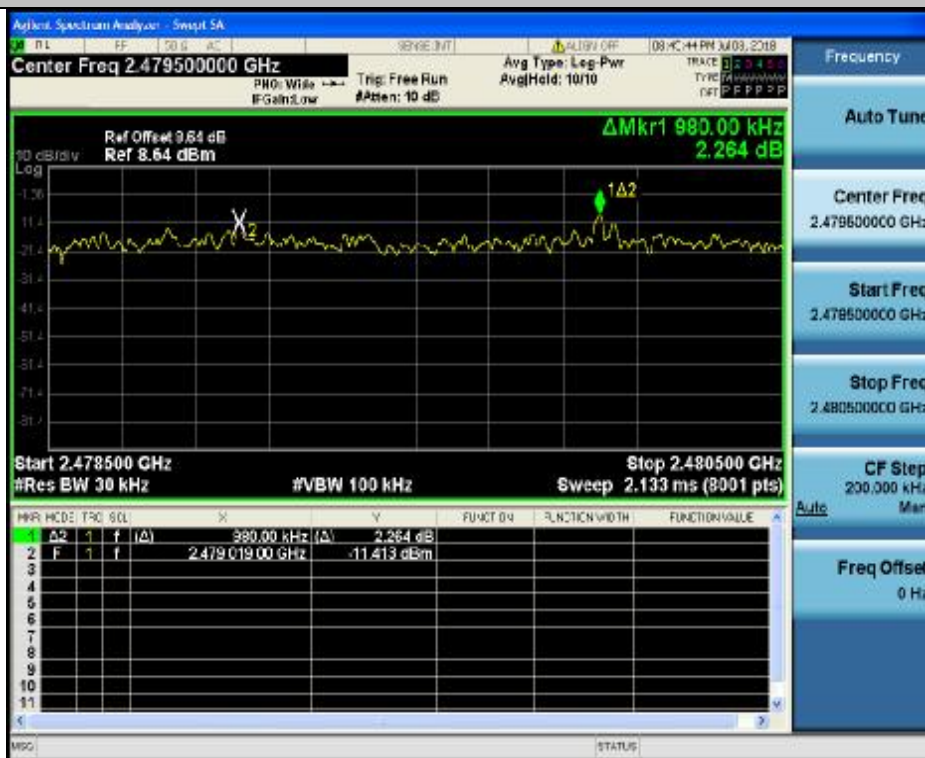


Carrier Frequency Separation\_DH5\_2441



Carrier Frequency Separation\_2DH5\_2441

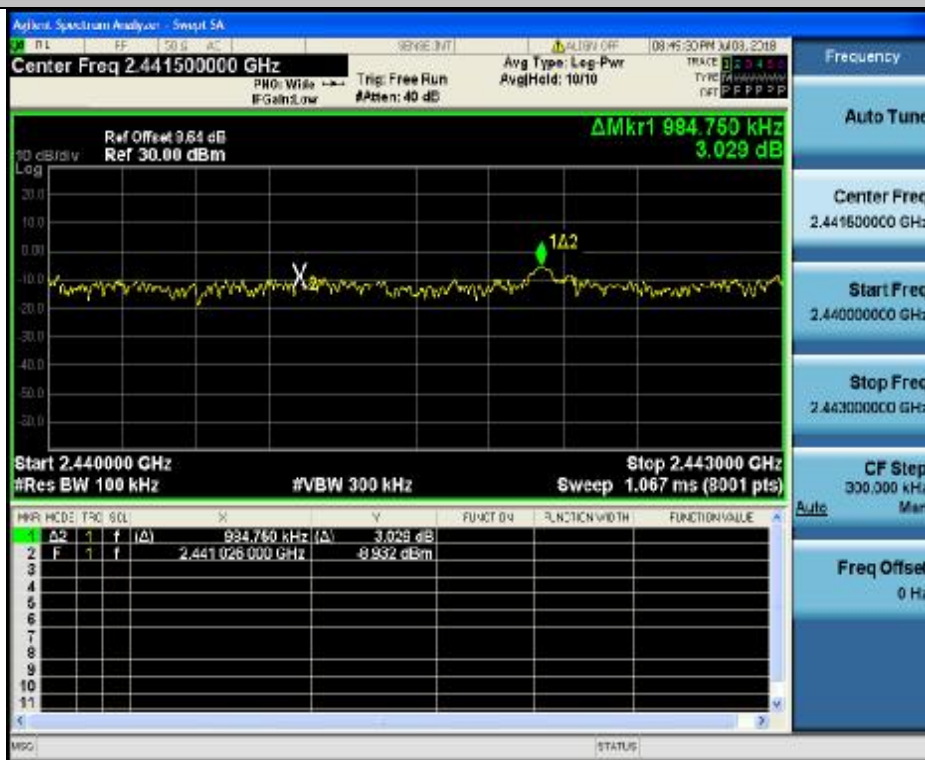

Carrier Frequency Separation\_3DH5\_2441

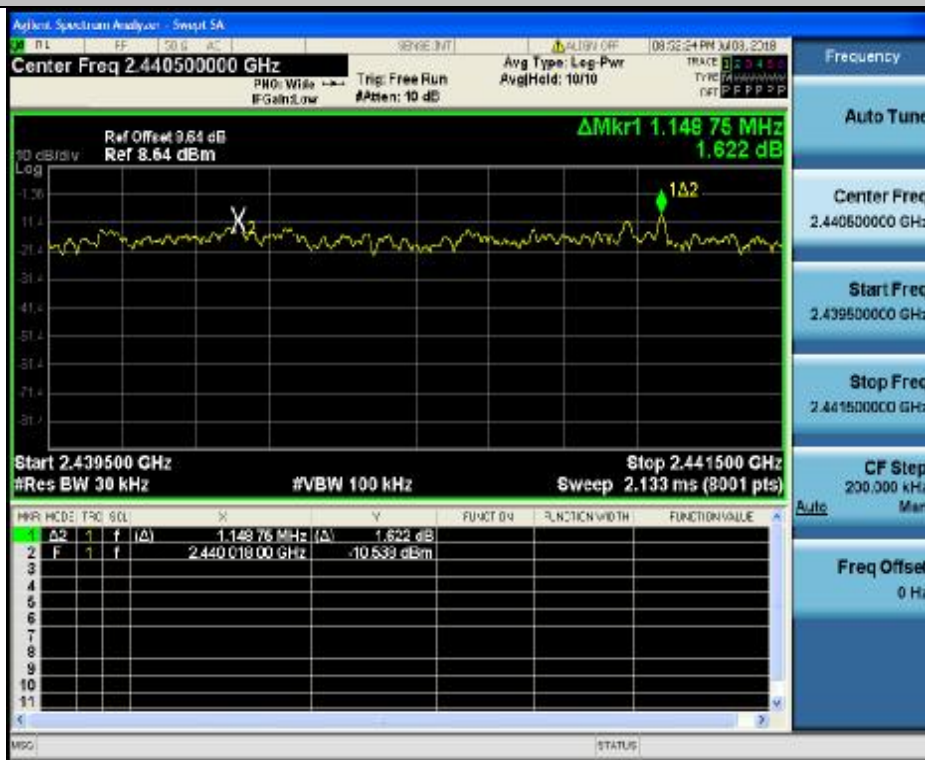

### 3.6. Number of hopping frequency


#### Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz.


#### Test Configuration




#### Test Results

Test Mode	Test Channel	Number of Hopping Channel[N]	Limit[N]	Verdict
DH5	2402	79	>=15	PASS
DH5	2480	79	>=15	PASS
2DH5	2402	79	>=15	PASS
2DH5	2480	79	>=15	PASS
3DH5	2402	79	>=15	PASS
3DH5	2480	79	>=15	PASS


Hopping Channel Number\_DH5\_2402

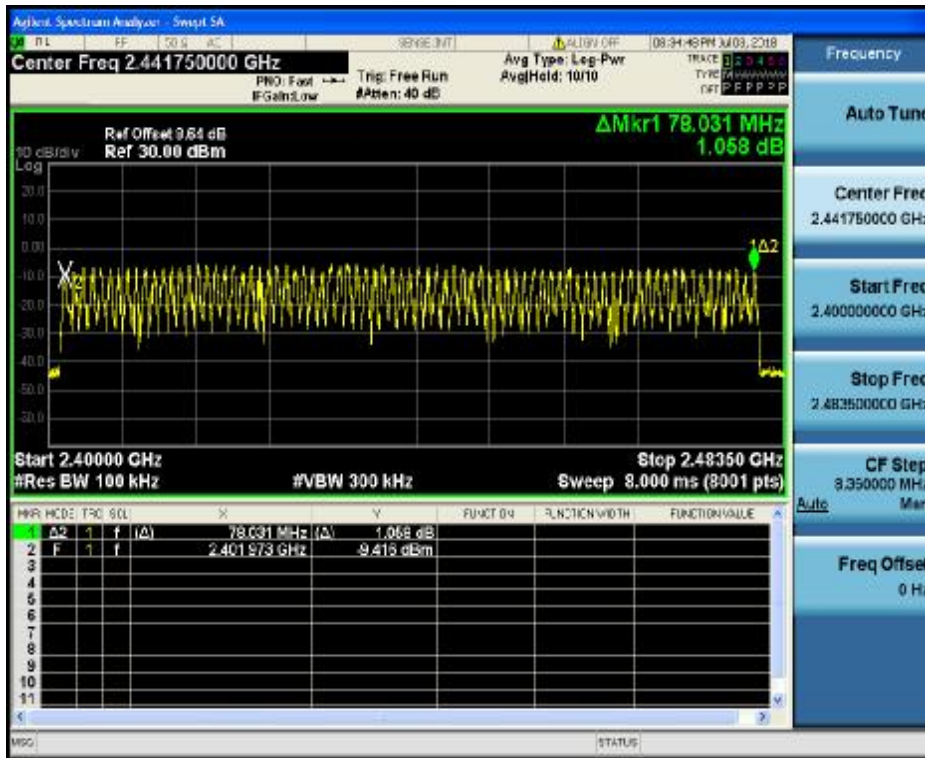


Hopping Channel Number\_DH5\_2480

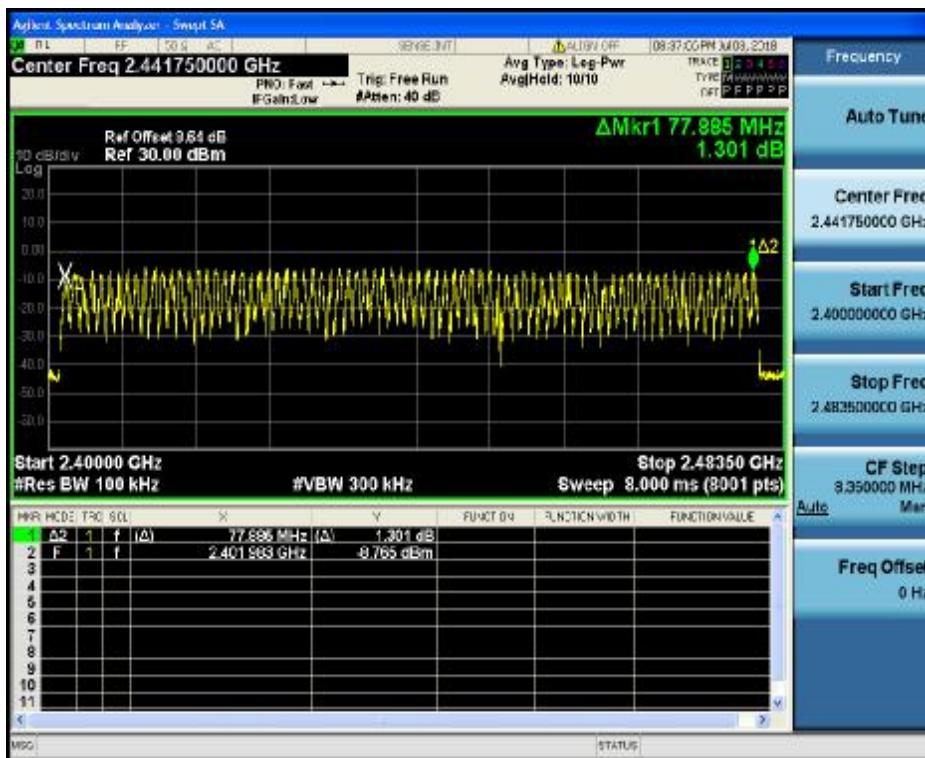

Hopping Channel Number\_2DH5\_2402

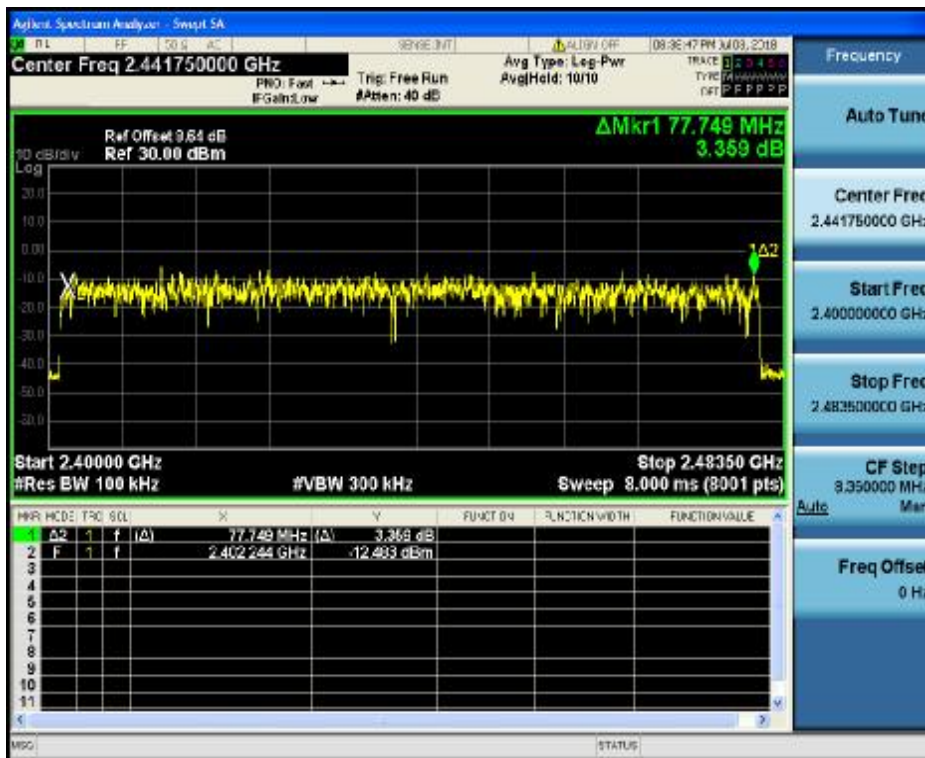

Hopping Channel Number\_2DH5\_2480

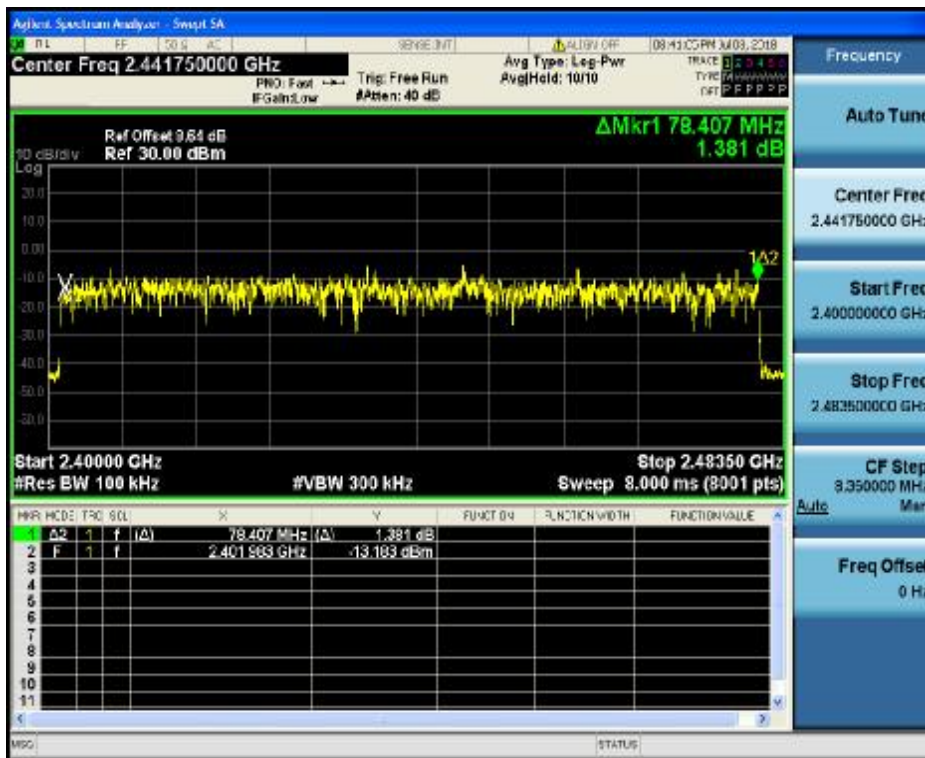



### 3.7. Time of Occupancy (Dwell Time)


#### Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 3MHz VBW, Span 0Hz.

#### Test Configuration



#### Test Results

Modulation	Packet	Pulse time (ms)	Dwell time (second)	Limit (second)	Result
GFSK	DH1	0.41	0.131	0.40	Pass
	DH3	1.66	0.266		
	DH5	2.91	0.310		
π/4DQPSK	2-DH1	0.42	0.134	0.40	Pass
	2-DH3	1.67	0.267		
	2-DH5	2.92	0.312		
8DPSK	3-DH1	0.42	0.134	0.40	Pass
	3-DH3	1.67	0.267		
	3-DH5	2.92	0.312		


Note:

- We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
- $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 2 \div 79) \times 31.6 \text{ Second}$  for DH1, 2-DH1, 3-DH1  
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 4 \div 79) \times 31.6 \text{ Second}$  for DH3, 2-DH3, 3-DH3  
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 6 \div 79) \times 31.6 \text{ Second}$  for DH5, 2-DH5, 3-DH5


Test plot as follows:



### GFSK Modulation

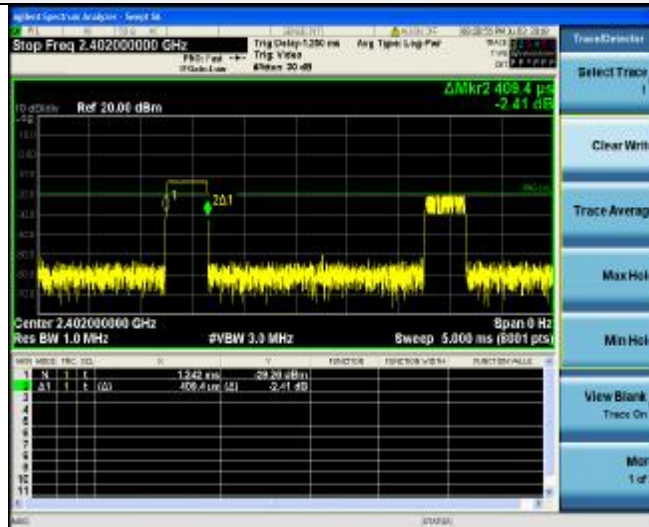

DH1

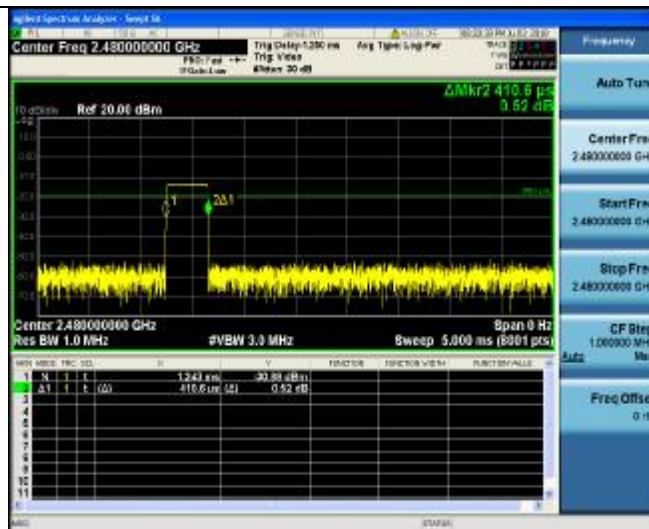


DH3




DH5


$\pi/4$ DQPSK Modulation

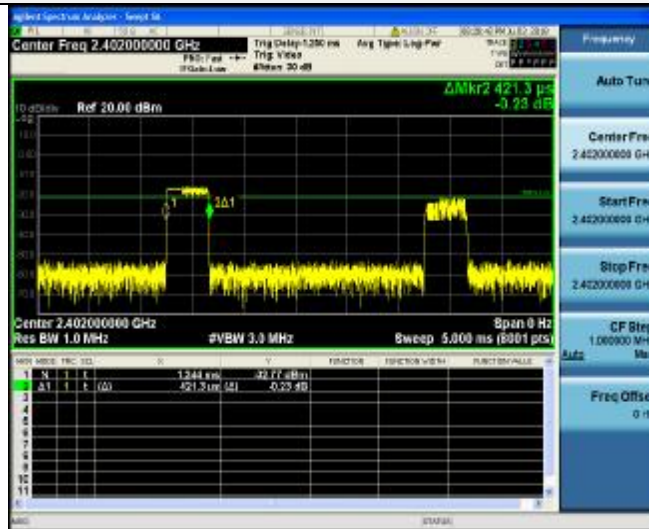

2-DH1

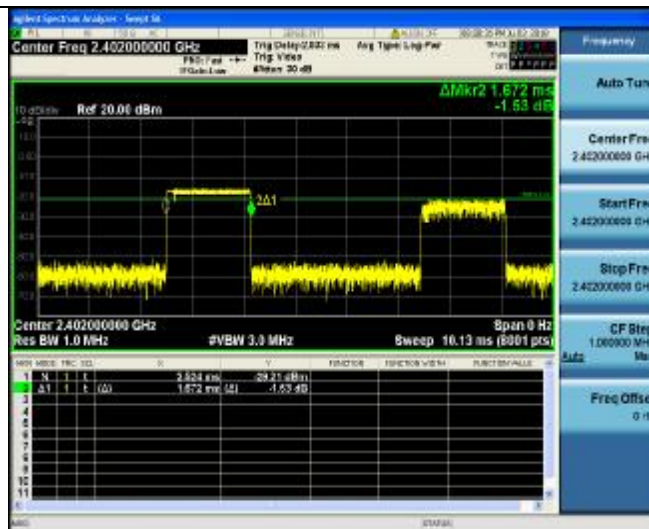


2-DH3

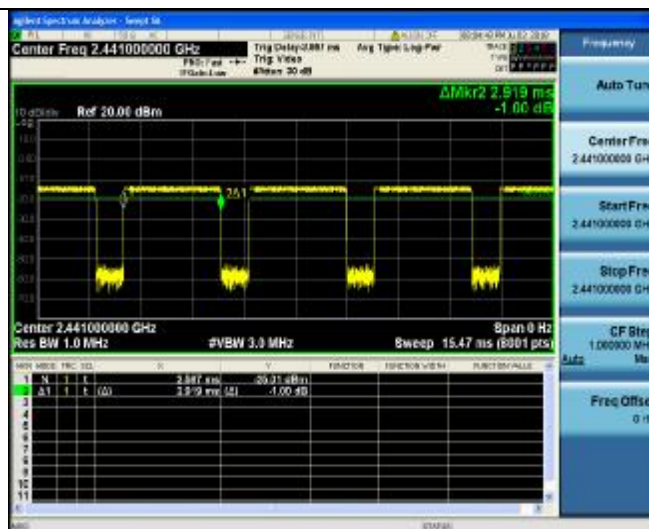


2-DH5


### 8DPSK Modulation

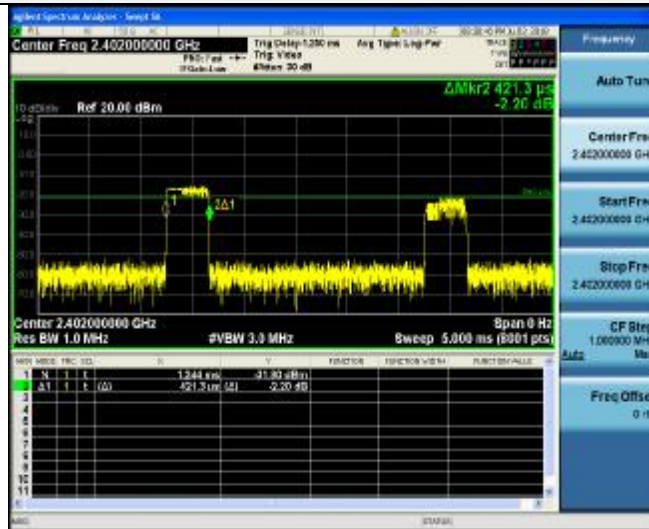

### 3-DH1

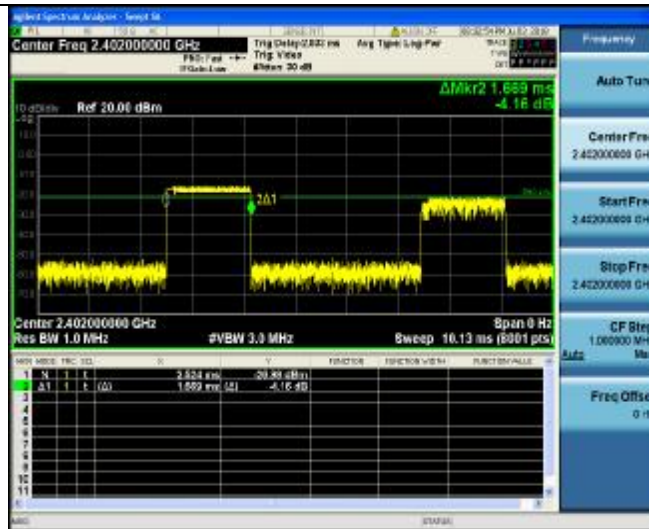

### 3-DH3

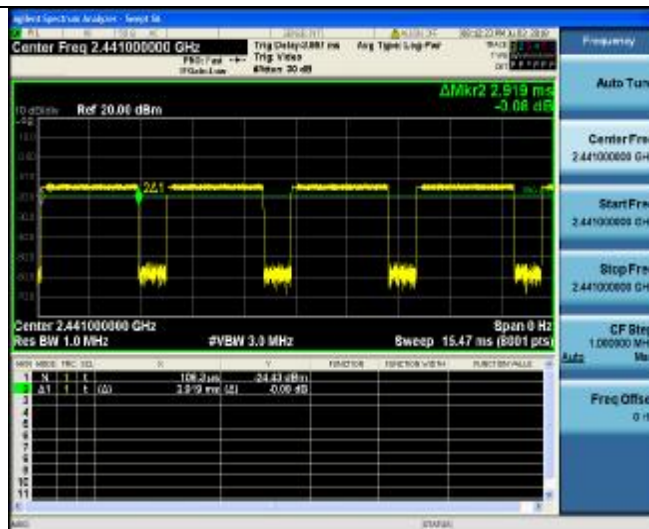

### 3-DH5

### 3.8. Out-of-band Emissions

#### Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

#### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band-edge and out-of-band emissions.

#### Test Configuration




#### Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band-edge measurement data.


We measured all conditions (DH1, DH3, DH5) and recorded worst case at DH5 and 3DH5

Test plot as follows:


Band-edge for RF Conducted Emissions\_DH5\_2402\_Hopping Off

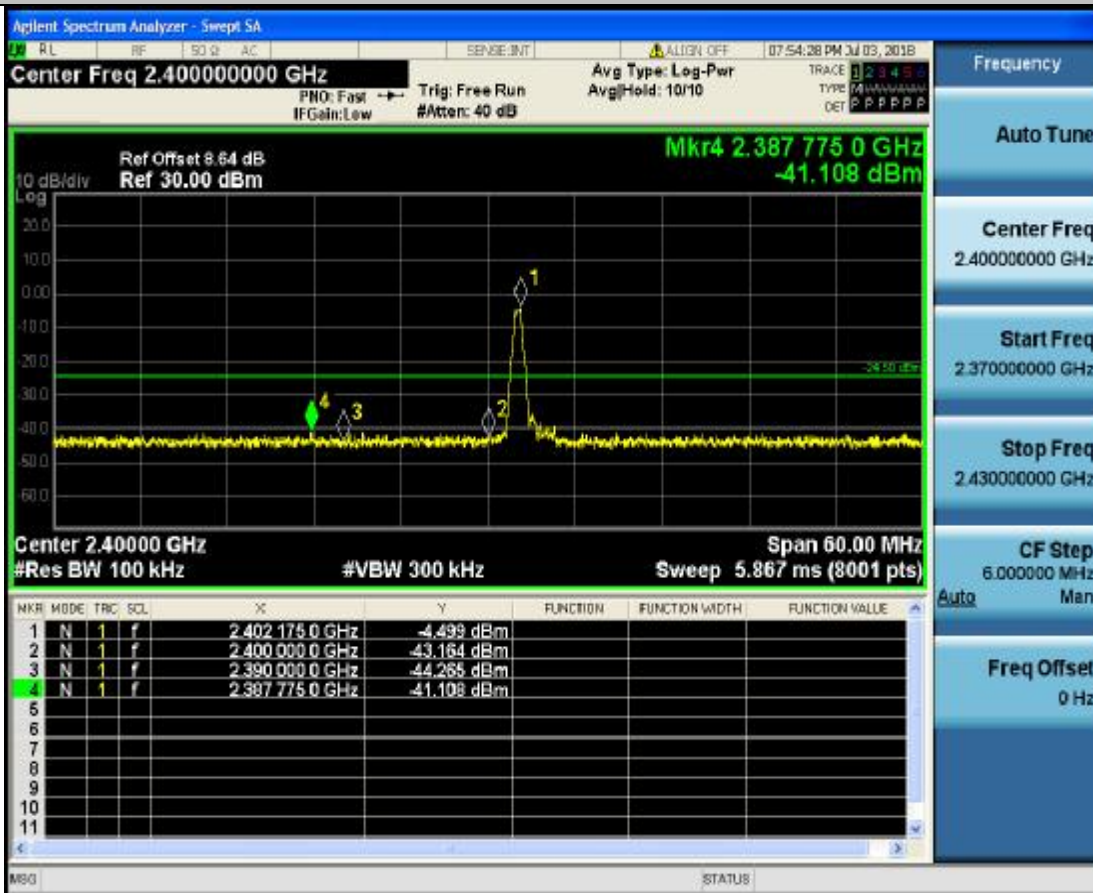


Band-edge for RF Conducted Emissions\_DH5\_2480\_Hopping Off

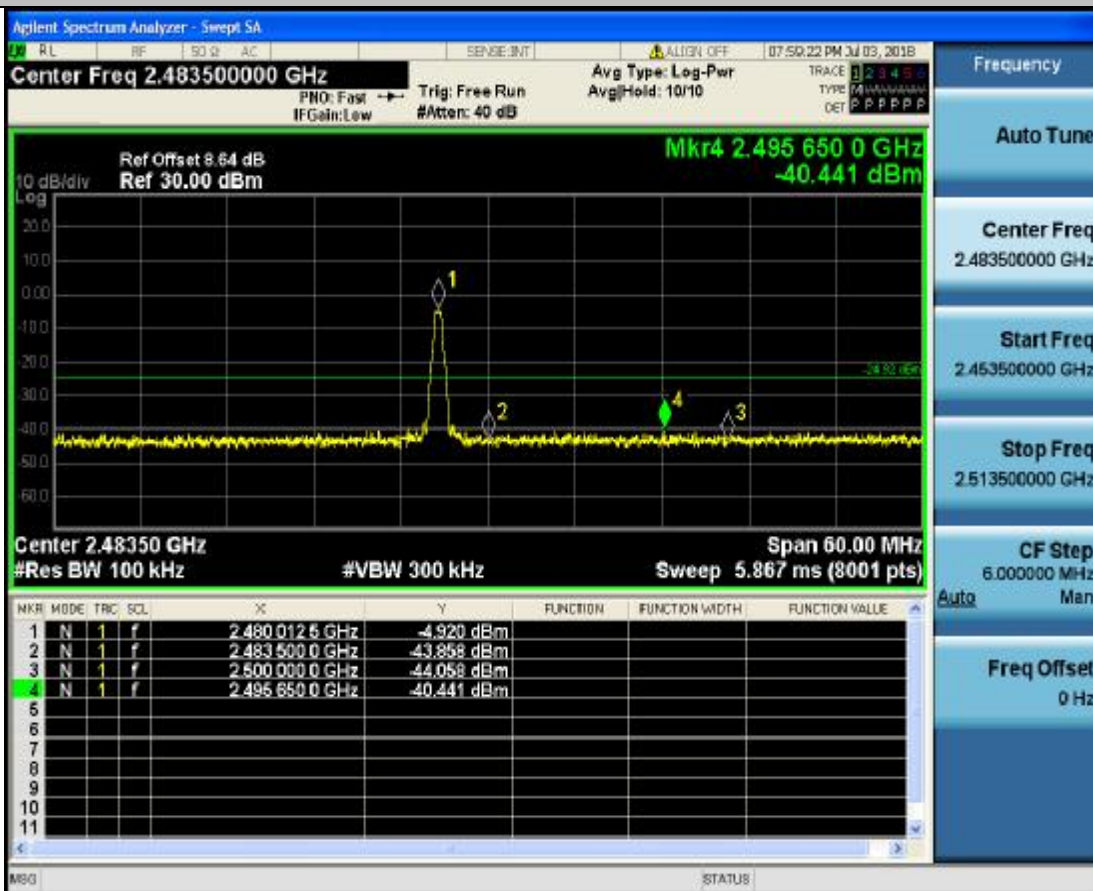


Band-edge for RF Conducted Emissions\_2DH5\_2402\_Hopping Off

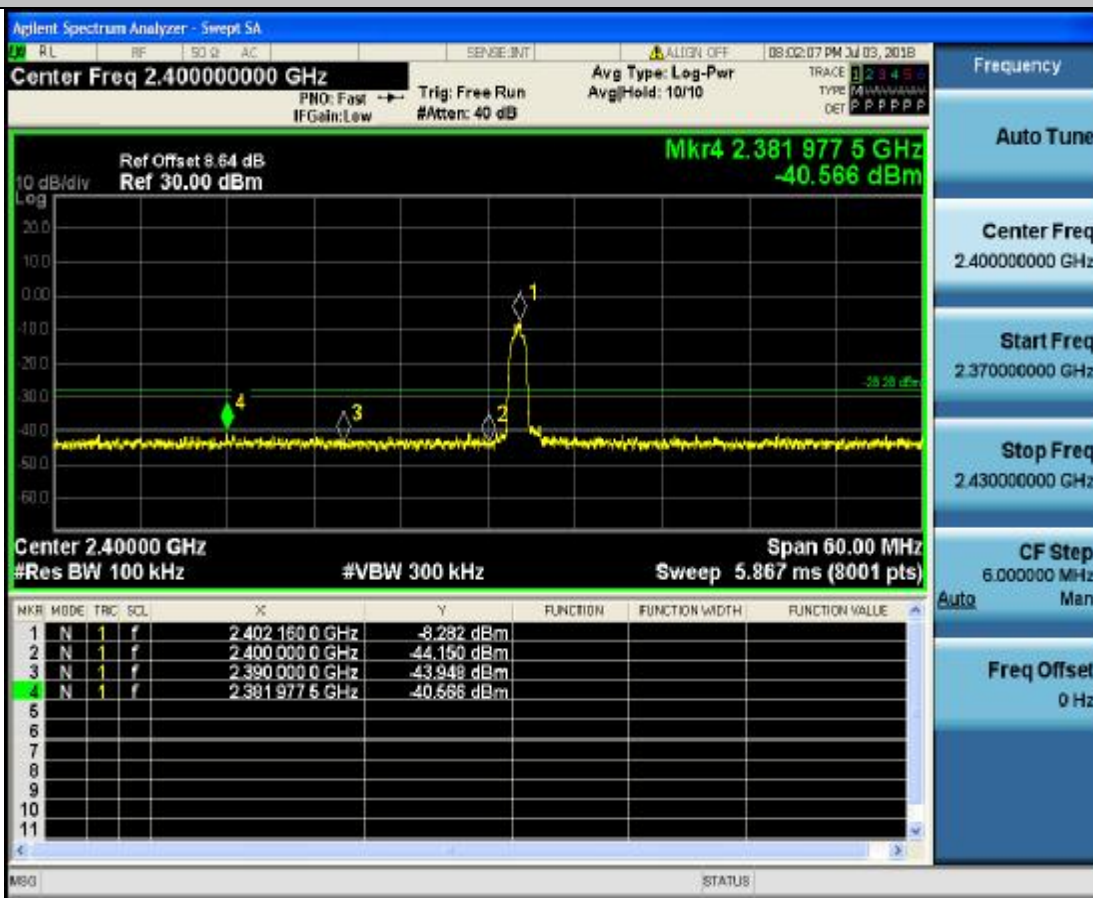


Band-edge for RF Conducted Emissions\_2DH5\_2480\_Hopping Off

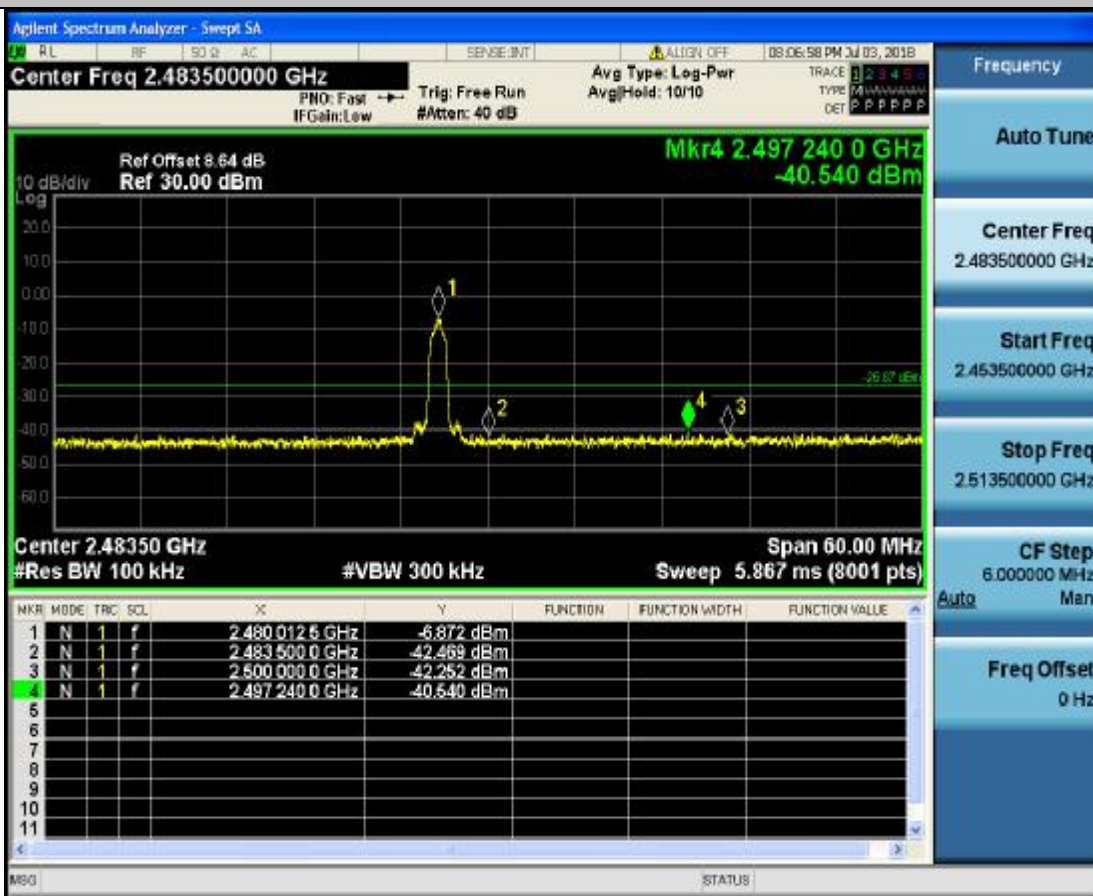

Band-edge for RF Conducted Emissions\_3DH5\_2402\_Hopping Off

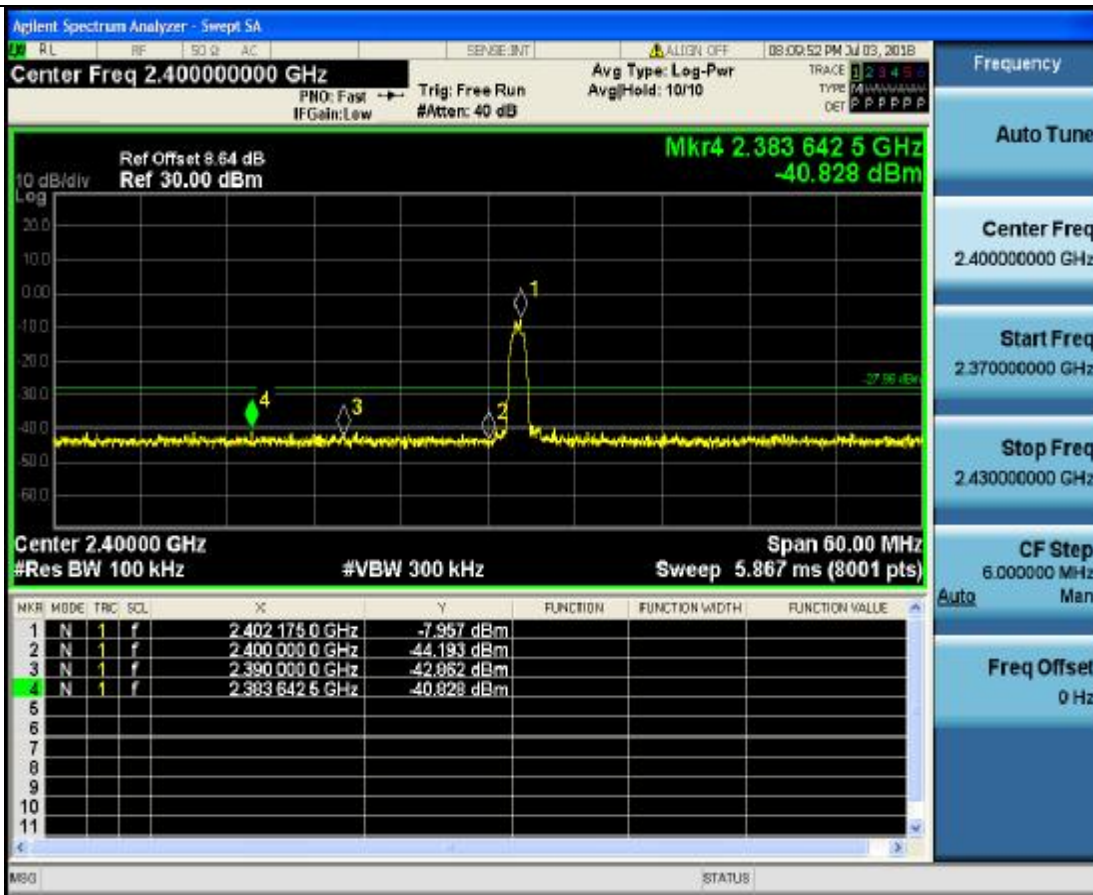


Band-edge for RF Conducted Emissions\_3DH5\_2480\_Hopping Off

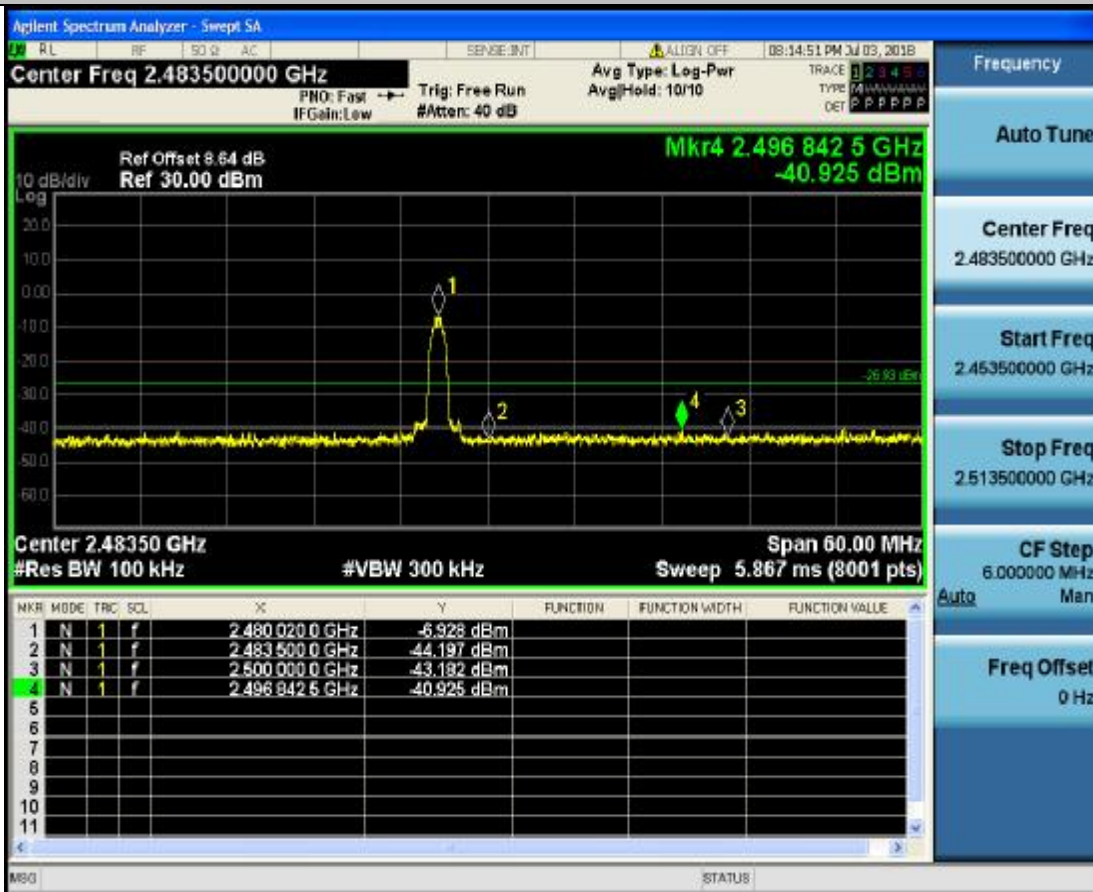

Band-edge for RF Conducted Emissions\_DH5\_2402\_Hopping On



Band-edge for RF Conducted Emissions\_DH5\_2480\_Hopping On

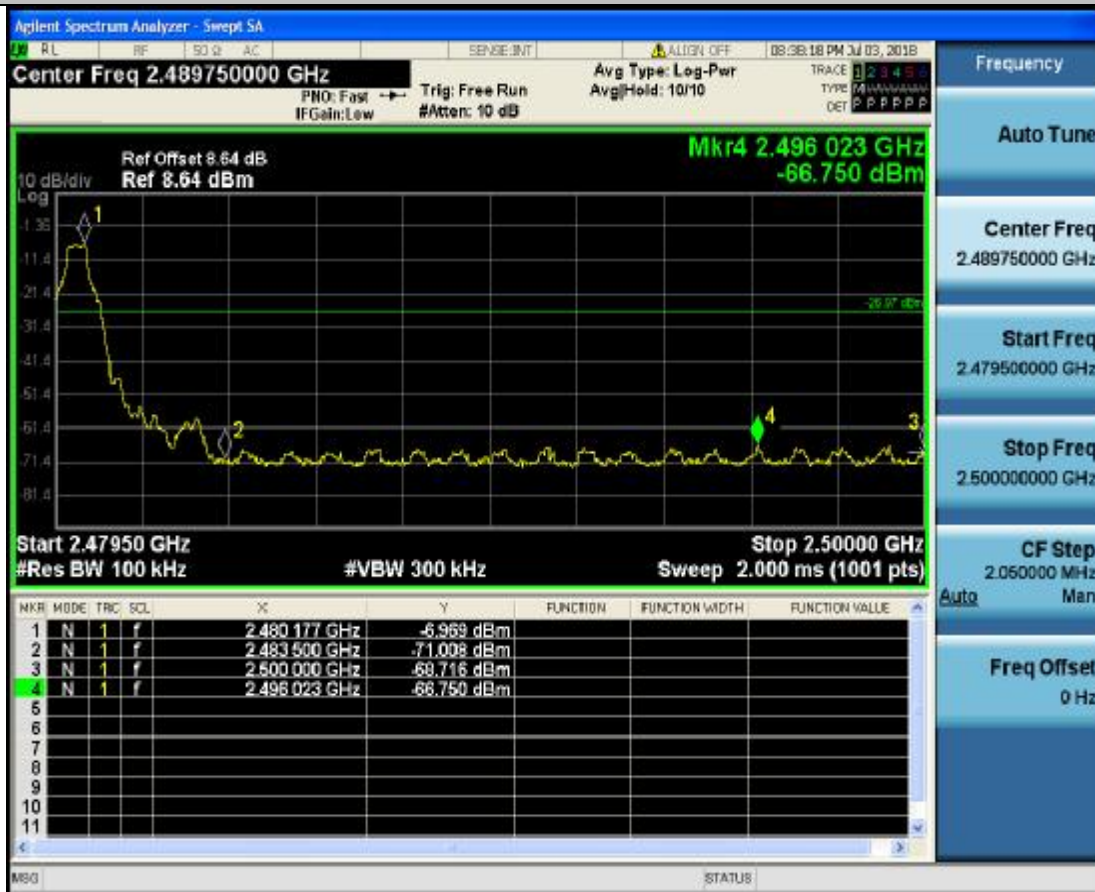

Band-edge for RF Conducted Emissions\_2DH5\_2402\_Hopping On





Band-edge for RF Conducted Emissions\_2DH5\_2480\_Hopping On



Band-edge for RF Conducted Emissions\_3DH5\_2402\_Hopping On



Band-edge for RF Conducted Emissions\_3DH5\_2480\_Hopping On



### 3.9. Pseudorandom Frequency Hopping Sequence

#### TEST APPLICABLE


#### **For 47 CFR Part 15C section 15.247 (a) (1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### **EUT Pseudorandom Frequency Hopping Sequence Requirement**


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

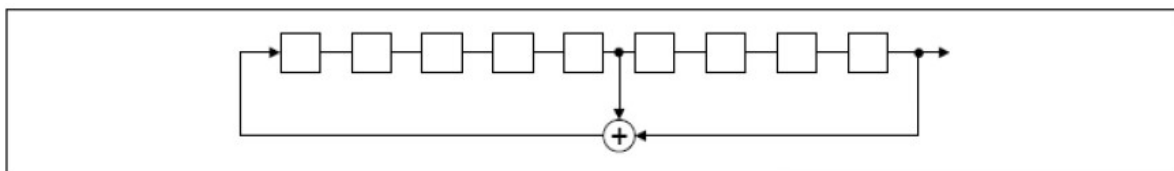

*Linear Feedback Shift Register for Generation of the PRBS sequence*


An example of pseudorandom frequency hopping sequence as follows:

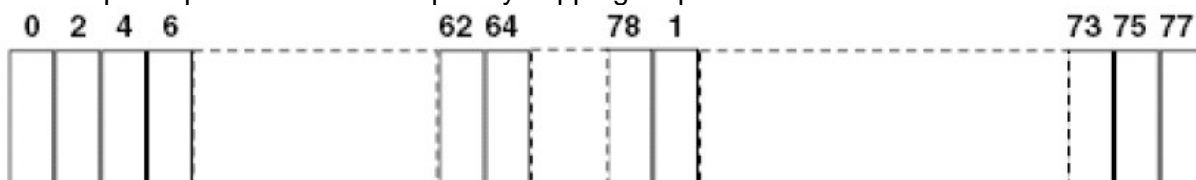

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

## 4. Test Setup Photos of the EUT

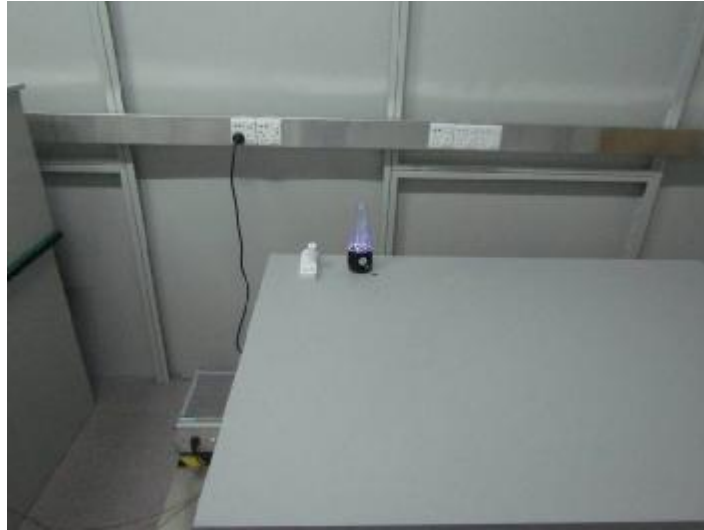

# EUT





