

FCC Test Report

Report No.: AGC00737180506FE03

FCC ID : 2AMH2-MBH15

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Bluetooth headset with microphone

BRAND NAME : MPOW

MODEL NAME : See Page 4

CLIENT: MPOW Technology Co., Ltd.

DATE OF ISSUE : May 10, 2018

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249

REPORT VERSION V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spower this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 60

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	Sold Transfer	May 10, 2018	Valid	Initial release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8 8 9
6. TEST FACILITY	10
7.TEST METHOD	
8. TEST EQUIPMENT LIST	11
9. RADIATED EMISSION	12
9.1TEST LIMIT	12 13 15
10. BAND EDGE EMISSION	39
10.1. MEASUREMENT PROCEDURE 10.2 TEST SETUP 10.3 RADIATED TEST RESULT	39
11. 20DB BANDWIDTH	44
11.1. MEASUREMENT PROCEDURE	44
12. FCC LINE CONDUCTED EMISSION TEST	
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	52 52
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	53
APPENDIX B. PHOTOGRAPHS OF FUT	55



Page 4 of 60

1. VERIFICATION OF CONFORMITY

Applicant	MPOW Technology Co., Ltd.
Address	Room 603, 6/F, Hang Pont Commercial Building, 31 Tonkin Street, Cheung Sha Wan, Kowloon, Hongkong, China
Manufacturer	MPOW Technology Co., Ltd.
Address	Room 603, 6/F, Hang Pont Commercial Building, 31 Tonkin Street, Cheung Sha Wan, Kowloon, Hongkong, China
Product Designation	Bluetooth headset with microphone
Brand Name	MPOW
Test Model	MBH15
Series Model	MBH15D, MPBH015AD, BH015A,BH015B, MPBH015BS, MPBH015AB
Difference description	All the same except for the appearance color.
Date of test	May 08, 2018 to May 10, 2018
Deviation	None
Condition of Test Sample	Normal State of the state of th
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

Tested By	Jorden Word	
A Captal Compliance	Jonhen Wang(Wang Yonghuan)	May 10, 2018
	and change	
Reviewed By_		e St. Hallon of Chr
	Cool Cheng(Cheng Mengguo)	May 10, 2018
Approved By	Formers ce	
Approved by	Forrest Lei(Lei Yonggang) Authorized Officer	May 10, 2018

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 5 of 60

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	-5.26dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V2.1+EDR
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK
Number of channels	79 for BR/EDR
Hardware Version	BH+M6_V004N3
Software Version	V1.0
Antenna Designation	Ceramic Antenna
Antenna Gain	OdBi A Marine Company of the Company
Power Supply	DC 3.7V by battery
	nly used for charging and can't be used to transfer data with PC. of EUT didn't work when charging.

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

Frequency Band	Channel Number	Frequency
10000000000000000000000000000000000000	O The state of column of the state of column of the state	2402MHz
(S) SEE THOM of Code CON	Col 1 Col	2403MHz
GC ME CO		The state of the s
	38	2440 MHz
2400~2483.5MHz	9 A A A A A A A A A A A A A A A A A A A	2441 MHz
of Goods Con Con Street Con Con Control Con	40	2442 MHz
		The state of the s
拉测	77	2479 MHz
(a) The state of contract of the state of th	78	2480 MHz



Page 6 of 60

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.


- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

4. DESCRIPTION OF TEST MODES


	<u> </u>	-mil	up.	THE STA
NO.		TEST MODE DESCI	RIPTION	
@ ##	(a) The state of Global Co.	Low channel GF	-SK	
2 3	0 100	Middle channel G	GFSK (S)	IN TO MADE OF THE PARTY OF THE
3	10 mm	High channel Gl	FSK	ijon of Glov.
4	Inflatice © Manager de l'action de l'actio	Low channel π /4-	DQPSK	
© #5 Juny of Globa	- (C) - CC	Middle channel π /4-	-DQPSK	不拉到
6		High channel π /4-[DQPSK	@ Manager of Global
7	The state of the s	Low channel 8D	PSK	G "
# H d o o o o o o	E Andro of Carlo	Middle channel 8I	DPSK	TITE:
90		High channel 8D	PSK	The Compliance
10		BT Link	Cons.	C Artestal
10	The state of	DILIIK	Altes	

Note

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.





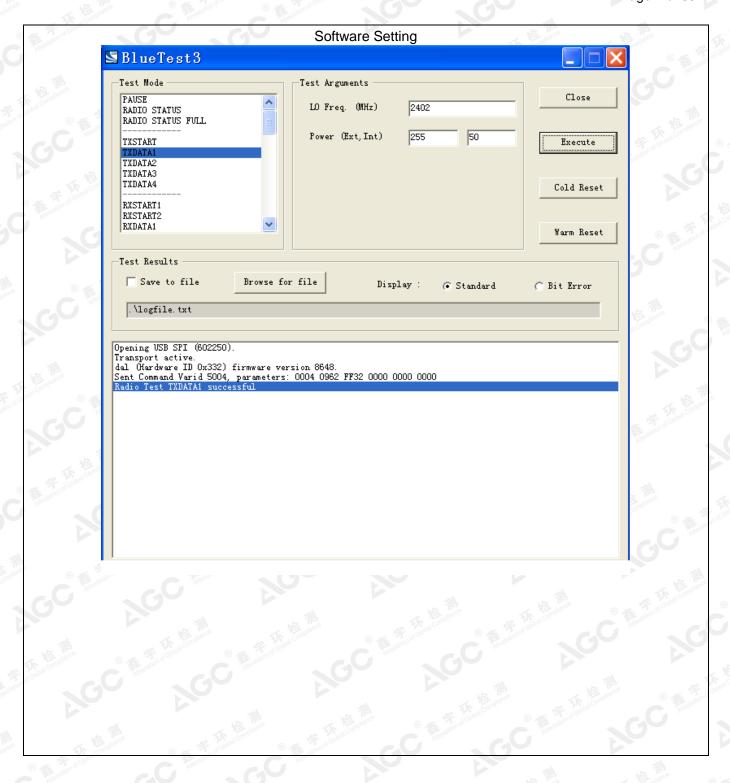

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gett.com.



Page 8 of 60

5. SYSTEM TEST CONFIGURATION 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

EUT

Configure 2: (Control continuous TX)

	station.		
EUT		Control box	PC

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
Alfrestation of Global	Bluetooth headset with microphone	MPOW	MBH15	EUT
2	Battery	YJ	551430	Accessory
3	PC	APPLE	A1465	A.E
4 🔍	Control box	CSR	USB_SPI_TOOLS	A.E
5	USB Cable	N/A	1m unshielded	A.E



Page 9 of 60

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.215	Bandwidth	Compliant

Note: N/A means it's not applicable to this item.



Page 10 of 60

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP Lab Code	600153-0
Designation Number	CN5028
Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0



age 11 of 60

7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. TEST EQUIPMENT LIST

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Loop Antenna	A.H.Systems,Inc	SAS-562B		Mar. 01, 2018	Feb. 28, 2019
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018
Filter (2.4-2.483GHz)	Micro-tronics	087		Jun.20, 2017	Jun.19, 2018



Page 12 of 60

9. RADIATED EMISSION

9.1TEST LIMIT

Standard FCC15.249

Fundamental	Field Strength of Fundamental	Field Strength of Harmonics
Frequency	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field Strengths Limit				
(MHz)	Meters	μ V/m	dB(μV)/m			
0.009 ~ 0.490	300	2400/F(kHz)	9			
0.490 ~ 1.705	30	24000/F(kHz)	技訓			
1.705 ~ 30	30	30 (1)	E Cobaco (Color of Color of Co			
30 ~ 88	3 F 1000	100	40.0			
88 ~ 216	3 - 6	150	43.5			
216 ~ 960	3	200	46.0			
960 ~ 1000	3	500	54.0			
Above 1000	3. I	Other:74.0 dB(μV)/m (Average)	(Peak) 54.0 dB(μV)/m			

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 13 of 60

9.2. MEASUREMENT PROCEDURE

- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 14 of 60


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 2MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




9.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

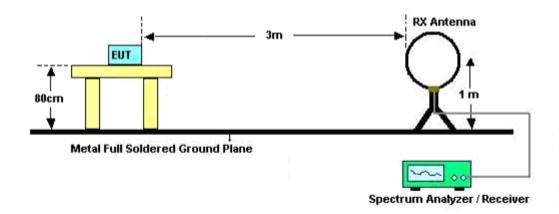

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

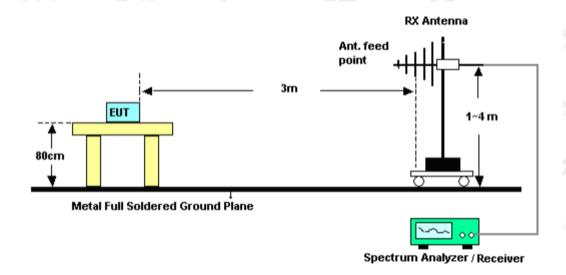


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 16 of 60

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

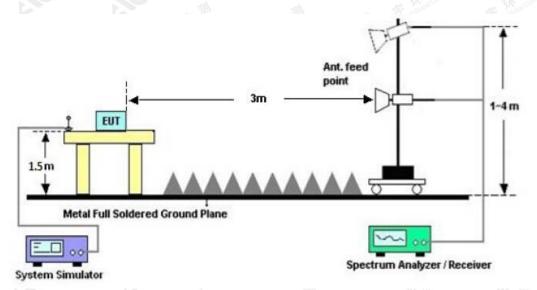

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at although the confirmed at although the confirmed at all the confirme



Page 17 of 60

9.4. TEST RESULT

FOR BR/EDR

(Worst modulation: GFSK)

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.agc. gent.com.



Page 18 of 60

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

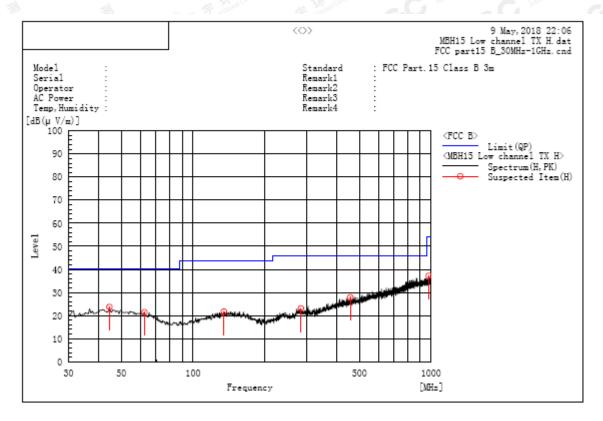


A. Suspected List:

Frequency MHz	Polarization Reading dB dB(uV/m) PK dB(uV/m) QP		Margin dB	Pass/Fail	Height cm	Angle deg			
44.550	H	6.4	17.3	23.7	40.0	16.3	Pass	150.0	70.5
62.495	Н	5.5	15.9	21.4	40.0	18.6	Pass	200.0	107.7
134.760	H	5.2	16.5	21.7	43.5	21.8	Pass	100.0	267.4
284.140	Н	5.4	17.7	23.1	46.0	22.9	Pass	200.0	320.4
457.770	Н	5.7	22.2	27.9	46.0	18.1	Pass	150.0	70.5
978.175	Н	6.4	30.9	37.3	54.0	16.7	Pass	150.0	70.5

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

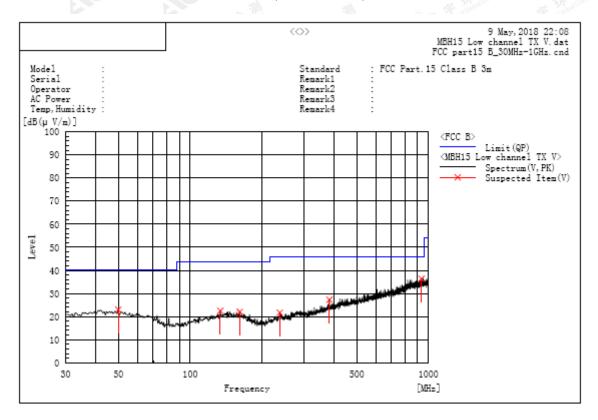

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(u∨/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
49.885	V	6.0	17.1	23.1	40.0	16.9	Pass	150.0	107.6
133.790	V	6.0	16.5	22.5	43.5	21.0	Pass	200.0	85.7
161.435	v	5.4	16.6	22.0	43.5	21.5	Pass	200.0	122.3
237.580	V	5.5	16.2	21.7	46.0	24.3	Pass	100.0	250.9
384.050	V	7.1	20.2	27.3	46.0	18.7	Pass	200.0	266.9
934.525	v	5.9	30.5	36.4	46.0	9.6	Pass	200.0	266.9


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

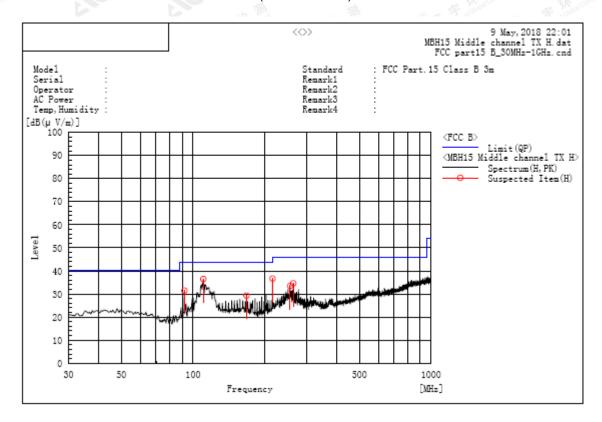


A. Suspected List:

Frequency MHz	Polarization Readi		Factor dB (1/m)	Level dB(u√/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
92.080	H	19.1	12.4	31.5	43.5	12.0	Pass	150.0	350.6
110.510	Н	21.8	14.6	36.4	43.5	7.1	Pass	150.0	228.3
167.740	Н	13.2	16.1	29.3	43.5	14.2	Pass	200.0	288.5
215.755	Н	22.4	14.3	36.7	43.5	6.8	Pass	150.0	290.9
256.010	Н	17.5	16.0	33.5	46.0	12.5	Pass	100.0	300.6
263.770	Н	18.5	16.1	34.6	46.0	11.4	Pass	100.0	301.8

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

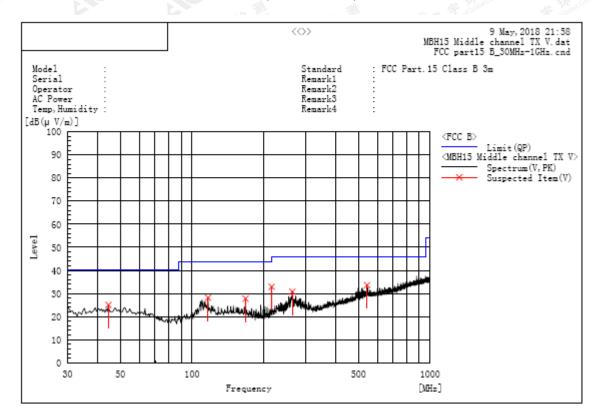

A. Suspected List:

Frequency MHz	Polarization	Reading Factorial Reading dB(uV)		Level dB(u√/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
44.550	V	7.8	17.3	25.1	40.0	14.9	Pass	100.0	91.4
116.815	V	13.1	15.1	28.2	43.5	15.3	Pass	200.0	350.3
167.740	v	11.7	16.1	27.8	43.5	15.7	Pass	100.0	308.4
215.755	v	18.6	14.3	32.9	43.5	10.6	Pass	100.0	290.3
263.770	V	14.7	16.1	30.8	46.0	15.2	Pass	200.0	340.7
543.615	v	9.9	23.7	33.6	46.0	12.4	Pass	100.0	321.0

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.





RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

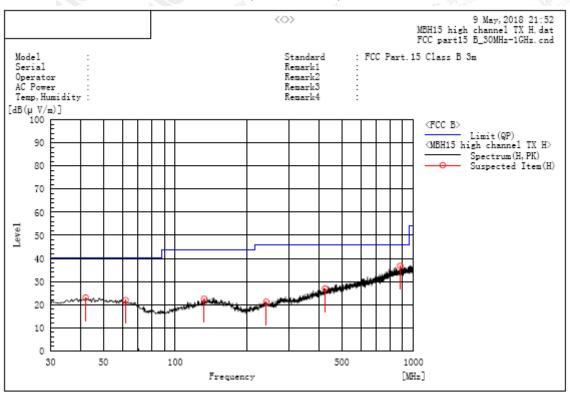

A. Suspected List:


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
42.125	Н	5.6	17.4	23.0	40.0	17.0	Pass	100.0	356.9
62.010	Н	5.9	16.0	21.9	40.0	18.1	Pass	200.0	316.9
132.335	Н	6.1	16.4	22.5	43.5	21.0	Pass	100.0	274.9
241.460	Н	5.0	16.2	21.2	46.0	24.8	Pass	150.0	327.3
425.760	Н	5.3	21.6	26.9	46.0	19.1	Pass	150.0	314.7
880.205	Н	6.7	30.0	36.7	46.0	9.3	Pass	200.0	356.4

RESULT: PASS



Page 23 of 60

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

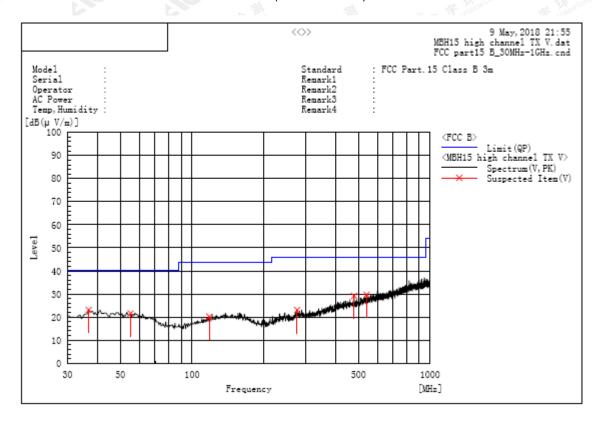

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
36.790	V	6.3	16.8	23.1	40.0	16.9	Pass	100.0	252.9
55.220	V	4.9	16.7	21.6	40.0	18.4	Pass	200.0	254.5
118.270	V	5.0	15.2	20.2	43.5	23.3	Pass	150.0	288.4
276.380	V	5.5	17.6	23.1	46.0	22.9	Pass	150.0	288.4
479.595	V	6.6	22.6	29.2	46.0	16.8	Pass	100.0	287.9
541.190	V	6.0	23.7	29.7	46.0	16.3	Pass	100.0	287.9

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.




Page 24 of 60

RADIATED EMISSION ABOVE 1GHz FOR BR/EDR

(Worst modulation: GFSK)

For Fundamental

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

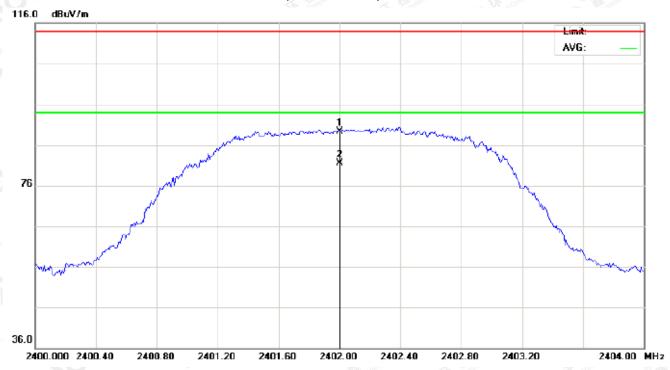


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	79.05	10.32	89.37	114.00	-24.63	peak			
2	*	2402.000	71.09	10.32	81.41	94.00	-12.59	AVG	100	233	

RESULT: PASS



Page 25 of 60

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

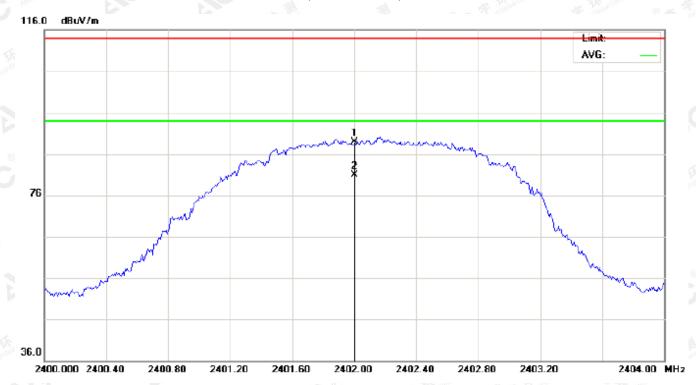

No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	78.65	10.32	88.97	114.00	-25.03	peak			
2	*	2402.000	70.58	10.32	80.90	94.00	-13.10	AVG	100	302	


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 26 of 60

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

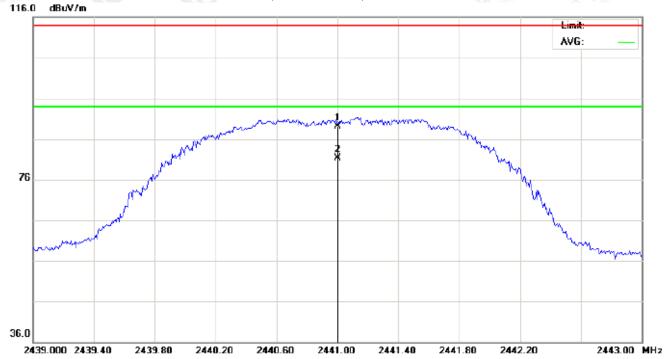

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	78.80	10.36	89.16	114.00	-24.84	peak			
2	*	2441.000	70.86	10.36	81.22	94.00	-12.78	AVG	100	236	


RESULT: PASS

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a step www.agc.goalt.com.



Page 27 of 60

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

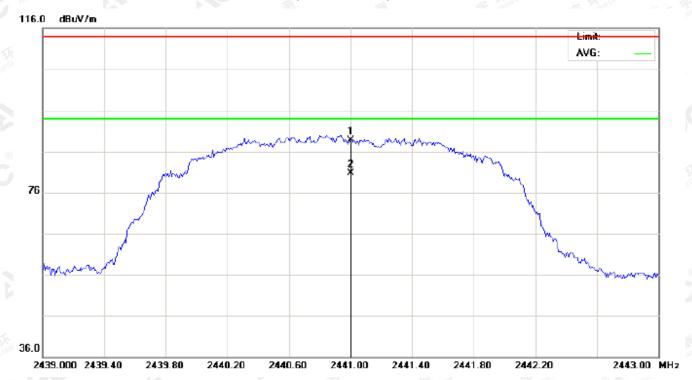


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	78.32	10.36	88.68	114.00	-25.32	peak			
2	*	2441.000	70.37	10.36	80.73	94.00	-13.27	AVG	100	121	

RESULT: PASS



Page 28 of 60

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

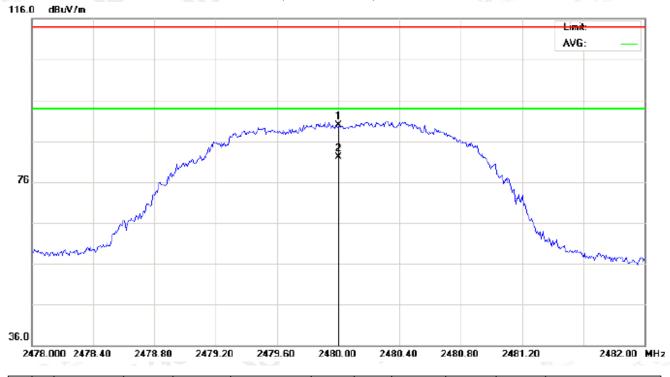

No	. M	1k	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	٠ [MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1			2480.000	79.53	10.41	89.94	114.00	-24.06	peak			
2	*	*	2480.000	71.62	10.41	82.03	94.00	-11.97	AVG	100	358	


RESULT: PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gett.com.



Page 29 of 60

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

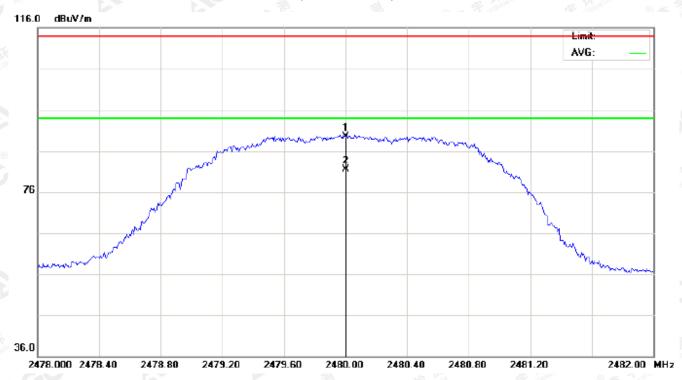

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2480.000	79.03	10.41	89.44	114.00	-24.56	peak			
2	*	2480.000	71.08	10.41	81.49	94.00	-12.51	AVG	100	147	

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Page 30 of 60

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	79.05	10.32	89.37	114	-24.63	Horizontal	
2402	78.65	10.32	88.97	114	-25.03	Vertical	
2441	78.80	10.36	89.16	114	-24.84	Horizontal	
2441	78.32	10.36	88.68	114	-25.32	Vertical	
2480	79.53	10.41	89.94	114	-24.06	Horizontal	
2480	79.03	10.41	89.44	114	-24.56	Vertical	

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	71.09	10.32	81.41	94	-12.59	Horizontal	
2402	70.58	10.32	80.90	94	-13.10	Vertical	
2441	70.86	10.36	81.22	94	-12.78	Horizontal	
2441	70.37	10.36	80.73	94	-13.27	Vertical	
2480	71.62	10.41	82.03	94	-11.97	Horizontal	
2480	71.08	10.41	81.49	94	-12.51	Vertical	



Page 31 of 60

2Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	78.56	10.32	88.88	114	-25.12	Horizontal
2402	78.17	10.32	88.49	114	-25.51	Vertical
2441	78.39	10.36	88.75	114	-25.25	Horizontal
2441	77.86	10.36	88.22	114	-25.78	Vertical
2480	79.03	10.41	89.44	114	-24.56	Horizontal
2480	78.55	10.41	88.96	114	-25.04	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	70.78	10.32	81.10	94	-12.90	Horizontal
2402	70.14	10.32	80.46	94	-13.54	Vertical
2441	70.41	10.36	80.77	94	-13.23	Horizontal
2441	69.99	10.36	80.35	94	-13.65	Vertical
2480	71.30	10.41	81.71	94	-12.29	Horizontal
2480	70.72	10.41	81.13	94	-12.87	Vertical



Page 32 of 60

3Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	78.14	10.32	88.46	114	-25.54	Horizontal
2402	77.87	10.32	88.19	114	-25.81	Vertical
2441	78.08	10.36	88.44	114	-25.56	Horizontal
2441	77.46	10.36	87.82	114	-26.18	Vertical
2480	78.55	10.41	88.96	114	-25.04	Horizontal
2480	78.07	10.41	88.48	114	-25.52	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	70.31	10.32	80.63	94	-13.37	Horizontal
2402	69.76	10.32	80.08	94	-13.92	Vertical
2441	70.09	10.36	80.45	94	-13.55	Horizontal
2441	69.61	10.36	79.97	94	-14.03	Vertical
2480	71.00	10.41	81.41	94	-12.59	Horizontal
2480	70.41	10.41	80.82	94	-13.18	Vertical




age 33 of 60

FOR BR/EDR

(Worst modulation: GFSK)

For Harmonics

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

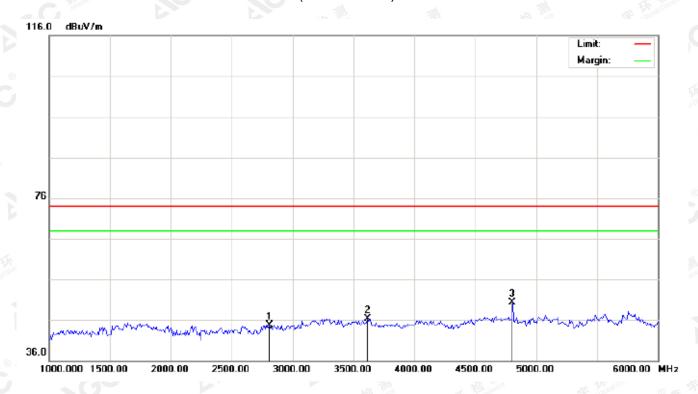


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2808.333	33.60	11.18	44.78	74.00	-29.22	peak			
2		3616.667	33.55	12.83	46.38	74.00	-27.62	peak			
3	*	4804.000	42.71	7.69	50.40	74.00	-23.60	peak			

RESULT: PASS



Page 34 of 60

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

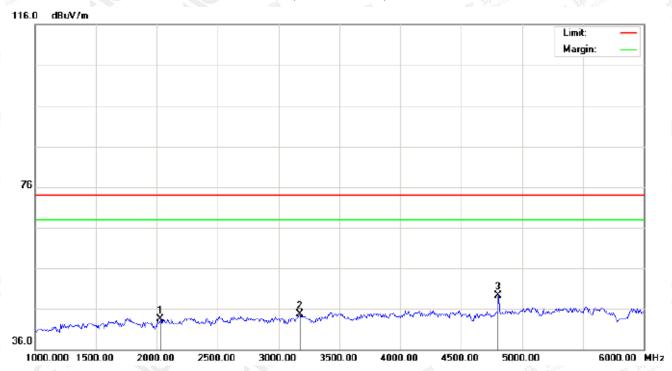

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2033.333	33.59	9.92	43.51	74.00	-30.49	peak			
2		3175.000	32.84	11.80	44.64	74.00	-29.36	peak			
3	*	4804.000	41.55	7.69	49.24	74.00	-24.76	peak			


RESULT: PASS

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.



Page 35 of 60

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

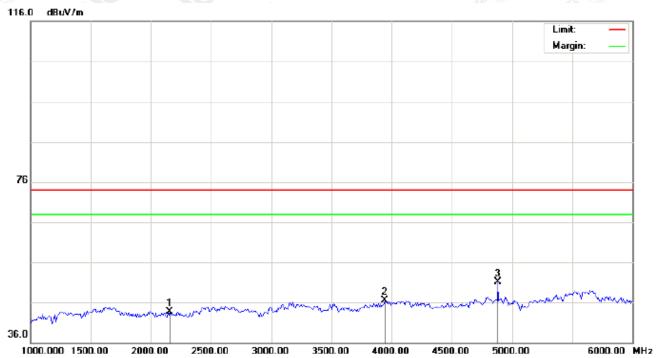

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2158.333	33.58	10.05	43.63	74.00	-30.37	peak			
2		3941.667	31.60	14.83	46.43	74.00	-27.57	peak			
3	*	4882.000	43.16	7.89	51.05	74.00	-22.95	peak			


RESULT: PASS

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 36 of 60

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

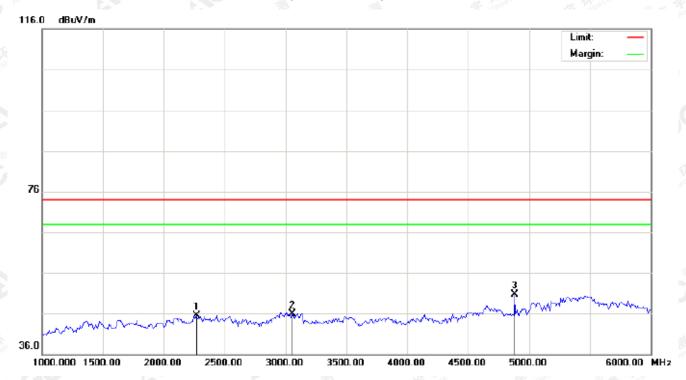

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2266.667	35.33	10.17	45.50	74.00	-28.50	peak			
2		3058.333	34.15	11.69	45.84	74.00	-28.16	peak			
3	*	4882.000	42.89	7.89	50.78	74.00	-23.22	peak			


RESULT: PASS

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a step www.agc.goalt.com.



Page 37 of 60

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

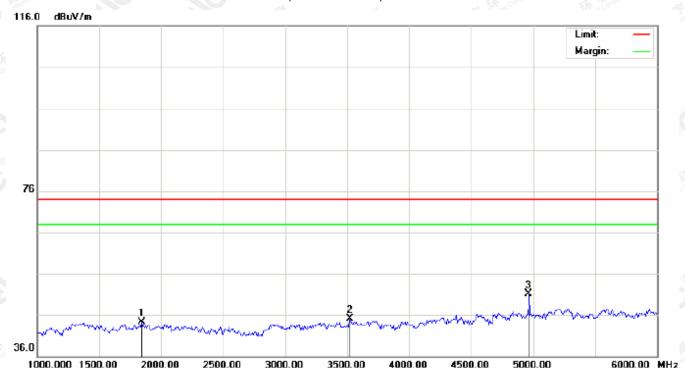

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1841.667	36.07	8.21	44.28	74.00	-29.72	peak			
2		3525.000	32.79	12.26	45.05	74.00	-28.95	peak			
3	*	4960.000	43.10	8.09	51.19	74.00	-22.81	peak			


DECILIT: DACC

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 38 of 60

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

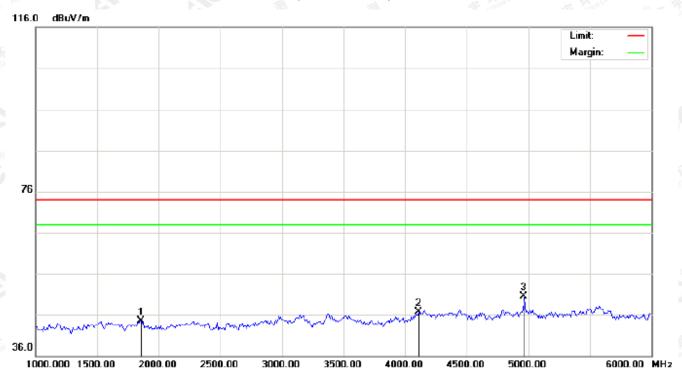

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		1858.333	36.07	8.39	44.46	74.00	-29.54	peak			
2		4108.333	33.41	13.39	46.80	74.00	-27.20	peak			
3	*	4960.000	42.41	8.09	50.50	74.00	-23.50	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 39 of 60

10. BAND EDGE EMISSION


10.1. MEASUREMENT PROCEDURE

- 1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

	Start frequenc	y(MHz)		Stop frequency(MHz)			
	2200	Kimplence	The Committee	® A station of G	2405	100	
(S) ### (1)	2478	3lobal C	Autostation of Glob	-,0 "	2500		

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

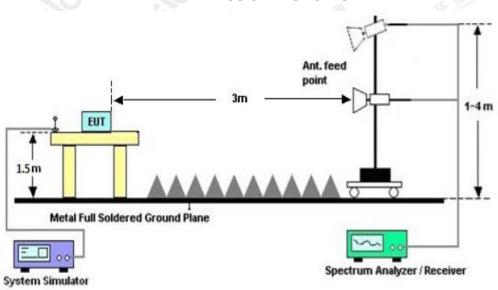

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 40 of 60

10.3 RADIATED TEST RESULT

FOR BR/EDR

(Worst modulation: GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal



	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
	1		2352.725	32.27	10.27	42.54	74.00	-31.46	peak			
	2		2390.000	32.50	10.31	42.81	74.00	-31.19	peak			
	3		2400.000	43.97	10.32	54.29	74.00	-19.71	peak			
	4		2400.000	40.35	10.32	50.67	54.00	-3.33	AVG	100	134	
ŝ	5	*	2402.000	78.92	10.32	89.24	74.00	15.24	peak			
	6	Х	2402.000	70.96	10.32	81.28	74.00	7.28	AVG	100	247	

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.



Page 41 of 60

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical




No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2353.408	32.10	10.27	42.37	74.00	-31.63	peak			
2		2390.000	31.21	10.31	41.52	74.00	-32.48	peak			
3		2400.000	38.56	10.32	48.88	74.00	-25.12	peak			
4	*	2402.000	78.52	10.32	88.84	74.00	14.84	peak			
5	Х	2402.000	70.46	10.32	80.78	74.00	6.78	AVG	100	157	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 42 of 60

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

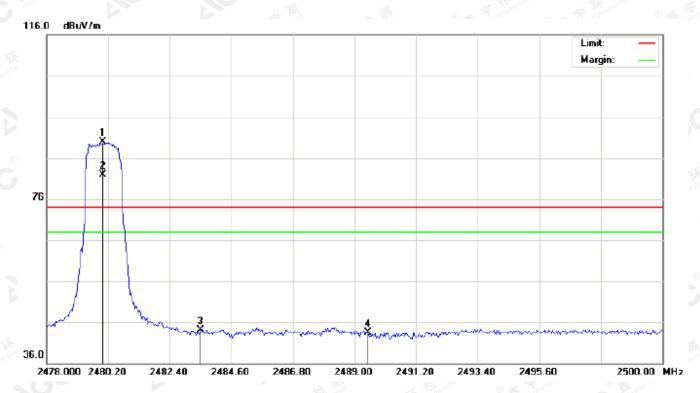


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	79.42	10.41	89.83	74.00	15.83	peak			
2	Х	2480.000	71.51	10.41	81.92	74.00	7.92	AVG	100	261	
3		2483.500	33.69	10.41	44.10	74.00	-29.90	peak			
4		2489.477	33.03	10.42	43.45	74.00	-30.55	peak			

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.



Page 43 of 60

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

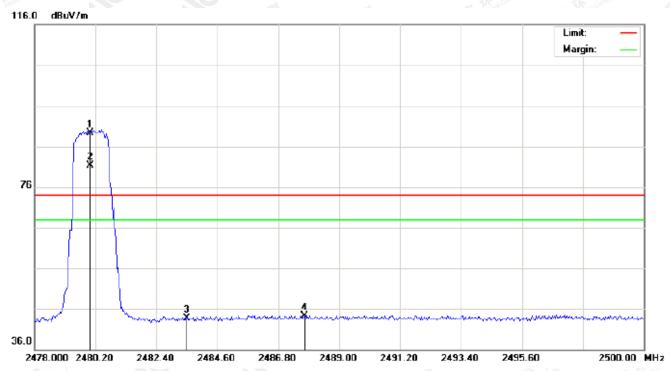

1	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
	1	*	2480.000	78.91	10.41	89.32	74.00	15.32	peak			
	2	Х	2480.000	70.94	10.41	81.35	74.00	7.35	AVG	100	134	
	3		2483.500	33.26	10.41	43.67	74.00	-30.33	peak			
	4		2487.753	33.95	10.42	44.37	74.00	-29.63	peak			

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Page 44 of 60

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ 3RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

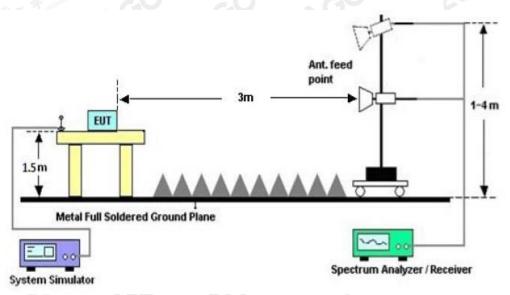

11.3. LIMITS AND MEASUREMENT RESULTS


FOR BR/EDR

BLUETO	OOTH 1MBPS LIN	MITS AND MEASU	REMENT RESULT						
	Measurement Result								
Applicable Limits		Decult							
		99%OBW (MHz)	-20dB BW(MHz)	Result					
Stoke Company	Low Channel	0.931	1.258	PASS					
N/A	Middle Channel	0.925	1.249	PASS					
700	High Channel	0.932	1.273	PASS					


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

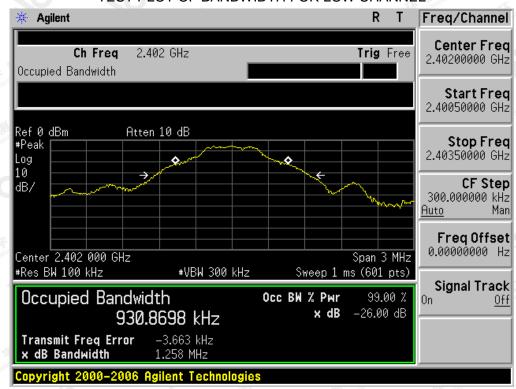

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

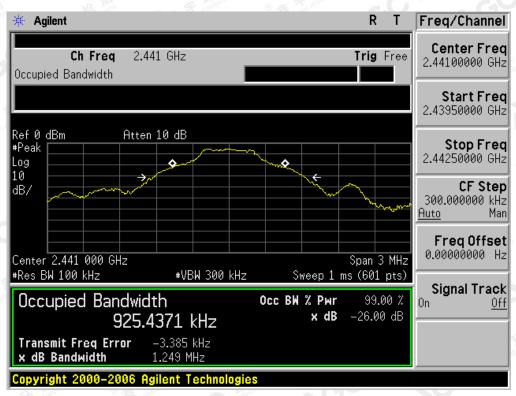


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.





TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

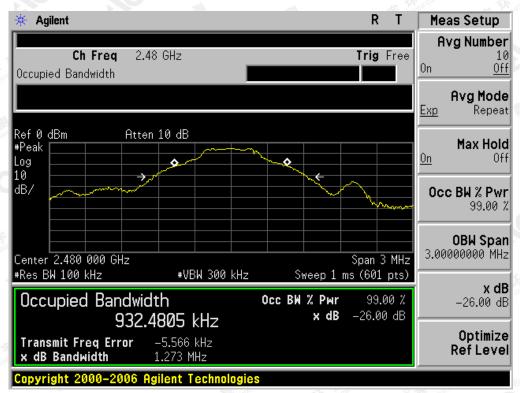


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 47 of 60

BLUET	OOTH 2MBPS LIN	MITS AND MEASU	REMENT RESULT		
		Measure	ement Result		
Applicable Limits		Result			
		99%OBW (MHz)	-20dB BW(MHz)	Nesuit	
T. Bridge	Low Channel	1.177	1.466	PASS	
N/A	Middle Channel	1.220	1.476	PASS	
CC "	High Channel	1.212	1.480	PASS	

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

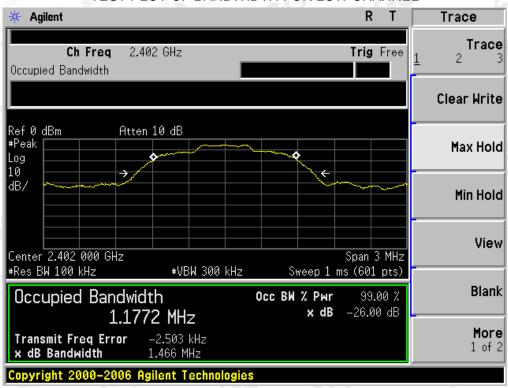


The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.






TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

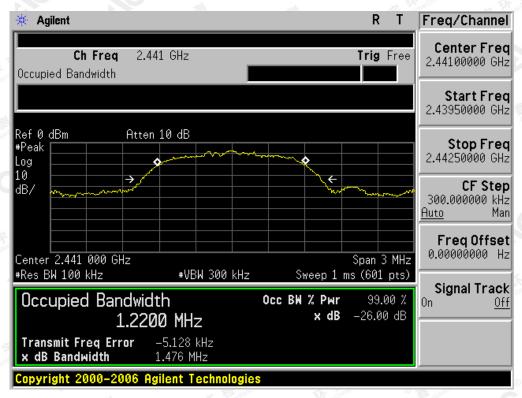

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

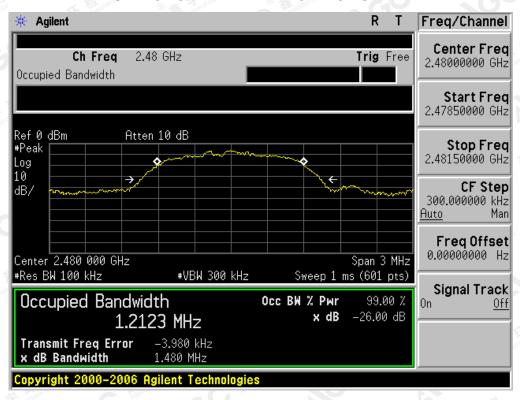


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 49 of 60

BLUETO	OOTH 3MBPS LIN	MITS AND MEASU	REMENT RESULT	24 10					
		Measurement Result							
Applicable Limits		Result							
		99%OBW (MHz)	-20dB BW(MHz)	Nesuit					
The fill the state of the state	Low Channel	1.229	1.493	PASS					
N/A	Middle Channel	1.220	1.480	PASS					
	High Channel	1.231	1.479	PASS					


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

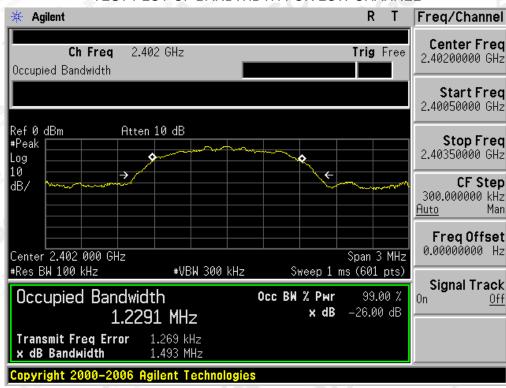


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

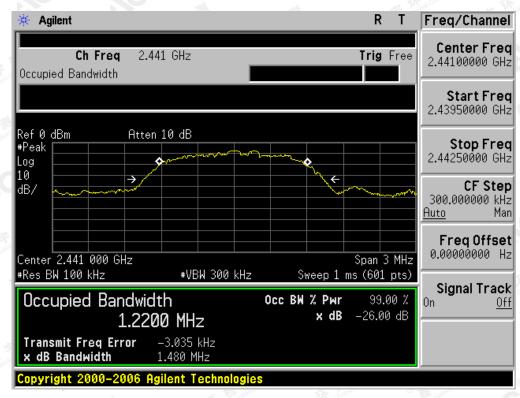

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

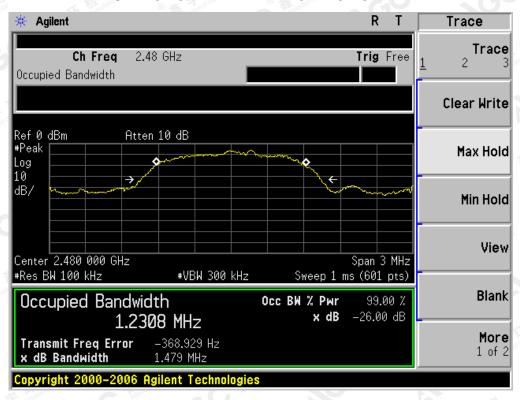

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 51 of 60

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)							
150kHz~500kHz	66-56	56-46							
500kHz~5MHz	8 Age 12	46/							
5MHz~30MHz	60	50							

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

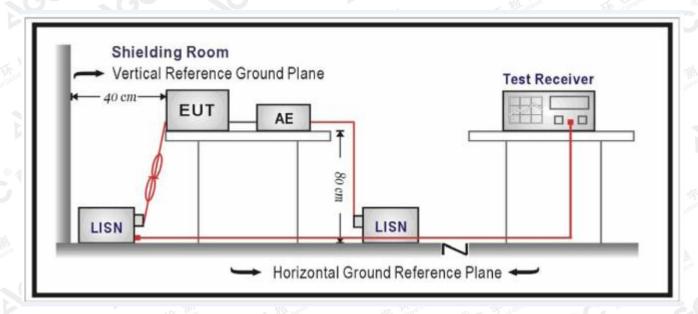

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 52 of 60

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The BT function of EUT didn't work when charging.


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC RADIATED EMISSION TEST SETUP

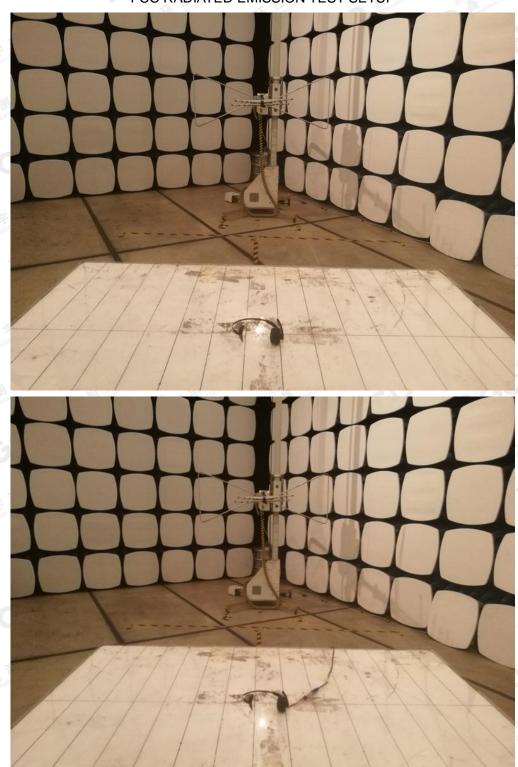


The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China





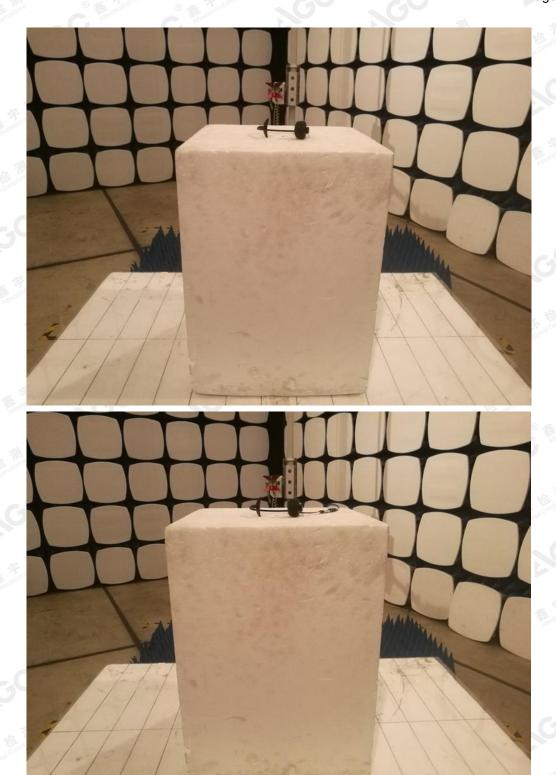

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gent.com.



FRONT VIEW OF EUT



BACK VIEW OF EUT



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



VIEW OF EUT (PORT)



OPEN VIEW OF EUT



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cent.com.

Attestation of Global Compliance


Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



VIEW OF BATTERY



INTERNAL VIEW OF EUT-1

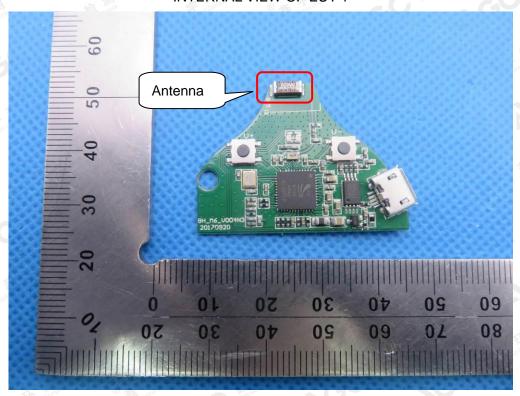


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



INTERNAL VIEW OF EUT-2

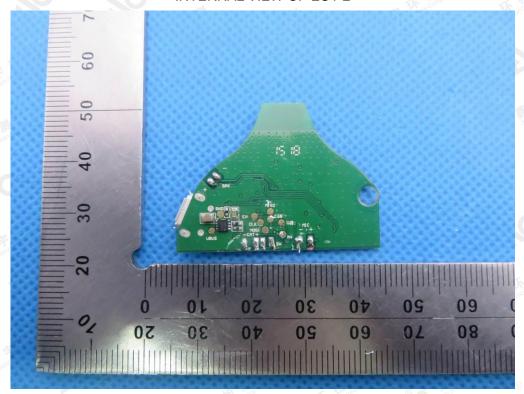

INTERNAL VIEW OF EUT-3



----END OF REPORT----

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gett.com.