

Advanced
Compliance Laboratory

210 Cougar Court
Hillsborough, NJ 08844
Tel: (908) 927 9288
Fax: (908) 927 0728

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT of

SAMPLE BOX SCANNER
MODEL: BOXMAPPER II
FCC ID: 2AMHY-BM02

July 12th , 2017

This report concerns (check one): Original grant Class II change
Equipment type: Low Power Intentional Radiator

Deferred grant requested per 47 CF 0.457(d)(1)(ii)? yes no
If yes, defer until: _____ (date)
Company agrees to notify the Commission by _____ (date)
of the intended date of announcement of the product so that the grant can be
issued on that date.

Transition Rules Request per 15.37? yes no
If no, assumed Part 15, Subpart B for unintentional radiators - the new 47 CFR
[10-1-90 Edition] provision.

Report prepared for: BIOTILLION LLC.
Report prepared by: Advanced Compliance Lab
Report number: 0048-170607-01-FCC-LF

NVLAP®

Lab Code: 200101 The test result in this report IS supported and covered by the NVLAP accreditation

Table of Contents

Report Cover Page	1
Table of Contents	2
Figures	3
1. GENERAL INFORMATION	5
1.1 Verification of Compliance	5
1.2 Equipment Modifications	6
1.3 Product Information.....	7
1.4 Test Methodology.....	7
1.5 Test Facility	7
1.6 Test Equipment	7
1.7 Statement of the Document Use.....	9
2. PRODUCT LABELING	10
3. SYSTEM TEST CONFIGURATION	11
3.1 Justification	11
3.2 Special Accessories.....	11
3.3 Configuration of Tested System	11
4. SYSTEM SCHEMATICS	16
5. CONDUCTED EMISSION DATA	17
5.1 Test Methods and Conditions	17
5.2 Test Data.....	17
6. RADIATED EMISSION DATA	22
6.1 Field Strength Calculation	22
6.2 Test Methods and Conditions	22
6.2 Test Data.....	22
6.4. Occupied Bandwidth	24
7. FREQUENCY TOLERANCE	25
8. PHOTOS OF TESTED EUT	31

Figures

Figure 2.1 FCC ID Label.....	8
Figure 2.2 Location of Label on Back of the EUT	8
Figure 3.1 Radiated Test Setup	10
Figure 3.2 Radiated Test Configuration Setup	10
Figure 3.3 Conducted Test Setup	11
Figure 3.4 Frequency Tolerance Test Setup.....	12
Figure 4.1 EUT Schematics.....	13
Figure 5.1 Line Conducted.....	15
Figure 5.2 Neutral Conducted	16
Figure 6.1 Bandwidth Plot	19
Figure 8.1 Top (Size) View	27
Figure 8.2 Front View.....	28
Figure 8.3 Rear (Ports) View	29
Figure 8.4 Bottom View.....	30
Figure 8.5 Sides View.....	31
Figure 8.6 EUT Inside View	32
Figure 8.7 UHF Motherboard Components Side View	33
Figure 8.8 UHF Motherboard Foil Side View	34
Figure 8.9 UHF Daughter Board Components Side View	37
Figure 8.10 UHF Daughter Board Foil Side View	38
Figure 8.11 HF Board Front Side View	39

Figure 8.12 HF Board Back Side View40

Figure 8.13 AC/DC Adaptor.....41

1. GENERAL INFORMATION

1.1 Verification of Compliance

EUT: SAMPLE BOX SCANNER
 Model: BOXMAPPER II
 Applicant: BIOTILLION LLC.
 Test Type: FCC Part 15C CERTIFICATION
 Result: PASS
 Tested by: ADVANCED COMPLIANCE LABORATORY
 Test Date: June 07, 2017 ~ July 12, 2017
 Report Number: 0048-170607-01-FCC-LF

The above equipment was tested by Compliance Laboratory, Advanced Technologies, Inc. for compliance with the requirement set forth in the FCC rules and regulations Part 15 subpart C. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty u_c	norm.	±2.36	±2.99	±1.83


 Wei Li
 Lab Manager
 Advanced Compliance Lab

Date: July 12, 2017

1.2 Equipment Modifications

N/A

1.3 Product Information

System Configuration

ITEM	DESCRIPTION	FCC ID	CABLE
Product	SAMPLE BOX SCANNER BOXMAPPER II (1)	2AMHY-BM02	
Housing	Plastic w / metal bottom		
Power Supply	AC/DC Adaptor Input:100-240V~/0.3A, 50-60Hz Output: 6.0Vdc/2.0A		
Operation Freq.	13.56MHz		
Device Type	Sec. 15.225 Operation		
Receiver	BOXMAPPER II(RX)	Verification	

(1) EUT submitted for grant.

1.4 Test Methodology

Radiated tests were performed according to the procedures in ANSI C63.4-2014 & ANSI C63.10-2013 at an antenna to EUT distance of 30 &3 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at Hillsborough, New Jersey. This site has been accepted by FCC to perform measurements under Part 15 or 18 in a letter dated May 19, 1997 (Refer to: 31040/PRV 1300F2). The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

1.6 Test Equipment

Manufacture	Model		Serial No.	Description	Cal Due dd/mm/yy
Hewlett-Packard	HP8546A		3448A00290	EMI Receiver	25/09/17
Agilent	E4440A		US40420700	3Hz-26.5GHz Spectrum Analyzer	17/06/18
R &S	ESPI		100018	9KHz-7GHz EMI Receiver	25/08/17
EMCO	3104C		9307-4396	20-300MHz Biconical Antenna	12/11/17
EMCO	3146		9008-2860	200-1000MHz Log-Periodic	13/11/17

				Antenna	
ARA	MWH-1826/B		1013	18-26GHZ Horn Antena	10/02/18
EMCO	3115		49225	Double Ridge Guide Horn Antenna	28/11/17
Electro-Meterics	ALR-25M/30		289	10KHz-30MHz Active Loop Antenna	28/05/18
ARA	MWH-1826/B		1013	18-26GHZ Horn Antena	10/02/18
COM-POWER	L1215A		191994	Line Impedance Stabilization Networks	24/03/18
Fischer Custom	LISN-2		900-4-0009	Line Impedance Stabilization Networks	18/03/18

All Test Equipment Used are Calibrated Traceable to NIST Standards.

1.7 Statement for the Document Use

This report shall not be reproduced except in full, without the written approval of the laboratory. And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

2. PRODUCT LABELING

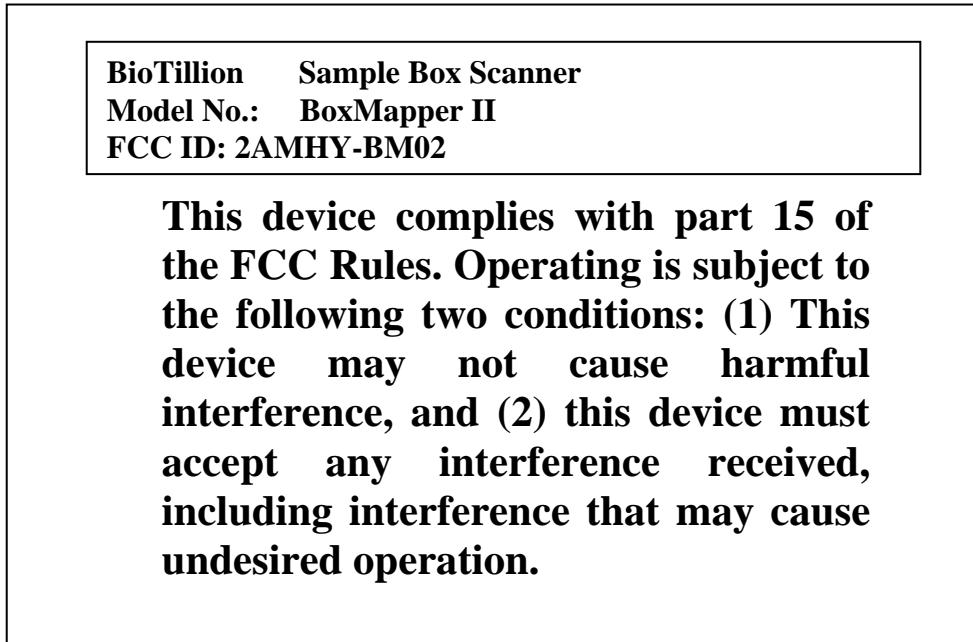


Figure 2.1 FCC ID Label



Figure 2.2 FCC ID Label Location

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it) . Testing was performed as EUT was operated continuously.

3.2 Special Accessories

N/A

3.3 Configuration of Tested System

Figure 3.1 to Figure 3.5 illustrate the system setup for testing. A notebook computer was used to excise the operation software and read/display the tag scanning results via standard RJ45 interface.



Figure 3.1 Radiated Test Setup



Figure 3.2 Frequency Configuration Setup



Figure 3.3 Conducted Emission Test Setup



Figure 3.4 Frequency Tolerance Test Setup

4. SYSTEM SCHEMATICS

See Attachment.

Figure 4.1 System Schematics

5. CONDUCTED EMISSION DATA

5.1 Test Methods and Conditions

The EUT was under normal operational mode during the conducted emission test. EMI Receiver was scanned from 150KHz to 30MHz with maximum hold mode for maximum emission. Recorded data was sent to the plotter to generate output in linear format. At the input of the spectrum analyzer, a HP transient limiter is inserted for protective purpose. This limiter has a 10 dB attenuation in the range of 150KHZ to 30MHZ. That factor was automatically compensated by the receiver, so the readings are the corrected readings. The reference of the plot is the CISPR 22 Class B limit in Figure 5.1 through Figure 5.2.

Conducted Emission Technical Requirements				
Frequency Range	Class A		Class B	
	Quasi-Peak dBuV	Average dBuV	Quasi-Peak dBuV	Average dBuV
150kHz -0.5MHz	79 (8912uV)	66 (1995uV)	66-56	56-46
0.5MHz-30MHz	73 (4467uV)	60 (1000uV)	---	---
0.5MHz- 5MHz	---	---	56	46 (250uV)
5MHz-30MHz	---	---	60	50

Emissions that have peak values close to the specification limit (if any) may be also measured in the quasi-peak mode to determine compliance.

5.2 Test Data

Figure 5.1-5.2 show the neutral and line conducted emissions for the standard operation with antenna output attenuated.

Highest Data for AC Line Conducted Emissions, 120Vac Battery Charging Mode						
Frequency (MHz)	0.380 (Line)	0.450 (Line)	13.56 (Line)	0.370 (Neutral)	0.450 (Neutral)	13.56 (Neutral)
Peak/QP Reading (dBuV)*	46.13	52.71	53.99	45.50	50.23	51.28
Average Reading (dBuV)*		29.59	46.99		21.49	43.86
Under FCC Part 15 Limit	Yes	Yes	Yes	Yes	Yes	Yes

Test Personnel:

Tester Signature: David Tu

Date: July 12, 2017


Typed/Printed Name: David Tu

Line Conducted Emission 150kHz-30MHz



MARKER
13.53 MHz
53.99 dB μ V

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 13.53 MHz
53.99 dB μ V

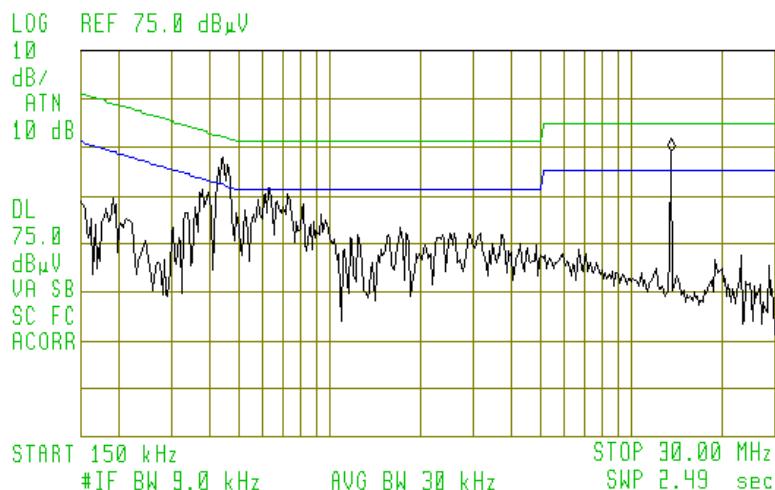


Line Conducted Emission 400 kHz (Average)



MARKER
365.75 msec
29.59 dB μ V

ACTV DET: AVG
MEAS DET: PEAK QP AVG
MKR 365.75 msec
29.59 dB μ V

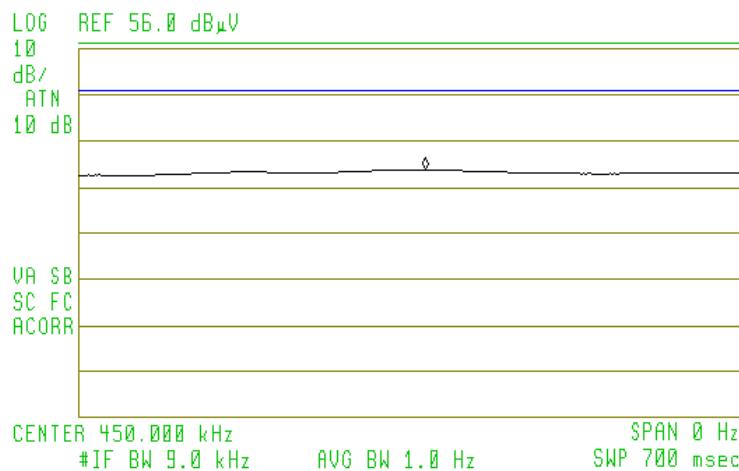

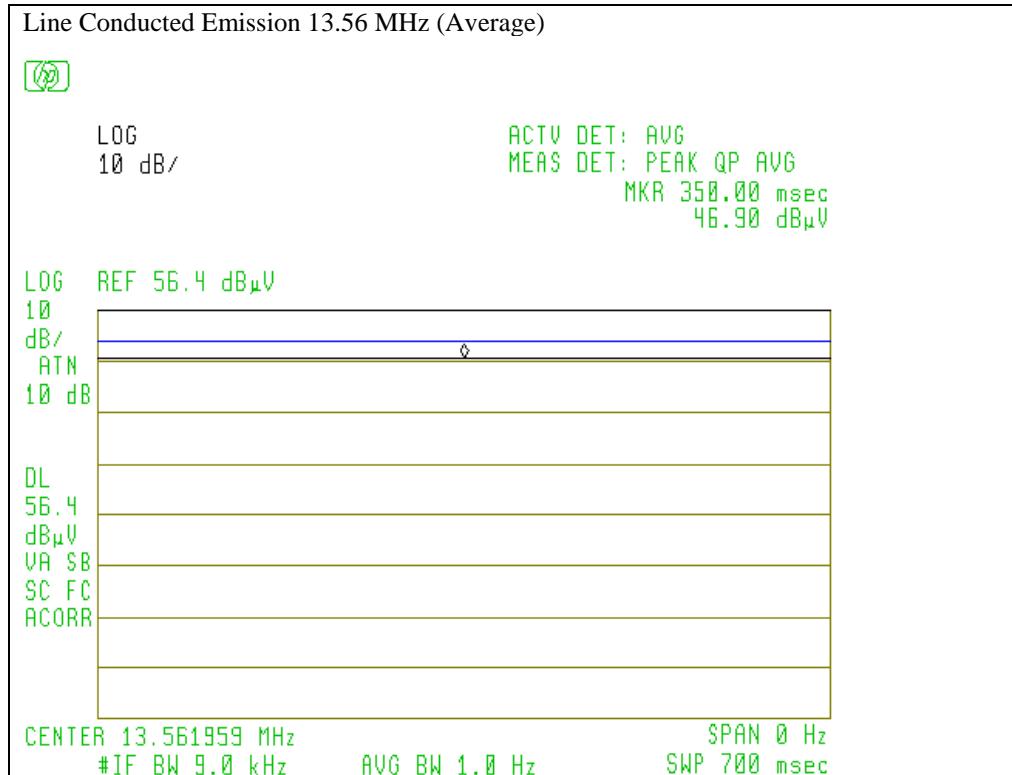



Fig. 5.1 Conducted Emission-Line

Neutral Conducted Emission 150kHz-30MHz



MARKER
13.53 MHz
51.28 dB μ V

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 13.53 MHz
51.28 dB μ V

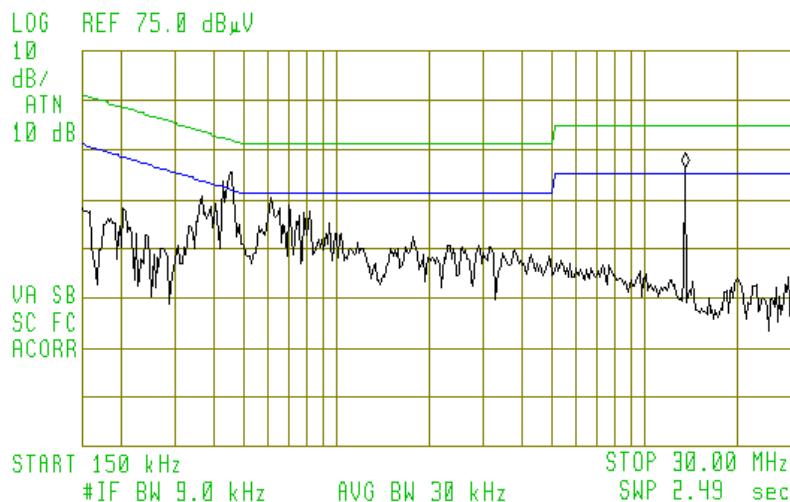


Line Conducted Emission 400 kHz (Average)



MARKER
343.00 msec
21.49 dB μ V

ACTV DET: AVG
MEAS DET: PEAK QP AVG
MKR 343.00 msec
21.49 dB μ V

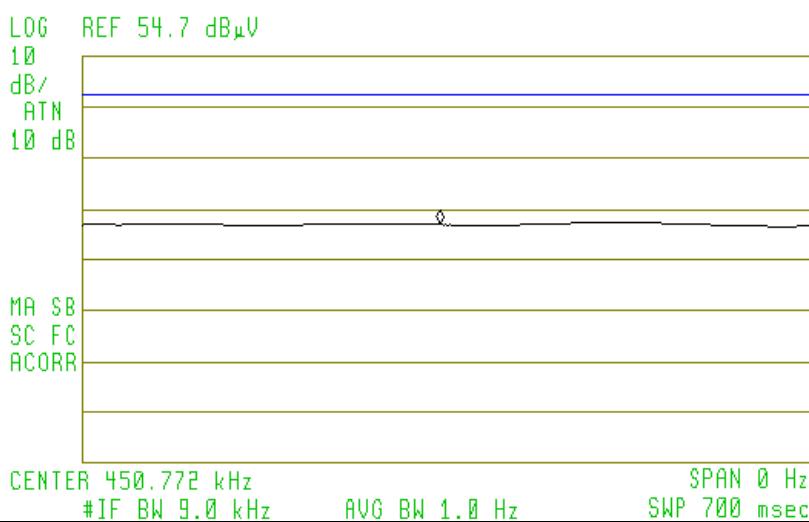

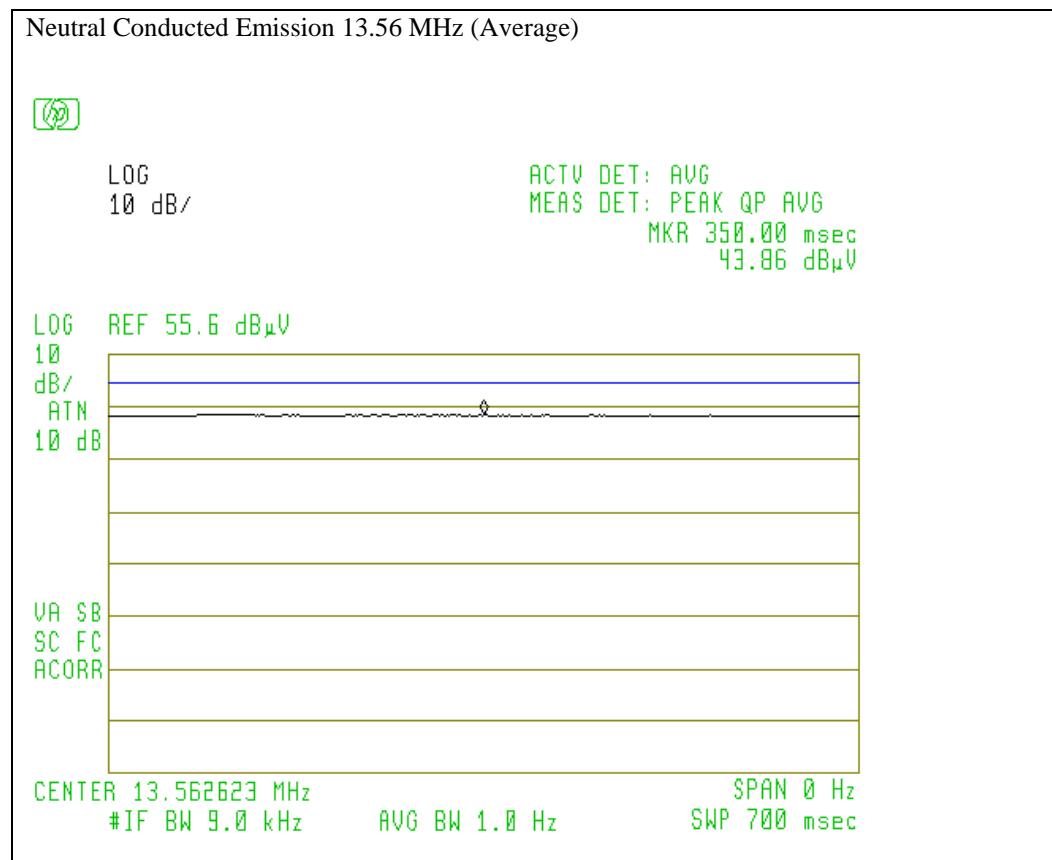


Fig. 5.2 Conducted Emission- Neutral

6. RADIATED EMISSION DATA

6.1 Field Strength Calculation

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA + AF + CF + AG$$

where FS: Corrected Field Strength in dB μ V/m

RA: Amplitude of EMI Receiver before correction in dB μ V

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

6.2 Test Methods and Conditions

The initial step in collecting radiated data is a EMI Receiver scan of the measurement range below 30MHz using peak/quasi-peak detector and 9KHz IF bandwidth / 30KHz video bandwidth with loop antenna. For the range 30MHz - 1GHz, 120KHz IF bandwidth / 120KHz video bandwidth are used. Both bandwidths are 1MHz for above 1GHz measurement. Frequency range from EUT's lowest crystal frequency to 10th harmonics of fundamental was investigated.

EUT was rotated all around and cables and equipment were placed and moved within the range of positions likely to find their maximum emissions. Antenna must be rotated about its Horizontal and Vertical positions to maximize emissions.

6.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 6.1.

Test Personnel:

David Tu

Typed/Printed Name: David Tu

Date: July 12, 2017

Radiated Test Data
Operation Mode: Typical

Frequency (MHz)	Polarity [H or V]	Height (m)	Azimuth (Degree)	Quasi-Peak Reading (dB μ V/m)	FCC 30m &3m Limit (dB μ V/m)	Difference from limit (dB)
13.56	H/V	1.0	000	68.0	84.0(1)	-16
27.12	H/V	1.0	000	25.5(3)	29.5(2)	-4.0
56.4	H	1.8	010	36.6	40.0	-3.4
67.0	H	1.8	010	33.5	40.0	-6.5
111.6	H	1.8	045	34.8	43.5	-8.7
123.5	H	1.8	045	32.7	43.5	-10.8
173.2	H	1.8	000	35.3	43.5	-8.2
466	H	1.1	010	40.8	46.0	-5.2
43.8	V	1.3	010	37.3	40.0	-2.7
56.4	V	1.3	270	36.8	40.0	-3.2
67	V	1.3	090	36.6	40.0	-3.4
111.6	V	1.3	270	38.7	43.5	-4.8
123.5	V	1.3	270	38.3	43.5	-5.2
133.3	V	1.3	235	38.1	43.5	-5.4
173.2	V	1.3	090	37.4	43.5	-6.1
250	V	1.3	090	40.7	46.0	-5.3


(1) Per 15.225(a): The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (84dB μ V/m) at 30 meters.

(2) Per 15.225(d): The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in 15.209.

(3) The distance factor 19.1dB was applied to the this testing value as the measurement was adjusted from 30m to 10m distance in order to obtain the significant reading.

6.4 Occupied Bandwidth

Bandwidth is determined at the points 20dB down from the modulated carrier. Figure 6.1 shows the occupied bandwidth plot.

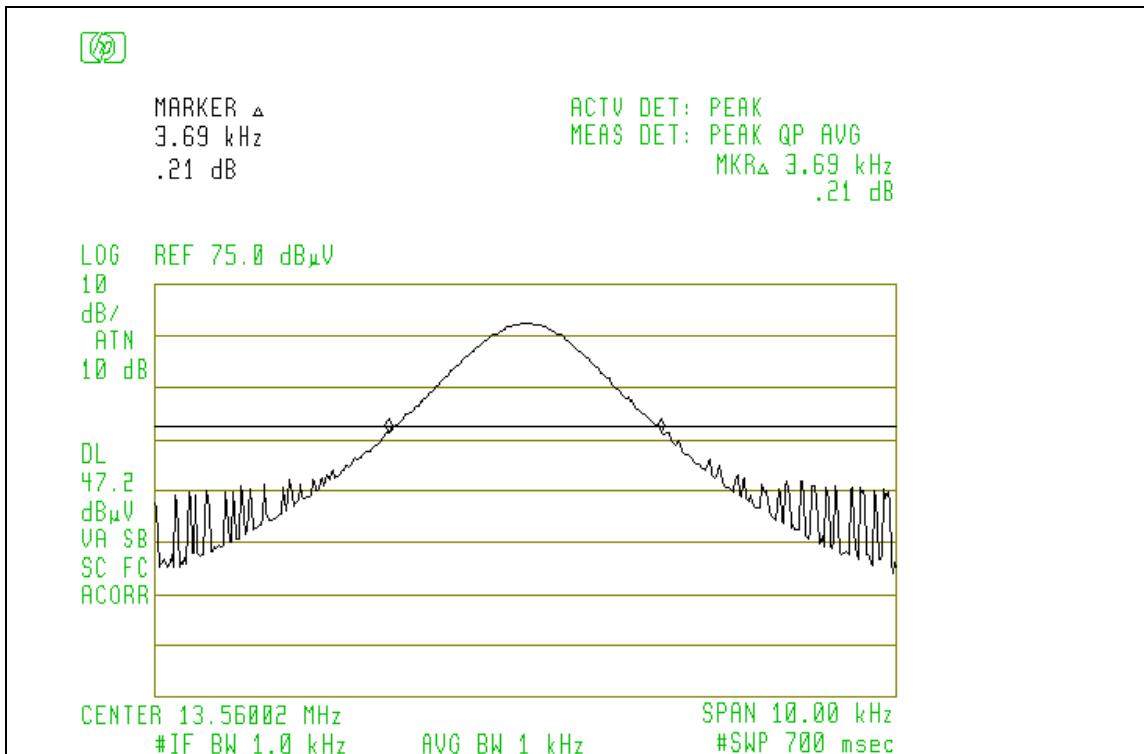

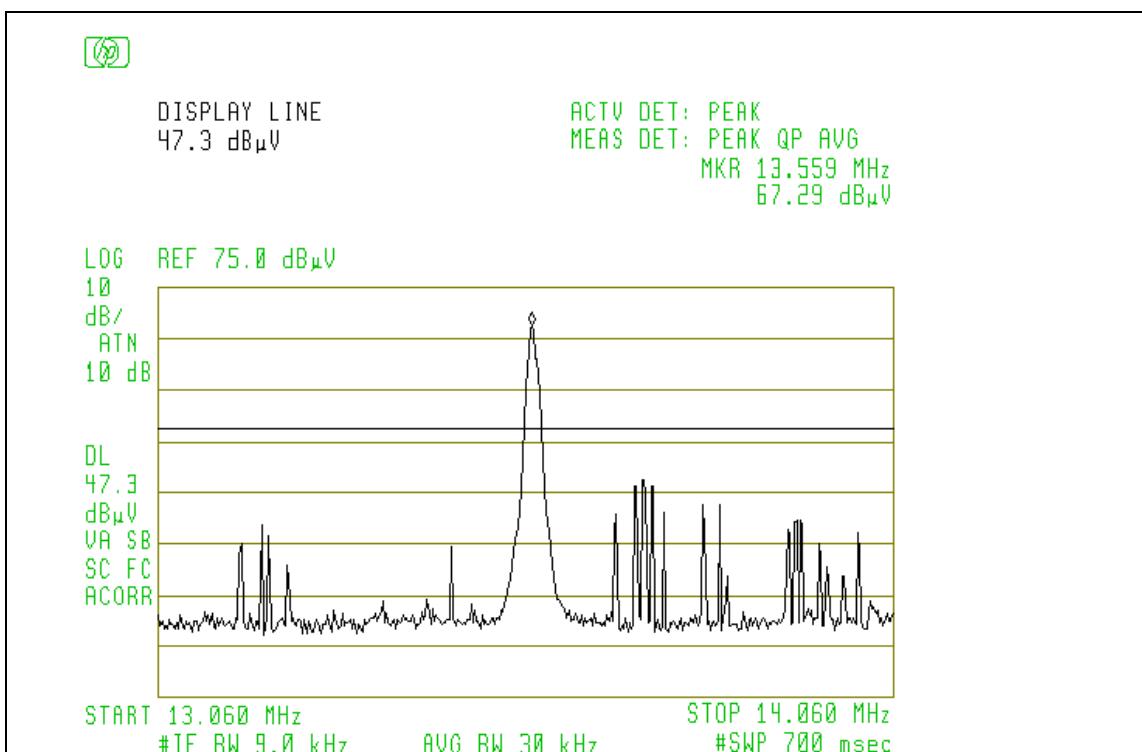


Figure 6.1 Occupied Bandwidth

7. Frequency Tolerance

Name of Test:	<i>Frequency Tolerance</i>	Test Standard:	<i>15.225</i>
Tested By:	WEI LI	Test Date:	06/16/2017

Minimum Standard: Para 15.225(e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Method of Measurement: Frequency Stability With Voltage Variation:
The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. Set SA resolution bandwidth low enough (30Hz) to obtain the desired frequency resolution. (Using frequency counter method: The frequency counter and signal generator are phase locked with the same 10 MHz reference frequency by connecting the 10 MHz ref. out of the counter to the 10MHz ref, in of the signal generator). With the voltage input to the E.U.T. set to 85% S.T.V., the frequency is measured in 30 second intervals for a period of 5 minutes. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

Frequency Stability With Temperature Variation:
The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied from -20 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency is measured in 30 second intervals for a period of 5 minutes.

Test Result: **Complies**

Test Data: See Attached Table(s)

- temperature variation: -20°C to +50°C
- voltage variation: 97.75 Vac to 132.25 Vac
- frequency tolerance: +/- 1.356 kHz (+/- 0.01%)


Frequency Stability versus Environmental Temperature

Reference Frequency @ 115V & +20°C		
Temperature & Direction (°C)	Frequency (MHz)	Deviation (Hz)
-20	13.560136	+83
+20	13.560053	-
+50	13.560102	+49


Frequency Stability versus AC Voltage

Reference Frequency @ 115VAC & +20°C		
Voltage & Direction (VAC)	Frequency (MHz)	Deviation (Hz)
97.75	13.550052	-1
115	13.560053	-
132.25	13.560054	+1


Project Number:	0048-170607-01-FCC-LF
EUT:	Avante
SN:	003
Tested By:	David Tu
Temperature:	70°F
Humidity:	30%

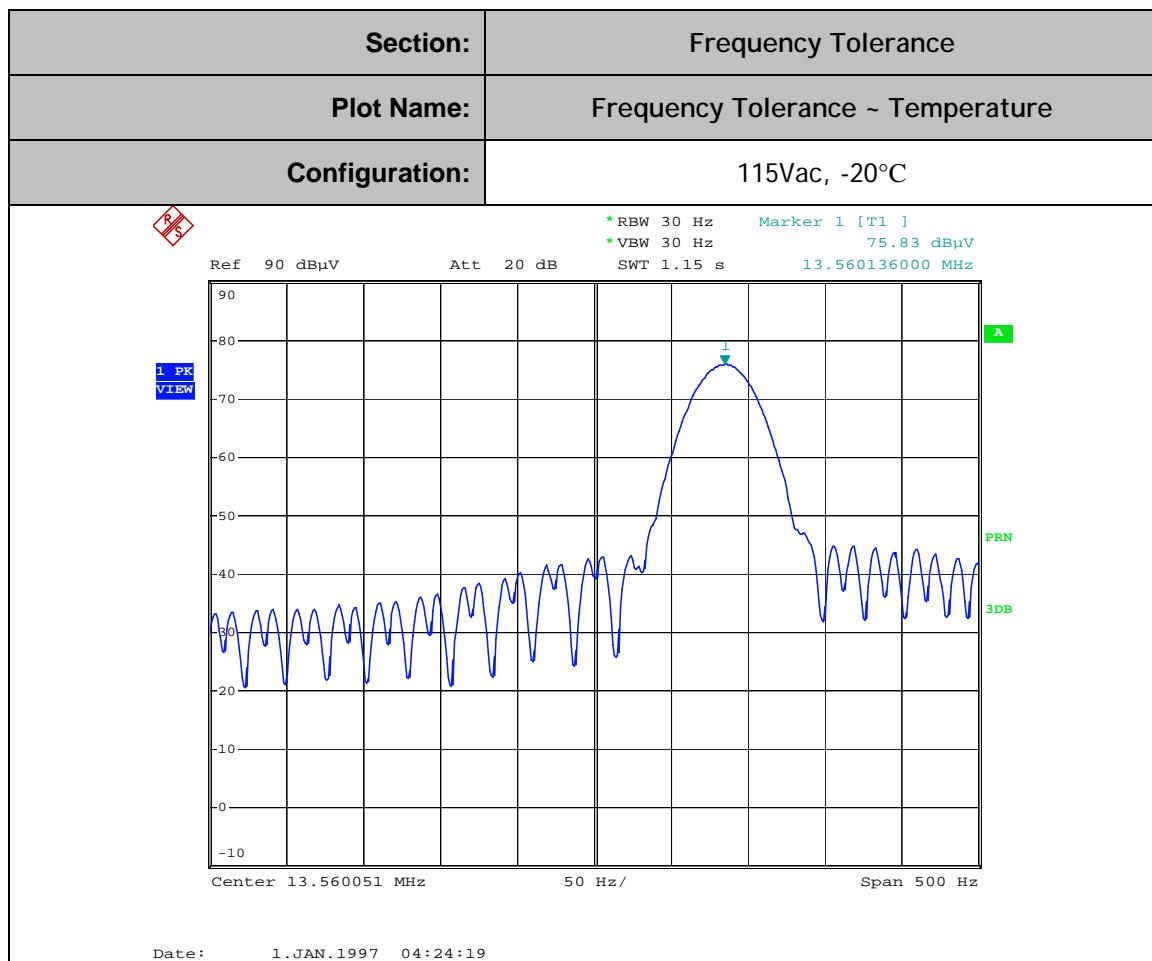

Project Number:	0048-170607-01-FCC-LF
EUT:	Avante BOXMAPPER II
SN:	003
Tested By:	David Tu
Temperature:	70°F
Humidity:	30%

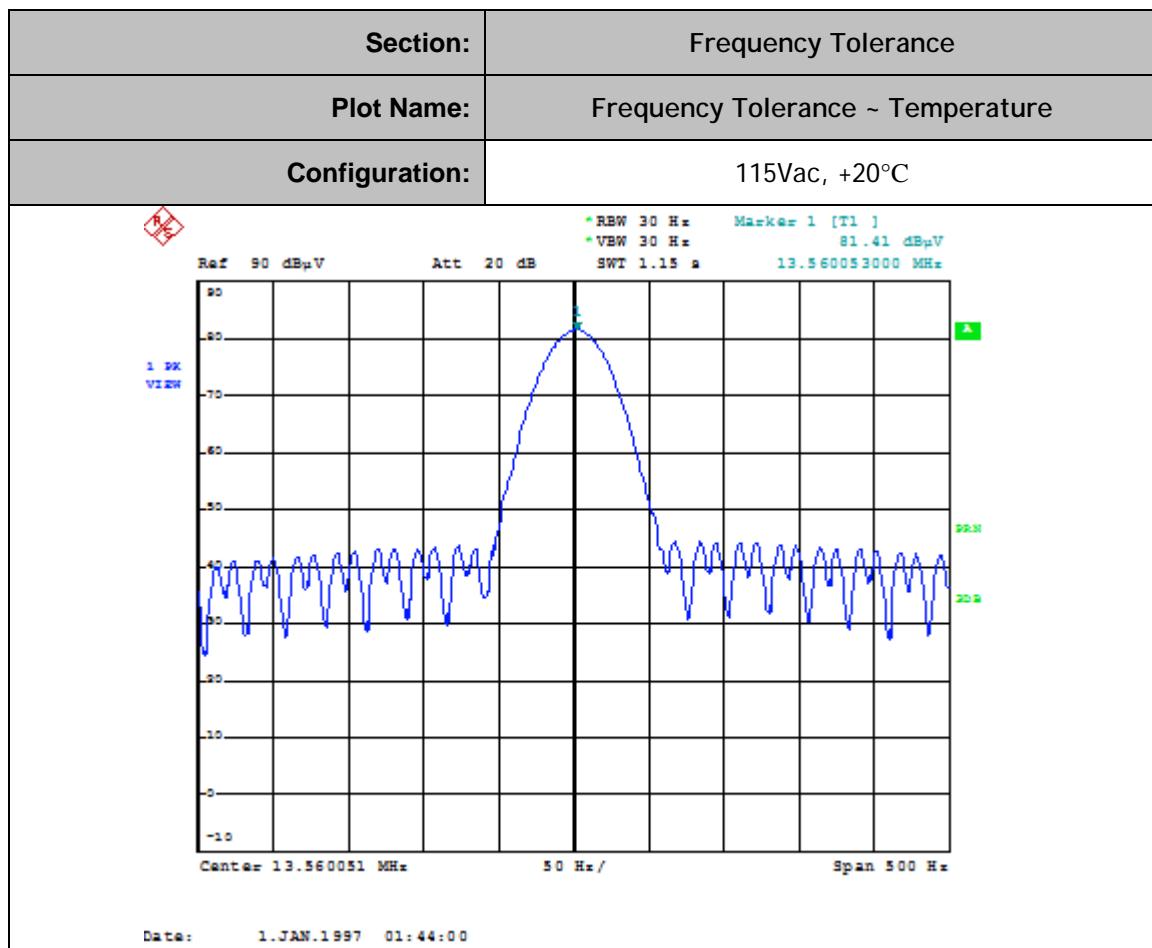

Project Number:	0048-170607-01-FCC-LF
EUT:	Avante BOXMAPPER II
SN:	003
Tested By:	David Tu
Temperature:	70°F
Humidity:	30%

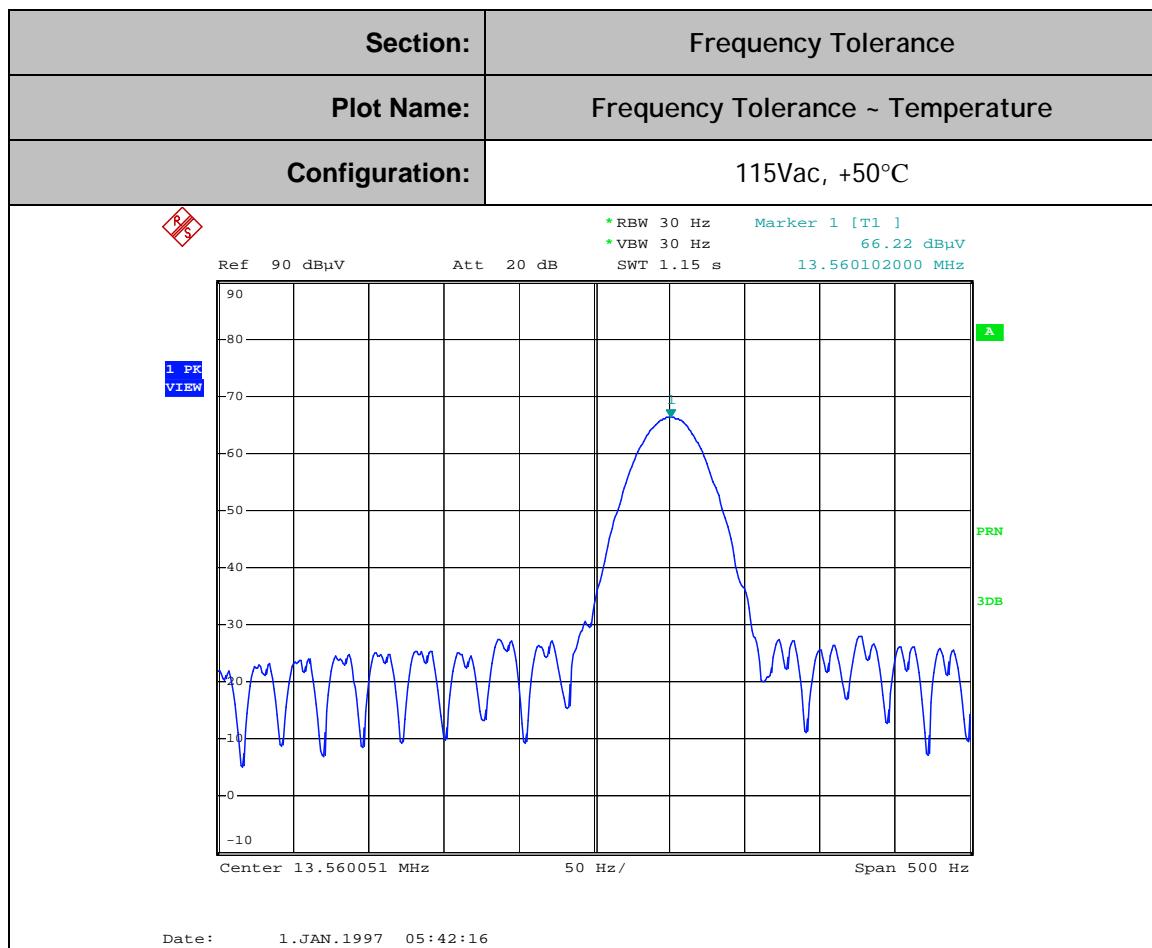

Project Number:	0048-170607-01-FCC-LF
EUT:	Avante BOXMAPPER II
SN:	003
Tested By:	David Tu
Temperature:	70°F
Humidity:	30%

