

# FCC SAR

## Measurement and Test Report

For

**Shenzhen Jimi IOT Co., Ltd**

**Floor 4th, Building C, Gaoxinqi Industrial Park, Liuxian 1st Road,**

**District 67, Bao'an, Shenzhen, China**

**FCC ID: 2AMLF-JM-VL01**

**FCC Rules:** FCC Part 2.1093  
ANSI / IEEE C95.1 ::2005+A1:2010  
ANSI / IEEE C95.3 : 2002(R2008)

**Product Description:** 4G Vehicle GPS Tracker

**Tested Model:** JM-VL01

**Report No.:** WTX19X09067049W

**Sample Received Date:** 2019-09-25

**Tested Date:** 2019-09-25 to 2019-11-04

**Issued Date:** 2019-11-05

**Tested By:** Ruler Liu / Engineer

*Ruler Liu*

**Reviewed By:** Silin Chen / EMC Manager

*Silin Chen*

**Approved & Authorized By:** Jandy So / PSQ Manager

*Jandy So*

**Prepared By:**

**Shenzhen SEM Test Technology Co. Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.

## **TABLE OF CONTENTS**

<b>1. General Information .....</b>	<b>3</b>
1.1 Product Description for Equipment Under Test (EUT) .....	3
1.2 Test Standards .....	5
1.3 Test Methodology .....	5
1.4 Test Facility .....	5
<b>2. Summary of Test Results .....</b>	<b>6</b>
<b>3. Specific Absorption Rate (SAR).....</b>	<b>7</b>
3.1 Introduction.....	7
3.2 SAR Definition .....	7
<b>4. SAR Measurement System .....</b>	<b>8</b>
4.1 The Measurement System .....	8
4.2 Probe.....	8
4.3 Probe Calibration Process.....	10
4.4 Phantom .....	11
4.5 Device Holder.....	11
4.6 Test Equipment List.....	12
<b>5. Tissue Simulating Liquids.....</b>	<b>13</b>
5.1 Composition of Tissue Simulating Liquid.....	13
5.2 Tissue Dielectric Parameters for Head and Body Phantoms.....	14
5.3 Tissue Calibration Result.....	15
<b>6. SAR Measurement Evaluation .....</b>	<b>16</b>
6.1 Purpose of System Performance Check.....	16
6.2 System Setup .....	16
6.3 Validation Results.....	17
<b>7. EUT Testing Position .....</b>	<b>18</b>
7.1 EUT Antenna Position .....	18
7.2 EUT Testing Position.....	19
<b>8. SAR Measurement Procedures.....</b>	<b>20</b>
8.1 Measurement Procedures .....	20
8.2 Spatial Peak SAR Evaluation .....	20
8.3 Area & Zoom Scan Procedures.....	21
8.4 Volume Scan Procedures.....	21
8.5 SAR Averaged Methods .....	21
8.6 Power Drift Monitoring.....	21
<b>9. SAR Test Result .....</b>	<b>22</b>
9.1 Conducted RF Output Power .....	22
9.2 Test Results for Standalone SAR Test.....	49
9.3 Simultaneous Multi-band Transmission SAR Analysis .....	54
<b>10. Measurement Uncertainty .....</b>	<b>57</b>
10.1 Uncertainty for EUT SAR Test.....	57
10.2 Uncertainty for System Performance Check.....	58
<b>Annex A. Plots of System Performance Check .....</b>	<b>60</b>
<b>Annex B. Plots of SAR Measurement .....</b>	<b>72</b>
<b>Annex C. EUT Photos .....</b>	<b>91</b>
<b>Annex D. Test Setup Photos .....</b>	<b>93</b>
<b>Annex E. Calibration Certificate.....</b>	<b>96</b>

## 1. General Information

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen Jimi IOT Co., Ltd  
 Address of applicant: Floor 4th, Building C, Gaoxinqi Industrial Park, Liuxian 1st Road, District 67, Bao'an, Shenzhen, China

Manufacturer: Shenzhen Jimi IOT Co., Ltd  
 Address of manufacturer: Floor 4th, Building C, Gaoxinqi Industrial Park, Liuxian 1st Road, District 67, Bao'an, Shenzhen, China

General Description of EUT	
Product Name:	4G Vehicle GPS Tracker
Brand Name:	Jimi
Model No.:	JM-VL01
Adding Model:	GV40,VL01
Rated Voltage:	DC3.7V battery/DC9-36V
Battery Capacity:	450mAh
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model JM-VL01, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
<b>2G</b>	
Support Networks:	GSM, GPRS,EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS 850: 824~849MHz GSM/GPRS 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS 850: 869~894MHz GSM/GPRS 1900: 1930~1990MHz
RF Output Power:	GSM850: 31.98dBm, GSM1900: 29.43dBm EDGE850: 25.55dBm, EDGE1900: 25.82dBm
Type of Modulation:	GMSK,8PSK
Antenna Type:	Integral Antenna
Antenna Gain:	GSM850: -2.3dBi; GSM1900: -2.0dBi
GPRS/EDGE Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5

Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 22.61dBm, WCDMA Band 5: 23.08dBm
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: -2.0dBi, WCDMA Band 5: -2.3dBi
<b>4G</b>	
Support Networks:	FDD-LTE
Support Band:	FDD-LTE Band 2, 4, 5,7
Uplink Frequency:	FDD-LTE Band 2: Tx: 1850-1910MHz, FDD-LTE Band 4: Tx: 1710-1755MHz, FDD-LTE Band 5: Tx: 824-849MHz, FDD-LTE Band 7: Tx: 2500-2570MHz,
Downlink Frequency:	FDD-LTE Band 2: Rx: 1930-1990MHz, FDD-LTE Band 4: Rx: 2110-2155MHz, FDD-LTE Band 5: Rx: 869-894MHz, FDD-LTE Band 7: Rx: 2620-2690MHz,
RF Output Power:	FDD-LTE Band 2: 23.15dBm, FDD-LTE Band 4: 23.39dBm, FDD-LTE Band 5: 23.86dBm, FDD-LTE Band 7: 22.98dBm
Type of Modulation:	QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	FDD-LTE Band 2: -2.0dBi, FDD-LTE Band 4: -1.6dBi, FDD-LTE Band 5: -2.3dBi, FDD-LTE Band 7: -1.3dBi,
<b>WIFI(2.4G)</b>	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20)
AV Output Power:	14.02dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	0.5dBi

## 1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Jimi IOT Co., Ltd in accordance with FCC 47 CFR Part 2.1093, ANSI / IEEE C95.1 ::2005+A1:2010, ANSI / IEEE C95.3 : 2002(R2008) and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02, KDB 941225 D01 v03r01,KDB 616217 D04 v01r02 and KDB 248227 D01 v02r02,and KDB941225 D05 v02r05.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

*Maintenance of compliance* is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

### FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010. Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM. Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 2. Summary of Test Results

---

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Body (5mm Gap)	SAR <sub>1g</sub> Limit (W/kg)
	Maximum SAR <sub>1g</sub> (W/kg)	
GSM850	0.505	1.6
GSM1900	0.741	1.6
WCDMA Band V	0.369	1.6
WCDMA Band II	0.966	1.6
LTE Band 2	<b>1.015</b>	1.6
LTE Band 4	0.706	1.6
LTE Band 5	0.400	1.6
LTE Band 7	0.510	1.6
WLAN 2.4GHz	0.468	1.6
Simultaneous Transmission	<b>1.379</b>	1.6

**Remark:**

*The highest reported SAR values for body, and simultaneous transmission conditions are **1.015W/kg, and 1.379W/kg** respectively.*

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI / IEEE C95.1 ::2005+A1:2010, and had been tested in accordance with the measurement methods and procedure specified in KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02

### 3. Specific Absorption Rate (SAR)

---

#### 3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

#### 3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 4. SAR Measurement System

---

### 4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

### 4.2 Probe


For the measurements the Specific Dosimetric E-Field Probe SSE5 SN 09/13 EP168 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm
- Distance between dipoles / probe extremity: 2.7mm



- Probe linearity: <0.25 dB
  - Axial Isotropy: <0.25 dB
  - Spherical Isotropy: <0.50 dB
  - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

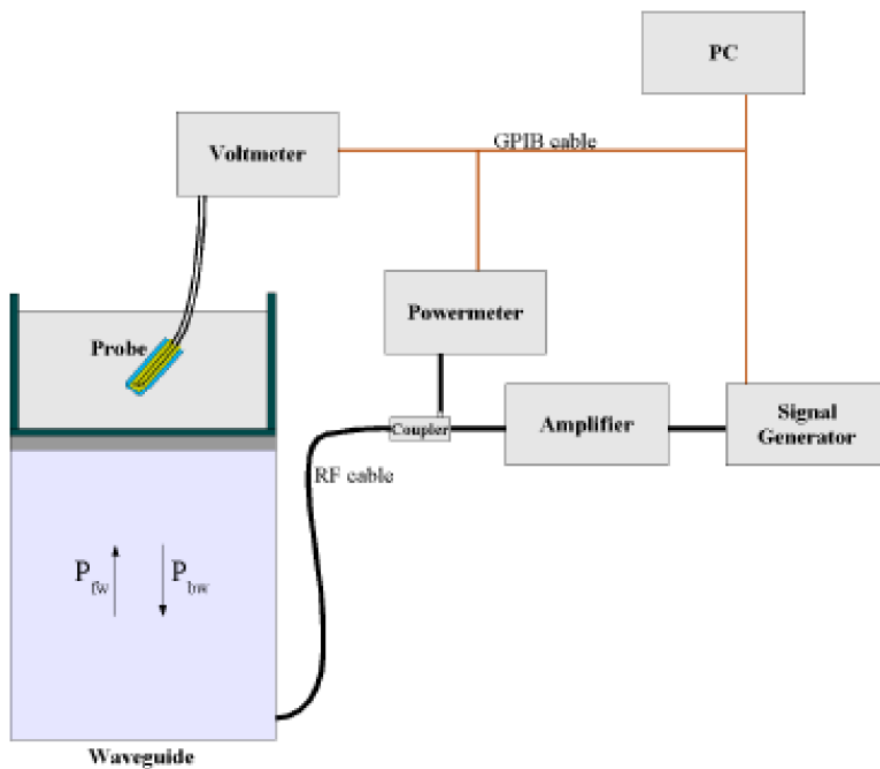

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

$P_{fw}$  = Forward Power

$P_{bw}$  = Backward Power

a and b = Waveguide dimensions

$\delta$  = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage  $V_{lin}(N)$  is obtained from the displayed output voltage  $V(N)$  using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

### 4.3 Probe Calibration Process

#### Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an with CALISAR, Antenna proprietary calibration system.

#### Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm<sup>2</sup>.

#### Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

$\Delta t$  = exposure time (30 seconds),

$C$  = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T / \Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$\text{SAR} = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = simulated tissue conductivity,


$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

#### 4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

#### 4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

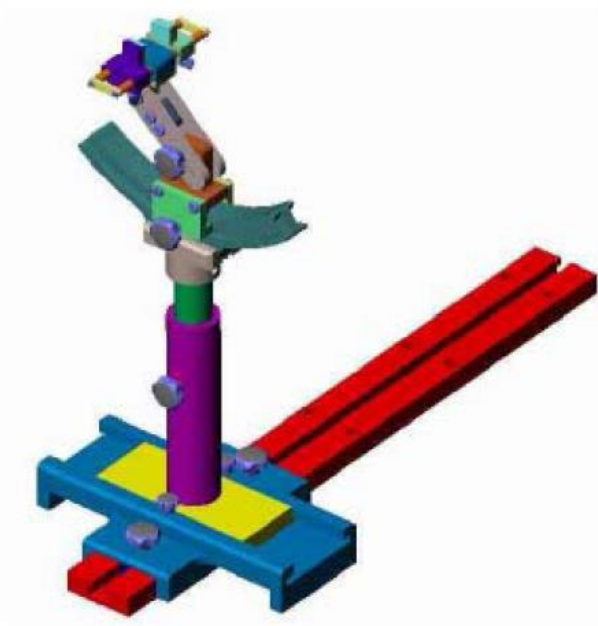

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

#### 4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	SATIMO	SSE5	SN 09/13 EP168	2019-05-22	2020-05-21
750MHz Dipole	SATIMO	SID750	SN 47/12 DIP 0G750-203	2019-03-16	2020-03-15
835MHz Dipole	SATIMO	SID835	SN 47/12 DIP 0G835-204	2019-03-16	2020-03-15
1800MHz Dipole	SATIMO	SID1800	SN 47/12 DIP 1G800-206	2019-03-16	2020-03-15
1900MHz Dipole	SATIMO	SID1900	SN 47/12 DIP 1G900-207	2019-03-16	2020-03-15
2450MHz Dipole	SATIMO	SID2450	SN 13/15 DIP 2G450-364	2019-03-16	2020-03-15
2600MHz Dipole	MVG	SID2600	SN 13/15 DIP 2G600-365	2019-03-16	2020-03-15
Dielectric Probe Kit	SATIMO	SCLMP	SN 47/12 OCPG49	2019-03-16	2020-03-15
SAM Phantom	SATIMO	SAM	SN/ 47/12 SAM95	N/A	N/A
MULTIMETER	KEITHLEY	Keithley 2000	4006367	2019-04-30	2020-04-29
Signal Generator	R&S	SMB100A	105942	2019-04-30	2020-04-29
Universal Tester	Rohde & Schwarz	CMU200	112012	2019-04-30	2020-04-29
Communications Tester	Rohde & Schwarz	CMW500	148650	2019-04-30	2020-04-29
Network Analyzer	HP	8753C	2901A00831	2019-04-30	2020-04-29
Directional Couplers	Agilent	778D	20160	2019-04-30	2020-04-29

## 5. Tissue Simulating Liquids

### 5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.



**Liquid Height for Body SAR**

#### The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
<b>Body</b>						
750	50.0	0.8	48.8	0.2	0.2	0
835	50.8	0.9	48.1	0.1	0.1	0
1700-1900	70.2	0.4	0	0	0	29.4
2450	68.6	0.1	0	0	0	31.3

## 5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

Target Frequency (MHz)	Head		Body	
	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
<b>750</b>	0.89	41.9	<b>0.96</b>	<b>55.5</b>
<b>835</b>	0.90	41.5	<b>0.97</b>	<b>55.2</b>
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
<b>1750</b>	1.37	40.1	<b>1.49</b>	<b>53.4</b>
<b>1800-2000</b>	1.40	40.0	<b>1.52</b>	<b>53.3</b>
<b>2450</b>	1.80	39.2	<b>1.95</b>	<b>52.7</b>
3000	2.40	38.5	2.73	52.0
5200	4.66	36.0	5.30	49.0
5800	5.27	35.3	6.00	48.2

### 5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

#### Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Body Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading ( $\sigma$ )	Target ( $\sigma$ )	Delta (%)	Reading ( $\epsilon_r$ )	Target ( $\epsilon_r$ )	Delta (%)		
750	21.2	0.93	0.96	-3.12	54.96	55.50	-0.97	±5	2019-10-28
835	21.2	0.95	0.97	-2.06	54.85	55.20	-0.63	±5	2019-10-28
1750	21.3	1.46	1.49	-2.01	51.22	53.40	-4.08	±5	2019-10-29
1800	21.3	1.46	1.52	-3.95	51.22	53.30	-3.90	±5	2019-10-29
1900	21.3	1.50	1.52	-1.32	52.42	53.30	-1.65	±5	2019-10-29
2450	21.3	1.91	1.95	-2.05	52.01	52.70	-1.31	±5	2019-10-30
2600	21.3	2.12	2.16	-1.85	52.24	52.50	-0.50	±5	2019-10-30


## 6. SAR Measurement Evaluation

### 6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz and 1900MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

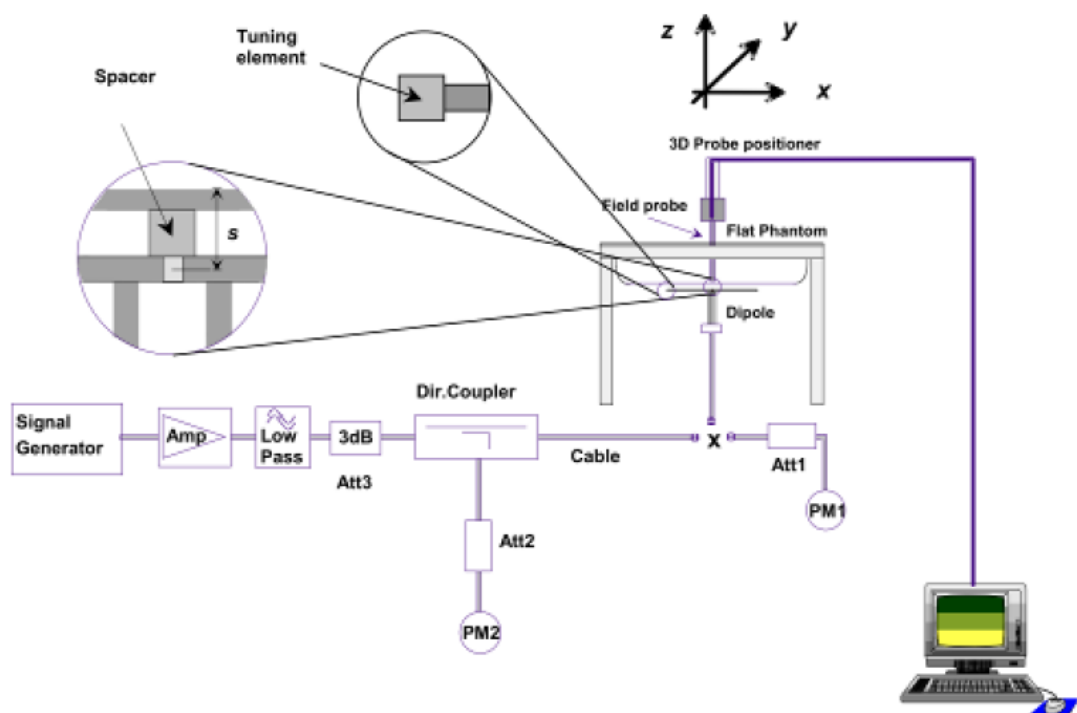

System Verification Setup Block Diagram





**Setup Photo of Dipole Antenna**

The output power on dipole port must be calibrated to 24dBm (250mW) before dipole is connected.

### 6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Targeted SAR <sub>1g</sub>	Measured SAR <sub>1g</sub>	Normalized SAR <sub>1g</sub>	Tolerance
MHz	(W/kg)	(W/kg)	(W/kg)	(%)
Body				
750	8.40	2.12	8.48	0.95
835	9.38	2.35	9.4	0.21
1800	38.31	9.58	38.32	0.03
1900	39.10	9.78	39.12	0.05
2450	50.41	12.59	50.36	-0.10
2600	53.89	13.43	53.72	-0.32


**Remark:** The system check shall be performed at a test frequency that is within  $\pm 10\%$  or  $\pm 100$  MHz of the compliance test mid-band frequency, so the 1750 MHz system verification is made of 1800MHz Dipole.

Targeted and Measurement SAR

*Please refer to Annex A for the plots of system performance check.*

## 7. EUT Testing Position

### 7.1 EUT Antenna Position

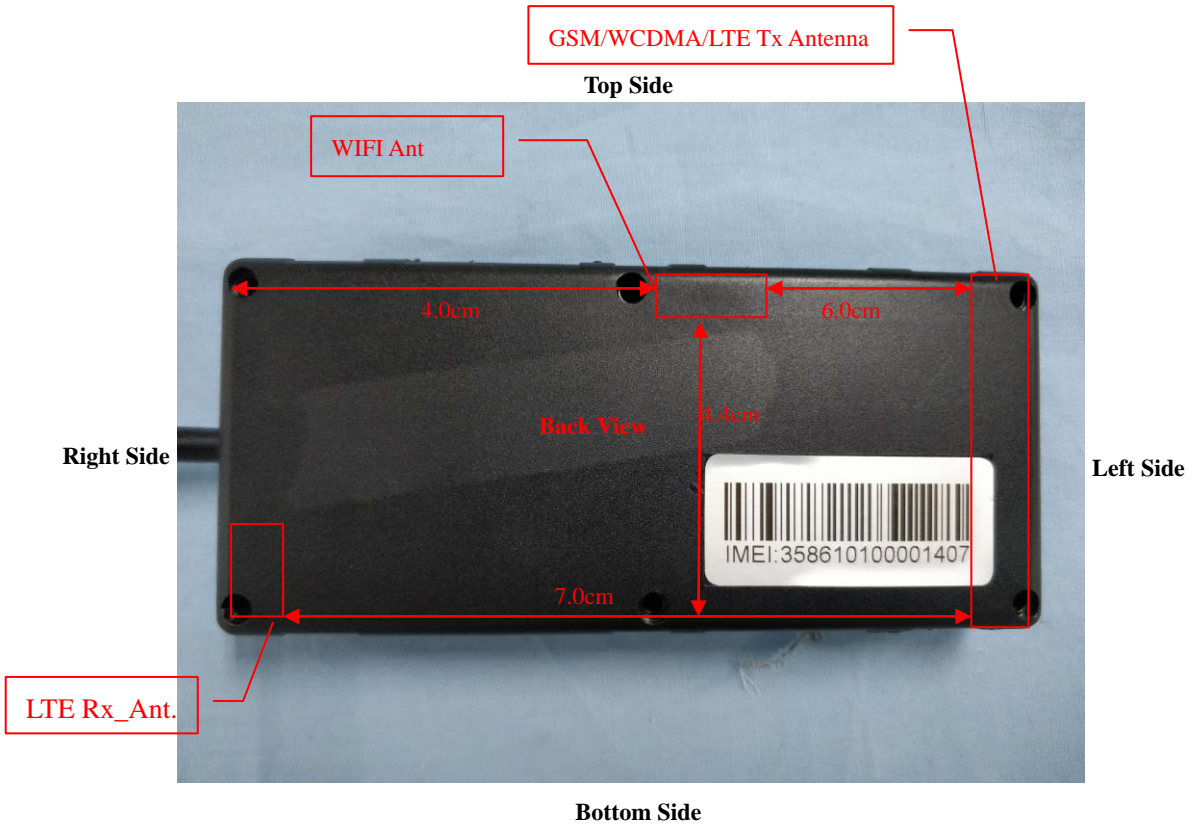

## 7.2 EUT Testing Position

Body/ Front of face SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Body SAR tests, Test distance: 5mm						
Antennas	Front	Back	Right Side	Left Side	Top Side	Bottom Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
WLAN	Yes	Yes	No	Yes	Yes	Yes

**Remark:**

1. Referring to KDB 447498 D01,v06, Devices that are designed to operate on the body of users using lanyards and straps or without requiring additional body-worn accessories must be tested for SAR compliance using a conservative minimum test separation distance  $\leq 5$  mm to support compliance, so the test separation distances is 5 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

*Please refer to Annex D for the EUT test setup photos.*

---

## 8. SAR Measurement Procedures

---

### 8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

### 8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

### 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

## 9. SAR Test Result

### 9.1 Conducted RF Output Power

GSM - Burst Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	31.92	31.83	31.83	32.0	29.16	29.09	29.02	29.5
GPRS (1 slot)	31.17	31.09	31.98	32.0	29.25	29.43	29.12	29.5
GPRS (2 slots)	30.13	30.08	29.97	30.5	27.30	27.26	27.09	27.5
GPRS (3 slots)	28.52	28.42	28.48	29.0	25.87	25.90	25.79	26.5
GPRS (4 slots)	26.87	26.80	26.63	27.0	23.86	23.91	23.83	24.0
EDGE (1 slot)	25.50	25.55	25.38	26.0	25.23	25.82	24.94	26.0
EDGE (2 slots)	25.43	25.50	25.25	26.0	25.10	25.64	24.83	26.0
EDGE (3 slots)	24.21	24.20	23.91	24.5	23.61	24.46	23.30	24.5
EDGE (4 slots)	22.08	22.08	21.86	22.5	21.00	21.82	20.44	22.0

GSM - Source-Based Time-Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	22.92	22.83	22.83	23.0	20.16	20.09	20.02	20.5
GPRS (1 slot)	22.17	22.09	22.98	23.0	20.25	20.43	20.12	20.5
GPRS (2 slots)	24.13	24.08	23.97	24.5	21.30	21.26	21.09	21.5
GPRS (3 slots)	24.27	24.17	24.23	24.5	21.62	21.65	21.54	22.0
GPRS (4 slots)	23.87	23.80	23.63	24.0	20.86	20.91	20.83	21.0
EDGE(1 slot)	16.50	16.55	16.38	17.0	16.23	16.82	15.94	17.0
EDGE (2 slots)	19.43	19.50	19.25	20.0	19.10	19.64	18.83	20.0
EDGE (3 slots)	19.96	19.95	19.66	20.0	19.36	20.21	19.05	20.5
EDGE (4 slots)	19.08	19.08	18.86	19.5	18.00	18.82	17.44	19.0

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

#### Remark:

1. For Body SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (3Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900 due to its highest source-based time-average power.
2. Per KDB 447498 D01 v06 , the maximum output power channel is used for SAR testing and for further SAR test reduction.
3. The DUT do not support DTM function.

WCDMA - Average Power (dBm)								
Band	WCDMA Band II				WCDMA Band V			
Channel	9262	9400	9538	Tune-up power (dBm)	4132	4183	4233	Tune-up power (dBm)
Frequency (MHz)	1852.4	1880.0	1907.6		826.4	836.6	846.6	
RMC 12.2k	23.08	23.01	22.94	23.5	22.05	22.61	22.03	23.0
HSDPA Subtest-1	22.00	21.80	21.76	22.0	21.68	22.14	21.29	22.5
HSDPA Subtest-2	21.98	21.78	21.75	22.0	21.63	22.13	21.27	22.5
HSDPA Subtest-3	21.96	21.76	21.75	22.0	21.65	22.12	21.26	22.5
HSDPA Subtest-4	21.97	21.78	21.76	22.0	21.65	22.11	21.26	22.5
HSUPA Subtest-1	22.05	21.93	21.87	22.5	21.59	22.09	21.33	22.5
HSUPA Subtest-2	22.02	21.9	21.85	22.5	21.56	22.05	21.31	22.5
HSUPA Subtest-3	22.02	21.91	21.86	22.5	21.57	22.05	21.32	22.5
HSUPA Subtest-4	22.03	21.92	21.85	22.5	21.56	22.06	21.32	22.5
HSUPA Subtest-5	22.03	21.91	21.86	22.5	21.56	22.07	21.32	22.5

**FDD-LTE Band 2:**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.44	0
		1	3	22.50	0
		1	5	22.50	0
		3	0	22.39	0
		3	2	22.32	0
		3	3	22.36	0
		6	0	22.03	1
	MCH	1	0	22.30	0
		1	3	22.27	0
		1	5	22.30	0
		3	0	22.33	0
		3	2	22.35	0
		3	3	22.26	0
		6	0	21.79	1
	HCH	1	0	22.11	0
		1	3	22.11	0
		1	5	22.09	0
		3	0	22.14	0
		3	2	22.21	0
		3	3	22.14	0
		6	0	21.70	1
16QAM	LCH	1	0	22.47	1
		1	3	22.41	1
		1	5	22.45	1
		3	0	21.96	1
		3	2	21.91	1
		3	3	21.97	1
		6	0	21.03	2
	MCH	1	0	22.22	1
		1	3	22.19	1
		1	5	22.19	1
		3	0	21.76	1
		3	2	21.70	1
		3	3	21.68	1
		6	0	20.69	2
HCH	1	0	21.92	1	
	1	3	21.92	1	



		1	5	21.88	1
		3	0	21.59	1
		3	2	21.66	1
		3	3	21.59	1
		6	0	20.85	2

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.46	0
		1	7	22.46	0
		1	14	22.47	0
		8	0	21.99	1
		8	4	21.97	1
		8	7	21.99	1
		15	0	22.06	1
	MCH	1	0	22.21	0
		1	7	22.17	0
		1	14	22.14	0
		8	0	21.86	1
		8	4	21.83	1
		8	7	21.74	1
		15	0	21.78	1
	HCH	1	0	22.12	0
		1	7	22.11	0
		1	14	22.14	0
		8	0	21.62	1
		8	4	21.61	1
		8	7	21.58	1
		15	0	21.63	1
16QAM	LCH	1	0	22.13	1
		1	7	22.04	1
		1	14	22.12	1
		8	0	21.11	2
		8	4	21.15	2
		8	7	21.01	2
		15	0	21.21	2
	MCH	1	0	22.24	1
		1	7	22.25	1
		1	14	22.31	1
		8	0	20.94	2
		8	4	20.91	2
		8	7	20.83	2

	HCH	15	0	20.89	2
		1	0	22.46	1
		1	7	22.42	1
		1	14	22.38	1
		8	0	20.98	2
		8	4	20.98	2
		8	7	20.94	2
		15	0	20.80	2

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.55	0
		1	12	22.53	0
		1	24	22.53	0
		12	0	22.10	1
		12	6	22.10	1
		12	13	22.03	1
		25	0	22.04	1
	MCH	1	0	22.19	0
		1	12	22.25	0
		1	24	22.25	0
		12	0	21.72	1
		12	6	21.76	1
		12	13	21.73	1
		25	0	21.74	1
	HCH	1	0	22.26	0
		1	12	22.23	0
		1	24	22.27	0
		12	0	21.58	1
		12	6	21.55	1
		12	13	21.66	1
		25	0	21.69	1
16QAM	LCH	1	0	21.90	1
		1	12	21.97	1
		1	24	21.91	1
		12	0	21.19	2
		12	6	21.16	2
		12	13	21.15	2
		25	0	21.38	2
	MCH	1	0	22.46	1
		1	12	22.42	1
		1	24	22.41	1

		12	0	21.01	2
		12	6	20.96	2
		12	13	20.85	2
		25	0	21.10	2
	HCH	1	0	21.30	1
		1	12	21.33	1
		1	24	21.37	1
		12	0	20.67	2
		12	6	20.71	2
		12	13	20.66	2
		25	0	20.87	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.49	0
		1	24	22.37	0
		1	49	22.39	0
		25	0	21.92	1
		25	12	21.87	1
		25	25	21.99	1
		50	0	21.93	1
	MCH	1	0	22.25	0
		1	24	22.23	0
		1	49	22.15	0
		25	0	21.82	1
		25	12	21.72	1
		25	25	21.69	1
		50	0	21.75	1
	HCH	1	0	22.24	0
		1	24	22.22	0
		1	49	22.17	0
		25	0	21.68	1
		25	12	21.75	1
		25	25	21.54	1
		50	0	21.58	1
16QAM	LCH	1	0	22.06	1
		1	24	21.98	1
		1	49	21.99	1
		25	0	21.09	2
		25	12	21.16	2
		25	25	21.14	2
		50	0	21.14	2

	MCH	1	0	22.41	1
		1	24	22.45	1
		1	49	22.34	1
		25	0	20.90	2
		25	12	20.95	2
		25	25	20.97	2
		50	0	20.96	2
	HCH	1	0	21.86	1
		1	24	21.82	1
		1	49	21.87	1
		25	0	20.79	2
		25	12	20.73	2
		25	25	20.85	2
		50	0	20.80	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.54	0
		1	37	22.41	0
		1	74	22.35	0
		37	0	22.04	1
		37	18	22.03	1
		37	38	21.94	1
		75	0	22.01	1
	MCH	1	0	22.35	0
		1	37	22.31	0
		1	74	22.24	0
		37	0	21.83	1
		37	18	21.77	1
		37	38	21.72	1
		75	0	21.77	1
	HCH	1	0	22.31	0
		1	37	22.26	0
		1	74	22.19	0
		37	0	21.75	1
		37	18	21.75	1
		37	38	21.70	1
		75	0	21.72	1
16QAM	LCH	1	0	22.07	1
		1	37	22.02	1
		1	74	21.95	1
		37	0	21.18	2

		37	18	21.13	2
		37	38	21.13	2
		75	0	21.12	2
	MCH	1	0	22.49	1
		1	37	22.48	1
		1	74	22.47	1
		37	0	21.05	2
		37	18	21.01	2
		37	38	21.02	2
		75	0	20.96	2
	HCH	1	0	21.92	1
		1	37	21.87	1
		1	74	21.85	1
		37	0	20.85	2
		37	18	20.86	2
		37	38	20.77	2
75		0	20.85	2	

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.15	0
		1	49	23.06	0
		1	99	23.01	0
		50	0	22.44	1
		50	25	21.96	1
		50	50	21.89	1
		100	0	22.02	1
	MCH	1	0	22.92	0
		1	49	22.84	0
		1	99	22.72	0
		50	0	21.94	1
		50	25	21.79	1
		50	50	21.79	1
		100	0	21.75	1
	HCH	1	0	22.94	0
		1	49	22.82	0
		1	99	22.81	0
		50	0	21.73	1
		50	25	21.61	1
		50	50	21.70	1
		100	0	21.65	1
16QAM	LCH	1	0	21.84	1

		1	49	21.73	1
		1	99	21.61	1
		50	0	21.15	2
		50	25	21.11	2
		50	50	21.04	2
		100	0	21.10	2
	MCH	1	0	21.60	1
		1	49	21.47	1
		1	99	21.45	1
		50	0	21.02	2
		50	25	20.92	2
		50	50	20.88	2
	HCH	100	0	20.98	2
		1	0	21.93	1
		1	49	21.94	1
		1	99	21.96	1
		50	0	20.88	2
		50	25	20.84	2
		50	50	20.84	2
	100	0	20.81	2	

**FDD-LTE Band 4:**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.32	0
		1	3	23.33	0
		1	5	23.28	0
		3	0	22.17	0
		3	2	22.18	0
		3	3	22.17	0
		6	0	22.26	1
	MCH	1	0	22.83	0
		1	3	22.75	0
		1	5	22.89	0
		3	0	22.23	0
		3	2	22.29	0
		3	3	22.26	0
	HCH	6	0	21.87	1
		1	0	22.00	0
		1	3	21.73	0

		1	5	21.78	0
		3	0	21.90	0
		3	2	21.78	0
		3	3	21.76	0
		6	0	20.94	1
16QAM	LCH	1	0	22.28	1
		1	3	22.38	1
		1	5	22.29	1
		3	0	22.21	1
		3	2	22.19	1
		3	3	22.18	1
		6	0	21.15	2
	MCH	1	0	22.21	1
		1	3	22.18	1
		1	5	22.31	1
		3	0	21.79	1
		3	2	21.85	1
		3	3	21.90	1
		6	0	20.91	2
	HCH	1	0	21.30	1
		1	3	21.11	1
		1	5	21.16	1
		3	0	21.10	1
		3	2	20.99	1
		3	3	20.97	1
		6	0	20.75	2

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.17	0
		1	7	23.24	0
		1	14	23.16	0
		8	0	22.23	1
		8	4	22.23	1
		8	7	22.22	1
		15	0	22.19	1
	MCH	1	0	22.68	0
		1	7	22.70	0
		1	14	22.78	0
		8	0	21.79	1
		8	4	21.85	1
		8	7	21.90	1

	HCH	15	0	21.80	1
		1	0	22.26	0
		1	7	21.93	0
		1	14	21.75	0
		8	0	21.26	1
		8	4	21.07	1
		8	7	20.97	1
		15	0	21.12	1
16QAM	LCH	1	0	22.29	1
		1	7	22.35	1
		1	14	22.29	1
		8	0	21.20	2
		8	4	21.23	2
		8	7	21.19	2
		15	0	21.09	2
	MCH	1	0	22.05	1
		1	7	22.14	1
		1	14	22.21	1
		8	0	20.88	2
		8	4	20.94	2
		8	7	21.03	2
		15	0	20.90	2
	HCH	1	0	21.60	1
		1	7	21.24	1
		1	14	21.13	1
		8	0	20.72	2
		8	4	20.85	2
		8	7	20.55	2
		15	0	20.43	2

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.31	0
		1	12	22.99	0
		1	24	22.87	0
		12	0	22.24	1
		12	6	22.23	1
		12	13	22.14	1
		25	0	22.18	1
	MCH	1	0	22.49	0
		1	12	22.33	0
		1	24	22.83	0



		12	0	21.34	1	
		12	6	21.38	1	
		12	13	21.55	1	
		25	0	21.38	1	
	HCH	1	0	22.51	0	
		1	12	21.66	0	
		1	24	21.65	0	
		12	0	21.14	1	
		12	6	20.77	1	
		12	13	20.78	1	
		25	0	20.83	1	
		16QAM	LCH	1	0	22.38
	1			12	22.40	1
1	24			22.27	1	
12	0			21.22	2	
12	6			21.21	2	
12	13			21.22	2	
25	0			21.14	2	
MCH	1		0	21.75	1	
	1		12	21.66	1	
	1		24	22.11	1	
	12		0	20.59	2	
	12		6	20.58	2	
	12		13	20.75	2	
	25	0	20.49	2		
HCH	1	0	21.78	1		
	1	12	20.92	1		
	1	24	20.91	1		
	12	0	20.37	2		
	12	6	20.91	2		
	12	13	20.71	2		
	25	0	20.99	2		

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.08	0
		1	24	22.40	0
		1	49	21.57	0
		25	0	22.17	1
		25	12	21.75	1
		25	25	21.26	1
		50	0	21.80	1
	MCH	1	0	21.62	0
		1	24	22.14	0
		1	49	22.34	0
		25	0	21.00	1
		25	12	21.21	1
		25	25	21.51	1
		50	0	21.27	1
	HCH	1	0	22.69	0
		1	24	22.03	0
		1	49	21.96	0
		25	0	21.79	1
		25	12	21.32	1
		25	25	20.70	1
		50	0	21.35	1
16QAM	LCH	1	0	22.38	1
		1	24	21.82	1
		1	49	20.98	1
		25	0	21.16	2
		25	12	20.89	2
		25	25	20.75	2
		50	0	20.93	2
	MCH	1	0	21.05	1
		1	24	21.60	1
		1	49	21.81	1
		25	0	20.90	2
		25	12	20.84	2
		25	25	20.62	2
		50	0	20.87	2
HCH	1	0	22.06	1	
	1	24	21.43	1	
	1	49	20.66	1	
	25	0	20.79	2	

		25	12	20.49	2
		25	25	20.89	2
		50	0	20.61	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.28	0
		1	37	22.07	0
		1	74	21.53	0
		37	0	21.94	1
		37	18	21.32	1
		37	38	20.86	1
		75	0	21.40	1
	MCH	1	0	21.66	0
		1	37	22.04	0
		1	74	22.77	0
		37	0	20.81	1
		37	18	21.10	1
		37	38	21.59	1
		75	0	21.24	1
	HCH	1	0	22.54	0
		1	37	22.32	0
		1	74	21.55	0
		37	0	21.92	1
		37	18	21.65	1
		37	38	20.94	1
		75	0	21.51	1
16QAM	LCH	1	0	22.39	1
		1	37	21.46	1
		1	74	20.92	1
		37	0	21.01	2
		37	18	20.43	2
		37	38	20.99	2
		75	0	20.80	2
	MCH	1	0	21.00	1
		1	37	21.44	1
		1	74	22.12	1
		37	0	20.92	2
		37	18	20.71	2
		37	38	20.74	2
		75	0	20.63	2
HCH	1	0	21.88	1	

		1	37	21.70	1
		1	74	20.54	1
		37	0	20.96	2
		37	18	20.82	2
		37	38	20.59	2
		75	0	20.65	2

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.39	0
		1	49	21.72	0
		1	99	21.61	0
		50	0	22.46	1
		50	25	21.85	1
		50	50	21.79	1
		100	0	21.09	1
	MCH	1	0	23.12	0
		1	49	22.97	0
		1	99	22.64	0
		50	0	20.68	1
		50	25	21.07	1
		50	50	21.59	1
		100	0	21.21	1
	HCH	1	0	23.17	0
		1	49	22.39	0
		1	99	21.97	0
		50	0	21.70	1
		50	25	21.61	1
		50	50	21.09	1
		100	0	21.47	1
16QAM	LCH	1	0	22.45	1
		1	49	20.99	1
		1	99	20.85	1
		50	0	20.68	2
		50	25	20.96	2
		50	50	20.67	2
		100	0	20.35	2
	MCH	1	0	21.10	1
		1	49	21.39	1
		1	99	22.03	1
		50	0	20.83	2
		50	25	20.98	2

		50	50	20.78	2
		100	0	20.82	2
	HCH	1	0	21.64	1
		1	49	21.82	1
		1	99	20.68	1
		50	0	20.82	2
		50	25	20.79	2
		50	50	20.86	2
		100	0	20.63	2

**FDD-LTE Band 5:**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.65	0
		1	3	23.73	0
		1	5	23.66	0
		3	0	22.68	0
		3	2	22.64	0
		3	3	22.68	0
		6	0	22.70	1
	MCH	1	0	22.22	0
		1	3	22.26	0
		1	5	22.48	0
		3	0	22.04	0
		3	2	22.14	0
		3	3	22.18	0
		6	0	21.14	1
	HCH	1	0	22.77	0
		1	3	22.64	0
		1	5	22.83	0
		3	0	22.65	0
		3	2	22.65	0
		3	3	22.66	0
		6	0	21.77	1
16QAM	LCH	1	0	22.91	1
		1	3	22.84	1
		1	5	22.90	1
		3	0	22.88	1
		3	2	22.75	1
		3	3	22.77	1
		6	0	21.65	2
	MCH	1	0	21.51	1
		1	3	21.69	1
		1	5	21.86	1
		3	0	21.19	1
		3	2	21.28	1
		3	3	21.39	1
		6	0	21.40	2
	HCH	1	0	22.08	1
		1	3	22.01	1
		1	5	22.19	1

		3	0	21.91	1
		3	2	21.87	1
		3	3	21.92	1
		6	0	20.86	2

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.65	0
		1	7	23.74	0
		1	14	23.61	0
		8	0	22.71	1
		8	4	22.70	1
		8	7	22.67	1
		15	0	22.66	1
	MCH	1	0	22.18	0
		1	7	22.14	0
		1	14	22.45	0
		8	0	21.04	1
		8	4	21.13	1
		8	7	21.32	1
		15	0	21.12	1
	HCH	1	0	23.48	0
		1	7	22.76	0
		1	14	22.66	0
		8	0	22.07	1
		8	4	21.81	1
		8	7	21.71	1
		15	0	21.89	1
16QAM	LCH	1	0	22.94	1
		1	7	22.71	1
		1	14	22.86	1
		8	0	21.74	2
		8	4	21.74	2
		8	7	21.68	2
		15	0	21.62	2
	MCH	1	0	21.59	1
		1	7	21.60	1
		1	14	21.94	1
		8	0	21.14	2
		8	4	21.26	2
		8	7	21.44	2
		15	0	21.23	2

HCH	1	0	22.82	1
	1	7	22.15	1
	1	14	22.04	1
	8	0	21.16	2
	8	4	20.90	2
	8	7	20.80	2
	15	0	21.02	2

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.80	0
		1	12	23.85	0
		1	24	23.68	0
		12	0	22.65	1
		12	6	22.62	1
		12	13	22.67	1
		25	0	22.66	1
	MCH	1	0	22.10	0
		1	12	22.17	0
		1	24	22.82	0
		12	0	21.63	1
		12	6	21.69	1
		12	13	21.12	1
		25	0	21.75	1
	HCH	1	0	23.74	0
		1	12	22.83	0
		1	24	22.72	0
		12	0	22.70	1
		12	6	21.94	1
		12	13	21.71	1
		25	0	22.16	1
16QAM	LCH	1	0	22.07	1
		1	12	22.08	1
		1	24	22.93	1
		12	0	21.77	2
		12	6	21.73	2
		12	13	21.69	2
		25	0	21.61	2
	MCH	1	0	21.39	1
		1	12	21.11	1
		1	24	22.20	1
		12	0	20.86	2



		12	6	20.93	2
		12	13	20.87	2
		25	0	20.98	2
	HCH	1	0	22.92	1
		1	12	22.10	1
		1	24	22.00	1
		12	0	21.66	2
		12	6	21.07	2
		12	13	20.64	2
		25	0	21.28	2

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	23.86	0
		1	24	23.28	0
		1	49	22.49	0
		25	0	22.77	1
		25	12	22.46	1
		25	25	21.36	1
		50	0	22.47	1
	MCH	1	0	23.73	0
		1	24	22.64	0
		1	49	23.54	0
		25	0	21.77	1
		25	12	21.79	1
		25	25	21.65	1
		50	0	21.21	1
	HCH	1	0	23.49	0
		1	24	23.68	0
		1	49	22.22	0
		25	0	22.58	1
		25	12	22.62	1
		25	25	22.11	1
		50	0	22.61	1
16QAM	LCH	1	0	22.55	1
		1	24	22.66	1
		1	49	21.91	1
		25	0	21.65	2
		25	12	21.65	2
		25	25	21.55	2
		50	0	21.57	2
	MCH	1	0	21.71	1

		1	24	21.15	1
		1	49	22.97	1
		25	0	20.91	2
		25	12	20.95	2
		25	25	20.79	2
		50	0	20.99	2
	HCH	1	0	22.88	1
		1	24	22.94	1
		1	49	21.63	1
		25	0	21.55	2
		25	12	21.58	2
		25	25	21.26	2
		50	0	21.61	2

**FDD-LTE Band 7:**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	22.70	0
		1	12	22.76	0
		1	24	22.68	0
		12	0	21.40	1
		12	6	21.53	1
		12	13	21.77	1
		25	0	21.66	1
	MCH	1	0	22.37	0
		1	12	22.10	0
		1	24	22.92	0
		12	0	20.97	1
		12	6	20.99	1
		12	13	21.29	1
		25	0	21.07	1
	HCH	1	0	22.41	0
		1	12	22.15	0
		1	24	22.87	0
		12	0	21.01	1
		12	6	21.04	1
		12	13	21.37	1
		25	0	21.11	1
16QAM	LCH	1	0	21.83	1
		1	12	21.93	1
		1	24	21.93	1

		12	0	20.96	2
		12	6	20.67	2
		12	13	20.87	2
		25	0	20.69	2
	MCH	1	0	21.63	1
		1	12	21.37	1
		1	24	21.51	1
		12	0	20.91	2
		12	6	20.95	2
		12	13	20.56	2
		25	0	20.84	2
	HCH	1	0	21.53	1
		1	12	21.28	1
		1	24	21.17	1
		12	0	20.53	2
		12	6	20.66	2
		12	13	20.96	2
25		0	20.74	2	

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.52	0
		1	24	22.61	0
		1	49	22.62	0
		25	0	21.23	1
		25	12	21.75	1
		25	25	21.74	1
		50	0	21.72	1
	MCH	1	0	21.14	0
		1	24	21.64	0
		1	49	22.22	0
		25	0	20.70	1
		25	12	20.68	1
		25	25	21.03	1
		50	0	20.72	1
	HCH	1	0	21.56	0
		1	24	21.49	0
		1	49	21.84	0
		25	0	20.66	1
		25	12	20.98	1
		25	25	20.75	1
		50	0	20.82	1

16QAM	LCH	1	0	20.83	1
		1	24	21.94	1
		1	49	21.89	1
		25	0	20.95	2
		25	12	20.77	2
		25	25	20.73	2
		50	0	20.79	2
	MCH	1	0	20.54	1
		1	24	21.11	1
		1	49	21.63	1
		25	0	20.61	2
		25	12	20.88	2
		25	25	20.85	2
		50	0	20.95	2
	HCH	1	0	20.86	1
		1	24	20.86	1
		1	49	21.15	1
		25	0	20.65	2
		25	12	20.71	2
		25	25	20.89	2
		50	0	20.78	2

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.74	0
		1	37	22.74	0
		1	74	22.19	0
		37	0	21.61	1
		37	18	21.86	1
		37	38	21.81	1
		75	0	21.82	1
	MCH	1	0	21.09	0
		1	37	21.59	0
		1	74	22.84	0
		37	0	20.91	1
		37	18	20.66	1
		37	38	21.29	1
		75	0	20.81	1
	HCH	1	0	22.09	0
		1	37	21.37	0
		1	74	22.02	0
		37	0	20.80	1

		37	18	20.90	1
		37	38	20.75	1
		75	0	20.66	1
16QAM	LCH	1	0	21.05	1
		1	37	21.99	1
		1	74	21.65	1
		37	0	20.73	2
		37	18	20.80	2
		37	38	20.81	2
		75	0	20.81	2
	MCH	1	0	20.74	1
		1	37	20.99	1
		1	74	21.14	1
		37	0	20.81	2
		37	18	20.88	2
		37	38	20.51	2
		75	0	20.82	2
	HCH	1	0	21.38	1
		1	37	20.75	1
		1	74	21.34	1
		37	0	20.90	2
		37	18	20.73	2
		37	38	20.79	2
		75	0	20.89	2

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	MPR (dB)
		Size	Offset		
QPSK	LCH	1	0	21.80	0
		1	49	22.61	0
		1	99	21.60	0
		50	0	21.75	1
		50	25	21.78	1
		50	50	21.39	1
		100	0	21.60	1
	MCH	1	0	21.14	0
		1	49	21.60	0
		1	99	22.98	0
		50	0	21.17	1
		50	25	21.64	1
		50	50	21.93	1
		100	0	20.83	1
	HCH	1	0	22.58	0

		1	49	21.33	0
		1	99	21.80	0
		50	0	21.15	1
		50	25	20.56	1
		50	50	20.85	1
		100	0	20.82	1
16QAM	LCH	1	0	21.01	1
		1	49	21.91	1
		1	99	20.89	1
		50	0	20.76	2
		50	25	20.71	2
		50	50	20.95	2
		100	0	20.74	2
	MCH	1	0	20.58	1
		1	49	21.01	1
		1	99	21.36	1
		50	0	20.39	2
		50	25	20.86	2
		50	50	20.60	2
		100	0	20.90	2
	HCH	1	0	21.92	1
		1	49	20.76	1
		1	99	21.21	1
		50	0	20.90	2
		50	25	20.83	2
		50	50	20.63	2
		100	0	20.75	2

**Remark:**

- Per KDB941225 D05 v02r05, Start with the largest channel bandwidth then measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. 6 When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.
- Per KDB941225 D05 v02r05, The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
- Per KDB941225 D05 v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
- Per KDB941225 D05 v02r05, For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures

in 5.2.1, 5.2.2, and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

WLAN(2.4G) - Maximum Average Power					
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	14.02	14.5
		CH 06	2437	13.58	14.5
		CH 11	2462	13.00	14.5
802.11g	6Mbps	CH 01	2412	12.16	13.5
		CH 06	2437	13.31	13.5
		CH 11	2462	11.82	13.5
802.11n (20MHz)	MCS0	CH 01	2412	11.26	12.0
		CH 06	2437	11.65	12.0
		CH 11	2462	9.31	12.0

**Remark:**

1. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
2. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements ,when the reported SAR of the highest measured maximum output power channel (see 3.1) for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.
- 3 .For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is  $\leq 1.2$ W/kg.



## 9.2 Test Results for Standalone SAR Test

### Body/ Hotspot SAR

GSM850 – Body SAR Test (Gap: 5mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1.	GPRS_3TX	Back Side	128	824.2	28.52	29.0	1.117	0.401	0.448
2.	GPRS_3TX	Front Side	128	824.2	28.52	29.0	1.117	0.452	0.505
3.	GPRS_3TX	Left Side	128	824.2	28.52	29.0	1.117	0.335	0.374
4.	GPRS_3TX	Top Side	128	824.2	28.52	29.0	1.117	0.156	0.174
5.	GPRS_3TX	Bottom Side	128	824.2	28.52	29.0	1.117	0.242	0.270

GSM1900 – Body SAR Test (Gap: 5mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
6.	GPRS_3TX	Back Side	661	1880	25.90	26.5	1.148	0.645	0.741
7.	GPRS_3TX	Front Side	661	1880	25.90	26.5	1.148	0.632	0.726
8.	GPRS_3TX	Left Side	661	1880	25.90	26.5	1.148	0.364	0.418
9.	GPRS_3TX	Top Side	661	1880	25.90	26.5	1.148	0.159	0.183
10.	GPRS_3TX	Bottom Side	661	1880	25.90	26.5	1.148	0.235	0.270

WCDMA Band V – Body SAR Test (Gap: 5mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
11.	RMC 12.2k	Back Side	4183	836.6	22.61	23.0	1.094	0.287	0.314
12.	RMC 12.2k	Front Side	4183	836.6	22.61	23.0	1.094	0.337	0.369
13.	RMC 12.2k	Left Side	4183	836.6	22.61	23.0	1.094	0.203	0.222
14.	RMC 12.2k	Top Side	4183	836.6	22.61	23.0	1.094	0.091	0.100
15.	RMC 12.2k	Bottom Side	4183	836.6	22.61	23.0	1.094	0.137	0.150

WCDMA Band II – Body SAR Test (Gap: 5mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
16.	RMC 12.2k	Back Side	9262	1852.4	23.08	23.5	1.102	0.813	0.896
17.	RMC 12.2k	Back Side	9400	1880.0	23.01	23.5	1.119	0.783	0.877
18.	RMC 12.2k	Back Side	9583	1907.6	22.94	23.5	1.138	0.765	0.870
19.	RMC 12.2k	Front Side	9262	1852.4	23.08	23.5	1.102	0.877	0.966
20.	RMC 12.2k	Front Side	9400	1880.0	23.01	23.5	1.119	0.803	0.899
21.	RMC 12.2k	Front Side	9583	1907.6	22.94	23.5	1.138	0.751	0.854
22.	RMC 12.2k	Left Side	9262	1852.4	23.08	23.5	1.102	0.589	0.649
23.	RMC 12.2k	Top Side	9262	1852.4	23.08	23.5	1.102	0.223	0.246
24.	RMC 12.2k	Bottom Side	9262	1852.4	23.08	23.5	1.102	0.335	0.369

LTE Band 2–Body SAR Test (Gap: 5mm)									
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB		MHz						
25.	RMC QPSK 20MHz 1RB	Back Side	1860.0	23.15	23.5	1.084	0.826	0.895	
26.	RMC QPSK 20MHz 1RB	Back Side	1880.0	22.92	23.5	1.143	0.888	1.015	
27.	RMC QPSK 20MHz 1RB	Back Side	1900.0	22.94	23.5	1.138	0.846	0.962	
28.	RMC QPSK 20MHz 1RB	Front Side	1860.0	23.15	23.5	1.084	0.789	0.855	
29.	RMC QPSK 20MHz 1RB	Left Side	1860.0	23.15	23.5	1.084	0.608	0.659	
30.	RMC QPSK 20MHz 1RB	Top Side	1860.0	23.15	23.5	1.084	0.247	0.268	
31.	RMC QPSK 20MHz 1RB	Bottom Side	1860.0	23.15	23.5	1.084	0.341	0.370	
32.	RMC QPSK 20MHz 50%RB	Back Side	1860.0	23.15	23.5	1.084	0.469	0.508	
33.	RMC QPSK 20MHz 50%RB	Front Side	1860.0	23.15	23.5	1.084	0.412	0.447	
34.	RMC QPSK 20MHz 50%RB	Left Side	1860.0	23.15	23.5	1.084	0.353	0.383	
35.	RMC QPSK 20MHz 50%RB	Top Side	1860.0	23.15	23.5	1.084	0.138	0.150	
36.	RMC QPSK 20MHz 50%RB	Bottom Side	1860.0	23.15	23.5	1.084	0.223	0.242	

LTE Band 4–Body SAR Test (Gap: 5mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
37.	RMC QPSK 20MHz 1RB	Back Side	1720.0	23.39	23.5	1.026	0.489	0.502
38.	RMC QPSK 20MHz 1RB	Front Side	1720.0	23.39	23.5	1.026	0.667	0.684
39.	RMC QPSK 20MHz 1RB	Left Side	1720.0	23.39	23.5	1.026	0.688	0.706
40.	RMC QPSK 20MHz 1RB	Top Side	1720.0	23.39	23.5	1.026	0.303	0.311
41.	RMC QPSK 20MHz 1RB	Bottom Side	1720.0	23.39	23.5	1.026	0.205	0.210
42.	RMC QPSK 20MHz 50%RB	Back Side	1720.0	23.39	23.5	1.026	0.256	0.263
43.	RMC QPSK 20MHz 50%RB	Front Side	1720.0	23.39	23.5	1.026	0.342	0.351
44.	RMC QPSK 20MHz 50%RB	Left Side	1720.0	23.39	23.5	1.026	0.339	0.348
45.	RMC QPSK 20MHz 50%RB	Top Side	1720.0	23.39	23.5	1.026	0.137	0.141
46.	RMC QPSK 20MHz 50%RB	Bottom Side	1720.0	23.39	23.5	1.026	0.115	0.118

LTE Band 5–Body SAR Test (Gap: 5mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
47.	RMC QPSK 10MHz 1RB	Back Side	829.0	23.86	24.0	1.033	0.339	0.350
48.	RMC QPSK 10MHz 1RB	Front Side	829.0	23.86	24.0	1.033	0.387	0.400
49.	RMC QPSK 10MHz 1RB	Left Side	829.0	23.86	24.0	1.033	0.211	0.218
50.	RMC QPSK 10MHz 1RB	Top Side	829.0	23.86	24.0	1.033	0.100	0.103
51.	RMC QPSK 10MHz 1RB	Bottom Side	829.0	23.86	24.0	1.033	0.138	0.143
52.	RMC QPSK 10MHz 50%RB	Back Side	829.0	23.86	24.0	1.033	0.166	0.171
53.	RMC QPSK 10MHz 50%RB	Front Side	829.0	23.86	24.0	1.033	0.183	0.189
54.	RMC QPSK 10MHz 50%RB	Left Side	829.0	23.86	24.0	1.033	0.128	0.132
55.	RMC QPSK 10MHz 50%RB	Top Side	829.0	23.86	24.0	1.033	0.066	0.068
56.	RMC QPSK 10MHz 50%RB	Bottom Side	829.0	23.86	24.0	1.033	0.079	0.082

LTE Band 7–Body SAR Test (Gap: 5mm)								
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth		MHz					
57.	RMC,QPSK 20MHz 1RB	Back Side	2535.0	22.98	23.0	1.005	0.239	0.240
58.	RMC,QPSK 20MHz 1RB	Front Side	2535.0	22.98	23.0	1.005	0.508	0.510
59.	RMC,QPSK 20MHz 1RB	Left Side	2535.0	22.98	23.0	1.005	0.361	0.363
60.	RMC,QPSK 20MHz 1RB	Top Side	2535.0	22.98	23.0	1.005	0.052	0.052
61.	RMC,QPSK 20MHz 1RB	Bottom Side	2535.0	22.98	23.0	1.005	0.078	0.078
62.	RMC,QPSK 20MHz 50%RB	Back Side	2535.0	22.98	23.0	1.005	0.137	0.138
63.	RMC,QPSK 20MHz 50%RB	Front Side	2535.0	22.98	23.0	1.005	0.269	0.270
64.	RMC,QPSK 20MHz 50%RB	Left Side	2535.0	22.98	23.0	1.005	0.199	0.200
65.	RMC,QPSK 20MHz 50%RB	Top Side	2535.0	22.98	23.0	1.005	0.033	0.033
66.	RMC,QPSK 20MHz 50%RB	Bottom Side	2535.0	22.98	23.0	1.005	0.051	0.051

WLAN 2.4GHz –Body SAR Test(Gap: 5mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
67.	802.11b	Back Side	01	2412	14.02	14.5	1.117	0.326	0.364
68.	802.11b	Front Side	01	2412	14.02	14.5	1.117	0.283	0.316
69.	802.11b	Top Side	01	2412	14.02	14.5	1.117	0.419	0.468

Remark: Per KDB 447498 D01 v06 , if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

**Repeated SAR**

WCDMA Band II – Body SAR Test (Gap: 5mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
70.	RMC 12.2k	Back Side	9262	1852.4	23.08	23.5	1.102	0.789	0.869
71.	RMC 12.2k	Front Side	9262	1852.4	23.08	23.5	1.102	0.853	0.940

LTE Band 2–Body SAR Test (Gap: 5mm)									
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB		MHz						
72.	RMC QPSK 20MHz 1RB	Back Side	1860.0	23.15	23.5	1.084	0.811	0.879	

**Remark:**

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

### 9.3 Simultaneous Multi-band Transmission SAR Analysis

#### List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Head SAR	Body SAR
1	GSM( Data) + WLAN(Data)	-	Yes
2	WCDMA( Data) + WLAN(Data)	-	Yes
3	LTE(Data) + WLAN(Data)	-	Yes

**Remark:**

1. The maximum SAR summation is calculated based on the same configuration and test position

**SAR**
**WWAN and WLAN**

Position	WWAN		WLAN(2.4G)	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.448	0.364	0.812
Front	GSM850	0.505	0.316	0.821
Top side	GSM850	0.174	0.468	0.642
Bottom side	GSM850	0.270	--	0.270
Right side	GSM850	--	--	--
Left side	GSM850	0.374	--	0.374
Back	GSM1900	0.741	0.364	1.105
Front	GSM1900	0.726	0.316	1.042
Top side	GSM1900	0.183	0.468	0.651
Bottom side	GSM1900	0.270	--	0.270
Right side	GSM1900	--	--	--
Left side	GSM1900	0.418	--	0.418
Back	WCDMA Band V	0.314	0.364	0.678
Front	WCDMA Band V	0.369	0.316	0.685
Top side	WCDMA Band V	0.100	0.468	0.568
Bottom side	WCDMA Band V	0.150	--	0.150
Right side	WCDMA Band V	--	--	--
Left side	WCDMA Band V	0.222	--	0.222
Back	WCDMA Band II	0.896	0.364	1.260
Front	WCDMA Band II	0.966	0.316	1.282
Top side	WCDMA Band II	0.246	0.468	0.714
Bottom side	WCDMA Band II	0.369	--	0.369
Right side	WCDMA Band II	--	--	--
Left side	WCDMA Band II	0.649	--	0.649
Back	LTE Band 2	1.015	0.364	<b>1.379</b>
Front	LTE Band 2	0.855	0.316	1.171
Top side	LTE Band 2	0.268	0.468	0.736
Bottom side	LTE Band 2	0.370	--	0.370
Right side	LTE Band 2	--	--	--
Left side	LTE Band 2	0.659	--	0.659
Back	LTE Band 4	0.502	0.364	0.866
Front	LTE Band 4	0.684	0.316	1.000
Top side	LTE Band 4	0.311	0.468	0.779
Bottom side	LTE Band 4	0.210	--	0.210
Right side	LTE Band 4	--	--	--
Left side	LTE Band 4	0.706	--	0.706

Back	LTE Band 5	0.350	0.364	0.714
Front	LTE Band 5	0.400	0.316	0.716
Top side	LTE Band 5	0.103	0.468	0.571
Bottom side	LTE Band 5	0.143	--	0.143
Right side	LTE Band 5	--	--	--
Left side	LTE Band 5	0.218	--	0.218
Back	LTE Band 7	0.240	0.364	0.604
Front	LTE Band 7	0.510	0.316	0.826
Top side	LTE Band 7	0.052	0.468	0.520
Bottom side	LTE Band 7	0.078	--	0.078
Right side	LTE Band 7	--	--	--
Left side	LTE Band 7	0.363	--	0.363



## 10. Measurement Uncertainty

### 10.1 Uncertainty for EUT SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
<b>Measurement System</b>									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	$\infty$
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	$\infty$
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	$\infty$
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	$\infty$
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
<b>Test Sample Related</b>									
Test sample positioning	E.4.2	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	E.2.9	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	$\infty$
SAR scaling	E6.5	0.0	R	$\sqrt{3}$	1	1	0.0	0.0	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	$\infty$
Liquid conductivity - deviation	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	$\infty$

from target value										
Liquid conductivity measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	$\infty$	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	$\infty$	
Liquid permittivity measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	$\infty$	
Combined Standard Uncertainty			RSS				12.98	12.53		
Expanded Uncertainty (95% Confidence interval)			K=2				25.32	24.43		

## 10.2 Uncertainty for System Performance Check

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
<b>Measurement System</b>									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	$\infty$
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	$\infty$
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	$\infty$
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Modulation response	E.2.5	0	R	$\sqrt{3}$	0	0	0.0	0.0	$\infty$
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	$\infty$
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Extrapolation, interpolation and integration Algorithms for Max.	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$

SAR Evaluation									
<b>Dipole</b>									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	N-1
Input power and SAR drift measurement	8,6.6.2	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	$\infty$
Deviation of experimental dipole from numerical dipole	E.6.4	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	2.0	R	$\sqrt{3}$	1	0.84	1.10	1.10	$\infty$
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				12.00	11.50	
Expanded Uncertainty (95% Confidence interval)			K=2				23.39	22.43	

## Annex A. Plots of System Performance Check

# MEASUREMENT 1

### For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 10/28/2019

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.28; Calibrated: 05/22/2019

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW750
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	750.000000
<b>Relative Permittivity (real part)</b>	54.964739
<b>Conductivity (S/m)</b>	0.931048
<b>Power Variation (%)</b>	0.034745
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3


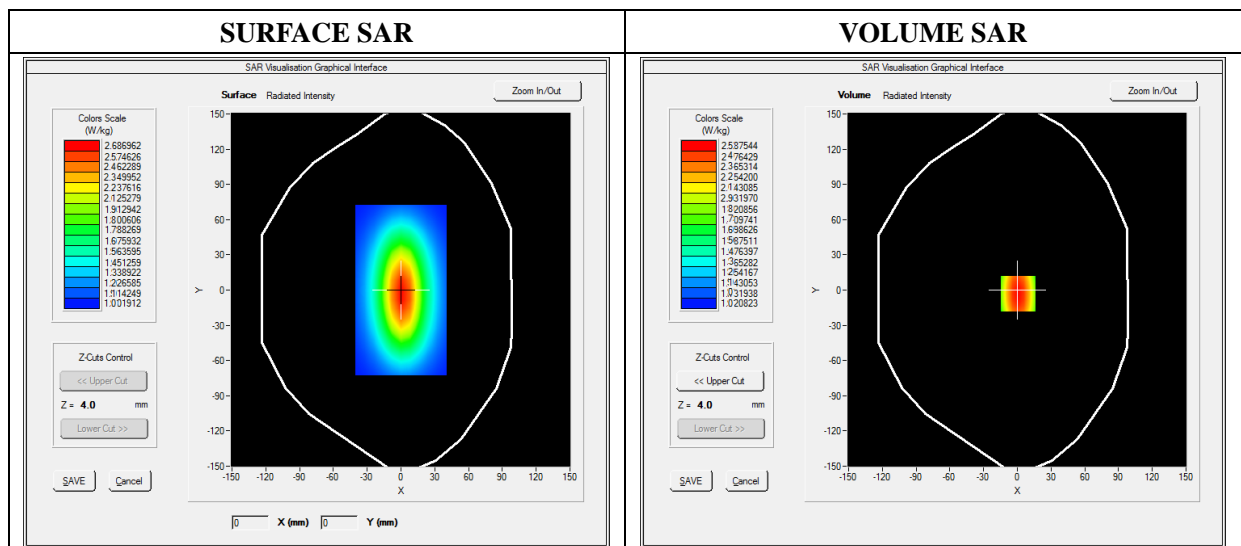


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.000865
SAR 1g (W/Kg)	2.124211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5132	1.1087	0.8214	0.5160	0.4875	0.4864

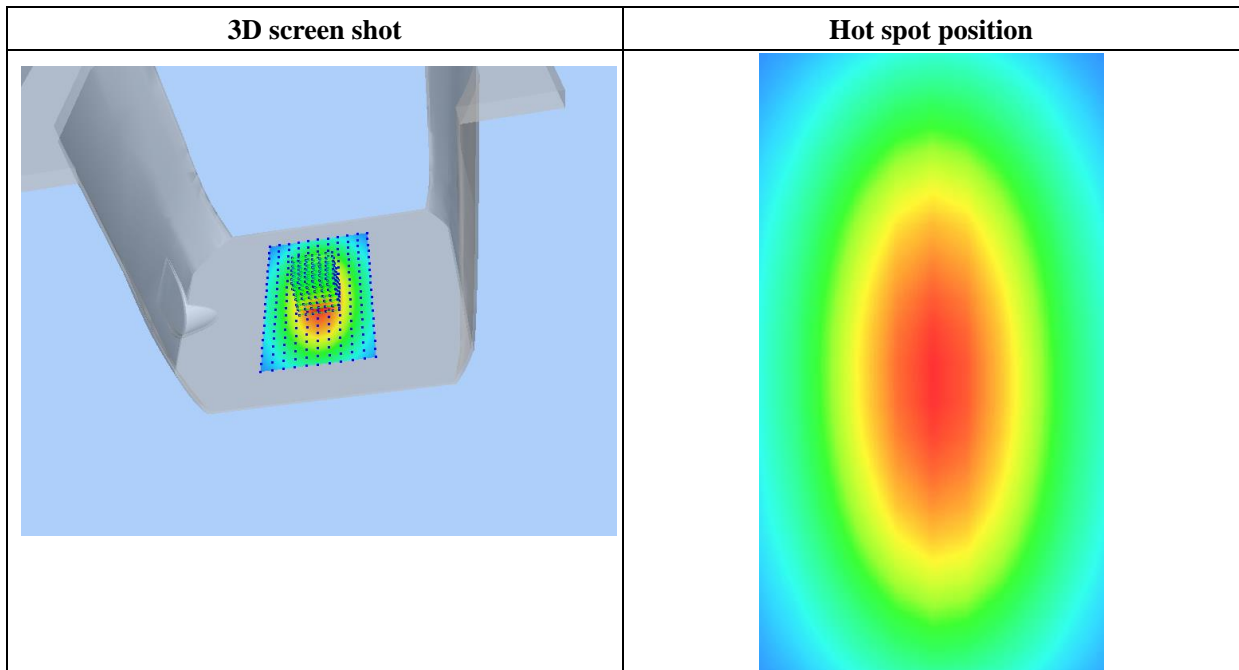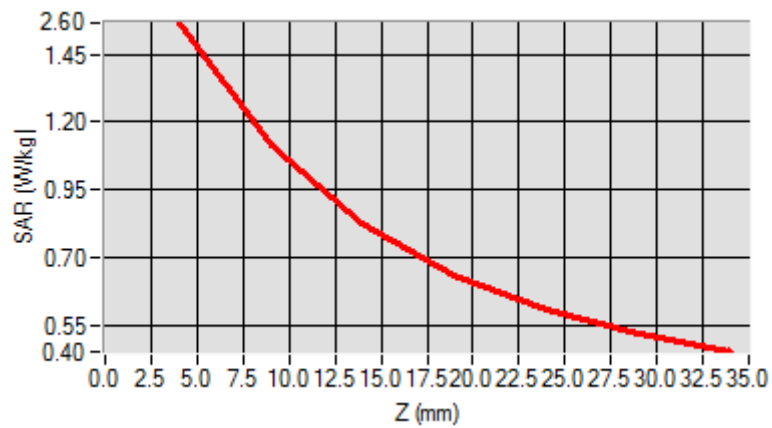

## MEASUREMENT 2

### For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 10/28/2019

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 05/22/2019

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW835
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	835.000000
<b>Relative Permittivity (real part)</b>	54.851214
<b>Conductivity (S/m)</b>	0.951454
<b>Power Variation (%)</b>	0.901472
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3


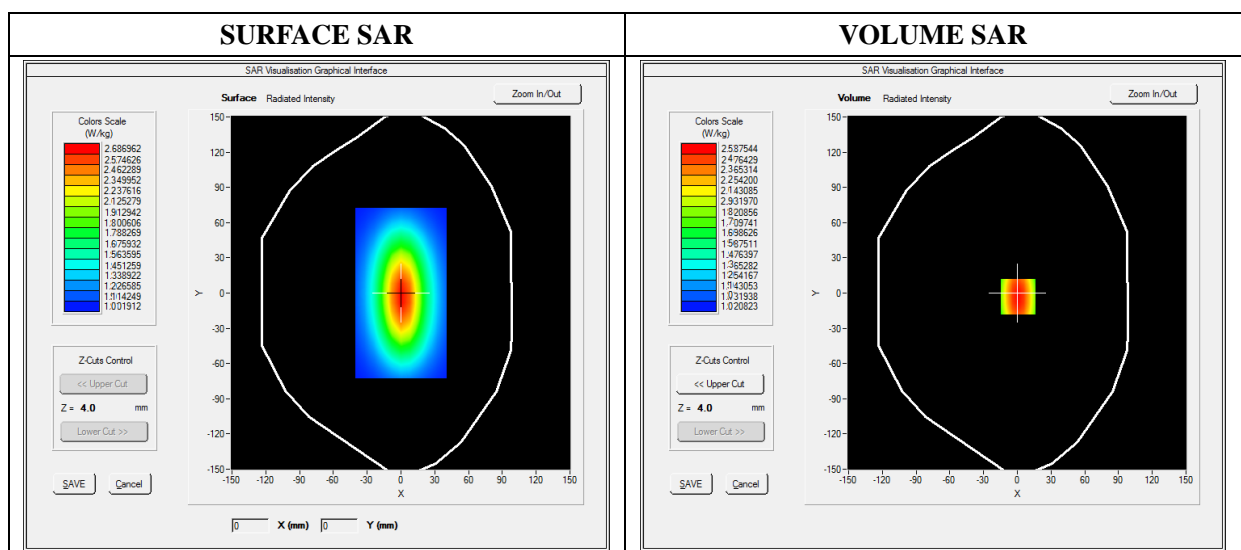


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.028956
SAR 1g (W/Kg)	2.354211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5789	1.1300	0.8795	0.5940	0.5011	0.5100

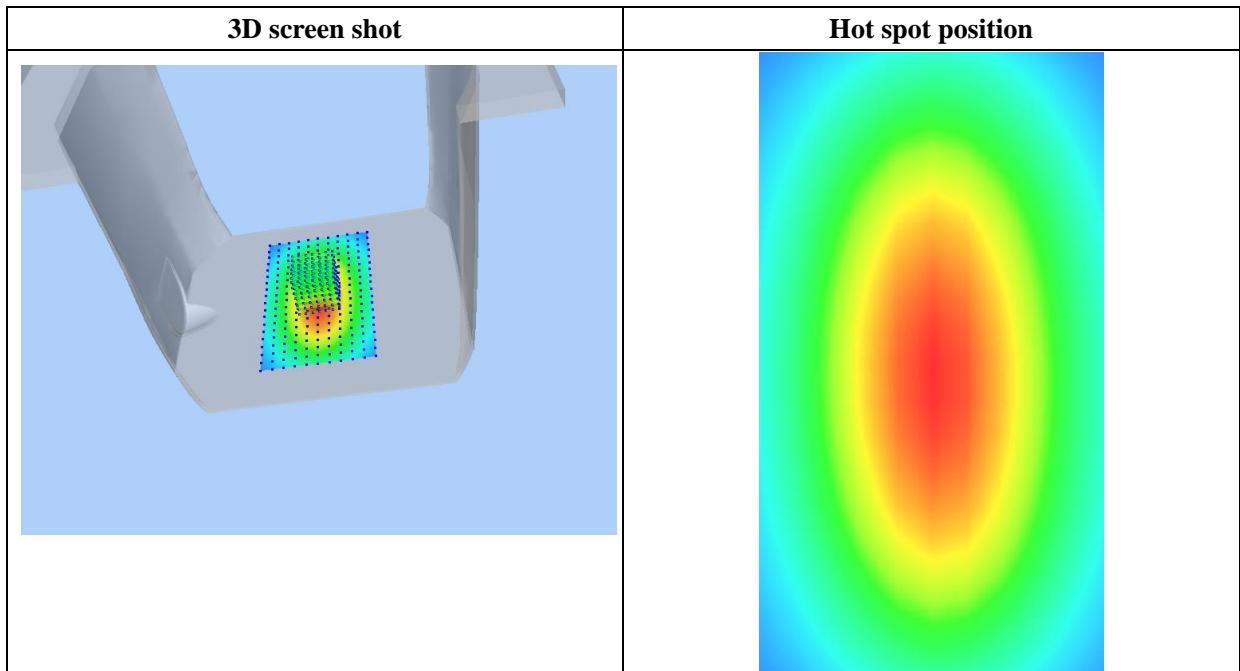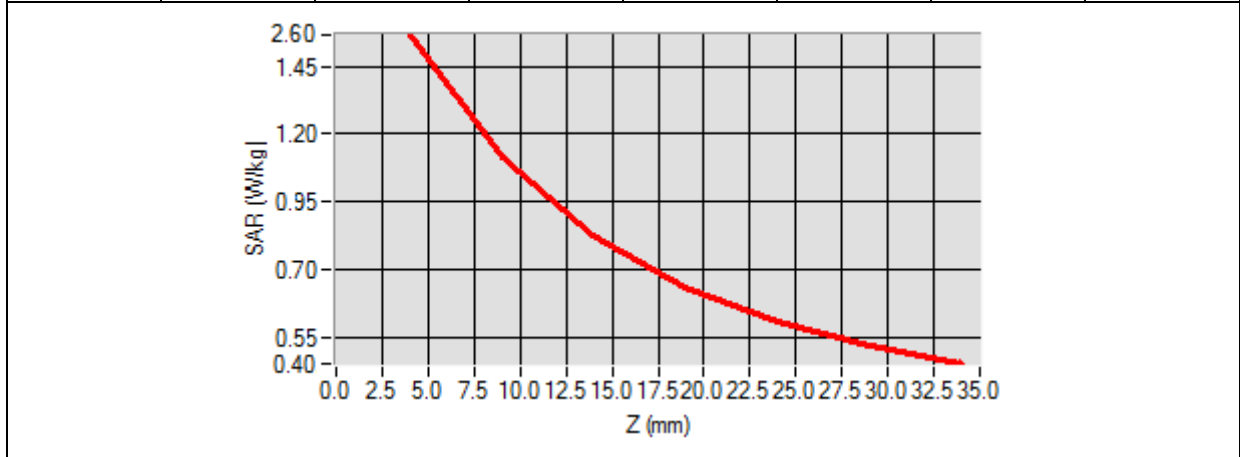

# MEASUREMENT 3

## For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 10/29/2019

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.06; Calibrated: 05/22/2019

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW1800
<b>Signal</b>	CW (Crest factor: 1.0)

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1800.000000
<b>Relative Permittivity (real part)</b>	51.224510
<b>Conductivity (S/m)</b>	1.461261
<b>Power Variation (%)</b>	0.845690
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

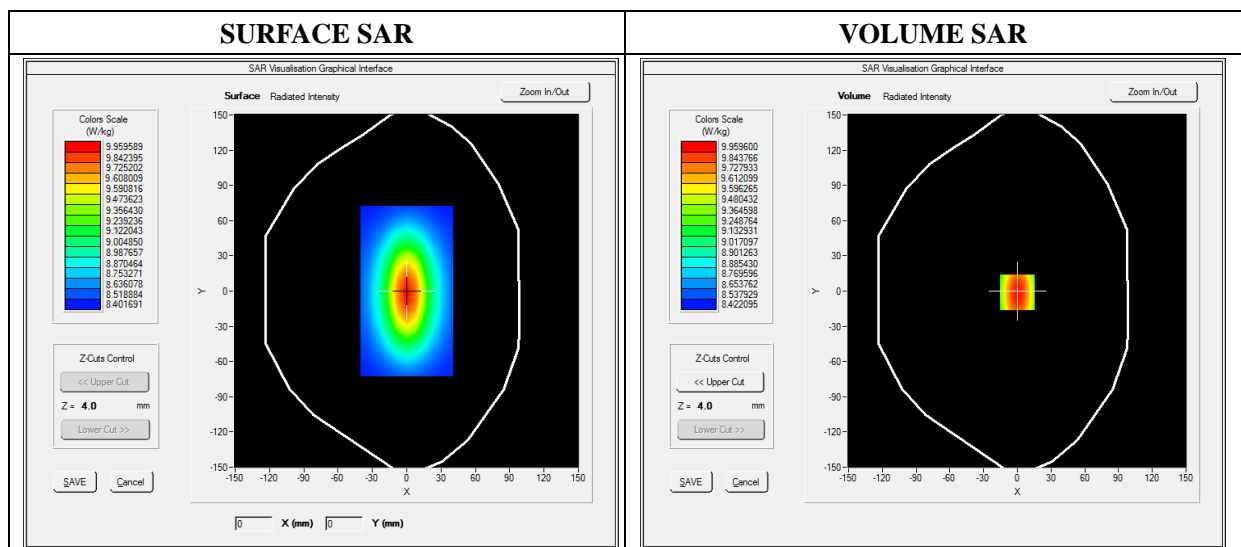




Maximum location: X=0.00, Y=0.00


SAR 10g (W/Kg)	5.221202
SAR 1g (W/Kg)	9.582560

Z Axis Scan


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	11.2425	9.4123	8.0345	6.9125	6.3092	3.9460

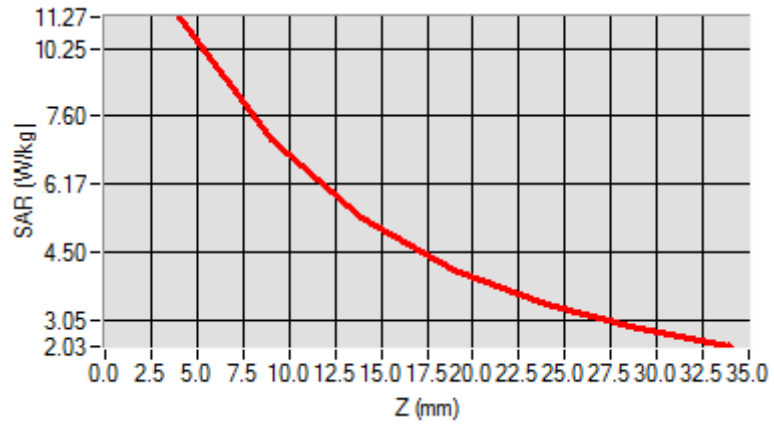

3D screen shot

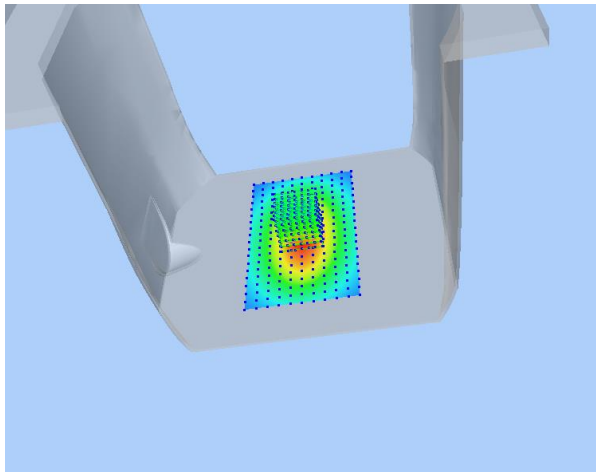

Hot spot position

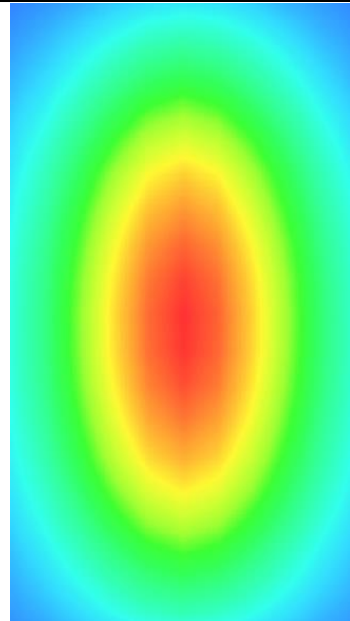

# MEASUREMENT 4

## For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 10/29/2019

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 05/22/2019

### A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	Duty Cycle 1:1

### B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.541872
Ambient Temperature	21.1
Liquid Temperature	21.3


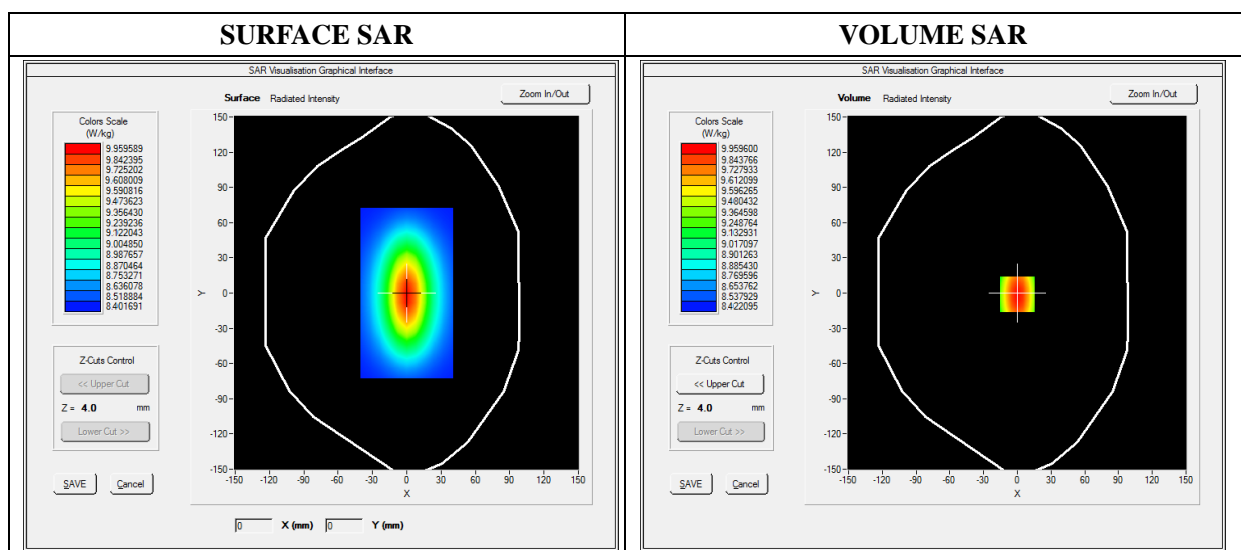


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.134651
SAR 1g (W/Kg)	9.781550

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2031	6.43001	4.9011	4.5325	3.1201	2.5024

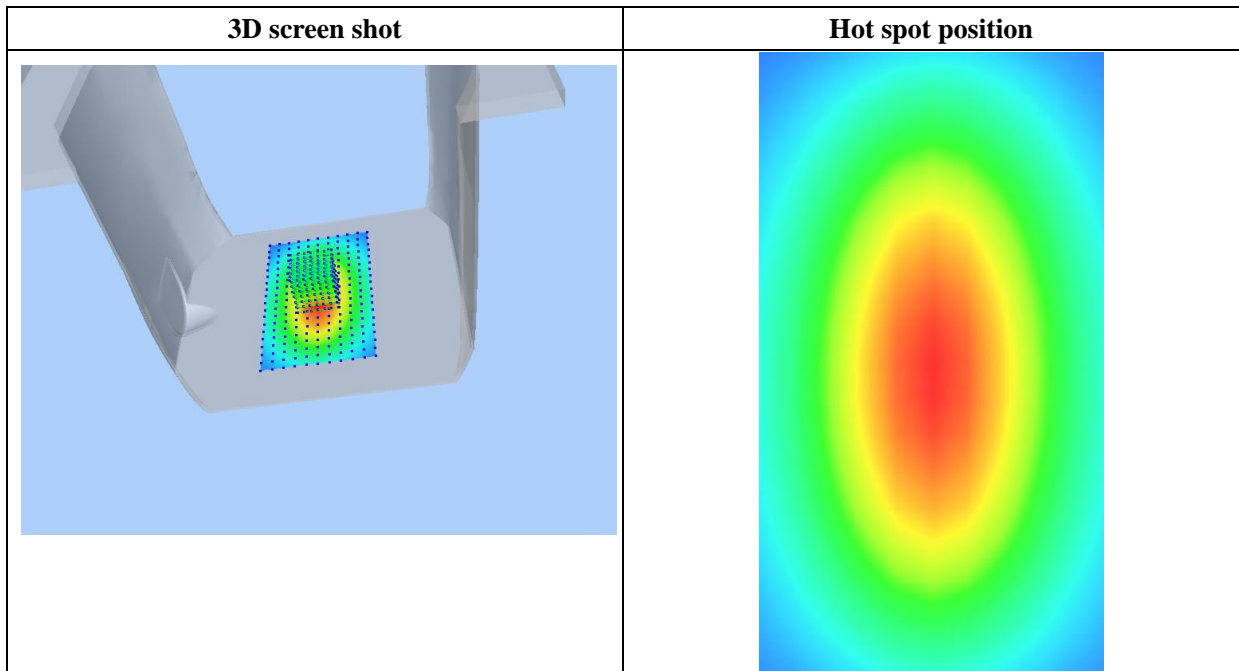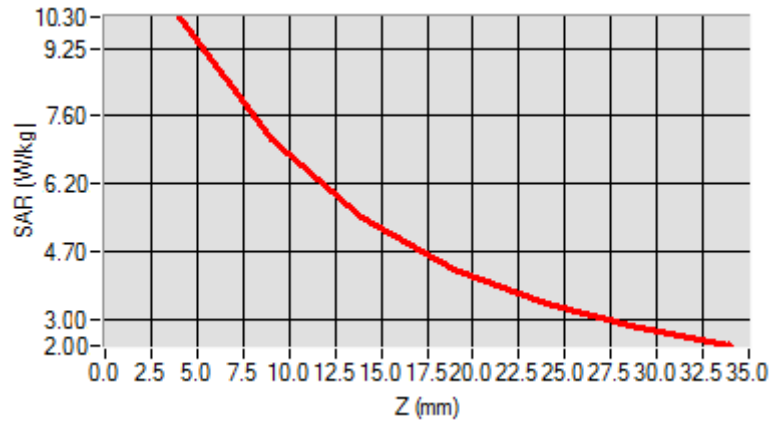

# MEASUREMENT 5

## For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 10/30/2019

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 05/22/2019

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW2450
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2450.000000
<b>Relative Permittivity (real part)</b>	52.010212
<b>Conductivity (S/m)</b>	1.910255
<b>Power Variation (%)</b>	1.369745
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2


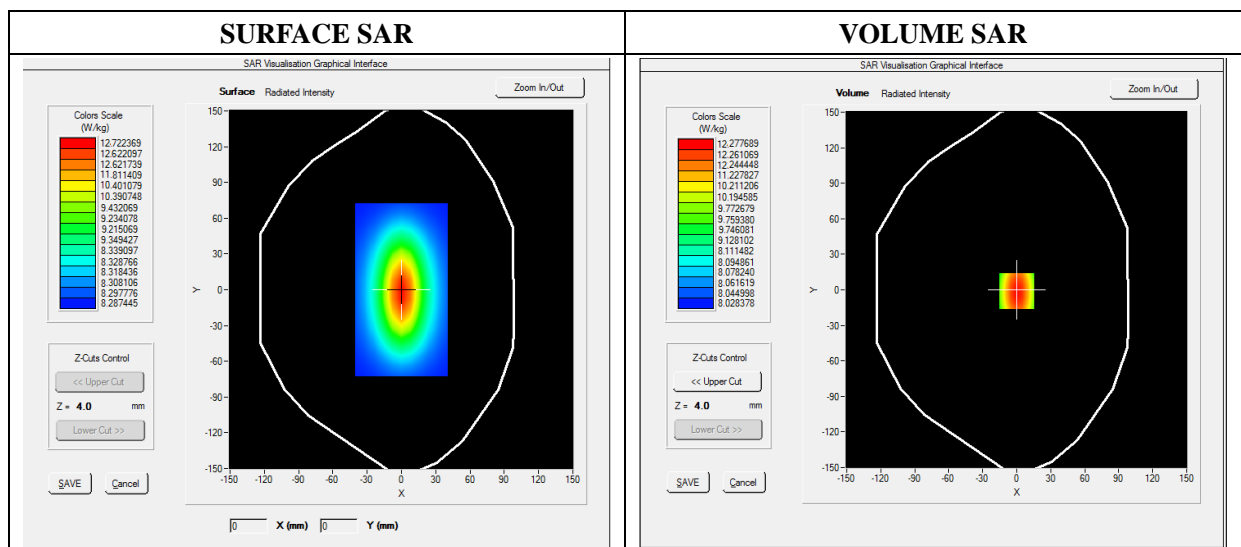


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	7.119522
SAR 1g (W/Kg)	12.592360

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	13.3911	11.7951	9.2945	8.5400	6.3712	4.6225

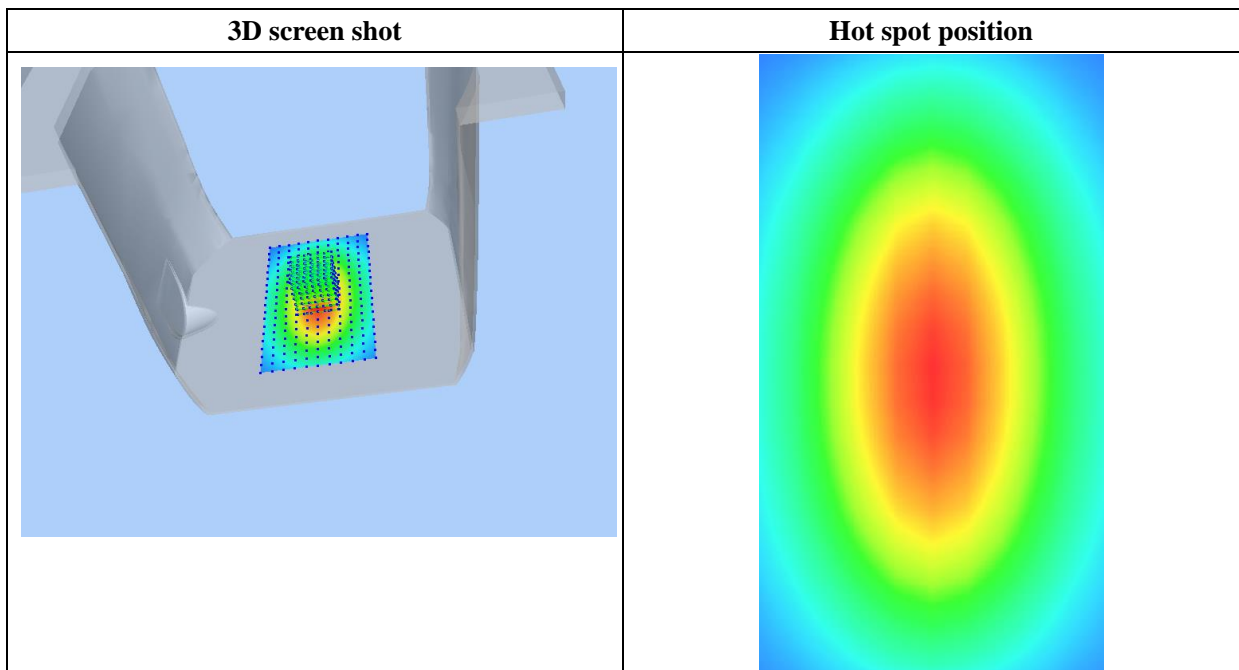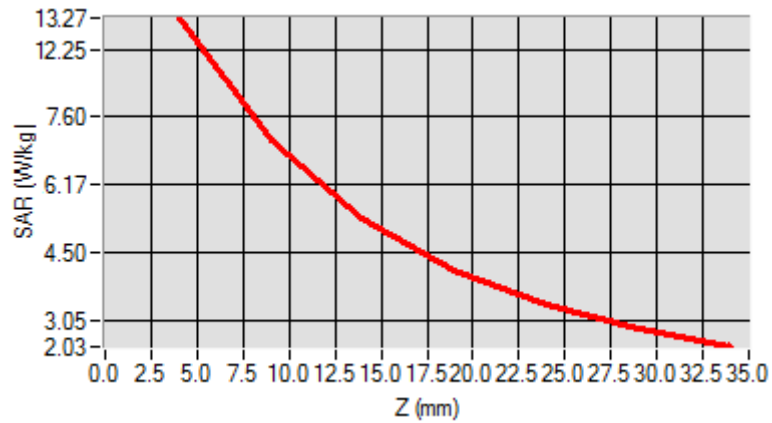

# MEASUREMENT 6

## For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 10/30/2019

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.58; Calibrated: 05/22/2019

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW2600
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2600.000000
<b>Relative Permittivity (real part)</b>	52.241202
<b>Conductivity (S/m)</b>	2.120943
<b>Power Variation (%)</b>	1.038832
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2


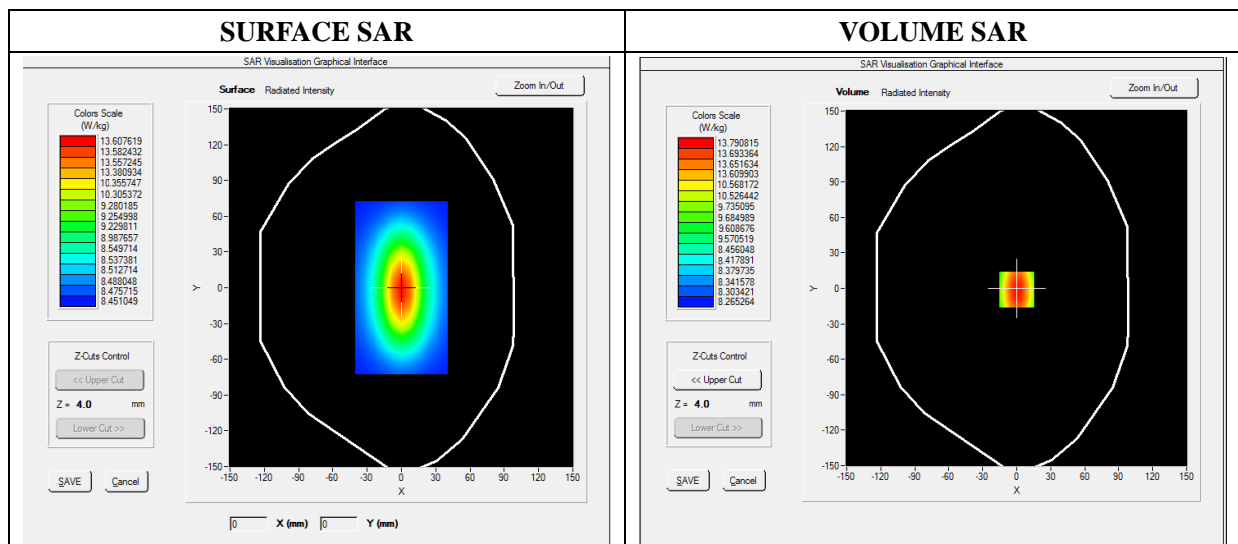


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	6.083781
SAR 1g (W/Kg)	13.430481

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	13.6473	11.8441	9.3627	8.5782	6.4357	4.6342

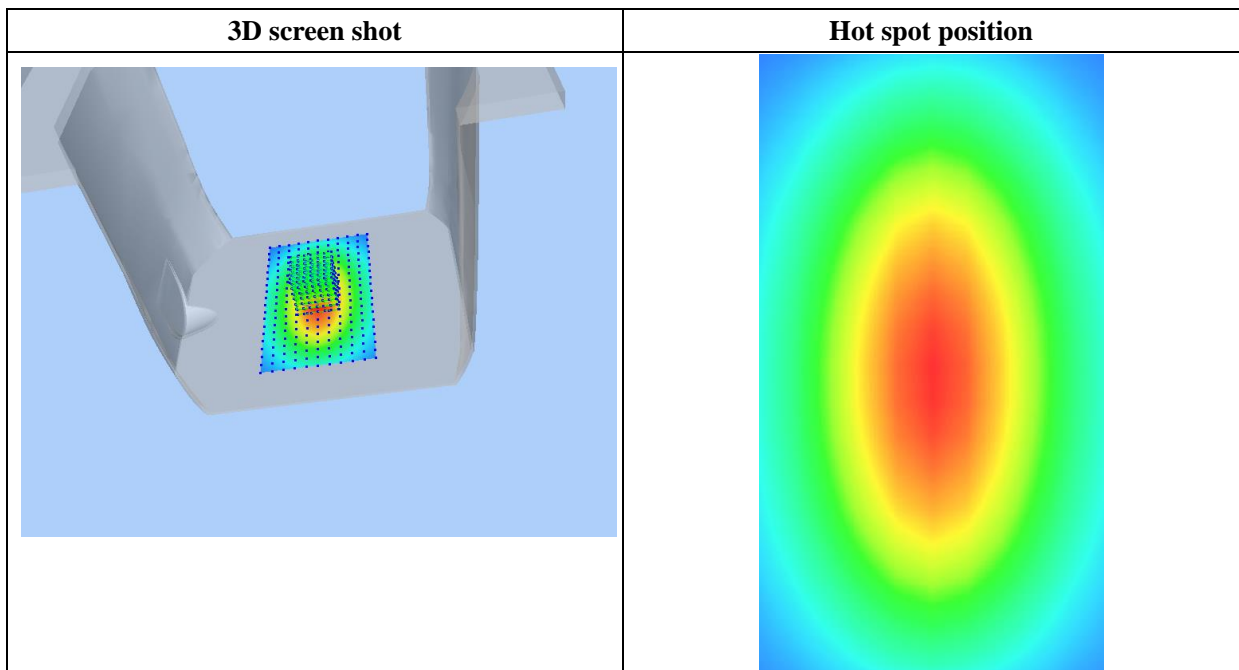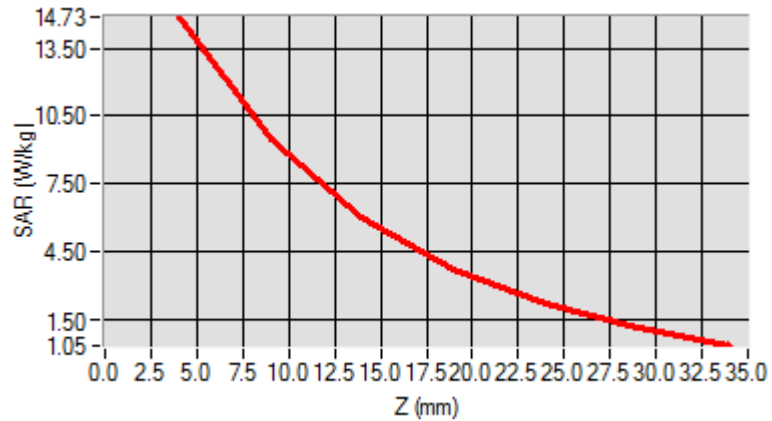

## Annex B. Plots of SAR Measurement

<b><u>TYPE</u></b>	<b><u>BAND</u></b>	<b><u>PARAMETERS</u></b>
<b>Tablet</b>	<b>GPRS850_3TX</b>	<u>Measurement 2:</u> Flat Plane with Front device position on Low Channel in GPRS mode
<b>Tablet</b>	<b>GPRS1900_3TX</b>	<u>Measurement 6:</u> Flat Plane with Back device position on Middle Channel in GPRS mode
<b>Tablet</b>	<b>WCDMA850_RMC</b>	<u>Measurement 12:</u> Flat Plane with Back device position on Middle Channel in WCDMA mode
<b>Tablet</b>	<b>WCDMA1900_RMC</b>	<u>Measurement 19:</u> Flat Plane with Front device position on Low Channel in WCDMA mode
<b>Tablet</b>	<b>LTE Band 2_RMC</b>	<u>Measurement 26:</u> Flat Plane with Back device position on Middle Channel in LTE QPSK 20MHz 1RB mode
<b>Tablet</b>	<b>LTE Band 4_RMC</b>	<u>Measurement 39:</u> Flat Plane with Left device position on Low Channel in LTE QPSK 20MHz 1RB mode
<b>Tablet</b>	<b>LTE Band 5_RMC</b>	<u>Measurement 48:</u> Flat Plane with Front device position on Low Channel in LTE QPSK 10MHz 1RB mode
<b>Tablet</b>	<b>LTE Band 7_RMC</b>	<u>Measurement 58:</u> Flat Plane with Front device position on Middle Channel in LTE QPSK 10MHz 1RB mode
<b>Tablet</b>	<b>WiFi(2.4G)_802.11b</b>	<u>Measurement 69:</u> Flat Plane with Top side device position on Low Channel in 802.11b mode
<i>Remark: SAR plot is showed the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.</i>		



## MEASUREMENT 2

Type: Phone measurement (Complete)

Date of measurement: 10/28/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 05/22/2019

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Front
<b>Band</b>	GPRS850_3TX
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle 1:2.66

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	824.200000
<b>Relative Permittivity (real part)</b>	54.851214
<b>Conductivity (S/m)</b>	0.951454
<b>Power Variation (%)</b>	0.903892
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

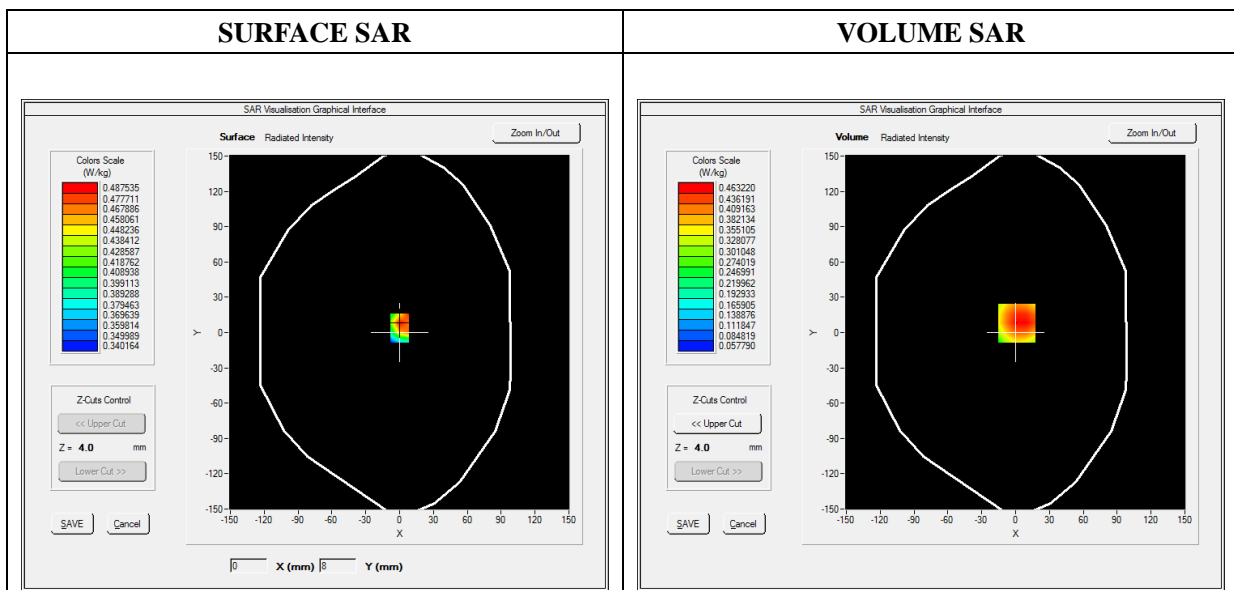




Maximum location: X=1.00, Y=8.00

SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.302141
SAR 1g (W/Kg)	0.451648

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5966	0.4632	0.3315	0.2320	0.1575

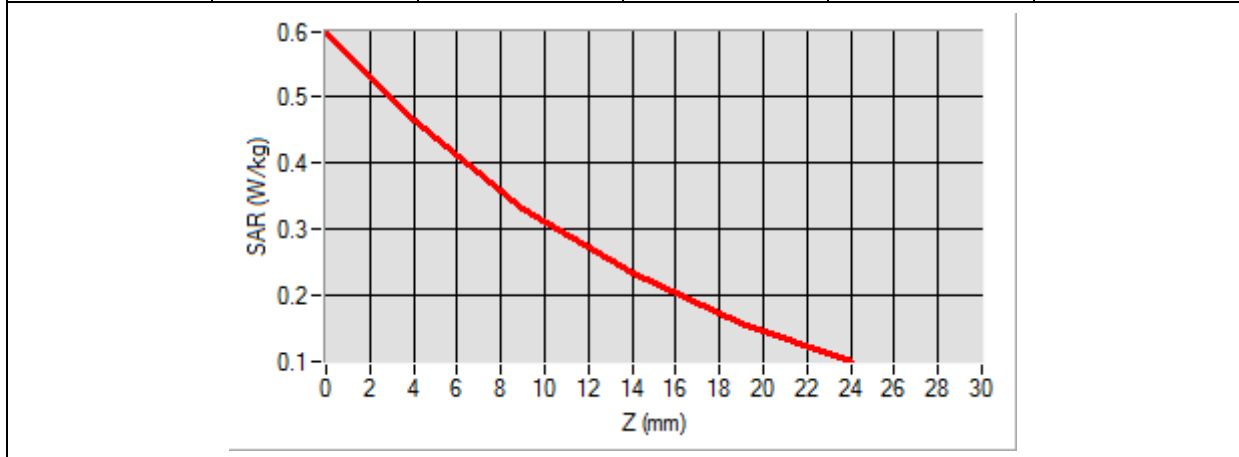
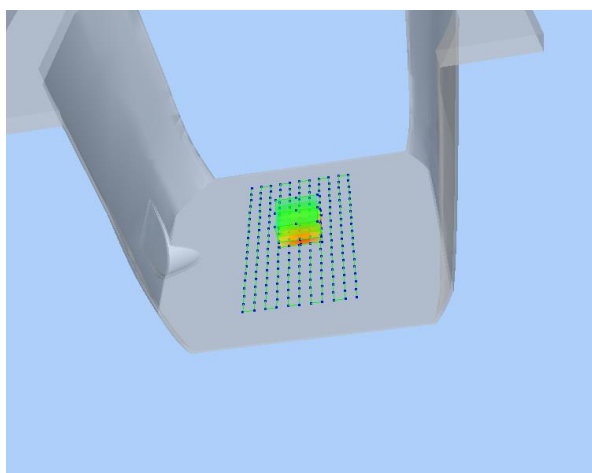
<b>3D screen shot</b>	<b>Hot spot position</b>
	

# MEASUREMENT 6

Type: Phone measurement (Complete)

Date of measurement: 10/29/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 05/22/2019

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Back
<b>Band</b>	GPRS1900_3TX
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle 1:2.66

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative Permittivity (real part)</b>	52.420415
<b>Conductivity (S/m)</b>	1.501966
<b>Power Variation (%)</b>	0.642662
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

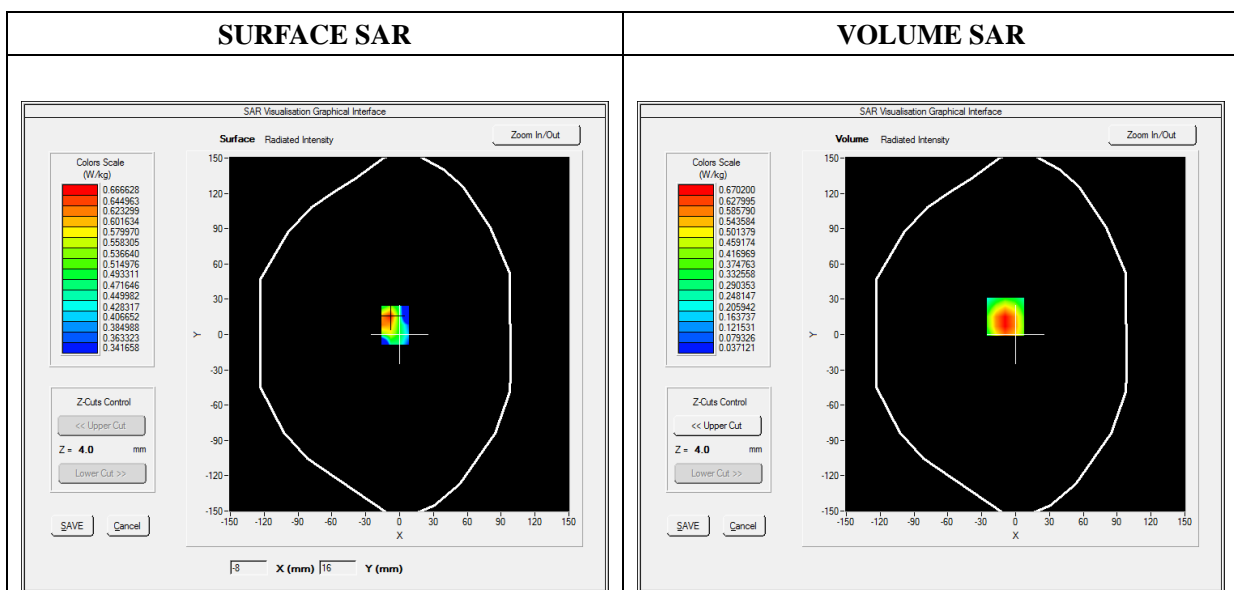




Maximum location: X=-9.00, Y=15.00

SAR Peak: 1.11 W/kg

SAR 10g (W/Kg)	0.356147
SAR 1g (W/Kg)	0.645304

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.5474	0.6702	0.3021	0.2031	0.1079

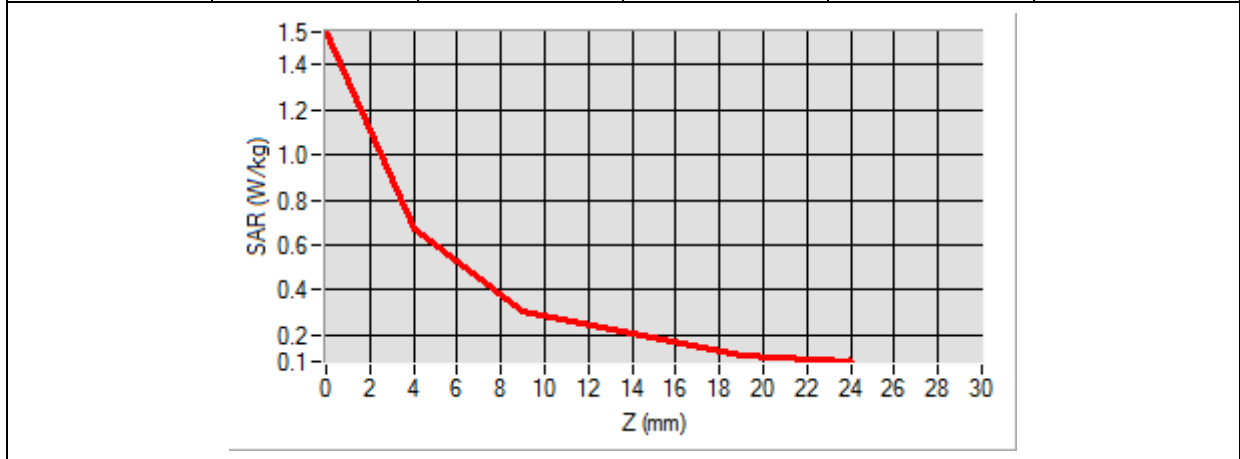
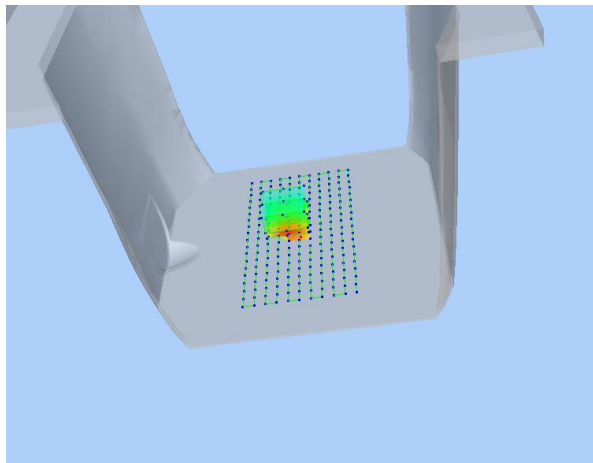
<p><b>3D screen shot</b></p>	<p><b>Hot spot position</b></p>
	

# MEASUREMENT 12

Type: Phone measurement (Complete)

Date of measurement: 10/28/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 05/22/2019

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Front
<b>Band</b>	WCDMA850_RMC
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle 1:1

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.600000
<b>Relative Permittivity (real part)</b>	54.851214
<b>Conductivity (S/m)</b>	0.951454
<b>Power Variation (%)</b>	0.707382
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

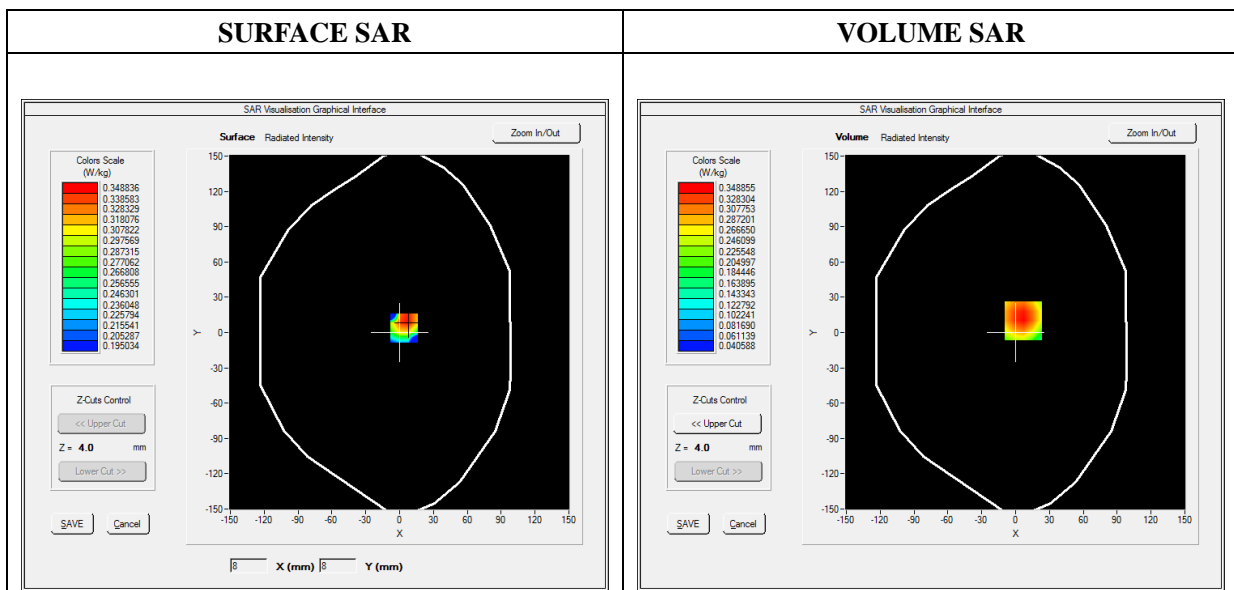




Maximum location: X=7.00, Y=10.00

SAR Peak: 0.49 W/kg

SAR 10g (W/Kg)	0.219753
SAR 1g (W/Kg)	0.337477

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4839	0.3489	0.2307	0.1547	0.1064

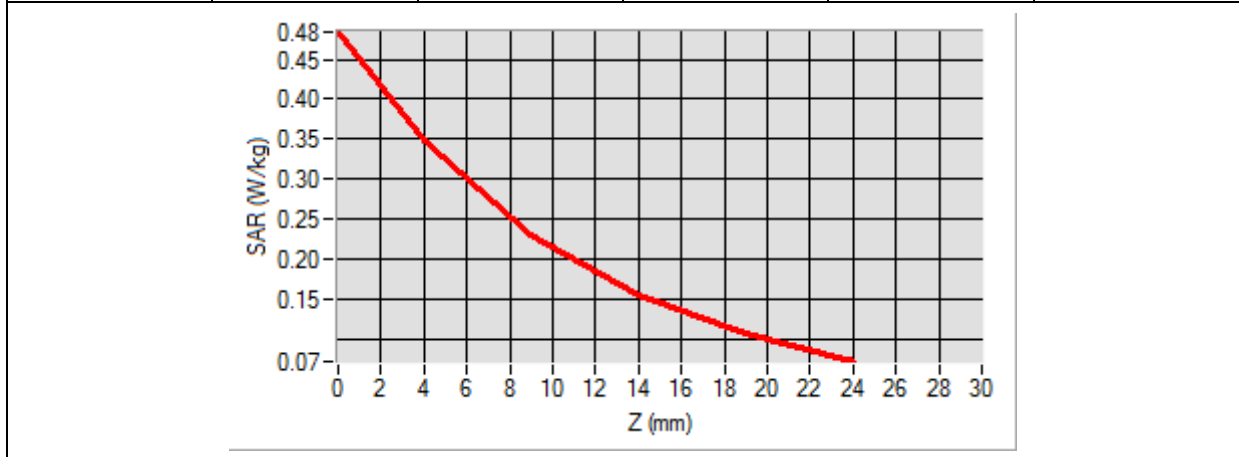

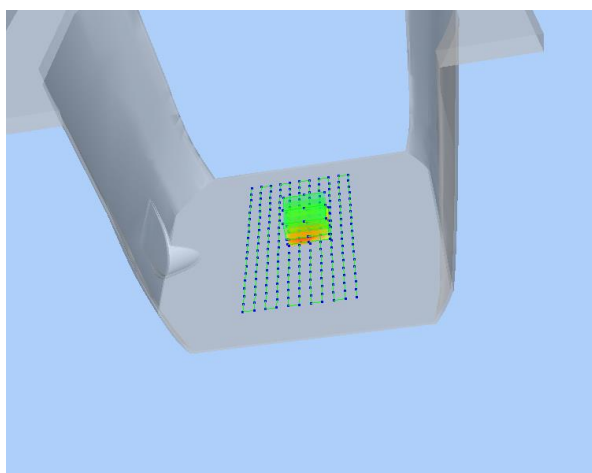3D screen shot	Hot spot position
	

# MEASUREMENT 19

Type: Phone measurement (Complete)

Date of measurement: 10/29/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 05/22/2019

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Front
<b>Band</b>	WCDMA1900_RMC
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle 1:1

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1852.400000
<b>Relative Permittivity (real part)</b>	52.420415
<b>Conductivity (S/m)</b>	1.501966
<b>Power Variation (%)</b>	0.706372
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

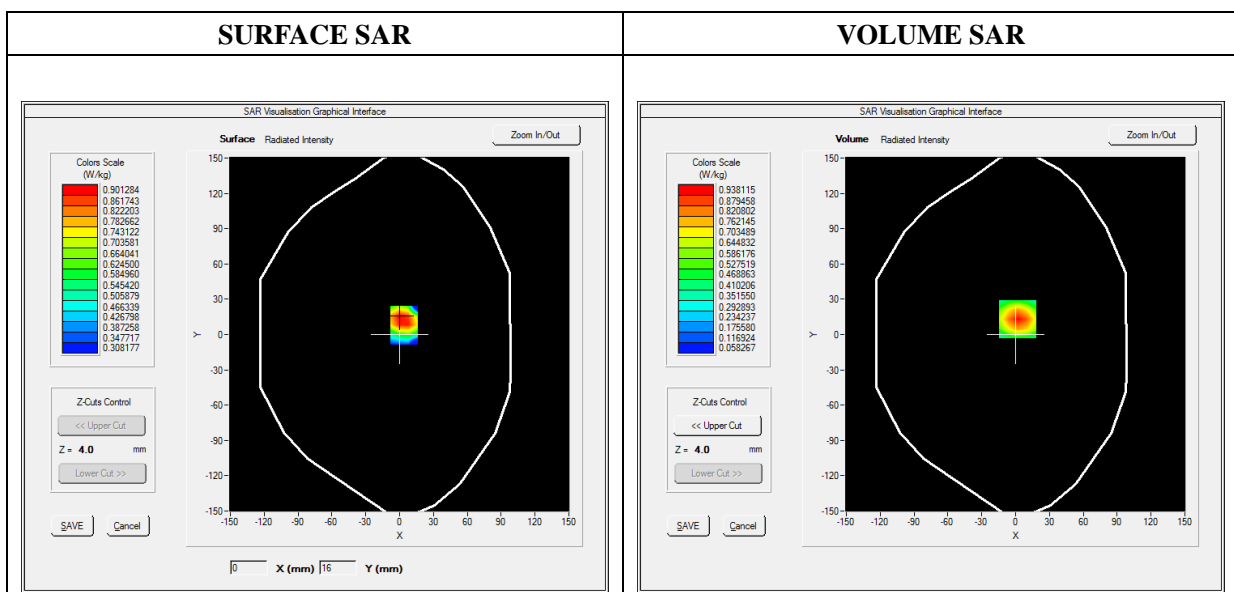




Maximum location: X=2.00, Y=13.00

SAR Peak: 1.39 W/kg

SAR 10g (W/Kg)	0.498107
SAR 1g (W/Kg)	0.876981

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.3917	0.9381	0.5633	0.3400	0.2106

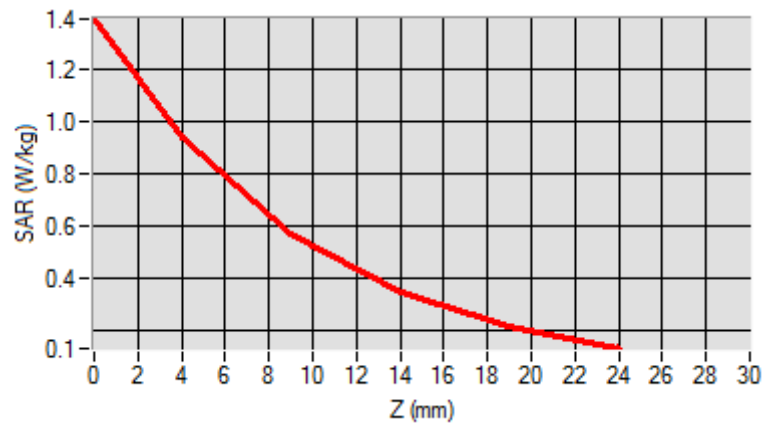
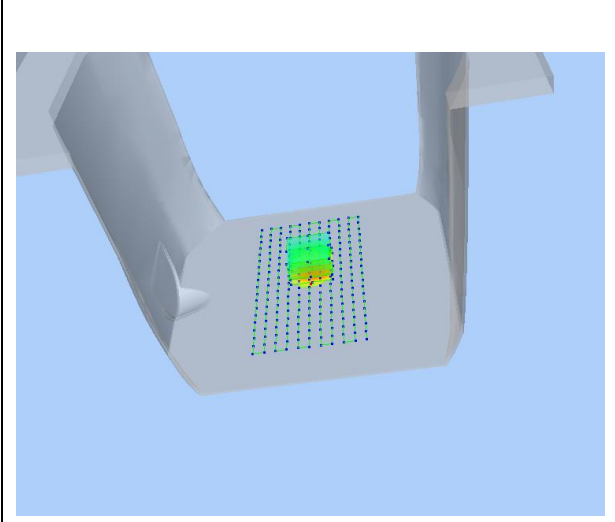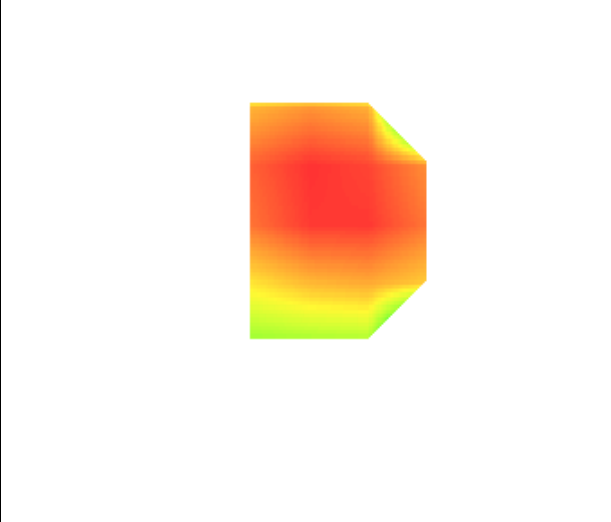
<p>3D screen shot</p>	<p>Hot spot position</p>
	



# MEASUREMENT 26

Type: Phone measurement (Complete)

Date of measurement: 10/29/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 05/22/2019

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	LTE Band 2_RMC
<b>Channels</b>	QPSK, 20MHz, 1RB,Middle
<b>Signal</b>	Duty Cycle 1:1

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative Permittivity (real part)</b>	52.420415
<b>Conductivity (S/m)</b>	1.501966
<b>Power Variation (%)</b>	1.523573
<b>Ambient Temperature</b>	21.1

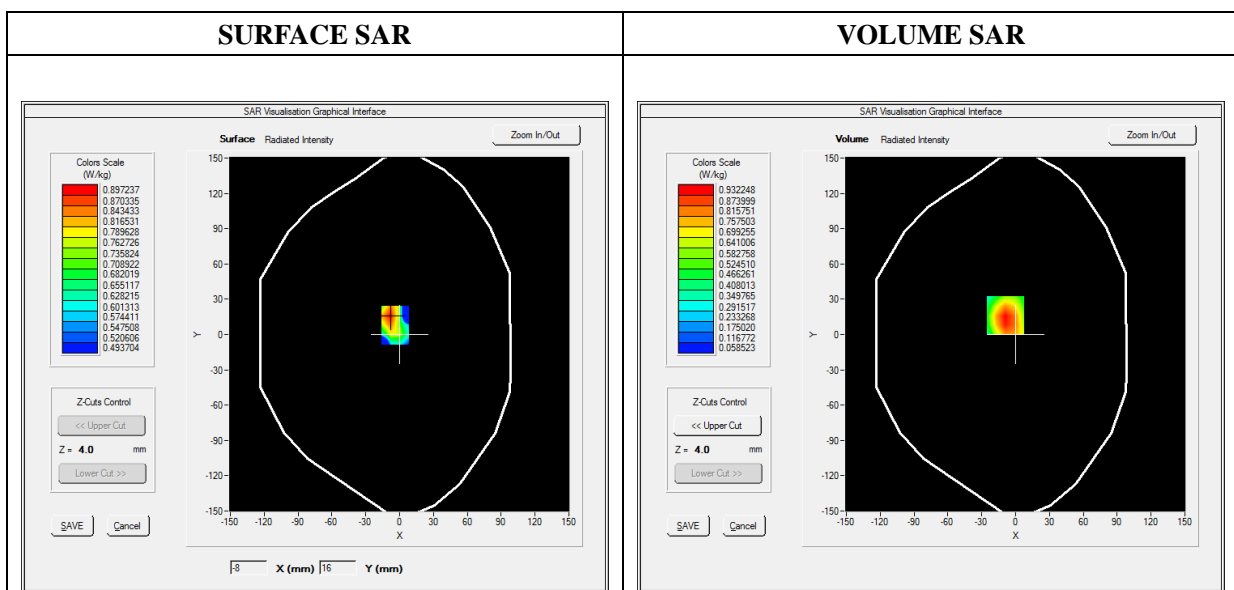




Maximum location: X=-9.00, Y=16.00

SAR Peak: 1.43 W/kg

SAR 10g (W/Kg)	0.512033
SAR 1g (W/Kg)	0.887546

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.4073	0.9322	0.5480	0.3261	0.2025

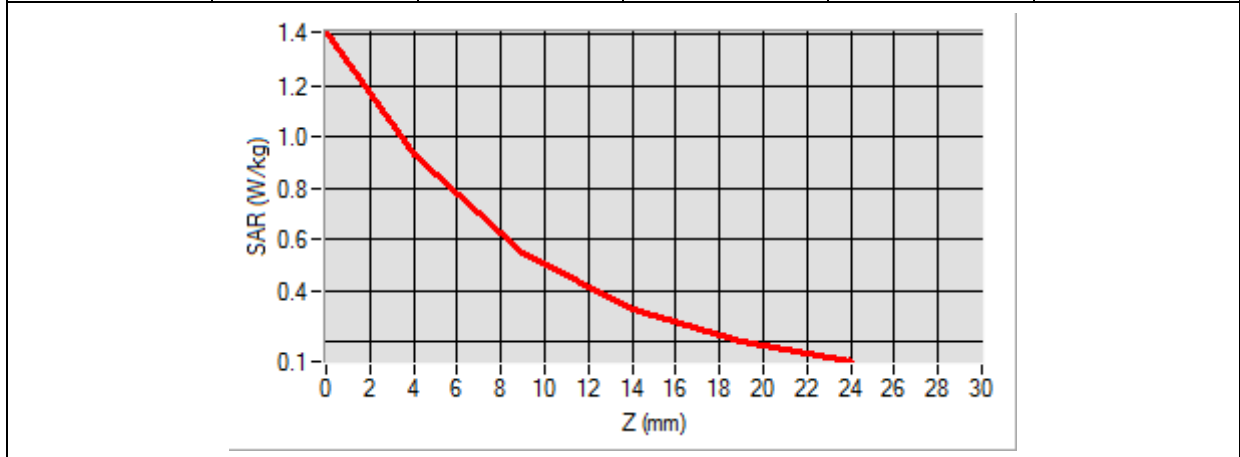
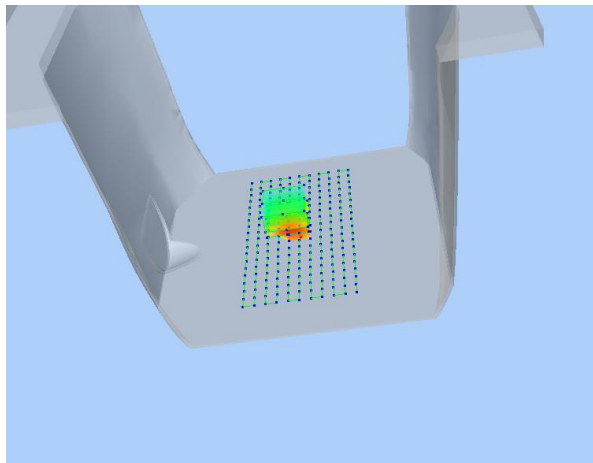
<p><b>3D screen shot</b></p>	<p><b>Hot spot position</b></p>
	

# MEASUREMENT 39

Type: Phone measurement (Complete)

Date of measurement: 10/29/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.06; Calibrated: 05/22/2019

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Left
<b>Band</b>	LTE Band 4_RMC
<b>Channels</b>	QPSK, 20MHz, 1RB, Low
<b>Signal</b>	Duty Cycle 1:1

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1720.000000
<b>Relative Permittivity (real part)</b>	51.221241
<b>Conductivity (S/m)</b>	1.460643
<b>Power Variation (%)</b>	0.858383
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2


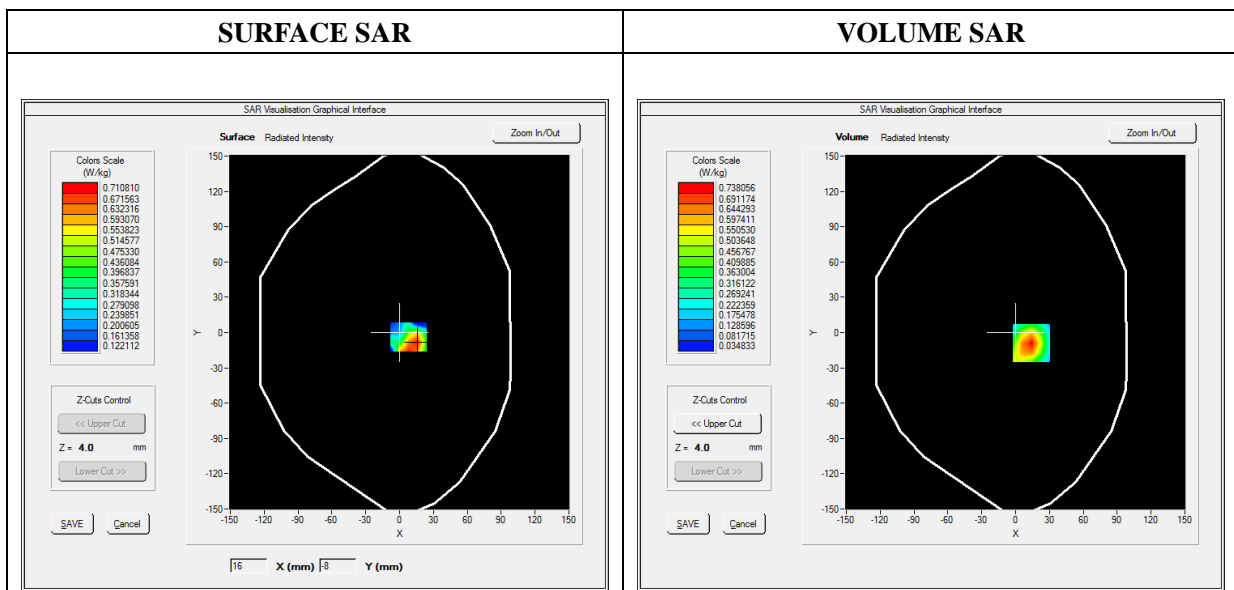


Maximum location: X=14.00, Y=-9.00

SAR Peak: 1.16 W/kg

SAR 10g (W/Kg)	0.367381
SAR 1g (W/Kg)	0.688108

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1372	0.7381	0.4206	0.2416	0.1448

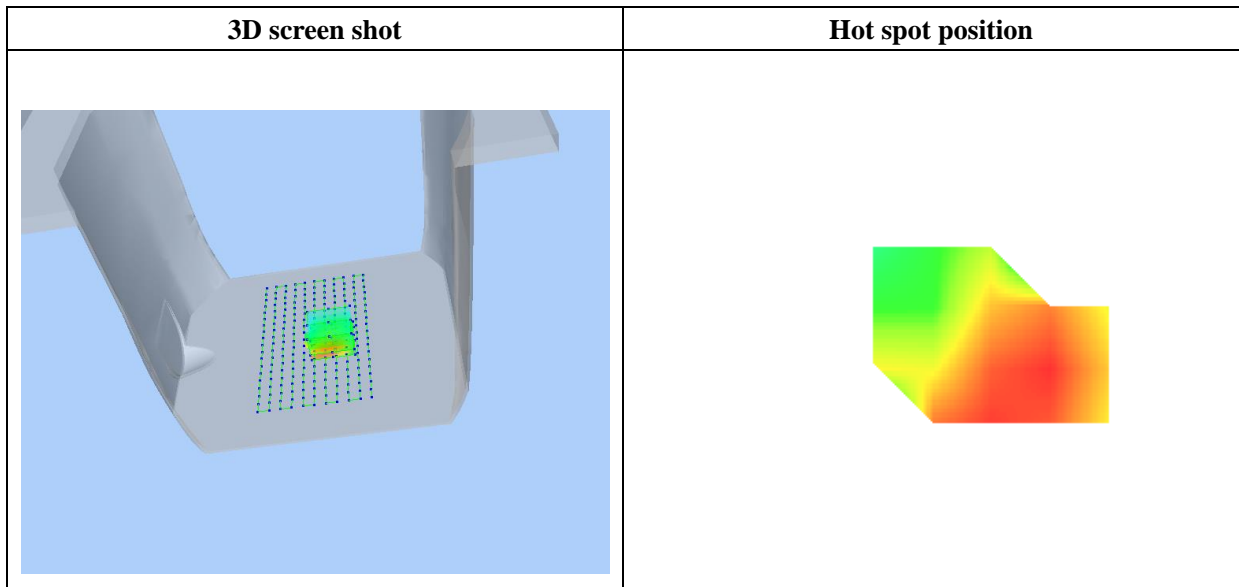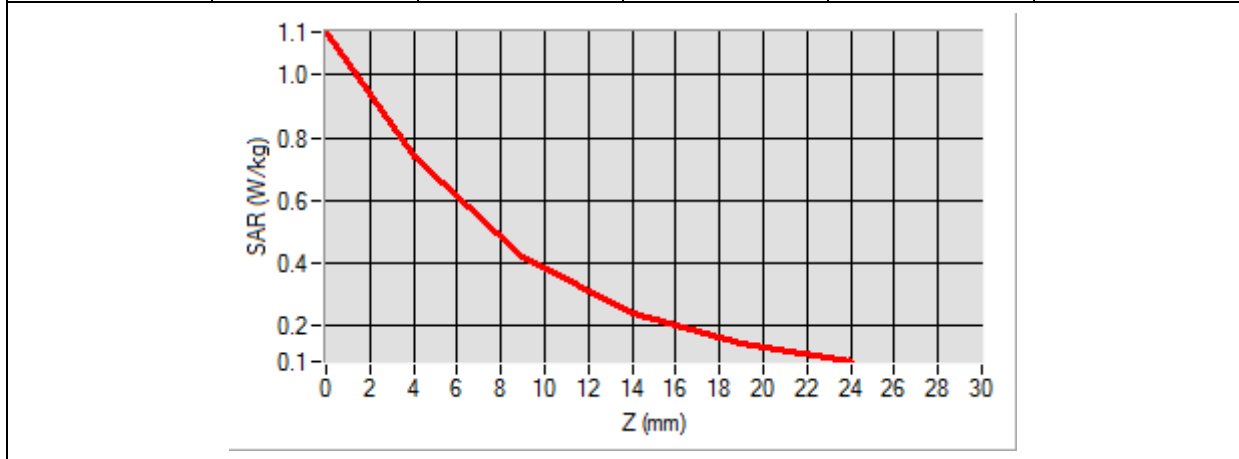

# MEASUREMENT 48

Type: Phone measurement (Complete)

Date of measurement: 10/28/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 05/22/2019

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	LTE Band 5_RMC
<b>Channels</b>	QPSK, 10MHz, 1RB, Middle
<b>Signal</b>	Duty Cycle 1:1

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	829.00000
<b>Relative Permittivity (real part)</b>	54.851214
<b>Conductivity (S/m)</b>	0.951454
<b>Power Variation (%)</b>	3.672346
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

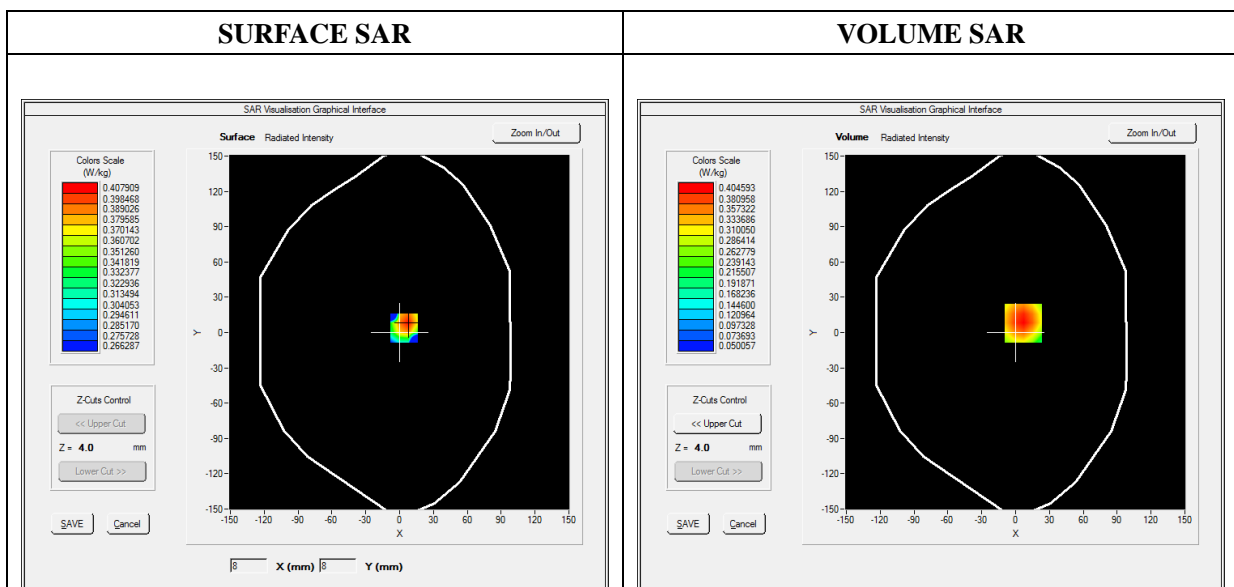




Maximum location: X=7.00, Y=8.00

SAR Peak: 0.56 W/kg

SAR 10g (W/Kg)	0.252958
SAR 1g (W/Kg)	0.386995

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5560	0.4046	0.2708	0.1836	0.1273

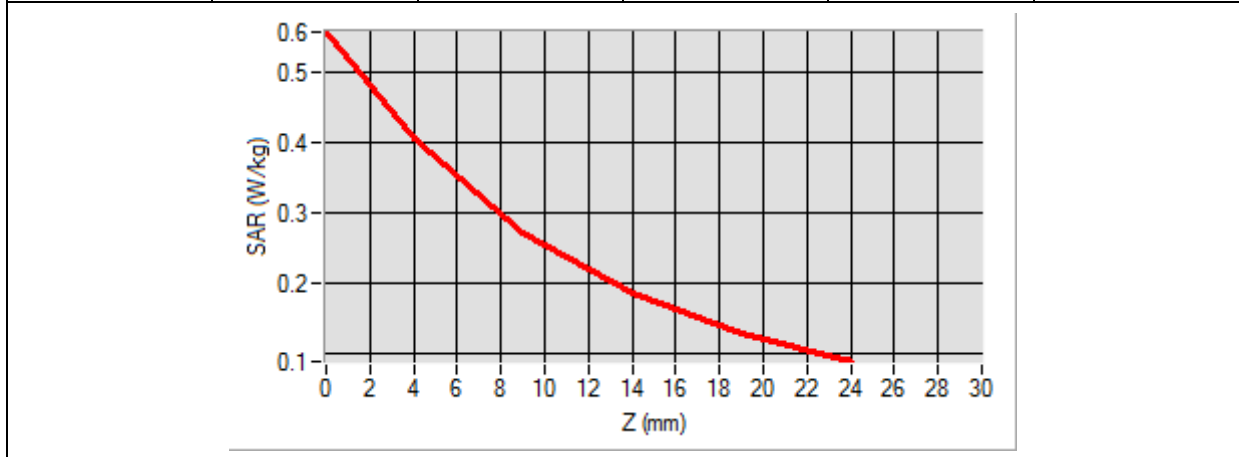

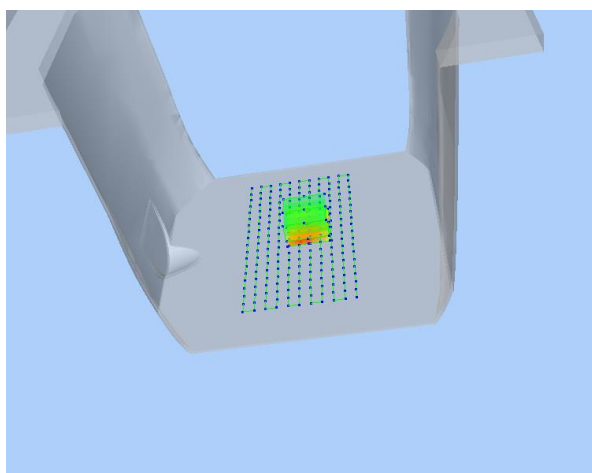3D screen shot	Hot spot position
	

# MEASUREMENT 58

Type: Phone measurement (Complete)

Date of measurement: 10/30/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.58; Calibrated: 05/22/2019

## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Front
<b>Band</b>	LTE Band 7_RMC
<b>Channels</b>	QPSK, 20MHz, 1RB, Middle
<b>Signal</b>	Duty Cycle 1:1

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	2535.000000
<b>Relative Permittivity (real part)</b>	52.241202
<b>Conductivity (S/m)</b>	2.120943
<b>Power Variation (%)</b>	3.672346
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

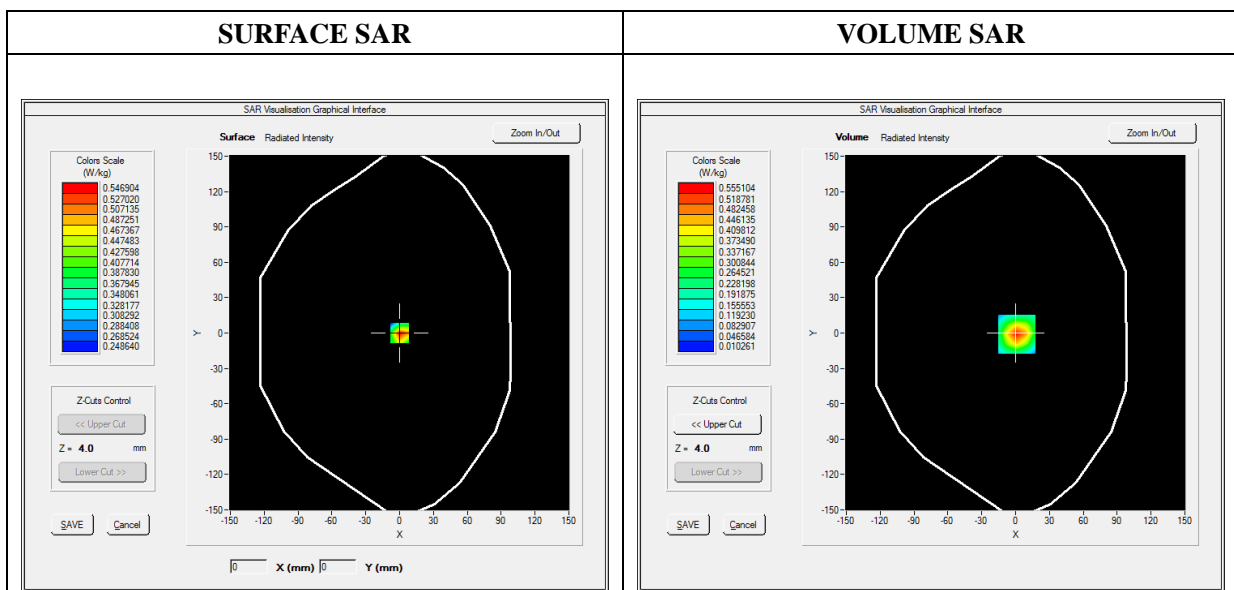




Maximum location: X=1.00, Y=-1.00

SAR Peak: 0.95 W/kg

SAR 10g (W/Kg)	0.239325
SAR 1g (W/Kg)	0.508163

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.9456	0.5551	0.2708	0.1305	0.0668

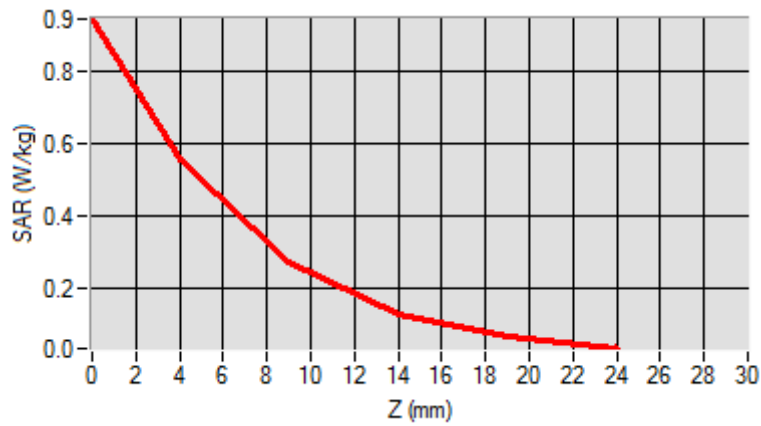

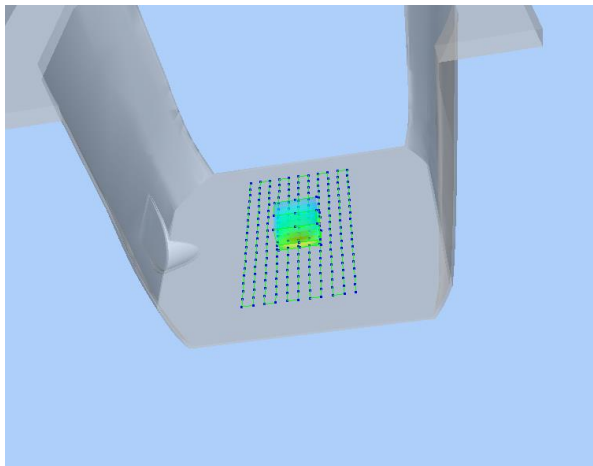3D screen shot	Hot spot position
	



# MEASUREMENT 69

Type: Phone measurement (Complete)

Date of measurement: 10/30/2019

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 05/22/2019

## A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Zoom Scan</b>	dx=8mm dy=8mm dz=5mm
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Top
<b>Band</b>	WiFi_802.11b
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle 1:1

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	2412.000000
<b>Relative Permittivity (real part)</b>	52.010212
<b>Conductivity (S/m)</b>	1.910255
<b>Power Variation (%)</b>	0.462345
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

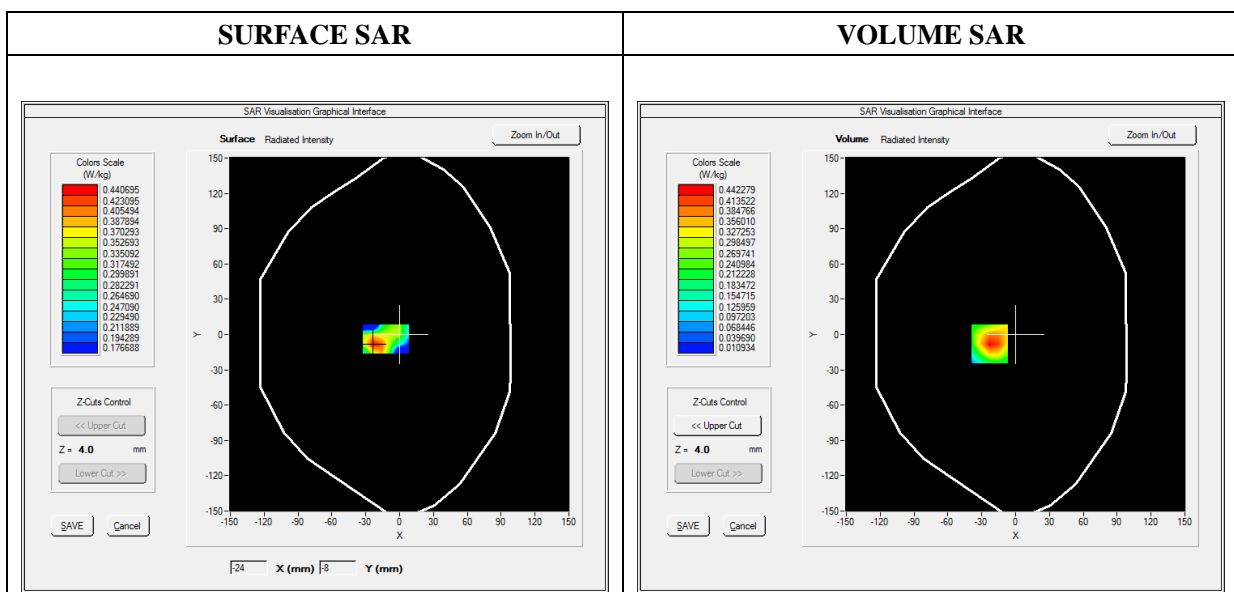




**Maximum location: X=-23.00, Y=-8.00**

**SAR Peak: 0.78 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.210037</b>
<b>SAR 1g (W/Kg)</b>	<b>0.418695</b>


<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.7645</b>	<b>0.4423</b>	<b>0.2107</b>	<b>0.0989</b>	<b>0.0495</b>

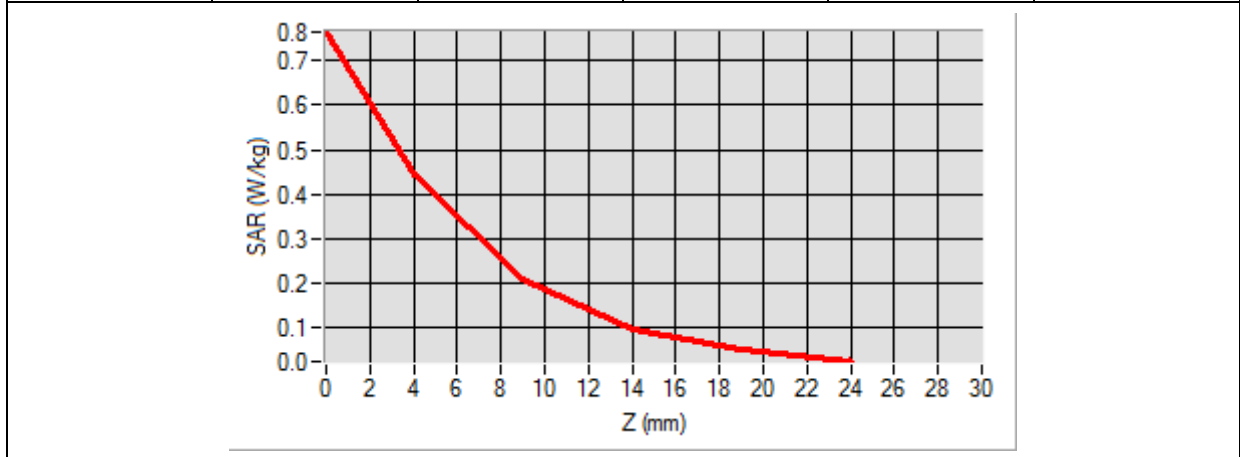

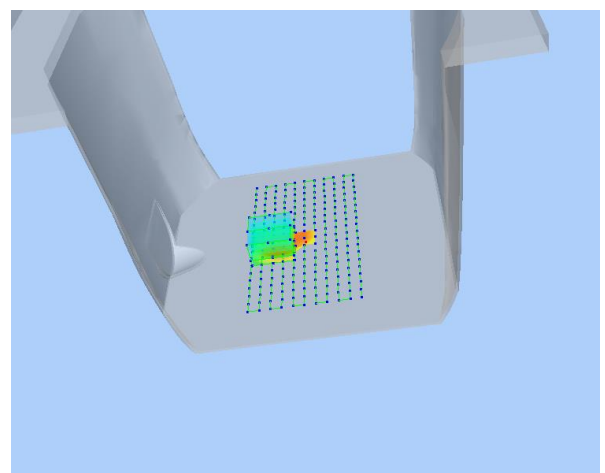
<b>3D screen shot</b>	<b>Hot spot position</b>
	

## Annex C. EUT Photos


### EUT View Front

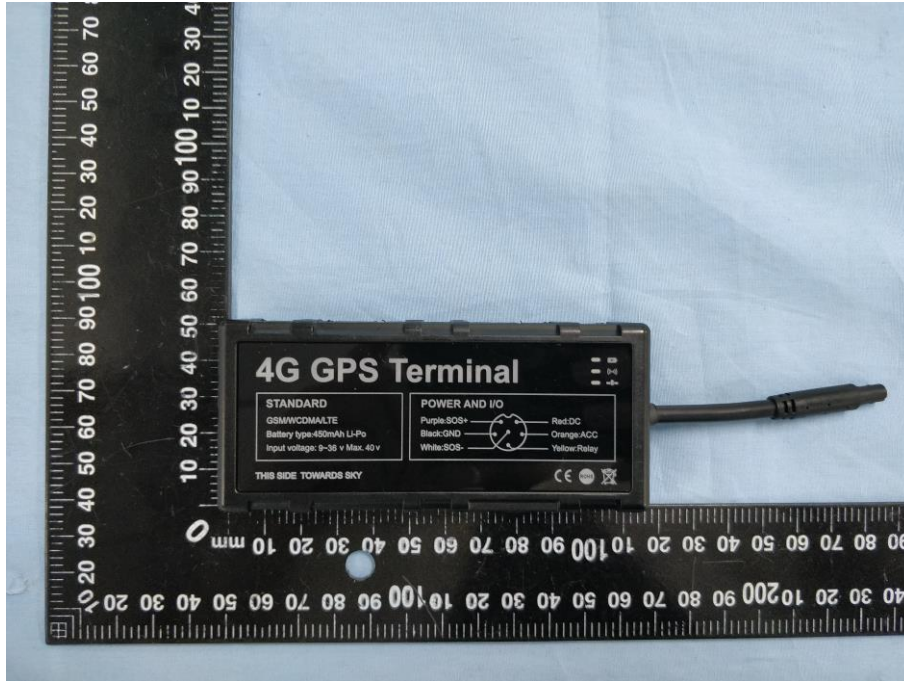

### EUT View Back

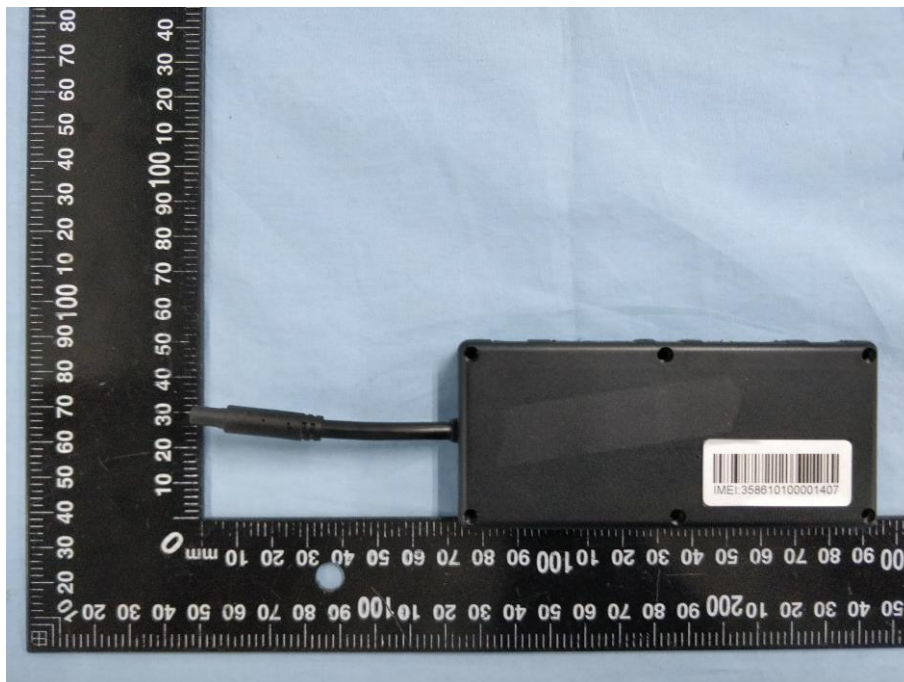

Antenna View

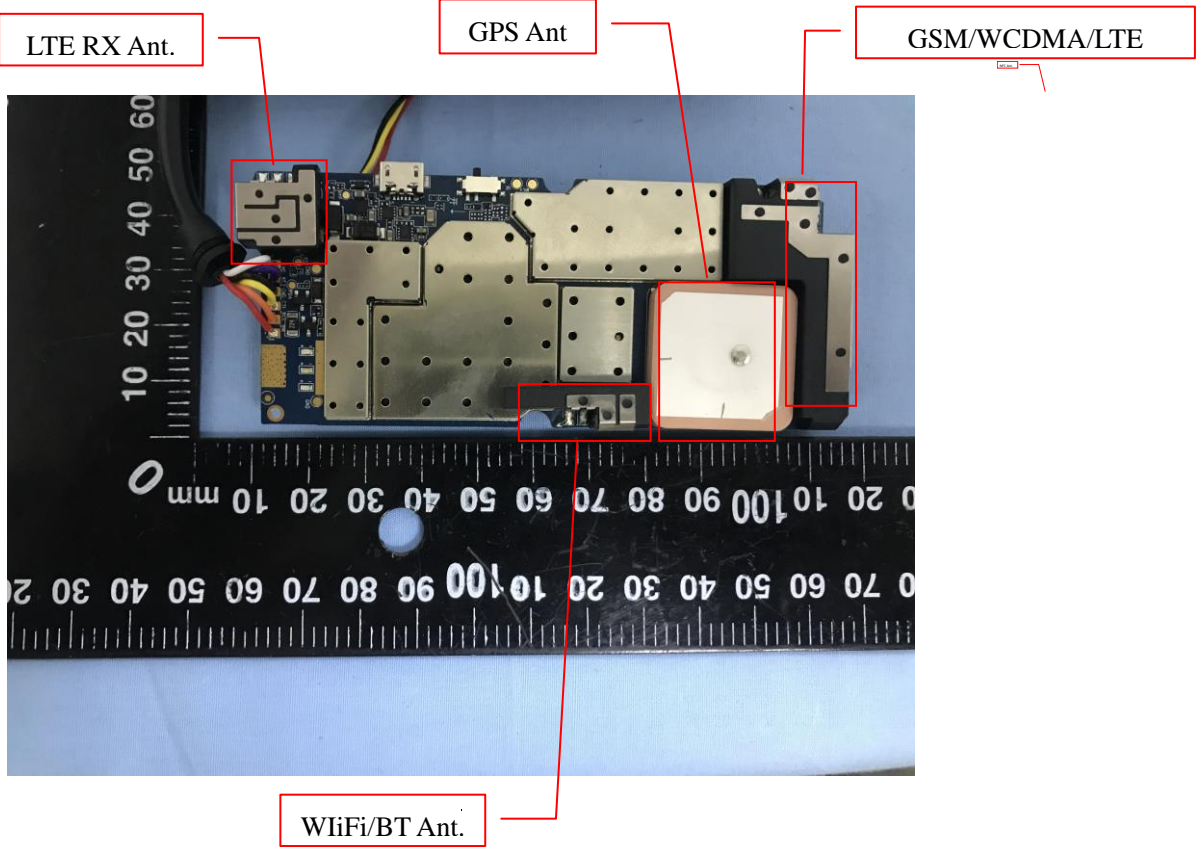

## Annex D. Test Setup Photos


---



### Body Exposure Conditions

**Body Back**




**Body Front**

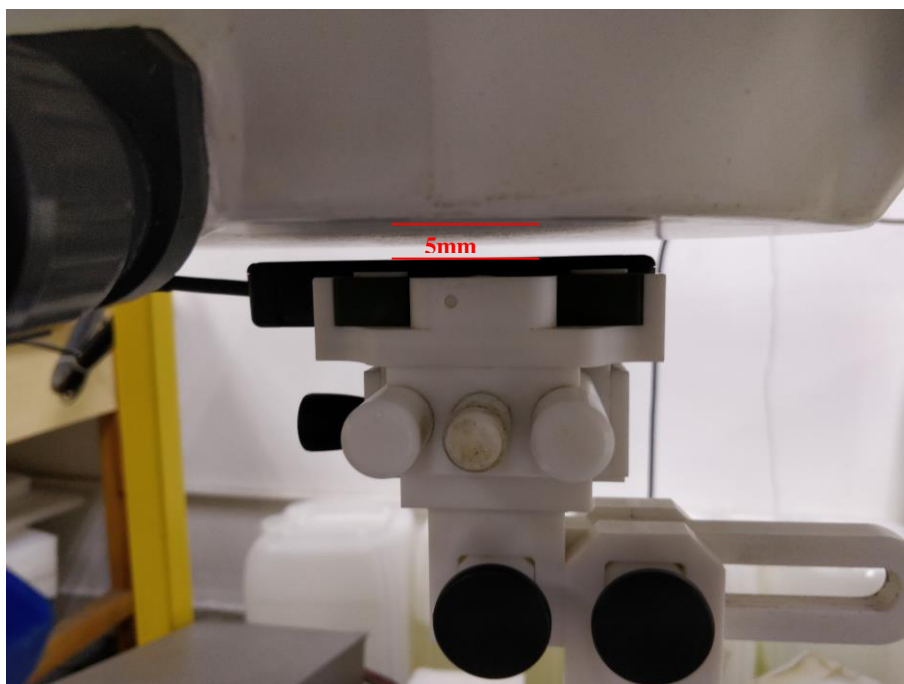

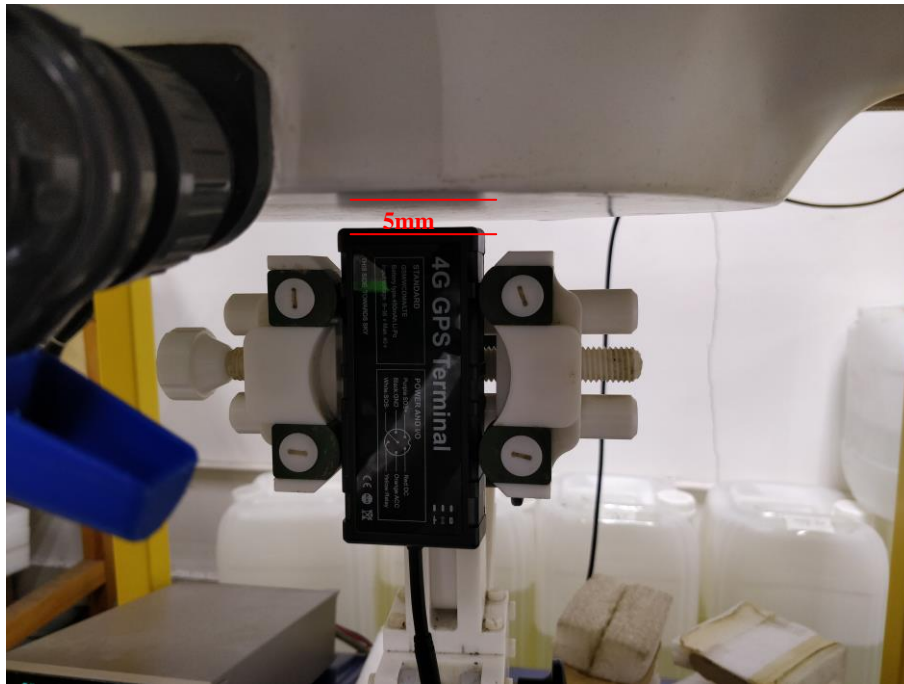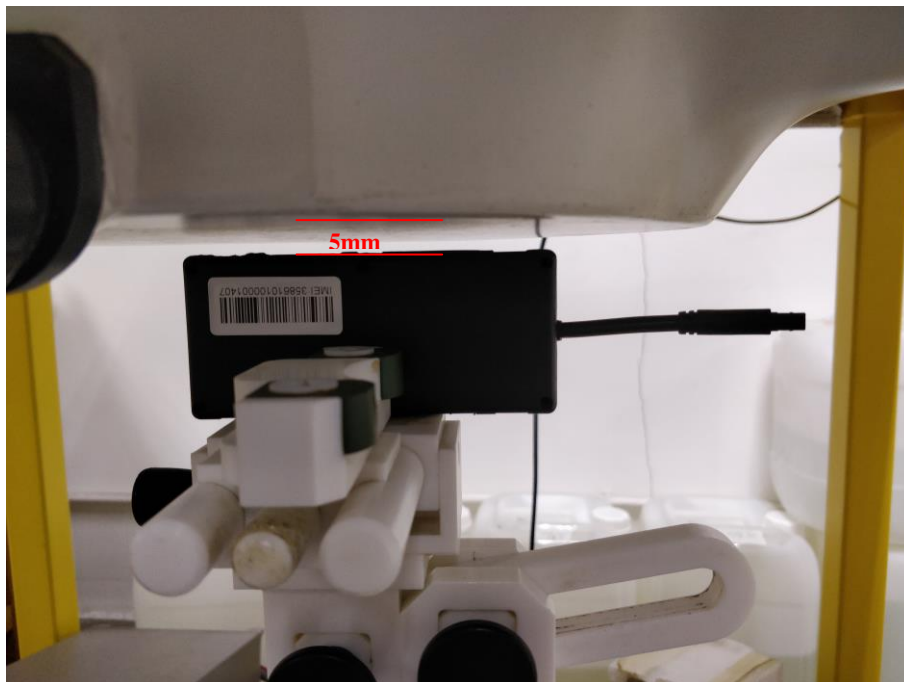**Body Left****Body Bottom**



## Body Top

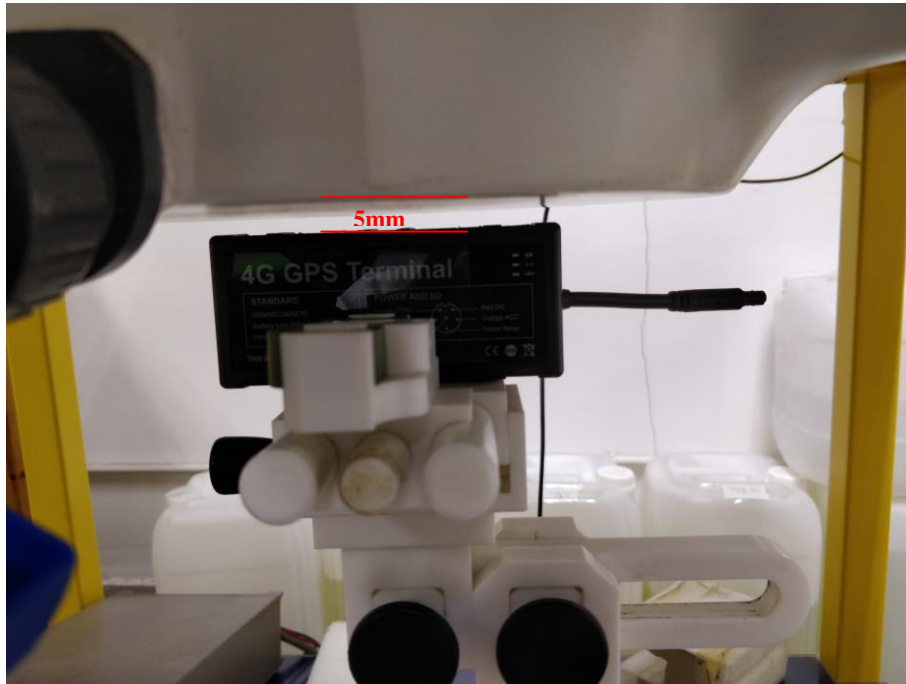

## Annex E. Calibration Certificate

---

**Please refer to the Exhibit for the Calibration Certificate**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***